

TEST REPORT

EUT Description	WLAN and BT, 2x2 PCIe M.2 2230 adapter card
Brand Name	Intel® Wi-Fi 6E AX210
Model Name	AX210NGW
FCC ID / IC ID	FCCID: PD9AX210NG/ IC 1000M-AX210NG
Date of Test Start/End	2020-07-23 / 2020-08-06
Features	802.11ax, Dual Band, 2x2 Wi-Fi 6 + Bluetooth® 5.2 (see section 5)

Applicant	Intel Mobile Communications
Address	100 Center Point Circle, Suite 200 Columbia, South Carolina 29210 USA
Contact Person	Steven Hackett
Telephone/Fax/ Email	steven.c.hackett@intel.com

Reference Standards	FCC CFR Title 47 Part 15 E RSS-247 issue 2, RSS-Gen issue 5 - A1 (see section 1)
---------------------	--

Test Report identification	200611-03.TR03
Revision Control	Rev. 01 This test report revision replaces any previous test report revision (see section 8)

The test results relate only to the samples tested.

This report shall not be reproduced, except in full, without the written approval of the laboratory.

Reference to accreditation shall be used only by full reproduction of test report.

Issued by

Reviewed by

Zayd OUACHICHA
(Test Engineer Lead)

Cheiel IN
(Technical Manager)

Intel Corporation S.A.S – WRF Lab
425 rue de Goa – Le Cargo B6 - 06600, Antibes, France
Tel. +33493001400 / Fax +33493001401

Table of Contents

1. Standards, reference documents and applicable test methods	3
2. General conditions, competences and guarantees	3
3. Environmental Conditions	3
4. Test samples	4
5. EUT Features	5
6. Remarks and comments	5
7. Test Verdicts summary	5
7.1. 802.11 A/N/AC/AX – U-NII- 3	5
8. Document Revision History	5
Annex A. Test & System Description	6
A.1 MEASUREMENT SYSTEM.....	6
A.2 TEST EQUIPMENT LIST	8
A.3 MEASUREMENT UNCERTAINTY EVALUATION	10
Annex B. Test Results U-NII-3.....	11
B.1 TEST CONDITIONS.....	11
B.2 TEST RESULTS TABLES	13
B.2.1 6dB & 99% Bandwidth	13
B.2.2 Power Limits. Maximum output power & Maximum power spectral Density	16
B.2.3 Undesirable emission limits : out of band (Conducted).....	26
B.2.4 Radiated spurious emission.....	27
B.2.5 6dB Bandwidth	41
B.2.6 6dB Bandwidth (Overlapped Channel)	45
B.2.7 99% Bandwidth.....	48
B.2.8 26dB Bandwidth (Overlapped Channel)	52
B.2.9 Maximum output power	55
B.2.10 Maximum output power (Overlapped Channel)	59
B.2.11 Maximum power spectral Density.....	62
B.2.12 Maximum power spectral Density (Overlapped Channel).....	66
B.2.13 Undesirable emission limits : out of band (Conducted).....	70
Annex C. Photographs	96
C.1 TEST SETUP	96
C.2 TEST SAMPLE	97

1. Standards, reference documents and applicable test methods

FCC	1. FCC Title 47 CFR part 15 – Subpart E – Unlicensed National Information Infrastructure Devices. 2019-10-01 Edition 2. FCC Title 47 CFR part 15 – Subpart C – §15.209 Radiated emission limits; general requirements. 2019-10-01 Edition 3. FCC OET KDB 789033 D02 v02r01 - General U-NII Test Procedures New Rules – Guidelines for compliance testing of Unlicensed National Information Infrastructure (U-NII) Devices (Part 15, Subpart E) 4. FCC OET KDB 662911 D01 v02r01 - Emissions Testing of Transmitters with Multiple Outputs in the Same Band. 5. ANSI C63.10-2013 American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.
ISED	1. RSS-Gen Issue 5 Amendment 1 - General Requirements for Compliance of Radio Apparatus. 2. RSS-247 Issue 2 - Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and License-Exempt Local Area Network (LE-LAN) Devices. 3. FCC OET KDB 789033 D02 v02r01 - General U-NII Test Procedures New Rules – Guidelines for compliance testing of Unlicensed National Information Infrastructure (U-NII) Devices (Part 15, Subpart E) 4. FCC OET KDB 662911 D01 v02r01 - Emissions Testing of Transmitters with Multiple Outputs in the Same Band. 5. ANSI C63.10-2013 American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

2. General conditions, competences and guarantees

- ✓ Tests performed under FCC standards identified in section 1 are covered by A2LA accreditation.
- ✓ Tests performed under ISED standards identified in section 1 are covered by Cofrac accreditation.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an ISO/IEC 17025:2017 laboratory accredited by the American Association for Laboratory Accreditation (A2LA) with the certificate number 3478.01.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an Accredited Test Firm recognized by the FCC, with Designation Number FR0011.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an ISO/IEC 17025:2017 testing laboratory accredited by the French Committee for Accreditation (Cofrac) with the certificate number 1-6736.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is a Registered Test Site listed by ISED, with ISED #1000Y.
- ✓ Intel WRF Lab declines any responsibility with respect to the identified information provided by the customer and that may affect the validity of results.
- ✓ Intel WRF Lab only provides testing services and is committed to providing reliable, unbiased test results and interpretations.
- ✓ Intel WRF Lab is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.
- ✓ Intel WRF Lab has developed calibration and proficiency programs for its measurement equipment to ensure correlated and reliable results to its customers.
- ✓ This report is only referred to the item that has undergone the test.
- ✓ This report does not imply an approval of the product by the Certification Bodies or competent Authorities.
- ✓ Complete or partial reproduction of the report cannot be made without written permission of Intel WRF Lab.

3. Environmental Conditions

- ✓ At the site where the measurements were performed the following limits were not exceeded during the tests:

Temperature	23°C ± 2°C
Humidity	61% ± 10%

4. Test samples

Sample	Control #	Description	Model	Serial #	Date of receipt	Note
#01	200611-03.S03	WiFi 6E Module	AX210NGW	WFM:9C297662CA0A	2020-07-15	Used for 1-6.4 GHz RSE tests
	170209-01.S16	Laptop	E5470	C1HTPF2	2017-05-24	
	200226-02.S04	Extender	ADEXELEC	-	2020-04-30	
	200611-03.S13	Main Antenna	Skycross	-	2020-07-15	
	200611-03.S14	Aux Antenna	Skycross	-	2020-07-15	
#02	200611-03.S01	WiFi 6E Module	AX210NGW	WFM:9C297662CA5F	2020-07-15	Used for 6.4-18 GHz RSE tests
	170000-01.S01	Laptop	E5470	DBPLMC2	2017-03-28	
	200611-03.S26	Extender	A3030-Flex	412	2020-07-01	
	200611-03.S20	Main Antenna	Skycross	-	2020-07-01	
	200611-03.S21	Aux Antenna	Skycross	-	2020-07-01	
#03	200611-03.S01	WiFi 6E Module	AX210NGW	WFM:9C297662CA5F	2020-07-15	Used for 30MHz – 1GHz & 18 GHz- 40 GHz RSE tests
	170000-01.S01	Laptop	E5470	DBPLMC2	2017-03-28	
	200611-03.S26	Extender	A3030-Flex	412	2020-07-01	
	200611-03.S20	Main Antenna	Skycross	-	2020-07-01	
	200611-03.S21	Aux Antenna	Skycross	-	2020-07-01	
#04	200611-03.S10	WiFi 6E Module	AX210NGW	WFM:9C297662C6BD	2020-07-15	RF Conducted
	170000-01.S02	Laptop	Latitude E5450	21HTPF2	2017-03-28	
	170524-01.S13	Extender	PCB00495	4955013-032	2017-05-29	

5. EUT Features

The herein information is provided by the customer

Brand Name	Intel® Wi-Fi 6E AX210																	
Model Name	AX210NGW																	
Software Version	DRTU version: OEM_DRTU_CommonApp_00830_99_3500_51W DRTU version: OEM_DRTU_CommonApp_01299_99_3500_51W used for 802.11ax RU test on output power and band edges measurements																	
Driver Version	99.0.55.2 V0.13.2.15 99.0.55.2 V0.13.2.16 used for 802.11ax RU test on output power and band edges measurements																	
Prototype / Production	Production																	
Supported Radios	802.11b/g/n/ax 2.4GHz (2400.0 – 2483.5 MHz) 802.11a/n/ac/ax 5.2GHz (5150.0 – 5350.0 MHz) 5.6GHz (5470.0 – 5725.0 MHz) 5.8GHz (5725.0 – 5895.0 MHz) Bluetooth 5.2 2.4GHz (2400.0 – 2483.5 MHz)																	
Antenna Information	<table><tr><td>Transmitter</td><td>Chain A (Main)</td><td>Chain B (Aux)</td></tr><tr><td>Manufacturer</td><td>SkyCross</td><td>Skycross</td></tr><tr><td>Antenna type</td><td>PIFA antenna</td><td>PIFA antenna</td></tr><tr><td>Part number</td><td>N/A</td><td>N/A</td></tr><tr><td>Declared Antenna gain (dBi)</td><td>+5</td><td>+5</td></tr></table>			Transmitter	Chain A (Main)	Chain B (Aux)	Manufacturer	SkyCross	Skycross	Antenna type	PIFA antenna	PIFA antenna	Part number	N/A	N/A	Declared Antenna gain (dBi)	+5	+5
Transmitter	Chain A (Main)	Chain B (Aux)																
Manufacturer	SkyCross	Skycross																
Antenna type	PIFA antenna	PIFA antenna																
Part number	N/A	N/A																
Declared Antenna gain (dBi)	+5	+5																
Document	<table><tr><td>Filename</td><td>Date of receipt</td></tr><tr><td>Intel_Ref_Antenna data_HMC-M2Ant_Spec_Universe_SkyCross Antenna</td><td>2013-01-28</td></tr></table>			Filename	Date of receipt	Intel_Ref_Antenna data_HMC-M2Ant_Spec_Universe_SkyCross Antenna	2013-01-28											
Filename	Date of receipt																	
Intel_Ref_Antenna data_HMC-M2Ant_Spec_Universe_SkyCross Antenna	2013-01-28																	

6. Remarks and comments

- No deviations were made from the test methods listed in section 1 of this report
- Only the worst case plot per 802.11 mode and per test case have been reported except that band edge where all plots were reported

7. Test Verdicts summary

The statement of conformity to applicable standards in the table below are based on the measured values, without taking into account the measurement uncertainties.

7.1. 802.11 a/n/ac/ax – U-NII- 3

FCC part	RSS clause	Test name	Verdict
15.407 (a) (3)	RSS-247 Clause 6.2.4.1	Power Limits. Maximum output power	P
15.407 (a) (3)	RSS-247 Clause 6.2.4.1	Maximum power spectral density	P
15.407 (b) (3)	RSS-247 Clause 6.2.4.2	Undesirable emissions limits: out of band (conducted)	P
15.407 (b) (3) 15.209	RSS-247 Clause 6.2.4.2 RSS-GEN A1 Clause 8.9	Undesirable emissions limits (radiated)	P

8. Document Revision History


Revision #	Modified by	Revision Details
Rev. 00	I.Kharrat	First Issue
Rev.01	Z.OUACHICHA	Modification of EUT features section. Addition of frequency column on table results.

Annex A. Test & System Description

A.1 Measurement System


Measurements were performed using the following setups, made in accordance to the general provisions of FCC KDB 789033 D02 General UNII Test Procedures.

The DUT was installed in a test fixture and this test fixture is connected to a laptop computer and AC/DC power adapter. The laptop computer was used to configure the EUT to continuously transmit at a specified output power using all different modes and modulation schemes, using the Intel proprietary tool DRTU.

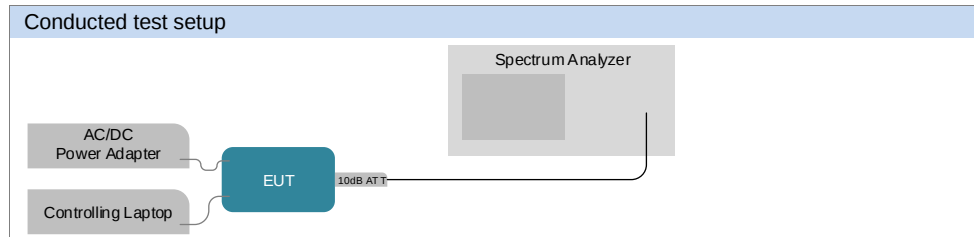


Radiated test setup


Radiated Setup 30 MHz - 1 GHz

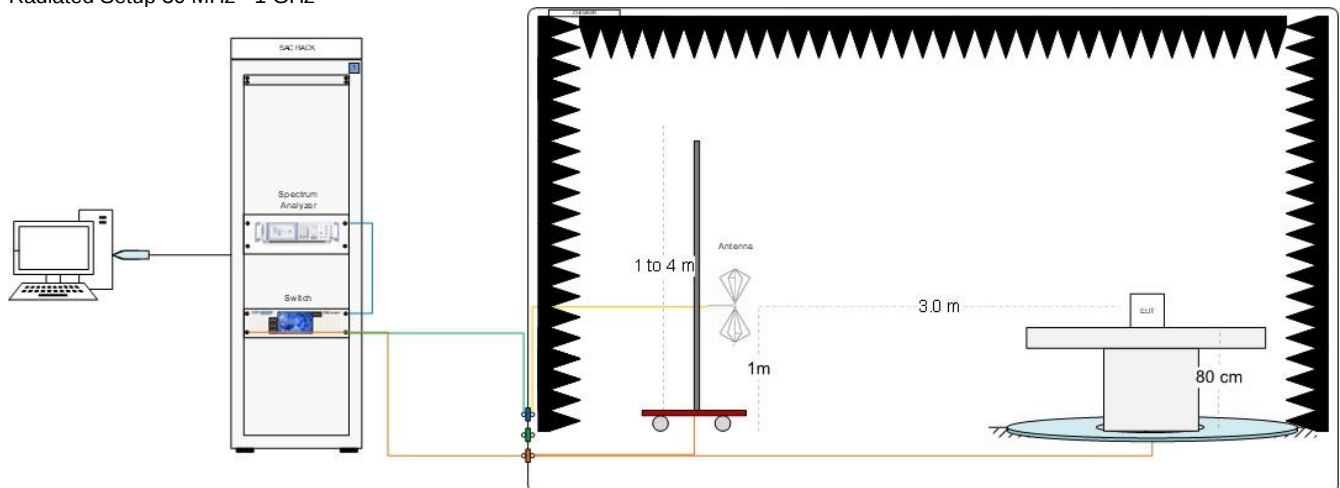


Radiated Setup 1 GHz – 9.5 GHz

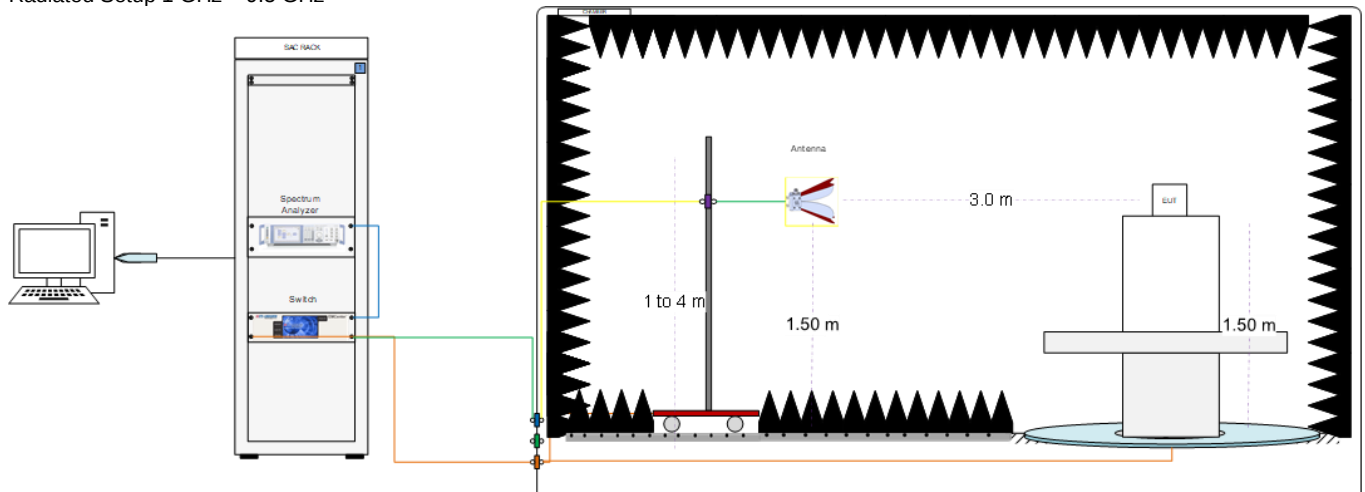

Radiated Setup 9.5 GHz - 18 GHz

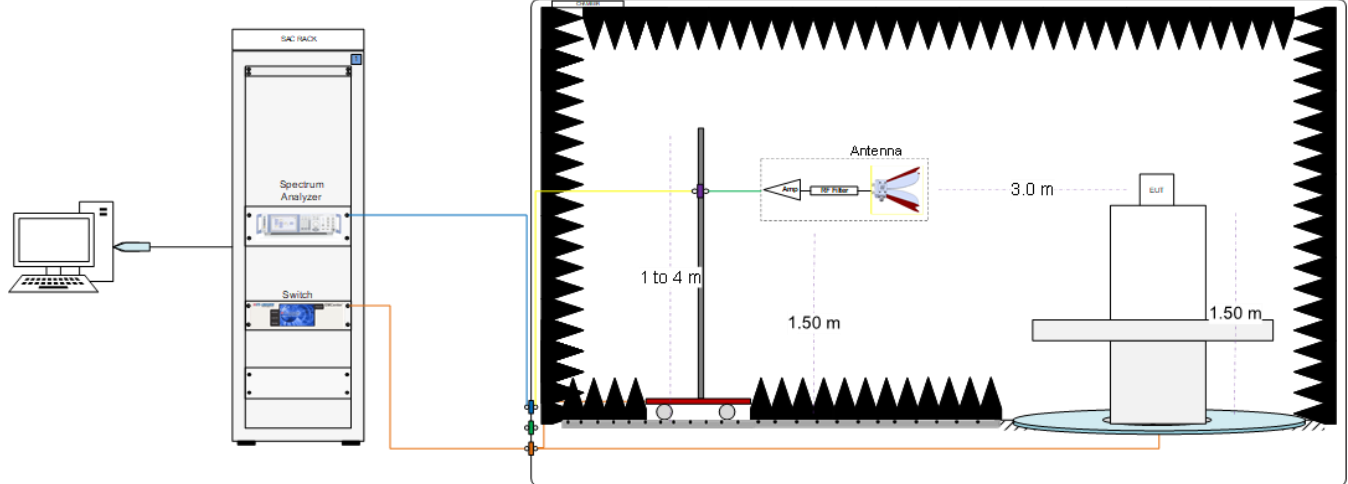

Radiated Setup 18 GHz – 40 GHz

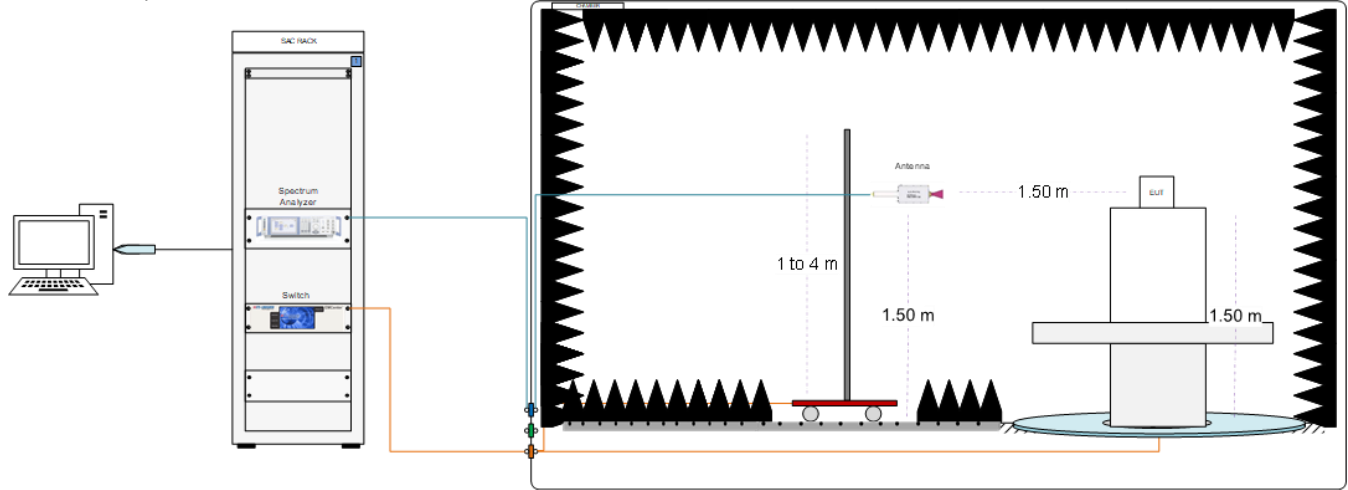

Sample Calculation

The spurious received voltage $V(\text{dB}\mu\text{V})$ in the spectrum Analyzer is converted to Electric field strength using the transducer factor F corresponding to the Rx path Loss:

$$F(\text{dB/m}) = \text{Rx Antenna Factor}(\text{dB/m}) + \text{Cable losses}(\text{dB}) - \text{Amplifiers Gain}(\text{dBi})$$

$$E(\text{dB}\mu\text{V/m}) = V(\text{dB}\mu\text{V}) + F(\text{dB/m})$$

For field strength measurements made at other than the distance at which the applicable limit is specified, the field strength of the emission at the distance specified by the limit is deduced as follows:

$$E_{\text{SpecLimit}} = E_{\text{Meas}} + 20 \cdot \log(D_{\text{Meas}}/D_{\text{SpecLimit}})$$

where

$E_{\text{SpecLimit}}$ is the field strength of the emission at the distance specified by the limit, in $\text{dB}\mu\text{V/m}$

E_{Meas} is the field strength of the emission at the measurement distance, in $\text{dB}\mu\text{V/m}$

D_{Meas} is the measurement distance, in m

$D_{\text{SpecLimit}}$ is the distance specified by the limit, in m

A.2 Test Equipment List

Conducted setup

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
0316	Spectrum Analyzer	FSV30	103309	Rohde & Schwarz	2019-09-02	2021-09-02
0443	RF cable 100cm	Coax 2.92mm Male To 2.92mm Male	N/A	PASTERNAK	N/A	N/A
1044	10dB Attenuator + MH4	N/A	N/A	N/A	N/A	N/A
0583	Temp & Humidity Logger	RA12E-TH1-RAS	RA12-B9D6E	AVITECH	2019-09-06	2021-09-06
1002	Measurement SW v1.4.10.8	Octopi	N/A	Step AT	N/A	N/A

Radiated Setup #1

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
0135	Anechoic Chamber	FACT3	5720	ETS-Lindgren	2020-07-06	2022-07-06
0136	Turn Table	ETS	-	ETS-Lindgren	N/A	N/A
0147	Switch & Positioning systems	EMC Center	00159757	ETS-Lindgren	N/A	N/A
0420	Spectrum Analyzer	FSV40	101556	Rohde & Schwarz	2020-05-25	2022-05-25
0530	Measurement SW, v10.40.10	EMC32	100623	Rohde & Schwarz	2020-06-24	2021-06-24
0202	Cable 1m - 30MHz to 18 GHz	UFB311A-0-3360-50U300	MFR 64639223229-001	Micro-coax	N/A	N/A
0206	Cable 1.2m – 18 to 40 GHz	UFA147A-0-0480-200200	MFR 64639223720-003	Micro-coax	N/A	N/A
0263	Cable 1m - 1GHz to 18GHz	UFA147A	-	Utilflex	N/A	N/A
0325	Horn antenna 3117	3117	00157734	ETS-Lindgren	2019-08-12	2021-08-12
0334	Double-Ridged Waveguide Horn with Pre-Amplifier 18 GHz to 40 GHz	3116C+PA	00169308bis + 00196308	ETS-Lindgren	2019-07-24	2021-07-24
0993	Biconical antenna 30 MHz – 1 GHz	UBAA9115 + BBVU9135 + DGA9552N	0286 + CH 9044	Schwarzbeck	2019-11-22	2021-11-22
0141	Horn Antenna 3117 + Amplifier + HPF6.4	3117	00157736	ETS-Lindgren	2020-04-01	2022-04-01
0371	Cable 1m – 30 MHz - 18GHz	UFB311A-0-0590-50U50U	MFR 64639 223230-001	Micro-coax	NA	NA
0758	Cable 7.5m - 30MHz to 18GHz	0501051057000GX	18.23.181	Radiall	NA	NA
0809	Cable 7m - 18GHz to 40GHz	R286304009	-	Radiall	NA	NA
0859	Cable 2.5m - 30MHz to 18GHz	0500990992500KE	19.23.395	Radiall	NA	NA
0797	Temp & Humidity Logger	RA12E-TH1-RAS	RA12-D0EB1A	Avtech	2019-07-04	2021-07-04
1033	Boresight antenna mast	BAM 4.0-P	P/278/2890.01	Maturo	N/A	N/A

N/A: Not Applicable

Radiated Setup #2

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
0337	Anechoic chamber	RFD-FA-100	5996	ETS Lindgren	2020-07-06	2022-07-06
0238	Switch & Positioner	EMCenter	00151232	ETS Lindgren	N/A	N/A
0382	Antenna Tower	2171B-3.0M	00150123	ETS Lindgren	N/A	N/A
0383	Turntable	-	-	ETS Lindgren	N/A	N/A
0329	Measurement SW, v10.50.10	EMC32	100401	Rohde & Schwarz	N/A	N/A
0419	Spectrum Analyzer	FSW67	103266	Rohde & Schwarz	2019-02-04	2021-02-04
0138	Double Ridge Horn (1- 18GHz)	3117	00152266	ETS Lindgren	2020-03-08	2022-03-08
0860	RF Cable 1-18GHz, 1.2 m	2301761761200PJ	12.22.1104	Radiall	N/A	N/A
0275	RF Cable 1-18GHz - 6.5m	140-8500-11-51	001	Spectrum	N/A	N/A
0684	RF Cable 1GHz-18GHz 1.5m	-	-	Spirent	N/A	N/A
0133	Spectrum Analyzer	FSV40	101358	Rohde & Schwarz	2020-02-25	2022-02-25
0141	Horn Antenna 3117 + Amplifier + HPF6.4	3117	00157736	ETS-Lindgren	2020-04-01	2022-04-01
0871	RF Cable 1-18GHz - 1.5m	0501050991200GX	19.21.710	Radiall	N/A	N/A
0796	Temp & Humidity Logger	RA12E-TH1-RAS	RA12-D4F316	Avtech	2019-07-05	2021-07-05

Shared Radiated Equipment

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
0616	Power Sensor	NRP-Z81	104385	Rohde & Schwarz	2020-04-08	2022-04-08
0617	Power Sensor	NRP-Z81	104386	Rohde & Schwarz	2020-04-08	2022-04-08
0618	Power Sensor	NRP-Z81	104382	Rohde & Schwarz	2020-04-08	2022-04-08

A.3 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the table below with a coverage factor of $k = 2$ to indicate a 95% level of confidence:

Measurement type	Uncertainty	Unit
Timing	± 0.12	%
Power Spectral density	± 1.47	dB
Occupied bandwidth	± 2.07	%
Conducted Power	± 1.03	dB
Conducted Spurious Emission <26.5 GHz	± 2.90	dB
Radiated tests <1GHz	± 2.95	dB
Radiated tests 1GHz – 40 GHz	± 5.02	dB

Annex B. Test Results U-NII-3

The herein test results were performed by:

Test case measurement	Test Engineer
6dB and 99% Bandwidth	Cedric Requin
Maximum output power & Maximum PSD	Cedric Requin
Undesirable emission limits: out of band (conducted)	Cedric Requin
Radiated spurious emissions	R. Luciani N. Bui A. Lounes I. Kharrat N. Nachabe

B.1 Test Conditions

For 802.11a mode the EUT can transmit at both CHAIN A and CHAIN B RF outputs individually, but not simultaneously.

For 802.11n20 & 802.11ax20 (20 MHz channel bandwidth), 802.11n40 and 802.11ax40 (40MHz channel bandwidth) 802.11ac80 & 802.11ax80 (80MHz channel bandwidth) modes the EUT can transmit at both CHAIN A and CHAIN B RF outputs individually, and also simultaneously.

The conducted RF output power at each chain was adjusted according to the client's supplied target values (see following table) using the Intel DRTU tool and measuring the power by using a spectrum analyser with the channel integration method according to section II) E) 2) e) (Method SA-2 Alternative) of Guidance FCC KDB 789033 D02 Measured values for adjustment were within +/- 0.25 dB from the declared target values..

U-NII-3					Conducted Power, Target Value (dBm)		
Mode	BW (MHz)	Data Rate	CH #	Freq. (MHz)	SISO Chain A	SISO Chain B	MIMO at both ports A and B
802.11a	20	6Mbps	149	5745	21.25	21.00	-
			157	5785	21.25	21.00	-
			165	5825	21.25	21.00	-
802.11n	20	HT0 HT8*	149	5745	21.25	21.00	21.25
			157	5785	21.25	21.00	21.25
			165	5825	21.25	21.00	21.25
802.11n	40	HT0 HT8*	151	5755	21.25	21.00	21.50
			159	5795	21.25	21.00	21.50
802.11ac	80	VHT0	155	5775	20.00	20.00	19.50
802.11ax	20	HE0	149	5745	21.25	21.00	21.50
			157	5785	21.25	21.00	21.25
			165	5825	21.25	21.00	21.50
802.11ax	40	HE0	151	5755	21.00	21.00	21.25
			159	5795	21.00	21.00	21.25
802.11ax	80	HE0	155	5775	20.00	20.00	19.25

* Note: HT8 for MIMO modes only

Overlapped channels between UNII-2C and UNII-3					Conducted Power, Target Value (dBm)		
Mode	BW (MHz)	Data Rate	CH #	Freq. (MHz)	SISO Chain A	SISO Chain B	MIMO at both ports A and B
802.11n	20	HT0 HT8*	144	5720	20.50	20.50	18.50
802.11n	40	HT0 HT8*	142	5710	21.00	21.00	21.00
802.11ac	80	VHT0	138	5690	21.00	21.00	21.00
802.11ax	20	HE0	144	5720	20.50	20.50	19.00
802.11ax	40	HE0	142	5710	21.00	21.00	21.00
802.11ax	80	HE0	138	5690	20.50	21.00	21.00

* Note: HT8 for MIMO modes only

The following data rates were selected based on preliminary testing that identified those rates as the worst cases for output power and spurious levels at the band edges:

Transmission	Mode	Bandwidth (MHz)	Worst Case Data Rate
SISO	802.11a	20	6Mbps
	802.11n	20	HT0
		40	HT0
	802.11ac	80	VHT0
	802.11ax	20	HE0
		40	HE0
		80	HE0
MIMO	802.11n	20/40	HT8
	802.11ac	80	VHT0
	802.11ax	20/40/80	HE0

Alternative channels to the lowest and highest channels per band have been also tested for Band Edge compliance.

B.2 Test Results Tables

B.2.1 6dB & 99% Bandwidth

Test limits

FCC part	RSS clause	Limits
15.407 (e)	RSS-247 Clause 6.2.4.1	For equipment operating in the band 5725-5850 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

Test procedure

The conducted setup shown in section *Test & System Description* was used to measure the 6dB & 99% Bandwidth. The antenna terminal of the EUT is connected to the spectrum analyzer through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

For the overlapped channels between U-NII-2C and U-NII-3 bands, and according to FCC KDB 789033 D02, the boundary frequency between the bands is used as one edge for defining the portion of the 6dB bandwidth that falls within a particular U-NII band. This rule is only applicable for the 6dB bandwidth and for those channels marked as overlapped.

Results tables

U-NII-3 channels

Antenna	Mode	Channel	Freq [MHz]	Rate	RU config.	6dB BW [MHz]	99% BW [MHz]
SISO A	802.11a20	149	5745	6Mbps	NA	15.12	16.60
SISO A	802.11a20	157	5785	6Mbps	NA	15.08	16.60
SISO A	802.11a20	165	5825	6Mbps	NA	15.06	16.68
SISO A	802.11n20	149	5745	HT0	NA	15.07	17.76
SISO A	802.11n20	157	5785	HT0	NA	14.99	17.84
SISO A	802.11n20	165	5825	HT0	NA	15.24	17.72
SISO A	802.11n40	151	5755	HT0	NA	35.01	36.16
SISO A	802.11n40	159	5795	HT0	NA	35.09	36.16
SISO A	802.11ac80	155	5775	VHT0	FullBW	75.10	75.00
SISO A	802.11ax20	149	5745	HE0	FullBW	17.21	18.92
SISO A	802.11ax20	149	5745	HE0	26/0	2.02	18.52
SISO A	802.11ax20	149	5745	HE0	52/37	16.99	18.40
SISO A	802.11ax20	149	5745	HE0	106/53	17.15	18.36
SISO A	802.11ax20	157	5785	HE0	FullBW	16.55	18.92
SISO A	802.11ax20	165	5825	HE0	FullBW	17.98	18.92
SISO A	802.11ax40	151	5755	HE0	FullBW	35.72	37.60
SISO A	802.11ax40	151	5755	HE0	242/61	16.98	18.72
SISO A	802.11ax40	159	5795	HE0	FullBW	35.08	37.44
SISO A	802.11ax80	155	5775	HE0	FullBW	73.83	76.68
SISO A	802.11ax80	155	5775	HE0	484/65	35.17	37.44

Antenna	Mode	Channel	Freq [MHz]	Rate	RU config.	6dB BW [MHz]	99% BW [MHz]
SISO B	802.11a20	149	5745	6Mbps	NA	15.10	16.68
SISO B	802.11a20	157	5785	6Mbps	NA	15.09	16.64
SISO B	802.11a20	165	5825	6Mbps	NA	15.06	16.68
SISO B	802.11n20	149	5745	HT0	NA	13.87	17.68
SISO B	802.11n20	157	5785	HT0	NA	14.96	17.76
SISO B	802.11n20	165	5825	HT0	NA	15.31	17.80
SISO B	802.11n40	151	5755	HT0	NA	35.07	36.32
SISO B	802.11n40	159	5795	HT0	NA	35.09	36.08
SISO B	802.11ac80	155	5775	VHT0	FullBW	73.87	75.12
SISO B	802.11ax20	149	5745	HE0	FullBW	13.71	18.88
SISO B	802.11ax20	149	5745	HE0	26/0	2.05	18.48
SISO B	802.11ax20	149	5745	HE0	52/37	17.01	18.36
SISO B	802.11ax20	149	5745	HE0	106/53	17.15	18.36

SISO B	802.11ax20	157	5785	HE0	FullBW	14.91	18.80
SISO B	802.11ax20	165	5825	HE0	FullBW	16.12	18.88
SISO B	802.11ax40	151	5755	HE0	FullBW	35.09	37.60
SISO B	802.11ax40	151	5755	HE0	242/61	16.57	18.96
SISO B	802.11ax40	159	5795	HE0	FullBW	35.97	37.52
SISO B	802.11ax80	155	5775	HE0	FullBW	71.4	76.80
SISO B	802.11ax80	155	5775	HE0	484/65	35.43	37.44

Antenna	Mode	Channel	Freq [MHz]	Rate	RU config.	6dB BW [MHz]	99% BW [MHz]
MIMO A	802.11n20	149	5745	HT8	NA	13.52	17.84
MIMO A	802.11n20	157	5785	HT8	NA	15.06	17.84
MIMO A	802.11n20	165	5825	HT8	NA	15.05	17.80
MIMO A	802.11n40	151	5755	HT8	NA	34.99	36.24
MIMO A	802.11n40	159	5795	HT8	NA	35.06	36.32
MIMO A	802.11ac80	155	5775	VHT0	NA	75.10	75.12
MIMO A	802.11ax20	149	5745	HE0	FullBW	15.99	19.00
MIMO A	802.11ax20	149	5745	HE0	26/0	2.03	18.44
MIMO A	802.11ax20	149	5745	HE0	52/37	16.97	18.44
MIMO A	802.11ax20	149	5745	HE0	106/53	17.10	18.40
MIMO A	802.11ax20	157	5785	HE0	FullBW	15.16	18.96
MIMO A	802.11ax20	165	5825	HE0	FullBW	16.38	18.96
MIMO A	802.11ax40	151	5755	HE0	FullBW	35.04	37.60
MIMO A	802.11ax40	151	5755	HE0	242/61	17.00	18.88
MIMO A	802.11ax40	159	5795	HE0	FullBW	35.09	37.52
MIMO A	802.11ax80	155	5775	HE0	FullBW	75.13	76.68
MIMO A	802.11ax80	155	5775	HE0	484/65	35.17	37.44

Antenna	Mode	Channel	Freq [MHz]	Rate	RU config.	6dB BW [MHz]	99% BW [MHz]
MIMO B	802.11n20	149	5745	HT8	NA	16.26	17.76
MIMO B	802.11n20	157	5785	HT8	NA	16.28	17.84
MIMO B	802.11n20	165	5825	HT8	NA	15.61	17.80
MIMO B	802.11n40	151	5755	HT8	NA	35.10	36.08
MIMO B	802.11n40	159	5795	HT8	NA	34.40	36.08
MIMO B	802.11ac80	155	5775	VHT0	NA	75.10	75.00
MIMO B	802.11ax20	149	5745	HE0	FullBW	15.10	18.88
MIMO B	802.11ax20	149	5745	HE0	26/0	17.00	18.76
MIMO B	802.11ax20	149	5745	HE0	52/37	17.03	18.32
MIMO B	802.11ax20	149	5745	HE0	106/53	17.13	18.36
MIMO B	802.11ax20	157	5785	HE0	FullBW	13.83	18.96
MIMO B	802.11ax20	165	5825	HE0	FullBW	15.12	18.96
MIMO B	802.11ax40	151	5755	HE0	FullBW	35.01	37.52
MIMO B	802.11ax40	151	5755	HE0	242/61	15.67	18.80
MIMO B	802.11ax40	159	5795	HE0	FullBW	35.02	37.52
MIMO B	802.11ax80	155	5775	HE0	FullBW	73.87	76.68
MIMO B	802.11ax80	155	5775	HE0	484/65	35.17	37.32

Max Value

Overlapped channels between U-NII-2C and U-NII-3

Mode	Channel	Frequency (MHz)	Antenna	Chain	6dB BW [MHz]	26dB BW UNII-3 [MHz]
802.11n20	144	5720	SISO	A	3.37	6.78
				B	3.10	6.58
			MIMO	A	3.37	6.73
				B	3.10	6.58
802.11n40	142	5710	SISO	A	3.17	7.37
				B	3.18	7.01
			MIMO	A	3.20	8.00
				B	3.21	7.00
802.11ac80	138	5690	SISO	A	3.24	8.42
				B	3.21	7.47
			MIMO	A	3.16	8.04
				B	3.30	7.09
802.11ax20	144	5720	SISO	A	4.36	7.23
				B	3.99	6.48
			MIMO	A	3.64	6.83
				B	3.87	6.78
802.11ax40	142	5710	SISO	A	3.99	6.11
				B	3.94	6.19
			MIMO	A	3.93	6.19
				B	4.07	6.11
802.11ax80	138	5690	SISO	A	4.07	6.33
				B	4.03	6.71
			MIMO	A	4.03	6.90
				B	3.34	6.14

Max Value

Note, the 26dB bandwidth of the overlapped channels falling in U-NII-3 band is shown in the above table. These values were used to measure the maximum output power in the U-NII-3 band as specified in chapter B.2.2.

See Section B.2.5, B.2.6, B.2.7, and Section B.2.8 for the screenshot results.

B.2.2 Power Limits. Maximum output power & Maximum power spectral Density

Test limits

FCC part	RSS clause	Limits
15.407 (a) (3)	RSS-247 Clause 6.2.4.1	For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band

Test procedure

The Maximum Conducted Output Power was measured using the channel integration method according to section E) 2) e) (Method SA-2 Alternative) of FCC KDB 789033 D02

The maximum power spectral density (PSD) was measured using the method according to section F) (Method SA-2 Alternative) of FCC KDB 789033 D02

In the measure-and-sum approach for MIMO mode, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically in linear power units to determine the total emission level from the device.

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power. The declared maximum antenna gain is +5dBi.

The conducted setup shown in section *Test & System Description* was used to measure the maximum conducted output power and power spectral density. The antenna terminal of the EUT is connected to the spectrum analyser through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

For the overlapped channels between U-NII-2C and U-NII-3, and according to FCC KDB 789033 D02, the power is computed based on the portion of the emission bandwidth (26dB) contained within that band. This rule is only applicable for those channels marked as overlapped.

Results tables

Duty cycle

Mode	Rate	Antenna	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
802.11a20	6Mbps	SISO A	2.08	2.14	96.95%
		SISO B	2.08	2.14	96.95%
802.11n20	HT0	SISO A	3.97	4.03	98.60%
		SISO B	3.97	4.03	98.60%
	HT8	MIMO A	3.97	4.03	98.51%
		MIMO B	3.97	4.03	98.51%
802.11ax20	HE0	SISO A	3.95	4.01	98.48%
		SISO B	3.95	4.01	98.48%
		MIMO A	3.95	4.01	98.54%
		MIMO B	3.95	4.01	98.54%
802.11n40	HT0	SISO A	3.94	4.02	98.01%
		SISO B	3.94	4.02	98.01%
	HT8	MIMO A	3.93	4.02	97.82%
		MIMO B	3.93	4.02	97.82%
802.11ax40	HE0	SISO A	3.93	4.00	98.32%
		SISO B	3.93	4.00	98.32%
		MIMO A	3.94	4.01	98.21%
		MIMO B	3.94	4.01	98.21%
802.11ac80	VHT0	SISO A	3.95	4.01	98.46%
		SISO B	3.95	4.01	98.46%
		MIMO A	3.94	4.01	98.32%
		MIMO B	3.94	4.01	98.32%
802.11ax80	HE0	SISO A	3.94	4.04	97.62%
		SISO B	3.94	4.04	97.62%
		MIMO A	3.94	4.01	98.32%
		MIMO B	3.94	4.01	98.32%
802.11ac160	VTH0	SISO A	3.96	4.01	98.73%
		SISO B	3.96	4.01	98.73%
		MIMO A	2.25	2.33	96.84%
		MIMO B	2.25	2.33	96.84%
802.11ax160	HE0	SISO A	3.93	4.01	98.00%
		SISO B	3.93	4.01	98.00%
		MIMO A	2.25	2.33	96.84%
		MIMO B	2.25	2.33	96.84%

Maximum output power – U-NII-3 Channels

Antenna	Mode	Channel	Freq [MHz]	Rate	RU config.	Average Conducted Output Power [dBm]	Avg Max* Conducted Output Power [dBm]	Avg Max*. EIRP [dBm]	Avg Max* Conducted Power [mW]
SISO A	802.11a20	149	5745	6Mbps	NA	21.19	21.32	26.32	135.52
SISO A	802.11a20	157	5785	6Mbps	NA	21.27	21.40	26.40	138.04
SISO A	802.11a20	165	5825	6Mbps	NA	21.27	21.40	26.40	138.04
SISO A	802.11n20	149	5745	HT0	NA	21.18	21.18	26.18	131.22
SISO A	802.11n20	157	5785	HT0	NA	21.17	21.17	26.17	130.92
SISO A	802.11n20	165	5825	HT0	NA	21.19	21.19	26.19	131.52
SISO A	802.11n40	151	5755	HT0	NA	21.34	21.34	26.34	136.14
SISO A	802.11n40	159	5795	HT0	NA	21.30	21.30	26.30	134.90
SISO A	802.11ac80	155	5775	VHT0	NA	19.95	19.95	24.95	98.86
SISO A	802.11ax20	149	5745	HE0	FullBW	21.32	21.32	26.32	135.52
SISO A	802.11ax20	149	5745	HE0	26/0	20.94	20.94	25.94	124.17
SISO A	802.11ax20	149	5745	HE0	52/37	20.99	20.99	25.99	125.60
SISO A	802.11ax20	149	5745	HE0	106/53	21.00	21.00	26.00	125.89
SISO A	802.11ax20	157	5785	HE0	FullBW	21.19	21.19	26.19	131.52
SISO A	802.11ax20	165	5825	HE0	FullBW	21.37	21.37	26.37	137.09
SISO A	802.11ax40	151	5755	HE0	FullBW	21.08	21.08	26.08	128.23
SISO A	802.11ax40	151	5755	HE0	242/61	20.79	20.79	25.79	119.95
SISO A	802.11ax40	159	5795	HE0	FullBW	21.07	21.07	26.07	127.94
SISO A	802.11ax80	155	5775	HE0	FullBW	19.95	20.05	25.05	101.16
SISO A	802.11ax80	155	5775	HE0	484/65	20.56	20.66	25.66	116.41

Antenna	Mode	Channel	Freq [MHz]	Rate	RU config.	Average Conducted Output Power [dBm]	Avg Max* Conducted Output Power [dBm]	Avg Max*. EIRP [dBm]	Avg Max* Conducted Power [mW]
SISO B	802.11a20	149	5745	6Mbps	NA	21.07	21.20	26.20	131.83
SISO B	802.11a20	157	5785	6Mbps	NA	21.10	21.23	26.23	132.74
SISO B	802.11a20	165	5825	6Mbps	NA	21.13	21.26	26.26	133.66
SISO B	802.11n20	149	5745	HT0	NA	20.98	20.98	25.98	125.31
SISO B	802.11n20	157	5785	HT0	NA	20.94	20.94	25.94	124.17
SISO B	802.11n20	165	5825	HT0	NA	21.02	21.02	26.02	126.47
SISO B	802.11n40	151	5755	HT0	NA	21.15	21.15	26.15	130.32
SISO B	802.11n40	159	5795	HT0	NA	21.02	21.02	26.02	126.47
SISO B	802.11ac80	155	5775	VHT0	NA	19.87	19.87	24.87	97.05
SISO B	802.11ax20	149	5745	HE0	FullBW	21.02	21.02	26.02	126.47
SISO B	802.11ax20	149	5745	HE0	26/0	20.62	20.62	25.62	115.35
SISO B	802.11ax20	149	5745	HE0	52/37	20.69	20.69	25.69	117.22
SISO B	802.11ax20	149	5745	HE0	106/53	20.81	20.81	25.81	120.50
SISO B	802.11ax20	157	5785	HE0	FullBW	20.98	20.98	25.98	125.31
SISO B	802.11ax20	165	5825	HE0	FullBW	21.09	21.09	26.09	128.53
SISO B	802.11ax40	151	5755	HE0	FullBW	20.85	20.85	25.85	121.62
SISO B	802.11ax40	151	5755	HE0	242/61	20.74	20.74	25.74	118.58
SISO B	802.11ax40	159	5795	HE0	FullBW	20.90	20.90	25.90	123.03
SISO B	802.11ax80	155	5775	HE0	FullBW	19.85	19.95	24.95	98.86
SISO B	802.11ax80	155	5775	HE0	484/65	20.17	20.27	25.27	106.41

Antenna	Mode	Channel	Freq [MHz]	Rate	RU config.	Average Conducted Output Power [dBm]	Avg Max* Conducted Output Power [dBm]	Avg Max*. EIRP [dBm]	Avg Max* Conducted Power [mW]
MIMO A	802.11n20	149	5745	HT8	NA	21.18	21.18	26.18	131.22
MIMO A	802.11n20	157	5785	HT8	NA	21.23	21.23	26.23	132.74
MIMO A	802.11n20	165	5825	HT8	NA	21.26	21.26	26.26	133.66
MIMO A	802.11n40	151	5755	HT8	NA	21.50	21.60	26.60	144.54
MIMO A	802.11n40	159	5795	HT8	NA	21.38	21.48	26.48	140.60
MIMO A	802.11ac80	155	5775	VHT0	NA	19.47	19.47	24.47	88.51
MIMO A	802.11ax20	149	5745	HE0	FullBW	21.35	21.35	26.35	136.46

MIMO A	802.11ax20	149	5745	HE0	26/0	18.46	18.46	23.46	70.15
MIMO A	802.11ax20	149	5745	HE0	52/37	18.16	18.16	23.16	65.46
MIMO A	802.11ax20	149	5745	HE0	106/53	18.19	18.19	23.19	65.92
MIMO A	802.11ax20	157	5785	HE0	FullBW	21.22	21.22	26.22	132.43
MIMO A	802.11ax20	165	5825	HE0	FullBW	21.41	21.41	26.41	138.36
MIMO A	802.11ax40	151	5755	HE0	FullBW	21.21	21.21	26.21	132.13
MIMO A	802.11ax40	151	5755	HE0	242/61	20.83	20.83	25.83	121.06
MIMO A	802.11ax40	159	5795	HE0	FullBW	21.24	21.24	26.24	133.05
MIMO A	802.11ax80	155	5775	HE0	FullBW	19.23	19.23	24.23	83.75
MIMO A	802.11ax80	155	5775	HE0	484/65	20.09	20.09	25.09	102.09

Antenna	Mode	Channel	Freq [MHz]	Rate	RU config.	Average Conducted Output Power [dBm]	Avg Max* Conducted Output Power [dBm]	Avg Max*. EIRP [dBm]	Avg Max* Conducted Power [mW]
MIMO B	802.11n20	149	5745	HT8	NA	20.67	20.67	25.67	116.68
MIMO B	802.11n20	157	5785	HT8	NA	20.70	20.70	25.70	117.49
MIMO B	802.11n20	165	5825	HT8	NA	20.73	20.73	25.73	118.30
MIMO B	802.11n40	151	5755	HT8	NA	20.90	21.00	26.00	125.89
MIMO B	802.11n40	159	5795	HT8	NA	20.78	20.88	25.88	122.46
MIMO B	802.11ac80	155	5775	VHT0	NA	19.05	19.05	24.05	80.35
MIMO B	802.11ax20	149	5745	HE0	FullBW	20.80	20.80	25.80	120.23
MIMO B	802.11ax20	149	5745	HE0	26/0	17.71	17.71	22.71	59.02
MIMO B	802.11ax20	149	5745	HE0	52/37	17.78	17.78	22.78	59.98
MIMO B	802.11ax20	149	5745	HE0	106/53	17.89	17.89	22.89	61.52
MIMO B	802.11ax20	157	5785	HE0	FullBW	20.77	20.77	25.77	119.40
MIMO B	802.11ax20	165	5825	HE0	FullBW	20.93	20.93	25.93	123.88
MIMO B	802.11ax40	151	5755	HE0	FullBW	20.61	20.61	25.61	115.08
MIMO B	802.11ax40	151	5755	HE0	242/61	20.39	20.39	25.39	109.40
MIMO B	802.11ax40	159	5795	HE0	FullBW	20.60	20.60	25.60	114.82
MIMO B	802.11ax80	155	5775	HE0	FullBW	19.20	19.20	24.20	83.18
MIMO B	802.11ax80	155	5775	HE0	484/65	19.67	19.67	24.67	92.68

Antenna	Mode	Channel	Freq [MHz]	Rate	RU config.	Average Conducted Output Power [dBm]	Avg Max* Conducted Output Power [dBm]	Avg Max*. EIRP [dBm]	Avg Max* Conducted Power [mW]
Combined A+B	802.11n20	149	5745	HT8	NA	23.94	23.94	28.94	247.90
Combined A+B	802.11n20	157	5785	HT8	NA	23.98	23.98	28.98	250.23
Combined A+B	802.11n20	165	5825	HT8	NA	24.01	24.01	29.01	251.96
Combined A+B	802.11n40	151	5755	HT8	NA	24.22	24.32	29.32	270.44
Combined A+B	802.11n40	159	5795	HT8	NA	24.10	24.20	29.20	263.07
Combined A+B	802.11ac80	155ac80	5775	VHT0	NA	22.28	22.28	27.28	168.86
Combined A+B	802.11ax20	149	5745	HE0	FullBW	24.09	24.09	29.09	256.68
Combined A+B	802.11ax20	149	5745	HE0	26/0	21.11	21.11	26.11	129.17
Combined A+B	802.11ax20	149	5745	HE0	52/37	20.98	20.98	25.98	125.44

Combined A+B	802.11ax 20	149	5745	HE0	106/53	21.05	21.05	26.05	127.44
Combined A+B	802.11ax 20	157	5785	HE0	FullBW	24.01	24.01	29.01	251.83
Combined A+B	802.11ax 20	165	5825	HE0	FullBW	24.19	24.19	29.19	262.24
Combined A+B	802.11ax 40	151	5755	HE0	FullBW	23.93	23.93	28.93	247.21
Combined A+B	802.11ax 40	151	5755	HE0	242/61	23.63	23.63	28.63	230.46
Combined A+B	802.11ax 40	159	5795	HE0	FullBW	23.94	23.94	28.94	247.86
Combined A+B	802.11ax 80	155ac8 0	5775	HE0	FullBW	22.23	22.23	27.23	166.93
Combined A+B	802.11ax 80	155ac8 0	5775	HE0	484/65	22.90	22.90	27.90	194.98

* Maximum values are the duty cycle compensated values calculated from the average (measured)

Max Value

Min Value

Maximum output power – Overlapped channels between U-NII-2C and U-NII-3

Mode	Channel	Freq (MHz)	Antenna	Chain	Average Cond. Output Power UNII-3 [dBm]	Max.* Cond. Output Power UNII-3 [dBm]	Max.* EIRP UNII-3 [dBm]	Max.* Cond. Output Power UNII-3 [mW]
802.11n20	144	5720	SISO	A	12.17	12.23	17.23	16.71
				B	12.48	12.54	17.54	17.95
			MIMO	A	10.01	10.07	15.07	10.17
				B	9.99	10.05	15.05	10.12
			Combined	A+B	13.01	13.07	18.07	20.29
802.11n40	142	5710	SISO	A	8.51	8.57	13.57	7.19
				B	8.60	8.66	13.66	7.34
			MIMO	A	8.48	8.54	13.54	7.14
				B	8.81	8.87	13.87	7.71
			Combined	A+B	11.66	11.72	16.72	14.85
802.11ac80	138	5690	SISO	A	3.68	3.74	8.74	2.36
				B	4.54	4.60	9.60	2.88
			MIMO	A	3.60	3.66	8.66	2.32
				B	4.45	4.51	9.51	2.83
			Combined	A+B	7.06	7.12	12.12	5.15
802.11ax20	144	5720	SISO	A	12.81	12.87	17.87	19.36
				B	12.96	13.02	18.02	20.04
			MIMO	A	11.13	11.19	16.19	13.15
				B	11.12	11.18	16.18	13.12
			Combined	A+B	14.14	14.19	19.19	26.26
802.11ax40	142	5710	SISO	A	9.15	9.21	14.21	8.33
				B	8.75	8.81	13.81	7.60
			MIMO	A	8.34	8.40	13.40	6.92
				B	8.50	8.56	13.56	7.17
			Combined	A+B	11.43	11.49	16.49	14.09
802.11ax80	138	5690	SISO	A	4.68	4.74	9.74	2.98
				B	5.10	5.16	10.16	3.28
			MIMO	A	5.28	5.34	10.34	3.42
				B	4.83	4.89	9.89	3.08
			Combined	A+B	8.07	8.13	13.13	6.50

* Maximum values are the duty cycle compensated values calculated from the average (measured)

Max Value

Min Value

Maximum Power Spectral Density (PSD) – U-NII-3 channels

Antenna	Mode	Channel	Freq [MHz]	Rate	RU config.	Average conducted PSD [dBm/500KHz]	Maximum* conducted PSD [dBm/500KHz]
SISO A	802.11a20	149	5745	6Mbps	NA	7.47	7.6
SISO A	802.11a20	157	5785	6Mbps	NA	7.52	7.65
SISO A	802.11a20	165	5825	6Mbps	NA	7.46	7.59
SISO A	802.11n20	149	5745	HT0	NA	7.09	7.09
SISO A	802.11n20	157	5785	HT0	NA	7.17	7.17
SISO A	802.11n20	165	5825	HT0	NA	7.1	7.1
SISO A	802.11n40	151	5755	HT0	NA	3.87	3.87
SISO A	802.11n40	159	5795	HT0	NA	3.77	3.77
SISO A	802.11ac80	155	5775	VHT0	NA	-0.61	-0.61
SISO A	802.11ax20	149	5745	HE0	FullBW	7.1	7.1
SISO A	802.11ax20	149	5745	HE0	26/0	14.99	14.99
SISO A	802.11ax20	149	5745	HE0	52/37	11.7	11.7
SISO A	802.11ax20	149	5745	HE0	106/53	8.98	8.98
SISO A	802.11ax20	157	5785	HE0	FullBW	6.97	6.97
SISO A	802.11ax20	165	5825	HE0	FullBW	7.05	7.05
SISO A	802.11ax40	151	5755	HE0	FullBW	3.49	3.49
SISO A	802.11ax40	151	5755	HE0	242/61	6.81	6.81
SISO A	802.11ax40	159	5795	HE0	FullBW	3.43	3.43
SISO A	802.11ax80	155	5775	HE0	FullBW	-0.75	-0.65
SISO A	802.11ax80	155	5775	HE0	484/65	3.27	3.37

Antenna	Mode	Channel	Freq [MHz]	Rate	RU config.	Average conducted PSD [dBm/500KHz]	Maximum* conducted PSD [dBm/500KHz]
SISO B	802.11a20	149	5745	6Mbps	NA	7.18	7.31
SISO B	802.11a20	157	5785	6Mbps	NA	7.24	7.37
SISO B	802.11a20	165	5825	6Mbps	NA	7.29	7.42
SISO B	802.11n20	149	5745	HT0	NA	6.89	6.89
SISO B	802.11n20	157	5785	HT0	NA	6.72	6.72
SISO B	802.11n20	165	5825	HT0	NA	6.87	6.87
SISO B	802.11n40	151	5755	HT0	NA	3.66	3.66
SISO B	802.11n40	159	5795	HT0	NA	3.59	3.59
SISO B	802.11ac80	155	5775	VHT0	NA	-0.71	-0.71
SISO B	802.11ax20	149	5745	HE0	FullBW	6.78	6.78
SISO B	802.11ax20	149	5745	HE0	26/0	14.44	14.44
SISO B	802.11ax20	149	5745	HE0	52/37	11.40	11.4
SISO B	802.11ax20	149	5745	HE0	106/53	8.64	8.64
SISO B	802.11ax20	157	5785	HE0	FullBW	6.70	6.70
SISO B	802.11ax20	165	5825	HE0	FullBW	6.86	6.86
SISO B	802.11ax40	151	5755	HE0	FullBW	3.23	3.23
SISO B	802.11ax40	151	5755	HE0	242/61	6.74	6.74
SISO B	802.11ax40	159	5795	HE0	FullBW	3.18	3.18
SISO B	802.11ax80	155	5775	HE0	FullBW	-0.85	-0.75
SISO B	802.11ax80	155	5775	HE0	484/65	5.69	5.79

Antenna	Mode	Channel	Freq [MHz]	Rate	RU config.	Average conducted PSD [dBm/500KHz]	Maximum* conducted PSD [dBm/500KHz]
MIMO A	802.11n20	149	5745	HT8	NA	7.20	7.20
MIMO A	802.11n20	157	5785	HT8	NA	7.20	7.20
MIMO A	802.11n20	165	5825	HT8	NA	7.23	7.23
MIMO A	802.11n40	151	5755	HT8	NA	4.05	4.15
MIMO A	802.11n40	159	5795	HT8	NA	3.94	4.04
MIMO A	802.11ac80	155	5775	VHT0	NA	-1.05	-1.05
MIMO A	802.11ax20	149	5745	HE0	FullBW	7.13	7.13
MIMO A	802.11ax20	149	5745	HE0	26/0	12.29	12.29
MIMO A	802.11ax20	149	5745	HE0	52/37	8.84	8.84
MIMO A	802.11ax20	149	5745	HE0	106/53	6.10	6.10
MIMO A	802.11ax20	157	5785	HE0	FullBW	7.02	7.02
MIMO A	802.11ax20	165	5825	HE0	FullBW	7.18	7.18
MIMO A	802.11ax40	151	5755	HE0	FullBW	3.55	3.55
MIMO A	802.11ax40	151	5755	HE0	242/61	6.91	6.91
MIMO A	802.11ax40	159	5795	HE0	FullBW	3.62	3.62

MIMO A	802.11ax80	155	5775	HE0	FullBW	-1.37	-1.37
MIMO A	802.11ax80	155	5775	HE0	484/65	5.55	5.55

Antenna	Mode	Channel	Freq [MHz]	Rate	RU config.	Average conducted PSD [dBm/500KHz]	Maximum* conducted PSD [dBm/500KHz]
MIMO B	802.11n20	149	5745	HT8	NA	6.64	6.64
MIMO B	802.11n20	157	5785	HT8	NA	6.66	6.66
MIMO B	802.11n20	165	5825	HT8	NA	6.69	6.69
MIMO B	802.11n40	151	5755	HT8	NA	3.4	3.5
MIMO B	802.11n40	159	5795	HT8	NA	3.3	3.4
MIMO B	802.11ac80	155	5775	VHT0	NA	-1.51	-1.51
MIMO B	802.11ax20	149	5745	HE0	FullBW	6.61	6.61
MIMO B	802.11ax20	149	5745	HE0	26/0	11.39	11.39
MIMO B	802.11ax20	149	5745	HE0	52/37	8.52	8.52
MIMO B	802.11ax20	149	5745	HE0	106/53	5.79	5.79
MIMO B	802.11ax20	157	5785	HE0	FullBW	6.51	6.51
MIMO B	802.11ax20	165	5825	HE0	FullBW	6.62	6.62
MIMO B	802.11ax40	151	5755	HE0	FullBW	2.97	2.97
MIMO B	802.11ax40	151	5755	HE0	242/61	6.36	6.36
MIMO B	802.11ax40	159	5795	HE0	FullBW	2.96	2.96
MIMO B	802.11ax80	155	5775	HE0	FullBW	-1.44	-1.44
MIMO B	802.11ax80	155	5775	HE0	484/65	5.23	5.23

Antenna	Mode	Channel	Freq [MHz]	Rate	RU config.	Combined Maximum* conducted PSD [dBm/500KHz]
Combined A+B	802.11n20	149	5745	HT8	NA	9.94
Combined A+B	802.11n20	157	5785	HT8	NA	9.95
Combined A+B	802.11n20	165	5825	HT8	NA	9.98
Combined A+B	802.11n40	151	5755	HT8	NA	6.85
Combined A+B	802.11n40	159	5795	HT8	NA	6.74
Combined A+B	802.11ac80	155	5775	VHT0	NA	1.74
Combined A+B	802.11ax20	149	5745	HE0	FullBW	9.89
Combined A+B	802.11ax20	149	5745	HE0	26/0	14.87
Combined A+B	802.11ax20	149	5745	HE0	52/37	11.69
Combined A+B	802.11ax20	149	5745	HE0	106/53	8.96
Combined A+B	802.11ax20	157	5785	HE0	FullBW	9.78
Combined A+B	802.11ax20	165	5825	HE0	FullBW	9.92
Combined A+B	802.11ax40	151	5755	HE0	FullBW	6.28
Combined A+B	802.11ax40	151	5755	HE0	242/61	9.65
Combined A+B	802.11ax40	159	5795	HE0	FullBW	6.31
Combined A+B	802.11ax80	155	5775	HE0	FullBW	1.61
Combined A+B	802.11ax80	155	5775	HE0	484/65	8.40

* Maximum values are the duty cycle compensated values calculated from the average (measured)

Max Value

Maximum Power Spectral Density (PSD) – Overlapped channels between U-NII-2C and U-NII-3

Mode	Channel	Freq (MHz)	Antenna	Chain	Average conducted PSD UNII-3 [dBm/500KHz]	Maximum* conducted PSD UNII-3 [dBm/500KHz]
802.11n20	144	5720	SISO	A	5.34	5.40
				B	4.72	4.78
			MIMO	A	5.78	5.84
				B	4.62	4.68
			Combined	A+B	8.25	8.31
802.11n40	142	5710	SISO	A	1.75	1.81
				B	0.95	1.01
			MIMO	A	3.95	4.01
				B	0.99	1.05
			Combined	A+B	0.89	0.95
802.11ac80	138	5690	SISO	A	-2.99	-2.93
				B	-3.33	-3.27
			MIMO	A	-3.06	-3.00
				B	-3.41	-3.35
			Combined	A+B	-0.22	-0.16
802.11ax20	144	5720	SISO	A	5.98	6.04
				B	5.34	5.40
			MIMO	A	5.73	5.79
				B	5.40	5.46
			Combined	A+B	8.58	8.64
802.11ax40	142	5710	SISO	A	0.52	0.58
				B	-0.09	-0.03
			MIMO	A	2.85	2.91
				B	-0.52	-0.46
			Combined	A+B	0.17	0.23
802.11ax80	138	5690	SISO	A	-3.73	-3.67
				B	-3.60	-3.54
			MIMO	A	-3.18	-3.12
				B	-3.75	-3.69
			Combined	A+B	-0.45	-0.39

* Maximum values are the duty cycle compensated values calculated from the average (measured)

Max Value

See Section B.2.9, B.2.10, B.2.11, and Section B.2.12 for the screenshot results

B.2.3 Undesirable emission limits : out of band (Conducted)Test limits

FCC part	RSS clause	Limits
15.407 (b) (4)	RSS-247 Clause 6.2.4.2	For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Test procedure

The conducted setup shown in section *Test & System Description* was used to measure undesirable emissions on the Band Edge domain. The antenna terminal of the EUT is connected to the spectrum analyzer through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss and the declared Antenna Gain.

The declared maximum antenna gain is +5dBi.

See Section B.2.13 for the screenshot results.

B.2.4 Radiated spurious emission

Standard references

FCC part	RSS clause	Limits																				
15.407 (b) (4)	RSS-247 Clause 6.2.4.2	For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.																				
15.209	RSS-GEN A1, Clause 8.9	Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a): <table><tr><th>Freq Range (MHz)</th><th>Field Strength (μV/m)</th><th>Field Strength (dBμV/m)</th><th>Meas. Distance (m)</th></tr><tr><td>30-88</td><td>100</td><td>40</td><td>3</td></tr><tr><td>88-216</td><td>150</td><td>43.5</td><td>3</td></tr><tr><td>216-960</td><td>200</td><td>46</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>54</td><td>3</td></tr></table> The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.	Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)	30-88	100	40	3	88-216	150	43.5	3	216-960	200	46	3	Above 960	500	54	3
Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)																			
30-88	100	40	3																			
88-216	150	43.5	3																			
216-960	200	46	3																			
Above 960	500	54	3																			

Test procedure

The radiated setups shown in section *Test & System Description* were used to measure the radiated spurious emissions.

Depending of the frequency range and bands being tested, different antennas and filters were used.

The final measurement is done by varying the antenna height from 1 m to 4 m, the EUT azimuth over 360° and for both Vertical and Horizontal polarizations.

The radiated spurious emission was measured on the worst case configuration selected from the chapter B.1 and using the low, middle and high channels.

For 802.11ax20, 802.11ax40 and 802.11ax80 modes, the worst case spurious emission result among the low, mid and high channels tested separately on Chain A and B is used to perform the test on MIMO mode (Chain A+B).

For 802.11n20, 802.11n40 and 802.11ac80 modes the worst channel found among all 802.11ax modes mentioned above is chosen to perform the test in Chain A, B ,and MIMO (Chain A+B).

Test Results

30 MHz – 1 GHz, Radiated spurious emissions

Radiated Spurious – All modes

Frequency	QuasiPeak	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	---
265.3	29.7	46.0	16.3	H
408.0	36.1	46.0	9.9	H

Note 1: The detected spurious signals do not depend on either the operating channel or the modulation mode.

1 GHz – 40 GHz, 802.11a, 6Mbps, Chain A

Radiated Spurious – CH149

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3376.5	---	46.2	54.0	7.8	V
3376.5	58.9	---	74.0	15.1	H
17997.6	---	38.5	54.0	15.5	H
17985.0	49.8	---	74.0	24.2	V
39882.2	59.1	---	68.2	9.1	V

Radiated Spurious – CH157

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3358.0	---	46.1	54.0	7.9	H
3358.0	59.0	---	74.0	15.0	H
17068.6	49.7	---	74.0	24.3	V
17069.1	---	37.1	54.0	16.9	H
39659.5	58.5	---	68.2	9.7	V

Radiated Spurious – CH165

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3326.0	---	46.3	54.0	7.7	V
3326.0	59.8	---	74.0	14.2	H
11652.9	49.4	---	74.0	24.6	H
11653.4	---	39.1	54.0	14.9	H
39871.0	59.0	---	68.2	9.2	H

1 GHz – 40 GHz, 802.11a, 6Mbps, Chain B

Radiated Spurious – CH149

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3173.5	---	46.2	54.0	7.8	V
3173.5	59.7	---	74.0	14.3	V
16441.2	---	37.5	54.0	16.5	V
16441.2	49.4	---	74.0	24.6	V
39854.5	58.7	---	68.2	9.5	V

Radiated Spurious – CH157

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3294.0	---	46.3	54.0	7.7	H
3294.0	59.3	---	74.0	14.7	V
17988.4	49.3	---	74.0	24.7	V
17997.1	---	38.7	54.0	15.3	V
39848.5	59.3	---	68.2	8.9	H

Radiated Spurious – CH165

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
3193.5	---	46.6	54.0	7.4	H
3193.5	59.3	---	74.0	14.7	H
17998.1	50.4	---	74.0	23.6	H
17997.6	---	38.3	54.0	15.7	V
39849.2	59.1	---	68.2	9.1	H

1 GHz – 40 GHz, 802.11n20, HT0, Chain A

Radiated Spurious – CH157

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
2964.5	---	46.2	54.0	7.8	H
2964.5	59.1	---	74.0	14.9	V
17995.2	49.9	---	74.0	24.1	V
17997.6	---	38.6	54.0	15.4	H
39859.8	59.5	---	68.2	8.5	V

1 GHz – 40 GHz, 802.11n20, HT0, Chain B

Radiated Spurious – CH157

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
3136.0	59.7	---	74.0	14.3	V
3136.5	---	47.0	54.0	7.0	H
17103.4	49.2	---	74.0	24.8	V
17103.4	---	37.7	54.0	16.3	V
39851.5	60.1	---	68.2	8.1	H

1 GHz – 40 GHz, 802.11n20, HT8, Chain A+B

Radiated Spurious – CH157

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3190.0	---	46.3	54.0	7.7	V
3190.0	59.4	---	74.0	14.6	V
17987.9	49.0	---	74.0	25.0	H
17997.6	---	38.5	54.0	15.5	H
27697.0	50.2	---	68.2	18.0	H

1 GHz – 40 GHz, 802.11ax20, HE0, Chain A

Radiated Spurious – CH149

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3225.0	---	46.4	54.0	7.6	V
3225.0	59.6	---	74.0	14.4	V
11474.0	52.0	---	74.0	22.0	V
11473.1	---	42.0	54.0	12.0	V
39861.2	57.5	---	68.2	10.7	H

Radiated Spurious – CH157

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3192.0	---	46.5	54.0	7.5	V
3192.0	59.2	---	74.0	14.7	V
17997.6	---	38.8	54.0	15.2	H
17987.9	49.4	---	74.0	24.6	V
39845.5	60.1	---	68.2	8.1	V

Radiated Spurious – CH165

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3188.0	---	46.6	54.0	7.4	V
3188.0	59.5	---	74.0	14.5	H
11633.0	---	43.1	54.0	10.9	H
11634.0	53.9	---	74.0	20.1	H
39859.0	59.3	---	68.2	8.9	H

30 MHz – 40 GHz, 802.11ax20, HE0, Chain B

Radiated Spurious – CH149

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3207.5	---	46.4	54.0	7.6	V
3207.5	59.9	---	74.0	14.1	H
11472.6	47.1	---	74.0	26.9	V
11473.5	---	37.0	54.0	17.0	V
39896.5	59.2	---	68.2	9.0	V

Radiated Spurious – CH157

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3174.5	---	46.5	54.0	7.5	H
3174.5	59.1	---	74.0	14.9	H
11553.3	45.8	---	74.0	28.2	H
11553.3	---	36.2	54.0	17.8	V
17328.2	46.1	---	74.0	27.9	H
17330.1	---	36.6	54.0	17.4	V
39854.5	59.1	---	68.2	9.1	V

Radiated Spurious – CH165

Frequency	MaxPeak	Average	Limit	Margin	Polar
-----------	---------	---------	-------	--------	-------

MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
3388.0	---	46.5	54.0	7.5	V
3388.0	59.5	---	74.0	14.5	H
17997.6	---	38.3	54.0	15.7	H
17988.9	49.6	---	74.0	24.4	V
39832.8	59.2	---	68.2	9.0	H

1 GHz – 40 GHz, 802.11ax20, HE0, Chain A+B

Radiated Spurious – CH157

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
3372.0	---	45.9	54.0	8.1	H
3372.0	58.8	---	74.0	15.2	H
11552.8	47.0	---	74.0	27.0	V
11552.8	---	36.8	54.0	17.2	V
39847.8	---	47.7	54.0	6.3	V
39847.8	58.0	---	74.0	16.0	H

1 GHz – 40 GHz, 802.11n40, HT0, Chain A

Radiated Spurious – CH159

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
1896.5	---	43.0	54.0	11.0	V
1896.5	57.0	---	74.0	17.0	V
17988.4	49.4	---	74.0	24.6	V
17997.6	---	38.0	54.0	16.0	V
39829.0	---	46.6	54.0	7.4	V
39829.0	59.2	---	74.0	14.8	H

1 GHz – 40 GHz, 802.11n40, HT0, Chain B

Radiated Spurious – CH159

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
2703.0	---	45.2	54.0	8.8	H
2703.0	59.3	---	74.0	14.7	H
11603.1	---	34.7	54.0	19.3	V
11603.1	48.5	---	74.0	25.5	V
16406.9	49.4	---	74.0	24.6	V
16407.9	---	37.0	54.0	17.0	V
39865.8	---	47.0	54.0	7.0	H
39865.8	59.0	---	74.0	15.0	V

1 GHz – 40 GHz, 802.11n40, HT8, Chain A+B

Radiated Spurious – CH159

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
3280.0	---	46.1	54.0	7.9	H
3280.0	59.1	---	74.0	14.9	V
17120.8	---	37.3	54.0	16.7	V
17121.3	49.6	---	74.0	24.4	H
39033.2	55.6	---	68.2	12.6	V

1 GHz – 40 GHz, 802.11ax40, HE0, Chain A

Radiated Spurious – CH151

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
3281.0	---	46.4	54.0	7.6	V
3281.0	59.8	---	74.0	14.2	H
11473.5	---	41.6	54.0	12.4	V
11475.0	50.7	---	74.0	23.3	V
39870.2	---	47.4	54.0	6.6	V
39870.2	57.4	---	74.0	16.6	H

Radiated Spurious – CH159

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3227.0	---	46.2	54.0	7.8	V
3227.0	59.6	---	74.0	14.4	H
17331.1	---	37.3	54.0	16.7	V
17331.5	46.2	---	74.0	27.8	V
39850.8	---	47.4	54.0	6.6	H
39850.8	57.7	---	74.0	16.3	H

1 GHz – 40 GHz, 802.11ax40, HE0, Chain B

Radiated Spurious – CH151

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3330.5	---	46.4	54.0	7.6	H
3330.5	59.6	---	74.0	14.4	H
17211.2	---	36.5	54.0	17.5	V
39841.0	---	47.0	54.0	7.0	V
39841.0	59.6	---	74.0	14.4	V

Radiated Spurious – CH159

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3315.5	---	46.2	54.0	7.8	V
3315.5	60.1	---	74.0	13.9	H
17331.1	---	36.1	54.0	17.9	V
17331.1	45.1	---	74.0	28.9	V
39848.5	---	47.1	54.0	6.9	V
39848.5	58.5	---	74.0	15.5	V

1 GHz – 40 GHz, 802.11ax40, HE0, Chain A+B

Radiated Spurious – CH159

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
3249.0	---	46.2	54.0	7.8	V
3249.0	59.3	---	74.0	14.7	V
11553.8	---	36.3	54.0	17.7	V
17331.1	---	44.4	54.0	9.6	V
17331.1	54.3	---	74.0	19.7	V
39855.2	---	47.5	54.0	6.5	V
39855.2	58.5	---	74.0	15.5	H

1 GHz – 40 GHz, 802.11ac80, VHT0, Chain A

Radiated Spurious – CH155

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
3138.0	---	46.5	54.0	7.5	H
3138.0	59.6	---	74.0	14.4	H
17049.3	---	36.8	54.0	17.2	V
17051.2	49.5	---	74.0	24.5	V
39844.8	59.7	---	68.2	8.5	H

1 GHz – 40 GHz, 802.11ac80, VHT0, Chain B

Radiated Spurious – CH155

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
3131.0	---	46.2	54.0	7.8	V
3131.0	59.0	---	74.0	15.0	V
16435.0	48.9	---	74.0	25.1	H
16435.0	---	36.9	54.0	17.1	V
39845.5	59.0	---	68.2	9.2	V

1 GHz – 40 GHz, 802.11ac80, VHT0, Chain A+B

Radiated Spurious – CH155

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
3367.0	---	45.8	54.0	8.2	V
3367.0	59.1	---	74.0	14.9	H
16435.5	---	37.4	54.0	16.6	V
16435.5	49.5	---	74.0	24.5	V
39046.0	57.2	---	68.2	11.0	H

1 GHz – 40 GHz, 802.11ax80, HE0, Chain A

Radiated Spurious – CH155

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
3215.0	---	46.3	54.0	7.7	V
3215.0	59.4	---	74.0	14.6	H
7180.6	46.0	---	74.0	28.0	V
7180.6	---	36.1	54.0	17.9	H
11474.5	---	41.6	54.0	12.4	H
11474.5	52.2	---	74.0	21.8	V
39847.8	58.8	---	68.2	9.4	H

1 GHz – 40 GHz, 802.11ax80, HE0, Chain B

Radiated Spurious – CH155

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
3106.5	---	46.2	54.0	7.8	H
3106.5	59.3	---	74.0	14.7	V
11473.1	45.5	---	74.0	28.5	V
11473.1	---	36.2	54.0	17.8	V
39852.2	59.6	---	68.2	8.6	V

1 GHz – 40 GHz, 802.11ax80, HE0, Chain A+B


Radiated Spurious – CH155

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
3062.5	58.9	---	74.0	15.1	H
3062.5	---	45.6	54.0	8.6	V
11474.0	---	43.1	54.0	10.9	V
11475.5	52.9	---	74.0	21.1	V
22948.4	46.5	---	74.0	27.5	V
22948.4	---	37.0	54.0	17.0	V

Test Results Screenshot


B.2.5 6dB Bandwidth

SISO-A, 802.11a, 6Mbps

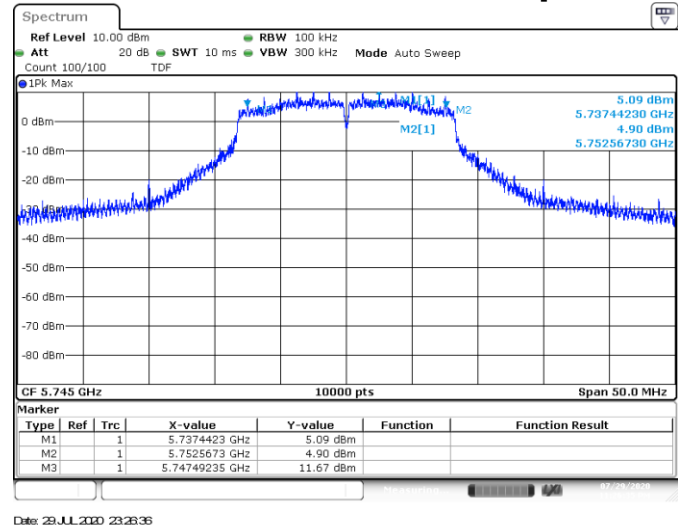


Channel 149

MIMO-B, 802.11n20, HT8

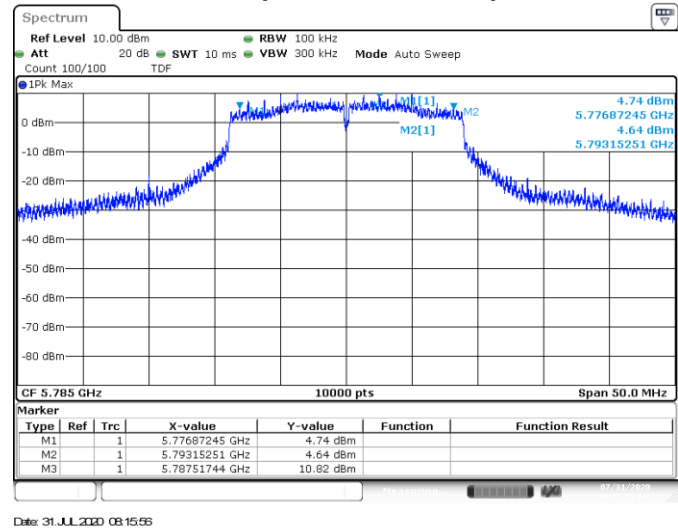


Channel 157

MIMO-B, 802.11n40, HT8

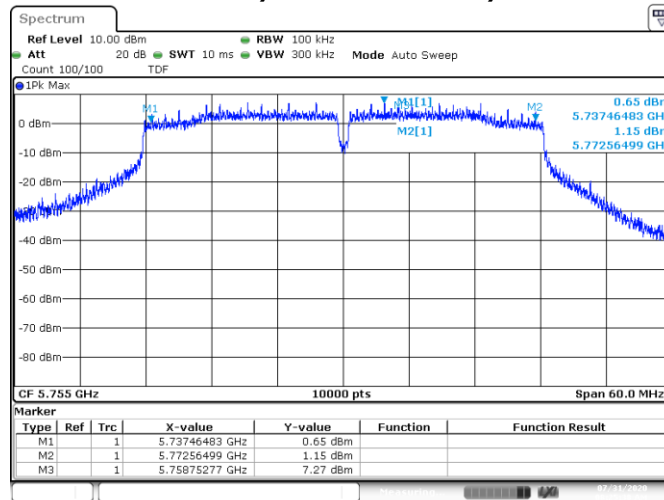


Channel 151

MIMO-B, 802.11ac80, VHT0

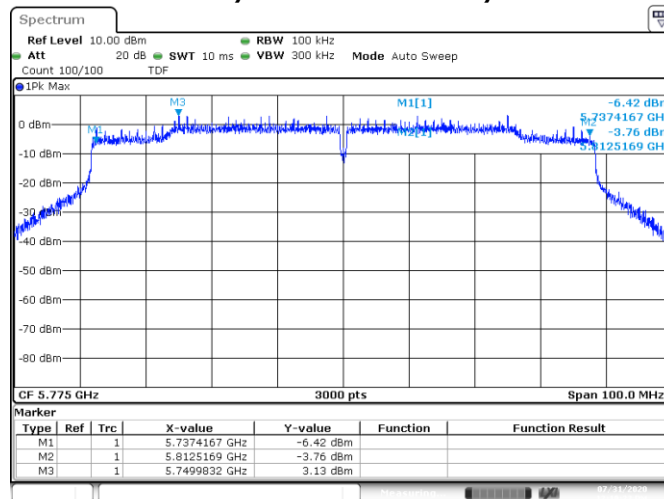


Channel 155

SISO-A, 802.11ax20, HE0

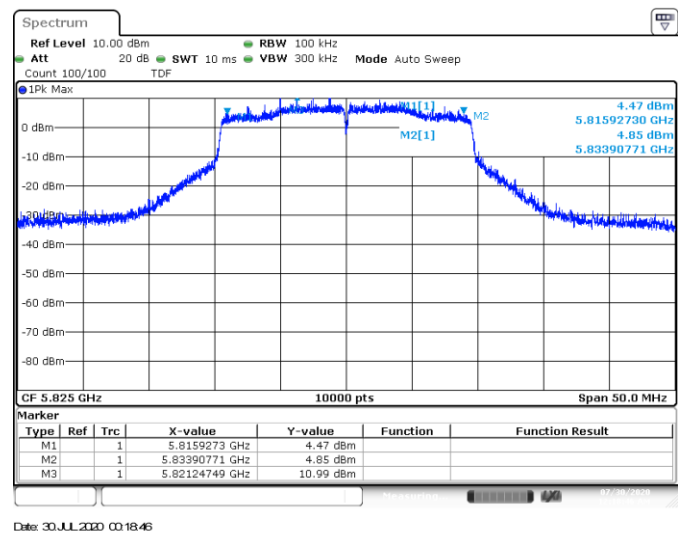


Channel 165

SISO-B, 802.11ax40, HE0

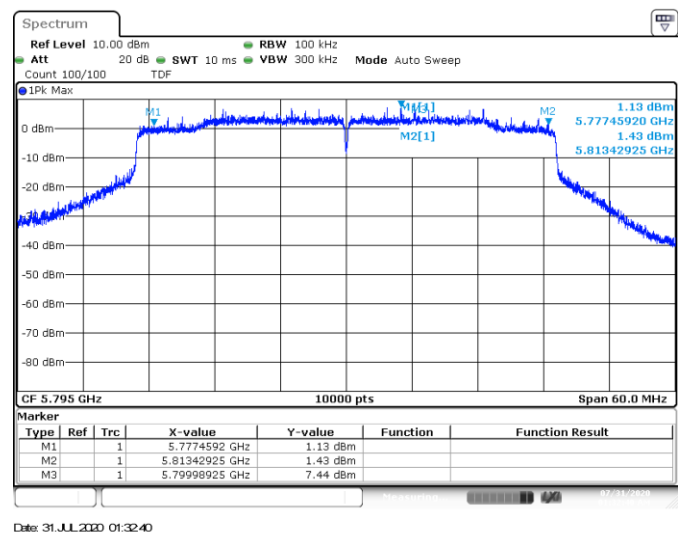

Channel 159


MIMO-A, 802.11ac80, HE0

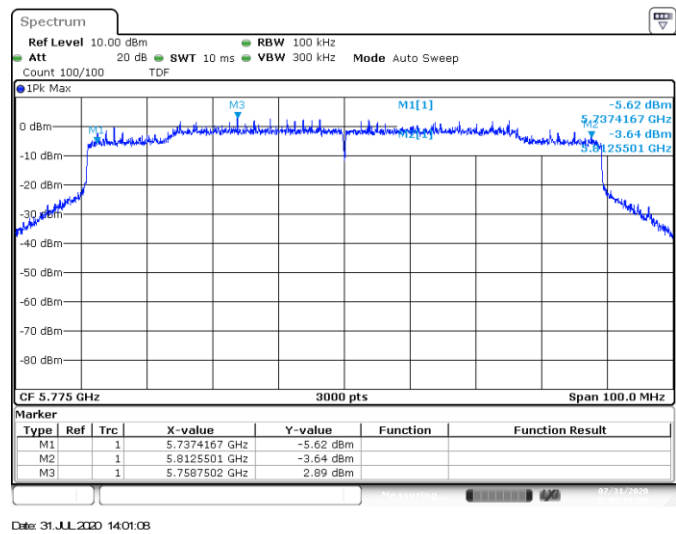

Channel 155


B.2.6 6dB Bandwidth (Overlapped Channel)

SISO-A, 802.11n20, HT0

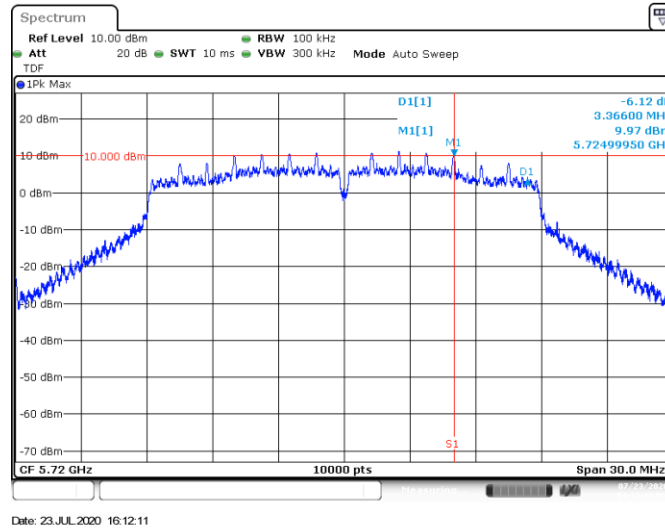


Channel 144 (Overlapped Channel)

MIMO-B, 802.11n40, HT8

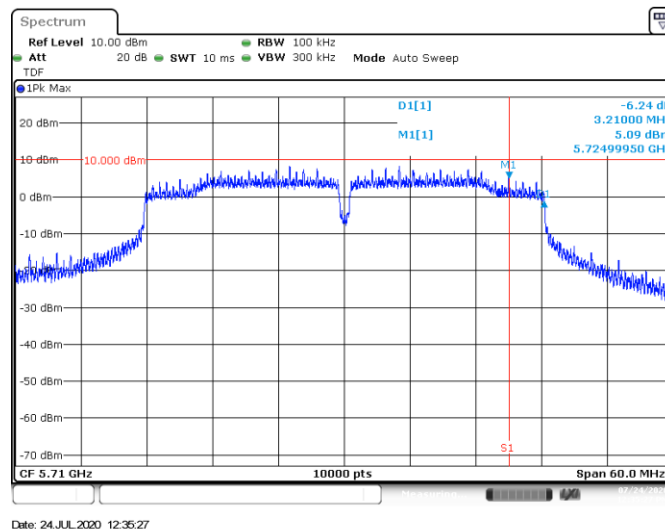


Channel 142 (Overlapped Channel)

MIMO-B, 802.11ac80, VHT0

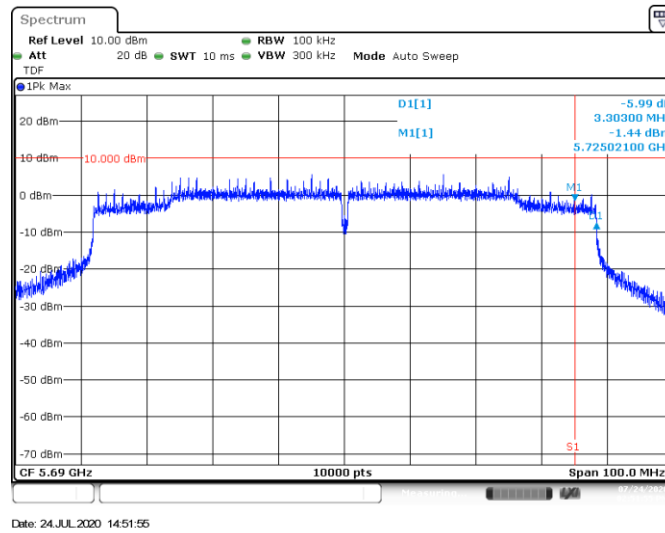


Channel 138 (Overlapped Channel)

SISO-A, 802.11ax20, HE0

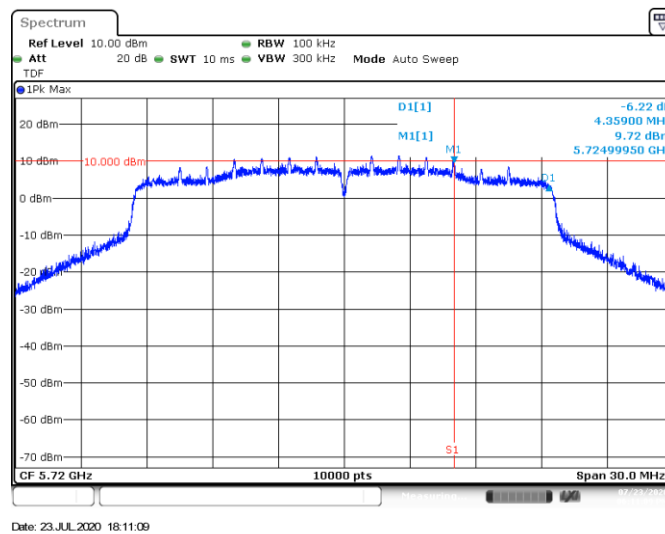

Channel 144 (Overlapped Channel)


MIMO-B, 802.11ax40, HE0

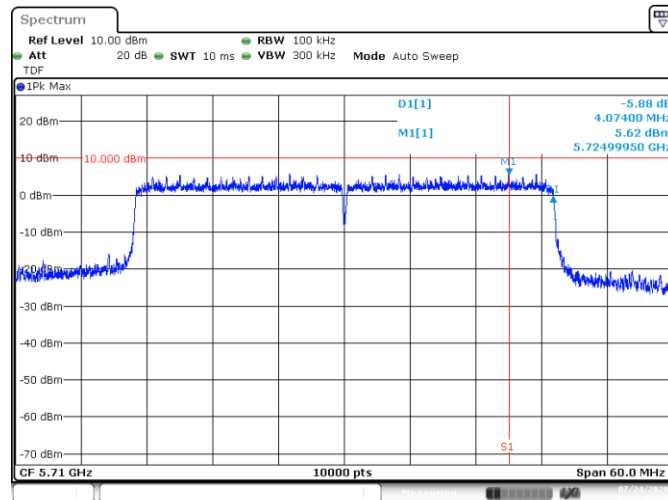

Date: 24.JUL.2020 14:32:02

Channel 142 (Overlapped Channel)

SISO-A, 802.11ac80, HE0

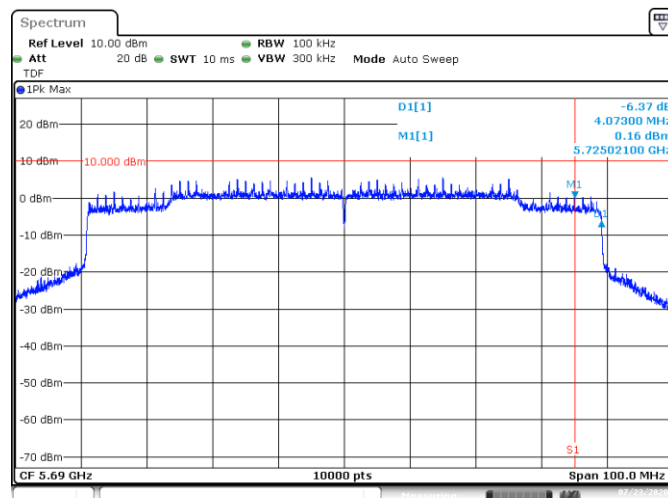


Date: 23.JUL.2020 17:51:32

Channel 138 (Overlapped Channel)


B.2.7 99% Bandwidth

SISO-A, 802.11a, 6Mbps

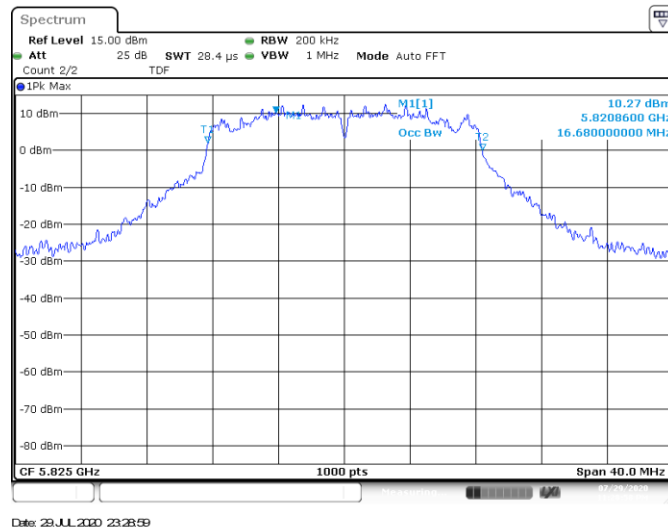


Channel 165

SISO-A, 802.11n20, HT0

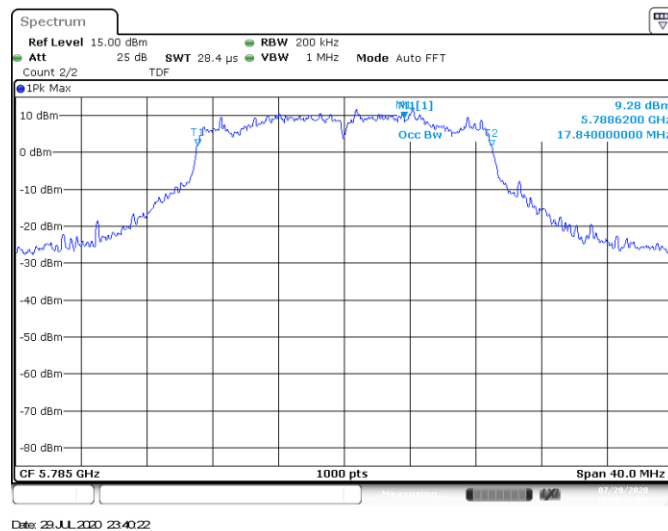


Channel 157

SISO-B, 802.11n40, HT0

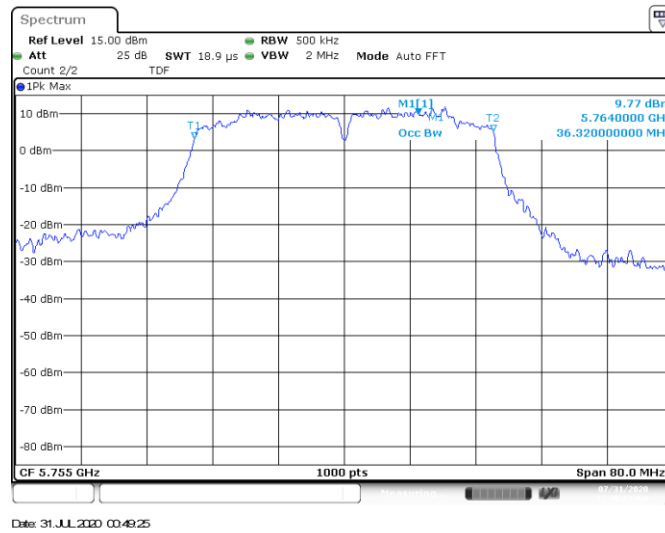


Channel 151

SISO-B, 802.11ac80, VHT0

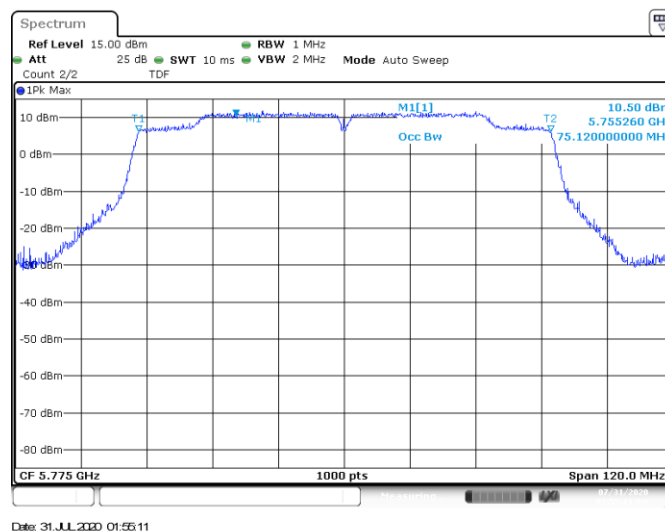


Channel 155

MIMO-A, 802.11ax20, HE0

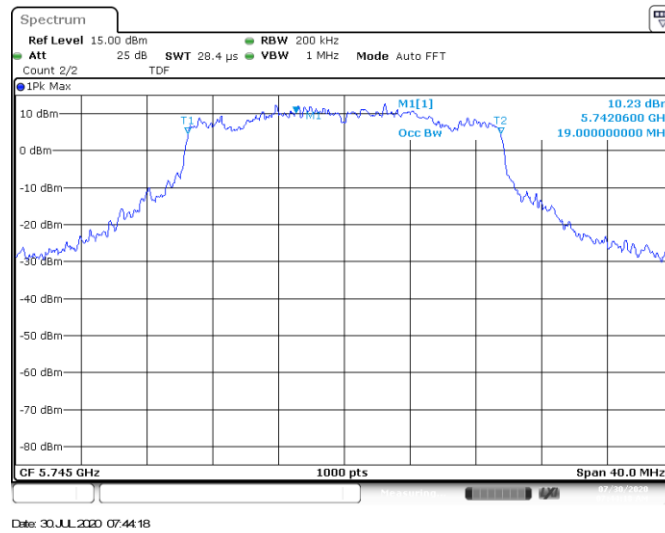


Channel 149

SISO-A, 802.11ax40, HE0

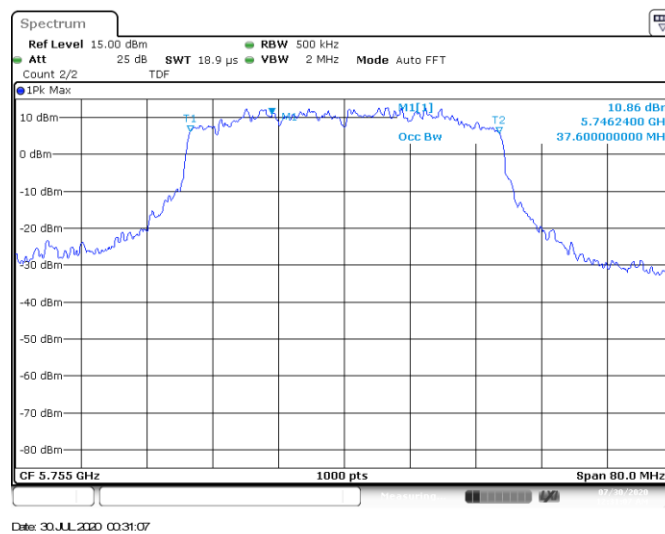

Channel 151


SISO-B, 802.11ac80, HE0

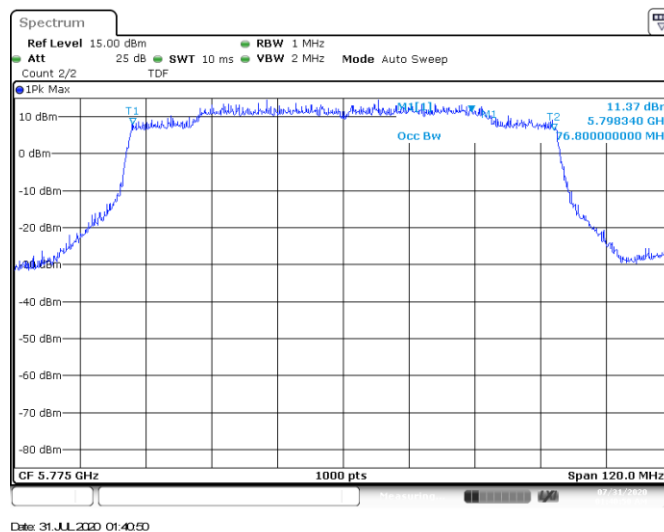

Channel 155


B.2.8 26dB Bandwidth (Overlapped Channel)

SISO-A, 802.11n20, HT0

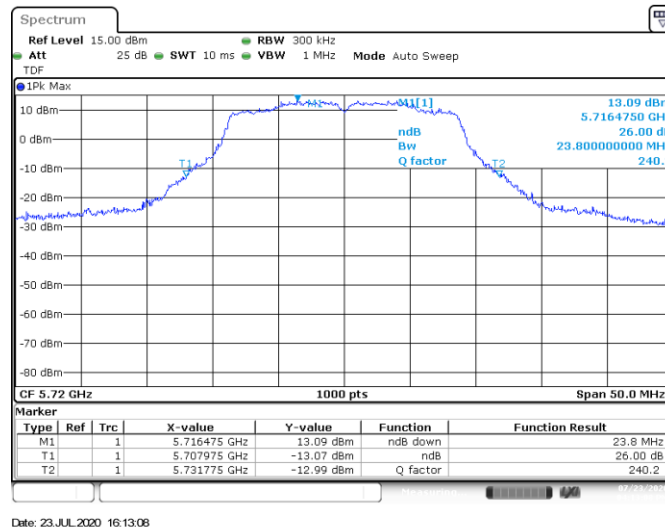


Channel 144 (Overlapped Channel)

MIMO-A, 802.11n40, HT8

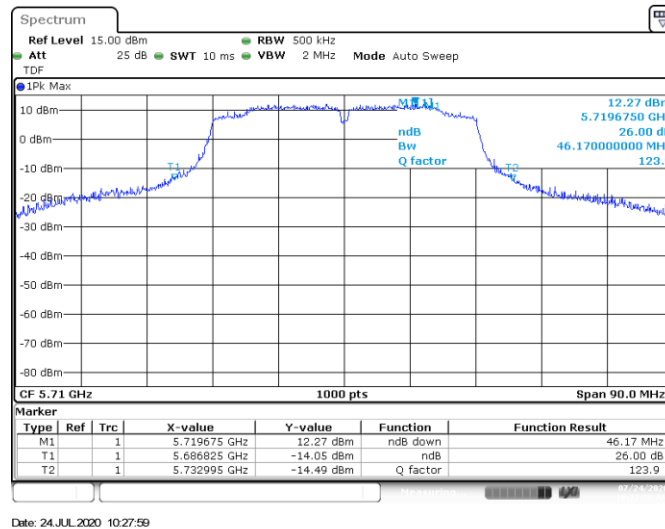


Channel 142 (Overlapped Channel)

SISO-A, 802.11ac80, VHT0

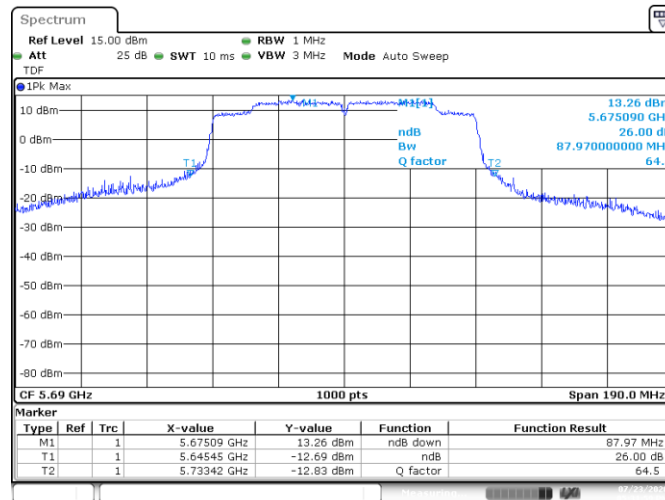


Channel 138 (Overlapped Channel)

SISO-A, 802.11ax20, HE0

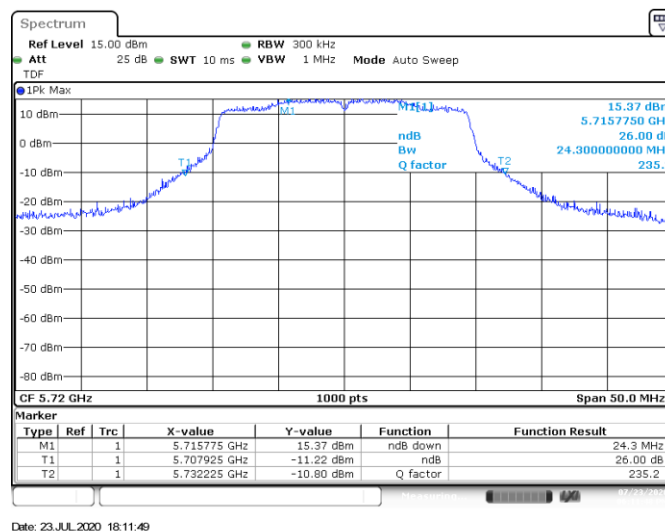

Channel 144 (Overlapped Channel)


SISO-B, 802.11ax40, HE0

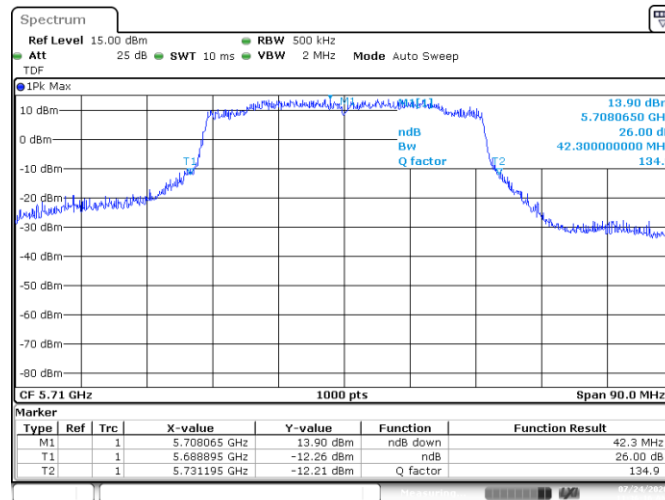

Date: 24.JUL.2020 11:36:16

Channel 142 (Overlapped Channel)

MIMO-A, 802.11ac80, HE0

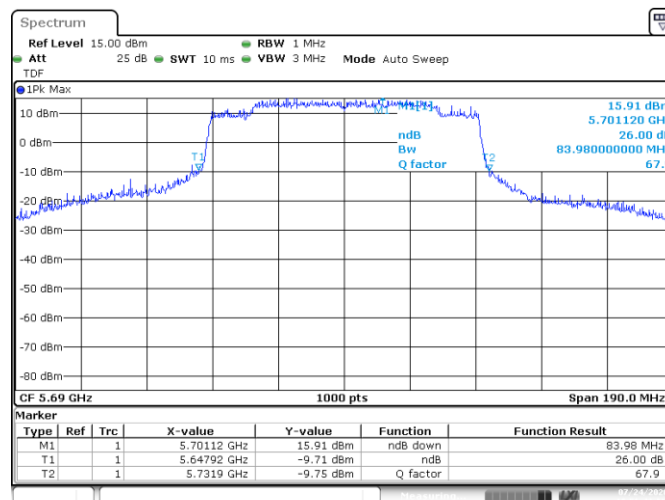


Date: 24.JUL.2020 10:56:42

Channel 138 (Overlapped Channel)


B.2.9 Maximum output power

SISO-A, 802.11a, 6Mbps

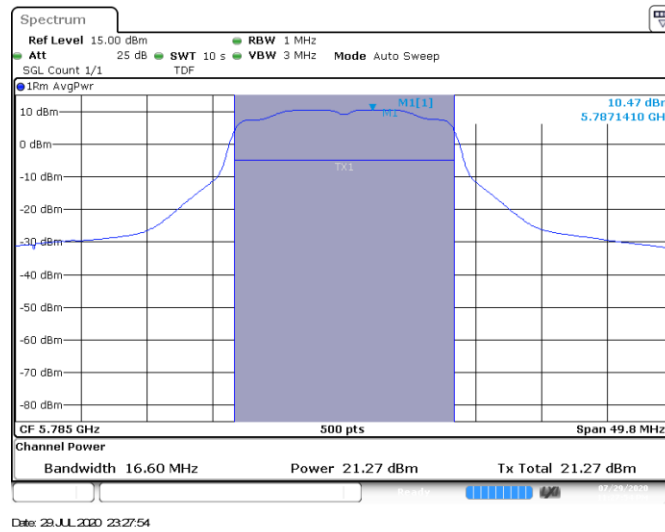


Channel 157

MIMO-A, 802.11n20, HT8

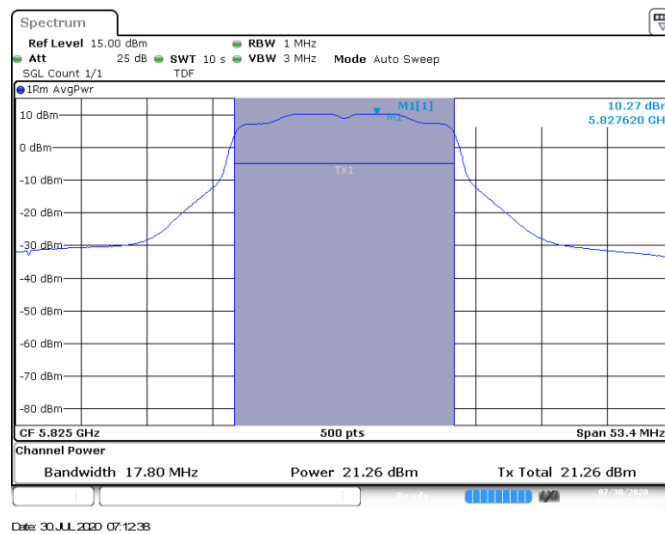


Channel 165

MIMO-A, 802.11n40, HT8

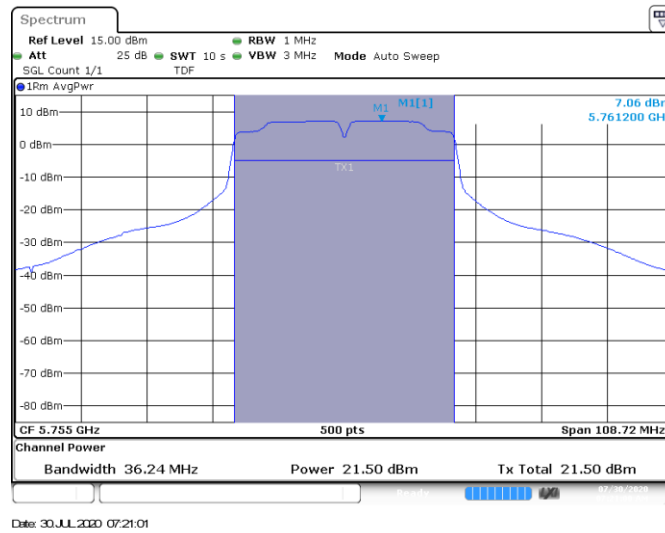


Channel 151

SISO-A, 802.11ac80, VHT0

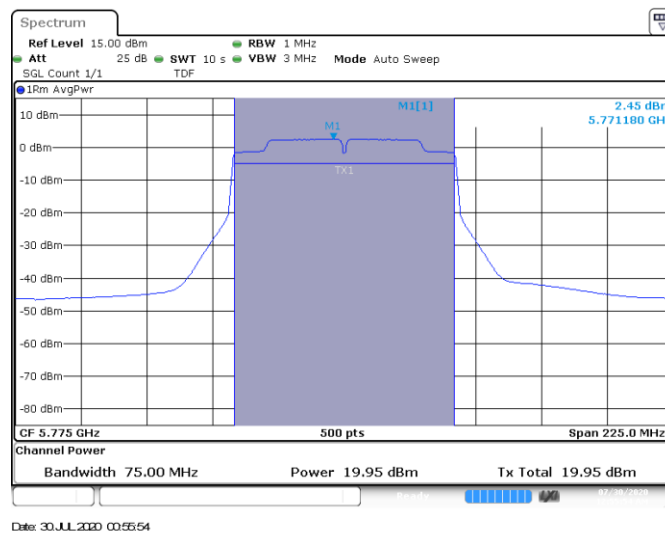

Channel 155


SISO-A, 802.11ax80, HE0 RU:484-65

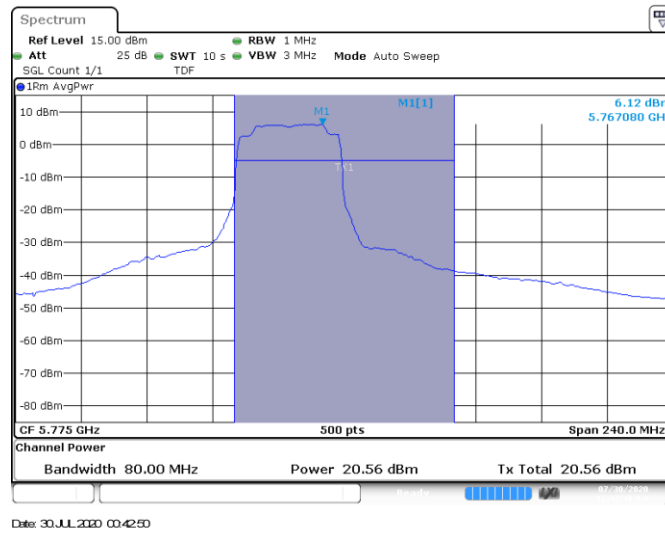

Channel 155


B.2.10 Maximum output power (Overlapped Channel)

SISO-B, 802.11n20, HT0

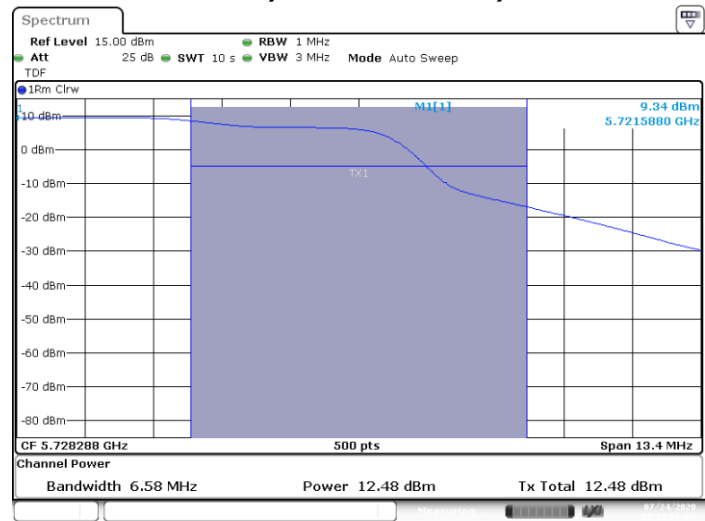


Channel 144 (Overlapped Channel)

MIMO-B, 802.11n40, HT8

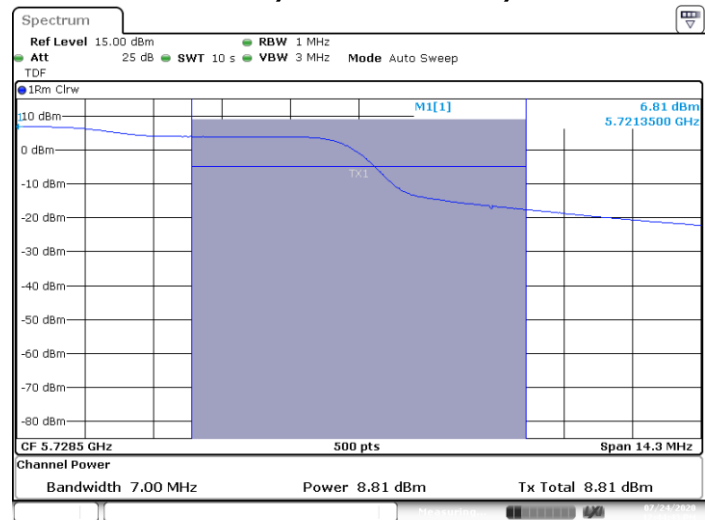


Channel 142 (Overlapped Channel)

SISO-B, 802.11ac80, VHT0

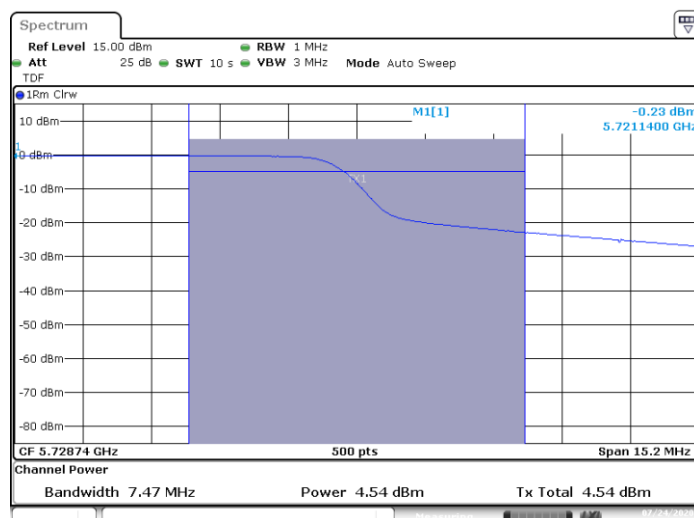


Channel 138 (Overlapped Channel)

SISO-B, 802.11ax20, HE0

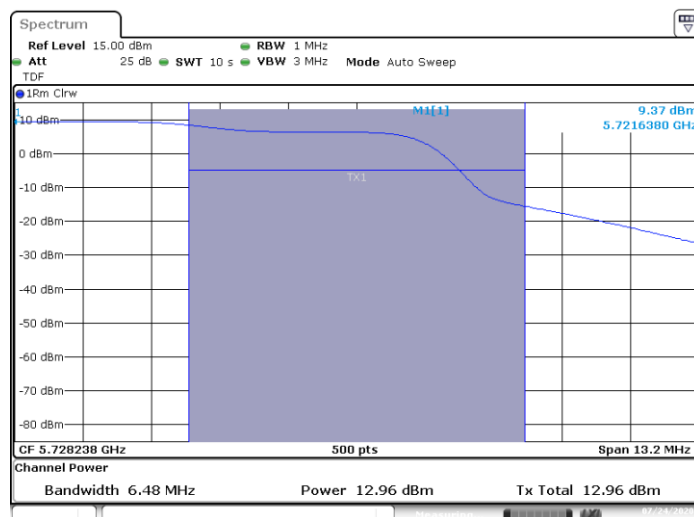


Channel 144 (Overlapped Channel)

SISO-A, 802.11ax40, HE0

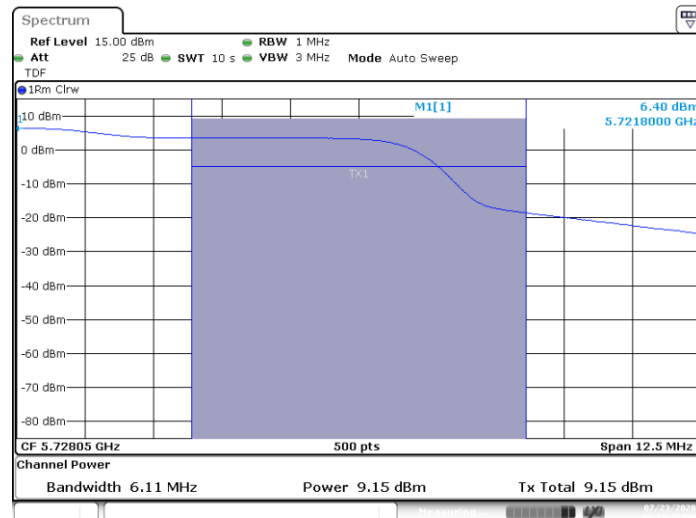

Channel 142 (Overlapped Channel)


MIMO-A, 802.11ac80, HE0

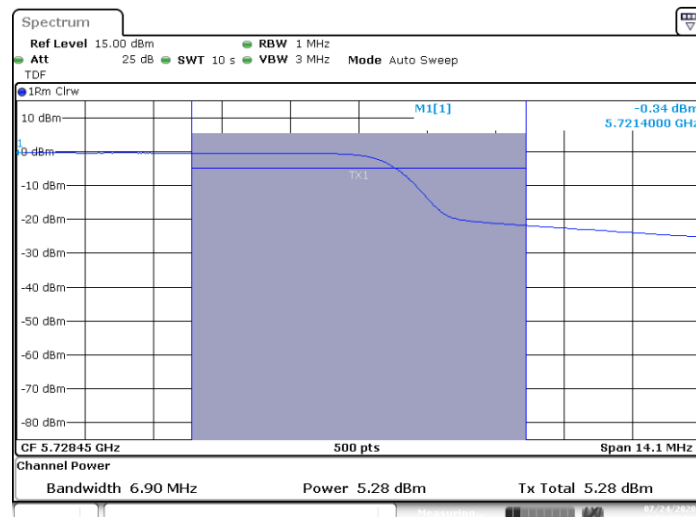

Channel 138 (Overlapped Channel)


B.2.11 Maximum power spectral Density

SISO-A, 802.11a, 6Mbps

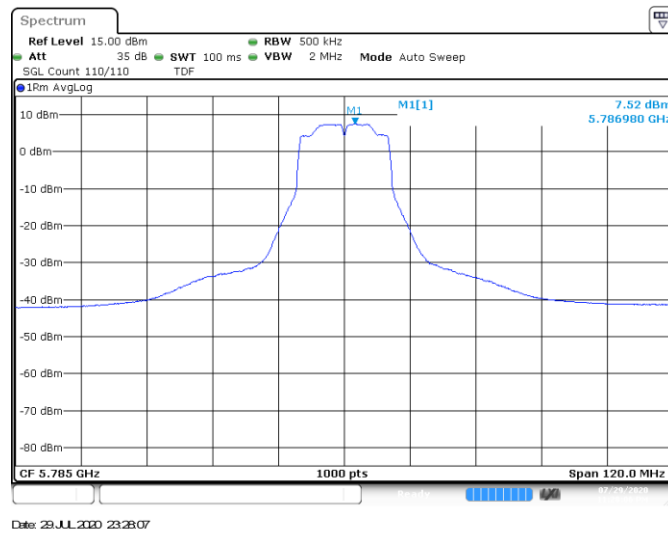


Channel 157

MIMO-A, 802.11n20, HT8

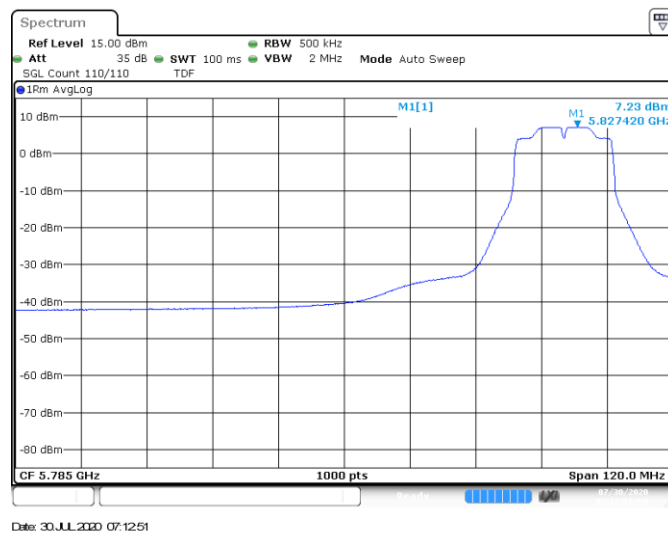


Channel 165

MIMO-A, 802.11n40, HT8

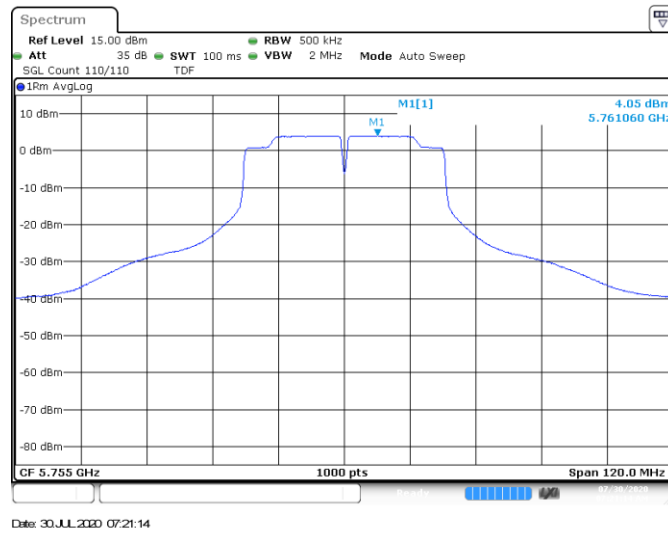


Channel 151

SISO-A, 802.11ac80, VHT0

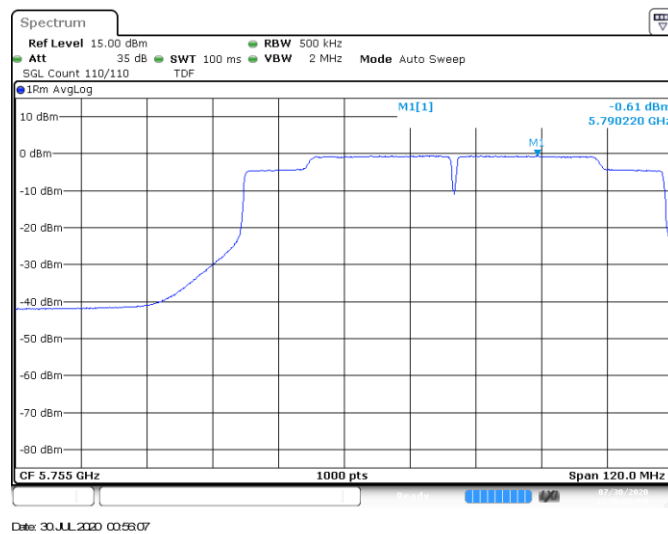


Channel 155

SISO-A, 802.11ax20, HE0 RU:26-0

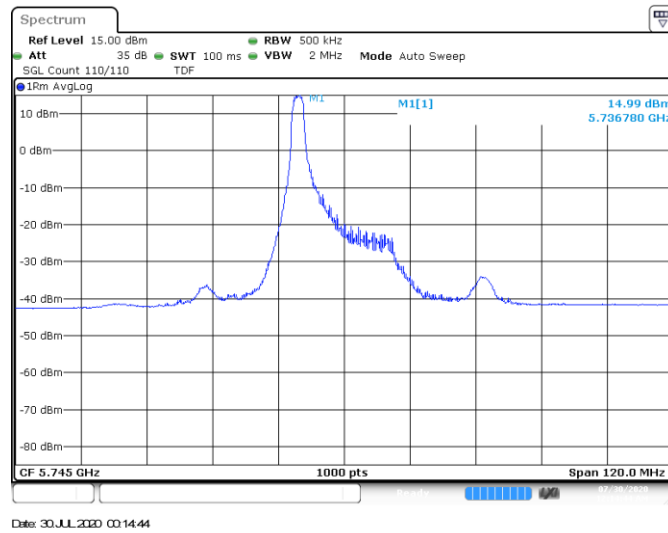


Channel 149

MIMO-A, 802.11ax40, HE0 RU:242-61

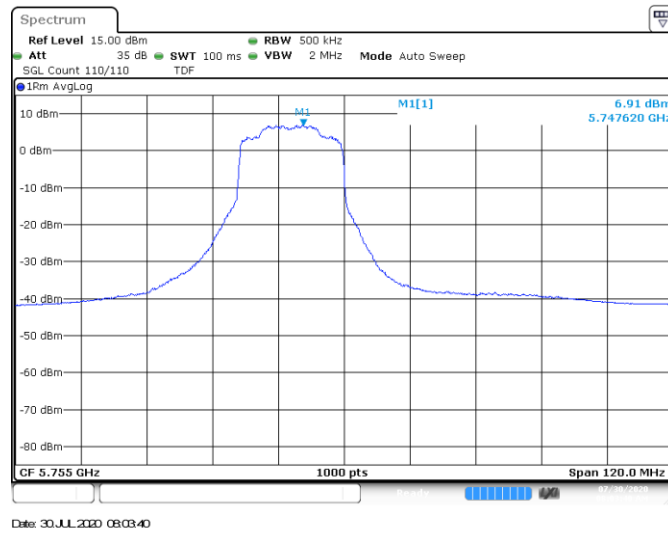

Channel 151


SISO-A, 802.11ax80, HE0 RU: 484-65

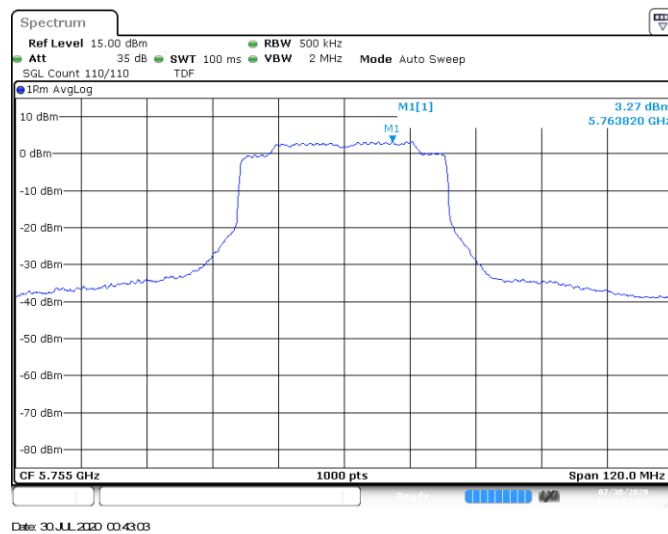

Channel 155


B.2.12 Maximum power spectral Density (Overlapped Channel)

MIMO-A, 802.11n20, HT8

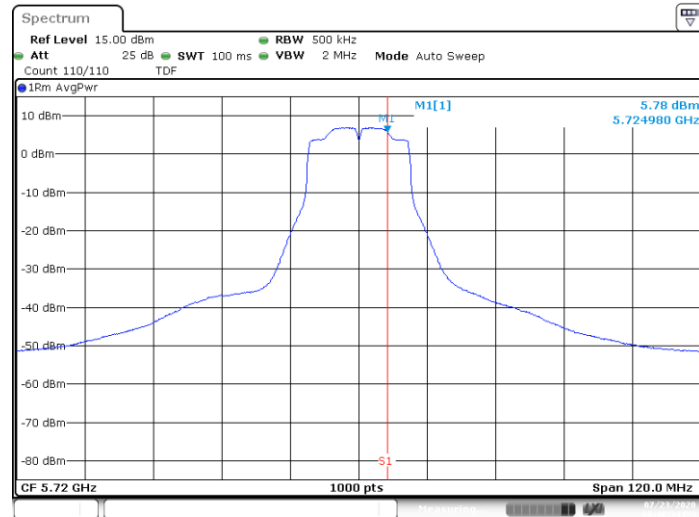


Channel 144 (Overlapped Channel)

MIMO-A, 802.11n40, HT8

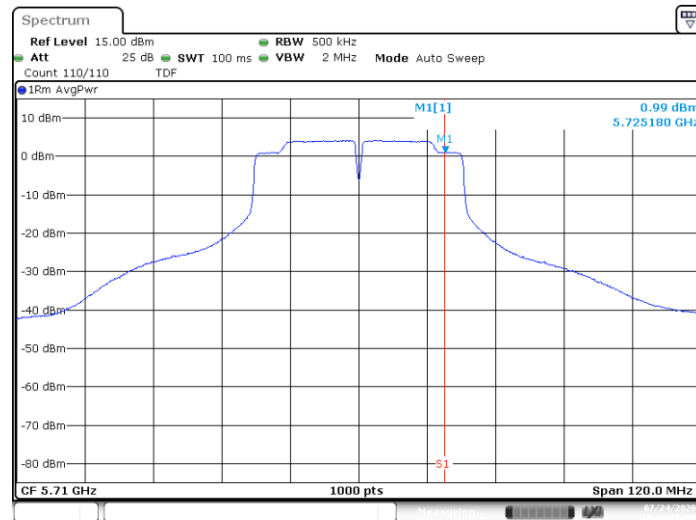


Channel 142 (Overlapped Channel)

SISO-A, 802.11ac80, VHT0

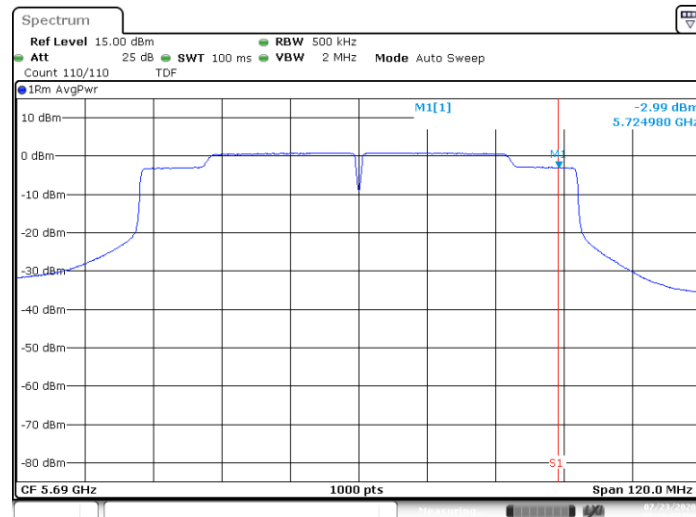


Channel 138 (Overlapped Channel)

SISO-A, 802.11ax20, HE0

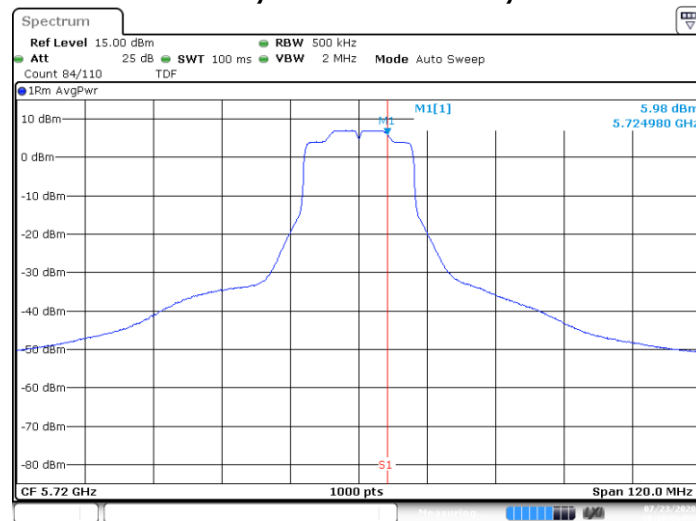


Channel 144 (Overlapped Channel)

MIMO-A, 802.11ax40, HE0

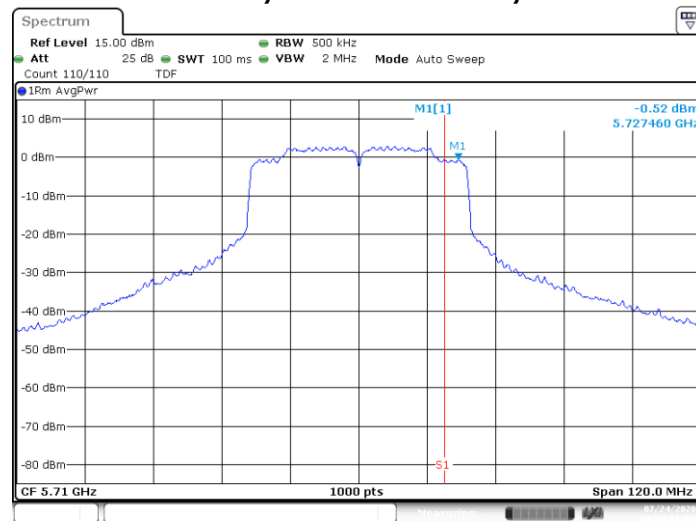

Channel 142 (Overlapped Channel)

MIMO-A, 802.11ac80, HE0

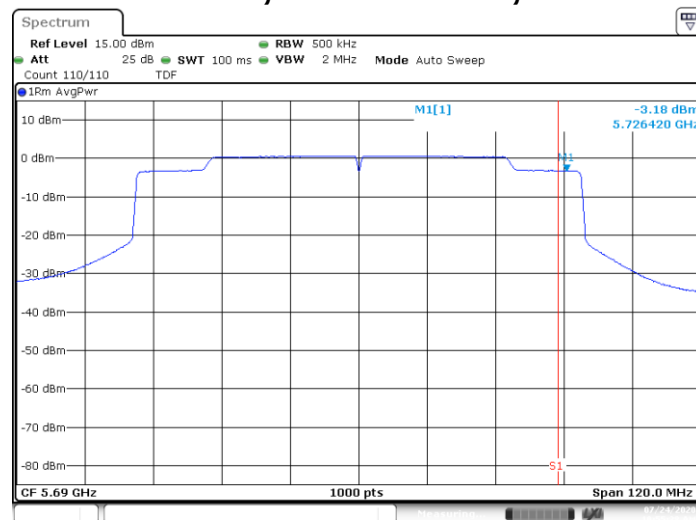


Channel 138 (Overlapped Channel)


B.2.13 Undesirable emission limits : out of band (Conducted)

802.11a, 6Mbps – Chain A

BE Low Freq Section, Peak – CH149

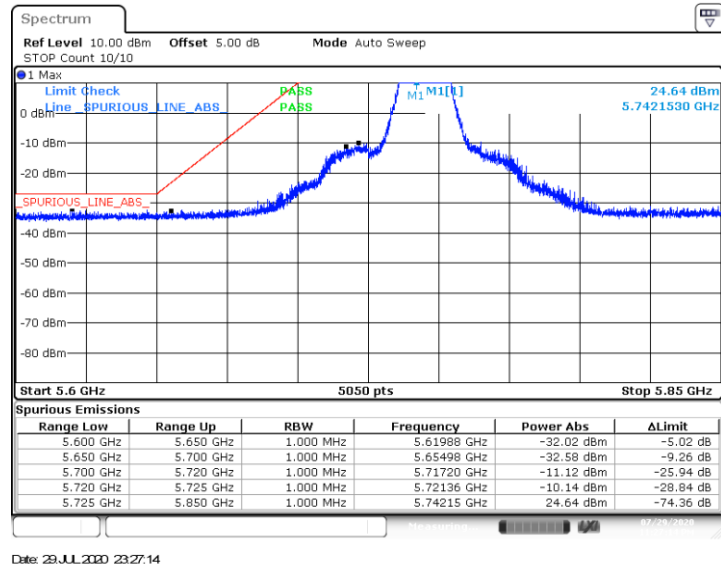


BE High Freq Section, Peak – CH165

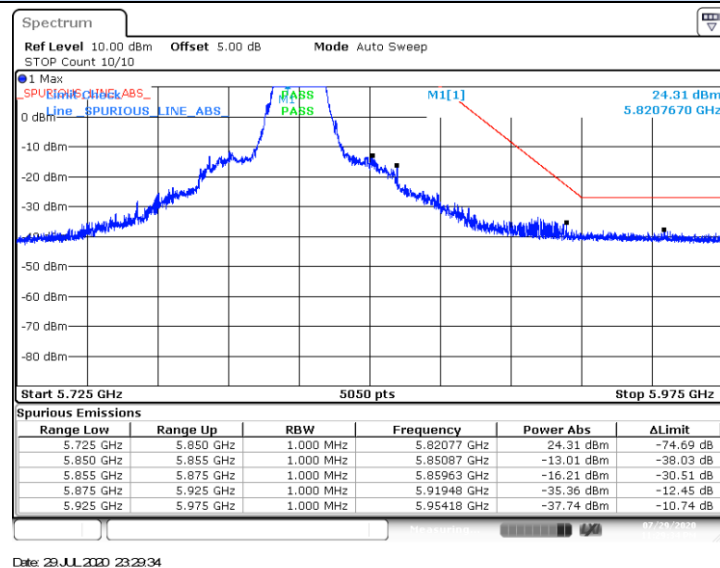


802.11a, 6Mbps – Chain B

BE Low Freq Section, Peak – CH149

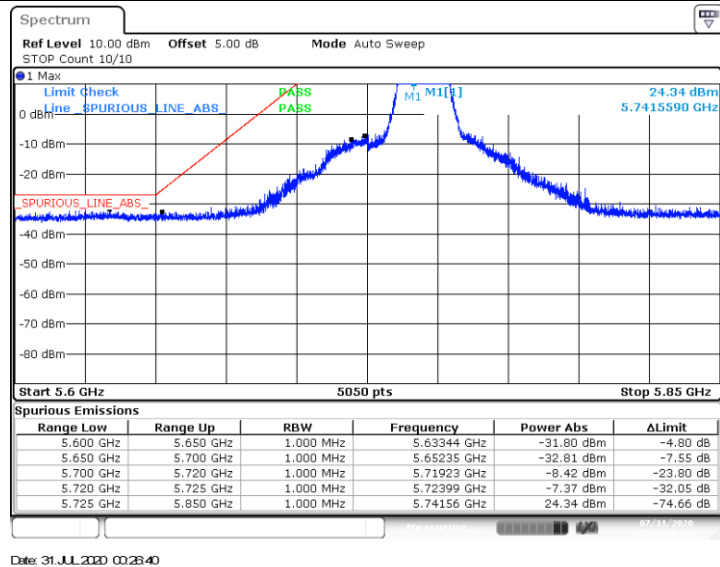


BE High Freq Section, Peak – CH165

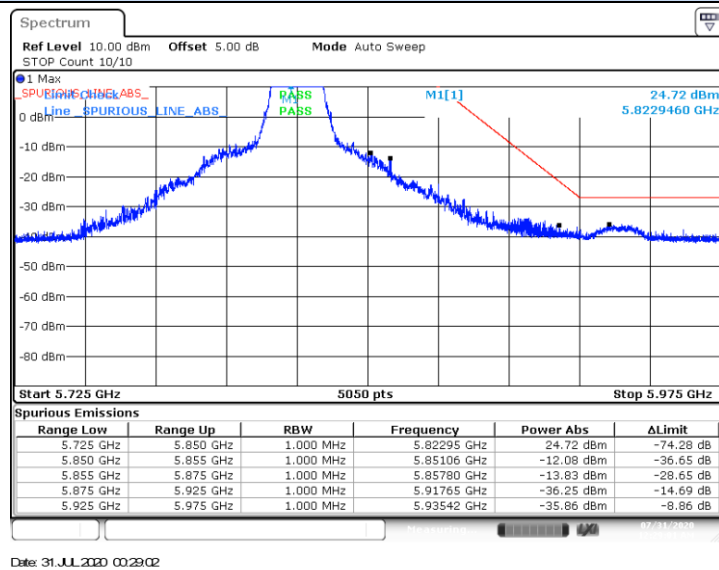


802.11n20, HT0 – SISO - Chain A

BE Low Freq Section, Peak – CH149

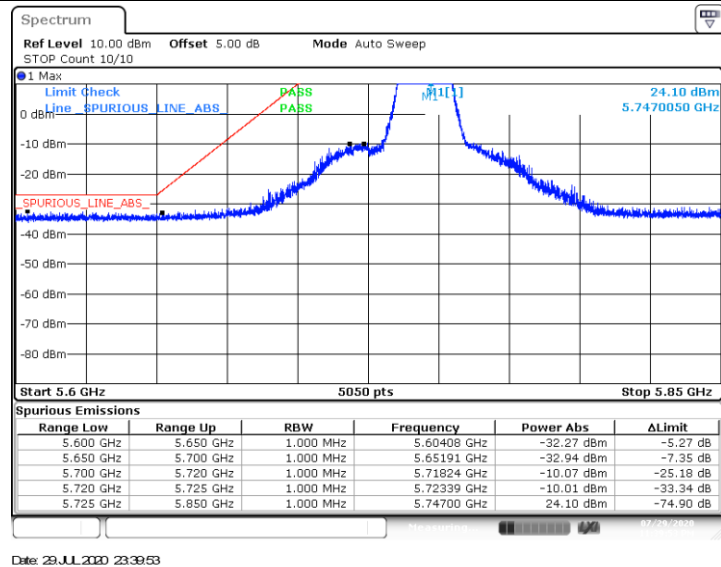


BE High Freq Section, Peak – CH165

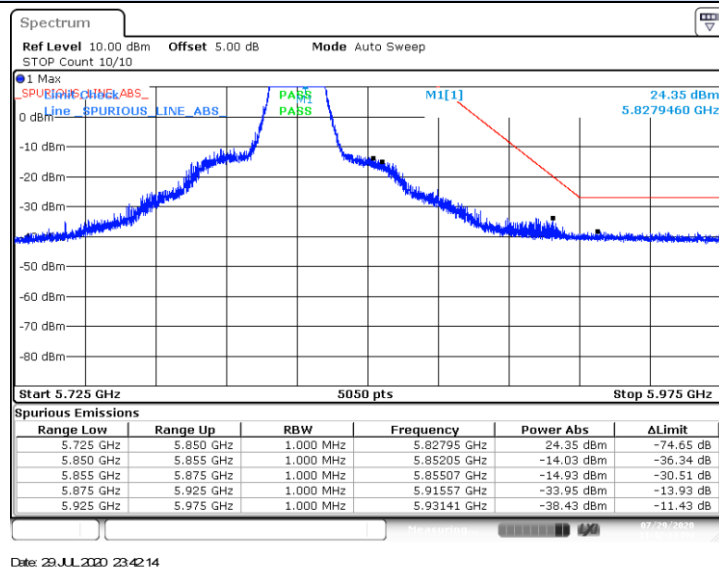

802.11n20, HT0 – SISO - Chain B

BE Low Freq Section, Peak – CH149

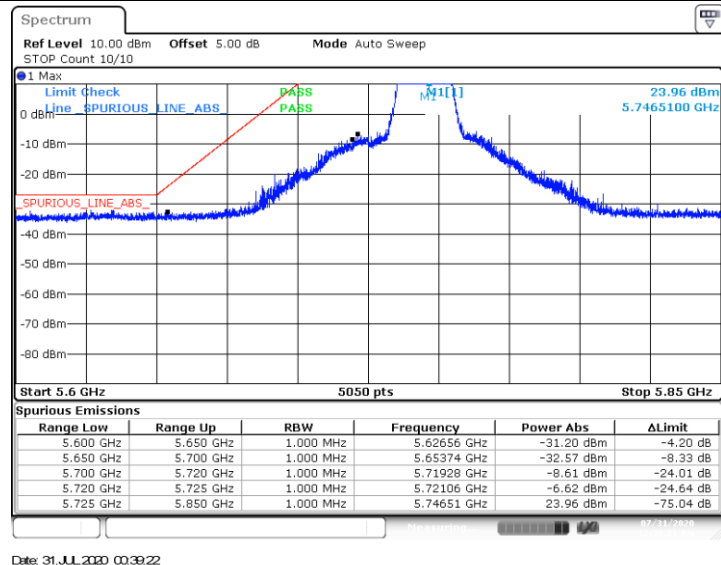

BE High Freq Section, Peak – CH165

