



TEST REPORT

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SPF0083
Page (1) of (227)

KCTL

1. Client

- Name : Intel Mobile Communications
- Address : 100 Center Point Circle, Suite 200 Columbia, South Carolina 29210 USA
- Date of Receipt : 2021-10-14

2. Use of Report : Class II Permissive Change

- 3. Name of Product and Model** : WLAN and BT, 2x2 PCIe M.2 1216 SD adapter card
- Model Name : AX211D2W
 - Manufacturer and Country of Origin: Intel Mobile Communications / USA

- 4. Host Product Name** : Notebook PC
- Host Model Name : NP930QED
 - Manufacturer : Samsung Electronics Co., Ltd.

- 5. FCC ID Number** : PD9AX211D2

- 6. Date of Test** : 2021-12-06 ~ 2021-12-18

- 7. Location of Test** : ☒ Permanent Testing Lab ☐ On Site Testing
(Address: 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea)

- 8. Test Standards** : IEEE 1528-2013, ANSI/IEEE C95.1, KDB Publication

- 9. Test Results** : Refer to the test result in the test report

Affirmation	Tested by 	Technical Manager
	Name : Dongkyu Kim (Signature)	Name : Gyuhyun Shim (Signature) 

2021-12-29

KCTL Inc.

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.

KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR21-SPF0083 Page (2) of (227)	
---	---	---

REPORT REVISION HISTORY

Date	Revision	Page No
2021-12-29	Originally issued	-

This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document. This test report is certified according to KS Q ISO/IEC 17025 and KOLAS recognition.

General remarks for test reports

Statement concerning the uncertainty of the measurement systems used for the tests

(may be required by the product standard or client)

☐ **Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:**

Procedure number, issue date and title:

Calculations leading to the reported values are on file with the testing laboratory that conducted the testing.

☒ **Statement not required by the standard or client used for type testing**

1. Identification when information is provided by the customer: Information marked " # " is provided by the customer. - Disclaimer: This information is provided by the customer and can affect the validity of results.

CONTENTS

1. General information.....	4
2. Device information	5
3. Specific Absorption Rate	28
4. SAR Measurement Procedures.....	30
5. RF Exposure Limits	31
6. FCC SAR General Measurement Procedures.....	32
7. RF Average Conducted Output Power.....	35
8. System Verification	38
9. SAR Test Results	42
10. Power Density Test Results	50
11. Simultaneous Transmission	52
12. SAR Measurement Variability.....	59
13. Measurement Uncertainty.....	60
14. Test Equipment Information	62
15. Test System Verification and Test Results.....	63
Appendixes List.....	119
Appendix A. Calibration certificate	120
Appendix B. SAR Tissue Specification.....	213
Appendix C. Power Reduction Verification	214
Appendix D. #Antenna Location & Distance	219
Appendix E. EUT Photo	220
Appendix F. Test Setup Photo.....	224
End of test report	227

KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR21-SPF0083 Page (4) of (227)	
---	---	---

1. General information

Client : Intel Mobile Communications
 Address : 100 Center Point Circle, Suite 200 Columbia, South Carolina 29210 USA
 Manufacturer : Intel Mobile Communications
 Address : 100 Center Point Circle, Suite 200 Columbia, South Carolina 29210 USA
 Contact Person : Steven Hackett / Steven.c.hackett@intel.com
 Laboratory : KCTL Inc.
 Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
 Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132
 VCCI Registration No. : R-3327, G-198, C-3706, T-1849
 CAB Identifier: KR0040, ISED Number: 8035A
 KOLAS No.: KT231

1.1 Report Overview

This report details the results of testing carried out on the samples listed in section 2, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this test report is used in any configuration other than that detailed in the test report, the manufacturer must ensure the new configuration complies with all relevant standards and certification requirements. Any mention of KCTL Inc. Wireless lab or testing done by KCTL Inc. Wireless lab made in connection with the distribution or use of the tested product must be approved in writing by KCTL Inc. Wireless lab.

2. Device information

2.1 Basic description

Product Name		WLAN and BT, 2x2 PCIe M.2 1216 SD adapter card
Product Model Name		AX211D2W
Product Manufacturer		Intel Mobile Communications
Host Product Name		Notebook PC
Host Model Name		NP930QED
Host Manufacturer		Samsung Electronics Co., Ltd.
Host Product Serial Number	Radiation	5B0Q9FMRA00004B
		5B0Q9FMRA00003P
		5B0Q9FMRA00005M
	Conduction	5B0Q9FMRA00001W
Mode of Operation		WLAN 802.11a,b,g,n,ac,ax, Bluetooth
Device Overview		WLAN 2.4 GHz: 2 412.0 MHz ~ 2 472.0 MHz U-NII-1: 5 180.0 MHz ~ 5 240.0 MHz U-NII-2A: 5 260.0 MHz ~ 5 320.0 MHz U-NII-2C: 5 500.0 MHz ~ 5 720.0 MHz U-NII-3: 5 745.0 MHz ~ 5 825.0 MHz U-NII-5: 5 955.0 MHz ~ 6 415.0 MHz U-NII-6: 6 435.0 MHz ~ 6 515.0 MHz U-NII-7: 6 535.0 MHz ~ 6 855.0 MHz U-NII-8: 6 875.0 MHz ~ 7 115.0 MHz Bluetooth: 2 402.0 MHz ~ 2 480.0 MHz
TDWR Information		5.60 GHz ~ 5.65 GHz band (TDWR) is supported by the device.

2.2 Summary of SAR Test Results

Band	Equipment Class	Highest Reported	
		1g SAR (W/kg)	PD 4cm ² (W/m ²)
WLAN 2.4 GHz	DTS	1.38	N/A
U-NII-2A	NII	1.17	N/A
U-NII-2C	NII	1.39	N/A
U-NII-3	NII	1.35	N/A
U-NII-5	NII	1.06	6.24
U-NII-6	NII	0.90	3.13
U-NII-7	NII	1.07	8.23
U-NII-8	NII	0.60	4.62
Bluetooth	DSS/DTS	0.37	N/A
Simultaneous SAR per KDB 690783 D01v01r03		1.50	N/A

KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR21-SPF0083 Page (7) of (227)	
---	---	---

2.3 #Maximum Tune-up power

This device operates using the following maximum output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

When the specified maximum output power is the same for both UNII Band1 and UNII Band 2A, begins SAR measurement in UNII band 2A; and if the highest reported SAR for U NII band 2A is $\leq 1.2\text{W/kg}$, SAR is not required for U-NII-1 band for that configuration; otherwise, each band is tested independently for SAR.

2.3.1 #Maximum WLAN Output Power (Notebook Mode)

Band	Ant.	Mode	Channel	Output Power (dBm)		
				Target	Max. Allowed	SAR Test
WLAN 2.4 GHz	Main	802.11b	13	15.50	16.50	Yes
			Except 13	16.50	17.50	
		802.11g	12	14.50	15.50	No
			13	11.50	12.50	
			Except 12,13	16.50	17.50	
		802.11n(HT20)	12	14.50	15.50	No
			13	11.50	12.50	
			Except 12,13	16.50	17.50	
		802.11n(HT40)	3	14.75	15.75	No
			6	16.50	17.50	
			9	15.00	16.00	
			10	11.75	12.75	
			11	9.25	10.25	
		SU 20 MHz	11	16.00	17.00	No
			12	13.50	14.50	
			13	10.50	11.50	
			Except 11,12,13	16.50	17.50	
		RU 26T_20 MHz	13	12.50	13.50	No
			Except 13	16.50	17.50	
		RU 52T_20 MHz	12	15.50	16.50	No
			13	12.50	13.50	
			Except 12,13	16.50	17.50	
		RU 106T_20 MHz	12	14.75	15.75	No
			13	12.50	13.50	
			Except 12,13	16.50	17.50	
		RU 242T_20 MHz	12	14.50	15.50	No
			13	11.50	12.50	
			Except 12,13	16.50	17.50	
		SU 40 MHz	3	14.75	15.75	No
			6	16.50	17.50	
			9	15.00	16.00	
			10	11.75	12.75	
			11	9.25	10.25	
		RU 26T_40 MHz	All Channel	16.50	17.50	No
		RU 52T_40 MHz	All Channel	16.50	17.50	No
		RU 106T_40 MHz	All Channel	16.50	17.50	No
		RU 242T_40 MHz	11	16.00	17.00	No
			Except 11	16.50	17.50	
		RU 484T_40 MHz	3	14.75	15.75	No
			6	16.50	17.50	
			9	15.00	16.00	
			10	11.75	12.75	
			11	9.25	10.25	

This test report shall not be reproduced, except in full, without the written approval

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SPF0083
Page (9) of (227)



Band	Ant.	Mode	Channel	Output Power (dBm)		
				Target	Max. Allowed	SAR Test
WLAN 2.4 GHz	Aux	802.11b	All Channel	14.00	15.00	Yes
		802.11g	13	11.50	12.50	No
			Except 13	14.00	15.00	
		802.11n(HT20)	13	11.50	12.50	No
			Except 13	14.00	15.00	
		802.11n(HT40)	10	12.00	13.00	Yes
			11	10.50	11.50	
			Except 10,11	14.00	15.00	
		SU 20 MHz	12	13.50	14.50	No
			13	10.50	11.50	
			Except 12,13	14.00	15.00	
		RU 26T_20 MHz	13	12.50	13.50	No
			Except 13	14.00	15.00	
		RU 52T_20 MHz	13	12.50	13.50	No
			Except 13	14.00	15.00	
		RU 106T_20 MHz	13	12.50	13.50	No
			Except 13	14.00	15.00	
		RU 242T_20 MHz	13	11.50	12.50	No
			Except 13	14.00	15.00	
		SU 40 MHz	10	12.00	13.00	No
			11	10.50	11.50	
			Except 10,11	14.00	15.00	
		RU 26T_40 MHz	All Channel	14.00	15.00	No
		RU 52T_40 MHz	All Channel	14.00	15.00	No
		RU 106T_40 MHz	All Channel	14.00	15.00	No
		RU 242T_40 MHz	All Channel	14.00	15.00	No
		RU 484T_40 MHz	10	12.00	13.00	No
			11	10.50	11.50	
			Except 10,11	14.00	15.00	

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SPF0083
Page (10) of (227)



Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
U-NII-1, U-NII-2A	Main	802.11a	All Channel	12.75	13.75	No
		802.11n(HT20)	All Channel	12.75	13.75	No
		802.11n(HT40)	All Channel	12.75	13.75	No
		802.11ac(VHT20)	All Channel	12.75	13.75	No
		802.11ac(VHT40)	All Channel	12.75	13.75	No
		802.11ac(VHT80)	All Channel	12.75	13.75	Yes
		802.11ac(VHT160)	All Channel	12.75	13.75	No
		SU (20/40/80/160 MHz)	All Channel	12.75	13.75	No
		RU 26T (20/40/80/160 MHz)	All Channel	12.75	13.75	No
		RU 52T (20/40/80/160 MHz)	All Channel	12.75	13.75	No
		RU 106T (20/40/80/160 MHz)	All Channel	12.75	13.75	No
		RU 242T (20/40/80/160 MHz)	All Channel	12.75	13.75	No
		RU 484T (40/80/160 MHz)	All Channel	12.75	13.75	No
		RU 996T (80/160 MHz)	All Channel	12.75	13.75	No
		RU 2x996T (160 MHz)	All Channel	12.75	13.75	No
	Aux	802.11a	All Channel	9.50	10.50	No
		802.11n(HT20)	All Channel	9.50	10.50	No
		802.11n(HT40)	All Channel	9.50	10.50	No
		802.11ac(VHT20)	All Channel	9.50	10.50	No
		802.11ac(VHT40)	All Channel	9.50	10.50	No
		802.11ac(VHT80)	All Channel	9.50	10.50	Yes
		802.11ac(VHT160)	All Channel	9.50	10.50	No
		SU (20/40/80/160 MHz)	All Channel	9.50	10.50	No
		RU 26T (20/40/80/160 MHz)	All Channel	9.50	10.50	No
		RU 52T (20/40/80/160 MHz)	All Channel	9.50	10.50	No
		RU 106T (20/40/80/160 MHz)	All Channel	9.50	10.50	No
		RU 242T (20/40/80/160 MHz)	All Channel	9.50	10.50	No
		RU 484T (40/80/160 MHz)	All Channel	9.50	10.50	No
		RU 996T (80/160 MHz)	All Channel	9.50	10.50	No
		RU 2x996T (160 MHz)	All Channel	9.50	10.50	No

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SPF0083
Page (11) of (227)



Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
U-NII-2C	Main	802.11a	All Channel	11.75	12.75	No
		802.11n(HT20)	All Channel	11.75	12.75	No
		802.11n(HT40)	All Channel	11.75	12.75	No
		802.11ac(VHT20)	All Channel	11.75	12.75	No
		802.11ac(VHT40)	All Channel	11.75	12.75	No
		802.11ac(VHT80)	All Channel	11.75	12.75	Yes
		802.11ac(VHT160)	All Channel	11.75	12.75	No
		SU (20/40/80/160 MHz)	All Channel	11.75	12.75	No
		RU 26T (20/40/80/160 MHz)	All Channel	11.75	12.75	No
		RU 52T (20/40/80/160 MHz)	All Channel	11.75	12.75	No
		RU 106T (20/40/80/160 MHz)	All Channel	11.75	12.75	No
		RU 242T (20/40/80/160 MHz)	All Channel	11.75	12.75	No
		RU 484T (40/80/160 MHz)	All Channel	11.75	12.75	No
		RU 996T (80/160 MHz)	All Channel	11.75	12.75	No
		RU 2x996T (160 MHz)	All Channel	11.75	12.75	No
	Aux	802.11a	All Channel	8.50	9.50	No
		802.11n(HT20)	All Channel	8.50	9.50	No
		802.11n(HT40)	All Channel	8.50	9.50	No
		802.11ac(VHT20)	All Channel	8.50	9.50	No
		802.11ac(VHT40)	All Channel	8.50	9.50	No
		802.11ac(VHT80)	All Channel	8.50	9.50	Yes
		802.11ac(VHT160)	All Channel	8.50	9.50	No
		SU (20/40/80/160 MHz)	All Channel	8.50	9.50	No
		RU 26T (20/40/80/160 MHz)	All Channel	8.50	9.50	No
		RU 52T (20/40/80/160 MHz)	All Channel	8.50	9.50	No
		RU 106T (20/40/80/160 MHz)	All Channel	8.50	9.50	No
		RU 242T (20/40/80/160 MHz)	All Channel	8.50	9.50	No
		RU 484T (40/80/160 MHz)	All Channel	8.50	9.50	No
		RU 996T (80/160 MHz)	All Channel	8.50	9.50	No
		RU 2x996T (160 MHz)	All Channel	8.50	9.50	No

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SPF0083
Page (12) of (227)



Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
U-NII-3	Main	802.11a	All Channel	11.50	12.50	No
		802.11n(HT20)	All Channel	11.50	12.50	No
		802.11n(HT40)	All Channel	11.50	12.50	No
		802.11ac(VHT20)	All Channel	11.50	12.50	No
		802.11ac(VHT40)	All Channel	11.50	12.50	No
		802.11ac(VHT80)	All Channel	11.50	12.50	Yes
		SU (20/40/80 MHz)	All Channel	11.50	12.50	No
		RU 26T (20/40/80 MHz)	All Channel	11.50	12.50	No
		RU 52T (20/40/80 MHz)	All Channel	11.50	12.50	No
		RU 106T (20/40/80 MHz)	All Channel	11.50	12.50	No
		RU 242T (20/40/80 MHz)	All Channel	11.50	12.50	No
		RU 484T (40/80 MHz)	All Channel	11.50	12.50	No
		RU 996T (80 MHz)	All Channel	11.50	12.50	No
	Aux	802.11a	All Channel	8.00	9.00	No
		802.11n(HT20)	All Channel	8.00	9.00	No
		802.11n(HT40)	All Channel	8.00	9.00	No
		802.11ac(VHT20)	All Channel	8.00	9.00	No
		802.11ac(VHT40)	All Channel	8.00	9.00	No
		802.11ac(VHT80)	All Channel	8.00	9.00	Yes
		SU (20/40/80 MHz)	All Channel	8.00	9.00	No
		RU 26T (20/40/80 MHz)	All Channel	8.00	9.00	No
		RU 52T (20/40/80 MHz)	All Channel	8.00	9.00	No
		RU 106T (20/40/80 MHz)	All Channel	8.00	9.00	No
		RU 242T (20/40/80 MHz)	All Channel	8.00	9.00	No
		RU 484T (40/80 MHz)	All Channel	8.00	9.00	No
		RU 996T (80 MHz)	All Channel	8.00	9.00	No

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SPF0083
Page (13) of (227)



Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
U-NII-5	Main	SU 20 MHz	All Channel	4.50	5.50	No
		SU 40 MHz	All Channel	7.75	8.75	No
		SU 80 MHz	All Channel	10.25	11.25	No
		SU 160 MHz	All Channel	11.00	12.00	Yes
		RU 26T (20/40/80/160 MHz)	All Channel	-4.00	-3.00	No
		RU 52T (20/40/80/160 MHz)	All Channel	0.00	1.00	No
		RU 106T (20/40/80/160 MHz)	All Channel	2.00	3.00	No
		RU 242T (20/40/80/160 MHz)	All Channel	4.50	5.50	No
		RU 484T (40/80/160 MHz)	All Channel	7.75	8.75	No
		RU 996T (80/160 MHz)	All Channel	10.25	11.25	No
		RU 2x996T (160 MHz)	All Channel	11.00	12.00	No
	Aux	SU 20 MHz	All Channel	4.50	5.50	No
		SU 40 MHz	All Channel	7.75	8.75	No
		SU 80 MHz	All Channel	10.00	11.00	No
		SU 160 MHz	All Channel	10.00	11.00	Yes
		RU 26T (20/40/80/160 MHz)	All Channel	-4.00	-3.00	No
		RU 52T (20/40/80/160 MHz)	All Channel	0.00	1.00	No
		RU 106T (20/40/80/160 MHz)	All Channel	2.00	3.00	No
		RU 242T (20/40/80/160 MHz)	All Channel	4.50	5.50	No
		RU 484T (40/80/160 MHz)	All Channel	7.75	8.75	No
		RU 996T (80/160 MHz)	All Channel	10.00	11.00	No
		RU 2x996T (160 MHz)	All Channel	10.00	11.00	No

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SPF0083
Page (14) of (227)



Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
U-NII-6	Main	SU 20 MHz	All Channel	3.50	4.50	No
		SU 40 MHz	All Channel	7.50	8.50	No
		SU 80 MHz	All Channel	10.25	11.25	No
		SU 160 MHz	All Channel	11.00	12.00	Yes
		RU 26T (20/40/80/160 MHz)	All Channel	-4.00	-3.00	No
		RU 52T (20/40/80/160 MHz)	All Channel	0.00	1.00	No
		RU 106T (20/40/80/160 MHz)	All Channel	2.00	3.00	No
		RU 242T (20/40/80/160 MHz)	All Channel	4.50	5.50	No
		RU 484T (40 MHz)	All Channel	7.50	8.50	No
		RU 484T (80/160 MHz)	All Channel	7.75	8.75	No
		RU 996T (80/160 MHz)	All Channel	10.25	11.25	No
		RU 2x996T (160 MHz)	All Channel	11.00	12.00	No
	Aux	SU 20 MHz	All Channel	3.50	4.50	No
		SU 40 MHz	All Channel	7.50	8.50	No
		SU 80 MHz	All Channel	10.00	11.00	No
		SU 160 MHz	All Channel	10.00	11.00	Yes
		RU 26T (20/40/80/160 MHz)	All Channel	-4.00	-3.00	No
		RU 52T (20/40/80/160 MHz)	All Channel	0.00	1.00	No
		RU 106T (20/40/80/160 MHz)	All Channel	2.00	3.00	No
		RU 242T (20/40/80/160 MHz)	All Channel	4.50	5.50	No
		RU 484T (40 MHz)	All Channel	7.50	8.50	No
		RU 484T (80/160 MHz)	All Channel	7.75	8.75	No
		RU 996T (80/160 MHz)	All Channel	10.00	11.00	No
		RU 2x996T (160 MHz)	All Channel	10.00	11.00	No

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SPF0083
Page (15) of (227)



Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
U-NII-7	Main	SU 20 MHz	All Channel	3.75	4.75	No
		SU 40 MHz	115	7.50	8.50	No
			Except 115	7.00	8.00	
		SU 80 MHz	All Channel	9.50	10.50	No
		SU 160 MHz	143	11.00	12.00	Yes
			175	9.50	10.50	
		RU 26T (20/40/80/160 MHz)	115	-4.00	-3.00	No
			Except 115	-4.75	-3.75	
		RU 52T(20/40/80/160 MHz)	115	0.00	1.00	No
			Except 115	-1.75	-0.75	
		RU 106T (20/40/80/160 MHz)	115	2.00	3.00	No
			Except 115	1.25	2.25	
		RU 242T (20/40/80/160 MHz)	115	4.50	5.50	No
			Except 115	3.75	4.75	
		RU 484T (40 MHz)	115	7.50	8.50	No
			Except 115	7.00	8.00	
		RU 484T (80/160 MHz)	115	7.50	8.50	No
			Except 115	7.00	8.00	
		RU 996T (80/160 MHz)	All Channel	9.50	10.50	No
		RU 2x996T (160 MHz)	143	11.00	12.00	No
			175	9.50	10.50	
	Aux	SU 20 MHz	All Channel	3.75	4.75	No
		SU 40 MHz	115	7.50	8.50	No
			Except 115	7.00	8.00	
		SU 80 MHz	All Channel	9.50	10.50	No
		SU 160 MHz	All Channel	10.00	11.00	Yes
			All Channel	10.00	11.00	
		RU 26T (20/40/80/160 MHz)	115	-4.00	-3.00	No
			Except 115	-4.75	-3.75	
		RU 52T(20/40/80/160 MHz)	115	0.00	1.00	No
			Except 115	-1.75	-0.75	
		RU 106T (20/40/80/160 MHz)	115	2.00	3.00	No
			Except 115	1.25	2.25	
		RU 242T (20/40/80/160 MHz)	115	4.50	5.50	No
			Except 115	3.75	4.75	
		RU 484T (40 MHz)	115	7.50	8.50	No
			Except 115	7.00	8.00	
		RU 484T (80/160 MHz)	115	7.50	8.50	No
			Except 115	7.00	8.00	
		RU 996T (80/160 MHz)	All Channel	9.50	10.50	No
		RU 2x996T (160 MHz)	All Channel	10.00	11.00	No

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SPF0083
Page (16) of (227)



Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
U-NII-8	Main	SU 20 MHz	233	-1.50	-0.50	No
			Except 233	2.75	3.75	
		SU 40 MHz	All Channel	7.00	8.00	No
		SU 80 MHz	All Channel	9.50	10.50	No
		SU 160 MHz	All Channel	9.50	10.50	Yes
		RU 26T (20/40/80/160 MHz)	All Channel	-4.75	-3.75	No
		RU 52T (20/40/80/160 MHz)	All Channel	-1.75	-0.75	No
		RU 106T (20/40/80/160 MHz)	All Channel	1.25	2.25	No
		RU 242T (20 MHz)	233	-1.50	-0.50	No
			Except 233	2.75	3.75	
		RU 242T (40/80/160 MHz)	All Channel	3.75	4.75	
		RU 484T (40/80/160 MHz)	All Channel	7.00	8.00	No
		RU 996T (80/160 MHz)	All Channel	9.50	10.50	No
	Aux	SU 20 MHz	233	-1.50	-0.50	No
			Except 233	2.75	3.75	
		SU 40 MHz	All Channel	7.00	8.00	No
		SU 80 MHz	All Channel	9.50	10.50	No
		SU 160 MHz	All Channel	10.00	11.00	Yes
		RU 26T (20/40/80/160 MHz)	All Channel	-4.75	-3.75	No
		RU 52T (20/40/80/160 MHz)	All Channel	-1.75	-0.75	No
		RU 106T (20/40/80/160 MHz)	All Channel	1.25	2.25	No
		RU 242T (20 MHz)	233	-1.50	-0.50	No
			Except 233	2.75	3.75	
		RU 242T (40/80/160 MHz)	All Channel	3.75	4.75	
		RU 484T (40/80/160 MHz)	All Channel	7.00	8.00	No
		RU 996T (80/160 MHz)	All Channel	9.50	10.50	No
		RU 2x996T (160 MHz)	All Channel	10.00	11.00	No

2.3.2 #Maximum WLAN Output Power (Tablet Mode)

Band	Ant.	Mode	Channel	Output Power (dBm)		
				Target	Max. Allowed	SAR Test
WLAN 2.4 GHz	Main	802.11b	All Channel	14.00	15.00	Yes
		802.11g	13	11.50	12.50	No
			Except 13	14.00	15.00	
		802.11n(HT20)	13	11.50	12.50	No
			Except 13	14.00	15.00	
		802.11n(HT40)	10	11.75	12.75	No
			11	9.25	10.25	
			Except 10,11	14.00	15.00	
		SU 20 MHz	12	13.50	14.50	No
			13	10.50	11.50	
			Except 12,13	14.00	15.00	
		RU 26T_20 MHz	13	12.50	13.50	No
			Except 13	14.00	15.00	
		RU 52T_20 MHz	13	12.50	13.50	No
			Except 13	14.00	15.00	
		RU 106T_20 MHz	13	12.50	13.50	No
			Except 13	14.00	15.00	
		RU 242T_20 MHz	13	11.50	12.50	No
			Except 13	14.00	15.00	
		SU 40 MHz	10	11.75	12.75	No
			11	9.25	10.25	
			Except 10,11	14.00	15.00	
		RU 26T_40 MHz	All Channel	14.00	15.00	No
		RU 52T_40 MHz	All Channel	14.00	15.00	No
		RU 106T_40 MHz	All Channel	14.00	15.00	No
		RU 242T_40 MHz	All Channel	14.00	15.00	No
		RU 484T_40 MHz	10	11.75	12.75	No
			11	9.25	10.25	
			Except 10,11	14.00	15.00	

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SPF0083
Page (18) of (227)



Band	Ant.	Mode	Channel	Output Power (dBm)		
				Target	Max. Allowed	SAR Test
WLAN 2.4 GHz	Aux	802.11b	All Channel	14.00	15.00	Yes
		802.11g	13	11.50	12.50	No
			Except 13	14.00	15.00	
		802.11n(HT20)	13	11.50	12.50	No
			Except 13	14.00	15.00	
		802.11n(HT40)	10	12.00	13.00	No
			11	10.50	11.50	
			Except 10,11	14.00	15.00	
		SU 20 MHz	12	13.50	14.50	No
			13	10.50	11.50	
			Except 12,13	14.00	15.00	
		RU 26T_20 MHz	13	12.50	13.50	No
			Except 13	14.00	15.00	
		RU 52T_20 MHz	13	12.50	13.50	No
			Except 13	14.00	15.00	
		RU 106T_20 MHz	13	12.50	13.50	No
			Except 13	14.00	15.00	
		RU 242T_20 MHz	13	11.50	12.50	No
			Except 13	14.00	15.00	
		SU 40 MHz	10	12.00	13.00	No
			11	10.50	11.50	
			Except 10,11	14.00	15.00	
		RU 26T_40 MHz	All Channel	14.00	15.00	No
		RU 52T_40 MHz	All Channel	14.00	15.00	No
		RU 106T_40 MHz	All Channel	14.00	15.00	No
		RU 242T_40 MHz	All Channel	14.00	15.00	No
		RU 484T_40 MHz	10	12.00	13.00	No
			11	10.50	11.50	
			Except 10,11	14.00	15.00	
U-NII-1, U-NII-2A	Main, Aux	802.11a	All Channel	11.00	12.00	No
		802.11n(HT20)	All Channel	11.00	12.00	No
		802.11n(HT40)	All Channel	11.00	12.00	No
		802.11ac(VHT20)	All Channel	11.00	12.00	No
		802.11ac(VHT40)	All Channel	11.00	12.00	No
		802.11ac(VHT80)	All Channel	11.00	12.00	Yes
		802.11ac(VHT160)	All Channel	11.00	12.00	No
		SU (20/40/80/160 MHz)	All Channel	11.00	12.00	No
		RU 26T (20/40/80/160 MHz)	All Channel	11.00	12.00	No
		RU 52T (20/40/80/160 MHz)	All Channel	11.00	12.00	No
		RU 106T (20/40/80/160 MHz)	All Channel	11.00	12.00	No
		RU 242T (20/40/80/160 MHz)	All Channel	11.00	12.00	No
		RU 484T (40/80/160 MHz)	All Channel	11.00	12.00	No
		RU 996T (80/160 MHz)	All Channel	11.00	12.00	No
		RU 2x996T (160 MHz)	All Channel	11.00	12.00	No

This test report shall not be reproduced, except in full, without the written approval

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SPF0083
Page (19) of (227)



Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
U-NII-2C	Main	802.11a	All Channel	11.00	12.00	No
		802.11n(HT20)	All Channel	11.00	12.00	No
		802.11n(HT40)	All Channel	11.00	12.00	No
		802.11ac(VHT20)	All Channel	11.00	12.00	No
		802.11ac(VHT40)	All Channel	11.00	12.00	No
		802.11ac(VHT80)	All Channel	11.00	12.00	Yes
		802.11ac(VHT160)	All Channel	11.00	12.00	No
		SU (20/40/80/160 MHz)	All Channel	11.00	12.00	No
		RU 26T (20/40/80/160 MHz)	All Channel	11.00	12.00	No
		RU 52T (20/40/80/160 MHz)	All Channel	11.00	12.00	No
		RU 106T (20/40/80/160 MHz)	All Channel	11.00	12.00	No
		RU 242T (20/40/80/160 MHz)	All Channel	11.00	12.00	No
		RU 484T (40/80/160 MHz)	All Channel	11.00	12.00	No
		RU 996T (80/160 MHz)	All Channel	11.00	12.00	No
		RU 2x996T (160 MHz)	All Channel	11.00	12.00	No
	Aux	802.11a	All Channel	10.00	11.00	No
		802.11n(HT20)	All Channel	10.00	11.00	No
		802.11n(HT40)	All Channel	10.00	11.00	No
		802.11ac(VHT20)	All Channel	10.00	11.00	No
		802.11ac(VHT40)	All Channel	10.00	11.00	No
		802.11ac(VHT80)	All Channel	10.00	11.00	Yes
		802.11ac(VHT160)	All Channel	10.00	11.00	No
		SU (20/40/80/160 MHz)	All Channel	10.00	11.00	No
		RU 26T (20/40/80/160 MHz)	All Channel	10.00	11.00	No
		RU 52T (20/40/80/160 MHz)	All Channel	10.00	11.00	No
		RU 106T (20/40/80/160 MHz)	All Channel	10.00	11.00	No
		RU 242T (20/40/80/160 MHz)	All Channel	10.00	11.00	No
		RU 484T (40/80/160 MHz)	All Channel	10.00	11.00	No
		RU 996T (80/160 MHz)	All Channel	10.00	11.00	No
		RU 2x996T (160 MHz)	All Channel	10.00	11.00	No

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SPF0083
Page (20) of (227)



Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
U-NII-3	Main	802.11a	All Channel	11.50	12.50	No
		802.11n(HT20)	All Channel	11.50	12.50	No
		802.11n(HT40)	All Channel	11.50	12.50	No
		802.11ac(VHT20)	All Channel	11.50	12.50	No
		802.11ac(VHT40)	All Channel	11.50	12.50	No
		802.11ac(VHT80)	All Channel	11.50	12.50	Yes
		SU (20/40/80 MHz)	All Channel	11.50	12.50	No
		RU 26T (20/40/80 MHz)	All Channel	11.50	12.50	No
		RU 52T (20/40/80 MHz)	All Channel	11.50	12.50	No
		RU 106T (20/40/80 MHz)	All Channel	11.50	12.50	No
		RU 242T (20/40/80 MHz)	All Channel	11.50	12.50	No
		RU 484T (40/80 MHz)	All Channel	11.50	12.50	No
		RU 996T (80 MHz)	All Channel	11.50	12.50	No
	Aux	802.11a	All Channel	10.50	11.50	No
		802.11n(HT20)	All Channel	10.50	11.50	No
		802.11n(HT40)	All Channel	10.50	11.50	No
		802.11ac(VHT20)	All Channel	10.50	11.50	No
		802.11ac(VHT40)	All Channel	10.50	11.50	No
		802.11ac(VHT80)	All Channel	10.50	11.50	Yes
		SU (20/40/80 MHz)	All Channel	10.50	11.50	No
		RU 26T (20/40/80 MHz)	All Channel	10.50	11.50	No
		RU 52T (20/40/80 MHz)	All Channel	10.50	11.50	No
		RU 106T (20/40/80 MHz)	All Channel	10.50	11.50	No
		RU 242T (20/40/80 MHz)	All Channel	10.50	11.50	No
		RU 484T (40/80 MHz)	All Channel	10.50	11.50	No
		RU 996T (80 MHz)	All Channel	10.50	11.50	No

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SPF0083
Page (21) of (227)



Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
U-NII-5	Main	SU 20 MHz	All Channel	4.50	5.50	No
		SU 40 MHz	All Channel	7.75	8.75	No
		SU 80 MHz	All Channel	10.25	11.25	No
		SU 160 MHz	15	11.00	12.00	Yes
			Except 15	11.50	12.50	
		RU 26T (20/40/80/160 MHz)	All Channel	-4.00	-3.00	No
		RU 52T (20/40/80/160 MHz)	All Channel	0.00	1.00	No
		RU 106T (20/40/80/160 MHz)	All Channel	2.00	3.00	No
		RU 242T (20/40/80/160 MHz)	All Channel	4.50	5.50	No
		RU 484T (40/80/160 MHz)	All Channel	7.75	8.75	No
		RU 996T (80/160 MHz)	All Channel	10.25	11.25	No
		RU 2x996T (160 MHz)	15	11.00	12.00	No
			Except 15	11.50	12.50	
	Aux	SU 20 MHz	All Channel	4.50	5.50	No
		SU 40 MHz	All Channel	7.75	8.75	No
		SU 80 MHz	All Channel	10.25	11.25	No
		SU 160 MHz	All Channel	11.00	12.00	Yes
		RU 26T (20/40/80/160 MHz)	All Channel	-4.00	-3.00	No
		RU 52T (20/40/80/160 MHz)	All Channel	0.00	1.00	No
		RU 106T (20/40/80/160 MHz)	All Channel	2.00	3.00	No
		RU 242T (20/40/80/160 MHz)	All Channel	4.50	5.50	No
		RU 484T (40/80/160 MHz)	All Channel	7.75	8.75	No
		RU 996T (80/160 MHz)	All Channel	10.25	11.25	No
		RU 2x996T (160 MHz)	All Channel	11.00	12.00	No

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SPF0083
Page (22) of (227)



Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
U-NII-6	Main	SU 20 MHz	All Channel	3.50	4.50	No
		SU 40 MHz	All Channel	7.50	8.50	No
		SU 80 MHz	All Channel	10.25	11.25	No
		SU 160 MHz	All Channel	11.00	12.00	Yes
		RU 26T (20/40/80/160 MHz)	All Channel	-4.00	-3.00	No
		RU 52T (20/40/80/160 MHz)	All Channel	0.00	1.00	No
		RU 106T (20/40/80/160 MHz)	All Channel	2.00	3.00	No
		RU 242T (20/40/80/160 MHz)	All Channel	4.50	5.50	No
		RU 484T (40 MHz)	All Channel	7.50	8.50	No
		RU 484T (80/160 MHz)	All Channel	7.75	8.75	No
		RU 996T (80/160 MHz)	All Channel	10.25	11.25	No
		RU 2x996T (160 MHz)	All Channel	11.00	12.00	No
	Aux	SU 20 MHz	All Channel	3.50	4.50	No
		SU 40 MHz	All Channel	7.50	8.50	No
		SU 80 MHz	All Channel	10.25	11.25	No
		SU 160 MHz	All Channel	11.00	12.00	Yes
		RU 26T (20/40/80/160 MHz)	All Channel	-4.00	-3.00	No
		RU 52T (20/40/80/160 MHz)	All Channel	0.00	1.00	No
		RU 106T (20/40/80/160 MHz)	All Channel	2.00	3.00	No
		RU 242T (20/40/80/160 MHz)	All Channel	4.50	5.50	No
		RU 484T (40 MHz)	All Channel	7.50	8.50	No
		RU 484T (80/160 MHz)	All Channel	7.75	8.75	No
		RU 996T (80/160 MHz)	All Channel	10.25	11.25	No
		RU 2x996T (160 MHz)	All Channel	11.00	12.00	No

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SPF0083
Page (23) of (227)



Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
U-NII-7	Main	SU 20 MHz	All Channel	3.75	4.75	No
		SU 40 MHz	115	7.50	8.50	No
			Except 115	7.00	8.00	
		SU 80 MHz	All Channel	9.50	10.00	No
		SU 160 MHz	143	11.00	12.00	Yes
			175	10.50	11.50	
		RU 26T (20/40/80/160 MHz)	115	-4.00	-3.00	No
			Except 115	-4.75	-3.75	
		RU 52T (20/40/80/160 MHz)	115	0.00	1.00	No
			Except 115	-1.75	-0.75	
		RU 106T (20/40/80/160 MHz)	115	2.00	3.00	No
			Except 115	1.25	2.25	
		RU 242T (20/40/80/160 MHz)	115	4.50	5.50	No
			Except 115	3.75	4.75	
		RU 484T (40/80/160 MHz)	115	7.50	8.50	No
			Except 115	7.00	8.00	
		RU 996T (80/160 MHz)	All Channel	9.50	10.00	No
		RU 2x996T (160 MHz)	143	11.00	12.00	No
			175	10.50	11.50	
	Aux	SU 20 MHz	All Channel	3.75	4.75	No
		SU 40 MHz	115	7.50	8.50	No
			Except 115	7.00	8.00	
		SU 80 MHz	All Channel	9.50	10.00	No
		SU 160 MHz	All Channel	10.50	11.50	Yes
		RU 26T (20/40/80/160 MHz)	115	-4.00	-3.00	No
			Except 115	-4.75	-3.75	
		RU 52T (20/40/80/160 MHz)	115	0.00	1.00	No
			Except 115	-1.75	-0.75	
		RU 106T (20/40/80/160 MHz)	115	2.00	3.00	No
			Except 115	1.25	2.25	
		RU 242T (20/40/80/160 MHz)	115	4.50	5.50	No
			Except 115	3.75	4.75	
		RU 484T (40/80/160 MHz)	115	7.50	8.50	No
			Except 115	7.00	8.00	
		RU 996T (80/160 MHz)	All Channel	9.50	10.00	No
		RU 2x996T (160 MHz)	All Channel	10.50	11.50	No

Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
U-NII-8	Main, Aux	SU 20 MHz	233	-1.50	-0.50	No
			Except 233	2.75	3.75	
		SU 40 MHz	All Channel	7.00	8.00	No
		SU 80 MHz	All Channel	9.50	10.50	No
		SU 160 MHz	All Channel	10.50	11.50	Yes
		RU 26T (20/40/80/160 MHz)	All Channel	-4.75	-3.75	No
		RU 52T (20/40/80/160 MHz)	All Channel	-1.75	-0.75	No
		RU 106T (20/40/80/160 MHz)	All Channel	1.25	2.25	No
		RU 242T (20 MHz)	233	-1.50	-0.50	No
			Except 233	2.75	3.75	
		RU 242T (40/80/160 MHz)	All Channel	3.75	4.75	No
		RU 484T (40/80/160 MHz)	All Channel	7.00	8.00	No
		RU 996T (80/160 MHz)	All Channel	9.50	10.50	No
		RU 2x996T (160 MHz)	All Channel	10.50	11.50	No

2.3.3 #Maximum Bluetooth Output Power(Notebook Mode&Tablet Mode)

Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
Bluetooth	Aux	BDR(GFSK)	All Channel	9.50	11.00	Yes
		EDR ($\pi/4$ DQPSK)	All Channel	5.50	7.00	No
		EDR(8DPSK)	All Channel	5.50	7.00	No
		LE(GFSK)	All Channel	5.50	7.00	No

2.4 SAR Test Configurations

2.4.1 #DUT Antenna Locations

The device is a 2-in-1 model that operations as a laptop when folded 90 degrees and as a tablet when folded 360 degrees.

When in tablet mode the overall dimensions of this device are > 20 cm.

A diagram showing the location of the device antennas can be found in Appendix D.

2.4.2 SAR Test Exclusion Considerations(Tablet Mode)

Ant.	Band	Freq. [MHz]	Output Power		Separation distances [mm]					SAR Exemption				
			dBm	mW	Rear	Left	Right	Top	Bot.	Rear	Left	Right	Top	Bottom
Main	2.4 GHz	2 462.0	15.00	32	5	5	275	60	88	10.04 Measure	10.04 Measure	2346mW EXEMPT	196mW EXEMPT	476mW EXEMPT
	U-NII-2A	5 320.0	12.00	16	5	5	275	60	88	7.38 Measure	7.38 Measure	2315mW EXEMPT	165mW EXEMPT	445mW EXEMPT
	U-NII-2C	5 720.0	12.00	16	5	5	275	60	88	7.65 Measure	7.65 Measure	2313mW EXEMPT	163mW EXEMPT	443mW EXEMPT
	U-NII-3	5 825.0	12.50	18	5	5	275	60	88	8.69 Measure	8.69 Measure	2312mW EXEMPT	162mW EXEMPT	442mW EXEMPT
	U-NII-5	6 415.0	12.50	18	5	5	275	60	88	3.039 Measure	3.039 Measure	0.055 EXEMPT	0.253 EXEMPT	0.173 EXEMPT
	U-NII 6	6 515.0	12.00	16	5	5	275	60	88	2.723 Measure	2.723 Measure	0.050 EXEMPT	0.227 EXEMPT	0.155 EXEMPT
	U-NII 7	6 855.0	12.00	16	5	5	275	60	88	2.793 Measure	2.793 Measure	0.051 EXEMPT	0.233 EXEMPT	0.159 EXEMPT
	U-NII 8	7 115.0	11.50	14	5	5	275	60	88	2.490 Measure	2.490 Measure	0.045 EXEMPT	0.207 EXEMPT	0.141 EXEMPT
Aux	2.4 GHz	2 462.0	15.00	32	5	272	5	60	91	10.04 Measure	2316mW EXEMPT	10.04 Measure	196mW EXEMPT	506mW EXEMPT
	U-NII-2A	5 320.0	12.00	16	5	272	5	60	91	7.38 Measure	2285mW EXEMPT	7.38 Measure	165mW EXEMPT	475mW EXEMPT
	U-NII-2C	5 720.0	11.00	13	5	272	5	60	91	6.22 Measure	2283mW EXEMPT	6.22 Measure	163mW EXEMPT	473mW EXEMPT
	U-NII-3	5 825.0	11.50	14	5	272	5	60	91	6.76 Measure	2282mW EXEMPT	6.76 Measure	162mW EXEMPT	472mW EXEMPT
	U-NII-5	6 415.0	12.00	16	5	272	5	60	91	2.702 Measure	0.050 EXEMPT	2.702 Measure	0.225 EXEMPT	0.148 EXEMPT
	U-NII 6	6 515.0	12.00	16	5	272	5	60	91	2.723 Measure	0.050 EXEMPT	2.723 Measure	0.227 EXEMPT	0.150 EXEMPT
	U-NII 7	6 855.0	11.50	14	5	272	5	60	91	2.444 Measure	0.045 EXEMPT	2.444 Measure	0.204 EXEMPT	0.134 EXEMPT
	U-NII 8	7 115.0	11.50	14	5	272	5	60	91	2.490 Measure	0.046 EXEMPT	2.490 Measure	0.207 EXEMPT	0.137 EXEMPT
	Bluetooth	2 480.0	11.00	13	5	272	5	60	91	4.09 Measure	2315mW EXEMPT	4.09 Measure	195mW EXEMPT	505mW EXEMPT

Note 1: For distances < 5mm, a distance of 5mm is used to determine SAR exclusion and estimated SAR value.

Note 2: Output power is the maximum rated power (including tune-up or manufacturing tolerances) and includes source-based averaging.

Note 3: If the antenna separation distance is > 50mm then the value listed is the output power threshold, above which SAR measurement is required. For separation <= 50mm the value is the KDB 447498 calculated value and must be less than 3.0 for SAR exemption.

Note 4: Formulas round separation distance to nearest mm and power to nearest mW before calculating thresholds or exemption values.

Note 5: This is equivalent to the KDB 447498 formula written as: [(max. power of channel, including tune-up tolerance, mW)/(60/√f(GHz) mW)]·[20 mm/(min. test separation distance, mm)] ≤ 1.0 for 1-g SAR must be less.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SPF0083
Page (26) of (227)



Device Type	Ant. / Band		Device Edge for SAR Testing (Rear View)					
			Front	Rear	Left Edge	Right Edge	Top	Bottom
Notebook	WLAN & Bluetooth		No	Yes	No	No	No	No
Tablet	Main	WLAN 2.4 GHz	No	Yes	Yes	No	No	No
		U-NII-2A	No	Yes	Yes	Note)Yes	No	No
		U-NII-2C	No	Yes	Yes	Note)Yes	No	No
		U-NII-3	No	Yes	Yes	Note)Yes	No	No
		U-NII-5	No	Yes	Yes	No	No	No
		U-NII 6	No	Yes	Yes	No	No	No
		U-NII 7	No	Yes	Yes	No	No	No
		U-NII 8	No	Yes	Yes	No	No	No
	Aux	WLAN 2.4 GHz	No	Yes	No	Yes	No	No
		U-NII-2A	No	Yes	No	Yes	No	No
		U-NII-2C	No	Yes	No	Yes	No	No
		U-NII-3	No	Yes	No	Yes	No	No
		U-NII-5	No	Yes	No	Yes	No	No
		U-NII 6	No	Yes	No	Yes	No	No
		U-NII 7	No	Yes	No	Yes	No	No
		U-NII 8	No	Yes	No	Yes	No	No
		Bluetooth	No	Yes	No	Yes	No	No

Note : The conservative estimated SAR was measured to exclude the simultaneous transmission SAR test.

2.5 SAR Test Methods and Procedures

The tests documented in this report were performed in accordance with IEEE 1528-2013 and the following published KDB procedures:

- IEEE 1528-2013
- IEC/IEEE 62209-1528:2020
- IEC 62479:2010
- IEC TR 63170:2018
- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 616217 D04 SAR for laptop and tablets v01r02
- October 2016 TCB Workshop Notes (Bluetooth Duty Factor)
- April 2019 TCB Workshop Notes (Tissue Simulating Liquids)
- TCB Workshop–October 2021 : RF Exposure Policies and Procedures
- SPEAG DASY6 System Handbook (June 2020)
- SPEAG DASY6 Application Note (Interim Procedures for Devices Operating at 6-10 GHz)

2.5.1 UNII-6-7 GHz Tested Conditions

The Device was operated utilizing proprietary software and each channel was measured using a broadband power meter to determine the maximum average power.

As per the Interim Procedures for UNII 6-7GHz RF Exposure, explained in RF Exposure Policies and Procedures: TCB Workshop – October 2020, the testing has been performed on SAR following IEC/IEEE 62209-1528:2020 and then on Power Density for the highest SAR test configurations.

The testing has been in both chains and four considered bands U-NII-5, U-NII-6, U-NII-7 and U-NII-8 in SAR mode.

3. Specific Absorption Rate

3.1 Introduction

The SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational / controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

3.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength. However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

3.3 Peak Spatially Averaged Power Density Assessment Based on E-field Measurements

Within a short distance from the transmitting source, power density was determined based on both electric and magnetic fields. Generally, the magnitude and phase of two components of either the E-field or H-field were needed on a sufficiently large surface to fully characterize the total E-field and H-field distributions. Nevertheless, solutions based on direct measurement of E-field and H-field can be used to compute power density. The general measurement approach used for this device was:

- a) The local E field on the measurement surface was measured at a reference location where the field is well above the noise level. This reference level was used at the end of this procedure to assess output power drift of the DUT during the measurement.
- b) The electric field on the measurement surface was scanned. Measurements are conducted according to the instructions provided by the measurement system manufacturer. Measurement spatial resolution can depend on the measured field characteristic and measurement methodology used by the system. The planar scan step size was configured at $\lambda/4$.
- c) For cDASY6, H-field was calculated from the measured E-field using a reconstruction algorithm. As the power density calculation requires knowledge of both amplitude and phase, reconstruction algorithms can also be used to obtain field information from the measured E-field data (e.g. the phase from the amplitude if only the amplitude is measured). H-field and phase data was reconstructed from repeated measurements (three per measurement point) on two measurement planes separated by $\lambda/4$.
- d) The total Peak spatially averaged power density (psPD) distribution on the evaluation surface is determined per the below equation. The spatial averaging area, A, is specified by the applicable exposure limits or regulatory requirements.

$$psPD = \frac{1}{2A_{av}} \iint_{A_{av}} || Re\{E \times H^*\} || dA$$

- e) The maximum spatial-average on the evaluation surface is the final quantity to determine compliance against applicable limits.
- f) The local E field reference value, at the same location as step 2, was re-measured after the scan was complete to calculate the power drift. If the drift deviated by more than 5%, the power density test and drift measurements were repeated.

4. SAR Measurement Procedures

4.1 SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The Minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 1.4 mm. This distance cannot be smaller than the Distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan & Zoom Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot and Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly. Area Scan & Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 mm ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx _{Area} , Δy _{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx _{Zoom} , Δy _{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz _{Zoom} (n)		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	Δz _{Zoom} (1): between 1st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		Δz _{Zoom} (n>1): between subsequent points	≤ 1.5 · Δz _{Zoom} (n-1) mm	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.				
* When zoom scan is required and the reported SAR from the area scan based 1-g SAR estimation procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 3: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

5. RF Exposure Limits

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Partial Peak SAR ¹⁾ (Partial)	1.60 mW/g	8.00 mW/g
Partial Average SAR ²⁾ (Whole Body)	0.08 mW/g	0.40 mW/g
Partial Peak SAR ³⁾ (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

- 1) The spatial Peak value of the SAR averaged over any 1g gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- 2) The spatial Average value of the SAR averaged over the whole body.
- 3) The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

5.1 RF Exposure Limits for Frequencies Above 6 GHz

Per §1.1310 (d)(3), the MPE limits are applied for frequencies above 6 GHz. Power Density is expressed in units of W/m² or mW/cm².

Peak Spatially Averaged Power Density was evaluated over a circular area of 4 cm² per interim FCC Guidance for near-field power density evaluations per October 2018 TCB Workshop notes.

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Power Density	1.0 mW/cm ²	5.0 mW/cm ²

Note: 1.0 mW/cm² is 10 W/m²

6. FCC SAR General Measurement Procedures

6.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. Test highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

6.2 SAR Testing with 802.11 Transmitters

The normal network operating configurations are not suitable for measuring the SAR of 802.11 a/b/g transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable.

6.2.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 – 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

6.2.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is > 1.2 W/kg. When different maximum output powers is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is > 1.2 W/kg. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

6.2.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, SAR must be considered for these channels. When band gap channels are disabled, each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency point requirements.

6.2.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.

6.2.5 2.4 GHz SAR Test Requirement

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following.

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel; i.e., all channels require testing.

2.4 GHz 802.11g/n OFDM are additionally evaluated for SAR if highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

6.2.6 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz band, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

6.2.7 Initial Test Configuration Procedure

For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. If the average RF output powers of the highest identical transmission modes are within 0.25 dB of each other, mid channel of the transmission mode with highest average RF output power is the initial test channel. Otherwise, the channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR21-SPF0083 Page (34) of (227)	
---	--	---

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements.

6.2.8 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg, no additional SAR tests for the subsequent test configurations are required. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

7. RF Average Conducted Output Power

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported.

Power Measurement Setup



7.1 WLAN Average Conducted Output Power(Notebook Mode)

Band	Mode	Freq. [MHz]	Channel	Conducted Powers (dBm)	
				Ant.	
				Main	Aux
WLAN 2.4 GHz	802.11b	2 412.0	1	17.36	14.85
		2 437.0	6	17.31	14.76
		2 462.0	11	17.38	14.80
	802.11n (HT40)	2 422.0	3	15.62	14.78
		2 437.0	6	17.20	14.91
		2 452.0	9	15.77	14.93
U-NII-2A	802.11ac (VHT80)	5 210.0	42	10.39	10.33
		5 290.0	58	13.22	10.29
U-NII-2C	802.11ac (VHT80)	5 530.0	106	12.53	9.36
		5 610.0	122	12.42	9.37
		5 690.0	138	12.51	9.44
U-NII-3	802.11ac (VHT80)	5 775.0	155	12.15	8.64
U-NII-5	802.11ax (160-SU)	6 025.0	15	11.36	10.49
		6 185.0	47	11.25	10.45
		6 345.0	79	11.31	10.38
U-NII-6	802.11ax (160-SU)	6 505.0	111	11.46	10.32
U-NII-7	802.11ax (160-SU)	6 665.0	143	11.32	10.30
		6 825.0	175	9.98	10.38
U-NII-8	802.11ax (160-SU)	6 985.0	207	9.96	10.52

This test report shall not be reproduced, except in full, without the written approval

7.2 WLAN Average Conducted Output Power(Tablet Mode)

Band	Mode	Freq. [MHz]	Channel	Conducted Powers (dBm)	
				Ant.	
				Main	Aux
WLAN 2.4 GHz	802.11b	2 412.0	1	14.72	14.93
		2 437.0	6	14.76	14.81
		2 462.0	11	14.93	14.89
U-NII-2A	802.11ac (VHT80)	5 210.0	42	11.98	11.85
		5 290.0	58	11.85	11.87
U-NII-2C	802.11ac (VHT80)	5 530.0	106	11.96	10.99
		5 610.0	122	11.88	10.80
		5 690.0	138	11.79	10.90
U-NII-3	802.11ac (VHT80)	5 775.0	155	12.48	11.36
U-NII-5	802.11ax (160-SU)	6 025.0	15	11.36	11.40
		6 185.0	47	11.79	11.46
		6 345.0	79	11.84	11.31
U-NII-6	802.11ax (160-SU)	6 505.0	111	11.46	11.47
U-NII-7	802.11ax (160-SU)	6 665.0	143	11.32	10.78
		6 825.0	175	10.89	10.90
U-NII-8	802.11ax (160-SU)	6 985.0	207	10.91	11.02

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SPF0083
Page (37) of (227)




7.3 Bluetooth Average Conducted Output Power (Notebook Mode & Tablet Mode)

Mode	Freq. [MHz]	Channel	Conducted Powers (dBm)
BDR_DH5 (1 Mbps)	2 402.0	0	9.77
	2 441.0	39	9.70
	2 480.0	78	9.59


7.4 Bluetooth Duty Factor

Mode	Packet	On Time (ms)	On-Off Time (ms)	Duty Cycle (%)	Duty Cycle Compensate Factor
BDR(GFSK)	DH5	2.88	3.75	76.8	1.302

7.5 Bluetooth Power Measurement Setup

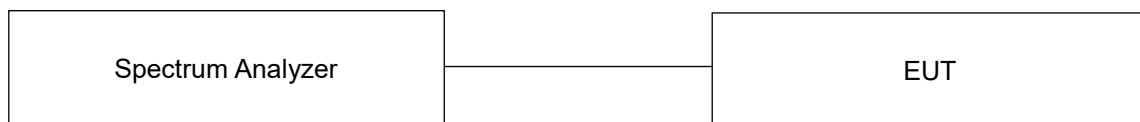

7.6 Bluetooth Duty Plot

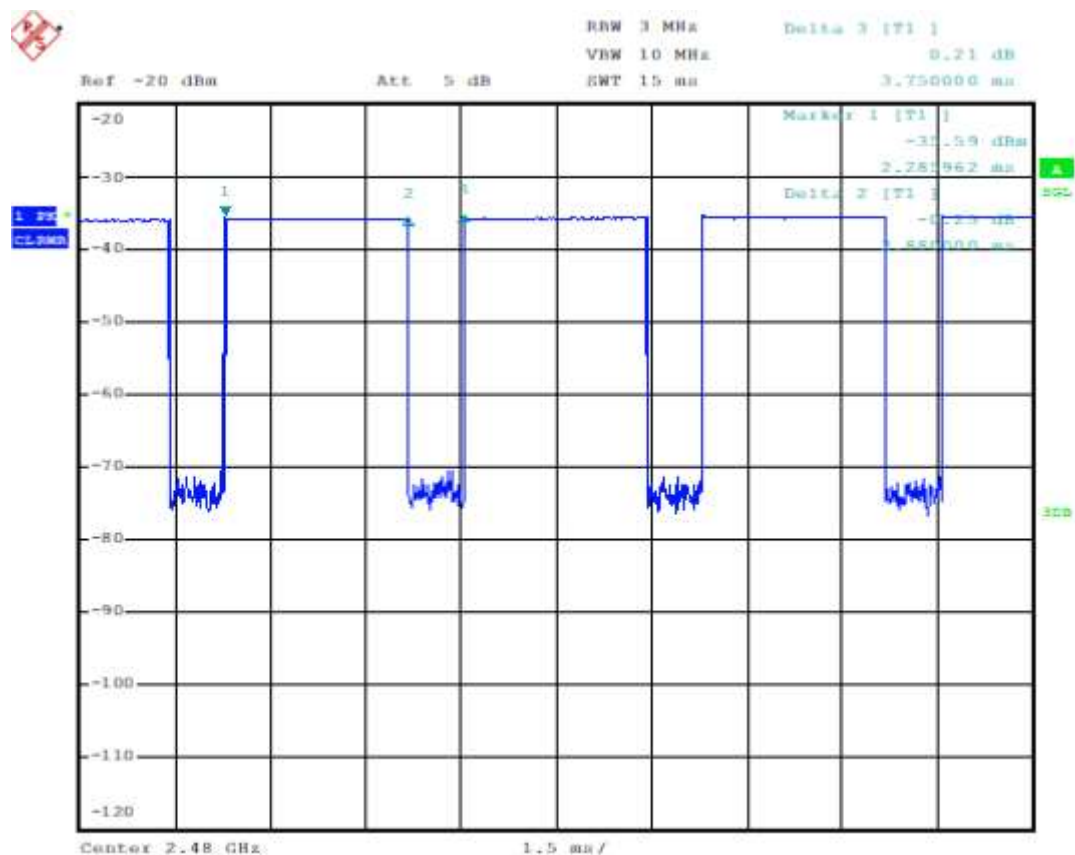

8. System Verification

8.1 Tissue Verification

The dielectric properties for this Tissue Simulant Liquids were measured by using the SPEAG Model DAK3.5 Dielectric Probe in conjunction with Agilent E5071B Network Analyzer (300 kHz – 8 500 MHz). The Conductivity (σ) and Permittivity (ρ) are listed in Table 1. For the SAR measurement given in this report. The temperature variation of the Tissue Simulant Liquids was $(22 \pm 2) ^\circ\text{C}$.

Freq. (MHz)	Limit/Measured		Permittivity (ρ)	Conductivity (σ)	Temp. ($^\circ\text{C}$)
2 450.0	Recommended Limit		$39.20 \pm 5 \%$ (37.24~41.16)	$1.80 \pm 5 \%$ (1.71~1.89)	22 ± 2
	Measured	2021-12-06	39.51	1.83	20.83
2 450.0	Recommended Limit		$39.20 \pm 5 \%$ (37.24~41.16)	$1.80 \pm 5 \%$ (1.71~1.89)	22 ± 2
	Measured	2021-12-15	38.22	1.85	20.69
5 300.0	Recommended Limit		$35.90 \pm 5 \%$ (34.11~37.70)	$4.76 \pm 5 \%$ (4.52~5.00)	22 ± 2
	Measured	2021-12-15	35.08	4.85	20.65
5 300.0	Recommended Limit		$35.90 \pm 5 \%$ (34.11~37.70)	$4.76 \pm 5 \%$ (4.52~5.00)	22 ± 2
	Measured	2021-12-17	35.21	4.86	20.56
5 600.0	Recommended Limit		$35.50 \pm 5 \%$ (33.73~37.28)	$5.07 \pm 5 \%$ (4.82~5.32)	22 ± 2
	Measured	2021-12-16	34.65	5.13	20.71
5 600.0	Recommended Limit		$35.50 \pm 5 \%$ (33.73~37.28)	$5.07 \pm 5 \%$ (4.82~5.32)	22 ± 2
	Measured	2021-12-18	34.79	5.06	20.66
5 800.0	Recommended Limit		$35.30 \pm 5 \%$ (33.54~37.07)	$5.27 \pm 5 \%$ (5.01~5.53)	22 ± 2
	Measured	2021-12-16	34.38	5.31	20.71
5 800.0	Recommended Limit		$35.30 \pm 5 \%$ (33.54~37.07)	$5.27 \pm 5 \%$ (5.01~5.53)	22 ± 2
	Measured	2021-12-17	34.46	5.32	20.56
6 500.0	Recommended Limit		$34.50 \pm 5 \%$ (32.78~36.23)	$6.07 \pm 5 \%$ (5.77~6.37)	22 ± 2
	Measured	2021-12-07	34.00	6.03	20.49
6 500.0	Recommended Limit		$34.50 \pm 5 \%$ (32.78~36.23)	$6.07 \pm 5 \%$ (5.77~6.37)	22 ± 2
	Measured	2021-12-08	34.50	5.97	20.72


<Table 1. Measurement result of Tissue electric parameters>

8.1.1 SAR Test System Verification

The microwave circuit arrangement for system verification is sketched below picture.

The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within $\pm 10\%$ from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the Table 2.

During the tests, the ambient temperature of the laboratory was in the range $(22 \pm 2) ^\circ\text{C}$, the relative humidity was in the range $(50 \pm 20)\%$ and the liquid depth Above the ear/grid reference points was above 15 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

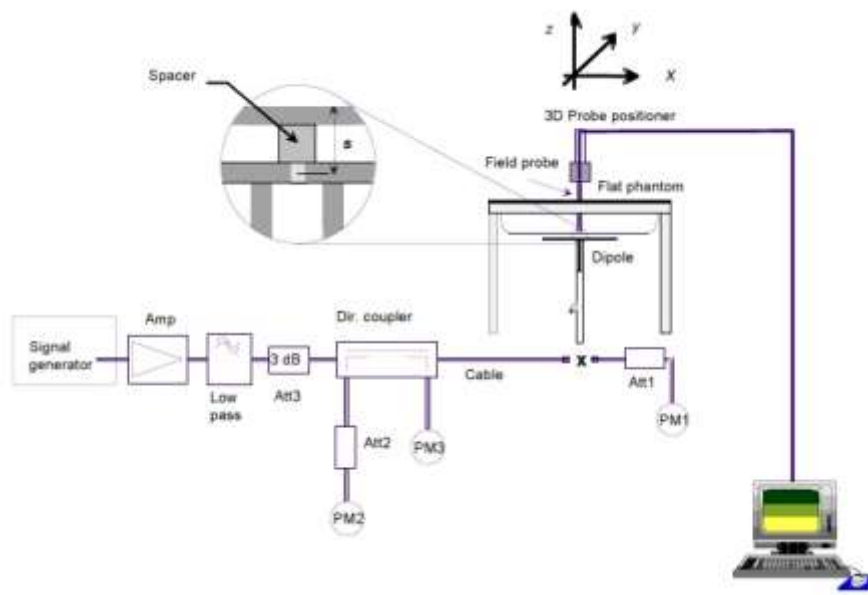


Verification Kit	Probe S/N	Frequency (MHz)	Tissue Type	Input Power (mW)	Limit/Measured (Normalized to 1 W)		
D2450V2 SN: 895	EX3DV4 SN: 7540	2 450.0	HSL	100	Recommended Limit 1g		52.40 ± 10 % (47.16~57.64)
					(Normalized)		
					Measured	2021-12-06	51.10
D2450V2 SN: 895	EX3DV4 SN: 3697	2 450.0	HSL	100	Recommended Limit 1g		52.40 ± 10 % (47.16~57.64)
					(Normalized)		
					Measured	2021-12-15	53.00
D5GHzV2 SN: 1293	EX3DV4 SN: 3697	5 300.0	HSL	100	Recommended Limit 1g		82.30 ± 10 % (74.07~90.53)
					(Normalized)		
					Measured	2021-12-15	83.10
D5GHzV2 SN: 1293	EX3DV4 SN: 3697	5 300.0	HSL	100	Recommended Limit 1g		82.30 ± 10 % (74.07~90.53)
					(Normalized)		
					Measured	2021-12-17	81.40
D5GHzV2 SN: 1293	EX3DV4 SN: 3697	5 600.0	HSL	100	Recommended Limit 1g		83.80 ± 10 % (75.42~92.18)
					(Normalized)		
					Measured	2021-12-16	78.90
D5GHzV2 SN: 1293	EX3DV4 SN: 3697	5 600.0	HSL	100	Recommended Limit 1g		83.80 ± 10 % (75.42~92.18)
					(Normalized)		
					Measured	2021-12-18	82.50
D5GHzV2 SN: 1293	EX3DV4 SN: 3697	5 800.0	HSL	100	Recommended Limit 1g		80.60 ± 10 % (72.54~88.66)
					(Normalized)		
					Measured	2021-12-16	80.20
D5GHzV2 SN: 1293	EX3DV4 SN: 3697	5 800.0	HSL	100	Recommended Limit 1g		80.60 ± 10 % (72.54~88.66)
					(Normalized)		
					Measured	2021-12-17	78.30
D6.5GHzV2 SN: 1005	EX3DV4 SN: 7540	6 500.0	HSL	10	Recommended Limit 1g		286.00 ± 10 % (257.40~314.60)
					(Normalized)		
					Measured	2021-12-07	293.00
D6.5GHzV2 SN: 1005	EX3DV4 SN: 7540	6 500.0	HSL	10	Recommended Limit 1g		286.00 ± 10 % (257.40~314.60)
					(Normalized)		
					Measured	2021-12-08	288.00

<Table 2. System Verification Result>

8.1.2 Power Density Test System Verification

The system was verified to be within ± 0.66 dB of the power density targets on the calibration certificate according to the test system specification in the user's manual and calibration facility recommendation. The 0.66 dB deviation threshold represents the expanded uncertainty for system performance checks using SPEAG's mmWave verification sources. The same spatial resolution and measurement region used in the source calibration was applied during the system check.

The measured power density distribution of verification source was also confirmed through visual inspection to have no noticeable differences, both spatially (shape) and numerically (level) from the distribution provided by the manufacturer, per November 2017 TCBC Workshop Notes.

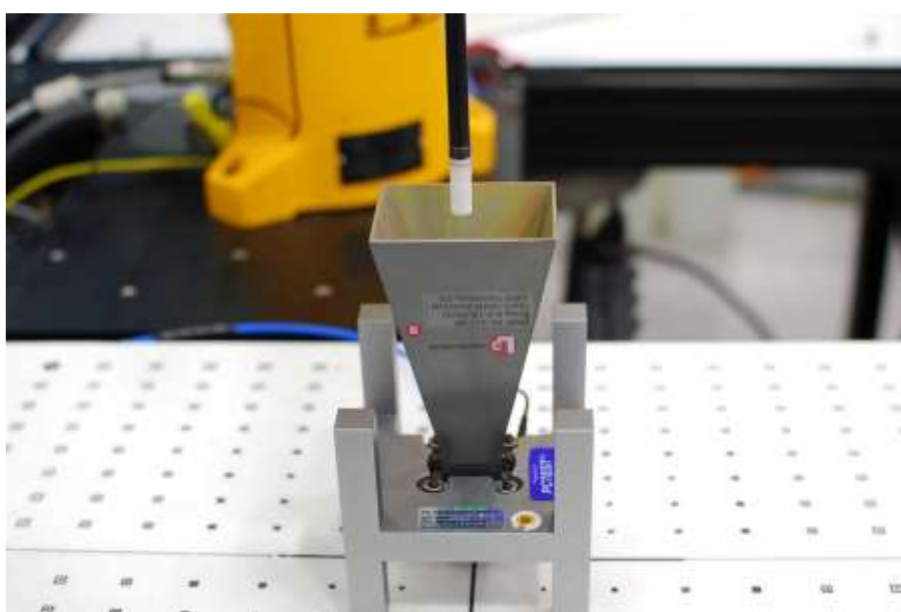

[Figure 3. System Verification Setup Photo]

Source (S/N)	Probe (S/N)	Frequency (GHz)	Date	Prad (mW)	Total psPD (W/m ² over 4 cm ²)	Input Power (mW)	Total psPD (W/m ² over 4 cm ²)		Deviation (dB)	Limit (dB)
					Target		Measured	Normalized		
1023	9489	10	2021-12-09	74.0	41.6	10	6.02	44.5	0.29	± 0.66
1023	9489	10	2021-12-10	74.0	41.6	10	5.79	42.8	0.12	± 0.66
1023	9489	10	2021-12-13	74.0	41.6	10	5.80	42.9	0.13	± 0.66
1023	9489	10	2021-12-14	74.0	41.6	10	5.78	42.8	0.12	± 0.66

Notes

- 1) 10 mm distance spacing was used from the reference horn antenna aperture to the probe element.
- 2) According to IEC TR 63170, the power density measurement results should be normalized to the delivered input power to an input power level of 0 dBm and compared to the appropriate target values of the calibrated reference sources.

9. SAR Test Results

9.1 Standalone Body SAR Test Results (Notebook Mode)

WLAN 2.4 GHz											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
802.11b	Main	Rear	0	2 462.0	17.38	17.50	1.028	1.010	0.900	0.934	1
		Rear	0	2 412.0	17.36	17.50	1.033	1.010	0.766	0.799	
	Aux	Rear	0	2 412.0	14.85	15.00	1.035	1.010	1.150	1.202	
		Rear	0	2 462.0	14.80	15.00	1.047	1.010	1.230	1.301	
		Rear	0	2 437.0	14.76	15.00	1.057	1.010	1.180	1.260	
Additional SAR Test											
802.11n (HT40)	Aux	Rear	0	2 452.0	14.93	15.00	1.016	1.011	1.330	1.366	
		Rear	0	2 437.0	14.91	15.00	1.021	1.011	1.340	1.383	2
		Rear	0	2 422.0	14.78	15.00	1.052	1.011	1.300	1.383	
Repeated SAR Test											
802.11b	Main	Rear	0	2 462.0	17.38	17.50	1.028	1.010	0.900	0.934	
802.11n (HT40)	Aux	Rear	0	2 437.0	14.91	15.00	1.021	1.011	1.320	1.363	

Note: Highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS:

Main Ant. $0.934[\text{W/kg}] \times 56.2/56.2 [\text{mW}] = 0.934 \text{ W/kg}$, Aux Ant. $1.383[\text{W/kg}] \times 31.6/31.6 [\text{mW}] = 1.383 \text{ W/kg}$

The adjusted SAR is $> 1.2 \text{ W/kg}$; therefore, SAR Test(WLAN 2.4 GHz Aux Ant.) is required for that OFDM(802.11n(HT40) mode.

U-NII-2A											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
802.11ac (VHT80)	Main	Rear	0	5 290.0	13.22	13.75	1.130	1.012	1.020	1.166	3
	Aux	Rear	0	5 290.0	10.29	10.50	1.050	1.011	0.834	0.885	
	Repeated SAR Test										
	Main	Rear	0	5 290.0	13.22	13.75	1.130	1.012	1.020	1.166	
	Aux	Rear	0	5 290.0	10.29	10.50	1.050	1.011	0.841	0.893	4

KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR21-SPF0083 Page (43) of (227)	
---	--	---

U-NII-2C											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
802.11ac (VHT80)	Main	Rear	0	5 530.0	12.53	12.75	1.052	1.011	0.961	1.022	
		Rear	0	5 690.0	12.51	12.75	1.057	1.011	1.300	1.389	5
		Rear	0	5 610.0	12.42	12.75	1.079	1.011	1.090	1.189	
	Aux	Rear	0	5 690.0	9.44	9.50	1.014	1.011	0.964	0.988	6
		Rear	0	5 610.0	9.37	9.50	1.030	1.011	0.906	0.943	
	Repeated SAR Test										
	Main	Rear	0	5 690.0	12.51	12.75	1.057	1.011	1.270	1.357	
	Aux	Rear	0	5 690.0	9.44	9.50	1.014	1.011	0.947	0.971	

U-NII-3											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
802.11ac (VHT80)	Main	Rear	0	5 775.0	12.15	12.50	1.084	1.011	1.230	1.348	7
	Aux	Rear	0	5 775.0	8.64	9.00	1.086	1.011	0.821	0.901	8
	Repeated SAR Test										
	Main	Rear	0	5 775.0	12.15	12.50	1.084	1.011	1.210	1.326	
	Aux	Rear	0	5 775.0	8.64	9.00	1.086	1.011	0.817	0.897	

Bluetooth											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
BDR_DH5	Aux	Rear	0	2 402.0	9.77	11.00	1.327	1.302	0.216	0.373	9

9.2 Standalone Body SAR Test Results (Tablet Mode)

WLAN 2.4 GHz											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
802.11b	Main	Rear	0	2 462.0	14.93	15.00	1.016	1.005	0.034	0.035	
		Left	0	2 462.0	14.93	15.00	1.016	1.005	0.426	0.435	10
	Aux	Rear	0	2 412.0	14.93	15.00	1.016	1.005	0.065	0.066	
		Right	0	2 412.0	14.93	15.00	1.016	1.005	0.598	0.611	11

U-NII-2A											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
802.11ac (VHT80)	Main	Rear	0	5 290.0	11.85	12.00	1.035	1.012	0.082	0.086	
		Left	0	5 290.0	11.85	12.00	1.035	1.012	0.672	0.704	12
		Right	0	5 290.0	11.85	12.00	1.035	1.012	0.065	0.068	
	Aux	Rear	0	5 290.0	11.87	12.00	1.030	1.011	0.034	0.035	
		Right	0	5 290.0	11.87	12.00	1.030	1.011	0.967	1.007	13
	Repeated SAR Test										
	Aux	Right	0	5 290.0	11.87	12.00	1.030	1.011	0.886	0.923	

U-NII-2C											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
802.11ac (VHT80)	Main	Rear	0	5 530.0	11.96	12.00	1.009	1.011	0.045	0.046	
		Left	0	5 530.0	11.96	12.00	1.009	1.011	0.558	0.569	14
		Right	0	5 530.0	11.96	12.00	1.009	1.011	0.014	0.014	
	Aux	Rear	0	5 530.0	10.99	11.00	1.002	1.011	0.062	0.063	
		Right	0	5 530.0	10.99	11.00	1.002	1.011	0.813	0.824	
		Right	0	5 690.0	10.90	11.00	1.023	1.011	1.110	1.148	
	Repeated SAR Test										
	Aux	Right	0	5 690.0	10.90	11.00	1.023	1.011	1.140	1.179	15

KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR21-SPF0083 Page (45) of (227)	
---	--	---

U-NII-3											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensation Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
802.11ac (VHT80)	Main	Rear	0	5 775.0	12.48	12.50	1.005	1.011	0.043	0.044	
		Left	0	5 775.0	12.48	12.50	1.005	1.011	0.395	0.401	16
		Right	0	5 775.0	12.48	12.50	1.005	1.011	0.054	0.055	
	Aux	Rear	0	5 775.0	11.36	11.50	1.033	1.011	0.098	0.102	
		Right	0	5 775.0	11.36	11.50	1.033	1.011	1.140	1.191	17
	Repeated SAR Test										
	Aux	Right	0	5 775.0	11.36	11.50	1.033	1.011	1.110	1.159	

Bluetooth											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensation Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
BDR_DH5	Aux	Rear	0	2 402.0	9.77	11.00	1.327	1.302	0.013	0.022	
		Right	0	2 402.0	9.77	11.00	1.327	1.302	0.138	0.238	18

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SPF0083
Page (46) of (227)

**General Notes:**

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D01v06.
2. All modes of operation were investigated, and worst-case results are reported.
3. Battery is fully charged for all readings and the standard batteries are the only options.
4. Liquid tissue depth was at least 15 cm.
5. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
6. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.

WLAN & Bluetooth Notes:

1. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4GHz WIFI operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR.
2. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance.
3. When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.
4. When the specified maximum output power is the same for both UNII Band1 and UNII Band 2A, begins SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is $\leq 1.2\text{W/kg}$, SAR is not required for UNII band1 $> 1.2\text{W/kg}$, both bands should be tested independently for SAR.
5. When the maximum reported 1g averaged SAR is $\leq 0.8\text{ W/kg}$, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was $\leq 1.20\text{ W/kg}$ for 1g evaluations or all test channels were measured.
6. WLAN & Bluetooth transmission was verified using a spectrum analyzer

9.3 Standalone Body SAR and Absorbed Power Density Test Results (Notebook Mode)

U-NII-5												
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Estimated APD (W/m ²) 4cm ²	Plot No.
802.11ax (160-SU)	Main	Rear	0	6 025.0	11.36	12.00	1.159	1.015	0.888	1.045	5.59	
		Rear	0	6 345.0	11.31	12.00	1.172	1.015	0.640	0.761	4.74	
		Rear	0	6 185.0	11.25	12.00	1.189	1.015	0.719	0.868	4.83	
	Aux	Rear	0	6 025.0	10.49	11.00	1.125	1.015	0.858	0.980	4.64	
		Rear	0	6 185.0	10.45	11.00	1.135	1.015	0.714	0.823	4.03	
		Rear	0	6 345.0	10.38	11.00	1.153	1.015	0.556	0.651	3.17	
	Repeated SAR Test											
	Main	Rear	0	6 025.0	11.36	12.00	1.159	1.015	0.897	1.055	5.79	19
	Aux	Rear	0	6 025.0	10.49	11.00	1.125	1.015	0.874	0.998	4.85	20

U-NII-6												
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Estimated APD (W/m ²) 4cm ²	Plot No.
802.11ax (160-SU)	Main	Rear	0	6 505.0	11.46	12.00	1.132	1.015	0.654	0.751	4.83	21
	Aux	Rear	0	6 505.0	10.32	11.00	1.169	1.015	0.758	0.899	3.98	22

U-NII-7												
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Estimated APD (W/m ²) 4cm ²	Plot No.
802.11ax (160-SU)	Main	Rear	0	6 665.0	11.32	12.00	1.169	1.015	0.882	1.047	6.03	
		Rear	0	6 825.0	9.98	10.50	1.127	1.015	0.656	0.750	4.34	
	Aux	Rear	0	6 825.0	10.38	11.00	1.153	1.015	0.736	0.861	4.39	
		Rear	0	6 665.0	10.30	11.00	1.175	1.015	0.807	0.962	4.59	24
	Repeated SAR Test											
	Main	Rear	0	6 665.0	11.32	12.00	1.169	1.015	0.901	1.069	6.14	23
	Aux	Rear	0	6 665.0	10.30	11.00	1.175	1.015	0.807	0.962	4.59	

U-NII-8												
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Estimated APD (W/m ²) 4cm ²	Plot No.
802.11ax (160-SU)	Main	Rear	0	6 985.0	9.96	10.50	1.132	1.015	0.469	0.539	2.94	25
	Aux	Rear	0	6 985.0	10.52	11.00	1.117	1.015	0.529	0.600	3.05	26

9.4 Standalone Body SAR and Absorbed Power Density Test Results (Tablet Mode)

U-NII-5												
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Estimated APD (W/m ²) 4cm ²	Plot No.
802.11ax (160-SU)	Main	Rear	0	6 345.0	11.84	12.50	1.164	1.015	0.021	0.025	0.07	
		Rear	0	6 185.0	11.79	12.50	1.178	1.015	0.013	0.016	0.04	
		Left	0	6 345.0	11.84	12.50	1.164	1.015	0.410	0.484	2.15	
		Left	0	6 185.0	11.79	12.50	1.178	1.015	0.409	0.489	2.11	27
	Aux	Rear	0	6 185.0	11.46	12.00	1.132	1.015	0.100	0.115	0.73	
		Rear	0	6 025.0	11.40	12.00	1.148	1.015	0.115	0.134	0.88	
		Right	0	6 185.0	11.46	12.00	1.132	1.015	0.582	0.669	2.87	
		Right	0	6 025.0	11.40	12.00	1.148	1.015	0.719	0.838	3.70	28
		Right	0	6 345.0	11.31	12.00	1.172	1.015	0.595	0.708	2.95	

U-NII-6												
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Estimated APD (W/m ²) 4cm ²	Plot No.
802.11ax (160-SU)	Main	Rear	0	6 505.0	11.46	12.00	1.132	1.015	0.033	0.038	0.18	
		Left	0	6 505.0	11.46	12.00	1.132	1.015	0.420	0.483	2.11	29
	Aux	Rear	0	6 505.0	11.47	12.00	1.130	1.015	0.011	0.013	0.06	
		Right	0	6 505.0	11.47	12.00	1.130	1.015	0.182	0.209	0.94	30

U-NII-7												
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Estimated APD (W/m ²) 4cm ²	Plot No.
802.11ax (160-SU)	Main	Rear	0	6 665.0	11.32	12.00	1.169	1.015	0.045	0.053	0.29	
		Left	0	6 665.0	11.32	12.00	1.169	1.015	0.436	0.517	2.20	31
	Aux	Rear	0	6 825.0	10.90	11.50	1.148	1.015	0.026	0.030	0.18	
		Right	0	6 825.0	10.90	11.50	1.148	1.015	0.225	0.262	1.01	32

U-NII-8												
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Estimated APD (W/m ²) 4cm ²	Plot No.
802.11ax (160-SU)	Main	Rear	0	6 985.0	10.91	11.50	1.146	1.015	0.018	0.021	0.02	
		Left	0	6 985.0	10.91	11.50	1.146	1.015	0.127	0.148	0.75	33
	Aux	Rear	0	6 985.0	11.02	11.50	1.117	1.015	0.029	0.033	0.20	
		Right	0	6 985.0	11.02	11.50	1.117	1.015	0.284	0.322	1.26	34

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SPF0083
Page (49) of (227)

**General Notes:**

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D01v06.
2. Batteries are fully charged at the beginning of the SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
5. Per FCC guidance, SAR was performed using 6.5 GHz SAR probe calibration factors. Per October 2020 TCB Workshop notes, 5 channels were tested. Absorbed power density (APD) using a 4cm² averaging area is reported based on SAR measurements.

WLAN Notes:

1. When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg for 1g evaluations or all test channels were measured.
2. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance.
3. WLAN MIMO measurement to meet simultaneous transmission limits.

10. Power Density Test Results

10.1 Standalone Body Power Density Test Results (Notebook Mode)

U-NII-5											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Max. Tune-up Power (dBm)	iPD	Grid Step (λ)	Measurement Uncertainty	Measured Total psPD (W/m ²)	Scaled Total psPD (W/m ²)	Plot No.
									4cm ²	4cm ²	
802.11ax (160-SU)	Main	Rear	2	6 025.0	12.00	-	0.0625	1.462	3.44	5.03	35
		Rear	2	6 185.0	12.00	-	0.0625	1.462	2.53	3.70	
		Rear	2	6 345.0	12.00	-	0.0625	1.462	1.54	2.25	

U-NII-6											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Max. Tune-up Power (dBm)	iPD	Grid Step (λ)	Measurement Uncertainty	Measured Total psPD (W/m ²)	Scaled Total psPD (W/m ²)	Plot No.
									4cm ²	4cm ²	
802.11ax (160-SU)	Aux	Rear	2	6 505.0	11.00	-	0.0625	1.462	2.14	3.13	36

U-NII-7											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Max. Tune-up Power (dBm)	iPD	Grid Step (λ)	Measurement Uncertainty	Measured Total psPD (W/m ²)	Scaled Total psPD (W/m ²)	Plot No.
									4cm ²	4cm ²	
802.11ax (160-SU)	Main	Rear	2	6 665.0	12.00	2.84	0.0625	1.462	5.63	8.23	37
		Rear	9	6 665.0	12.00	2.62	0.0625	1.462	2.83	4.14	
		Rear	2	6 825.0	10.50	-	0.0625	1.462	4.98	7.28	
	Repeated PD Test										
	Main	Rear	2	6 665.0	12.00	-	0.0625	1.462	5.04	7.37	

U-NII-8											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Max. Tune-up Power (dBm)	iPD	Grid Step (λ)	Measurement Uncertainty	Measured Total psPD (W/m ²)	Scaled Total psPD (W/m ²)	Plot No.
									4cm ²	4cm ²	
802.11ax (160-SU)	Aux	Rear	2	6 985.0	11.00	-	0.0625	1.462	3.16	4.62	38

10.2 Standalone Body Power Density Test Results (Tablet Mode)

U-NII-5											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Max. Tune-up Power (dBm)	iPD	Grid Step (λ)	Measurement Uncertainty	Measured Total psPD (W/m ²)	Scaled Total psPD (W/m ²)	Plot No.
									4cm ²	4cm ²	
802.11ax (160-SU)	Aux	Right	2	6 025.0	12.00	2.46	0.0625	1.462	4.27	6.24	39
		Right	9.96	6 025.0	12.00	2.01	0.0625	1.462	2.11	3.08	
		Right	2	6 345.0	12.00	-	0.0625	1.462	1.11	1.62	
		Right	2	6 185.0	12.00	-	0.0625	1.462	2.88	4.21	

U-NII-6											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Max. Tune-up Power (dBm)	iPD	Grid Step (λ)	Measurement Uncertainty	Measured Total psPD (W/m ²)	Scaled Total psPD (W/m ²)	Plot No.
									4cm ²	4cm ²	
802.11ax (160-SU)	Main	Left	2	6 505.0	12.00	-	0.0625	1.462	1.22	1.78	40

U-NII-7											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Max. Tune-up Power (dBm)	iPD	Grid Step (λ)	Measurement Uncertainty	Measured Total psPD (W/m ²)	Scaled Total psPD (W/m ²)	Plot No.
									4cm ²	4cm ²	
802.11ax (160-SU)	Main	Left	2	6 665.0	12.00	-	0.0625	1.462	1.97	2.88	41

U-NII-8											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Max. Tune-up Power (dBm)	iPD	Grid Step (λ)	Measurement Uncertainty	Measured Total psPD (W/m ²)	Scaled Total psPD (W/m ²)	Plot No.
									4cm ²	4cm ²	
802.11ax (160-SU)	Aux	Right	2	6 985.0	11.50	-	0.0625	1.462	0.96	1.40	42

Power Density General Notes:

- Batteries are fully charged at the beginning of the measurements.
- Power density was calculated by repeated E-field measurements on two measurement planes separated by $\lambda/4$.
- The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools.
- Per FCC guidance and equipment manufacturer guidance, power density results were scaled according to IEC 62479:2010 for the portion of the measurement uncertainty > 30%. Total expanded uncertainty of 2.46 dB (76.198%) was used to determine the psPD measurement scaling factor.
- Per equipment manufacturer guidance, power density was measured at d=2mm and d= $\lambda/5$ mm using the same grid size and grid step size for some frequencies and surfaces. The integrated Power Density (iPD) was calculated based on these measurements. Since iPD ratio between the two distances is < 1dB, the grid step was sufficient for determining compliance at d=2mm.

This test report shall not be reproduced, except in full, without the written approval

11. Simultaneous Transmission

11.1 #Simultaneous Transmission Configurations

No.	Scenario	Operation
1	WLAN 2.4 GHz Main + WLAN 2.4 GHz Aux	Yes
2	WLAN 2.4 GHz Main + Bluetooth Aux	Yes
3	WLAN 2.4 GHz Aux + Bluetooth Aux	No
4	WLAN 2.4 GHz Main + WLAN 2.4 GHz Aux + Bluetooth Aux	No
5	WLAN 5 GHz Main + WLAN 5 GHz Aux	Yes
6	WLAN 5 GHz Main + Bluetooth Aux	Yes
7	WLAN 5 GHz Aux + Bluetooth Aux	Yes
8	WLAN 5 GHz Main + WLAN 5 GHz Aux + Bluetooth Aux	Yes
9	WLAN 6 GHz Main + WLAN 6 GHz Aux	Yes
10	WLAN 6 GHz Main + Bluetooth Aux	Yes
11	WLAN 6 GHz Aux + Bluetooth Aux	Yes
12	WLAN 6 GHz Main + WLAN 6 GHz Aux + Bluetooth Aux	Yes
13	WLAN 2.4 GHz Main + WLAN 5 GHz Aux + Bluetooth Aux (RSDB scenario)	No
14	WLAN 5 GHz Main + WLAN 2.4 GHz Aux + Bluetooth Aux (RSDB scenario)	No
15	WLAN 2.4/5 GHz Main + WLAN 6 GHz Aux + Bluetooth Aux (RSDB scenario)	No
16	WLAN 6 GHz Main + WLAN 2.4/5 GHz Aux + Bluetooth Aux (RSDB scenario)	No

Notes:

- It does not to transmit simultaneously the Bluetooth and WLAN 2.4 GHz Aux.
- It is to use the Bluetooth and WLAN same antenna path.

11.2 Estimated SAR

When standalone SAR is not required to be measured, SAR must also be estimated to determine simultaneous transmission SAR test exclusion.

[Tablet Mode]

Ant.	Band	Freq. [MHz]	Output Power		Separation distances [mm]					Estimated 1g SAR Value (W/kg)				
			dBm	mW	Rear	Left	Right	Top	Bottom	Rear	Left	Right	Top	Bottom
Main	2.4 GHz	2 462.0	15.00	32	5	5	275	60	88	Measure	Measure	0.400	0.400	0.400
	U-NII-2A	5 320.0	12.00	16	5	5	275	60	88	Measure	Measure	Measure	0.400	0.400
	U-NII-2C	5 720.0	12.00	16	5	5	275	60	88	Measure	Measure	Measure	0.400	0.400
	U-NII-3	5 825.0	12.50	18	5	5	275	60	88	Measure	Measure	Measure	0.400	0.400
	U-NII-5	6 415.0	12.50	18	5	5	275	60	88	Measure	Measure	0.400	0.400	0.400
	U-NII-6	6 515.0	12.00	16	5	5	275	60	88	Measure	Measure	0.400	0.400	0.400
	U-NII-7	6 855.0	12.00	16	5	5	275	60	88	Measure	Measure	0.400	0.400	0.400
	U-NII-8	7 115.0	11.50	14	5	5	275	60	88	Measure	Measure	0.400	0.400	0.400
Aux	2.4 GHz	2 462.0	15.00	32	5	272	5	60	91	Measure	0.400	Measure	0.400	0.400
	U-NII-2A	5 320.0	12.00	16	5	272	5	60	91	Measure	0.400	Measure	0.400	0.400
	U-NII-2C	5 720.0	11.00	13	5	272	5	60	91	Measure	0.400	Measure	0.400	0.400
	U-NII-3	5 825.0	11.50	14	5	272	5	60	91	Measure	0.400	Measure	0.400	0.400
	U-NII-5	6 415.0	12.00	16	5	272	5	60	91	Measure	0.400	Measure	0.400	0.400
	U-NII-6	6 515.0	12.00	16	5	272	5	60	91	Measure	0.400	Measure	0.400	0.400
	U-NII-7	6 855.0	11.50	14	5	272	5	60	91	Measure	0.400	Measure	0.400	0.400
	U-NII-8	7 115.0	11.50	14	5	272	5	60	91	Measure	0.400	Measure	0.400	0.400
	Bluetooth	2 480.0	11.00	13	5	272	5	60	91	Measure	0.400	Measure	0.400	0.400

Notes:

- For distances < 5mm, a distance of 5mm is used to determine SAR exclusion and estimated SAR value.
- Output power is the maximum rated power (including tune-up or manufacturing tolerances) and includes source-based averaging.
- If the antenna separation distance is > 50mm then the estimated SAR value is 0.4 W/Kg.
- Formulas round separation distance to nearest mm and power to nearest mW before calculating estimated SAR or determining if SAR is excluded.

11.3 Simultaneous Transmission Analysis

Exposure Condition /Position		WLAN								Bluetooth	
		2.4 GHz		5 GHz		6 GHz					
		Main	Aux	Main	Aux	Main	Aux	Aux			
		【①】	【②】	【③】	【④】	【⑤】	【⑥】	【⑦】			
Body (Notebook)	Rear	0.934	1.383	1.389	0.988	1.069	0.998	0.373			
Body (Tablet)	Rear	0.035	0.066	0.086	0.102	0.053	0.134	0.022			
	Left	0.435	0.400	0.704	0.400	0.517	0.400	0.400			
	Right	0.400	0.611	0.068	1.191	0.400	0.838	0.238			
	Top	0.400	0.400	0.400	0.400	0.400	0.400	0.400			
	Bottom	0.400	0.400	0.400	0.400	0.400	0.400	0.400			
Summation											
Exposure Condition /Position		【①+⑦】	【①+②】	【③+⑦】	【④+⑦】	【③+④】	【⑤+⑦】	【⑥+⑦】	【⑤+⑥】	【③+④+⑦】	【⑤+⑥+⑦】
Body (Notebook)	Rear	1.307	2.317	1.762	1.361	2.377	1.442	1.371	2.067	2.750	2.440
Body (Tablet)	Rear	0.057	0.101	0.108	0.124	0.188	0.075	0.156	0.187	0.210	0.209
	Left	0.835	0.835	1.104	0.800	1.104	0.917	0.800	0.917	1.504	1.317
	Right	0.638	1.011	0.306	1.429	1.259	0.638	1.076	1.238	1.497	1.476
	Top	0.800	0.800	0.800	0.800	0.800	0.800	0.800	0.800	1.200	1.200
	Bottom	0.800	0.800	0.800	0.800	0.800	0.800	0.800	0.800	1.200	1.200

Notes:

- Simultaneous transmission SAR test exclusion considerations
Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneously transmitting antenna. When the sum of 1-g or 10-g SAR of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration. Per KDB Publication 447498 D01v06.
- When the sum of SAR1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR1g 1.6 W/kg), the SPLSR procedures is not required. When the sum of SAR1g is greater than the SAR limit (SAR1g 1.6 W/kg), SAR test exclusion is determined by the SPLSR.
- Bold values are analyzed in Section 11.4 by the SPLSR.

11.4 SAR to Peak Location Separation Ratio Analysis

The simultaneous transmitting antennas in each operating mode and exposure condition combination are considered one pair at a time to determine the SPLSR. When SAR is measured for both antennas in the pair, the peak location separation distance is computed by the following formula.

$$\text{Peak Location Separation Distance} = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2}$$

Where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the area or zoom scans.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna. Due to curvatures on the SAM phantom, when SAR is estimated for one of the antennas in an antenna pair, the measured peak SAR location will be translated onto the test device to determine the peak location separation for the antenna pair.

The SPLSR is determined by the following formula.

$$\text{SPLSR} = \frac{(\text{SAR}_1 + \text{SAR}_2)^{1.5}}{R_i}$$


Where SAR₁ and SAR₂ are the highest reported or estimated SAR for each antenna in the pair, and R_i is the separation distance between the peak SAR locations for the antenna pair in mm.

When the SPLSR is ≤ 0.04, ≤ 0.10 (10g) the simultaneous transmission SAR is not required. Otherwise, the enlarged zoom scan and volume scan post-processing procedures will be performed.

11.4.1 Summary of SPLSR Result

Exposure Condition (Notebook) /Position	WLAN						Bluetooth	Worst Summation		SPLSR Result	
	2.4 GHz		5 GHz		6 GHz			Aux	Sum No.		[W/kg]
	Main	Aux	Main	Aux	Main	Aux					
	①	②	③	④	⑤	⑥					
Rear	0.934	1.383	-	-	-	-	-	①+②	2.317	0.01	
Rear	-	-	1.389	-	-	-	0.373	③+⑦	1.762	0.01	
Rear	-	-	1.389	0.988	-	-	-	③+④	2.377	0.01	
Rear	-	-	-	-	1.069	0.998	-	⑤+⑥	2.067	0.01	
Rear	-	-	1.389	0.988	-	-	0.373	③+④+⑦	2.750	0.02	
Rear	-	-	-	-	1.069	0.998	0.373	⑤+⑥+⑦	2.440	0.01	

11.4.2 SPLSR Analysis

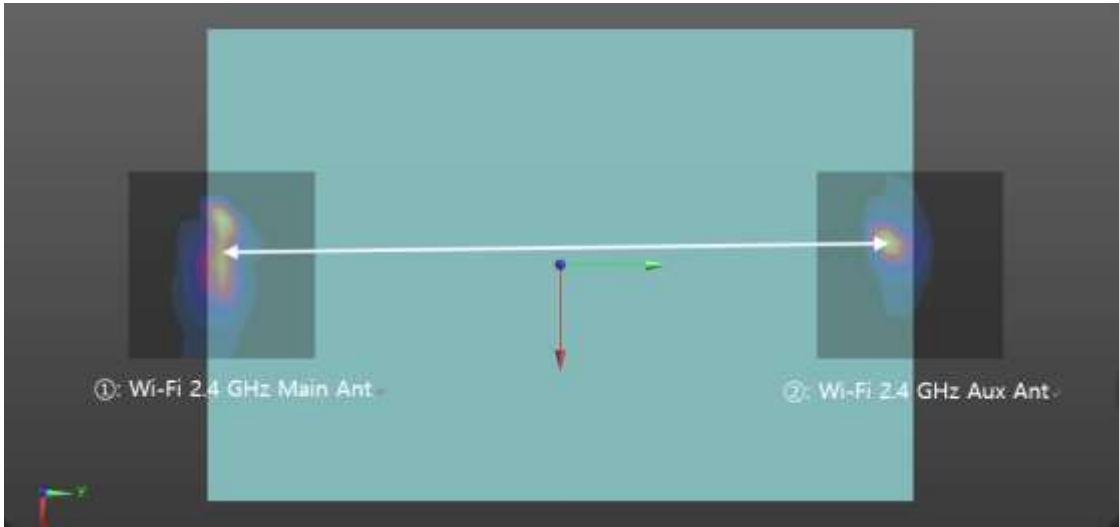RF Exposure Condition	Mode / Ant.	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (mm)	SPLSR Result	Simultaneous Transmission SAR
			X	Y	Z			
Body (Notebook)	WLAN 2.4 GHz Main Ant.	0.934	-0.00480	-0.14100	-0.17500	284.03	0.01	Not Required (SPLSR < 0.04)
	WLAN 2.4 GHz Aux Ant.	1.383	-0.00760	0.14300	-0.17800			
								


RF Exposure Condition	Mode / Ant.	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (mm)	SPLSR Result	Simultaneous Transmission SAR
			X	Y	Z			
Body (Notebook)	WLAN 5 GHz Main Ant.	1.389	-0.01540	-0.14300	-0.17500	286.03	0.01	Not Required (SPLSR < 0.04)
	Bluetooth	0.373	-0.01360	0.14300	-0.17900			
								


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SPF0083
Page (57) of (227)

KCTL

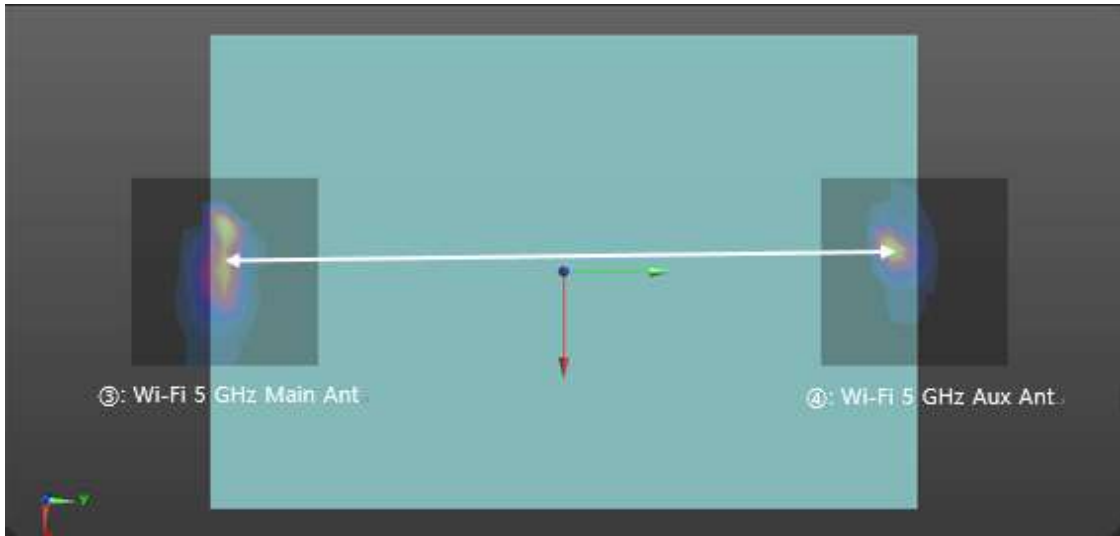RF Exposure Condition	Mode / Ant.	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (mm)	SPLSR Result	Simultaneous Transmission SAR
			X	Y	Z			
Body (Notebook)	WLAN 5 GHz Main Ant.	1.389	-0.01540	-0.14300	-0.17500	285.12	0.01	Not Required (SPLSR < 0.04)
	WLAN 5 GHz Aux Ant.	0.988	-0.00760	0.14200	-0.17800			
								

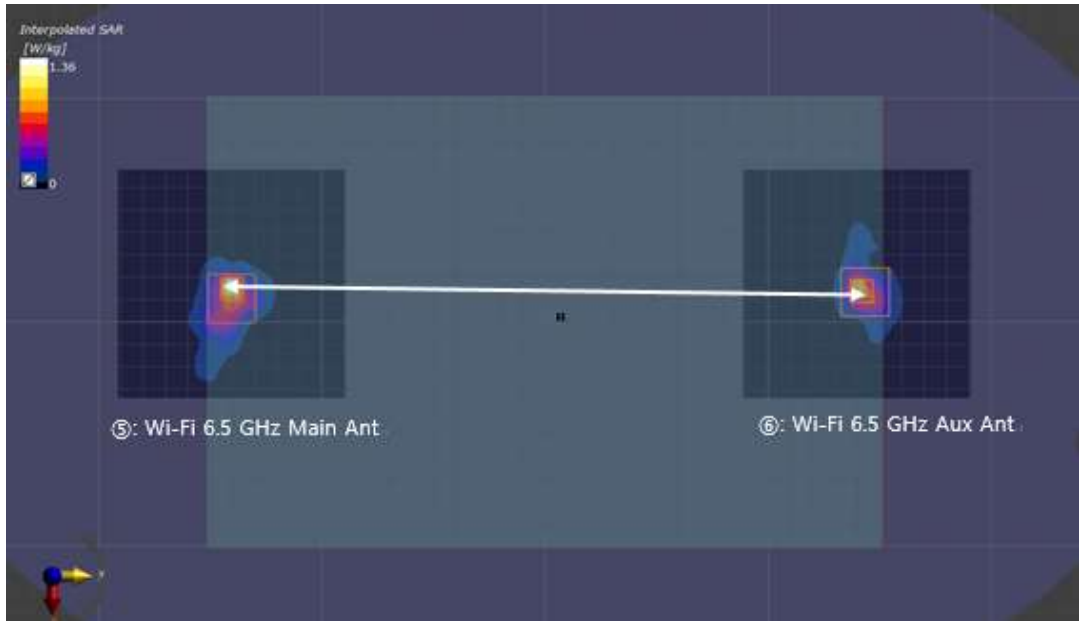RF Exposure Condition	Mode / Ant.	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (mm)	SPLSR Result	Simultaneous Transmission SAR
			X	Y	Z			
Body (Notebook)	WLAN 6 GHz Main Ant.	1.069	-0.01545	-0.14065	-0.17701	283.33	0.01	Not Required (SPLSR < 0.04)
	WLAN 6 GHz Aux Ant.	0.998	-0.01385	0.14268	-0.17701			
								


This test report shall not be reproduced, except in full, without the written approval

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SPF0083
Page (58) of (227)

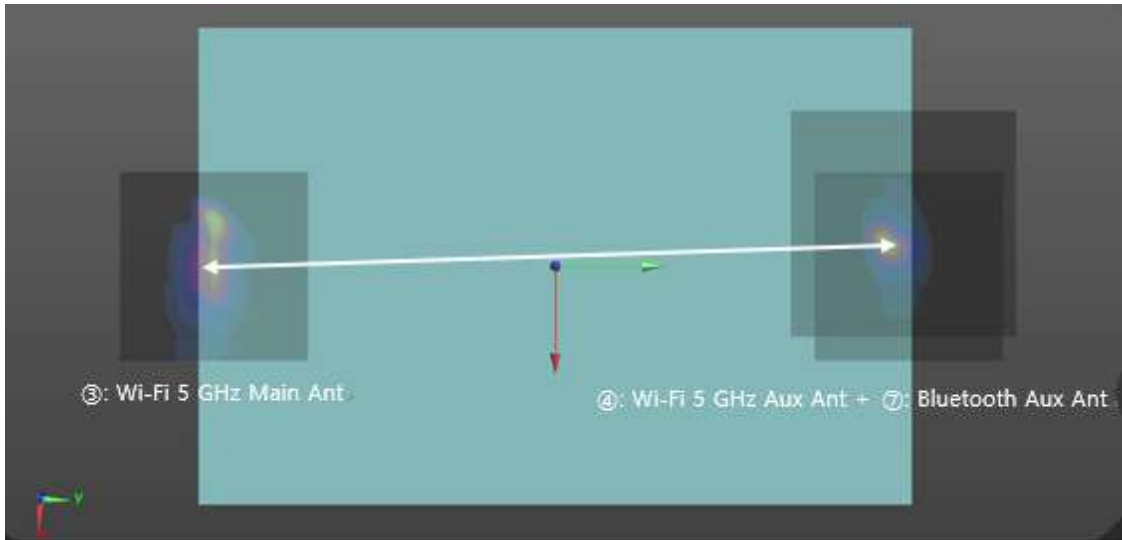

RF Exposure Condition	Mode / Ant.	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (mm)	SPLSR Result	Simultaneous Transmission SAR
			X	Y	Z			
Body (Notebook)	WLAN 5 GHz Main Ant.	1.389	-0.01540	-0.14300	-0.17500	285.12	0.02	Not Required (SPLSR < 0.04)
	WLAN 5 GHz Aux+Bluetooth	1.361	-0.00760	0.14200	-0.17800			
								
Note: The distance between WLAN 5 GHz Main and WLAN 5 GHz Aux + Bluetooth is calculated conservatively.								
RF Exposure Condition	Mode / Ant.	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (mm)	SPLSR Result	Simultaneous Transmission SAR
			X	Y	Z			
Body (Notebook)	WLAN 6 GHz Main Ant.	1.069	-0.01545	-0.14065	-0.17701	283.33	0.01	Not Required (SPLSR < 0.04)
	WLAN 6 GHz Aux Ant.+ Bluetooth	1.371	-0.01385	0.14268	-0.17701			
								
Note: The distance between WLAN 6 GHz Main and WLAN 6 GHz Aux + Bluetooth is calculated conservatively.								

This test report shall not be reproduced, except in full, without the written approval

12. SAR Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg.
- 2) **When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.**
- 3) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

Type	Band	Mode	Ant.	Frequency (MHz)	EUT Position	Separation Distance (mm)	Measured 1 g SAR (W/kg)	Repeated 1 g SAR (W/kg)	Ratio
Notebook	WLAN 2.4 GHz	802.11b	Main	2 462.0	Rear	0	0.900	0.900	1.00
		802.11n(HT40)	Aux	2 437.0	Rear	0	1.340	1.320	1.02
	U-NII-2A	802.11ac (VHT80)	Main	5 290.0	Rear	0	1.020	1.020	1.00
			Aux	5 290.0	Rear	0	0.834	0.841	1.01
	U-NII-2C	802.11ac (VHT80)	Main	5 690.0	Rear	0	1.300	1.270	1.02
			Aux	5 690.0	Rear	0	0.964	0.947	1.02
	U-NII-3	802.11ac (VHT80)	Main	5 775.0	Rear	0	1.230	1.210	1.02
			Aux	5 775.0	Rear	0	0.821	0.817	1.00
	U-NII-5	802.11ax (160-SU)	Main	6 025.0	Rear	0	0.888	0.897	1.01
			Aux	6 025.0	Rear	0	0.858	0.874	1.02
	U-NII-7	802.11ax (160-SU)	Main	6 665.0	Rear	0	0.882	0.901	1.02
			Aux	6 665.0	Rear	0	0.807	0.807	1.00
Type	Band	Mode	Ant.	Frequency (MHz)	EUT Position	Separation Distance (mm)	Measured Total psPD (W/m ²)	Repeated Total psPD (W/m ²)	Ratio
	U-NII-7	802.11ax (160-SU)	Main	6 665.0	Rear	2	5.63	5.04	1.12

Type	Band	Mode	Ant.	Frequency (MHz)	EUT Position	Separation Distance (mm)	Measured 1 g SAR (W/kg)	Repeated 1 g SAR (W/kg)	Ratio
Tablet	U-NII-2A	802.11ac (VHT80)	Aux	5 290.0	Rear	0	0.967	0.886	1.09
	U-NII-2C	802.11ac (VHT80)	Aux	5 690.0	Rear	0	1.110	1.140	1.03
	U-NII-3	802.11ac (VHT80)	Aux	5 775.0	Rear	0	1.140	1.110	1.03

13. Measurement Uncertainty

13.1 SAR Measurement Uncertainty

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Standard 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

13.2 Power Density Measurement Uncertainty

Source of uncertainty	Uncertainty Value ($\pm$ dB)	Probability distribution	Div.	c_i	Standard Uncertainty ($\pm$ dB)	ν_i
Measurement system						
Calibration	0.49	N	1.00	1.00	0.49	∞
Probe correction	0.00	R	1.73	1.00	0.00	∞
Frequency response (BW $\leq$ 1 GHz)	0.20	R	1.73	1.00	0.12	∞
Sensor cross coupling	0.00	R	1.73	1.00	0.00	∞
Isotropy	0.50	R	1.73	1.00	0.29	∞
Linearity	0.20	R	1.73	1.00	0.12	∞
Probe scattering	0.00	R	1.73	1.00	0.00	∞
Probe positioning offset	0.30	R	1.73	1.00	0.17	∞
Probe positioning repeatability	0.04	R	1.73	1.00	0.02	∞
Sensor mechanical offset	0.00	R	1.73	1.00	0.00	∞
Probe spatial resolution	0.00	R	1.73	1.00	0.00	∞
Field impedance dependence	0.00	R	1.73	1.00	0.00	∞
Amplitude and phase drift	0.00	R	1.73	1.00	0.00	∞
Amplitude and phase noise	0.04	R	1.73	1.00	0.02	∞
Measurement area truncation	0.00	R	1.73	1.00	0.00	∞
Data acquisition	0.03	N	1.00	1.00	0.03	∞
Sampling	0.00	R	1.73	1.00	0.00	∞
Field reconstruction	1.77	R	1.73	1.00	1.02	∞
Forward transformation	0.00	R	1.73	1.00	0.00	∞
Power density scaling	-	R	1.73	1.00	-	∞
Spatial averaging	0.10	R	1.73	1.00	0.06	∞
System detection limit	0.04	R	1.73	1.00	0.02	∞
DUT and environmental factors						
Probe coupling with DUT	0.00	R	1.73	1.00	0.00	∞
Modulation response	0.40	R	1.73	1.00	0.23	∞
Integration time	0.00	R	1.73	1.00	0.00	∞
Response time	0.00	R	1.73	1.00	0.00	∞
Device holder influence	0.10	R	1.73	1.00	0.06	∞
DUT alignment	0.00	R	1.73	1.00	0.00	∞
RF ambient conditions	0.04	R	1.73	1.00	0.02	∞
Ambient reflections	0.04	R	1.73	1.00	0.02	∞
Immunity / secondary reception	0.00	R	1.73	1.00	0.00	∞
Drift of the DUT	0.22	R	1.73	1.00	0.13	∞
Combined standard uncertainty	RSS				1.23	
Expanded uncertainty (95 % confidence interval)	$k = 2$				2.46	

14. Test Equipment Information

Test Platform	SPEAG DASY5 System, SPEAG DASY6 System			
Version	DASY52: 52.10.4.1527 / SEMCAD: 14.6.14 (7483) DASY6: 16.0.0.116 / DASY6 mmWave: 2.4.2.62			
Location	KCTL Inc, 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, Korea			
Manufacture	SPEAG			
Hardware Reference				
Equipment	Model	Serial Number	Date of Calibration	Due date of next Calibration
Shield Room	-	8F - 3	-	-
Shield Room	-	8F - 4		
DASY6 Robot	TX60 Lspeag	F/19/0007289/A/001		
DASY6 Robot	TX90XL speag	F/18/0004968/A/001	-	-
Phantom	2mm Oval Phantom ELI5	2098		
Phantom	mmWave Phantom	1062		
Phantom	2mm Oval Phantom ELI5	2097	-	-
Mounting Device	Laptop Holder	-	-	-
mmWave Device Holder	mmWave Device Holder	1116	-	-
DAE	DAE4	1587	2021-07-26	2022-07-26
DAE	DAE4	1342	2021-06-02	2022-06-02
Probe	EX3DV4	3697	2021-03-22	2022-03-22
Probe	EX3DV4	7540	2021-04-29	2022-04-29
Isotropic E-Field Probe	EUmmWV4	9489	2021-05-28	2022-05-28
PSG Analog Signal Generator	E8257D	MY60020337	2021-01-21	2022-01-21
ESG Vector Signal Generator	E4438C	MY42080845	2021-02-25	2022-02-25
Dual Power Meter	EPM-442A	GB37480680	2021-05-11	2022-05-11
Power Sensor	8481H	2703A11902	2021-05-11	2022-05-11
Power Sensor	8481H	3318A18090	2021-05-11	2022-05-11
Attenuator	8491A	21552	2021-05-10	2022-05-10
Attenuator	8491A	35560	2021-05-10	2022-05-10
Attenuator	8491A	35934	2021-05-10	2022-05-10
Low Pass Filter	VLF-3000+	31831	2021-05-10	2022-05-10
Dual Directional Coupler	772D	2839A160504	2021-05-10	2022-05-10
Power Amplifier	AMP2027	10010	2021-05-10	2022-05-10
Preamplifier	8449B	3008A01802	2021-04-01	2022-04-01
Dipole Validation Kits	D2450V2	895	2020-07-21	2022-07-21
Dipole Validation Kits	D5GHzV2	1293	2021-07-22	2023-07-22
Dipole Validation Kits	D6.5GHzV2	1005	2020-08-21	2022-08-21
System Verification Device	5G Verification Source 10 GHz	1023	2021-01-19	2022-01-19
Network Analyzer	E5071B	MY42403524	2021-02-15	2022-02-15
Dielectric Assessment Kit	DAK-3.5	1078	2021-05-26	2022-05-26
Humidity/Temp	MHB-382SD	46307	2021-08-12	2022-08-12
Humidity/Temp	MHB-382SD	46301	2021-02-28	2022-02-28
Spectrum Analyzer	FSP7	100289	2020-12-23	2021-12-23

15. Test System Verification and Test Results**15.1 SAR Test System Verification and Test Results**

Date: 12/6/2021

Test Laboratory: KCTL Inc.

File Name: [2450 MHz Verification Input Power 100 mW 2021-12-06.da5:0](#)**DUT: Dipole 2450 MHz D2450V2, Type: D2450V2, Serial: D2450V2 - SN:895**

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.831$ S/m; $\epsilon_r = 39.509$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540; ConvF(7.45, 7.45, 7.45) @ 2450 MHz; ; Calibrated: 4/29/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1587; Calibrated: 7/26/2021
- Phantom: ELI V8.0_Left; Type: QD OVA 004 AA; Serial: 2098
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/2450 MHz Verification Input Power 100 mW 2021-12-06/Area Scan (10x11x1):

Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 6.65 W/kg

Configuration/2450 MHz Verification Input Power 100 mW 2021-12-06/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 71.56 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 10.6 W/kg


SAR(1 g) = 5.11 W/kg; SAR(10 g) = 2.39 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 48.5%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 8.52 W/kg

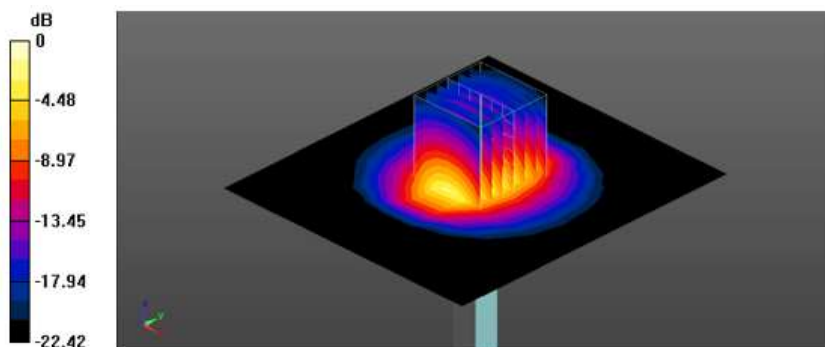

0 dB = 8.52 W/kg = 9.30 dBW/kg

Date: 12/15/2021

Test Laboratory: KCTL Inc.

File Name: [2450 MHz Verification Input Power 100 mW 2021-12-15.da52:0](#)**DUT: Dipole 2450 MHz D2450V2, Type: D2450V2, Serial: D2450V2 - SN:895**

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.851$ S/m; $\epsilon_r = 38.217$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.11, 7.11, 7.11) @ 2450 MHz; Calibrated: 3/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 6/2/2021
- Phantom: Front Left ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/2450 MHz Verification Input Power 100 mW 2021-12-15/Area Scan (9x12x1):

Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 7.33 W/kg

Configuration/2450 MHz Verification Input Power 100 mW 2021-12-15/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 67.74 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 11.2 W/kg


SAR(1 g) = 5.3 W/kg; SAR(10 g) = 2.47 W/kg

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 47.5%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 8.95 W/kg

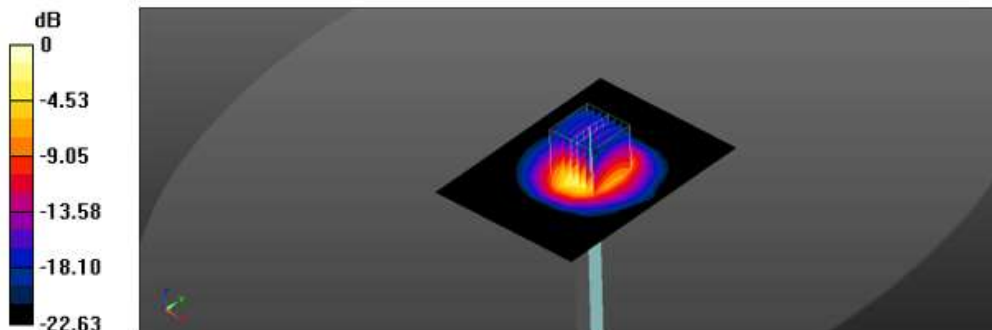

0 dB = 8.95 W/kg = 9.52 dBW/kg

Date: 12/15/2021

Test Laboratory: KCTL Inc.

File Name: [5300 MHz Verification Input Power 100 mW 2021-12-15.da5:0](#)**DUT: Dipole D5GHzV2, Type: D5GHzV2, Serial: D5GHzV2 - SN:1293**

Communication System: UID 0, CW (0); Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5300$ MHz; $\sigma = 4.851$ S/m; $\epsilon_r = 35.082$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.62, 4.62, 4.62) @ 5300 MHz; Calibrated: 3/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 6/2/2021
- Phantom: Front Left ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/5300 MHz Verification Input Power 100 mW 2021-12-15/Area Scan (10x13x1):

Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 20.0 W/kg

Configuration/5300 MHz Verification Input Power 100 mW 2021-12-15/Zoom Scan (9x9x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 70.31 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 38.6 W/kg


SAR(1 g) = 8.31 W/kg; SAR(10 g) = 2.4 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 59.9%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 21.7 W/kg

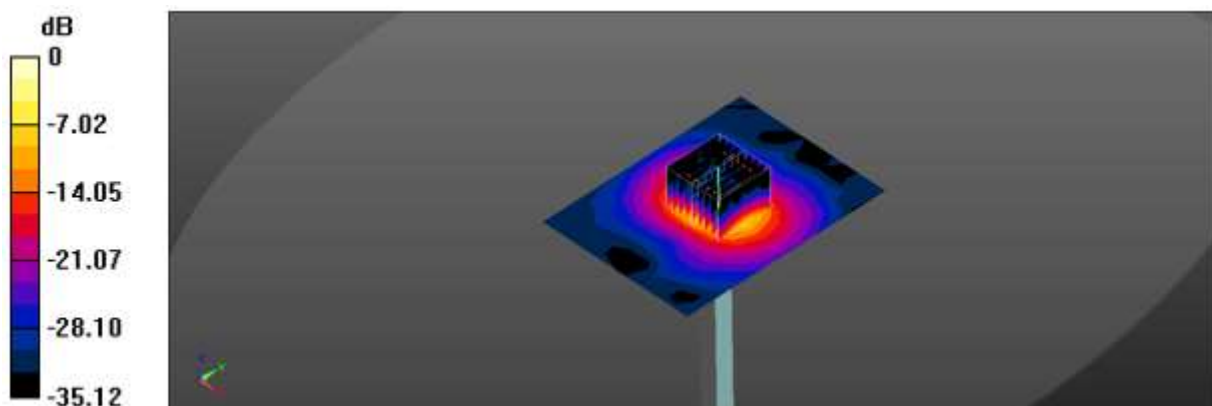

0 dB = 21.7 W/kg = 13.36 dBW/kg

Date: 12/17/2021

Test Laboratory: KCTL Inc.

File Name: [5300 MHz Verification Input Power 100 mW 2021-12-17.da5:0](#)**DUT: Dipole D5GHzV2, Type: D5GHzV2, Serial: D5GHzV2 - SN:1293**

Communication System: UID 0, CW (0); Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5300$ MHz; $\sigma = 4.856$ S/m; $\epsilon_r = 35.208$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.62, 4.62, 4.62) @ 5300 MHz; Calibrated: 3/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 6/2/2021
- Phantom: Front Left ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/5300 MHz Verification Input Power 100 mW 2021-12-17/Area Scan (10x13x1):

Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 19.8 W/kg

Configuration/5300 MHz Verification Input Power 100 mW 2021-12-17/Zoom Scan (9x9x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 69.66 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 37.6 W/kg


SAR(1 g) = 8.14 W/kg; SAR(10 g) = 2.35 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 60.1%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 21.3 W/kg

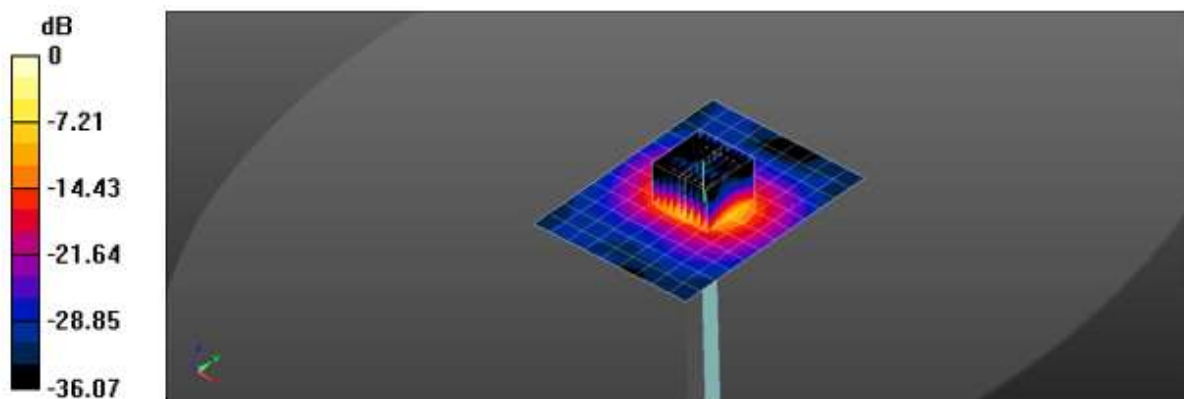

0 dB = 21.3 W/kg = 13.28 dBW/kg

Date: 12/16/2021

Test Laboratory: KCTL Inc.

File Name: [5600 MHz Verification Input Power 100 mW 2021-12-16.da5:0](#)**DUT: Dipole D5GHzV2, Type: D5GHzV2, Serial: D5GHzV2 - SN:1293**

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5600$ MHz; $\sigma = 5.134$ S/m; $\epsilon_r = 34.647$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.35, 4.35, 4.35) @ 5600 MHz; Calibrated: 3/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 6/2/2021
- Phantom: Front Left ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/5600 MHz Verification Input Power 100 mW 2021-12-16/Area Scan (10x13x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 19.6 W/kg

Configuration/5600 MHz Verification Input Power 100 mW 2021-12-16/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 62.14 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 34.6 W/kg

SAR(1 g) = 7.89 W/kg; SAR(10 g) = 2.29 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 61.7%

Maximum value of SAR (measured) = 20.4 W/kg

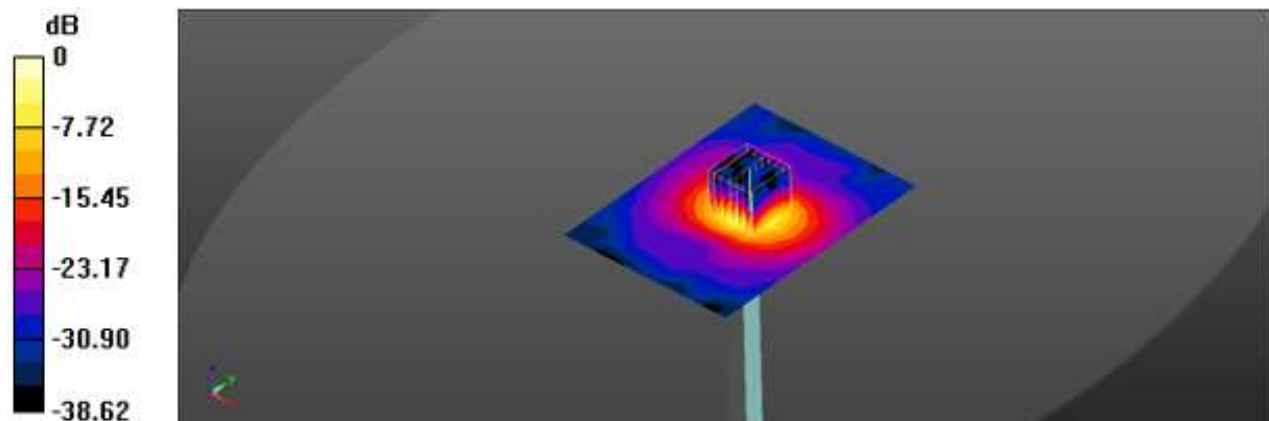

0 dB = 20.4 W/kg = 13.10 dBW/kg

Date: 12/18/2021

Test Laboratory: KCTL Inc.

File Name: [5600 MHz Verification Input Power 100 mW 2021-12-18.da5:0](#)**DUT: Dipole D5GHzV2, Type: D5GHzV2, Serial: D5GHzV2 - SN:1293**

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5600$ MHz; $\sigma = 5.062$ S/m; $\epsilon_r = 34.788$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.35, 4.35, 4.35) @ 5600 MHz; Calibrated: 3/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 6/2/2021
- Phantom: Front Left ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/5600 MHz Verification Input Power 100 mW 2021-12-18/Area Scan (10x13x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 20.4 W/kg

Configuration/5600 MHz Verification Input Power 100 mW 2021-12-18/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.73 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 36.9 W/kg

SAR(1 g) = 8.25 W/kg; SAR(10 g) = 2.39 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 61.4%

Maximum value of SAR (measured) = 21.7 W/kg

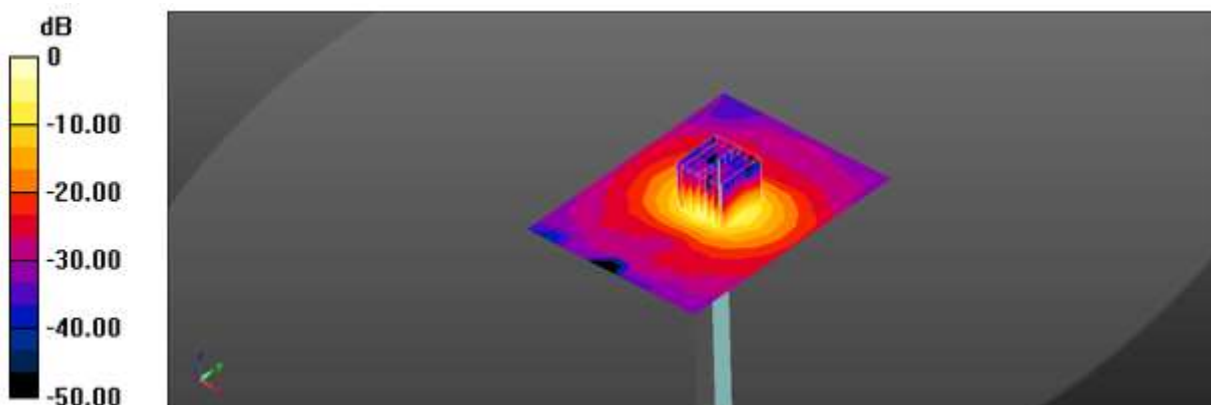

0 dB = 20.4 W/kg = 13.10 dBW/kg

Date: 12/16/2021

Test Laboratory: KCTL Inc.

File Name: [5800 MHz Verification Input Power 100 mW 2021-12-16.da5:0](#)**DUT: Dipole D5GHzV2, Type: D5GHzV2, Serial: D5GHzV2 - SN:1293**

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5800$ MHz; $\sigma = 5.314$ S/m; $\epsilon_r = 34.38$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.4, 4.4, 4.4) @ 5800 MHz; Calibrated: 3/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 6/2/2021
- Phantom: Front Left ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/5800 MHz Verification Input Power 100 mW 2021-12-16/Area Scan (10x13x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 19.4 W/kg

Configuration/5800 MHz Verification Input Power 100 mW 2021-12-16/Zoom Scan (9x9x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.96 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 37.5 W/kg

SAR(1 g) = 8.02 W/kg; SAR(10 g) = 2.32 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 59.9%

Maximum value of SAR (measured) = 21.2 W/kg

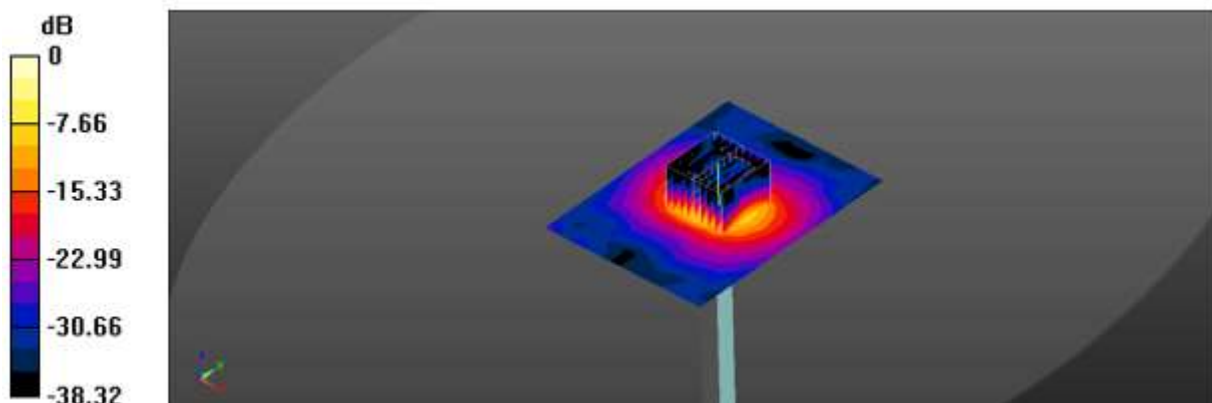

0 dB = 21.2 W/kg = 13.26 dBW/kg

Date: 12/17/2021

Test Laboratory: KCTL Inc.

File Name: [5800 MHz Verification Input Power 100 mW 2021-12-17.da5:0](#)**DUT: Dipole D5GHzV2, Type: D5GHzV2, Serial: D5GHzV2 - SN:1293**

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5800$ MHz; $\sigma = 5.319$ S/m; $\epsilon_r = 34.461$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.4, 4.4, 4.4) @ 5800 MHz; Calibrated: 3/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 6/2/2021
- Phantom: Front Left ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/5800 MHz Verification Input Power 100 mW 2021-12-17/Area Scan (10x13x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 20.0 W/kg

Configuration/5800 MHz Verification Input Power 100 mW 2021-12-17/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.84 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 35.8 W/kg

SAR(1 g) = 7.83 W/kg; SAR(10 g) = 2.26 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 60.5%

Maximum value of SAR (measured) = 20.6 W/kg

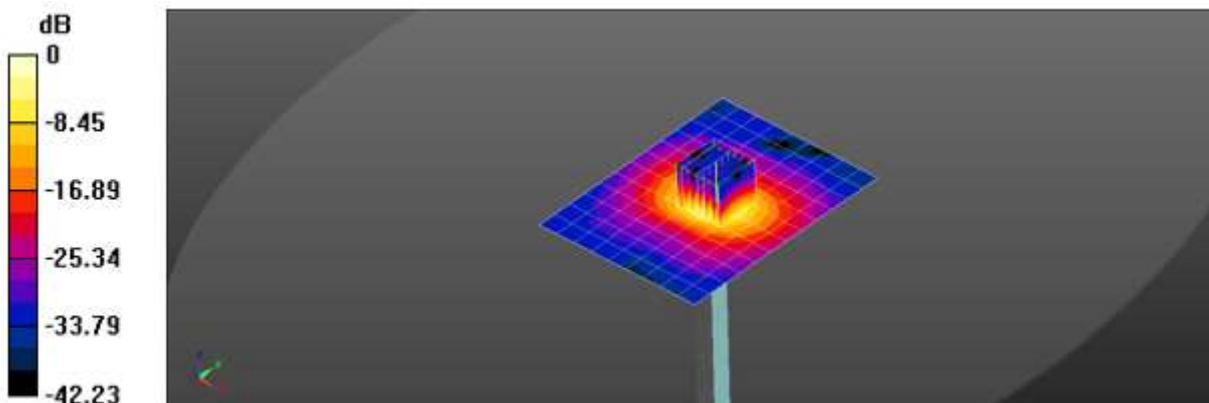

0 dB = 20.6 W/kg = 13.14 dBW/kg

KCTL Inc.

Measurement Report for Dipole D6.5GHzV2, FRONT, Validation band, UID 0 -, Channel 6500 (6500.0M Hz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole D6.5GHzV2, Speag	16.0 x 6.0 x 300.0	1005	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 5.00	Validation band	CW, 0--	6500.0, 6500	5.45	6.03	34.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000, 2021-Dec-07	EX3DV4 - SN7540, 2021-04-29	DAE4 Sn1587, 2021-07-26

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 85.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	6.0 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA Surface	N/A	N/A
Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2021-12-07	2021-12-07
psSAR1g [W/kg]	2.38	2.93
psSAR10g [W/kg]	0.525	0.548
psPDab (1.0cm2, sq) [W/m2]		29.3
psPDab (4.0cm2, sq) [W/m2]		13.4
Power Drift [dB]		0.03
M2/M1 [%]		49.9
Dist 3dB Peak [mm]		4.8

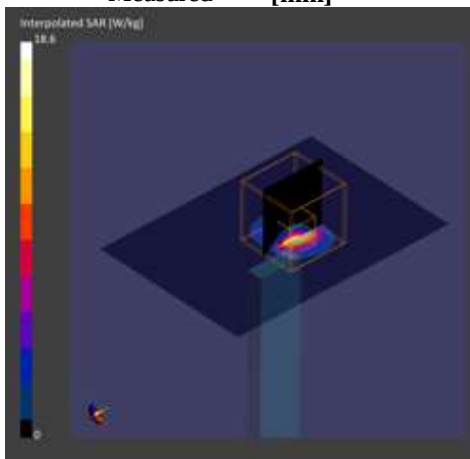

KCTL Inc.

Measurement Report for Dipole D6.5GHzV2, FRONT, Validation band, UID 0 -, Channel 6500 (6500.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole D6.5GHzV2, Speag	16.0 x 6.0 x 300.0	1005	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 5.00	Validation band	CW, 0--	6500.0, 6500	5.45	5.97	34.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000, 2021- Dec-08	EX3DV4 - SN7540, 2021- 04-29	DAE4 Sn1587, 2021-07- 26

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 85.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	6.0 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2021- 12-08	2021-12-08
psSAR1g [W/kg]	2.35	2.88
psSAR10g [W/kg]	0.517	0.538
psPDab (1.0cm2, sq) [W/m2]		28.8
psPDab (4.0cm2, sq) [W/m2]		13.1
Power Drift [dB]		0.04
M2/M1 [%]		49.7
Dist 3dB Peak [mm]		4.8

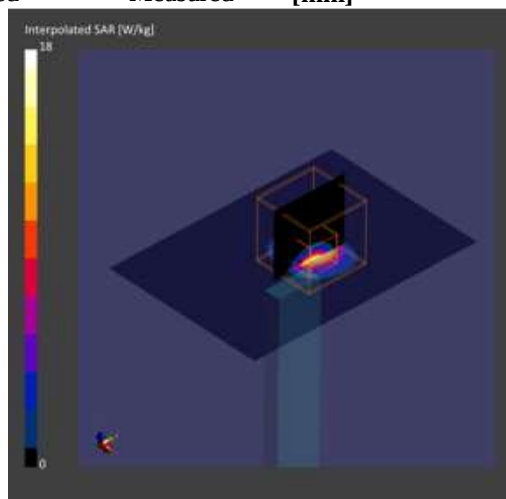

1)

Date: 12/15/2021

Test Laboratory: KCTL Inc.

File Name: [3.WLAN 2.4 GHz_Notebook.da53:0](#)

DUT: NP930QED, Type: Notebook, Serial: 5B0Q9FMRA00004B

Communication System: UID 0, 2.4G WLAN (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.864 \text{ S/m}$; $\epsilon_r = 38.165$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.11, 7.11, 7.11) @ 2462 MHz; Calibrated: 3/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 6/2/2021
- Phantom: Front_Left_ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11 b_Main_CH11_Rear 0mm/Area Scan (9x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 1.92 W/kg

Configuration/802.11 b_Main_CH11_Rear 0mm/Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.526 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 2.66 W/kg

SAR(1 g) = 0.900 W/kg; SAR(10 g) = 0.362 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 35.6%

Maximum value of SAR (measured) = 1.83 W/kg

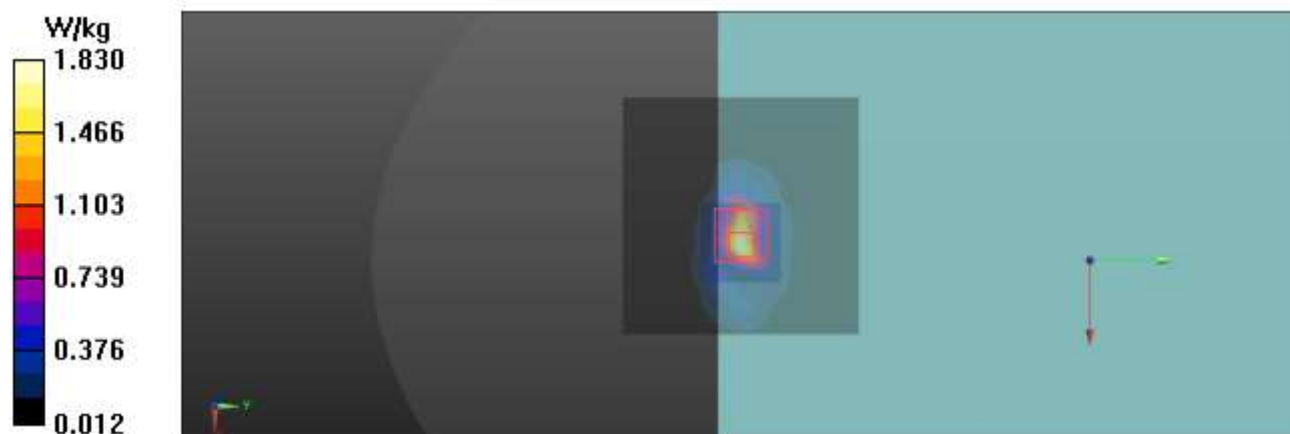

2)

Date: 12/15/2021

Test Laboratory: KCTL Inc.

File Name: [3.WLAN 2.4 GHz_Notebook.da53:1](#)

DUT: NP930QED, Type: Notebook, Serial: 5B0Q9FMRA00004B

Communication System: UID 0, 2.4G WLAN (0); Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 2437 \text{ MHz}$; $\sigma = 1.836 \text{ S/m}$; $\epsilon_r = 38.268$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.11, 7.11, 7.11) @ 2437 MHz; Calibrated: 3/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 6/2/2021
- Phantom: Front_Left_ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration 2/802.11 n_HT40_Aux_CH6_Rear 0mm/Area Scan (9x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.50 W/kg

Configuration 2/802.11 n_HT40_Aux_CH6_Rear 0mm/Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=5\text{mm}$

Reference Value = 40.03 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 4.11 W/kg


SAR(1 g) = 1.34 W/kg; SAR(10 g) = 0.483 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 39.6%

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 2.74 W/kg

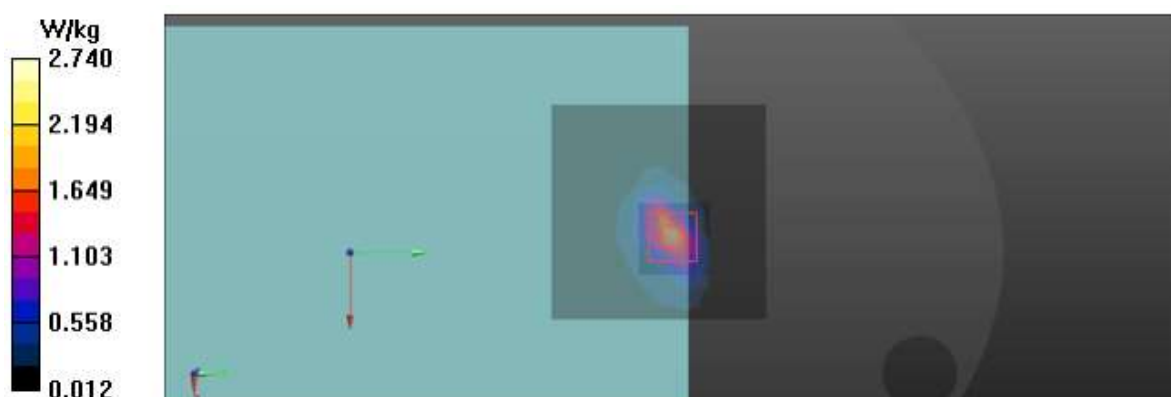

3)

Date: 12/15/2021

Test Laboratory: KCTL Inc.

File Name : [1.WLAN 5.3 GHz_Notebook.da53:0](#)

DUT: NP930QED, Type: Notebook, Serial: 5B0Q9FMRA00004B

Communication System: UID 0, 5G WLAN (0); Frequency: 5290 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5290$ MHz; $\sigma = 4.841$ S/m; $\epsilon_r = 35.099$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.62, 4.62, 4.62) @ 5290 MHz; Calibrated: 3/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 6/2/2021
- Phantom: Front_Left_ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11 ac_VHT80_Main_CH58_Rear 0 mm/Area Scan (9x9x1): Measurement grid:
 $dx=10$ mm, $dy=10$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.01 W/kg

Configuration/802.11 ac_VHT80_Main_CH58_Rear 0 mm/Zoom Scan (11x11x7)/Cube 0: Measurement grid: $dx=3$ mm, $dy=3$ mm, $dz=1.4$ mm

Reference Value = 18.49 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 6.16 W/kg


SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.403 W/kg

Smallest distance from peaks to all points 3 dB below = 3 mm

Ratio of SAR at M2 to SAR at M1 = 60.1%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.96 W/kg

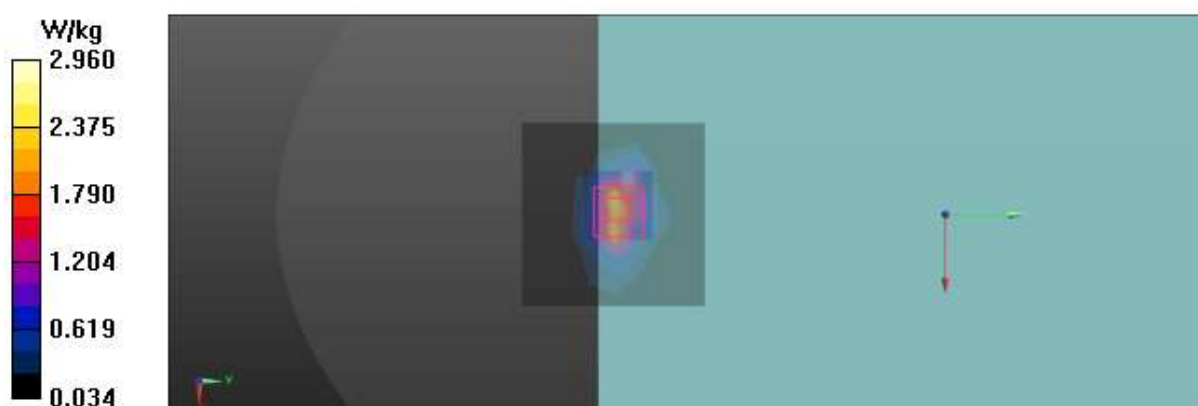

4)

Date: 12/15/2021

Test Laboratory: KCTL Inc.

File Name : [1.WLAN 5.3 GHz_Notebook.da53:1](#)

DUT: NP930QED, Type: Notebook, Serial: 5B0Q9FMRA00004B

Communication System: UID 0, 5GWLAN (0); Frequency: 5290 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5290$ MHz; $\sigma = 4.841$ S/m; $\epsilon_r = 35.099$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.62, 4.62, 4.62) @ 5290 MHz; Calibrated: 3/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 6/2/2021
- Phantom: Front_Left_ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration 2/802.11 ac_VHT80_Aux_CH58_Rear 0 mm_Repeated test/Area Scan (9x9x1):
 Measurement grid: dx=10mm, dy=10mm


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.20 W/kg

Configuration 2/802.11 ac_VHT80_Aux_CH58_Rear 0 mm_Repeated test/Zoom Scan (11x11x7)/Cube 0: Measurement grid: dx=3mm, dy=3mm, dz=1.4mm
 Reference Value = 17.02 V/m; Power Drift = -0.20 dB
 Peak SAR (extrapolated) = 4.60 W/kg
SAR(1 g) = 0.841 W/kg; SAR(10 g) = 0.273 W/kg
 Smallest distance from peaks to all points 3 dB below = 4.2 mm
 Ratio of SAR at M2 to SAR at M1 = 59.2%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.52 W/kg

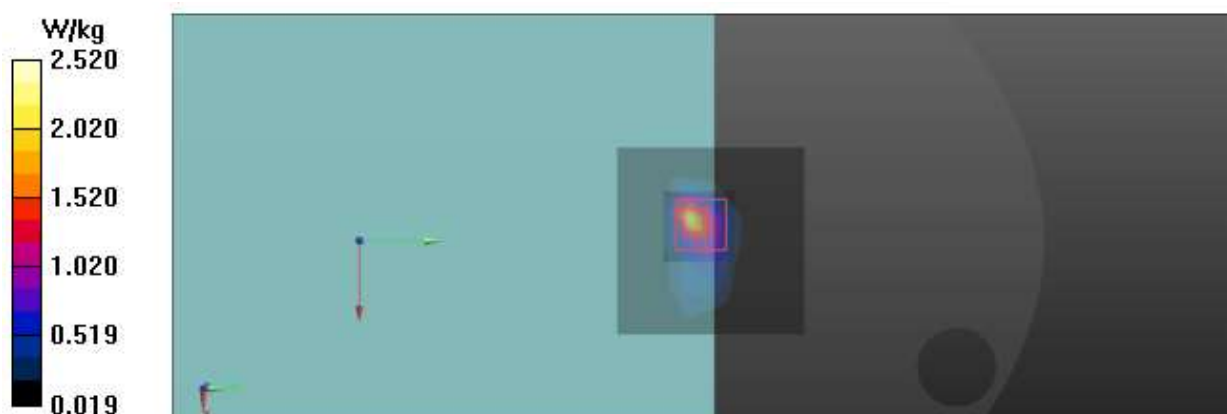

This test report shall not be reproduced, except in full, without the written approval

5)

Date: 12/16/2021

Test Laboratory: KCTL Inc.

File Name : [1.WLAN 5.6 GHz_Notebook.da53:0](#)

DUT: NP930QED, Type: Notebook, Serial: 5B0Q9FMRA00004B

Communication System: UID 0, 5G WLAN (0); Frequency: 5690 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5690$ MHz; $\sigma = 5.218$ S/m; $\epsilon_r = 34.502$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.35, 4.35, 4.35) @ 5690 MHz; Calibrated: 3/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 6/2/2021
- Phantom: Front_Left_ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11 ac_VHT80_Main_CH138_Rear 0 mm/Area Scan (9x9x1): Measurement grid:
 $dx=10$ mm, $dy=10$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.71 W/kg

Configuration/802.11 ac_VHT80_Main_CH138_Rear 0 mm/Zoom Scan (12x11x7)/Cube 0:

Measurement grid: $dx=3$ mm, $dy=3$ mm, $dz=1.4$ mm

Reference Value = 30.41 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 10.4 W/kg


SAR(1 g) = 1.3 W/kg; SAR(10 g) = 0.372 W/kg

Smallest distance from peaks to all points 3 dB below = 3.2 mm

Ratio of SAR at M2 to SAR at M1 = 55.9%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 4.55 W/kg

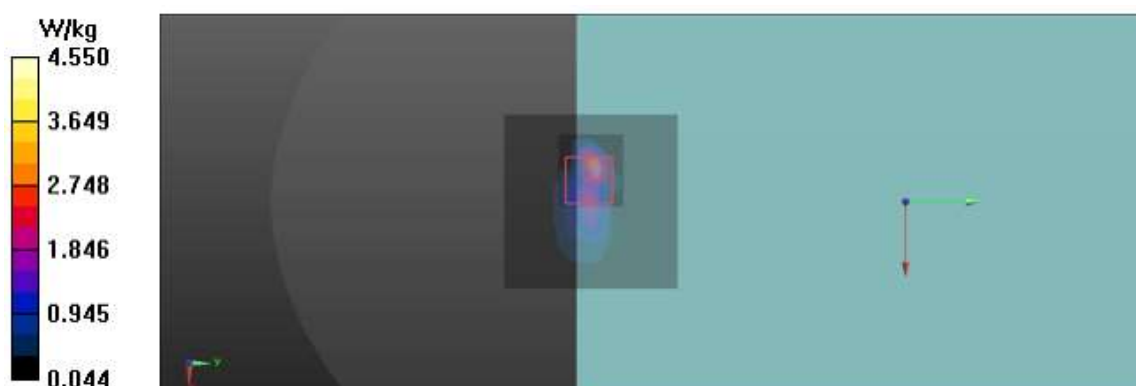

6)

Date: 12/16/2021

Test Laboratory: KCTL Inc.

File Name : [1.WLAN 5.6 GHz_Notebook.da53:1](#)

DUT: NP930QED, Type: Notebook, Serial: 5B0Q9FMRA00004B

Communication System: UID 0, 5G WLAN (0); Frequency: 5690 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5690$ MHz; $\sigma = 5.218$ S/m; $\epsilon_r = 34.502$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.35, 4.35, 4.35) @ 5690 MHz; Calibrated: 3/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 6/2/2021
- Phantom: Front_Left_ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration 2/802.11 ac_VHT80_Aux_CH138_Rear 0 mm/Area Scan (9x9x1): Measurement grid:
 $dx=10$ mm, $dy=10$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.74 W/kg

Configuration 2/802.11 ac_VHT80_Aux_CH138_Rear 0 mm/Zoom Scan (10x11x7)/Cube 0:

Measurement grid: $dx=3$ mm, $dy=3$ mm, $dz=1.4$ mm

Reference Value = 27.75 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 6.12 W/kg


SAR(1 g) = 0.964 W/kg; SAR(10 g) = 0.256 W/kg

Smallest distance from peaks to all points 3 dB below = 3.6 mm

Ratio of SAR at M2 to SAR at M1 = 59.2%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.99 W/kg

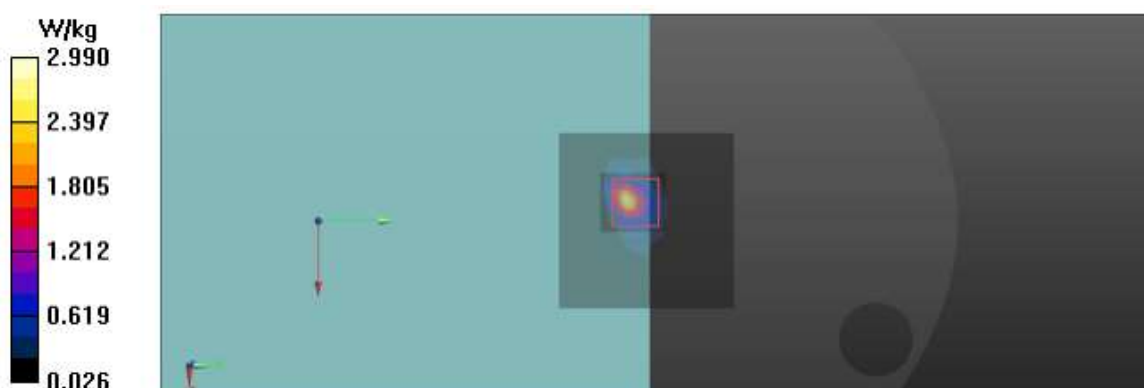

7)

Date: 12/16/2021

Test Laboratory: KCTL Inc.

File Name : [1.WLAN 5.8 GHz_Notebook.da53:0](#)

DUT: NP930QED, Type: Notebook, Serial: 5B0Q9FMRA00004B

Communication System: UID 0, 5GWLAN (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.292$ S/m; $\epsilon_r = 34.404$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697;ConvF(4.4, 4.4, 4.4) @ 5775 MHz; Calibrated: 3/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 6/2/2021
- Phantom: Front_Left_ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11 ac_VHT80_Main_CH155_Rear 0 mm/Area Scan (9x9x1): Measurement grid:
 $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 2.00 W/kg

Configuration/802.11 ac_VHT80_Main_CH155_Rear 0 mm/Zoom Scan (12x10x7)/Cube 0:

Measurement grid: $dx=3$ mm, $dy=3$ mm, $dz=1.4$ mm

Reference Value = 11.71 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 9.43 W/kg

SAR(1 g) = 1.23 W/kg; SAR(10 g) = 0.351 W/kg

Smallest distance from peaks to all points 3 dB below = 3 mm

Ratio of SAR at M2 to SAR at M1 = 56.2%

Maximum value of SAR (measured) = 4.46 W/kg

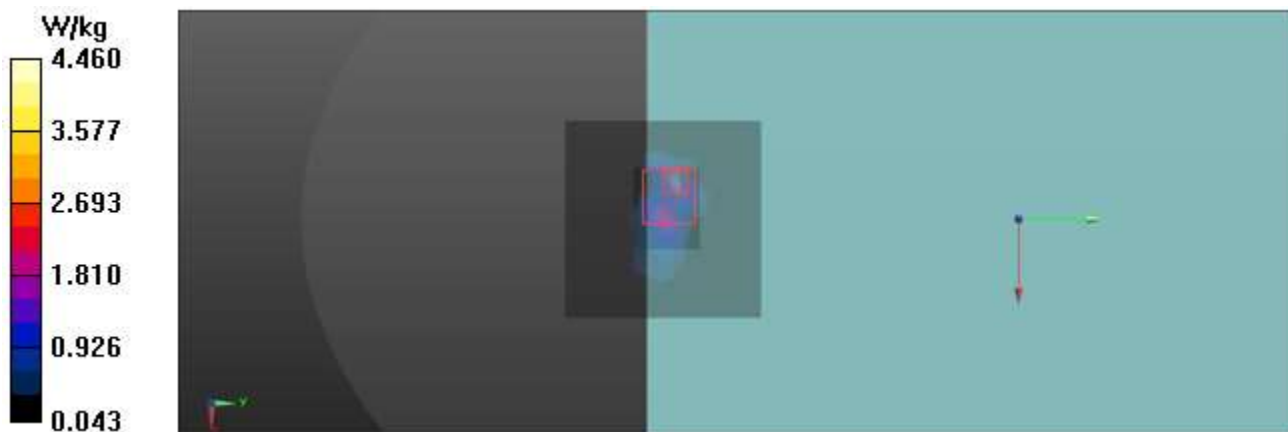

8)

Date: 12/16/2021

Test Laboratory: KCTL Inc.

File Name : [1.WLAN 5.8 GHz_Notebook.da53:1](#)

DUT: NP930QED, Type: Notebook, Serial: 5B0Q9FMRA00004B

Communication System: UID 0, 5G WLAN (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.292$ S/m; $\epsilon_r = 34.404$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.4, 4.4, 4.4) @ 5775 MHz; Calibrated: 3/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 6/2/2021
- Phantom: Front_Left_ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration 2/802.11 ac_VHT80_Aux_CH155_Rear 0 mm/Area Scan (9x9x1): Measurement grid:
 $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 2.22 W/kg

Configuration 2/802.11 ac_VHT80_Aux_CH155_Rear 0 mm/Zoom Scan (11x11x7)/Cube 0:

Measurement grid: $dx=3$ mm, $dy=3$ mm, $dz=1.4$ mm

Reference Value = 22.78 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 5.10 W/kg

SAR(1 g) = 0.821 W/kg; SAR(10 g) = 0.222 W/kg

Smallest distance from peaks to all points 3 dB below = 3.6 mm

Ratio of SAR at M2 to SAR at M1 = 59.1%

Maximum value of SAR (measured) = 2.52 W/kg

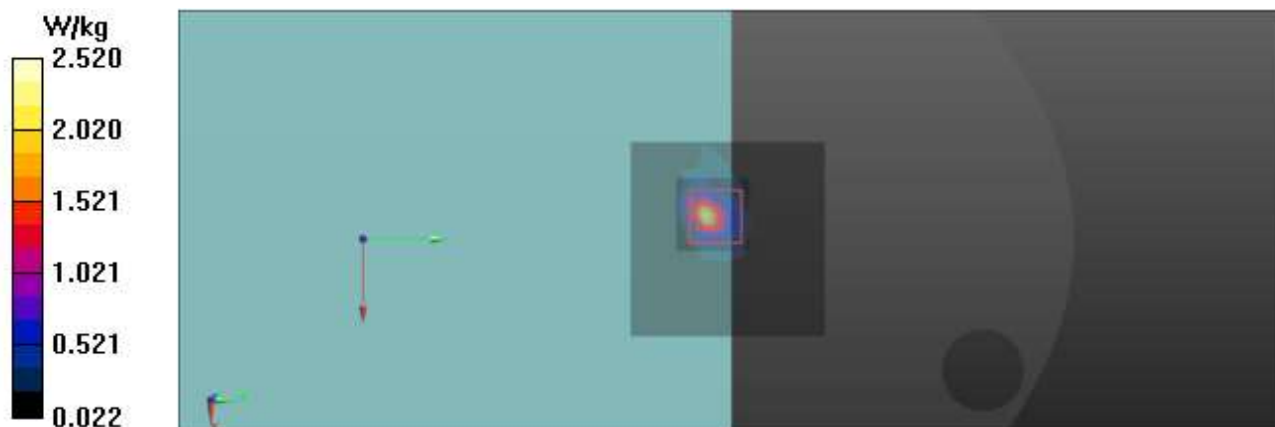

9)

Date: 12/6/2021

Test Laboratory: KCTL Inc.

File Name: [1. Bluetooth BDR DH5 Notebook.da53:0](#)

DUT: NP930QED, Type: Notebook, Serial: 5B0Q9FMRA00003P

Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.30167
 Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.768$ S/m; $\epsilon_r = 39.622$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540; ConvF(7.45, 7.45, 7.45) @ 2402 MHz; ; Calibrated: 4/29/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1587; Calibrated: 7/26/2021
- Phantom: ELI V8.0 Left; Type: QD OVA 004 AA; Serial: 2098
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/Bluetooth_BDR_DH5_CH0_Rear 0mm/Area Scan (9x9x1): Measurement grid: dx=12mm, dy=12mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.227 W/kg

Configuration/Bluetooth_BDR_DH5_CH0_Rear 0mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.80 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.616 W/kg


SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.078 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 39.8%

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.426 W/kg

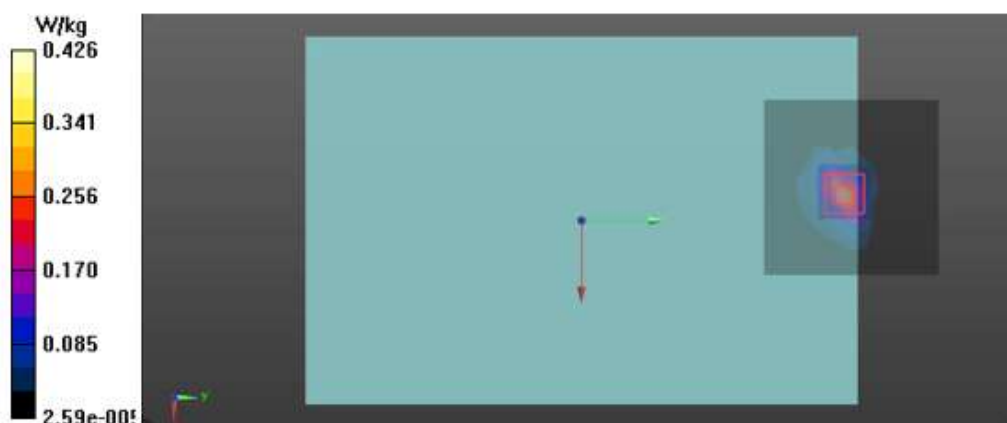

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIA002-004/4

KP21-06543

10)

Date: 12/15/2021

Test Laboratory: KCTL Inc.

File Name: [4.WLAN 2.4 GHz_Tablet.da53:1](#)

DUT: NP930QED, Type: Tablet, Serial: 5B0Q9FMRA00004B

Communication System: UID 0, 2.4GWLAN (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.864$ S/m; $\epsilon_r = 38.165$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697;ConvF(7.11, 7.11, 7.11) @ 2462 MHz; Calibrated: 3/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 6/2/2021
- Phantom: Front_Left_ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration 2/802.11 b_Main_CH11_Left_0 mm/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.649 W/kg

Configuration 2/802.11 b_Main_CH11_Left_0 mm/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=5mm

Reference Value = 18.18 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.426 W/kg; SAR(10 g) = 0.141 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 30.9%

Maximum value of SAR (measured) = 0.907 W/kg

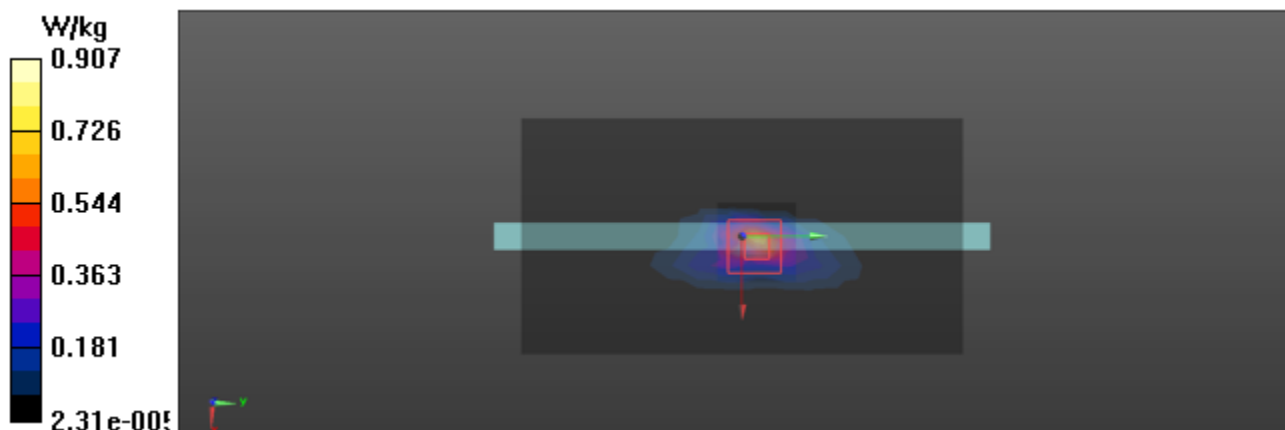

11)

Date: 12/15/2021

Test Laboratory: KCTL Inc.

File Name: [4.WLAN 2.4 GHz_Tablet.da53:1](#)

DUT: NP930QED, Type: Tablet, Serial: 5B0Q9FMRA00004B

Communication System: UID 0, 2.4G WLAN (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.809 \text{ S/m}$; $\epsilon_r = 38.379$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.11, 7.11, 7.11) @ 2412 MHz; Calibrated: 3/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 6/2/2021
- Phantom: Front_Left_ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration 2/802.11 b_Aux_CH1_Right_0 mm/Area Scan (9x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.834 W/kg

Configuration 2/802.11 b_Aux_CH1_Right_0 mm/Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.26 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 1.91 W/kg

SAR(1 g) = 0.598 W/kg; SAR(10 g) = 0.215 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 33.3%

Maximum value of SAR (measured) = 1.24 W/kg

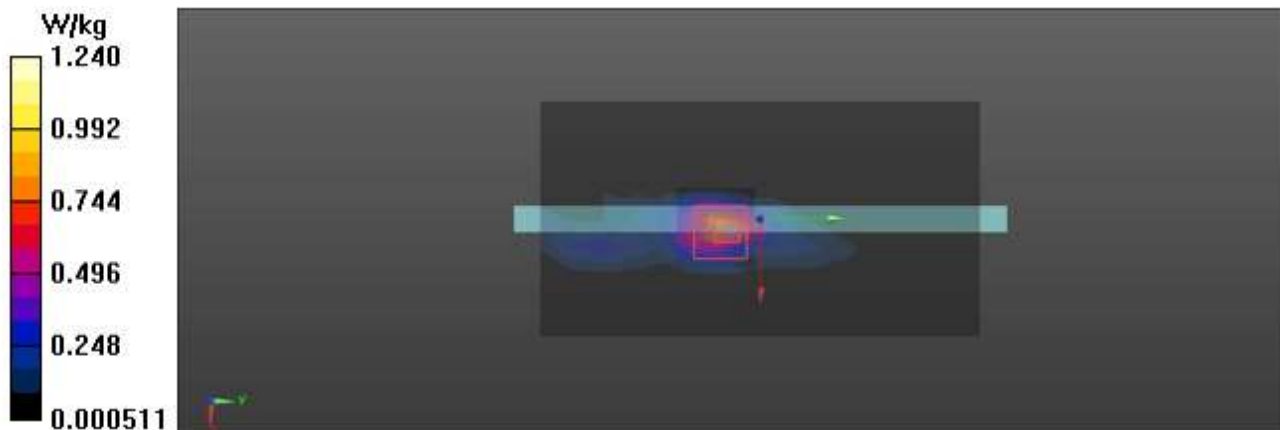

12)

Date: 12/17/2021

Test Laboratory: KCTL Inc.

File Name: [1.WLAN 5.3GHz_Tablet.da53:1](#)

DUT: NP930QED, Type: Tablet, Serial: 5B0Q9FMRA00004B

Communication System: UID 0, 5G WLAN (0); Frequency: 5290 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5290$ MHz; $\sigma = 4.846$ S/m; $\epsilon_r = 35.225$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.62, 4.62, 4.62) @ 5290 MHz; Calibrated: 3/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 6/2/2021
- Phantom: Front_Left_ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration 2/802.11 ac_VHT80_Main_CH58_Left_0 mm/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.91 W/kg

Configuration 2/802.11 ac_VHT80_Main_CH58_Left_0 mm/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 19.92 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 3.72 W/kg


SAR(1 g) = 0.672 W/kg; SAR(10 g) = 0.155 W/kg

Smallest distance from peaks to all points 3 dB below = 4.7 mm

Ratio of SAR at M2 to SAR at M1 = 59.4%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.01 W/kg

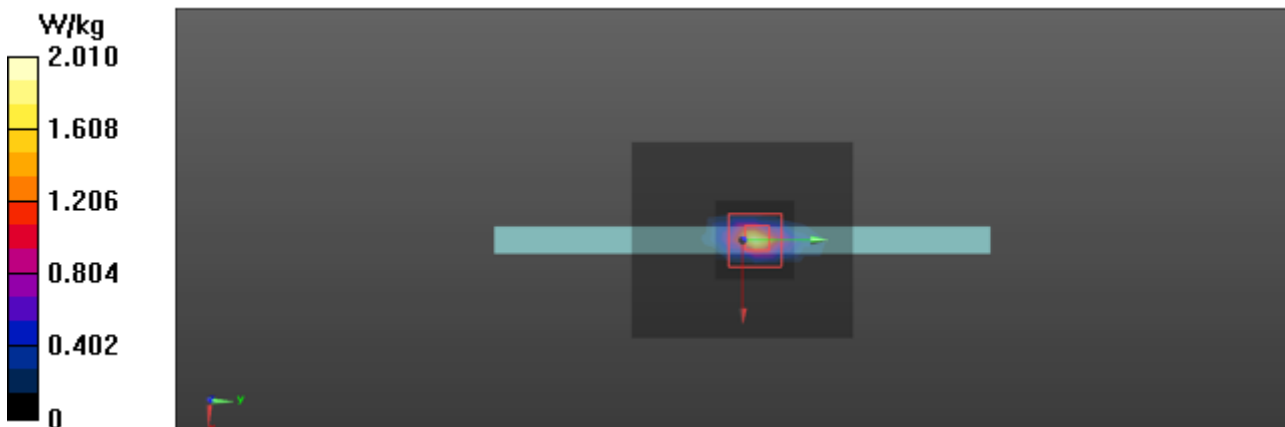

13)

Date: 12/17/2021

Test Laboratory: KCTL Inc.

File Name: [1.WLAN 5.3GHz Tablet.da53:1](#)

DUT: NP930QED, Type: Tablet, Serial: 5B0Q9FMRA00004B

Communication System: UID 0, 5G WLAN (0); Frequency: 5290 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5290 \text{ MHz}$; $\sigma = 4.846 \text{ S/m}$; $\epsilon_r = 35.225$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.62, 4.62, 4.62) @ 5290 MHz; Calibrated: 3/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 6/2/2021
- Phantom: Front_Left_ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration 2/802.11 ac_VHT80_Aux_CH58_Right_0 mm/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.22 W/kg

Configuration 2/802.11 ac_VHT80_Aux_CH58_Right_0 mm/Zoom Scan (10x10x7)/Cube 0:

Measurement grid: $dx=3\text{mm}$, $dy=3\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 25.15 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 4.89 W/kg


SAR(1 g) = 0.967 W/kg; SAR(10 g) = 0.238 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 62.9%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.71 W/kg

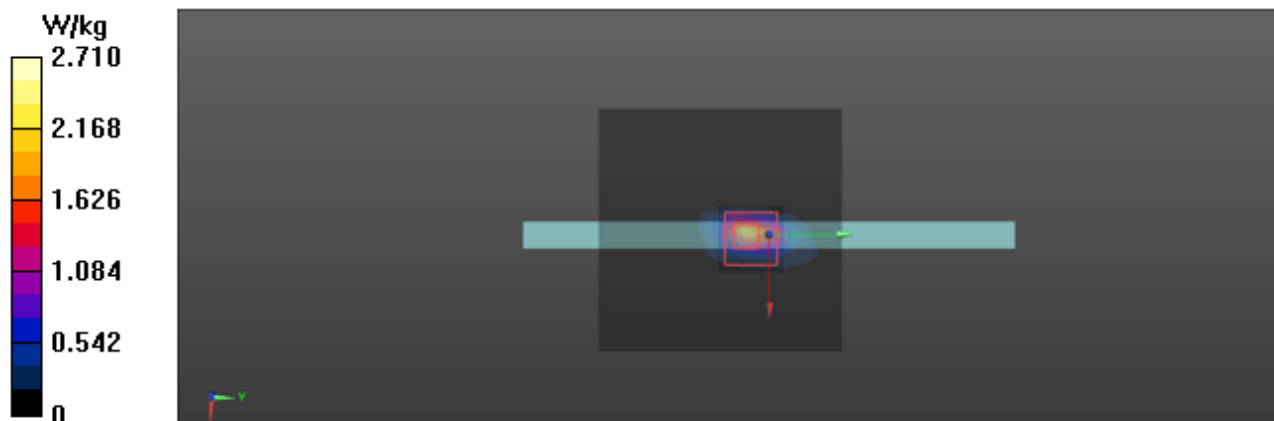

14)

Date: 12/18/2021

Test Laboratory: KCTL Inc.

File Name: [1.WLAN 5.6GHz Tablet.da53:1](#)

DUT: NP930QED, Type: Tablet, Serial: 5B0Q9FMRA00004B

Communication System: UID 0, 5GWLAN (0); Frequency: 5530 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5530$ MHz; $\sigma = 4.984$ S/m; $\epsilon_r = 34.904$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.48, 4.48, 4.48) @ 5530 MHz; Calibrated: 3/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 6/2/2021
- Phantom: Front_Left_ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration 2/802.11 ac_VHT80_Main_CH106_Left_0 mm/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.31 W/kg

Configuration 2/802.11 ac_VHT80_Main_CH106_Left_0 mm/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 18.17 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 3.14 W/kg


SAR(1 g) = 0.558 W/kg; SAR(10 g) = 0.128 W/kg

Smallest distance from peaks to all points 3 dB below = 4 mm

Ratio of SAR at M2 to SAR at M1 = 59.8%

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.61 W/kg

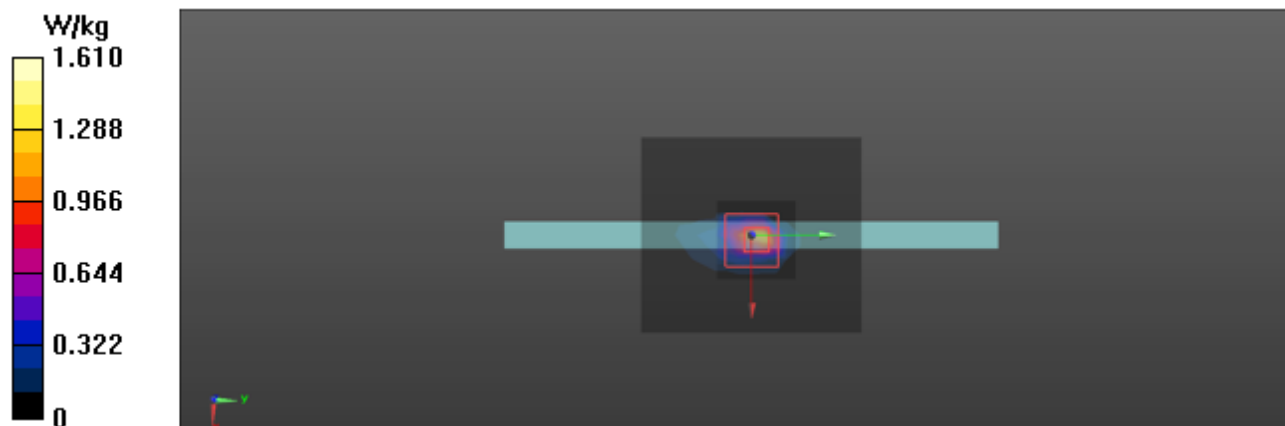

15)

Date: 12/18/2021

Test Laboratory: KCTL Inc.

File Name: [1.WLAN 5.6GHz Tablet.da53:1](#)

DUT: NP930QED, Type: Tablet, Serial: 5B0Q9FMRA00004B

Communication System: UID 0, 5G WLAN (0); Frequency: 5690 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5690$ MHz; $\sigma = 5.155$ S/m; $\epsilon_r = 34.61$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.35, 4.35, 4.35) @ 5690 MHz; Calibrated: 3/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 6/2/2021
- Phantom: Front_Left_ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration 2/802.11 ac_VHT80_Aux_CH138_Right_0 mm Repeated/Area Scan (9x10x1):
 Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 3.06 W/kg

Configuration 2/802.11 ac_VHT80_Aux_CH138_Right_0 mm Repeated/Zoom Scan (9x9x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 25.41 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 7.27 W/kg


SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.240 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 58%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 3.67 W/kg

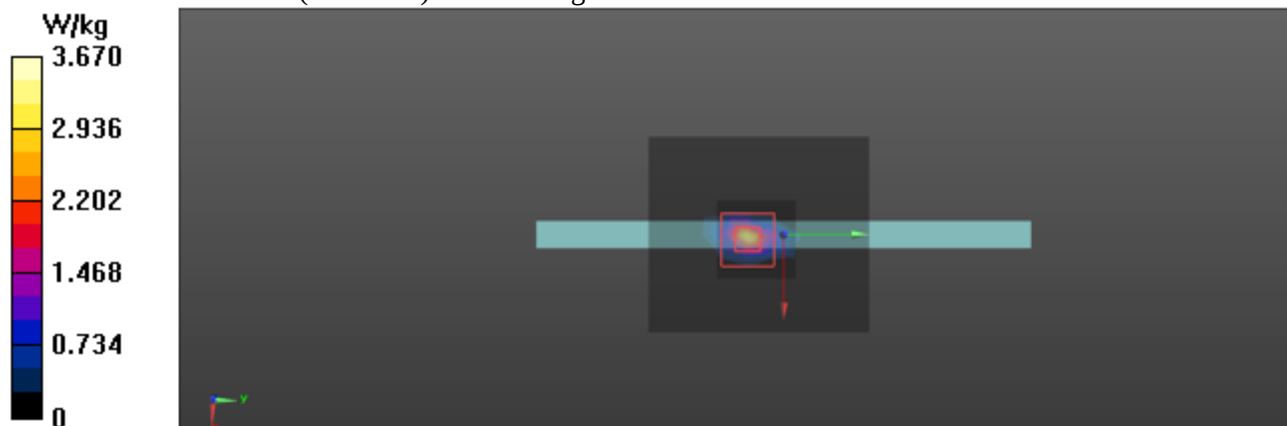

16)

Date: 12/17/2021

Test Laboratory: KCTL Inc.

File Name: [2.WLAN 5.8GHz Tablet.da53:1](#)

DUT: NP930QED, Type: Tablet, Serial: 5B0Q9FMRA00004B

Communication System: UID 0, 5GWLAN (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.295$ S/m; $\epsilon_r = 34.489$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.4, 4.4, 4.4) @ 5775 MHz; Calibrated: 3/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 6/2/2021
- Phantom: Front_Left_ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration 2/802.11 ac_VHT80_Main_CH155_Left_0 mm/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.07 W/kg

Configuration 2/802.11 ac_VHT80_Main_CH155_Left_0 mm/Zoom Scan (10x10x7)/Cube 0:

Measurement grid: dx=3mm, dy=3mm, dz=1.4mm

Reference Value = 16.27 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 2.18 W/kg

SAR(1 g) = 0.395 W/kg; SAR(10 g) = 0.091 W/kg

Smallest distance from peaks to all points 3 dB below = 4.6 mm

Ratio of SAR at M2 to SAR at M1 = 58.4%

Maximum value of SAR (measured) = 1.14 W/kg

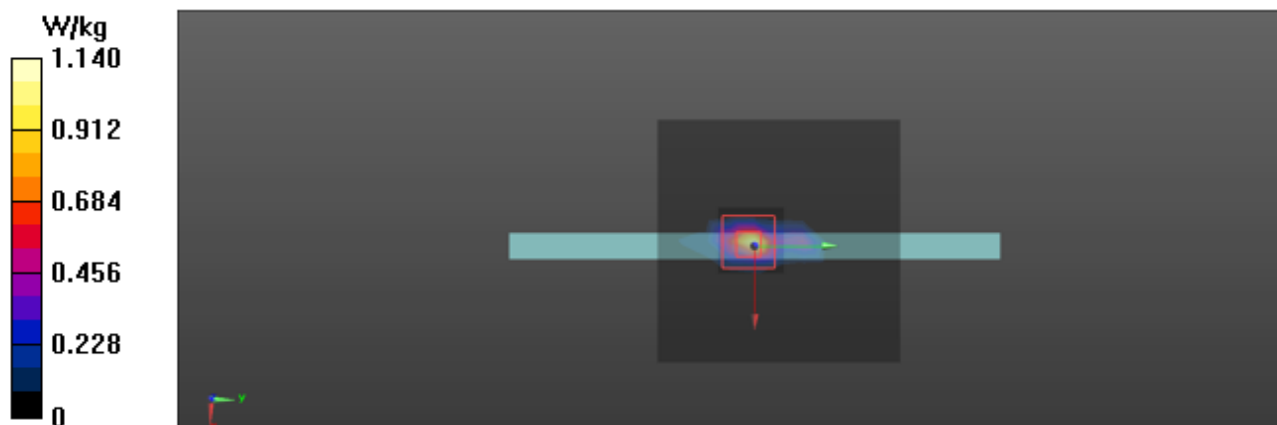

17)

Date: 12/17/2021

Test Laboratory: KCTL Inc.

File Name: [2.WLAN 5.8GHz_Tablet.da53:1](#)

DUT: NP930QED, Type: Tablet, Serial: 5B0Q9FMRA00004B

Communication System: UID 0, 5G WLAN (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.295$ S/m; $\epsilon_r = 34.489$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.4, 4.4, 4.4) @ 5775 MHz; Calibrated: 3/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 6/2/2021
- Phantom: Front_Left_ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration 2/802.11 ac_VHT80_Aux_CH155_Right_0 mm/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.52 W/kg

Configuration 2/802.11 ac_VHT80_Aux_CH155_Right_0 mm/Zoom Scan (10x10x7)/Cube 0:

Measurement grid: dx=3mm, dy=3mm, dz=1.4mm

Reference Value = 27.99 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 6.79 W/kg

SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.247 W/kg

Smallest distance from peaks to all points 3 dB below = 4.6 mm

Ratio of SAR at M2 to SAR at M1 = 58.1%

Maximum value of SAR (measured) = 3.56 W/kg

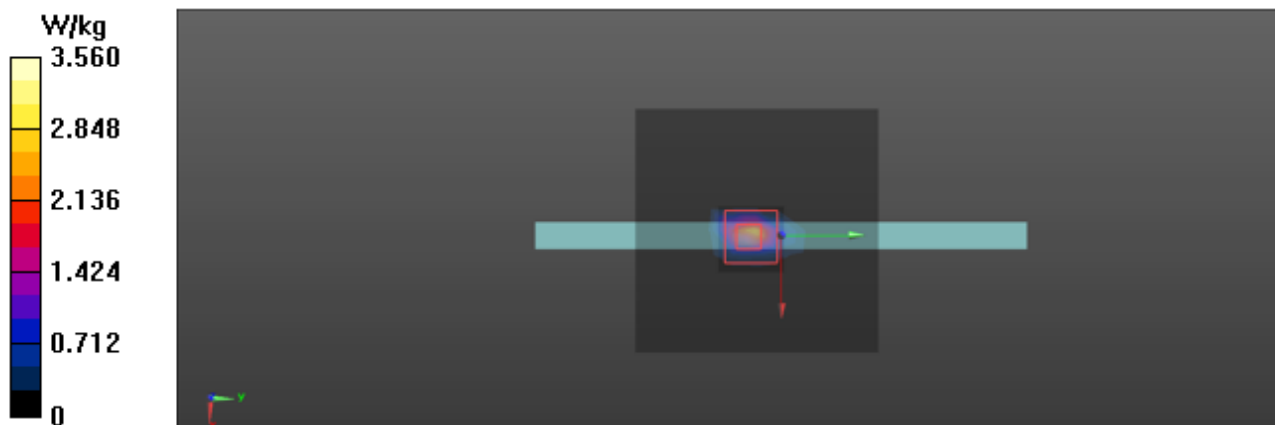

18)

Date: 12/6/2021

Test Laboratory: KCTL Inc.

File Name: [2. Bluetooth BDR DH5 Tablet.da53:1](#)

DUT: NP930QED, Type: Tablet, Serial: 5B0Q9FMRA00003P

Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.30167
 Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.768$ S/m; $\epsilon_r = 39.622$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540; ConvF(7.45, 7.45, 7.45) @ 2402 MHz; ; Calibrated: 4/29/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1587; Calibrated: 7/26/2021
- Phantom: ELI V8.0 Left; Type: QD OVA 004 AA; Serial: 2098
- Measurement SW: DASY52, Version 52.10 (4);

Configuration 2/Bluetooth_BDR_DH5_CH0_Right 0mm/Area Scan (9x11x1): Measurement grid:
 dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.276 W/kg

Configuration 2/Bluetooth_BDR_DH5_CH0_Right 0mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid:
 dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.77 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.454 W/kg


SAR(1 g) = 0.138 W/kg; SAR(10 g) = 0.047 W/kg

Smallest distance from peaks to all points 3 dB below = 5 mm

Ratio of SAR at M2 to SAR at M1 = 32.4%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.298 W/kg

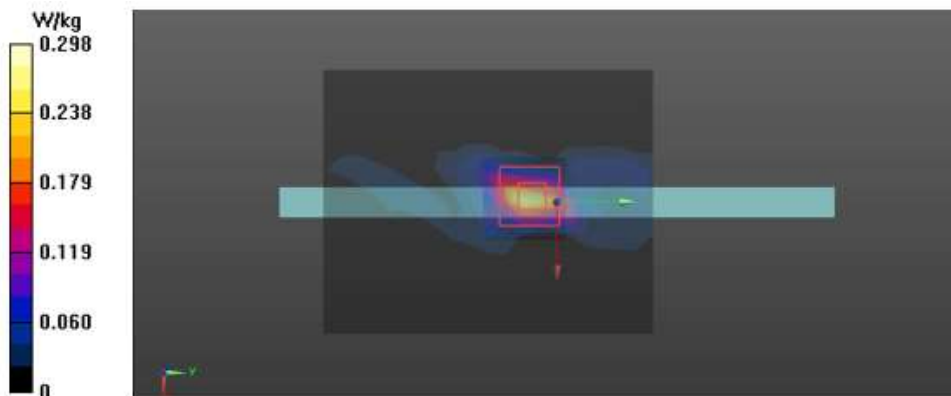

19)

KCTL Inc.

Measurement Report for NP930QED, BACK, Custom Band 802.11 ax, UID 10755 AAC, Channel 15 (6025.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP930QED, SAMSUNG	303.0 x 202.0 x 11.0	5B0Q9FMRA00005M	Laptop + Main Antenna

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 0.00	Custom Band	CW, 10755-AAC	6025.0, 15	5.45	5.49	34.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000, 2021-Dec-07	EX3DV4 - SN7540, 2021-04-29	DAE4 Sn1587, 2021-07-26

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 102.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	2.7 x 2.7 x 1.2
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.2
MAIA	Y	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2021-12-07	2021-12-07
psSAR1g [W/kg]	0.775	0.897
psSAR10g [W/kg]	0.226	0.250
psPDab (1.0cm2, sq) [W/m2]		8.97
psPDab (4.0cm2, sq) [W/m2]		5.79
Power Drift [dB]		-0.19
M2/M1 [%]		55.2
Dist 3dB Peak [mm]		3.8

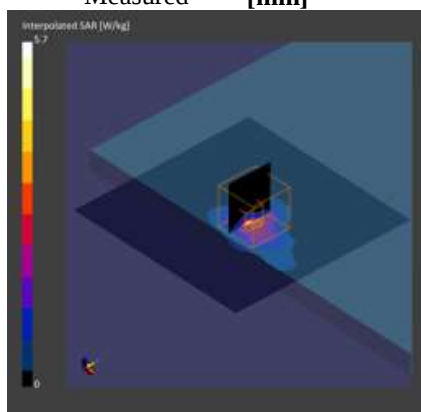

20)

KCTL Inc.

Measurement Report for NP930QED, BACK, Custom Band 802.11 ax, UID 10755 AAC, Channel 15 (6025.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP930QED, SAMSUNG	303.0 x 202.0 x 11.0	5B0Q9FMRA00005M	Laptop + Aux Antenna

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 0.00	Custom Band	CW, 10755-AAC	6025.0, 15	5.45	5.49	34.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000, 2021-Dec-07	EX3DV4 - SN7540, 2021-04-29	DAE4 Sn1587, 2021-07-26

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 102.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2021-12-07	2021-12-07
psSAR1g [W/kg]	0.653	0.874
psSAR10g [W/kg]	0.183	0.204
psPDab (1.0cm2, sq) [W/m2]		8.74
psPDab (4.0cm2, sq) [W/m2]		4.85
Power Drift [dB]		-0.05
M2/M1 [%]		53.3
Dist 3dB Peak [mm]		4.1

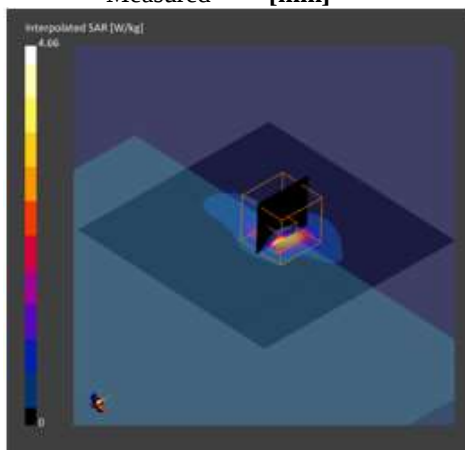

21)

KCTL Inc.

Measurement Report for NP930QED, BACK, Custom Band 802.11 ax, UID 10755 AAC, Channel 111 (6505.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP930QED, SAMSUNG	303.0 x 202.0 x 11.0	5B0Q9FMRA00005M	Laptop + Main Antenna

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 0.00	Custom Band	CW, 10755-AAC	6505.0, 111	5.45	6.04	34.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000, 2021-Dec-07	EX3DV4 - SN7540, 2021-04-29	DAE4 Sn1587, 2021-07-26

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 102.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading	1.5	1.4
Ratio		
MAIA	Y	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2021-12-07	2021-12-07
psSAR1g [W/kg]	0.543	0.654
psSAR10g [W/kg]	0.195	0.211
psPDab (1.0cm2, sq) [W/m2]		6.54
psPDab (4.0cm2, sq) [W/m2]		4.83
Power Drift [dB]		0.06
M2/M1 [%]		50.3
Dist 3dB Peak [mm]		5.3

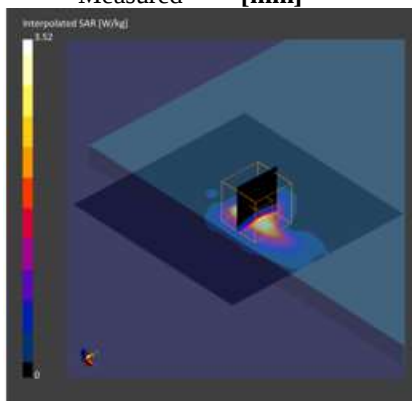

22)

KCTL Inc.

Measurement Report for NP930QED, BACK, Custom Band 802.11 ax, UID 10755 AAC, Channel 111 (6505.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP930QED, SAMSUNG	303.0 x 202.0 x 11.0	5B0Q9FMRA00005M	Laptop + Aux Antenna

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 0.00	Custom Band	CW, 10755-AAC	6505.0, 111	5.45	6.04	34.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000, 2021-Dec-07	EX3DV4 - SN7540, 2021-04-29	DAE4 Sn1587, 2021-07-26

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 102.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading	1.5	1.4
Ratio		
MAIA	Y	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2021-12-07	2021-12-07
psSAR1g [W/kg]	0.509	0.758
psSAR10g [W/kg]	0.130	0.164
psPDab (1.0cm2, sq) [W/m2]		7.58
psPDab (4.0cm2, sq) [W/m2]		3.98
Power Drift [dB]		0.03
M2/M1 [%]		49.1
Dist 3dB Peak [mm]		3.4

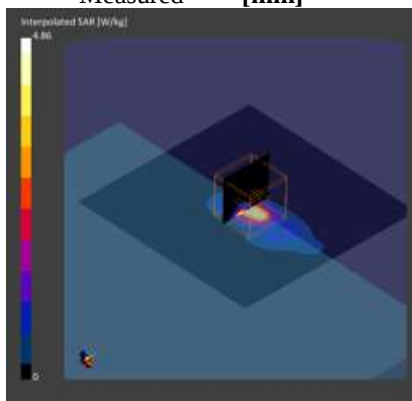

23)

KCTL Inc.

Measurement Report for NP930QED, BACK, Custom Band 802.11 ax, UID 10755 AAC, Channel 143 (6665.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP930QED, SAMSUNG	303.0 x 202.0 x 11.0	5B0Q9FMRA00005M	Laptop + Main Antenna

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 0.00	Custom Band	CW, 10755-AAC	6665.0, 143	5.45	6.18	33.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000, 2021-Dec-07	EX3DV4 - SN7540, 2021-04-29	DAE4 Sn1587, 2021-07-26

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 102.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading	1.5	1.4
Ratio		
MAIA	Y	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2021-12-07	2021-12-07
psSAR1g [W/kg]	0.733	0.901
psSAR10g [W/kg]	0.245	0.266
psPDab (1.0cm2, sq) [W/m2]		9.01
psPDab (4.0cm2, sq) [W/m2]		6.14
Power Drift [dB]		-0.14
M2/M1 [%]		49.7
Dist 3dB Peak [mm]		4.6

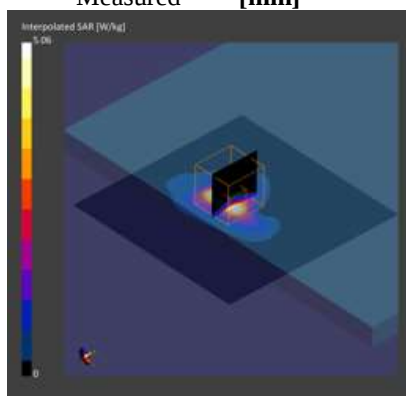

24)

KCTL Inc.

Measurement Report for NP930QED, BACK, Custom Band 802.11 ax, UID 10755 AAC, Channel 143 (6665.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP930QED, SAMSUNG	303.0 x 202.0 x 11.0	5B0Q9FMRA00005M	Laptop + Aux Antenna

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 0.00	Custom Band	CW, 10755-AAC	6665.0, 143	5.45	6.18	33.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000, 2021-Dec-07	EX3DV4 - SN7540, 2021-04-29	DAE4 Sn1587, 2021-07-26

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 102.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2021-12-07	2021-12-07
psSAR1g [W/kg]	0.633	0.807
psSAR10g [W/kg]	0.158	0.193
psPDab (1.0cm2, sq) [W/m2]		8.07
psPDab (4.0cm2, sq) [W/m2]		4.59
Power Drift [dB]		-0.02
M2/M1 [%]		49.7
Dist 3dB Peak [mm]		3.7

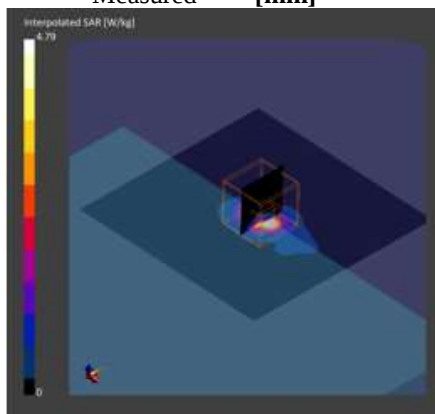

25)

KCTL Inc.

Measurement Report for NP930QED, BACK, Custom Band 802.11 ax, UID 10755 AAC, Channel 207 (6985.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP930QED, SAMSUNG	303.0 x 202.0 x 11.0	5B0Q9FMRA00005M	Laptop + Main Antenna

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 0.00	Custom Band	CW, 10755-AAC	6985.0, 207	5.45	6.43	33.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000, 2021-Dec-07	EX3DV4 - SN7540, 2021-04-29	DAE4 Sn1587, 2021-07-26

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 102.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading	1.5	1.4
Ratio		
MAIA	Y	Y
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2021-12-07	2021-12-07
psSAR1g [W/kg]	0.391	0.469
psSAR10g [W/kg]	0.127	0.127
psPDab (1.0cm2, sq) [W/m2]		4.69
psPDab (4.0cm2, sq) [W/m2]		2.94
Power Drift [dB]		-0.04
M2/M1 [%]		48.3
Dist 3dB Peak [mm]		4.1

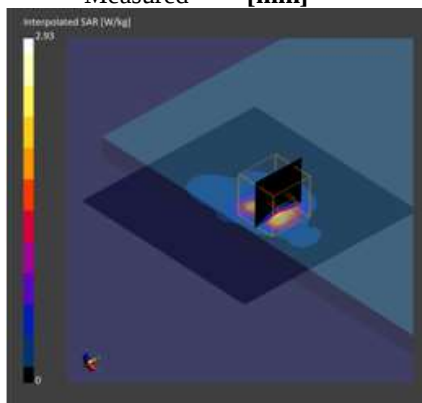

26)

KCTL Inc.

Measurement Report for NP930QED, BACK, Custom Band 802.11 ax, UID 10755 AAC, Channel 207 (6985.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP930QED, SAMSUNG	303.0 x 202.0 x 11.0	5B0Q9FMRA00005M	Laptop + Aux Antenna

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 0.00	Custom Band	CW, 10755-AAC	6985.0, 207	5.45	6.43	33.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000, 2021-Dec-07	EX3DV4 - SN7540, 2021-04-29	DAE4 Sn1587, 2021-07-26

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 102.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading	1.5	1.4
Ratio		
MAIA	Y	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2021-12-07	2021-12-07
psSAR1g [W/kg]	0.487	0.529
psSAR10g [W/kg]	0.132	0.128
psPDab (1.0cm2, sq) [W/m2]		5.29
psPDab (4.0cm2, sq) [W/m2]		3.05
Power Drift [dB]		0.13
M2/M1 [%]		45.1
Dist 3dB Peak [mm]		4.4

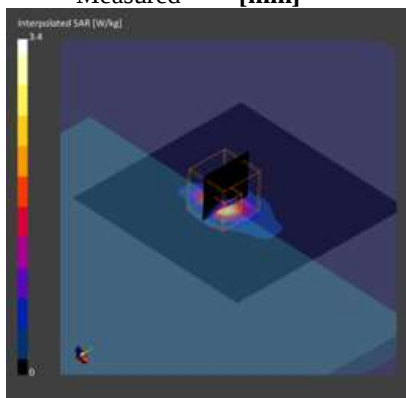

27)

KCTL Inc.

Measurement Report for NP930QED, EDGE LEFT, Custom Band 802.11 ax, UID 10755 AAC, Channel 47 (6185.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP930QED, SAMSUNG	202.0 x 303.0 x 11.0	5B0Q9FMRA00005M	Laptop + Main Antenna

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE LEFT, 0.00	Custom Band	CW, 10755-AAC	6185.0, 47	5.45	5.59	35.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000, 2021-Dec-08	EX3DV4 - SN7540, 2021-04-29	DAE4 Sn1587, 2021-07-26

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 102.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.2
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.2
MAIA	Y	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2021-12-08	2021-12-08
psSAR1g [W/kg]	0.367	0.409
psSAR10g [W/kg]	0.082	0.088
psPDab (1.0cm2, sq) [W/m2]		4.09
psPDab (4.0cm2, sq) [W/m2]		2.11
Power Drift [dB]		-0.02
M2/M1 [%]		55.9
Dist 3dB Peak [mm]		4.1

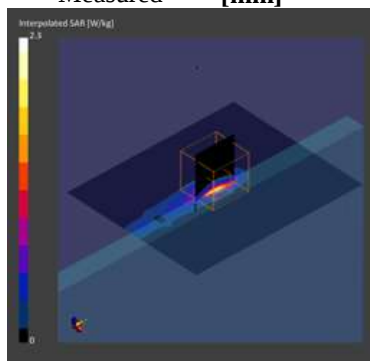

28)

KCTL Inc.

Measurement Report for NP930QED, EDGE Right, Custom Band 802.11 ax, UID 10755 AAC, Channel 15 (6025.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP930QED, SAMSUNG	202.0 x 303.0 x 11.0	5B0Q9FMRA00005M	Laptop + Aux Antenna

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE Right, 0.00	Custom Band	CW, 10755-AAC	6025.0, 15	5.45	5.46	35.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000, 2021-Dec-08	EX3DV4 - SN7540, 2021-04-29	DAE4 Sn1587, 2021-07-26

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 102.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.1 x 3.1 x 1.2
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.2
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2021-12-08	2021-12-08
psSAR1g [W/kg]	0.658	0.719
psSAR10g [W/kg]	0.146	0.155
psPDab (1.0cm2, sq) [W/m2]		7.19
psPDab (4.0cm2, sq) [W/m2]		3.70
Power Drift [dB]		0.01
M2/M1 [%]		58.8
Dist 3dB Peak [mm]		4.2

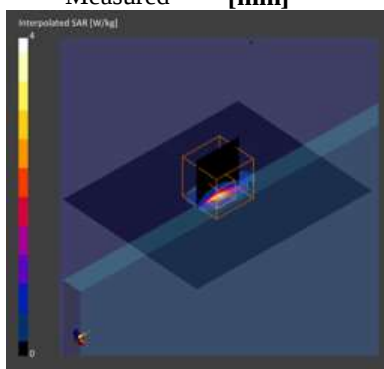

29)

KCTL Inc.

Measurement Report for NP930QED, EDGE LEFT, Custom Band 802.11 ax, UID 10755 AAC, Channel 111 (6505.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP930QED, SAMSUNG	202.0 x 303.0 x 11.0	5B0Q9FMRA00005M	Laptop + Main Antenna

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE LEFT, 0.00	Custom Band	CW, 10755-AAC	6505.0, 111	5.45	5.98	34.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000, 2021-Dec-08	EX3DV4 - SN7540, 2021-04-29	DAE4 Sn1587, 2021-07-26

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 102.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.2
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.2
MAIA	Y	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2021-12-08	2021-12-08
psSAR1g [W/kg]	0.361	0.420
psSAR10g [W/kg]	0.082	0.088
psPDab (1.0cm2, sq) [W/m2]		4.20
psPDab (4.0cm2, sq) [W/m2]		2.11
Power Drift [dB]		-0.15
M2/M1 [%]		51.2
Dist 3dB Peak [mm]		4.1

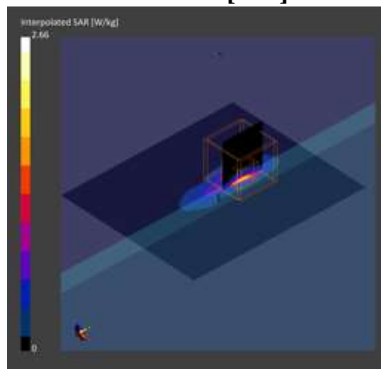

30)

KCTL Inc.

Measurement Report for NP930QED, EDGE Right, Custom Band 802.11 ax, UID 10755 AAC, Channel 111 (6505.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP930QED, SAMSUNG	202.0 x 303.0 x 11.0	5B0Q9FMRA00005M	Laptop + Aux Antenna

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE Right, 0.00	Custom Band	CW, 10755-AAC	6505.0, 111	5.45	5.98	34.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000, 2021-Dec-08	EX3DV4 - SN7540, 2021-04-29	DAE4 Sn1587, 2021-07-26

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 102.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.2
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.2
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2021-12-08	2021-12-08
psSAR1g [W/kg]	0.162	0.182
psSAR10g [W/kg]	0.038	0.040
psPDab (1.0cm2, sq) [W/m2]		1.82
psPDab (4.0cm2, sq) [W/m2]		0.941
Power Drift [dB]		-0.12
M2/M1 [%]		54.3
Dist 3dB Peak [mm]		4.0

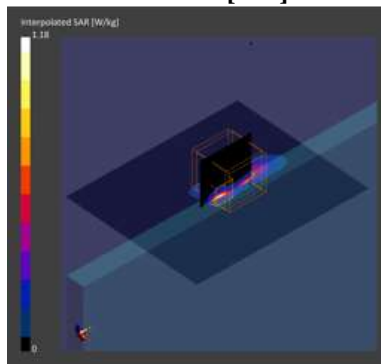

31)

KCTL Inc.

Measurement Report for NP930QED, EDGE LEFT, Custom Band 802.11 ax, UID 10755 AAC, Channel 143 (6665.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP930QED, SAMSUNG	202.0 x 303.0 x 11.0	5B0Q9FMRA00005M	Laptop + Main Antenna

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE LEFT, 0.00	Custom Band	CW, 10755-AAC	6665.0, 143	5.45	6.22	34.3

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000, 2021-Dec-08	EX3DV4 - SN7540, 2021-04-29	DAE4 Sn1587, 2021-07-26

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 102.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.2
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.2
MAIA	Y	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2021-12-08	2021-12-08
psSAR1g [W/kg]	0.362	0.436
psSAR10g [W/kg]	0.084	0.091
psPDab (1.0cm2, sq) [W/m2]		4.36
psPDab (4.0cm2, sq) [W/m2]		2.20
Power Drift [dB]		0.03
M2/M1 [%]		50.8
Dist 3dB Peak [mm]		4.1

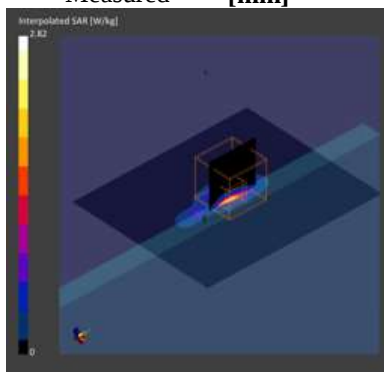

32)

KCTL Inc.

Measurement Report for NP930QED, EDGE Right, Custom Band 802.11 ax, UID 10755 AAC, Channel 175 (6825.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP930QED, SAMSUNG	202.0 x 303.0 x 11.0	5B0Q9FMRA00005M	Laptop + Aux Antenna

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE Right, 0.00	Custom Band	CW, 10755-AAC	6825.0, 175	5.45	6.41	34.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000, 2021-Dec-08	EX3DV4 - SN7540, 2021-04-29	DAE4 Sn1587, 2021-07-26

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 102.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.1 x 3.1 x 1.2
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.2
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2021-12-08	2021-12-08
psSAR1g [W/kg]	0.165	0.225
psSAR10g [W/kg]	0.039	0.041
psPDab (1.0cm2, sq) [W/m2]		2.25
psPDab (4.0cm2, sq) [W/m2]		1.01
Power Drift [dB]		0.09
M2/M1 [%]		51.3
Dist 3dB Peak [mm]		3.7

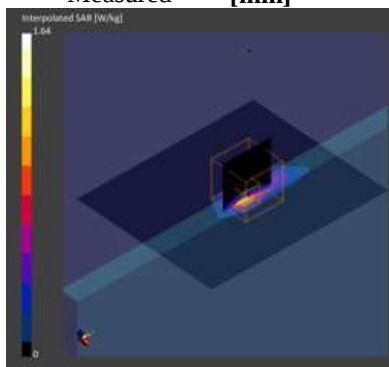

33)

KCTL Inc.

Measurement Report for NP930QED, EDGE LEFT, Custom Band 802.11 ax, UID 10755 AAC, Channel 207 (6985.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP930QED, SAMSUNG	202.0 x 303.0 x 11.0	5B0Q9FMRA00005M	Laptop + Main Antenna

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE LEFT, 0.00	Custom Band	CW, 10755-AAC	6985.0, 207	5.45	6.51	34.3

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000, 2021-Dec-08	EX3DV4 - SN7540, 2021-04-29	DAE4 Sn1587, 2021-07-26

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 102.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.2
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading	1.5	1.2
Ratio		
MAIA	Y	Y
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2021-12-08	2021-12-08
psSAR1g [W/kg]	0.118	0.127
psSAR10g [W/kg]	0.032	0.032
psPDab (1.0cm2, sq) [W/m2]		1.27
psPDab (4.0cm2, sq) [W/m2]		0.751
Power Drift [dB]		0.05
M2/M1 [%]		43.1
Dist 3dB Peak [mm]		4.0

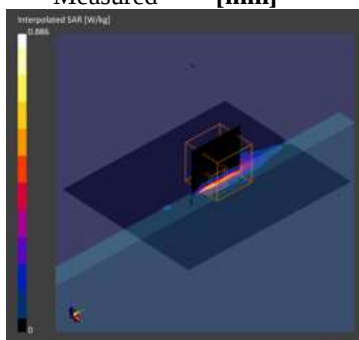

34)

KCTL Inc.

Measurement Report for NP930QED, EDGE Right, Custom Band 802.11 ax, UID 10755 AAC, Channel 207 (6985.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP930QED, SAMSUNG	202.0 x 303.0 x 11.0	5B0Q9FMRA00005M	Laptop + Aux Antenna

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE Right, 0.00	Custom Band	CW, 10755-AAC	6985.0, 207	5.45	6.51	34.3

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000, 2021-Dec-08	EX3DV4 - SN7540, 2021-04-29	DAE4 Sn1587, 2021-07-26

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 102.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.2
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.2
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2021-12-08	2021-12-08
psSAR1g [W/kg]	0.265	0.284
psSAR10g [W/kg]	0.055	0.052
psPDab (1.0cm2, sq) [W/m2]		2.84
psPDab (4.0cm2, sq) [W/m2]		1.26
Power Drift [dB]		-0.13
M2/M1 [%]		48.8
Dist 3dB Peak [mm]		4.1

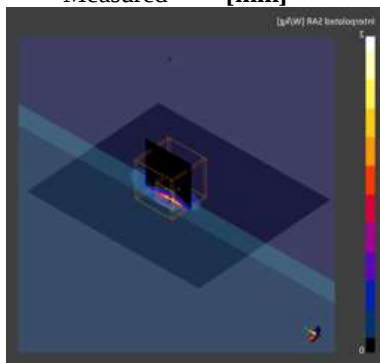

15.2 PD Test System Verification and Test Results

KCTL Inc.

Measurement Report for 10 GHz Verification Source, FRONT, Validation band, UID 0 -, Channel 10000 (10000.0MHz)

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
10 GHz Verification Source, Speag	100.0 x 172.0 x 100.0	1023	Validation Dipole

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor
5G	FRONT, 10.00	10000.0, 10000	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air	EUmmWV4 - SN9489_F1-55GHz, 2021-05-28	DAE4 Sn1587, 2021-07-26

Scans Setup

Measurement Results

Scan Type	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	10.0
MAIA	N/A

Scan Type	5G Scan
Date	2021-12-09
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	5.99
psPDtot+ [W/m ²]	6.02
E _{max} [V/m]	51.2
Power Drift [dB]	0.06

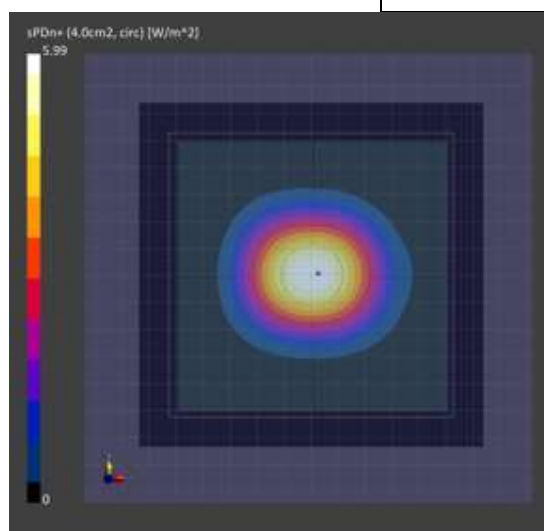

KCTL Inc.

Measurement Report for 10 GHz Verification Source, FRONT, Validation band, UID 0 -, Channel 10000 (10000.0MHz)

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
10 GHz Verification Source, Speag	100.0 x 172.0 x 100.0	1023	Validation Dipole

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor
5G	FRONT, 10.00	10000.0, 10000	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air	EUmmWV4 - SN9489_F1-55GHz, 2021-05-28	DAE4 Sn1587, 2021-07-26

Scans Setup

Measurement Results

Scan Type	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	10.0
MAIA	N/A

Scan Type	5G Scan
Date	2021-12-10
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	5.76
psPDtot+ [W/m ²]	5.79
E _{max} [V/m]	49.9
Power Drift [dB]	-0.14

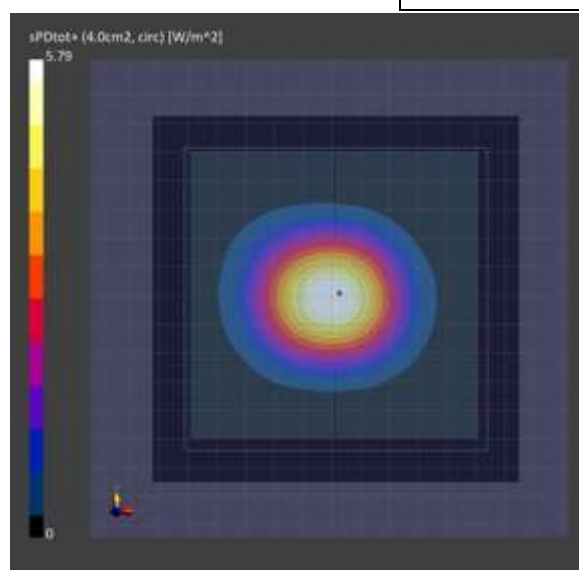

KCTL Inc.

Measurement Report for 10 GHz Verification Source, FRONT, Validation band, UID 0 -, Channel 10000 (10000.0MHz)

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
10 GHz Verification Source, Speag	100.0 x 172.0 x 100.0	1023	Validation Dipole

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor
5G	FRONT, 10.00	10000.0, 10000	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air	EUmmWV4 - SN9489_F1-55GHz, 2021-05-28	DAE4 Sn1587, 2021-07-26

Scans Setup

Measurement Results

Scan Type	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	10.0
MAIA	N/A

Scan Type	5G Scan
Date	2021-12-13
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	5.76
psPDtot+ [W/m ²]	5.80
E _{max} [V/m]	50.5
Power Drift [dB]	0.06

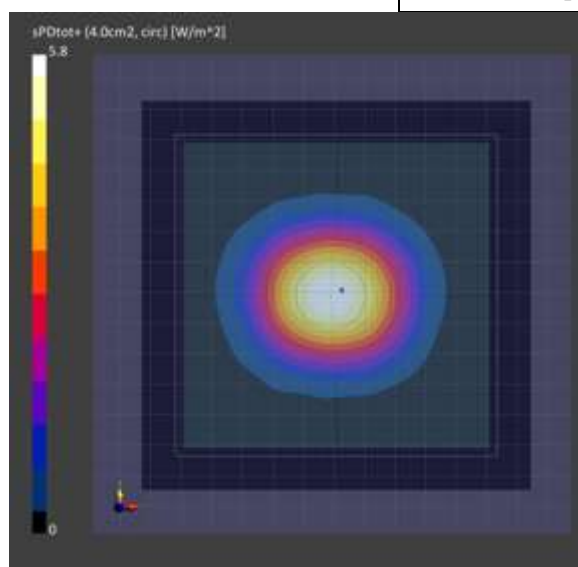

KCTL Inc.

Measurement Report for 10 GHz Verification Source, FRONT, Validation band, UID 0 -, Channel 10000 (10000.0MHz)

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
10 GHz Verification Source, Speag	100.0 x 172.0 x 100.0	1023	Validation Dipole

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor
5G	FRONT, 10.00	10000.0, 10000	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air	EUmmWV4 - SN9489_F1-55GHz, 2021-05-28	DAE4 Sn1587, 2021-07-26

Scans Setup

Measurement Results

Scan Type	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	10.0
MAIA	N/A

Scan Type	5G Scan
Date	2021-12-14
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	5.72
psPDtot+ [W/m ²]	5.78
E _{max} [V/m]	51.5
Power Drift [dB]	-0.12

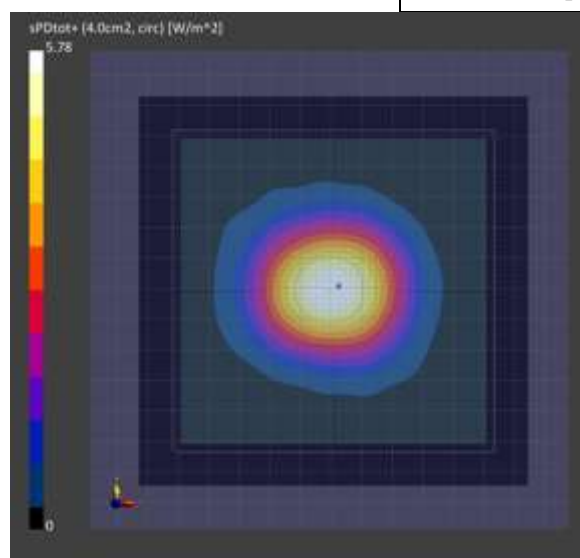

35)

KCTL Inc.

Measurement Report for NP930QED, BACK, Custom Band 802.11 ax, UID 10755 AAC, Channel 15 (6025.0MHz)

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP930QED, SAMSUNG	202.0 x 11.0 x 303.0	5B0Q9FMRA00005M	Laptop + Main Antenna

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor
5G	BACK, 2.00	6025.0, 15	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air	EUmmWV4 - SN9489_F1-55GHz, 2021-05-28	DAE4 Sn1587, 2021-07-26

Scans Setup

Measurement Results

Scan Type	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	N/A

Scan Type	5G Scan
Date	2021-12-09
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	3.07
psPDtot+ [W/m ²]	3.44
E _{max} [V/m]	61.1
Power Drift [dB]	0.05

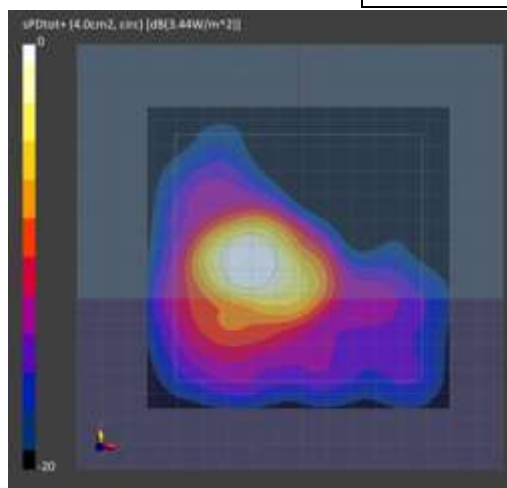

36)

KCTL Inc.

Measurement Report for NP930QED, BACK, Custom Band 802.11 ax, UID 10755 AAC, Channel 111 (6505.0MHz)

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP930QED, SAMSUNG	202.0 x 11.0 x 303.0	5B0Q9FMRA00005M	Laptop + Aux Antenna

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor
5G	BACK, 2.00	6505.0, 111	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air	EUmmWV4 - SN9489_F1-55GHz, 2021-05-28	DAE4 Sn1587, 2021-07-26

Scans Setup

Measurement Results

Scan Type	5G Scan
Grid Extents [mm]	130.0 x 130.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	N/A

Scan Type	5G Scan
Date	2021-12-10
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	1.77
psPDtot+ [W/m ²]	2.14
E _{max} [V/m]	43.9
Power Drift [dB]	-0.00

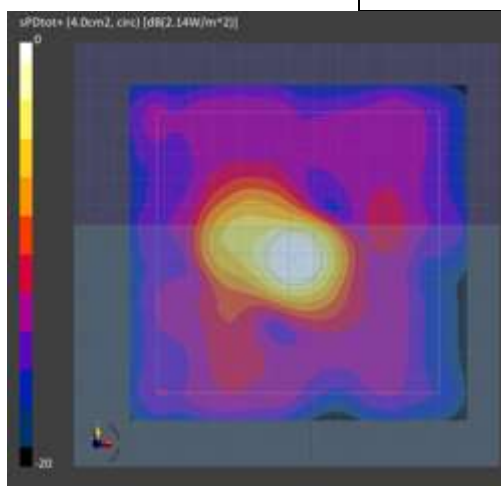

37)

KCTL Inc.

Measurement Report for NP930QED, BACK, Custom Band 802.11 ax, UID 10755 AAC, Channel 143 (6665.0MHz)

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP930QED, SAMSUNG	202.0 x 11.0 x 303.0	5B0Q9FMRA00005M	Laptop + Main Antenna

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor
5G	BACK, 2.00	6665.0, 143	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air	EUmmWV4 - SN9489_F1-55GHz, 2021-05-28	DAE4 Sn1587, 2021-07-26

Scans Setup

Measurement Results

Scan Type	5G Scan
Grid Extents [mm]	130.0 x 130.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	N/A

Scan Type	5G Scan
Date	2021-12-09
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	4.25
psPDtot+ [W/m ²]	5.63
E _{max} [V/m]	79.7
Power Drift [dB]	0.15

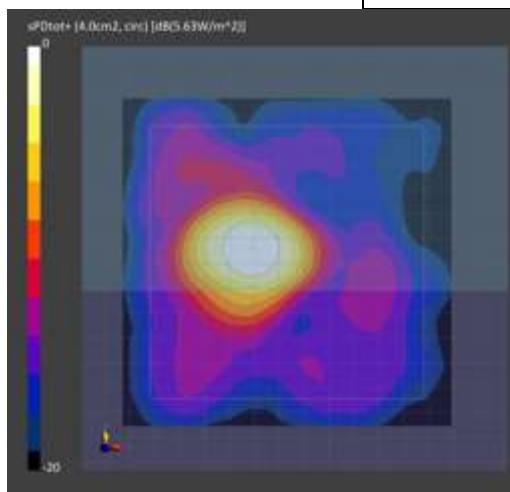

38)

KCTL Inc.

Measurement Report for NP930QED, BACK, Custom Band 802.11 ax, UID 10755 AAC, Channel 207 (6985.0MHz)

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP930QED, SAMSUNG	202.0 x 11.0 x 303.0	5B0Q9FMRA00005M	Laptop + Aux Antenna

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor
5G	BACK, 2.00	6985.0, 207	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air	EUmmWV4 - SN9489_F1-55GHz, 2021-05-28	DAE4 Sn1587, 2021-07-26

Scans Setup

Measurement Results

Scan Type	5G Scan
Grid Extents [mm]	130.0 x 130.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	N/A

Scan Type	5G Scan
Date	2021-12-10
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	2.73
psPDtot+ [W/m ²]	3.16
E _{max} [V/m]	58.5
Power Drift [dB]	0.01

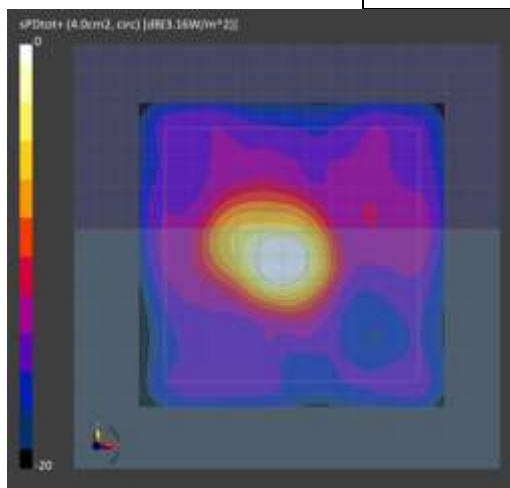

39)

KCTL Inc.

Measurement Report for NP930QED, EDGE RIGHT, Custom Band 802.11 ax, UID 10755 AAC, Channel 15 (6025.0MHz)

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP930QED, SAMSUNG	303.0 x 11.0 x 202.0	5B0Q9FMRA00005M	Tablet + Aux Antenna

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor
5G	EDGE RIGHT, 2.00	6025.0, 15	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air	EUmmWV4 - SN9489_F1-55GHz, 2021-05-28	DAE4 Sn1587, 2021-07-26

Scans Setup

Measurement Results

Scan Type	5G Scan
Grid Extents [mm]	90.0 x 150.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	N/A

Scan Type	5G Scan
Date	2021-12-13
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	3.86
psPDtot+ [W/m ²]	4.27
E _{max} [V/m]	58.2
Power Drift [dB]	-0.03

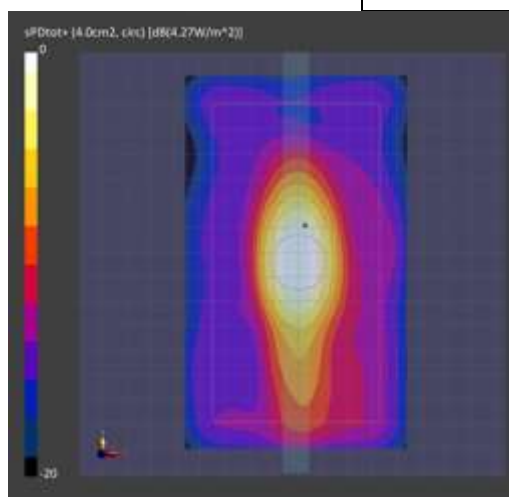

40)

KCTL Inc.

Measurement Report for NP930QED, EDGE LEFT, Custom Band 802.11 ax, UID 10755 AAC, Channel 111 (6505.0MHz)

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP930QED, SAMSUNG	303.0 x 11.0 x 202.0	5B0Q9FMRA00005M	Tablet + Main Antenna

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor
5G	EDGE LEFT, 2.00	6505.0, 111	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air	EUmmWV4 - SN9489_F1-55GHz, 2021-05-28	DAE4 Sn1587, 2021-07-26

Scans Setup

Measurement Results

Scan Type	5G Scan
Grid Extents [mm]	90.0 x 150.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	N/A

Scan Type	5G Scan
Date	2021-12-13
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	0.861
psPDtot+ [W/m ²]	1.22
E _{max} [V/m]	35.1
Power Drift [dB]	0.09

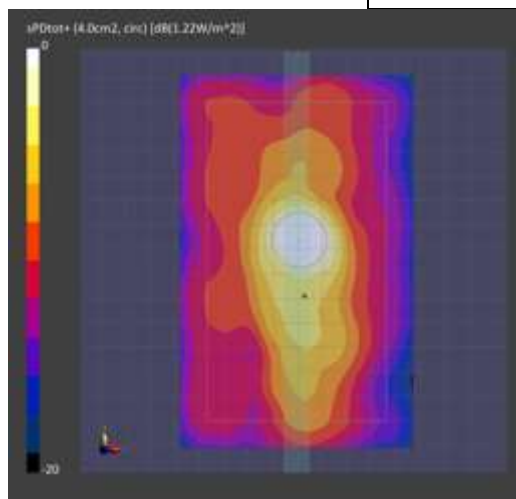

41)

KCTL Inc.

Measurement Report for NP930QED, EDGE LEFT, Custom Band 802.11 ax, UID 10755 AAC, Channel 143 (6665.0MHz)

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP930QED, SAMSUNG	303.0 x 11.0 x 202.0	5B0Q9FMRA00005M	Tablet + Main Antenna

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor
5G	EDGE LEFT, 2.00	6665.0, 143	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air	EUmmWV4 - SN9489_F1-55GHz, 2021-05-28	DAE4 Sn1587, 2021-07-26

Scans Setup

Measurement Results

Scan Type	5G Scan
Grid Extents [mm]	90.0 x 150.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	N/A

Scan Type	5G Scan
Date	2021-12-13
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	1.82
psPDtot+ [W/m ²]	1.97
E _{max} [V/m]	43.6
Power Drift [dB]	0.11

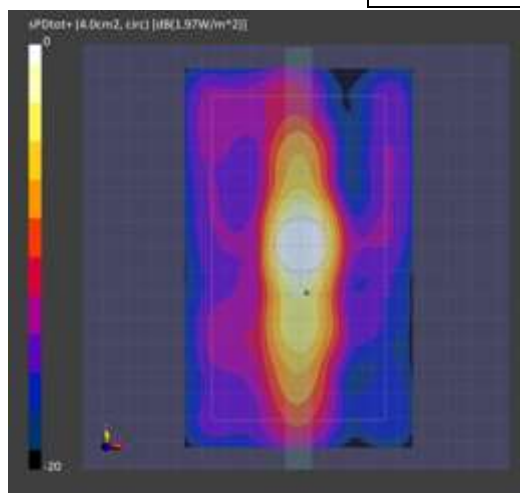

42)

KCTL Inc.

Measurement Report for NP930QED, EDGE RIGHT, Custom Band 802.11 ax, UID 10755 AAC, Channel 207 (6985.0MHz)

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP930QED, SAMSUNG	303.0 x 11.0 x 202.0	5B0Q9FMRA00005M	Tablet + Aux Antenna

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor
5G	EDGE RIGHT, 2.00	6985.0, 207	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air	EUmmWV4 - SN9489_F1-55GHz, 2021-05-28	DAE4 Sn1587, 2021-07-26

Scans Setup

Measurement Results

Scan Type	5G Scan
Grid Extents [mm]	90.0 x 150.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	N/A

Scan Type	5G Scan
Date	2021-12-13
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	0.868
psPDtot+ [W/m ²]	0.959
E _{max} [V/m]	29.0
Power Drift [dB]	-0.17

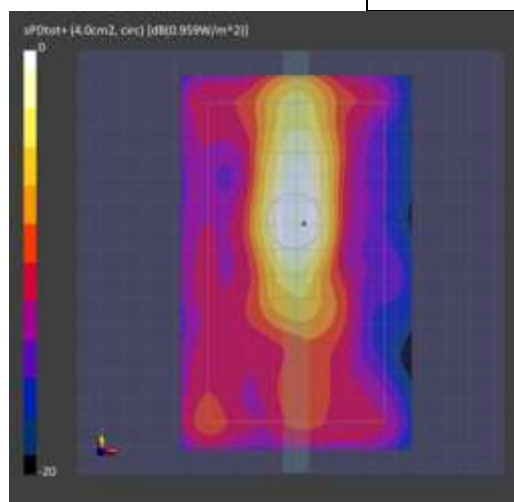

Appendixes List

Appendix A	A.1 Probe Calibration certificate (EX3DV4_3697) A.2 Probe Calibration certificate (EX3DV4_7540) A.3 Probe Calibration certificate (EUmmWV4_9489) A.4 System Calibration certificate 5G Verification Source 10 GHz_1023) A.5 Dipole Calibration certificate (D2450V2_895) A.6 Dipole Calibration certificate (D5GHzV2_1293) A.7 Dipole Calibration certificate (D6.5GHzV2_SN1005) A.8 Justification for Extended SAR Dipole Calibrations
Appendix B	SAR Tissue Specification
Appendix C	Power Reduction Verification
Appendix D	#Antenna Location & Distance
Appendix E	EUT Photo
Appendix F	Test Setup Photo