

TEST REPORT

COMPLIANCE TEST REPORT

EUT Description	Convertible PC
Brand Name	HP
Model Name	HSN-I55C
FCC ID	PD9AX211D2
Date of Test Start/End	2022-04-27 / 2022-04-28
Features	IEEE802.11b/g/n/ac/ax

Applicant	HP Inc.
Address	1501 Page Mill Road, Palo Alto CA 94304 USA
Contact Person	Sam Lin
Telephone/Fax/ Email	+886 2 37896331/sam.lin2@hp.com

Test Report identification	220316-03.TR01
Revision Control	Rev. 00 This test report replaces any previous versions of this test report (see Section 1)

Table of Contents

1. Table of Contents	
2. Document Revision History	3
3. Test Setup.....	3
4. Test Sample.....	4
5. Test Equipment List.....	4
6. Test Results.....	4
6.1. SAR TUNE-UP POWER AS PER SAR ASSESSMENT	4
6.2. TAS VALIDATION FOR 2.4 GHZ BAND ON CHANNEL 6.....	5
6.3. TAS VALIDATION FOR 5 GHZ BAND ON CHANNEL 120	7
7. Conclusion	9

2. Document Revision History


Revision #	Date	Modified by	Revision Details
Rev.00	2022-04-29	Tanguy MATHIEU	First Issue
Rev.01	2022-06-22	Estelle GILLES	FCC ID updated

3. Test Setup

The conducted power measurement test setup is described in the following and illustrated in Figure A.1.

- The DUT which AX211 WiFi module is installed inside convertible PC from HP model HSN-I55C.
- A control PC is used to configure the Call Box as an access point to manage the uplink and downlink data traffic.
- Uplink signal power is measured with the Spectrum Analyzer and record by the PC with a maximum time resolution of 0.3333 msec.
- Uplink signal from the module is fed through a 3 dB Power Splitter, which delivers an equal amount of signal to the Spectrum Analyzer and the Call Box. The Splitter has high isolation between the Spectrum Analyzer and the Call Box.
- Path loss in the power measurement setup from the AX211 Antenna port to either the Call Box or the Spectrum Analyzer for 2.4 GHz and 5 GHz are 8.5 dB and 9.5 dB respectively.

Figure.1 – Validation using conducted power measurement test setup.

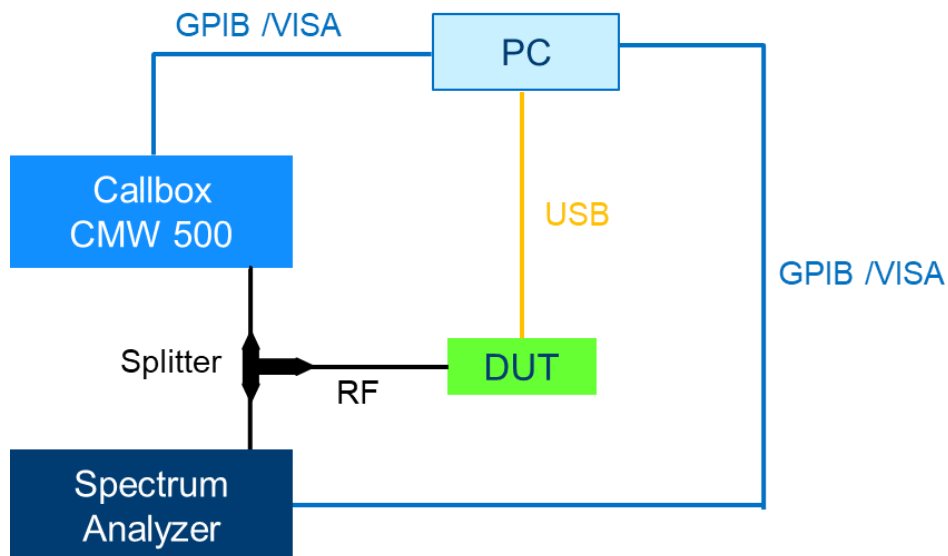

4. Test Sample

Sample	ID #	Description	Model	Serial #	Note
#1	220316-03.S04	Convertible PC	HSN-I55C	00027705FQ	-

5. Test Equipment List

Equipment and accessories used for the conducted power measurement test setup are listed below. The Test Platform (DUT), test setup and associated equipment are shown in A.1.3.

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
025-005	Communication Tester	CMW500	161493	Rohde & Schwarz	N/A	N/A
131-000	Spectrum Analyzer	FSV40	101425	Rohde & Schwarz	2021-01-06	2023-31-05
025	Setup Cable	-	-	-	Attenuation and loss verified before use	

6. Test Results

6.1. SAR Tune-Up Power as per SAR assessment


Chain A		Chain B	
IEEE 802.11g CH6	IEEE 802.11a CH120	IEEE 802.11g CH6	IEEE 802.11a CH120
20	17.5	20	17.5

6.2. TAS Validation for 2.4 GHz Band on Channel 6

Table B1 – Test Cases for 2.4 GHz Channel 6

Test Case #	Channel	Chain	Channel Bandwidth	Measurement Averaging Period	Measurement Time Resolution	Max Tune-Up Power [dBm]	SAR Tune-Up Power [dBm]
1	6	A	20 MHz	100 sec	0.3333 msec	21.0	20
2		B	20 MHz	100 sec	0.3333 msec	21.0	20

Results of test cases in Table B1 are shown in the following plots.

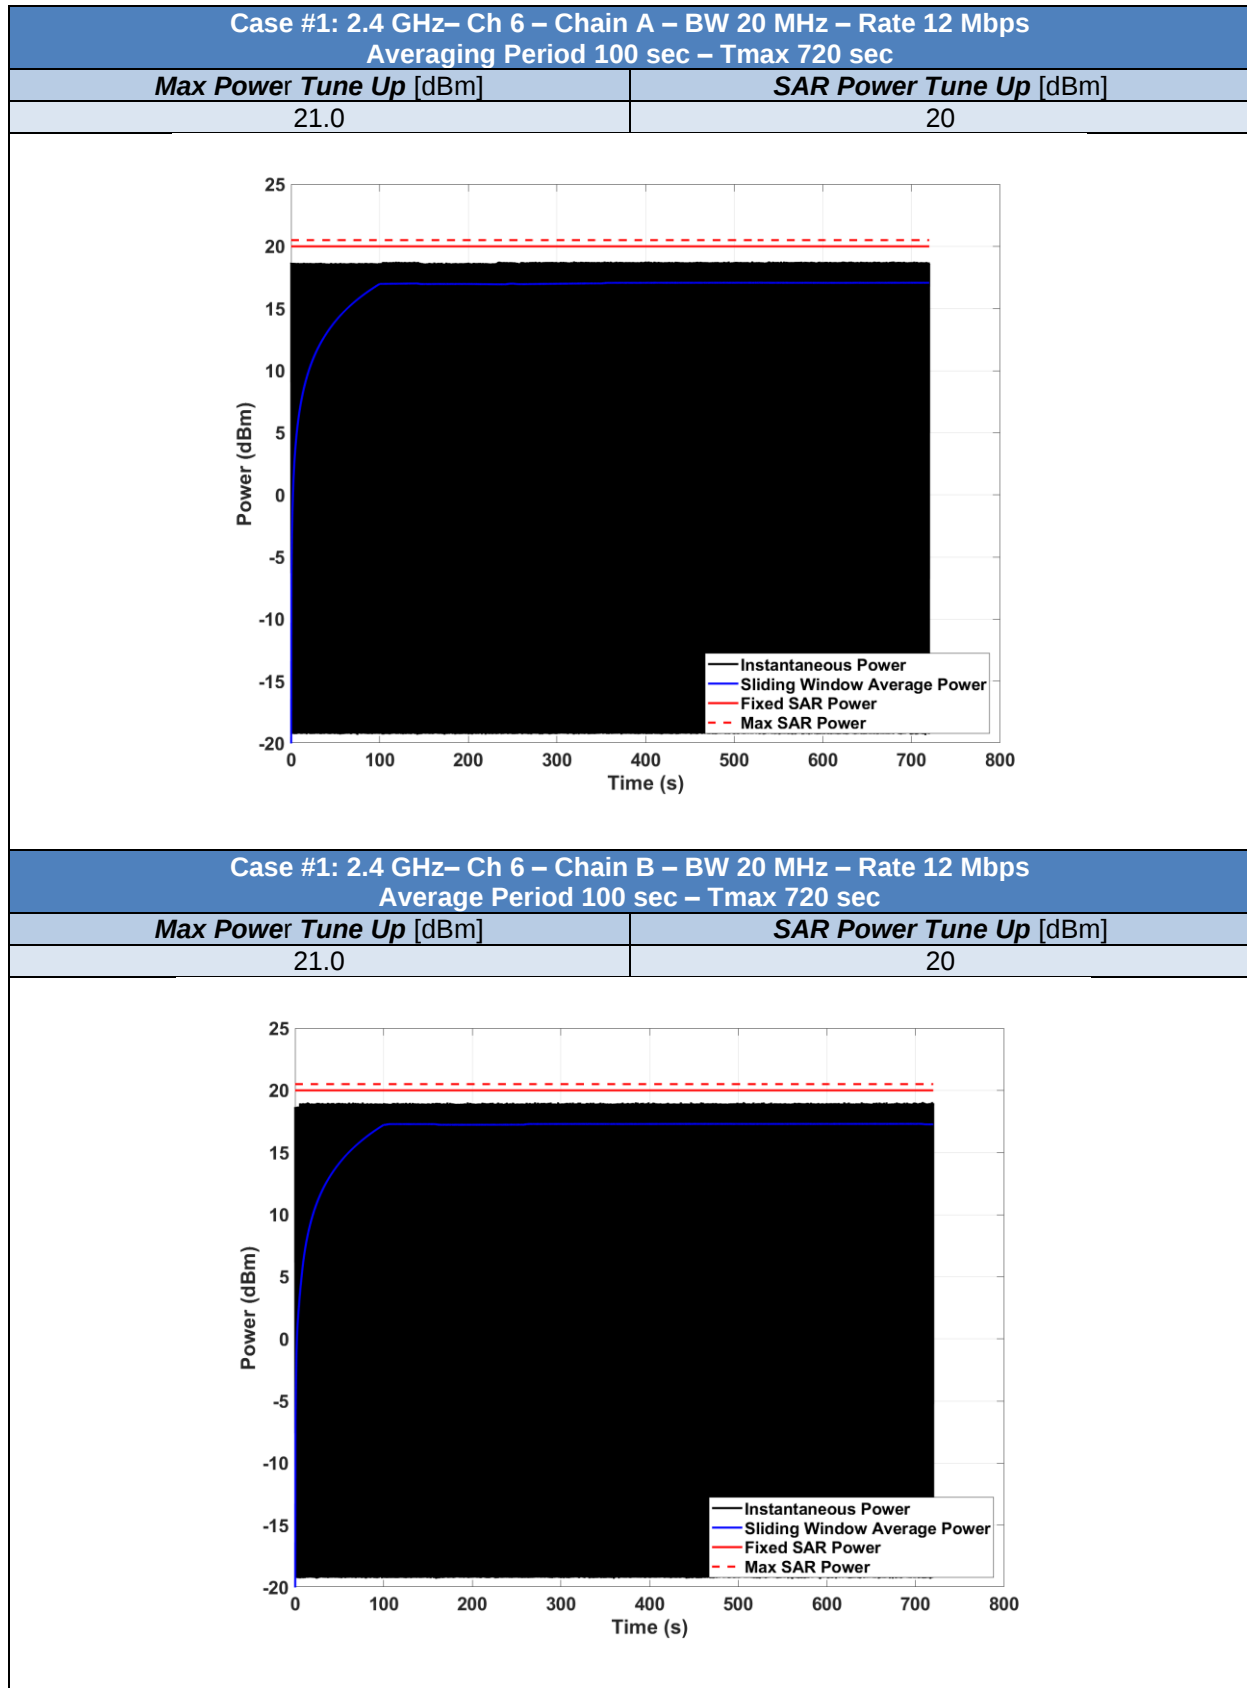


6.3. TAS Validation for 5 GHz Band on Channel 120

Table B2 – Test Cases for 5 GHz Channel 120

Test Case #	Channel	Chain	Channel Bandwidth	Measurement Averaging Period	Measurement Time Resolution	Max Power Tune-Up [dBm]	SAR Power Tune-Up [dBm]
1	120	A	20 MHz	60 sec	0.3333 msec	21	17.5
2		B	20 MHz	60 sec	0.3333 msec	21	17.5

Results of test cases in Table B2 are shown in the following plots.

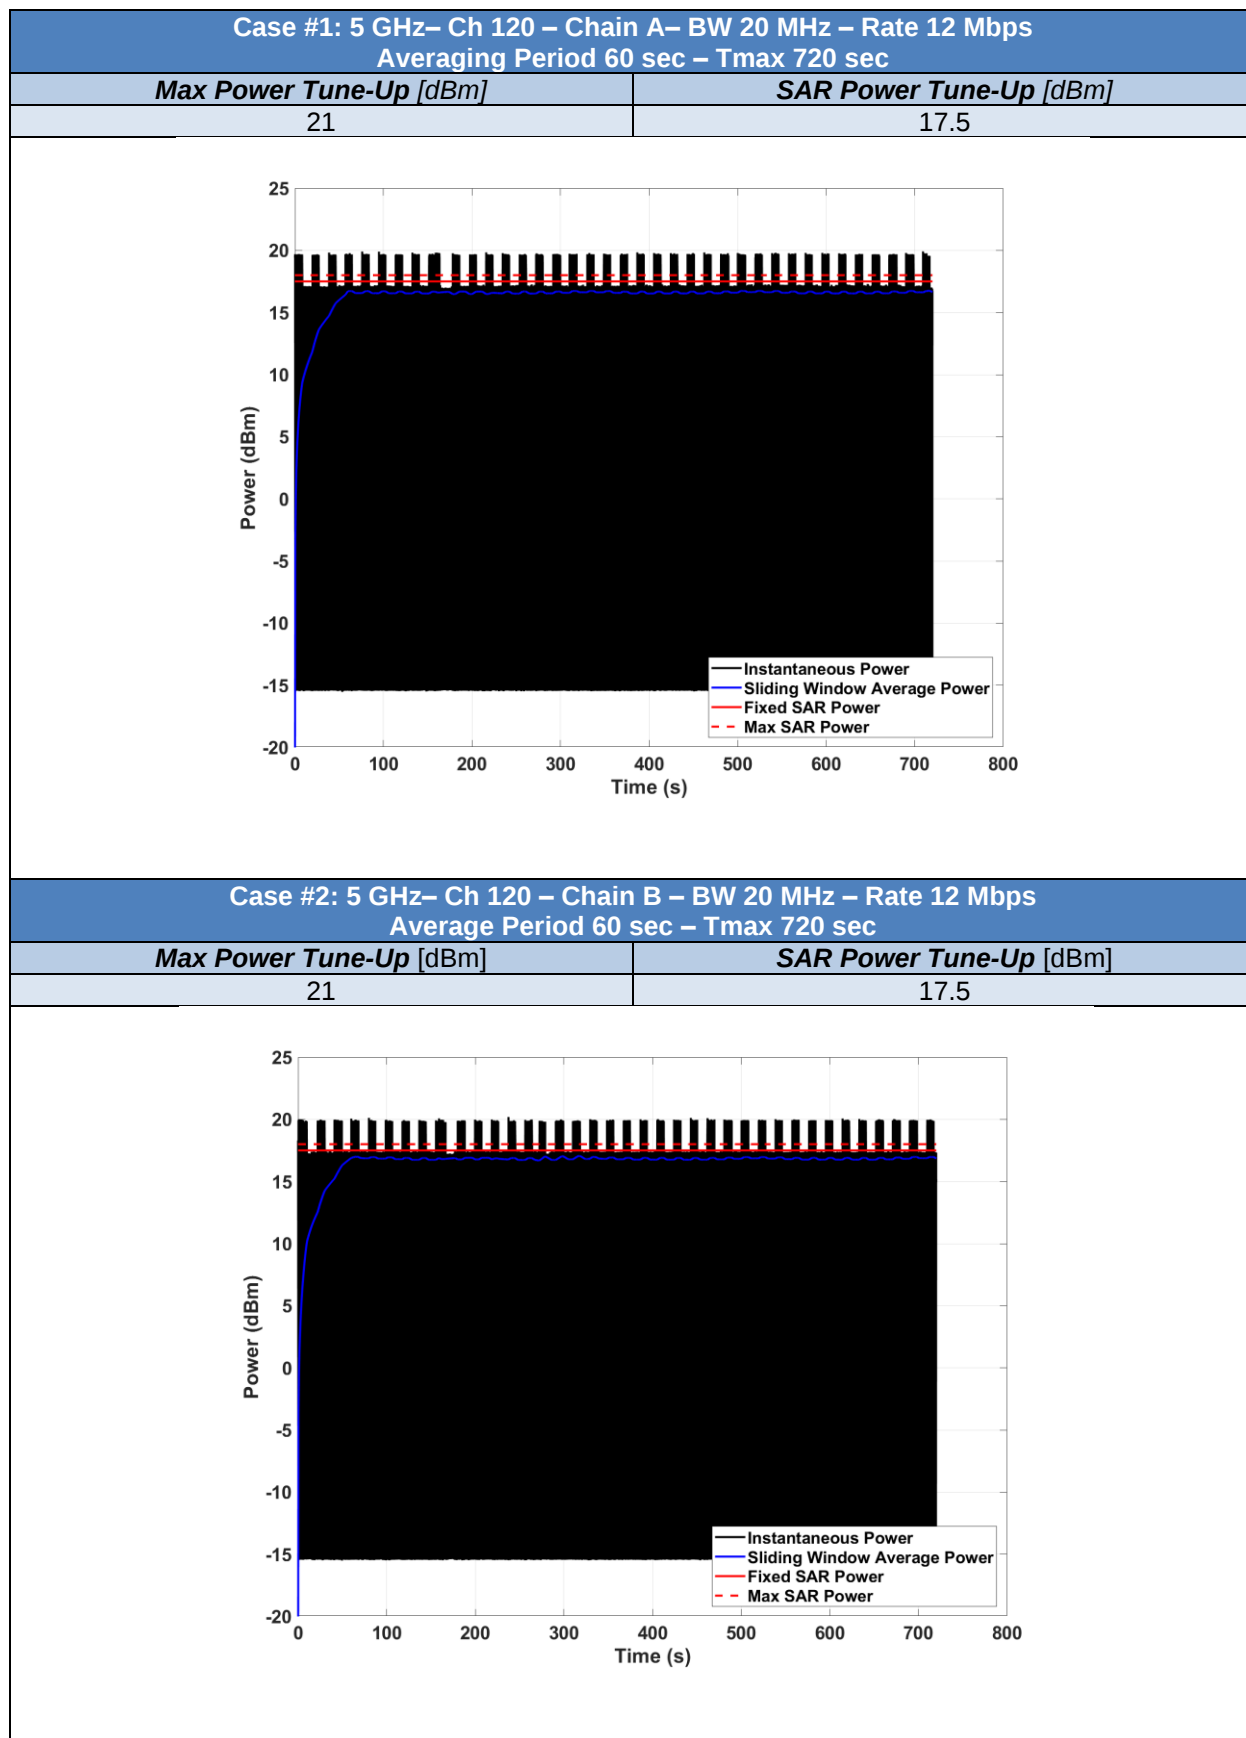

7. Conclusion

The TAS Intel Algorithm functionality of AX211 WiFi Module Integrated inside HP Ultrion HSN-I55C is tested. All test cases are compliant with SAR limit.