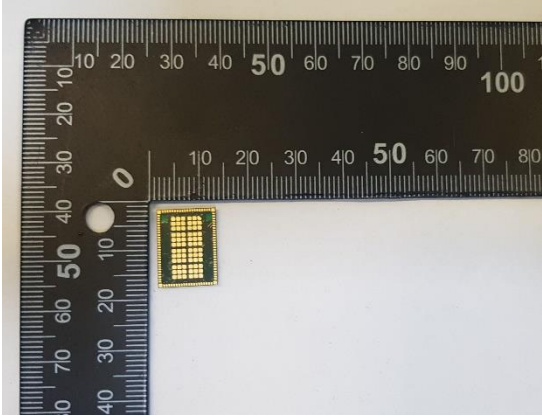
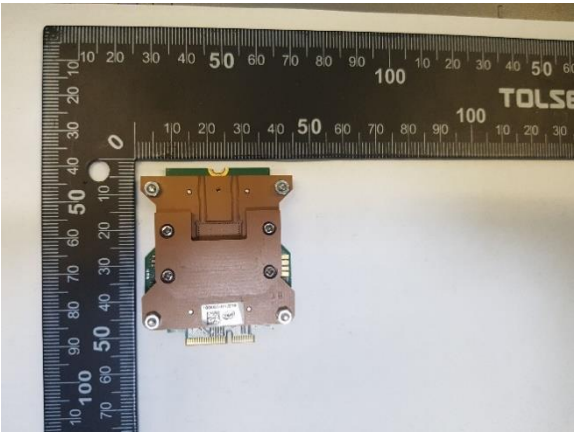
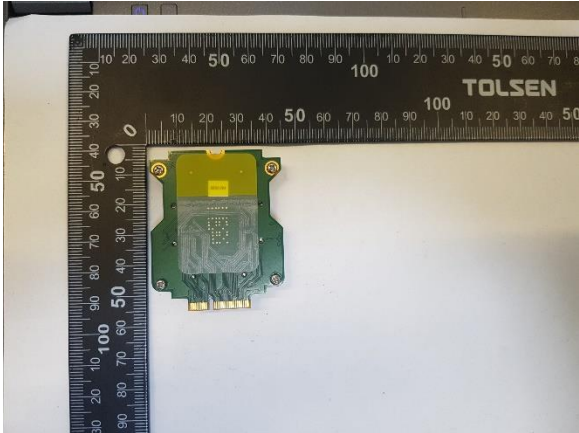
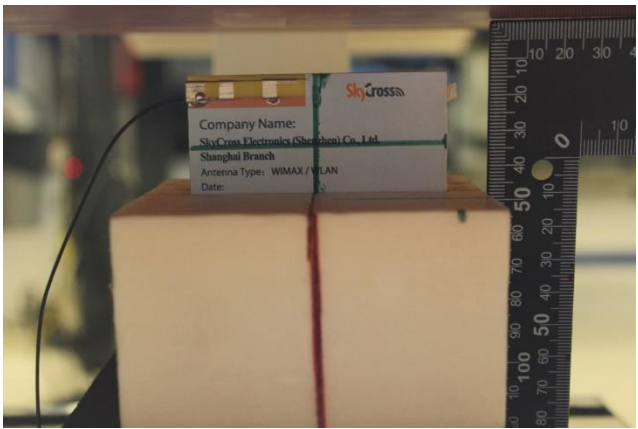
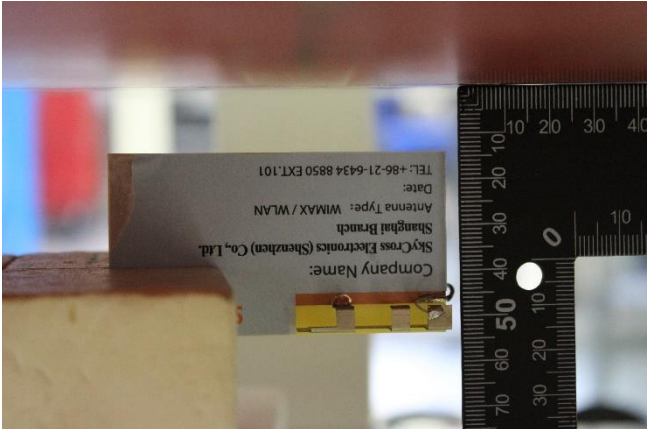
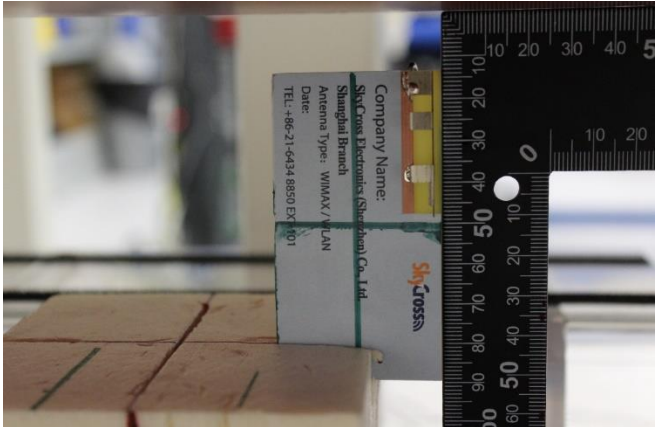
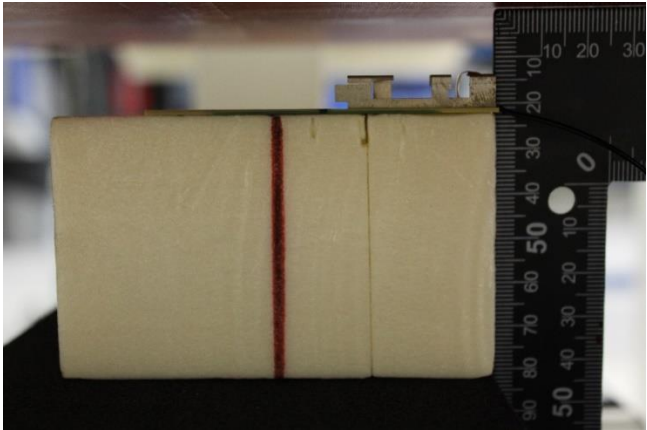
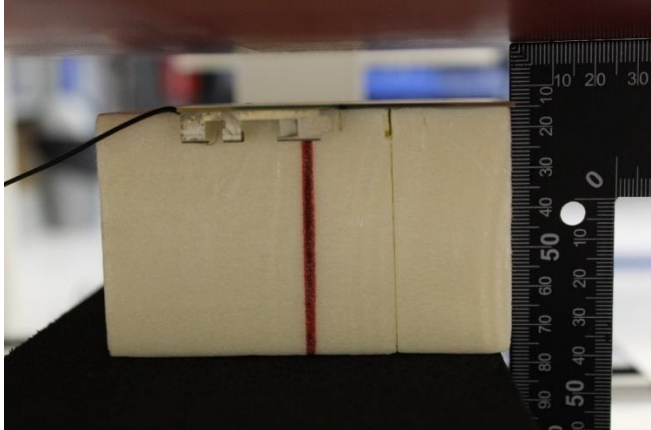


Annex F. Photographs




F.1 Test Sample

D2W Module: (Front) 201120-03.S09 	D2W Module: (Back) 201120-03.S09 
Adapter: 180001-01.S19 (Front view) 	Adapter: 180001-01.S19 (Back view) 
Platform Extender: 170524-01.S12 	Laptop PC Host: 170000-01.S15 

F.2 Test positions


Top Edge	Bottom Edge
	
Left Edge	Right Edge
	
Front Face	Back Face
	

F.3 Antenna host platform location and adjacent edge positions relative to the body

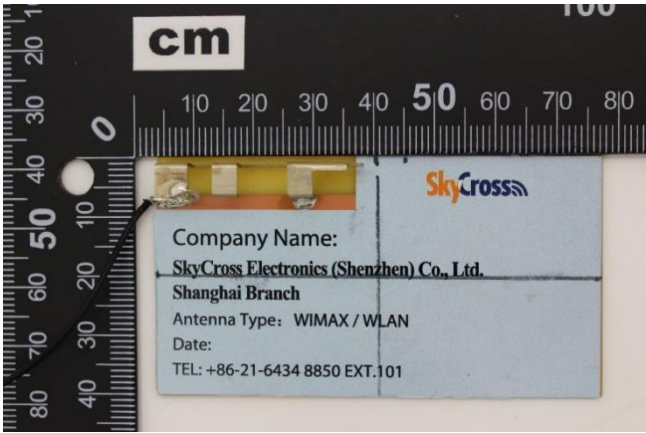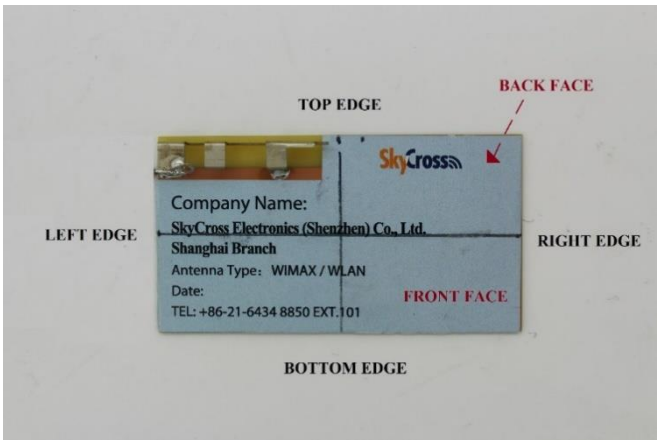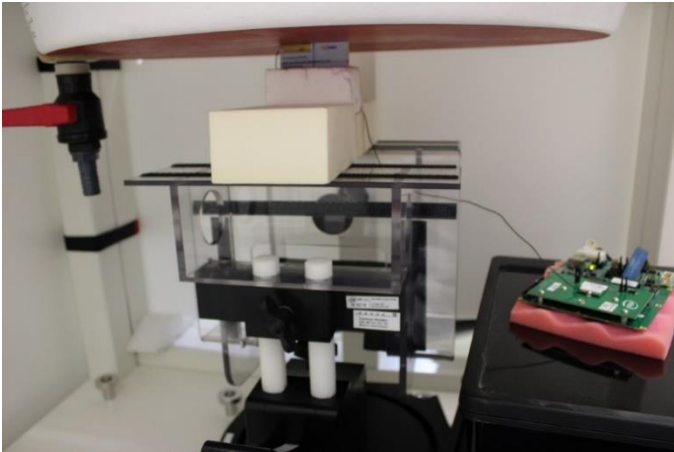Antenna Front View	Antenna Positions
 A photograph of the antenna's front view. A ruler is placed above the antenna for scale. The antenna is a rectangular white PCB with a yellow gold-plated edge connector on the left. It features the 'SkyCross' logo and the following text: 'Company Name: SkyCross Electronics (Shenzhen) Co., Ltd. Shanghai Branch', 'Antenna Type: WIMAX / WLAN', 'Date:', and 'TEL: +86-21-6434 8850 EXT.101'.	 A diagram of the antenna showing its edges and faces. The edges are labeled: 'TOP EDGE', 'LEFT EDGE', 'RIGHT EDGE', and 'BOTTOM EDGE'. The faces are labeled: 'FRONT FACE' (in red) and 'BACK FACE' (in red, with a red arrow pointing to the back). The 'SkyCross' logo and company information are visible on the front face.
General Setup	
 A photograph of the general test setup. It shows a complex mechanical fixture with various components, including a yellow block, a black block, and a green PCB with a red component. The setup is mounted on a black base.	

F.4 Phantom liquid level during measurements

ELI phantom Body liquid SAR Dasy SPEAG MBBL600-6000V6 Batch -191014-02

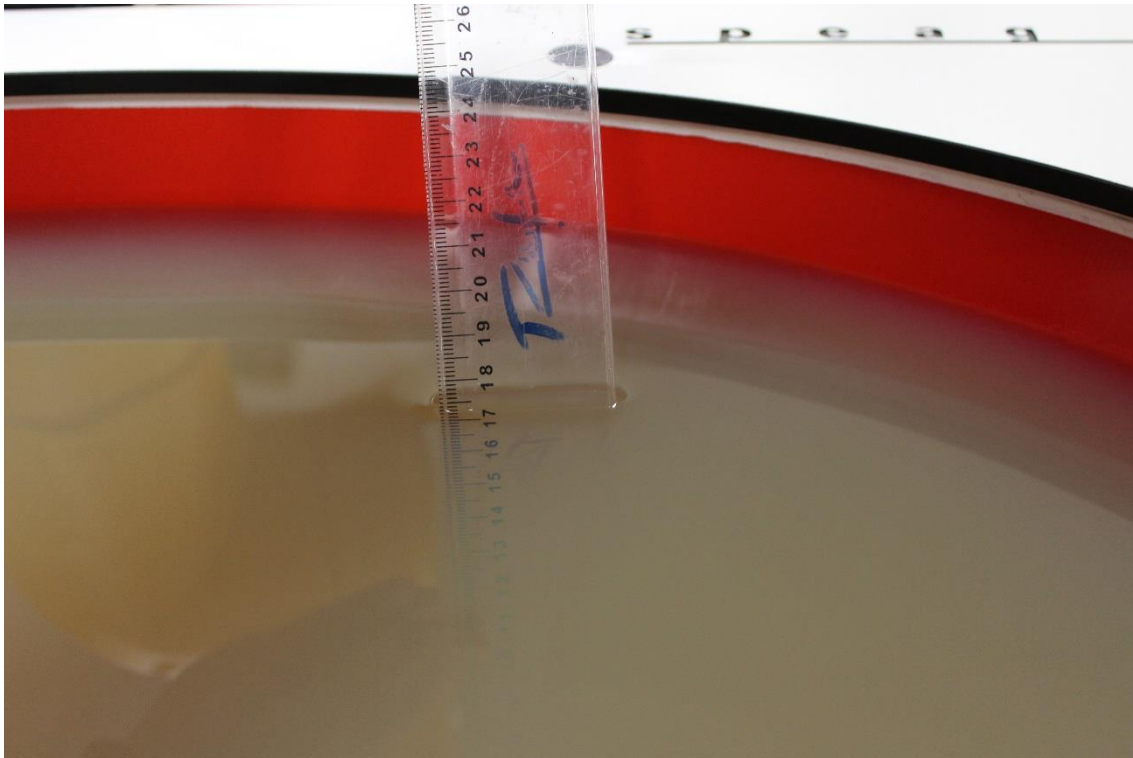

End of the report

This page is intentionally left blank and marks the last page of the test report.