



TEST REPORT

EUT Description	Wireless Module installed in Convertible PC
Brand Name	Intel® Wi-Fi 6E AX211
Model Name	AX211D2W
FCC ID	PD9AX211D2
Date of Test Start/End	2023-03-27 / 2023-03-31
Features	802.11ax, Tri Band, 2x2 Wi-Fi 6E + Bluetooth® 5.2 (see section 5)
Description	Platform: ThinkBook Plus G4 IRU + Speed and Hong-Bo antennas

Applicant	Intel Mobile Communications
Address	100 Center Point Circle, Suite 200 / Columbia, SC 29210 / United States
Contact Person	Steven Hackett
Telephone/Fax/ Email	steven.c.hackett@intel.com

Reference Standards	FCC 47 CFR Part §2.1093 (see section 1)	
RF Exposure Environment	Portable devices - General population/uncontrolled exposure	
	Testing Result	Limit
Maximum Power Density Result & Limit	4.22 W/m² (4cm²)	10 W/m² (4cm²)
Maximum SAR Result & Limit	0.84 W/kg (1g)	
Min. test separation distance	0mm to phantom, 3.15 mm to antenna edge (SAR), 2.5mm to probe tip (PD)	

Test Report identification	230214-01.TR02
Revision Control	Rev. 00 This test report revision replaces any previous test report revision (see section 8)

The test results relate only to the samples tested.

Issued by

Reviewed by

Edgar Garcia
(Test Engineer)

Adel LOUNES
(SAR Test Lead Engineer)

Intel Corporation S.A.S – WRF Lab
425 rue de Goa – Le Cargo B6 - 06600 Antibes, France
Tel. +33493001400 / Fax +33493001401

Table of Contents

1. Standards, reference documents and applicable test methods	4
2. General conditions, competences and guarantees	4
3. Environmental Conditions	5
4. Test samples	5
5. EUT Features	6
6. Remarks and comments	9
7. Test Verdicts summary	9
8. Document Revision History	9
Annex A. PD Test & System Description	10
A.1 POWER DENSITY DEFINITION	10
A.2 SPEAG FREE SPACE MEASUREMENT SYSTEM	10
A.2.1 <i>Measurement Setup</i>	10
A.2.2 <i>E-Field Measurement Probe</i>	11
A.2.3 <i>Worst Case Linearization Error</i>	12
A.2.4 <i>Data Evaluation</i>	12
A.3 SYSTEM CHECK	13
A.4 TEST EQUIPMENT LIST	14
A.5 MEASUREMENT UNCERTAINTY EVALUATION	15
A.6 RF EXPOSURE LIMITS	16
Annex B. SAR Test & System Description	17
B.1 SAR DEFINITION	17
B.2 SPEAG SAR MEASUREMENT SYSTEM	18
B.2.1 <i>SAR Measurement Setup</i>	18
B.2.2 <i>E-Field Measurement Probe</i>	19
B.2.3 <i>Flat Phantom</i>	19
B.2.4 <i>Device Positioner</i>	20
B.3 DATA EVALUATION	21
B.4 SYSTEM AND LIQUID CHECK	23
B.4.1 <i>System Check</i>	23
B.4.2 <i>Liquid Check</i>	24
B.5 TEST EQUIPMENT LIST	25
B.5.1 <i>Tissue Simulant Liquid</i>	25
B.6 MEASUREMENT UNCERTAINTY EVALUATION	26
B.7 RF EXPOSURE LIMITS	27
Annex C. Test Results	28
C.1 TEST CONDITIONS	28
C.1.1 <i>Test positions relative to the phantom</i>	28
C.1.2 <i>Test signal, Output power and Test Frequencies</i>	28
C.1.3 <i>Evaluation Exclusion and Test Reductions</i>	29
C.2 CONDUCTED POWER MEASUREMENTS	30
C.2.1 <i>WLAN 6-7GHz (U-NII)</i>	30
C.3 TISSUE PARAMETERS MEASUREMENT	34
C.4 SYSTEM CHECK MEASUREMENTS	34
C.4.1 <i>E-Field</i>	34
C.4.2 <i>H-Field</i>	34
C.4.3 <i>Local Power Density</i>	34

C.4.4	Averaged Power Density.....	35
C.4.5	SAR.....	35
C.5	TEST RESULTS	36
C.5.1	SAR - 802.11ax - 6.2 GHz - U-NII-5.....	36
C.5.2	SAR - 802.11ax - 6.5 GHz - U-NII-6.....	37
C.5.3	SAR - 802.11ax - 6.7 GHz - U-NII-7.....	38
C.5.4	SAR - 802.11ax - 7.0 GHz - U-NII-8.....	39
C.5.5	Power Density - 802.11ax - 6.2 GHz - U-NII-5.....	40
C.5.6	Power Density - 802.11ax - 6.5 GHz - U-NII-6.....	40
C.5.7	Power Density - 802.11ax - 6.7 GHz - U-NII-7.....	40
C.5.8	Power Density - 802.11ax - 7.0 GHz - U-NII-8.....	40
C.5.9	Measurement Variability.....	41
C.5.10	Simultaneous Transmission Evaluation – SAR.....	42
Annex D.	Test System Plots.....	43
Annex E.	TSL Dielectric Parameters.....	56
E.1	HEAD WiFi 6E 7000MHz.....	56
Annex F.	Calibration Certificates	57
Annex G.	Photographs	58
G.1	TEST SAMPLE	58
G.2	PD TEST POSITIONS.....	60
G.3	SAR TEST POSITION	61
G.4	ANTENNA HOST PLATFORM LOCATION AND ADJACENT EDGE POSITIONS RELATIVE TO THE BODY.....	63
G.5	PHANTOM LIQUID LEVEL DURING MEASUREMENTS	64

1. Standards, reference documents and applicable test methods

FCC	<ol style="list-style-type: none">1. FCC 47 CFR Part §2.1093 – Radiofrequency radiation exposure evaluation: portable devices. 2021-10-01 Edition2. FCC 47 CFR Part §1.1310 – Radiofrequency radiation exposure limits. Edition October 20213. FCC OET KDB 248227 D01 v02r02 - SAR guidance for IEEE 802.11 (Wi-Fi) transmitters.4. FCC OET KDB 447498 D04 v01 General RF Exposure Guidance v01– RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices5. FCC OET KDB 616217 D04 v01r02 - SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers.6. FCC OET KDB 865664 D01 v01r04 - SAR Measurement Requirements for 100 MHz to 6 GHz.7. FCC OET KDB 865664 D02 v01r02 - RF Exposure Compliance Reporting and Documentation Considerations.8. IEEE Std 1528-2013 - IEEE Recommended Practice Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communication Devices: Measurement Techniques...9. RF Exposure Policies and Procedures: TCB Workshop – October 202010. IEC/IEEE 62209-1528:2020 Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)11. 987594 D04 UN6GHZ Pre-Approval Guidance Checklist v0112. SPEAG Application Note – 5G Compliance Testing with DASY6 (5GModule V1.0Beta)13. SPEAG Application Note – 5G Compliance Testing with DASY6/8 (5GModule V5.0)
-----	--

2. General conditions, competences and guarantees

- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an Accredited Test Firm recognized by the FCC, with Designation Number FR0011.
- ✓ Intel WRF Lab only provides testing services and is committed to providing reliable, unbiased test results and interpretations.
- ✓ Intel WRF Lab is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.
- ✓ Intel WRF Lab has developed calibration and proficiency programs for its measurement equipment to ensure correlated and reliable results to its customers.
- ✓ This report is only referred to the item that has undergone the test.
- ✓ This report does not imply an approval of the product by the Certification Bodies or competent Authorities.

3. Environmental Conditions

- ✓ At the site where the measurements were performed the following limits were not exceeded during the tests:

Temperature	21.8°C ± 1°C
Humidity	38.0% ± 2.6%
Liquid Temperature	21.6°C ± 0.7°C

4. Test samples

Sample	Control #	Description	Model	Serial #	Date of receipt	Note
#01	230214-01.S01	Wireless Module installed in Convertible PC	ThinkBook Plus G4 IRU	1788708100104	03-06-2023	Speed Antenna
#02	230214-01.S02	Wireless Module installed in Convertible PC	ThinkBook Plus G4 IRU	1788708100012	03-06-2023	Hong-Bo Antenna

5. EUT Features

The herein information is provided by the customer

Intel WRF Lab declines any responsibility for the accuracy of the stated customer provided information, especially if it has any impact on the correctness of test results presented in this report.

Brand Name	Intel® Wi-Fi 6E AX211																									
Model Name	AX211D2W																									
Software Version	02297.22.160.0																									
Driver Version	22.160.0.3																									
Prototype / Production	Production																									
Host Identification	ThinkBook Plus G4 IRU																									
Supported Radios	802.11b/g/n/ax 802.11a/n/ac/ax 802.11ax Bluetooth	2.4GHz (2400.0 – 2483.5 MHz) 5.2GHz (5150.0 – 5250.0 MHz) 5.3GHz (5250.0 – 5350.0 MHz) 5.6GHz (5470.0 – 5725.0 MHz) 5.8GHz (5725.0 – 5850.0 MHz) 6.0GHz (5925.0 – 7125.0 MHz)* 2.4GHz (2400.0 – 2483.5 MHz)																								
Antenna Information	<table border="1"> <tr> <td>Transmitter</td> <td>Main / Tx2</td> <td>Aux / Tx1</td> </tr> <tr> <td>Manufacturer</td> <td>Speed</td> <td>Speed</td> </tr> <tr> <td>Antenna type</td> <td>PIFA</td> <td>PIFA</td> </tr> <tr> <td>Part number</td> <td>DC330020K00</td> <td>DC330020K10</td> </tr> </table> <table border="1"> <tr> <td>Transmitter</td> <td>Main / Tx2</td> <td>Aux / Tx1</td> </tr> <tr> <td>Manufacturer</td> <td>Hong-Bo</td> <td>Hong-Bo</td> </tr> <tr> <td>Antenna type</td> <td>PIFA</td> <td>PIFA</td> </tr> <tr> <td>Part number</td> <td>DC330020L00</td> <td>DC330020L10</td> </tr> </table> <p>See Annex G for more details on antennas location.</p>		Transmitter	Main / Tx2	Aux / Tx1	Manufacturer	Speed	Speed	Antenna type	PIFA	PIFA	Part number	DC330020K00	DC330020K10	Transmitter	Main / Tx2	Aux / Tx1	Manufacturer	Hong-Bo	Hong-Bo	Antenna type	PIFA	PIFA	Part number	DC330020L00	DC330020L10
Transmitter	Main / Tx2	Aux / Tx1																								
Manufacturer	Speed	Speed																								
Antenna type	PIFA	PIFA																								
Part number	DC330020K00	DC330020K10																								
Transmitter	Main / Tx2	Aux / Tx1																								
Manufacturer	Hong-Bo	Hong-Bo																								
Antenna type	PIFA	PIFA																								
Part number	DC330020L00	DC330020L10																								
Simultaneous Transmission Configurations	WLAN 6GHz Main + BT Aux* WLAN 6GHz Main + WLAN 6GHz Aux* WLAN 6GHz Main + WLAN 6GHz Aux + BT Aux* WLAN 2.4GHz Main + BT Aux WLAN 2.4GHz Main + WLAN 2.4GHz Aux WLAN 5GHz Main + BT Aux WLAN 5GHz Main + WLAN 5GHz Aux WLAN 5GHz Main + WLAN 5GHz Aux + BT Aux																									
Additional Information	No WWAN transmitter is considered in this report																									
	5.60-5.65 GHz band (TDWR) is supported by the device																									
	Band gap is supported by the device																									

*Only these combinations are treated on this document since this report is limited to WiFi 6E capabilities

Supported Radios

Mode	Duty Cycle	Modulation	Band	UL Freq Range (MHz)	Measured Max. Conducted Power (dBm)
802.11ax	100%	BPSK QPSK 16QAM 64QAM 256QAM	6.2GHz	5955-6415	13.48
802.11ax	100%	BPSK QPSK 16QAM 64QAM 256QAM	6.5GHz	6435-6515	13.46
802.11ax	100%	BPSK QPSK 16QAM 64QAM 256QAM	6.7GHz	6535-6855	13.49
802.11ax	100%	BPSK QPSK 16QAM 64QAM 256QAM	7.0GHz	6875-7125	13.49

NM: Not Measured

Maximum Output power specification + Tune up tolerance limit			Tablet config / SISO mode	
Equipment Class	Mode	BW (MHz)	Aux/Chain A (dBm)	Main/Chain B (dBm)
U-NII-5	802.11ax	20	7.00	7.00
		40	9.50	9.50
		80	9.50	9.50
		160	9.50	9.50
		20	7.00	7.00
		40	9.50	9.50
		80	9.50	9.50
		160	9.50	9.50
		20	7.00	7.00
		40	9.50	9.50
		80	9.50	9.50
		160	9.50	9.50
U-NII-6	802.11ax	20	7.00	7.00
		40	9.50	9.50
		80	9.50	9.50
		160	9.50	9.50
		20	7.00	7.00
		40	9.50	9.50
		80	9.50	9.50
		160	9.50	9.50
		20	7.00	7.00
		40	9.50	9.50
		80	9.50	9.50
		160	9.50	9.50
U-NII-7	802.11ax	20	7.00	7.00
		40	9.50	9.50
		80	9.50	9.50
		160	9.50	9.50
		20	7.00	7.00
		40	9.50	9.50
		80	9.50	9.50
		160	9.50	9.50
		20	7.00	7.00
		40	9.50	9.50
		80	9.50	9.50
		160	9.50	9.50
U-NII-8	802.11ax	20	7.00	7.00
		40	9.50	9.50
		80	9.50	9.50
		160	9.50	9.50
		20	7.00	7.00
		40	9.50	9.50
		80	9.50	9.50
		160	9.50	9.50
		20	7.00	7.00
		40	9.50	9.50
		80	9.50	9.50
		160	9.50	9.50

Maximum Output power specification + Tune up tolerance limit			Laptop config / SISO mode	
Equipment Class	Mode	BW (MHz)	Aux/Chain A (dBm)	Main/Chain B (dBm)
U-NII-5	802.11ax	20	7.00	7.00
		40	10.00	10.00
		80	13.00	13.00
		160	13.50	13.50
		20	7.00	7.00
		40	10.00	10.00
		80	13.00	13.00
		160	13.50	13.50
		20	7.00	7.00
		40	10.00	10.00
		80	13.00	13.00
		160	13.50	13.50
U-NII-6	802.11ax	20	7.00	7.00
		40	10.00	10.00
		80	13.00	13.00
		160	13.50	13.50
		20	7.00	7.00
		40	10.00	10.00
		80	13.00	13.00
		160	13.50	13.50
		20	7.00	7.00
		40	10.00	10.00
		80	13.00	13.00
		160	13.50	13.50
U-NII-7	802.11ax	20	7.00	7.00
		40	10.00	10.00
		80	13.00	13.00
		160	13.50	13.50
		20	7.00	7.00
		40	10.00	10.00
		80	13.00	13.00
		160	13.50	13.50
		20	7.00	7.00
		40	10.00	10.00
		80	13.00	13.00
		160	13.50	13.50
U-NII-8	802.11ax	20	7.00	7.00
		40	10.00	10.00
		80	13.00	13.00
		160	13.50	13.50
		20	7.00	7.00
		40	10.00	10.00
		80	13.00	13.00
		160	13.50	13.50
		20	7.00	7.00
		40	10.00	10.00
		80	13.00	13.00
		160	13.50	13.50

6. Remarks and comments

1. The conducted values are obtained by applying the available power table to the AX211D2W Intel module installed in the ThinkBook Plus G4 IRU identified in this report, as requested by the customer
2. Only the plots for the test positions with the highest measured SAR/PD per band/mode are included in Annex C.
3. Variability and simultaneous transmission results shown in this report are based on the highest SAR values.

7. Test Verdicts summary

The statement of conformity to applicable standards in the table below are based on the measured values, without taking into account the measurement uncertainties.

Standard	Band	Highest Reported PS _{tot} avg [W/m ²] 4cm ²	Verdict
802.11ax	6.2GHz	3.60	P
802.11ax	6.5GHz	4.22	P
802.11ax	6.7GHz	3.72	P
802.11ax	7.0GHz	3.38	P

Standard	Band	Highest Reported SAR [W/kg]	Verdict
802.11ax	6.2GHz	0.75	P
802.11ax	6.5GHz	0.82	P
802.11ax	6.7GHz	0.76	P
802.11ax	7.0GHz	0.84	P

P: Pass

F: Fail

NM: Not Measured

NA: Not Applicable

According to the FCC OET KDB 690783 D01, this is the summary of the values for the Grant Listing:

Highest Reported SAR (1g) (W/kg)		
Exposure Condition	Equipment Class	
	DSS	UNII
Body Worn	0.40	0.84
Simultaneous Tx	Sum-SAR: 1.50 SPLSR: NA	Sum-SAR: 1.50 SPLSR: NA

Considering the results of the performed test according to FCC 47CFR Part 2.1093 the item under test is IN COMPLIANCE with the requested specifications specified in Section1. Standards, reference documents and applicable test methods

8. Document Revision History

Revision #	Modified by	Revision Details
Rev. 00	M.FARIA	First Issue

Annex A. PD Test & System Description

A.1 Power Density Definition

The power density for an electromagnetic field represents the rate of energy transfer per unit area.

The local power density (i.e. Poynting vector) at a given spatial point is deduced from electromagnetic fields by the following formula:

$$\overrightarrow{P_{local}} = \frac{1}{2} \operatorname{Re} (\vec{E} \times \vec{H}^*)$$

Where \vec{E} is the complex electric field peak phasor and \vec{H}^* is the complex conjugate magnetic field peak phasor.


This power density is also called "single-point" or "spot power density".

Considering that the FCC's Maximum Permissible Exposure (MPE) limit is applicable on the average power density inside 1cm² area, the single point power densities in the evaluation plane should be averaged inside the 1cm² area.

A.2 SPEAG free space Measurement System

A.2.1 Measurement Setup

The DASY6 system for performing compliance tests consists of the following items:

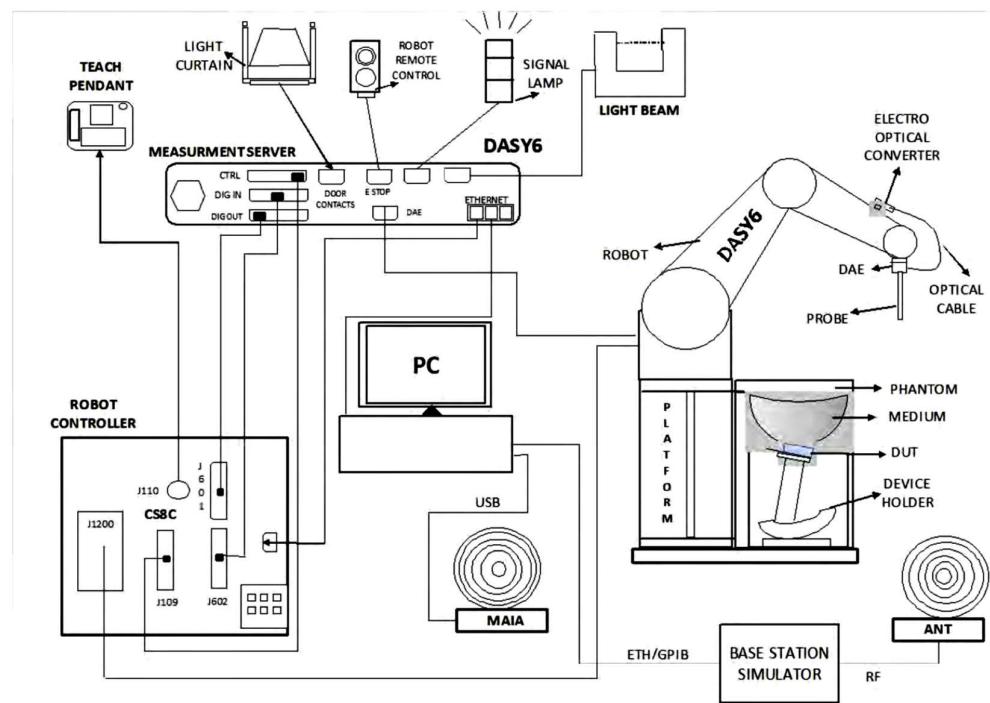

- ✓ A standard high precision 6-axis robot (Staubli TX/RX family) with controller, teach pendant and software. It includes an arm extension for accommodating the data acquisition electronics (DAE).
- ✓ An mm-wave E-field probe optimized and calibrated for the targeted measurements.
- ✓ A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The signal is optically transmitted to the EOC.
- ✓ The Electro-optical Converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. The EOC signal is transmitted to the measurement server.
- ✓ The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movements interrupts.
- ✓ The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- ✓ A computer running Windows professional operating system and the cDASY6 software.
- ✓ Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.


A.2.2 E-Field Measurement Probe

The probe consists of two dipoles (0.8 mm length) optimally arranged with different angles (γ_1 and γ_2) to obtain pseudo-vector information, printed on glass substrate protected by high density foam that allows low perturbation of the measured field.

Three or more measurements are taken for different probe rotational angles, deriving the amplitude and polarization information.

The probe's characteristics are:

Frequency Range	750 MHz – 110 GHz
Length	320 mm
Probe tip external diameter	8 mm
Probe's two dipoles length	0.9mm – Diode loaded
Probe's substrate	Quartz 0.9 x 20 x 0.18mm ($\epsilon_r=3.8$)
Distance between diode sensors and probe's tip	1.5 mm
Axial Isotropy	± 0.6 dB
Maximum operating E-field	3000 V/m
Lower E-field detection threshold	5 V/m @ 60 GHz
Minimum Mechanical separation between probe tip and a Surface	0.5mm
Calibration reference point	Diode Sensor

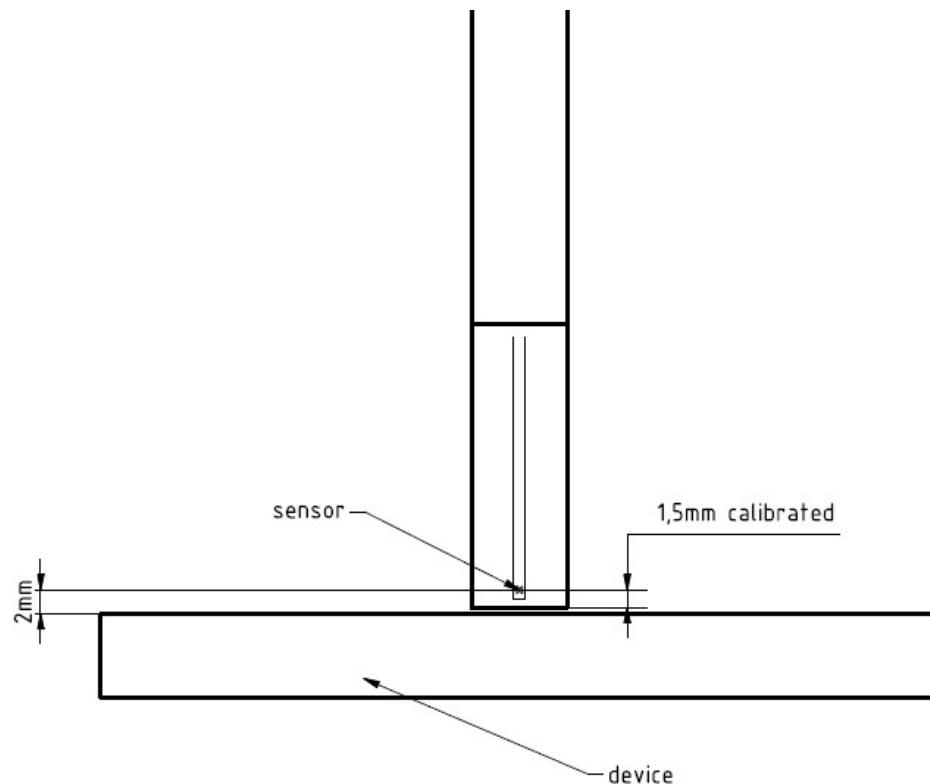

A.2.3 Worst Case Linearization Error

For continuously transmitting signals (100% duty cycle), the worst case linearization error is given by the difference between non linearized voltage and linearized voltage using CW parameters. The error is increasing with the voltage levels. In our particular case, the measured voltages averaged over the signal period are below 1mV. We use 1mV in the below calculation to have the worst case condition. The signal PAR (Peak to Average Ratio) is 6dB and the diode compression point 100mV.

The maximum voltage through the diode is given by:

$$v_{peak} = v_{meas\ avg} \times \text{PARlinear}$$

$$v_{peak} = 1 \times 4 = 4 \text{ mV}$$

The linearized voltage using CW parameter is given by:

$$v_{lin\ peak} = v_{peak} + \frac{v_{peak}^2}{\text{diode compression point}}$$

$$v_{lin\ peak} = 4 + \frac{4^2}{100} = 4.16 \text{ mV}$$

The worst case linearization error is:

$$\text{lin error} = \frac{v_{lin\ peak}}{v_{peak}} = \frac{4.16}{4} = 1.04 = 4\%$$

A.2.4 Data Evaluation

A.2.4.1 Scan

The scan involves the measurement of two planes with three different probe rotations. The grid steps are optimized by the software based on the test frequency. The location of the lowest measurement plane is defined by the distance of first measurement layer from device under test (DUT) entered by the user. The DUT location settings can be used to offset the center of the grid.

A.2.4.2 Total Field and Power Flux Density Reconstruction

Computation of the power density in general requires knowledge of the electric (E-) and magnetic (H-) field amplitudes and phases in the plane of incidence. Reconstruction of these quantities from pseudo-vector E-field measurements is feasible, as they are constrained by Maxwell's equations.

The reconstruction algorithm developed by the system manufacturer, together with the ability of the probe to measure extremely close to the source without perturbing the field, permits reconstruction of the E- and H-fields, as well as of the power density, on measurement planes located as near as 0.5mm away in the frequency band of 60 GHz.

The average of the reconstructed power density is evaluated over a circular area in each measurement plane. The area of the circle is defined by the user; the default is 1 cm².


A.3 System Check

The system performance check verifies that the system operates within its specifications. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal E-field measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

In the simplified setup for system check, the EUT is replaced by a calibrated source and the power source is replaced by a controlled continuous wave generated by a signal generator. The calibrated source must be placed at the correct distance from the E-field probe according to the calibration certificate.



First, the power meter is connected to the output of the signal generator to measure the forward power at the location of the connector to the system check source. The signal generator is adjusted for the desired forward power to match the system check source calibration setup at the connector as read by power meter. Then the power meter is replaced by the system check source.

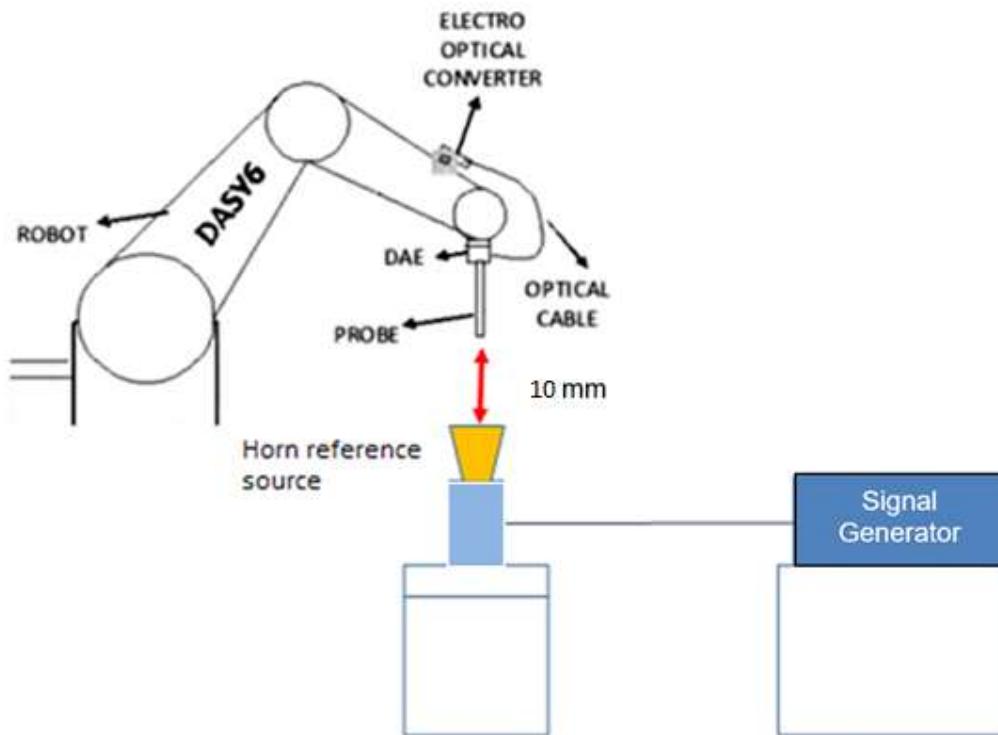

The output power on the reference source is set to 10.0 dBm (10 mW) and the measurement results E, H and Avg PD are compared with the Numerical modeling.

A.4 Test Equipment List

SAR system #4

ID #	Device	Type/Model	Serial Number	Manufacturer	Cal. Date	Cal. Due Date
088-000	E-Field probe 750MHz-110GHz	EUmmWV3	9366	SPEAG	2022-05-17	2023-05-17
004-014	Data Acquisition Electronics	DAE4	1704	SPEAG	2022-04-29	2023-04-29
004-000	6-axis Robot	TX90 XL	F11/5JL2A1/A/01	STAÜBLI	n/a	n/a
004-001	Robot Controller	CS8C	F11/5JL2A1/C/01	STAÜBLI	n/a	n/a
004-005	Measurement Server	DASY6 P/N: SE UMS 028 BB	-	SPEAG	n/a	n/a
004-004	Light Beam Unit	SE UKS 030 AA	1030	Di-soric	n/a	n/a
003-002	5G Phantom	mmWave	NA	SPEAG	NA	NA
003-006	Measurement Software	DASY mmWave v2.4	9-5ED1AC01	SPEAG	NA	NA
004-010	Laptop Holder	P/N SM LH1 001 CD	-	SPEAG	n/a	n/a

Shared equipment

ID #	Device	Type/Model	Serial Number	Manufacturer	Cal. Date	Cal. Due Date
123-000	USB Power Sensor	NRP-Z81	102278	R&S	2021-04-13	2023-04-13
124-000	USB Power Sensor	NRP-Z81	102279	R&S	2021-04-13	2023-04-13
078-000	RF Cable	ST-18/SMAm/SMAm/48	-	Huber & Suhner	2023-02-20	2024-02-20
079-001	RF Cable	ST-18/SMAm/SMAm/48	-	Huber & Suhner	2023-02-20	2024-02-20
141-000	USB Power Sensor	NRP-Z81	104381	R&S	2022-05-18	2024-05-18
327-000	Temp & Humidity Logger	RA32E-TH1-RAS	RA32-F0DED9	AVTECH	2021-03-09	2023-04-09
130-000	Vector Signal Generator	SMB100A	178217	R&S	2021-07-20	2023-07-20
198-000	0.8-21GHz RF amplifier	TVA-82-213A+	2004003	Mini-Circuits	2023-02-20	2024-02-20
438-000	Horn reference source	PE9859/SF-15	--	Pasternack	NA	NA

A.5 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the table below with a coverage factor of $k = 2$ to indicate a 95% level of confidence:

Table 2: DASY6 Uncertainty Budget in Compliance with IEC/IEEE 63195-1 for the cases indicated in the REFRENCE TABLE						
Error Description	Uncertainty Value (\pm dB)	Probability Distribution	Div.	(c _i)	Std. Unc. (\pm dB)	(v _i) v _{eff}
Measurement System						
Probe calibration	0.49	N	1	1	0.49	∞
Hemispherical Isotropy	0.50	R	$\sqrt{3}$	1	0.29	∞
	0.20	R	$\sqrt{3}$	1	0.12	∞
System Detection Limits	0.04	R	$\sqrt{3}$	1	0.02	∞
	0.03	N	1	1	0.03	∞
Field reconstruction ¹	2	R	$\sqrt{3}$	1	1.15	∞
Probe Positioning Repeatability	0.04	R	$\sqrt{3}$	1	0.02	∞
	0.30	R	$\sqrt{3}$	1	0.17	∞
Probe Positioning offset	0.04	R	$\sqrt{3}$	1	0.02	∞
	0.04	R	$\sqrt{3}$	1	0.02	∞
Amplitude and Phase Noise	0.04	R	$\sqrt{3}$	1	0.02	∞
	0.1	R	$\sqrt{3}$	1	0.06	∞
Spatial Averaging Frequency Response	0.2	R	$\sqrt{3}$	1	0.12	∞
	0.2	R	$\sqrt{3}$	1	0.12	∞
Test Sample Related						
Power Drift	0.21	R	$\sqrt{3}$	1	0.12	∞
	0.40	R	$\sqrt{3}$	1	0.23	∞
Modulation response	0.1	R	$\sqrt{3}$	1	0.06	∞
	0.04	R	$\sqrt{3}$	1	0.02	∞
Device holder influence	0.04	R	$\sqrt{3}$	1	0.02	∞
	0.04	R	$\sqrt{3}$	1	0.02	∞
RF Ambient Noise	0.04	R	$\sqrt{3}$	1	0.02	∞
	0.04	R	$\sqrt{3}$	1	0.02	∞
RF Ambient Reflections	0.04	R	$\sqrt{3}$	1	0.02	∞
	0.04	R	$\sqrt{3}$	1	0.02	∞
Combined Std. Uncertainty					1.34 dB	∞
Expanded Std. Uncertainty 95%					2.68 dB	

The REC at distance d must be modified as follows:

$$1 \quad unc_{RECdB} = \begin{cases} 2.35 - 8.75d/\lambda & \text{for } d = 0.04 \dots 0.2\lambda \\ 0.6 & \text{for } d \geq 0.2\lambda \end{cases}$$

The minimal distance is 2mm, and the minimal frequency tested is 6 GHz. This corresponds to an MU value of $(2.35 - 8.75 \cdot 0.04) = 2$ dB --
Ref: Speag, DASY6 Module mmWave Manual, February 2022.

A.6 RF Exposure Limits

Power density assessments have been made in line with the requirements of FCC 47CFR Part 2.1093, in particular chapter 1.1310 specifying the MPE limits, on the limitation of exposure of the general population / uncontrolled exposure for portable devices.

Exposure Type	Power density (S)
Limits for Occupational/Controlled Exposure. 1.5GHz – 100GHz	50.0 W/m²
Limits for General Population/ Uncontrolled Exposure. 1.5GHz – 100GHz	10.0 W/m²

Annex B. SAR Test & System Description

B.1 SAR Definition

Specific Absorption rate is defined as the time derivative of the incremental energy (dW) absorbed by (dissipated in) and incremental mass (dm) contained in a volume element (dV) of a given density (ρ).

$$SAR = \frac{d}{dt} \cdot \left(\frac{dW}{dm} \right) = \frac{d}{dt} \cdot \left(\frac{dW}{\rho \cdot dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:

σ = Conductivity of the tissue (S/m)


ρ = Mass density of the tissue (kg/m³)

E = RMS electric field strength (V/m)

B.2 SPEAG SAR Measurement System

B.2.1 SAR Measurement Setup

The DASY6 system for performing compliance tests consists of the following items:

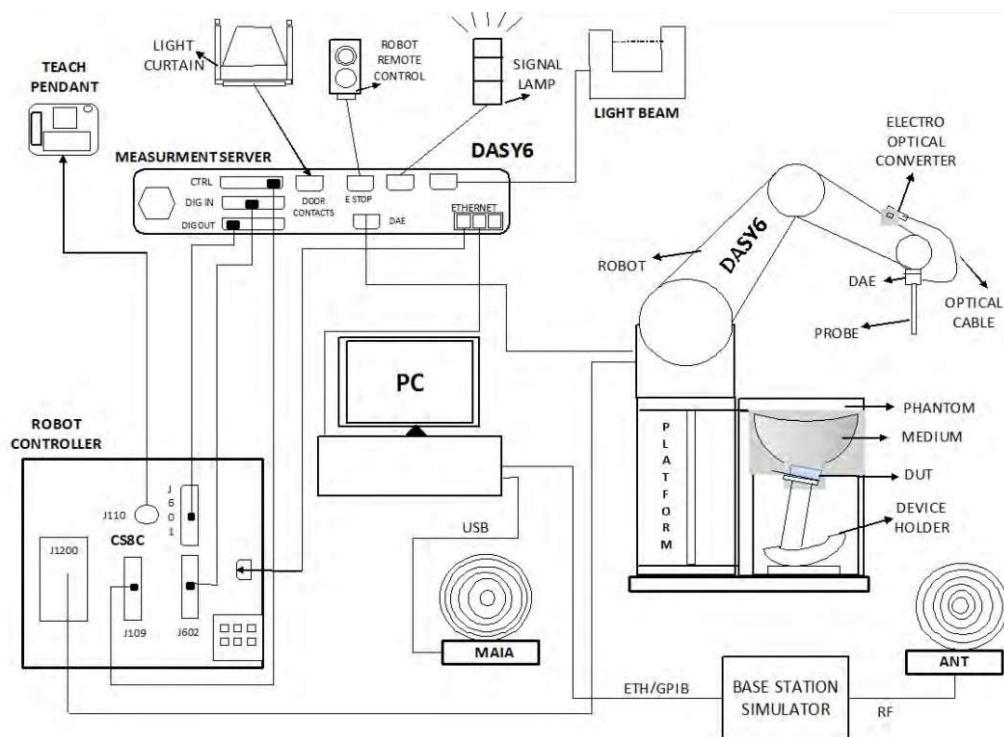

- ✓ A standard high precision 6-axis robot (Staubli TX/RX family) with controller, teach pendant and software. It includes an arm extension for accommodating the data acquisition electronics (DAE)
- ✓ An isotropic field probe optimized and calibrated for the targeted measurements.
- ✓ A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The signal is optically transmitted to the EOC.
- ✓ The Electro-optical Converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. The EOC signal is transmitted to the measurement server.
- ✓ The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movements interrupts.
- ✓ The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- ✓ A computer running Windows professional operating system and the DASY6 software.
- ✓ Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- ✓ The phantom, the device holder and other accessories according to the targeted measurement.
- ✓ MAIA is a hardware interface (Antenna) used to evaluate the modulation and audio interference characteristics of RF signals.
- ✓ ANT is an ultra-wideband antenna for use with the base station simulators over 698 MHz to 6GHz for SAR cellular testing (not used for WLAN testing).
- ✓ The base station simulator is an equipment used for SAR cellular tests in order to emulate the cellular signals characteristics and behavior between a regular base station and the equipment under test.
- ✓ Tissue simulating liquid.
- ✓ System Validation dipoles.
- ✓ Network emulator or RF test tool

B.2.2 E-Field Measurement Probe

The probe is constructed using three orthogonal dipole sensors arranged on an interlocking, triangular prism core. The probe has built-in shielding against static charges and is contained within a PEEK cylindrical enclosure material at the tip.



The probe's characteristics are:


Frequency Range	30MHz – 10GHz
Length	337 mm
Probe tip external diameter	2.5 mm
Typical distance between dipoles and the probe tip	1 mm
Axial Isotropy (in human-equivalent liquids)	±0.3 dB
Hemispherical Isotropy (in human-equivalent liquids)	±0.5 dB
Linearity	±0.2 dB
Maximum operating SAR	100 W/kg
Lower SAR detection threshold	0.001 W/kg

B.2.3 Flat Phantom

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

The phantom's characteristics are:

Material	Vinylester, glass fiber reinforced (VE-GF)
Shell thickness	2 mm ± 0.2 mm
Filling volume	30 Liters approx.
Dimensions	Major axis: 600mm / Minor axis: 400mm



B.2.4 Device Positioner

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of 0.5 mm would produce a SAR uncertainty of 20%. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.



The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

A simple but effective and easy-to-use extension for the Mounting Device; facilitates testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.); lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI and other Flat Phantoms.



B.3 Data Evaluation

- **Power Reference measurement**

The robot measures the E field in a specified reference position that can be either the selected section's grid reference point or a user point in this section at 4mm of the inner surface of the phantom, 2mm for frequencies above 3GHz.

- **Area Scan**

Measurement procedures for evaluating SAR from wireless handsets typically start with a coarse measurement grid to determine the approximate location of the local peak SAR values. This is known as the area-scan procedure. The SAR distribution is scanned along the inside surface of one side of the phantom head, at least for an area larger than the projection of the handset and antenna. The distance between the measured points and phantom surface should be less than 8 mm, and should remain constant (with variation less than ± 1 mm) during the entire scan in order to determine the locations of the local peak SAR with sufficient accuracy. The angle between the probe axis and the surface normal line is recommended but not required to be less than 30°. If this angle is larger than 30° and the closest point on the probe-tip housing to the phantom surface is closer than a probe diameter, the boundary effect may become larger and polarization dependent. This additional uncertainty needs to be analyzed and accounted for. To achieve this, modified test procedures and additional uncertainty analyses not described in this recommended practice may be required. The measurement and interpolation point spacing should be chosen such as to allow identification of the local peak locations to within one-half of the linear dimension of a side of the zoom-scan volume. Because a local peak having specific amplitude and steep gradients may produce a lower peak spatial-average SAR compared to peaks with slightly lower amplitude and less steep gradients, it is necessary to evaluate these other peaks as well. However, since the spatial gradients of local SAR peaks are a function of the wavelength inside the tissue-equivalent liquid and the incident magnetic field strength, it is not necessary to evaluate local peaks that are less than 2 dB or more below the global maximum peak. Two-dimensional spline algorithms (Brishoual et al. 2001; Press et al., 1996) are typically used to determine the peaks and gradients within the scanned area. If a peak is found at a distance from the scan border of less than one-half the edge dimension of the desired 1 g or 10 g cube, the measurement area should be enlarged if possible.

- **Zoom Scan**

To evaluate the peak spatial-average SAR values for 1 g or 10 g cubes, fine resolution volume scans, called zoom scans, are performed at the peak SAR locations identified during the area scan. The minimum zoom scan volume size should extend at least 1.5 times the edge dimension of a 1 g cube in all directions from the center of the scan volume, for both 1 g and 10 g peak spatial-average SAR evaluations. Along the phantom curved surfaces, the front face of the volume facing the tissue/liquid interface conforms to the curved boundary, to ensure that all SAR peaks are captured. The back face should be equally distorted to maintain the correct averaging mass. The flatness and orientation of the four side faces are unchanged from that of a cube whose orientation is within ± 30 ° of the line normal to the phantom at the center of the cube face next to the phantom surface. The peak local SAR locations that were determined in the area scan (interpolated values) should be used for the centers of the zoom scans. If a scan volume cannot be centered due to proximity of a phantom shape feature, the probe should be tilted to allow scan volume enlargement. If probe tilt is not feasible, the zoom-scan origin may be shifted, but not by more than half of the 1 g or 10 g cube edge dimension.

After the zoom-scan measurement, extrapolations from the closest measured points to the surface, for example along lines parallel to the zoom-scan centerline, and interpolations to a finer resolution between all measured and extrapolated points are performed. Extrapolation algorithm considerations are described in 6.5.3, and 3-D spline methods (Brishoual et al., 2001; Kreyszig, 1983; Press et al., 1996) can be used for interpolation. The peak spatial-average SAR is finally determined by a numerical averaging of the local SAR values in the interpolation grid, using for example a trapezoidal algorithm for the integration (averaging).

In some areas of the phantom, such as the jaw and upper head regions, the angle of the probe with respect to the line normal to the surface may be relatively large, e.g., greater than ± 30 °, which could increase the boundary effect error to a larger level. In these cases, during the zoom scan a change in the orientation of the probe, the phantom, or both is recommended but not required for the duration of the zoom scan, so that the angle between the probe axis and the line normal to the surface is within 30° for all measurement points.

- **Power Drift measurement**

The robot re-measures the E-Field in the same reference location measured at the Power Reference. The drift measurement gives the field difference in dB from the first to the last reference reading. This allows a user to monitor the power drift of the device under test that must remain within a maximum variation of $\pm 5\%$.

- **Post-processing**

The procedure for spatial peak SAR evaluation has been implemented according to the IEEE1528 and IEC 62209-1/2 standards. It can be conducted for 1g and 10g.

The software allows evaluations that combine measured data and robot positions, such as:

- ✓ Maximum search
- ✓ Extrapolation
- ✓ Boundary correction
- ✓ Peak search for averaged SAR

Interpolation between the measured points is performed when the resolution of the grid is not fine enough to compute the average SAR over a given mass.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation.


B.4 System and Liquid Check

B.4.1 System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results.

The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

In the simplified setup for system check, the EUT is replaced by a calibrated dipole and the power source is replaced by a controlled continuous wave generated by a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the phantom at the correct distance.

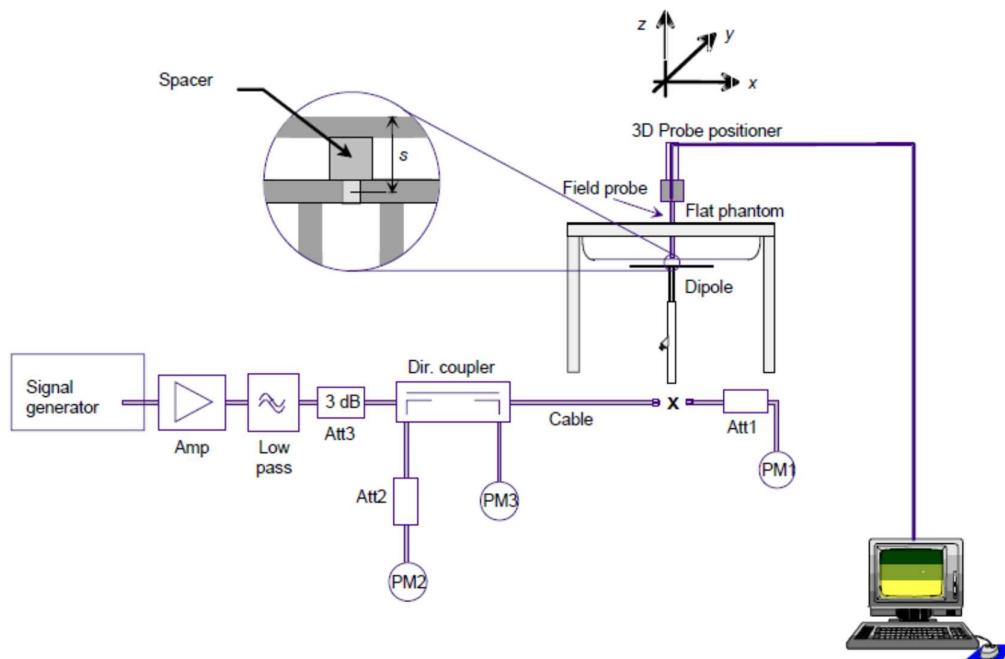

The equipment setup is shown below:

- ✓ Signal Generator
- ✓ Amplifier
- ✓ Directional coupler
- ✓ Power meter
- ✓ Calibrated dipole

First, the power meter PM1 (including attenuator Att1) is connected to the cable to measure the forward power at the location of the connector (x) to the system check source. The signal generator is adjusted for the desired forward power at the connector as read by power meter PM1 after attenuation Att1 and also as coupled through Att2 to PM2. After connecting the cable to the source, the signal generator is readjusted for the same reading at power meter PM2.

SAR results are normalized to a forward power of 1W to compare the values with the calibration reports results as described at IEC/IEEE 62209-1528:2020 standards.

B.4.2 Liquid Check

The dielectric parameters check is done prior to the use of the tissue simulating liquid. The verification is made by comparing the relative permittivity and conductivity to the values recommended by the applicable standards.

The liquid verification was performed using the following test setup:

- ✓ VNA (Vector Network Analyzer)
- ✓ Open-Short-Load calibration kit
- ✓ RF Cable
- ✓ Open-Ended Coaxial probe
- ✓ DAK software tool
- ✓ SAR Liquid
- ✓ De-ionized water
- ✓ Thermometer

These are the target dielectric properties of the tissue-equivalent liquid material according to the manufacturer's datasheet:

Frequency (MHz)	Head Tissue Simulating Media	
	ϵ_r (F/m)	σ (S/m)
6000	35.07	5.48
6500	34.46	6.07
7000	33.88	6.65

(ϵ_r = relative permittivity, σ = conductivity and ρ = 1000 kg/m³)

The measurement system implements a SAR error compensation algorithm as documented IEC/IEEE 62209-1528:2020 to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters (applied to only scale up the measured SAR, and not downward) so, according to FCC OET KDB 865664 D01, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$.

B.5 Test Equipment List

SAR System 1

ID #	Device	Type/Model	Serial Number	Manufacturer	Cal. Date	Cal. Due Date
001-000	6-Axis Robot	TX60 Lspeag	F12/5MZ3A1/A/01	STAÜBLI	NA	NA
001-002	Light Beam Unit			Di-soric	NA	NA
001-003	Laptop Holder		N/A	SPEAG	NA	NA
001-004	Robot Controller	CS8C	F12/5MZ3A1/C/01	STAÜBLI	NA	NA
001-005	Electro Optical Converter	EOC60	1076	SPEAG	NA	NA
004-006	Dosimetric E-Field probe	EX3DV4	7604	SPEAG	2022-08-23	2023-08-23
003-016	Data Acquisition Electronics	DAEip	1705	SPEAG	2022-04-28	2023-04-28
001-008	Oval Flat Phantom	ELI V8.0	2059	SPEAG	NA	NA
001-009	Measurement Software	DASY6 vxx	9-618AE2F1	SPEAG	NA	NA
001-010	MAIA Antenna	MAIA	1255	SPEAG	NA	NA

ID #	Device	Type/Model	Serial Number	Manufacturer	Cal. Date	Cal. Due Date
123-000	USB Power Sensor	NRP-Z81	102278	R&S	2021-04-13	2023-04-13
124-000	USB Power Sensor	NRP-Z81	102279	R&S	2021-04-13	2023-04-13
126-000	Vector Signal Generator	ESG E4438C	MY45092885	Agilent	2021-05-27	2023-05-27
099-000	Liquid measurement SW	DAK-3.5 V3.0.2.3	9-2687B491	SPEAG	n/a	n/a
069-000	Dielectric Probe Kit	DAK-3.5	1037	SPEAG	2021-07-14	2023-07-14
078-000	RF Cable	ST-18/SMAm/SMAm/48	-	Huber & Suhner	2023-02-20	2024-02-20
079-001	RF Cable	CBL-0.5M-SMSM+	226527	Mini-Circuits	2023-02-20	2024-02-20
077-000	Coupler	CD0.5-8-20-30	1251-002	Amd-group	2023-02-20	2024-02-20
384-000	0.1-6GHz RF amplifier	AMT-A0328	1818	Agile Microwave Technology	2023-02-20	2024-02-20
097-000	7GHz System Validation Dipole	7GHzv2	1008	SPEAG	2022-08-24	2023-08-24
095-000	Thermometer	TESTO 925	34822881	Testo	2022-03-03	2024-03-03
094-000	Temp & Humidity Logger	RA32E-TH1-RAS	RA32-FBFD5A	AVTECH	2023-02-20	2024-02-20
089-000	Vector Reflectometer	R140 1-Port 14 GHz Analyzer	0190616	Copper Mountain tech	2021-09-02	2023-09-02
458-000	Measurement Software	SARA V2.3	NA	Intel	NA	NA

B.5.1 Tissue Simulant Liquid

TSL	Manufacturer / Model	Freq Range (MHz)	Main Ingredients
Head WideBand	SPEAG HBBL600-10000V6 Batch -220721-01	600-10000	Ethanediol, Sodium petroleum sulfonate, Hexylene Glycol / 2-Methyl-pentane-2,4-diol, Alkoxylated alcohol

B.6 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the table below with a coverage factor of $k = 2$ to indicate a 95% level of confidence:

SPEAG DASY6 Uncertainty Budget According to IEC/IEEE 62209-1528 (6 GHz - 10 GHz)								
Symbol	Error Description	Uncert. Value	Prob Dist.	Div.	(ci) 1g	(ci) 10g	Std Unc. (1g)	Std Unc. (10g)
Measurement System Errors								
CF	Probe Calibration	±18.6 %	N	2	1	1	±9.3 %	±9.3 %
CF _{drift}	Probe Calibration Drift	±1.0 %	N	1	1	1	±1.0 %	±1.0 %
LIN	Probe Linearity	±4.7 %	R	√3	1	1	±2.7 %	±2.7 %
BBS	Broadband Signal	±3.0 %	N	2	1	1	±1.5 %	±1.5 %
ISO	Axial Isotropy	±4.7 %	R	√3	0.5	0.5	±1.4 %	±1.4 %
ISO	Hemispherical Isotropy	±9.6 %	R	√3	0.5	0.5	±2.8 %	±2.8 %
DAE	Data Acquisition	±0.3 %	N	1	1	1	±0.3 %	±0.3 %
AMB	RF Ambient	±1.8 %	N	1	1	1	±1.8 %	±1.8 %
Δ _{sys}	Probe Positioning	±0.2 %	N	1	0.33	0.33	±0.1 %	±0.1 %
DAT	Data Processing	±3.5 %	N	1	1	1	±3.5 %	±3.5 %
Phantom and Device Errors								
LIQ(σ)	Conductivity (meas.) _{DAK}	±2.5 %	N	1	0.78	0.71	±2.0 %	±1.8 %
LIQ(T _σ)	Conductivity (temp.) _{BB}	±2.4 %	R	√3	0.78	0.71	±1.1 %	±1.0 %
EPS	Phantom Permittivity	±14.0 %	R	√3	0.5	0.5	±4.0 %	±4.0 %
DAS	Distance DUT - TSL	±2.0 %	N	1	2	2	±4.0 %	±4.0 %
H	Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %
MOD	DUT Modulation _m	±2.4 %	R	√3	1	1	±1.4 %	±1.4 %
TAS	Time-average SAR	±2.6 %	R	√3	1	1	±1.5 %	±1.5 %
RF _{drift}	DUT drift	±5.0 %	N	1	1	1	±2.9 %	±2.9 %
Correction to the SAR results								
C(ε, σ)	Deviation to Target	±1.9 %	N	1	1	0.84	±1.9 %	±1.6 %
C(R)	SAR scaling _ρ	±0 %	R	√3	1	1	±0 %	±0 %
Combined Std. Uncertainty							±13.7 %	±13.7 %
Expanded STD Uncertainty							±27.5 %	±27.3 %

B.7 RF Exposure Limits

SAR assessments have been made in line with the requirements of FCC 47CFR Part 2.1093 on the limitation of exposure of the general population / uncontrolled exposure for portable devices.

Exposure Type	General Population / Uncontrolled Environment
Peak spatial-average SAR (averaged over any 1 gram of tissue)	1.6 W/kg
Whole body average SAR	0.08 W/kg
Peak spatial-average SAR (extremities) (averaged over any 10 grams of tissue)	4.0 W/kg

Annex C. Test Results

The herein test results were performed by:

Test case measurement	Test Personnel
Conducted measurement	F. Heurtematte
SAR/PD measurement	M.FARIA

C.1 Test Conditions

C.1.1 Test positions relative to the phantom

The device under test was an Intel® Wi-Fi 6E AX211 card inside an extender host platform (ThinkBook Plus G4 IRU) using a set of PIFA antennas. The card was operated utilizing proprietary software (DRTU version 02297.22.160.0) and each channel was measured using a broadband power meter to determine the maximum average power.

As per the Interim Procedures for UNII 6-7GHz RF Exposure, explained in *RF Exposure Policies and Procedures: TCB Workshop – October 2020*, the testing has been performed on SAR following IEC/IEEE 62209-1528:2020 and then on Power Density for the highest SAR test configurations.

The testing has been performed on all positions (except back face) in both chains and the four considered bands. U-NII-5, U-NII-6, U-NII-7 and U-NII-8 in SAR mode. The back face position has been tested in power density mode. All the above results show that Front Face is the worst-case position compared to the other sides of the antenna, with more than 3dB of difference compared to the other positions. This worst case, in addition with back face position, was tested in Power Density mode for Chain A and Chain B. In both metrics, we have passing results compared to the relative pass/fail criteria

Considering the antenna location diagrams in Annex G and the test exclusions described before, the surfaces/edges to be measured for each antenna are:

Antenna	Chain A	Chain B
Position	<ul style="list-style-type: none"> • Laptop • Top Edge • Left Edge 	<ul style="list-style-type: none"> • Laptop • Top Edge • Right Edge

See G.2 SAR/PD Test positions section for more information on the tested positions

C.1.2 Test signal, Output power and Test Frequencies

For 802.11 transmission modes the device was put into operation by using an own control software to program the test mode required to select the continuous transmission with 100% duty cycle.

The output power of the device was set to transmit at maximum power for all tests.

C.1.3 Evaluation Exclusion and Test Reductions

The SAR Test Exclusion Threshold in FCC OET KDB 447498 can be applied to determine SAR test exclusion for adjacent edge configurations. For 100MHz to 6GHz and test separation distances $\leq 50\text{mm}$, the 1-g and 10-g SAR test exclusion thresholds are determined by the following formula:

$$[(\text{max. power of channel, including tune - up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot \left[\sqrt{f_{(\text{GHz})}} \right] \leq 3.0 \text{ for 1g SAR, and } \leq 7.5 \text{ for 10g extremity SAR} \quad (1)$$

Where:

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- The values 3.0 and 7.5 are referred to as numeric thresholds

The test exclusions are applicable only when the minimum test separation distance is $\leq 50\text{ mm}$, and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is $< 5\text{ mm}$, a distance of 5 mm is applied to determine SAR test exclusion.

For test separation distances $> 50\text{ mm}$, the 1-g and 10-g SAR test exclusion thresholds are determined using the following formulas:

$$((\text{Power allowed at numeric threshold for } 50\text{ mm in (1)}) + (\text{test separation distance} - 50\text{ mm}) \cdot (f_{\text{MHz}}/150))\text{mW,} \quad (2)$$

for 100MHz to 1500MHz

$$((\text{Power allowed at numeric threshold for } 50\text{ mm in (1)}) + (\text{test separation distance} - 50\text{ mm}) \cdot 10)\text{mW,} \quad (3)$$

for 1500MHz and $\leq 6\text{GHz}$

LAN Antenna	Band Name	Output power Tablet mode		Output power Notebook mode		Laptop	Top Edge	Bottom Edge	Left Edge	Right Edge	Right Edge
		dBm	mW	dBm	mW						
WLAN Main	U-NII-5	9.50	8.91	13.50	22.39	<50	<50	>50	>50	<50	T
	U-NII-6	9.50	8.91	13.50	22.39	<50	<50	>50	>50	<50	T
	U-NII-7	9.50	8.91	13.50	22.39	<50	<50	>50	>50	<50	T
	U-NII-8	9.50	8.91	13.50	22.39	<50	<50	>50	>50	<50	T
WLAN Aux	U-NII-5	9.50	8.91	13.50	22.39	<50	<50	>50	<50	>50	T
	U-NII-6	9.50	8.91	13.50	22.39	<50	<50	>50	<50	>50	T
	U-NII-7	9.50	8.91	13.50	22.39	<50	<50	>50	<50	>50	T
	U-NII-8	9.50	8.91	13.50	22.39	<50	<50	>50	<50	>50	T

T: Tested position

R: Reduced

See Annex G for a more detailed explanation of the separation distance related to the platform.

C.2 Conducted Power Measurements

C.2.1 WLAN 6-7GHz (U-NII)

C.2.1.1.1 6.2GHz (U-NII-5)- Tablet mode

Band	Mode	Data Rate	Ch #	Freq (MHz)	Main Speed	Main Hong-Bo	Tune-up Pwr (dBm)	Aux Speed	Aux Hong-Bo	Tune-up Pwr (dBm)	SAR Test?
U-NII-5	802.11ax	20	1	5955	NR	NR	7.00	NR	NR	7.00	No
	802.11ax	20	45	6175			7.00			7.00	
	802.11ax	20	93	6415			7.00			7.00	
	802.11ax	40	3	5985			9.50			9.50	
	802.11ax	40	43	6165			9.50			9.50	
	802.11ax	40	91	6405			9.50			9.50	
	802.11ax	80	7	5985			9.50			9.50	
	802.11ax	80	39	6145			9.50			9.50	
	802.11ax	80	87	6385			9.50			9.50	
	802.11ax	160	15	6025			9.39			9.22	
	802.11ax	160	47	6185			8.95			9.45	
	802.11ax	160	79	6345			9.37			9.19	

Initial test configuration

1. NR: Not Required

C.2.1.1.2 6.2GHz (U-NII-5)- Notebook mode

Band	Mode	Data Rate	Ch #	Freq (MHz)	Main Speed	Main Hong-Bo	Tune-up Pwr (dBm)	Aux Speed	Aux Hong-Bo	Tune-up Pwr (dBm)	SAR Test?
U-NII-5	802.11ax	20	1	5955	NR	NR	7.00	NR	NR	7.00	No
	802.11ax	20	45	6175			7.00			7.00	
	802.11ax	20	93	6415			7.00			7.00	
	802.11ax	40	3	5985			10.00			10.00	
	802.11ax	40	43	6165			10.00			10.00	
	802.11ax	40	91	6405			10.00			10.00	
	802.11ax	80	7	5985			13.00			13.00	
	802.11ax	80	39	6145			13.00			13.00	
	802.11ax	80	87	6385			13.00			13.00	
	802.11ax	160	15	6025			13.20			13.46	
	802.11ax	160	47	6185			12.97			13.38	
	802.11ax	160	79	6345			13.07			13.47	

Initial test configuration

2. NR: Not Required

C.2.1.1.3 6.5GHz (U-NII-6)- Tablet mode

Band	Mode	Data Rate	Ch #	Freq (MHz)	Main Speed	Main Hong-Bo	Tune-up Pwr (dBm)	Aux Speed	Aux Hong-Bo	Tune-up Pwr (dBm)	SAR Test ?
U-NII-6	802.11ax	20	97	6435	NR	NR	7.00	NR	NR	7.00	No
		20	105	6475			7.00			7.00	
		20	113	6515			7.00			7.00	
	802.11ax	40	99	6445			9.50			9.50	
		40	107	6485			9.50			9.50	
	802.11ax	80	103	6465			9.50			9.50	
		80	119	6545			9.50			9.50	
	802.11ax	160	111	6505	9.32	9.04	9.50	9.15	9.50	9.50	Yes

Initial test configuration

1. NR: Not Required

C2.1.1.4 6.5GHz (U-NII-6)- Notebook mode

Band	Mode	Data Rate	Ch #	Freq (MHz)	Main Speed	Main Hong-Bo	Tune-up Pwr (dBm)	Aux Speed	Aux Hong-Bo	Tune-up Pwr (dBm)	SAR Test ?
U-NII-6	802.11ax	20	97	6435	NR	NR	7.00	NR	NR	7.00	No
		20	105	6475			7.00			7.00	
		20	113	6515			7.00			7.00	
	802.11ax	40	99	6445			10.00			10.00	No
		40	107	6485			10.00			10.00	
	802.11ax	80	103	6465			13.00			13.00	
		80	119	6545			13.00			13.00	
	802.11ax	160	111	6505	13.04	13.46	13.50	13.31	13.44	13.50	Yes

Initial test configuration

2. NR: Not Required

C.2.1.1.5 6.7GHz (U-NII-7)-Tablet mode

Band	Mode	Data Rate	Ch #	Freq (MHz)	Main Speed	Main Hong-Bo	Tune-up Pwr (dBm)	Aux Speed	Aux Hong-Bo	Tune-up Pwr (dBm)	SAR Test ?
U-NII-7	802.11ax	20	117	6535	NR	NR	7.00	NR	NR	7.00	No
		20	149	6695			7.00			7.00	
		20	181	6855			7.00			7.00	
	802.11ax	40	115	6525			9.50			9.50	
		40	147	6685			9.50			9.50	
		40	179	6845			9.50			9.50	
	802.11ax	80	135	6625			9.50			9.50	
		80	151	6705			9.50			9.50	
		80	167	6785			9.50			9.50	
	802.11ax	160	143	6665	9.02	9.42	9.50	9.48	9.38	9.50	Yes
		160	175	6825	9.41	9.31	9.50	9.31	9.36	9.50	

Initial test configuration

1. NR: Not Required

C.2.1.1.6 6.7GHz (U-NII-7)-Notebook mode

Band	Mode	Data Rate	Ch #	Freq (MHz)	Main Speed	Main Hong-Bo	Tune-up Pwr (dBm)	Aux Speed	Aux Hong-Bo	Tune-up Pwr (dBm)	SAR Test ?
U-NII-7	802.11ax	20	117	6535	NR	NR	7.00	NR	NR	7.00	No
		20	149	6695			7.00			7.00	
		20	181	6855			7.00			7.00	
	802.11ax	40	115	6525			10.00			10.00	No
		40	147	6685			10.00			10.00	
		40	179	6845			10.00			10.00	
	802.11ax	80	135	6625			13.00			13.00	
		80	151	6705			13.00			13.00	
		80	167	6785			13.00			13.00	
	802.11ax	160	143	6665	13.29	13.47	13.50	13.29	13.47	13.50	Yes
		160	175	6825	13.46	13.42	13.50	12.97	13.49	13.50	

Initial test configuration

2. NR: Not Required

C2.1.1.7 7.0GHz (U-NII-8)- Tablet mode

Band	Mode	Data Rate	Ch #	Freq (MHz)	Main Speed	Main Hong-Bo	Tune-up Pwr (dBm)	Aux Speed	Aux Hong-Bo	Tune-up Pwr (dBm)	SAR Test ?
8-NII-U	802.11ax	20	185	6875	NR	NR	7.00	NR	NR	7.00	No
		20	209	6995			7.00			7.00	
		20	233	7115			7.00			7.00	
	802.11ax	40	187	6885			9.50			9.50	
		40	227	7085			9.50			9.50	
	802.11ax	80	183	6865			9.50			9.50	
		80	199	6945			9.50			9.50	
		80	215	7025			9.50			9.50	
	802.11ax	160	207	6985	9.02	9.21	9.50	9.29	9.48	9.50	Yes

Initial test configuration

1. NR: Not Required

C.2.1.1.8 7.0GHz (U-NII-8)- Notebook mode

Band	Mode	Data Rate	Ch #	Freq (MHz)	Main Speed	Main Hong-Bo	Tune-up Pwr (dBm)	Aux Speed	Aux Hong-Bo	Tune-up Pwr (dBm)	SAR Test ?
U-NII-8	802.11ax	20	185	6875	NR	NR	7.00	NR	NR	7.00	No
		20	209	6995			7.00			7.00	
		20	233	7115			7.00			7.00	
	802.11ax	40	187	6885			10.00			10.00	No
		40	227	7085			10.00			10.00	
	802.11ax	80	183	6865			10.00			10.00	
		80	199	6945			13.00			13.00	
		80	215	7025			13.00			13.00	
	802.11ax	160	207	6985	13.28	13.30	13.50	13.32	13.49	13.50	Yes

Initial test configuration

2. NR: Not Required

C.3 Tissue Parameters Measurement

Head TSL

Freq. (MHz)	Target Parameters		Measured TSL Parameters		Deviation (%)		Date
	ϵ' (F/m)	σ (S/m)	ϵ' (F/m)	σ (S/m)	ϵ'	σ	
7000.0	31.47	6.63	33.88	6.65	7.66	0.3	2023-03-27

See Annex E for more details.

C.4 System Check Measurements

C.4.1 E-Field

Frequency	Signal Type	Target E-field (V/m)	Measured E-field (V/m)	Deviation (%)	Date
6.5 GHz	Continuous Wave	60.59	66.35	9.49	2023-03-27

The E-fields presented in the System Check Measurements table are Peak values. The target E-field value is obtained by simulation. The maximum target E-field value at 10 mm with 10 dBm (10 mW) source power is 60.59 V/m. The maximum measured E-field value at 10 mm with 10 dBm (10 mW) is 66.35 V/m.

C.4.2 H-Field

Frequency	Signal Type	Target H-field (A/m)	Measured H-field (A/m)	Deviation (%)	Date
6.5 GHz	Continuous Wave	0.17	0.16	-5.88	2023-03-27

The H-fields presented in the System Check Measurements table are Peak values. The target H-field value is obtained by simulation. The maximum target H-field value at 10 mm with 10 dBm (10 mW) source power is 0.17 A/m. The maximum measured E-field value at 10 mm with 10 dBm (10 mW) is 0.16 A/m.

C.4.3 Local Power Density

Frequency	Signal Type	Target Local Power Density (W/m ²)	Measured Local Power Density (W/m ²)	Deviation (%)	Date
6.5 GHz	Continuous Wave	5.12	5.22	1.95	2023-03-27

The Local Power Density presented in the System Check Measurements table are Peak values. The target Local Power Density value is obtained by simulation. The maximum target Local Power Density value at 10 mm with 10 dBm (10 mW) source power is 5.12 W/m². The maximum measured E-field value at 10 mm with 10 dBm (10 mW) is 5.22 W/m².

C.4.4 Averaged Power Density

Frequency	Signal Type	Target Spatially Averaged Power Density (W/m ²)	Measured Spatially Averaged Power Density (W/m ²)	Deviation (%)	Date
6.5 GHz	Continuous Wave	4.93	4.79	-2.84	2023-03-27

The Spatially Averaged Power Density presented in the System Check Measurements table are Peak values. The target Spatially Averaged Power Density value is obtained by simulation. The maximum target Spatially Averaged Power Density value at 10 mm with 10 dBm (10 mW) source power is 4.93 W/m². The maximum measured Spatially Averaged Power Density value at 10 mm with 10 dBm (10 mW) is 4.79 W/m².

See Annex D for more details.

C.4.5 SAR

Head Measurements

Frequency (MHz)	Average	Target SAR (W/kg)	Measured SAR (W/kg)	Forwarded Power (mW)	Deviation to target (%)	Limit (%)	Date
7000	1g	278.0	274.60	25.20	-1.22	±10	2023-03-27
	10g	48.70	48.81		0.23		

C.5 Test Results

C.5.1 SAR - 802.11ax – 6.2 GHz – U-NII-5

Antenna Manufacturer	Mode	Data rate	BW (MHz)	Channel Number	Freq (MHz)	Test position mode	Antenna	Scaling Factor (dB)	Measured SAR 1g. (W/kg)	Reported SAR 1g (W/Kg)	SAR 10g (W/kg) Measured	*Estimated epithelial PD (W/m ²)		No Plot
												1cm ²	4cm ²	
Speed	802.11 ax	HE 0	160	15	6025	Laptop	Aux	0.12	0.42	0.44	0.16			
				79	6345			0.17	0.34	0.35	0.12			
				15	6025		Main	0.30	0.56	0.60	0.21			
				79	6345			0.43	0.51	0.56	0.19			
				15	6025	Top Edge	Aux	0.28	0.00	0.00	0.00			
				79	6345			0.31	0.00	0.00	0.00			
				15	6025		Main	0.11	0.00	0.00	0.00			
				79	6345			0.13	0.00	0.00	0.00			
				15	6025	Left Edge	Aux	0.28	0.54	0.58	0.12			
				79	6345			0.31	0.53	0.57	0.11			
				15	6025	Right Edge	Main	0.11	0.64	0.66	0.14			
				79	6345			0.13	0.73	0.75	0.16	7.26	3.85	1
Hong-Bo	802.11 ax	HE 0	160	15	6025	Laptop	Aux	0.02	0.50	0.50	0.19			
				79	6345			0.13	0.33	0.34	0.10			
				15	6025		Main	0.04	0.51	0.51	0.15			
				79	6345			0.03	0.29	0.29	0.09			
				15	6025	Top Edge	Aux	0.05	0.01	0.01	0.00			
				79	6345			0.20	0.02	0.02	0.01			
				15	6025		Main	0.21	0.00	0.00	0.00			
				79	6345			0.21	0.00	0.00	0.00			
				15	6025	Left Edge	Aux	0.05	0.69	0.70	0.14			
				79	6345			0.20	0.62	0.65	0.12			
				15	6025	Right Edge	Main	0.21	0.17	0.18	0.05			
				79	6345			0.21	0.02	0.03	0.01			

* For reference purposes only, not specifically for compliance, the estimated absorbed (epithelial) power density derived from the measured SAR is shown

C.5.2 SAR - 802.11ax – 6.5 GHz – U-NII-6

Antenna Manufacturer	Mode	Data rate	BW (MHz)	Channel Number	Freq (MHz)	Test position mode	Ant	Scaling Factor (dB)	Measured SAR 1g. (W/kg)	Reported SAR 1g (W/Kg)	SAR 10g (W/kg) Measured	*Estimated epithelial PD (W/m ²)		No Plot
												1cm ²	4cm ²	
Speed	802.11 ax	HE 0	160	111	6505	Laptop	Aux	0.19	0.39	0.40	0.14			
							Main	0.46	0.60	0.67	0.22			
						Top Edge	Aux	0.35	0.00	0.00	0.00			
							Main	0.18	0.00	0.00	0.00			
						Left Edge	Aux	0.35	0.54	0.59	0.11			
						Right Edge	Main	0.18	0.79	0.82	0.17	7.89	4.10	2
	Hong-Bo	802.11 ax	HE 0	160	111	Laptop	Aux	0.06	0.30	0.30	0.09			
							Main	0.04	0.41	0.42	0.15			
						Top Edge	Aux	0.00	0.02	0.02	0.01			
							Main	0.46	0.00	0.00	0.00			
						Left Edge	Aux	0.00	0.28	0.58	0.11			
						Right Edge	Main	0.46	0.12	0.13	0.03			

* For reference purposes only, not specifically for compliance, the estimated absorbed (epithelial) power density derived from the measured SAR is shown

C.5.3 SAR - 802.11ax – 6.7 GHz – U-NII-7

Antenn a Manufa cturer	Mode	Dat a rat e	BW (MHz)	Chann el Numb er	Freq (MHz)	Test position mode	Ant	Scaling Factor (dB).	Measure d SAR 1g. (W/kg)	Reported SAR 1g (W/Kg)	SAR 10g (W/kg) Measured	*Estimated epithelial PD (W/m2)		No Plot
												1cm2	4cm2	
Speed	802.11 ax	HE 0	160	143	6665	Laptop	Aux	0.21	0.39	0.41	0.13			
				175	6825		Main	0.04	0.59	0.60	0.21			
				143	6665	Top Edge	Aux	0.02	0.00	0.00	0.00			
				175	6825		Main	0.09	0.00	0.00	0.00			
				143	6665	Left Edge	Aux	0.02	0.61	0.61	0.13			
				175	6825	Right Edge	Main	0.09	0.74	0.76	0.17	7.42	3.87	3
Hong-Bo	802.11 ax	HE 0	160	175	6825	Laptop	Aux	0.01	0.37	0.38	0.12			
				143	6665		Main	0.03	0.40	0.40	0.14			
				143	6665	Top Edge	Aux	0.12	0.02	0.02	0.01			
				143	6665		Main	0.08	0.00	0.00	0.00			
				143	6665	Left Edge	Aux	0.12	0.41	0.43	0.08			
				143	6665	Right Edge	Main	0.08	0.10	0.10	0.03			

* For reference purposes only, not specifically for compliance, the estimated absorbed (epithelial) power density derived from the measured SAR is shown

C.5.4 SAR - 802.11ax - 7.0 GHz - U-NII-8

Antenna Manufacturer	Mode	Data rate	BW (MHz)	Channel Number	Freq (MHz)	Test position mode	Ant	Scaling Factor (dB)	Measured SAR 1g. (W/kg)	Reported SAR 1g (W/kg)	SAR 10g (W/kg) Measured	*Estimated epithelial PD (W/m ²)		No Plot
												1cm ²	4cm ²	
Speed	802.11 ax	HE 0	160	207	6985	Laptop	Aux	0.18	0.39	0.41	0.13			
							Main	0.22	0.57	0.60	0.20			
						Top Edge	Aux	0.21	0.00	0.00	0.00			
							Main	0.48	0.00	0.00	0.00			
						Left Edge	Aux	0.21	0.58	0.61	0.11			
							Main	0.48	0.75	0.84	0.16	7.51	3.90	4
	Hong-Bo	802.11 ax	HE 0	160	207	Laptop	Aux	0.01	0.28	0.28	0.09			
							Main	0.20	0.08	0.09	0.03			
						Top Edge	Aux	0.02	0.00	0.00	0.00			
							Main	0.29	0.00	0.00	0.00			
						Left Edge	Aux	0.02	0.13	0.13	0.03			
							Main	0.29	0.07	0.08	0.02			

* For reference purposes only, not specifically for compliance, the estimated absorbed (epithelial) power density derived from the measured SAR is shown

C.5.5 Power Density - 802.11ax – 6.2 GHz – U-NII-5

Ant.	Mode Data rate	BW (MHz)	Ch #	Freq (MHz)	Position	*Uncertainty Cor. Factor	PStot avg [W/m ²] 1cm ²	**C-PStot avg [W/m ²] 1cm ²	PStot avg [W/m ²] 4cm ²	C-PStot avg [W/m ²] 4cm ²	EM E [V/m]	EM H [A/m]	Plot #
Chain B Speed	802.11 ax	160	15	6025	Right Edge	1.55	2.51	3.89	2.03	3.15	83.30	0.30	
			79	6345	Right Edge	1.55	1.87	2.90	1.51	2.34	81.00	0.23	
Chain A Hong-Bo	802.11 ax	160	15	6025	Left Edge	1.55	3.68	5.70	2.27	3.52	71.10	0.28	
			79	6345	Left Edge	1.55	4.29	6.65	2.32	3.60	85.00	0.44	1

* The correction factor uncertainty in dB corresponds to the difference between the actual uncertainty and the 30% target value, as per the TCB Workshop Oct 20

**C-PStot = Compensated PStot

C.5.6 Power Density - 802.11ax – 6.5 GHz – U-NII-6

Ant.	Mode Data rate	BW (MHz)	Ch #	Freq (MHz)	Position	Uncertainty Cor. Factor	PStot avg [W/m ²] 1cm ²	C-PStot avg [W/m ²] 1cm ²	PStot avg [W/m ²] 4cm ²	C-PStot avg [W/m ²] 4cm ²	EM E [V/m]	EM H [A/m]	Plot #
Chain B Speed	802.11ax	160	111	6505	Right Edge	1.55	3.64	5.64	2.72	4.22	85.60	0.31	2
Chain A Hong-Bo	802.11ax	160	111	6505	Left Edge	1.55	1.54	2.39	0.89	1.38	86.20	0.40	

C.5.7 Power Density - 802.11ax – 6.7 GHz – U-NII-7

Ant.	Mode Data rate	BW (MHz)	Ch #	Freq (MHz)	Position	Uncertainty Cor. Factor	PStot avg [W/m ²] 1cm ²	C-PStot avg [W/m ²] 1cm ²	PStot avg [W/m ²] 4cm ²	C-PStot avg [W/m ²] 4cm ²	EM E [V/m]	EM H [A/m]	Plot #
Chain B Speed	802.11ax	160	175	6825	Right Edge	1.55	3.10	4.81	2.40	3.72	68.00	0.25	3
Chain A Hong-Bo	802.11ax	160	143	6665	Left Edge	1.55	2.48	3.84	1.67	2.59	80.50	0.36	

C.5.8 Power Density - 802.11ax – 7.0 GHz – U-NII-8

Ant.	Mode Data rate	BW (MHz)	Ch #	Freq (MHz)	Position	Uncertainty Cor. Factor	PStot avg [W/m ²] 1cm ²	C-PStot avg [W/m ²] 1cm ²	PStot avg [W/m ²] 4cm ²	C-PStot avg [W/m ²] 4cm ²	EM E [V/m]	EM H [A/m]	Plot #
Chain B Speed	802.11ax	160	207	6985	Right Edge	1.55	2.22	2.22	2.18	3.38	69.00	0.27	4
Chain A Hong-Bo	802.11ax	160	207	6985	Left Edge	1.55	1.05	1.63	0.67	1.04	40.10	0.17	

C.5.9 Measurement Variability

According to FCC OET KDB 865664, SAR Measurement variability is assessed when the maximum initial measured SAR is ≥ 0.8 W/kg for a certain band mode.

As all measured values are under both limits, no variability is required

C.5.10 Simultaneous Transmission Evaluation – SAR

According to FCC OET KDB 447498 D04 v01, when the sum of 1g SAR for all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration.

All the values stated in the table below are the worst case found for standalone measurement with disregard of the transmission mode or channel where the worst case was found

Antenna	Position	Highest Reported SAR (1g) (W/Kg)	
		WLAN 6GHz	Bluetooth*
Chain A	Laptop	0.50	0.11
Chain B		0.67	
Chain A	Top Edge	0.02	0.01
Chain B		0.00	
Chain A	Left Edge	0.70	0.40
Chain B		0.40*	
Chain A	Right Edge	0.40*	0.00
Chain B		0.84	

For BT* refer to the following report :230214-01.TR01

*According to FCC OET KDB 447498, when standalone test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated to 0.4 W/Kg for 1-g SAR when the test separation is > 50mm in order to determine simultaneous transmission test exclusion.

Position	Simultaneous Tx Antenna Combination		Σ SAR 1g (W/kg)	Limit (W/kg)
	Chain A	Chain B		
Laptop	WLAN 6GHz	WLAN 6GHz	1.17	1.6
	WLAN 6GHz + BT	WLAN 6GHz	1.28	
	BT	WLAN 6GHz	0.78	
Top Edge	WLAN 6GHz	WLAN 6GHz	0.02	
	WLAN 6GHz + BT	WLAN 6GHz	0.03	
	BT	WLAN 6GHz	0.01	
Left Edge	WLAN 6GHz	WLAN 6GHz	1.10	
	WLAN 6GHz + BT	WLAN 6GHz	1.50	
	BT	WLAN 6GHz	0.80	
Right Edge	WLAN 6GHz	WLAN 6GHz	1.24	
	WLAN 6GHz + BT	WLAN 6GHz	1.24	
	BT	WLAN 6GHz	0.84	

Considering the results described above and according to the simultaneous transmission evaluation exclusions described in FCC OET KDB 447498, no enlarged zoom scan measurements are required

Annex D. Test System Plots

1. U-NII-5 - 802.11ax, CH79, Main– Position Right Edge (SAR) -SPEED.....	44
2. U-NII-6 - 802.11ax, CH111, Main – Position Right Edge (SAR) -SPEED.....	45
3. U-NII-7 - 802.11ax, CH175, Main– Position Right Edge (SAR) -SPEED.....	46
4. U-NII-8 - 802.11ax, CH207, Main – Position Right Edge (SAR) -SPEED.....	47
5. U-NII-5 - 802.11ax, CH79, Aux– Position Left-Edge (PD)- Hong-Bo	48
6. U-NII-6 - 802.11ax, CH111, Main– Position Right-Edge (PD)- SPEED	49
7. U-NII-7 - 802.11ax, CH175, Main –Right-Edge (PD) SPEED.....	50
8. U-NII-8 - 802.11ax, CH207, Main – Position Right Edge (PD) SPEED	51
9. Power Density System Check From 6500MHz.....	52
10. SAR System Check From 7000MHz.....	55

1. U-NII-5 - 802.11ax, CH79, Main- Position Right Edge (SAR) -SPEED

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
ThinkBook Plus G4 IRU,Lenovo	370.0 x 260.0 x 18.0	1788708100104	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE RIGHT, 0.00	U-NII-5	WLAN, 10755-AAC	6345.0, 79	5.5	5.87	34.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	HBBL-600-10000, 2023-Mar-27	EX3DV4 - SN7604, 2022-08-23	DAE4ip Sn1705, 2022-04-28

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	3.1 x 3.1 x 1.2
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.2
MAIA Surface Detection	Confirmed by Maia	Confirmed by Maia
Scan Method	VMS + 6p	VMS + 6p
	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-03-27, 17:43	2023-03-27, 18:00
psSAR1g [W/Kg]	0.528	0.726
psSAR10g [W/Kg]	0.144	0.162
Power Drift [dB]	0.02	0.10
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive only	Positive only
M2/M1 [%]		54.6
Dist 3dB Peak [mm]		4.2

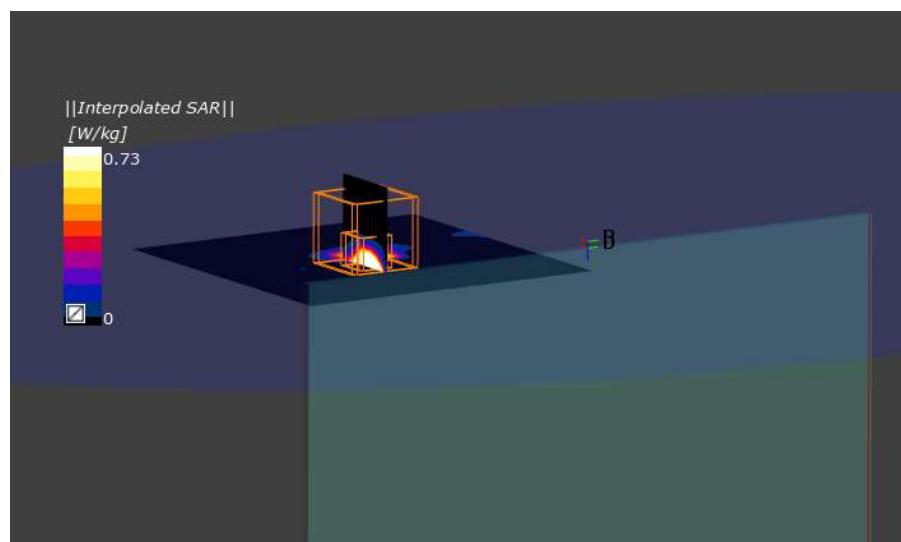

2. U-NII-6 - 802.11ax, CH111, Main – Position Right Edge (SAR) -SPEED

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
ThinkBook Plus G4 IRU Lenovo	370.0 x 260.0 x 18.0	1788708100104	Convertible PC

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE RIGHT, 0.00	U-NII-6	WLAN, 10755-AAC	6505.0, 111	5.5	6.07	34.5

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	HBBL-600-10000 , 2023-Mar-27	EX3DV4 - SN7604, 2022-08-23	DAE4ip Sn1705, 2022-04-28

Scan Setup

	Area Scan	Zoom Scan	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 120.0	22.0 x 22.0 x 22.0		
Grid Steps [mm]	10.0 x 10.0	3.4 x 3.4 x 1.4		
Sensor Surface [mm]	3.0	1.4		
Graded Grid	Yes	Yes		
Grading Ratio	1.5	1.4		
MAIA	Confirmed by Maia	Confirmed by Maia		
Surface Detection	VMS + 6p	VMS + 6p		
Scan Method	Measured	Measured		
			Date	2023-03-27, 15:17
			psSAR1g [W/Kg]	0.582
			psSAR10g [W/Kg]	0.159
			Power Drift [dB]	0.13
			Power Scaling	Disabled
			Scaling Factor [dB]	Disabled
			TSL Correction M2/M1 [%]	Positive only
			Dist 3dB Peak [mm]	Positive only
				41.9
				3.5

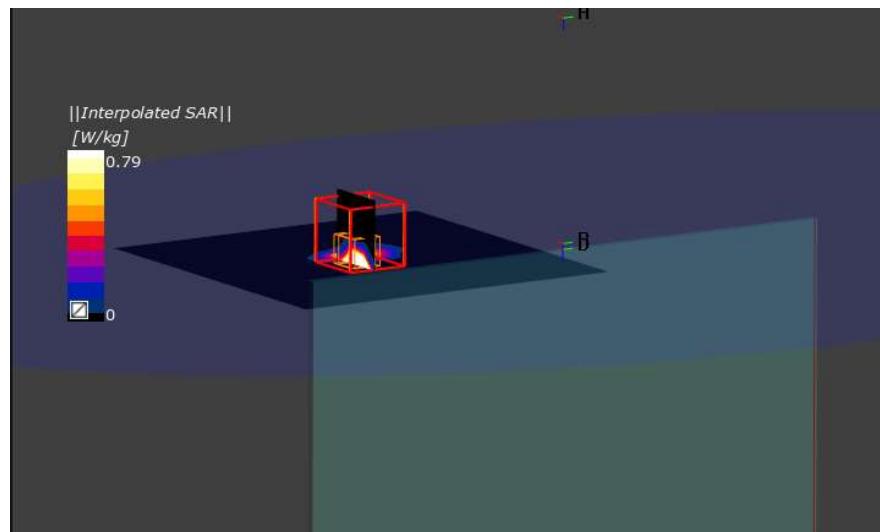

3. U-NII-7 - 802.11ax, CH175, Main– Position Right Edge (SAR) -SPEED

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
ThinkBook Plus G4 IRU Lenovo	370.0 x 260.0 x 18.0	1788708100104	Convertible PC

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE RIGHT, 0.00	U-NII-7	WLAN, 10755-AAC	6825.0, 175	5.5	6.45	34.1

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	HBBL-600-10000 , 2023-Mar-27	EX3DV4 - SN7604, 2022-08-23	DAE4ip Sn1705, 2022-04-28

Scan Setup

	Area Scan	Zoom Scan	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 120.0	22.0 x 22.0 x 22.0	Date	2023-03-27, 15:58
Grid Steps [mm]	10.0 x 10.0	3.4 x 3.4 x 1.4	psSAR1g [W/Kg]	0.546
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/Kg]	0.147
Graded Grid	Yes	Yes	Power Drift [dB]	0.08
Grading Ratio	1.5	1.4	Power Scaling	Disabled
MAIA	Confirmed by Maia	Confirmed by Maia	Scaling Factor [dB]	0.17
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	Disabled
Scan Method	Measured	Measured	M2/M1 [%]	Positive only
			Dist 3dB Peak [mm]	Positive only
				39.9
				3.4

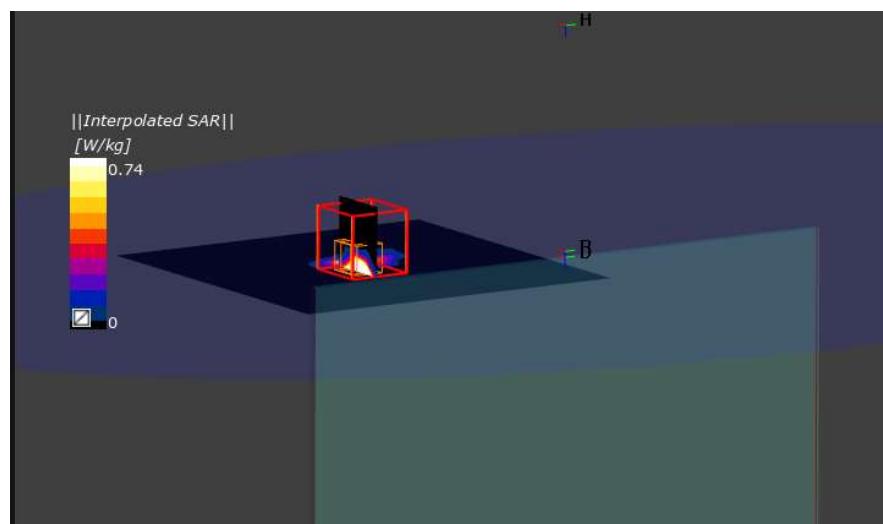

4. U-NII-8 - 802.11ax, CH207, Main – Position Right Edge (SAR) -SPEED

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
ThinkBook Plus G4 IRU Lenovo	370.0 x 260.0 x 18.0	1788708100104	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE RIGHT, 0.00	U-NII-8	WLAN, 10755-AAC	6985.0, 207	5.5	6.63	33.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	HBBL-600-10000 , 2023-Mar-27	EX3DV4 - SN7604, 2022-08-23	DAE4ip Sn1705, 2022-04-28

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 120.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Confirmed by Maia	Confirmed by Maia
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-03-27, 16:42	2023-03-27, 16:53
psSAR1g [W/Kg]	0.543	0.752
psSAR10g [W/Kg]	0.145	0.165
Power Drift [dB]	-0.07	-0.15
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive only	Positive only
M2/M1 [%]		
Dist 3dB Peak [mm]	39.4	4.1

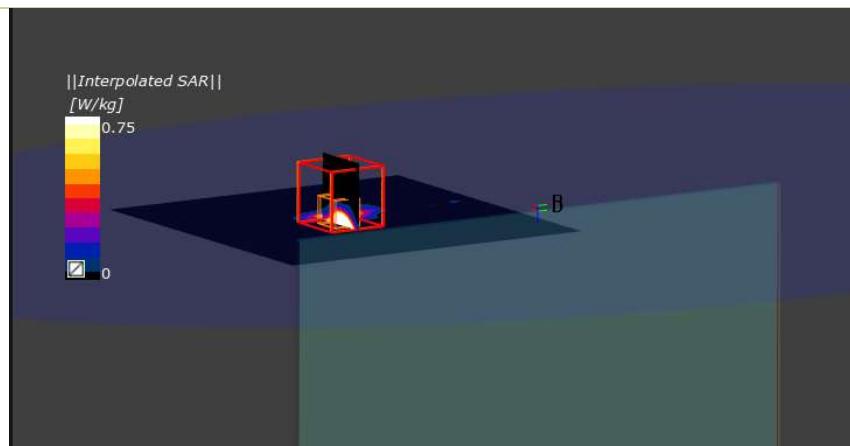

5. U-NII-5 - 802.11ax, CH79, Aux– Position Left–Edge (PD)- Hong-Bo

DUT: ThinkBook Plus G4 IRU w AX211D2W; Type: Hong-Bo- Antenna P/N: DC330020L10

Signal Source: modulation Custom Channel for 802.11ax, level 13.50 dBm.

Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 0 \text{ kg/m}^3$

Phantom section: Table Section

Measurement Standard: DASY6 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:


- Probe: EUmmW – SN9366; ConvF(1, 1, 1); Calibrated: 2022-05-17;
 - Modulation Compensation:
- Sensor-Surface : 0mm (Fix Surface), $z = 2.5 \text{ mm}$
- Electronics: DAE4 Sn1704; Calibrated: 2022-04-29;
- Phantom: Cover; Type: SPEAG Phantom Cover;
- cDASY6 5G Module v2.4
- Test Date: 2023-03-30

Distance-2.5mm:

Measurement Resolution = $\lambda/20 \text{ mm}$

Measurement Scan area = 120 mm x 120 mm

The plots below show the average PStot (1cm²), PStot (4cm²) the E-field and the H Field

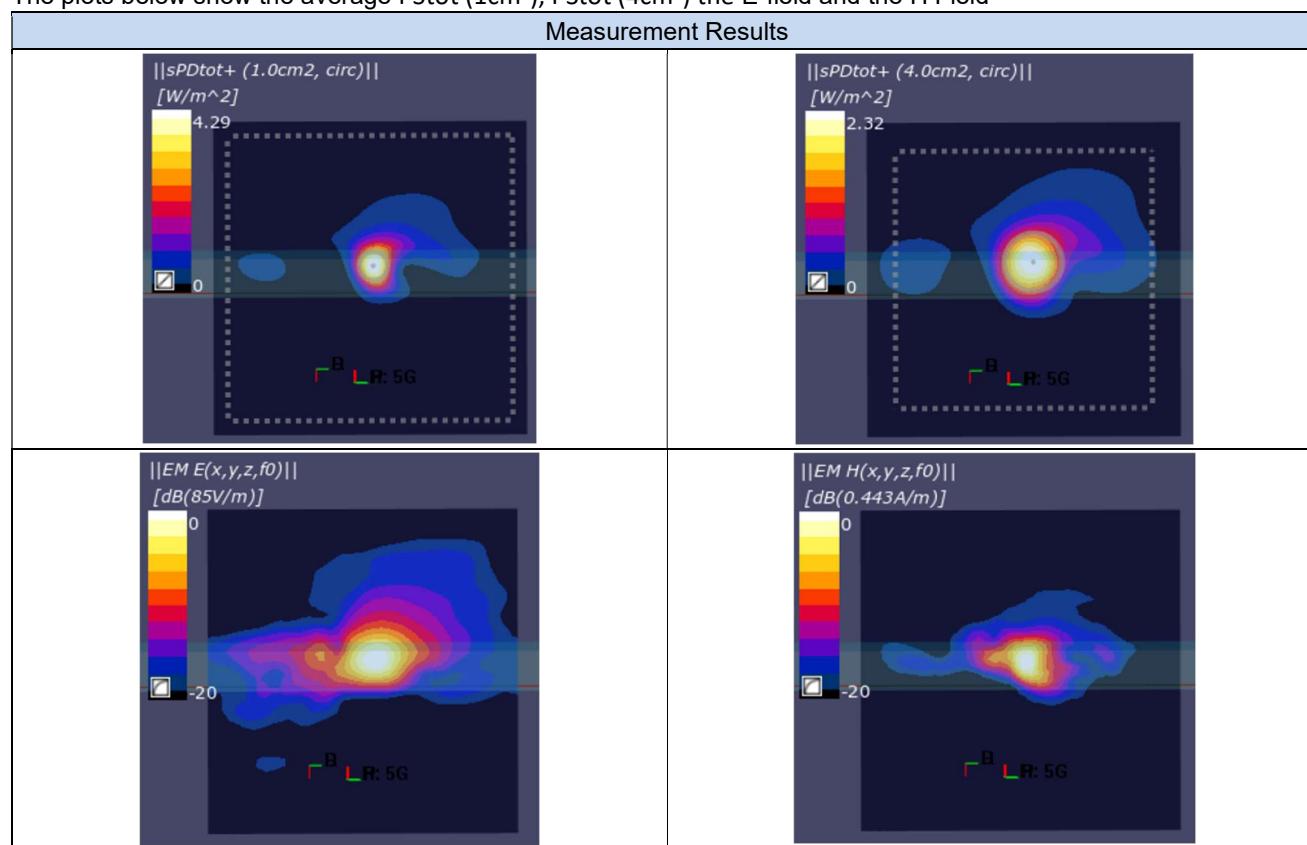

6. U-NII-6 - 802.11ax, CH111, Main– Position Right-Edge (PD)- SPEED

DUT: ThinkBook Plus G4 IRU w AX211D2W; Type: Speed - Antenna P/N: DC330020K00

Signal Source: modulation Custom Channel for 802.11ax, level 13.50 dBm.

Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 0 \text{ kg/m}^3$

Phantom section: Table Section

Measurement Standard: DASY6 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:


- Probe: EUmmW – SN9366; ConvF(1, 1, 1); Calibrated: 2022-05-17;
 - Modulation Compensation:
- Sensor-Surface : 0mm (Fix Surface), $z = 2.5 \text{ mm}$
- Electronics: DAE4 Sn1704; Calibrated: 2022-04-29;
- Phantom: Cover; Type: SPEAG Phantom Cover;
- cDASY6 5G Module v2.4
- Test Date: 2023-03-29

Distance-2.5mm:

Measurement Resolution = $\lambda/20 \text{ mm}$

Measurement Scan area = 120 mm x 120 mm

The plots below show the average PStot (1cm²), PStot (4cm²) the E-field and the H Field

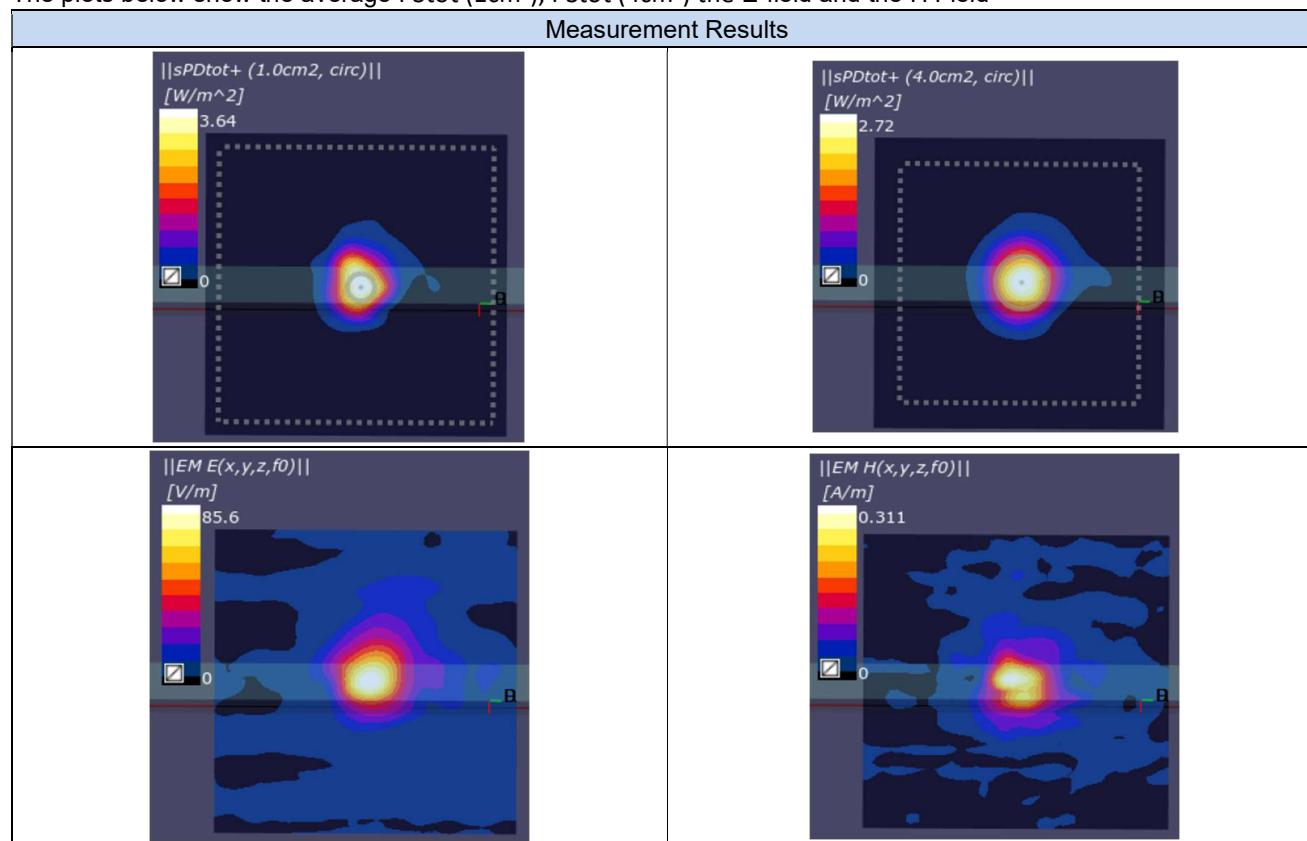

7. U-NII-7 - 802.11ax, CH175, Main –Right-Edge (PD) SPEED

DUT: ThinkBook Plus G4 IRU w AX211D2W; Type: Speed - Antenna P/N: DC330020K00

Signal Source: modulation Custom Channel for 802.11ax, level 13.50 dBm.

Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 0 \text{ kg/m}^3$

Phantom section: Table Section

Measurement Standard: DASY6 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:


- Probe: EUmmW – SN9366; ConvF(1, 1, 1); Calibrated: 2022-05-17;
 - Modulation Compensation:
- Sensor-Surface : 0mm (Fix Surface), $z = 2.5 \text{ mm}$
- Electronics: DAE4 Sn1704; Calibrated: 2022-04-29;
- Phantom: Cover; Type: SPEAG Phantom Cover;
- cDASY6 5G Module v2.4
- Test Date: 2023-03-29

Distance-2.5mm:

Measurement Resolution = $\lambda/20 \text{ mm}$

Measurement Scan area = 120 mm x 120 mm

The plots below show the average PStot (1cm²), PStot (4cm²) the E-field and the H Field

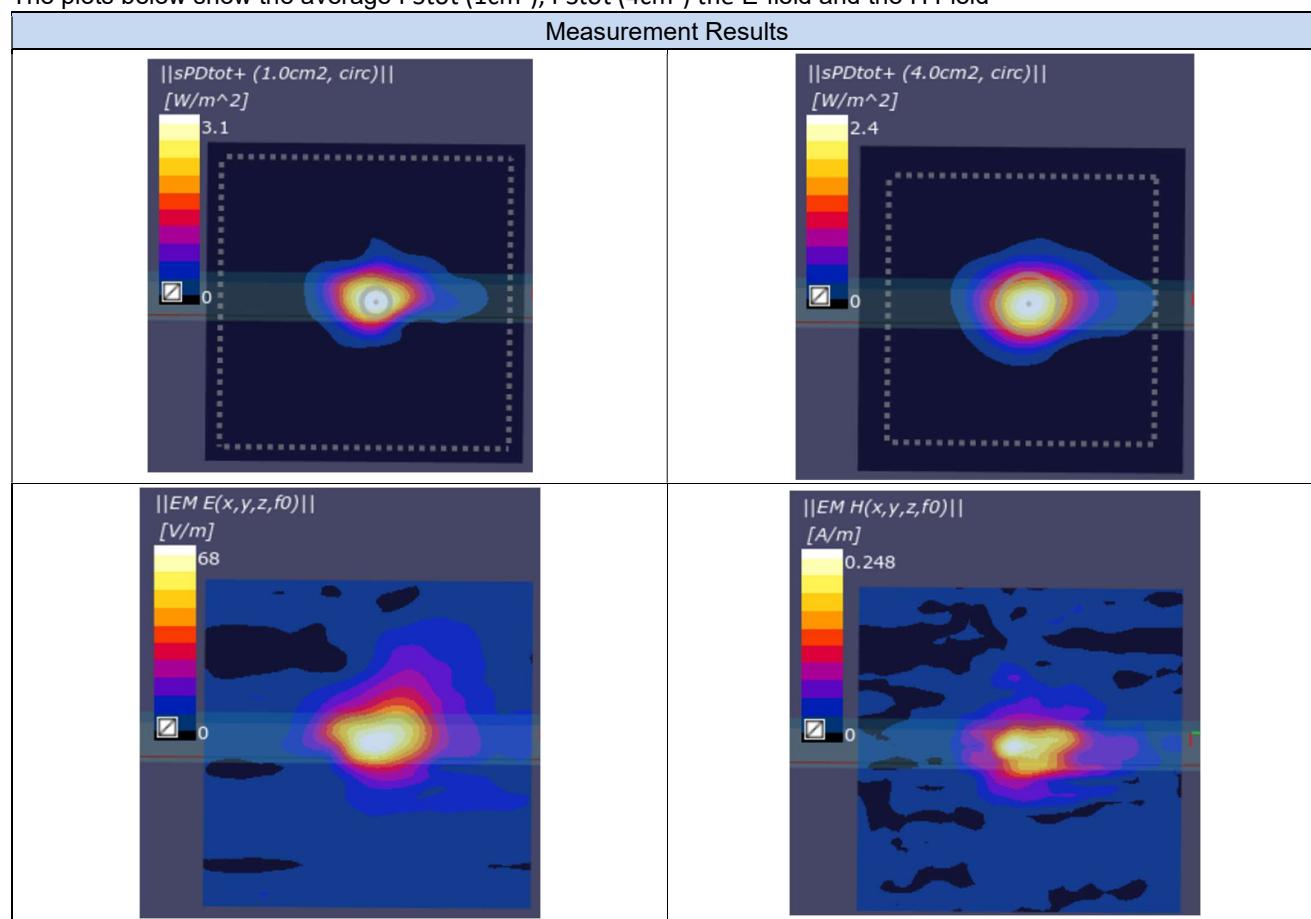

8. U-NII-8 - 802.11ax, CH207, Main – Position Right Edge (PD) SPEED

DUT: ThinkBook Plus G4 IRU w AX211D2W; Type: Speed - Antenna P/N: DC330020K00

Signal Source: modulation Custom Channel for 802.11ax, level 13.50 dBm.

Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 0 \text{ kg/m}^3$

Phantom section: Table Section

Measurement Standard: DASY6 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:


- Probe: EUmmW – SN9366; ConvF(1, 1, 1); Calibrated: 2022-05-17;
 - Modulation Compensation:
- Sensor-Surface : 0mm (Fix Surface), z = 2.5 mm
- Electronics: DAE4 Sn1704; Calibrated: 2022-04-29;
- Phantom: Cover; Type: SPEAG Phantom Cover;
- cDASY6 5G Module v2.4
- Test Date: 2023-03-30

Distance-2.5mm:

Measurement Resolution = $\lambda/20 \text{ mm}$

Measurement Scan area = 120 mm x 120 mm

The plots below show the average PStot (1cm²), PStot (4cm²) the E-field and the H Field

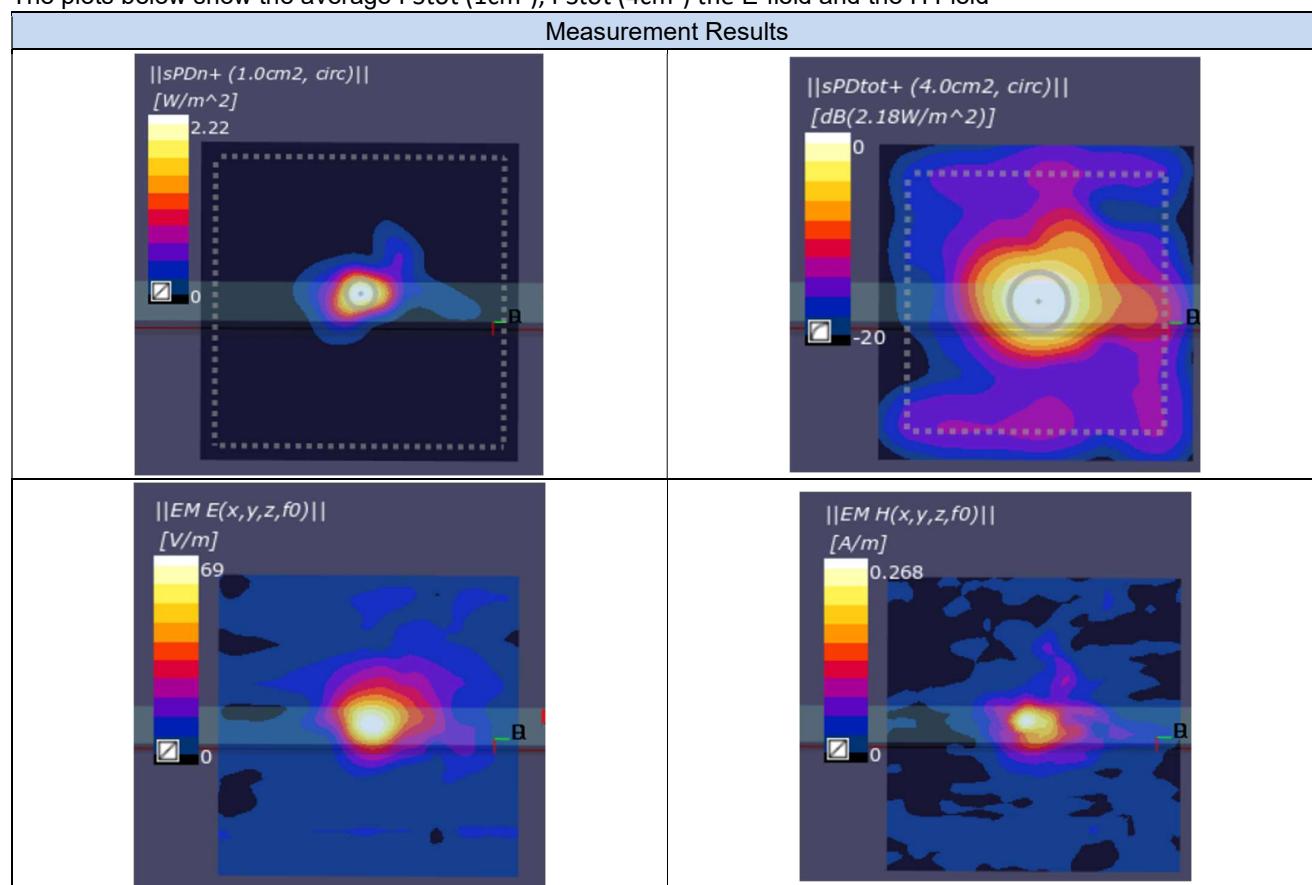

9. Power Density System Check From 6500MHz

DUT: Horn reference source; Type: PE9859/SF-15;

Signal Source: modulation CW, level 10 dBm.

Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 0 \text{ kg/m}^3$

Phantom section: Table Section

Measurement Standard: DASY6 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:


- Probe: EUmmW – SN9366; ConvF(1, 1, 1); Calibrated: 2022-05-17;
 - Modulation Compensation:
- Sensor-Surface : 0mm (Fix Surface), $z = 2.5 \text{ mm}$
- Electronics: DAE4 Sn1704; Calibrated: 2022-04-29;
- Phantom: Cover; Type: SPEAG Phantom Cover;
- cDASY6 5G Module v2.4
- Test Date: 2023-03-27

Distance-10mm/Measure Horn reference source (86.9x63.5):


Measurement Resolution = $\lambda/4 \text{ mm}$

Measurement Scan area = 200 mm x 200 mm

The plots below show the comparison between the Numerical Modeling results and the system check measurement results in terms of E-field, H Field, single point power density and Avg Power density 1cm².

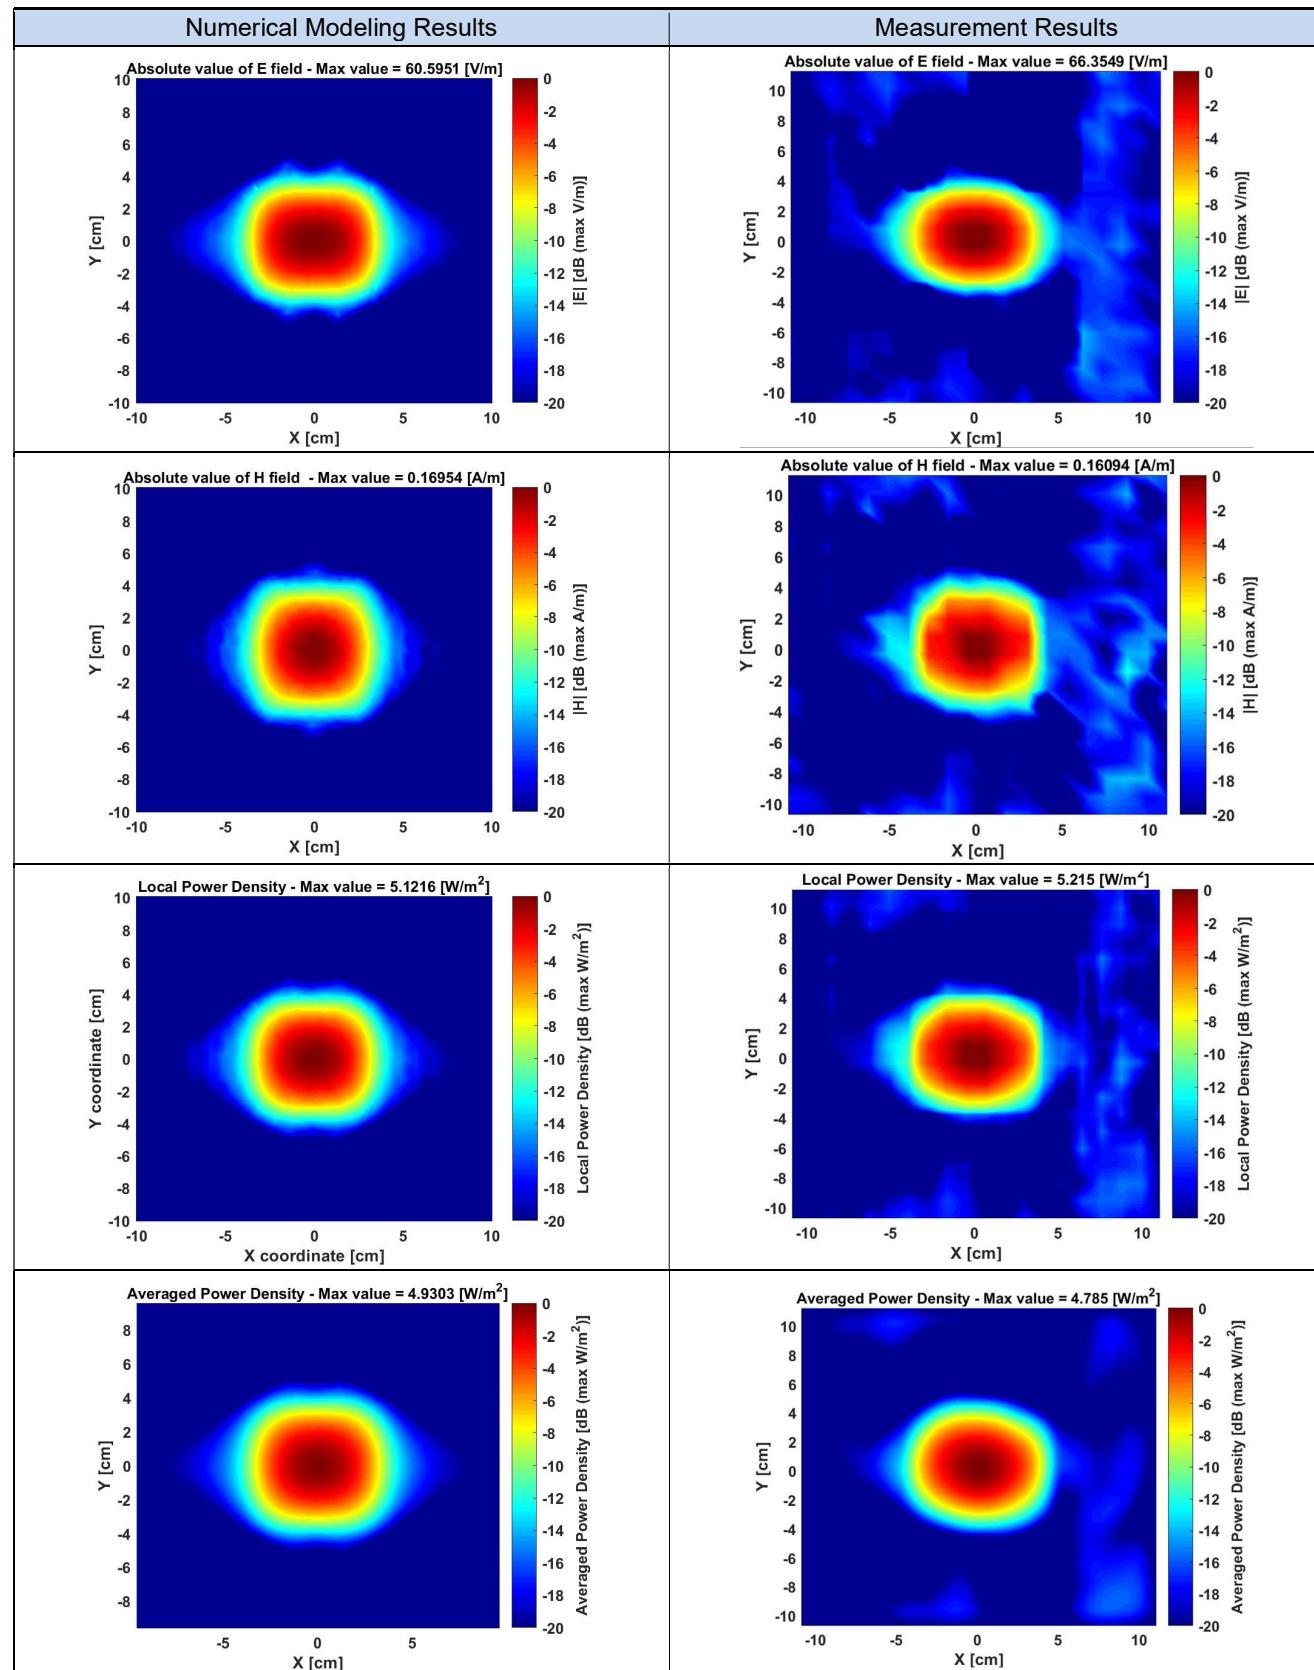

The plots below show the comparison between the numerical modeling and the system check results in terms of normalized E-field distribution and the 1D variation along the two axis of the maximum.

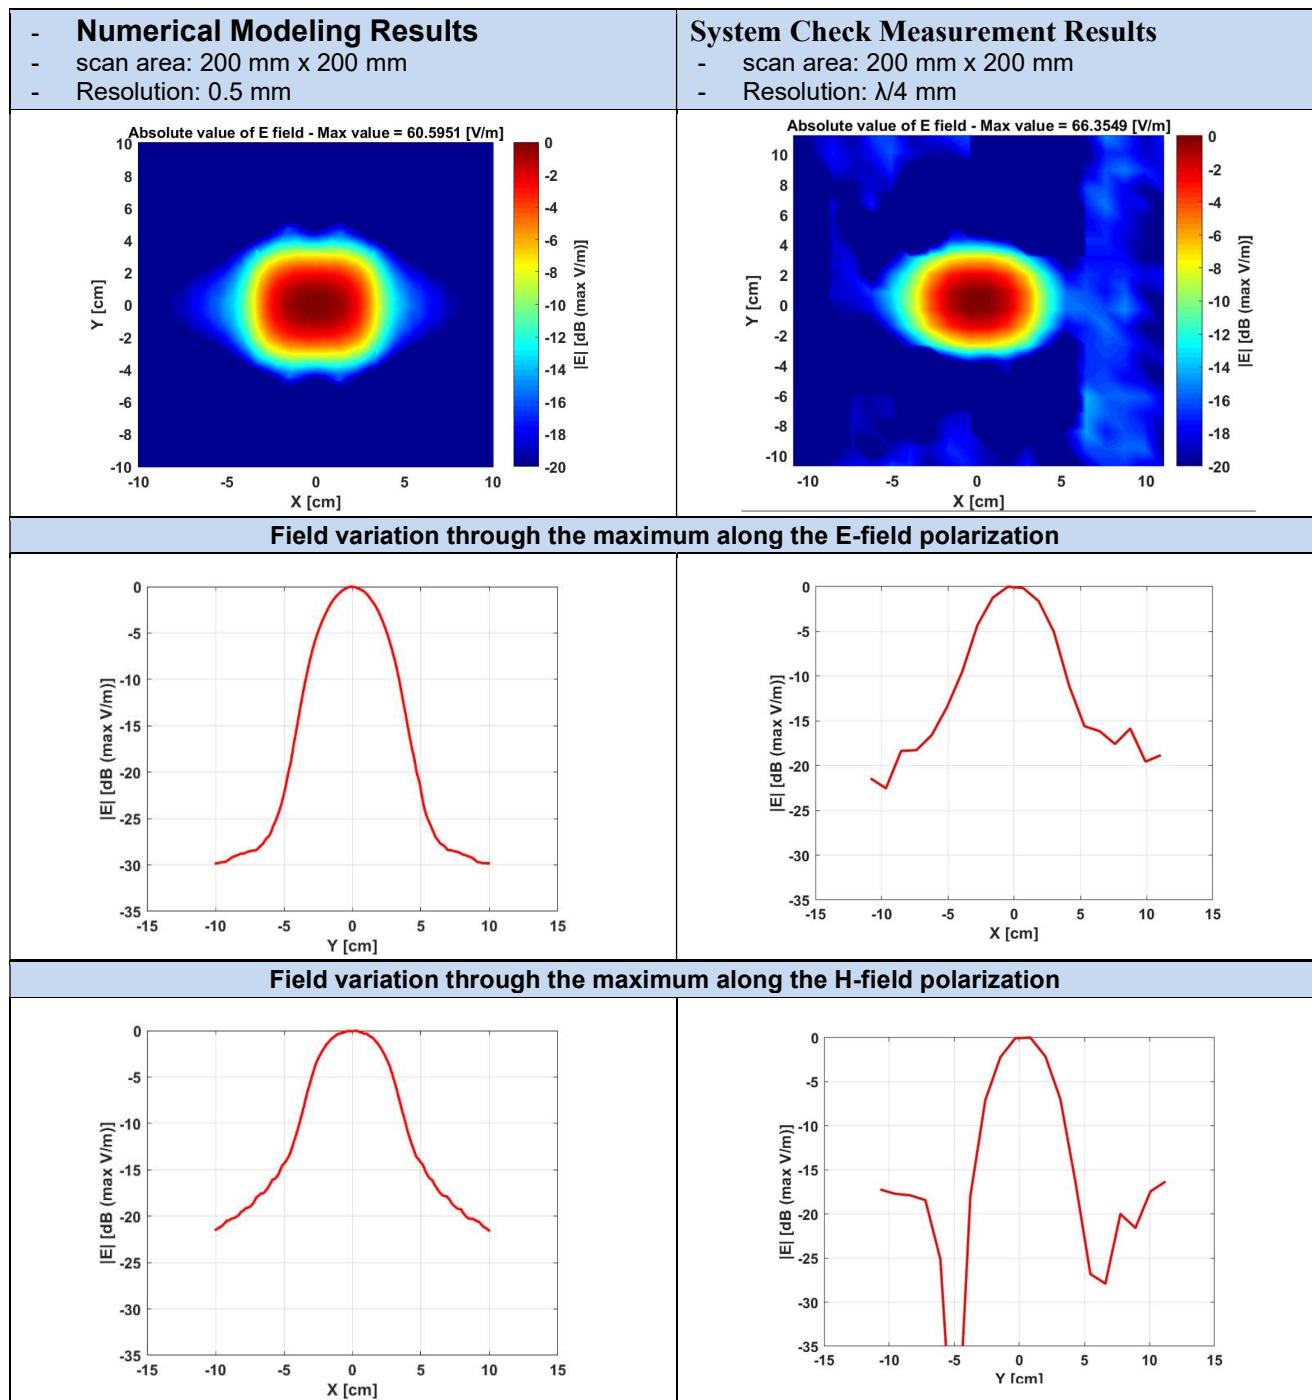

10. SAR System Check From 7000MHz

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
D7.0GHzV2, Speag	50.0 x 10.0 x 8.0	1008	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	,	,	0--	7000.0, 0	5.5	6.65	33.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	HBBL-600-10000 , 2023-Mar-27	EX3DV4 - SN7604, 2022-08-23	DAE4ip Sn1705, 2022-04-28

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	45.0 x 90.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	7.5 x 7.5	3.0 x 3.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Confirmed by Maia	Confirmed by Maia
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-03-27, 10:12	2023-03-27, 10:23
psSAR1g [W/Kg]	6.36	6.92
psSAR10g [W/Kg]	1.26	1.23
Power Drift [dB]	-0.13	-0.07
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction M2/M1 [%]	Positive only	Positive only
Dist 3dB Peak [mm]	47.6	4.8

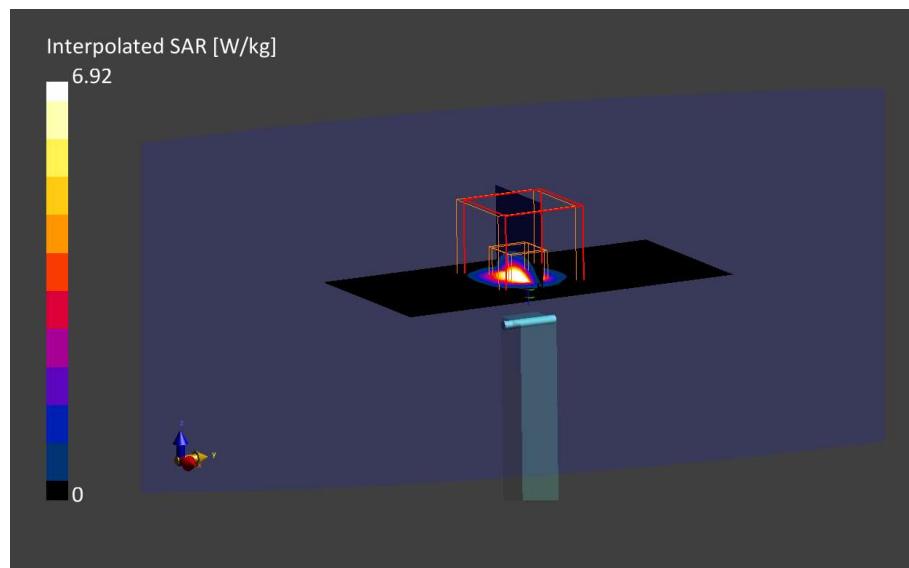

Annex E. TSL Dielectric Parameters

E.1 Head WiFi 6E 7000MHz

Freq.(MHz)	Target		2023-03-27	
	$\epsilon'(F/m)$	$\sigma(S/m)$	$\epsilon'1(F/m)$	$\sigma1(S/m)$
6000.0	33.03	5.38	35.07	5.48
6050.0	33.01	5.45	35.01	5.54
6100.0	32.98	5.53	34.95	5.59
6150.0	32.93	5.60	34.89	5.65
6200.0	32.86	5.67	34.83	5.71
6250.0	32.79	5.73	34.77	5.77
6300.0	32.71	5.80	34.70	5.83
6350.0	32.63	5.87	34.64	5.89
6400.0	32.55	5.94	34.58	5.95
6450.0	32.45	6.02	34.52	6.01
6500.0	32.32	6.08	34.46	6.07
6550.0	32.20	6.15	34.40	6.13
6600.0	32.07	6.21	34.34	6.19
6650.0	31.98	6.27	34.29	6.25
6700.0	31.91	6.33	34.23	6.30
6750.0	31.86	6.38	34.17	6.36
6800.0	31.79	6.43	34.11	6.42
6850.0	31.73	6.47	34.05	6.48
6900.0	31.65	6.53	33.99	6.53
6950.0	31.56	6.58	33.94	6.59
7000.0	31.47	6.63	33.88	6.65

