

Regulatory WLAN Antenna Information (Template)

English Language Required for Intel Regulatory Review / Approval

(OEM/ODM or antenna vendor is required to complete this document with platform antenna information.

Remove Intel references and make this your own document)

Platform information											
Brand	ODM		****End product model name		Intel platform (ex: Yes, No or NA)		Platform type (ex: regular NB, convertible PC, AIO...etc)		*SAR minimum separation (mm)		
DELL	Compal		P91F		Yes		Regular NB		5.77mm		
*****Please fill in exact product model name and make sure the model name is visible on product cover or any parts for end users recognize for authority inspection.											
Antenna information											
Vendor		Type		Antenna Part number (Main)			Antenna Part number (Aux)				
Wistron Neweb Corporation		Monopole		Antenna P/N : 81ELAS15.G67			Antenna P/N : 81ELAS15.G68				
				Compal P/N : DC33002CV5L			Compal P/N : DC33002CV4L				
Peak gain w/ cable loss (dBi)*											
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz	
Main	2.67	2.54	2.54	1.59	2.24	2.24	NA	NA	NA	NA	
Aux	2.11	1.42	2.21	2.47	2.47	1.68	NA	NA	NA	NA	
Intel Reference Gain/Type/ Separation distance											
Antenna Type	Antenna Peak gain (In dBi)*										Distance to the end user (mm)
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0GHz 6875-7125MHz	Generic: refer to modular FCC SAR report
Design	3.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	Mid-power: ≥ 8 mm Low power: ≥ 5 mm
PIFA	3.24	3.64	3.73	4.77	4.97	4.72	4.83	4.30	5.37	5.59	
Dipole	2.89	2.92	3.19	4.41	4.22	4.22	4.83	4.30	4.49	5.34	
Notes (marked with *)											
* SAR minimum separation (mm)											
- Regular NB: Minimum antenna-to-body (from antenna bottom to the bottom of the device)											
- Tablet / Convertible PC: Minimum antenna-to-edge (5 sides of the device)											
- Mini-tablet: Minimum antenna-to-edge (6 sides of the device)											
* 3D Peak Antenna gain should be equal or greater than -2 dBi											
- If a host integrator plans to use a lower gain antenna of the same type, additional CBP(FCC)/EDT(EU) testing need to be performed while the module is installed in the host.											

Table of contents

1. Applicable test method
2. Test & System Description
 - a. Test setup
 - b. Equipment list

3. Setup photo

[Section 1. Antenna Assembly Specifications](#)

[Section 2. Dimensioned Photos or Drawings of Antennas](#)

[Section 3. Radiation characteristics of antenna loaded in Host Platform](#)

[Section 4. Antenna Host Platform Location Information](#)

[Section 5. Antenna dimensional information for SAR evaluation](#)

[Section 6. Diagram Example of Co-Location Antenna Separation](#)

1. Applicable test methods

<insert test description here for test method>


[example] This test report is prepared for host antenna testing under a Full Anechoic Chamber.

2. Test & System Description

a. Test setup

<insert test diagram here for test site utilized>

Radiated Setup 0.4 GHz – 8 GHz

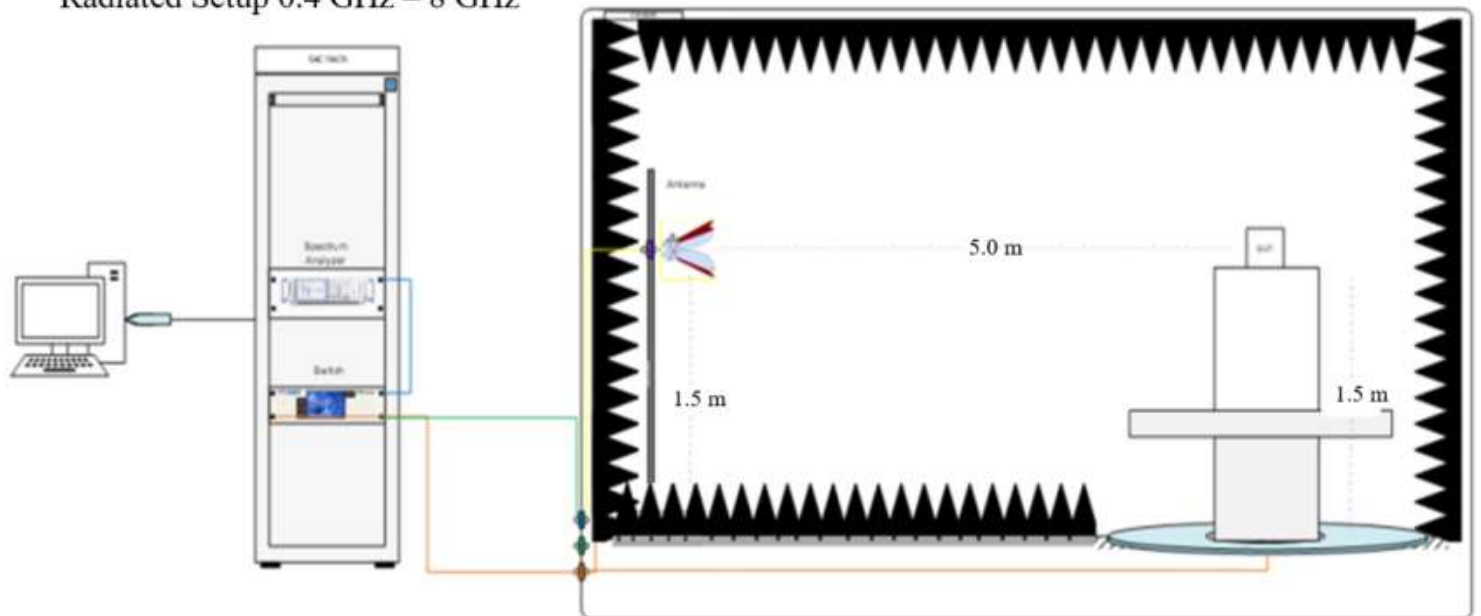


b. Equipment list

<insert test diagram here for test site utilized>

Item	Device	Type/Model	Serial#	Manufacturer	Cal. Date	Cal. Due Date
1	Anechoic Chamber	ETS-AMS	8500	ETS-Lindgren	2022-03	2023-03
2	Turn Table	ETS	-	ETS-Lindgren	2022-03	2023-03
3	Multi-Device Positioning Controller	Model 2090	00142407	ETS-Lindgren	2022-03	2023-03
4	Network Analyzer	E5071C	0171E5485A6J	Keysight	2022-05	2023-05
5	Horn antenna	3164-08	00140264	ETS-Lindgren	2022-03	2023-03
6	Cable 7.5m 400MHz to 18GHz (H-pol)	SS402	00100A1F5A1XXS	WOKEN	2022-03	2023-03
7	Cable 7.5m 400MHz to 18GHz (V-pol)	SS402	00100A1F5A1XXS	WOKEN	2022-03	2023-03
8	Cable 14m 400MHz to 18GHz	SS402	00100A1F5A1XXS	WOKEN	2022-03	2023-03
9	Temperature & Humidity Meter	HTC-01	-	METRAVI	2022-03	2023-03

3. Setup photo

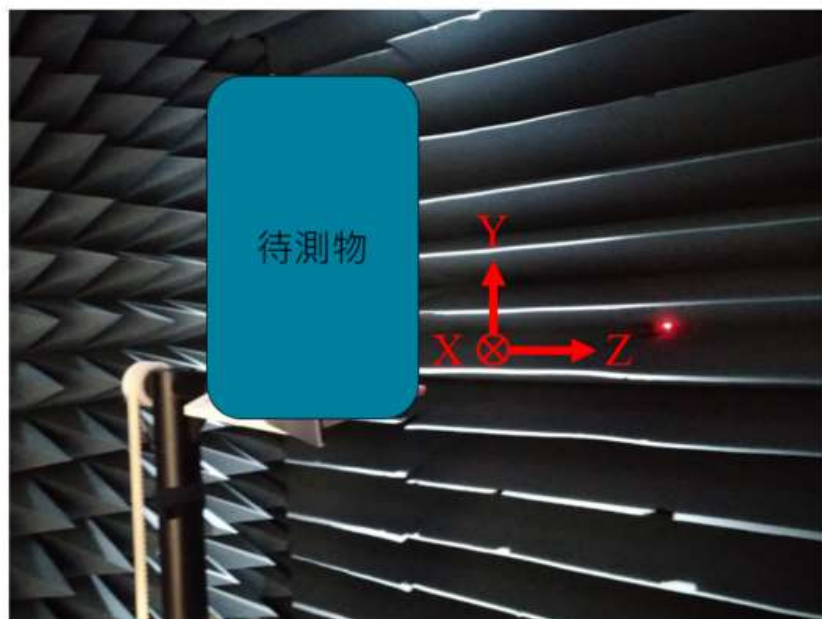

Antenna Information

Section 1. Antenna Assembly Specifications

1A	1B	1C	1D		1E	1F	1G	1H
Antenna Part Number	Manufacturer	Antenna Type	Cable Assembly Part Number and Information	Freq Range MHz	* Peak Gain W/ Cable loss (dBi)	Peak Gain w/o Cable Loss (dBi)	Max VSWR	Cable Loss (dB)
P/N:81ELAS15.G67 (DC33002CV5L) Main Antenna	Wistron Neweb Corporation	Monopole	50 ohm Coaxial length: 39.4cm diameter: 1.37mm	2400-2483.5	2.67	3.60	3	0.93
				5150-5250	2.54	3.93	3	1.39
				5250-5350	2.54	3.93	3	1.39
				5470-5725	1.59	2.99	3	1.40
				5725-5850	2.24	3.65	3	1.41
				5850-5895	2.24	3.66	3	1.42
				5925-6425	NA	NA	NA	NA
				6425-6525	NA	NA	NA	NA
				6525-6875	NA	NA	NA	NA
				6875-7125	NA	NA	NA	NA
P/N:81ELAS15.G68 (DC33002CV4L) Aux Antenna	Wistron Neweb Corporation	Monopole	50 ohm Coaxial length: 4.25cm diameter: 1.37mm	2400-2483.5	2.11	3.21	3	0.1
				5150-5250	1.42	1.57	3	0.15
				5250-5350	2.21	2.37	3	0.16
				5470-5725	2.47	2.64	3	0.17
				5725-5850	2.47	2.66	3	0.19
				5850-5895	1.68	1.91	3	0.23
				5925-6425	NA	NA	NA	NA
				6425-6525	NA	NA	NA	NA
				6525-6875	NA	NA	NA	NA
				6875-7125	NA	NA	NA	NA

- 3D Antenna Peak Gain required being test in system basis.

Main Antenna Drawing:



Technical drawing of a cable assembly with dimensions and labels:

- Dimensions:**
 - Overall length: 394.0 ± 2 (393.0)
 - Section 1: 361.0 ± 2
 - Section 2: 332.0 ± 2
 - Section 3: 303.0 ± 2
 - Section 4: 78.0 ± 1
 - Section 5: 61.0 ± 1
 - Section 6: 4.0 ± 1 WHITE ACETIC O.D. 1.7MAX
 - Section 7: 17.0 MAX
 - Section 8: 7.0
 - Section 9: 5.0
 - Section 10: 0.5
 - Section 11: 5.0
 - Section 12: 2.4
 - Section 13: 13
 - Section 14: 1.50
 - Section 15: 7.0 BLACK ACETIC O.D. 1.7MAX
 - Section 16: 5
 - Section 17: 5
 - Section 18: 5.0
 - Section 19: 7.0
 - Section 20: $1.37-H1.7$ MPX
- Labels:**
 - ①** HOLDER
 - ④** 背脫面朝上 (Back face up)
 - PEEL OFF** (multiple locations)
 - ⑤** (pointing to a small component)
 - ⑥** 背脫面朝上 (Back face up)
 - ⑦** (pointing to a small component)
 - PPID LABEL 6X4MM* 離反面** (PPID Label 6x4mm, back face)
 - TRANSPARENT TUBE LENGTH: 20±2 單端封 1PCS** (Transparent tube length: 20±2, single end seal, 1 piece)
- Other Text:**
 - LENGTH: 414 ± 2
 - DIAMETER: $\phi 1.37$
 - COLOR: BLACK
 - LOW LOSS


8/17

Section 3. Radiation characteristics of antenna loaded in Host Platform

Main Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	2.67

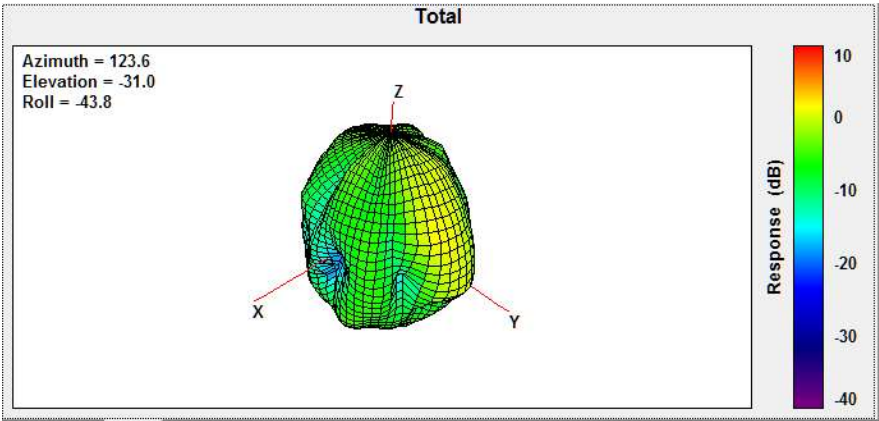


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	2.54

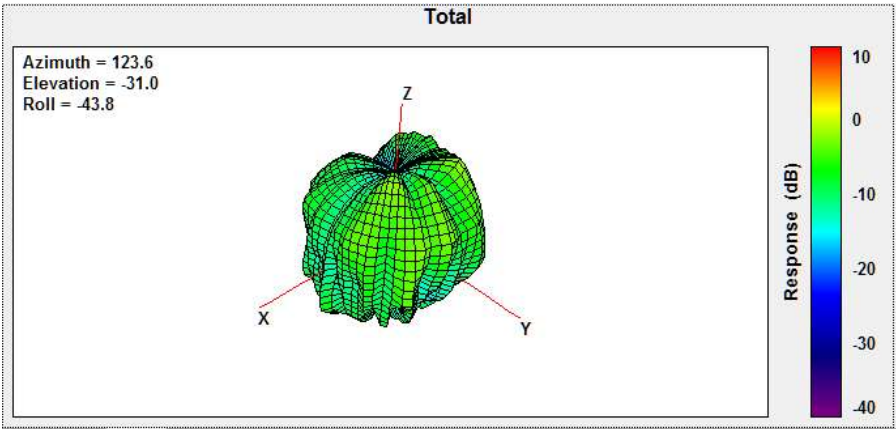


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	2.54

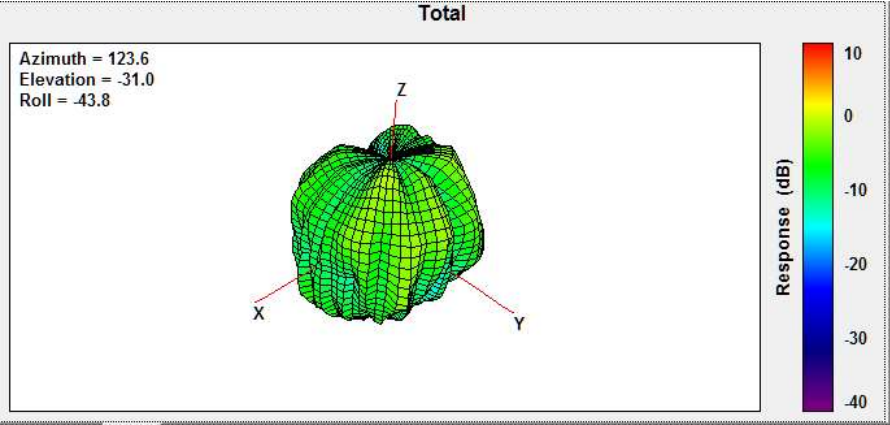


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	1.59

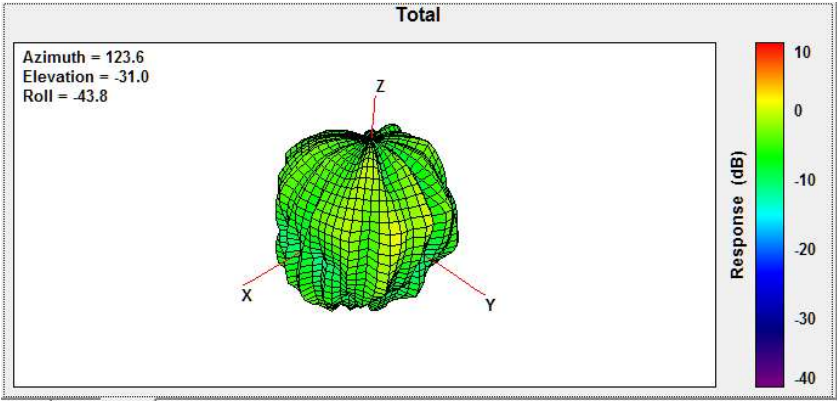


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	2.24

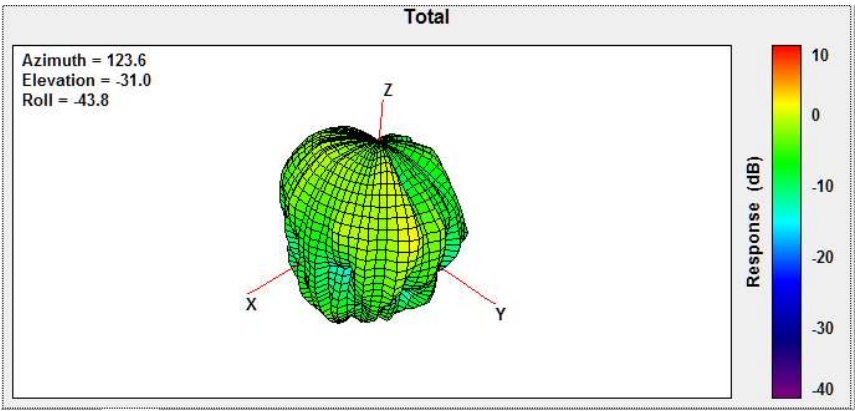

Max Antenna 3D Radiation Pattern 5850-5895 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	2.24

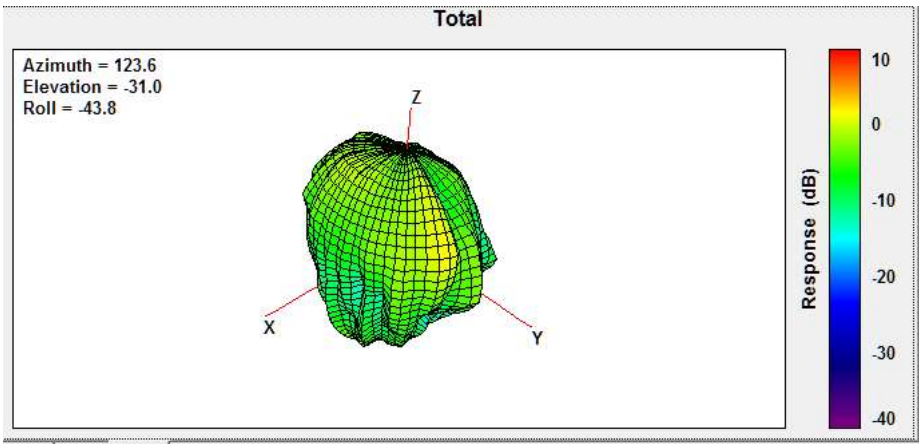

Auxiliary Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	2.11

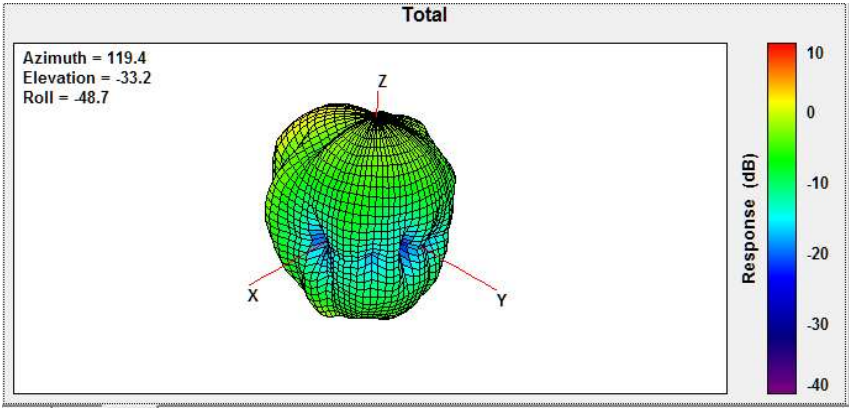


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	1.42

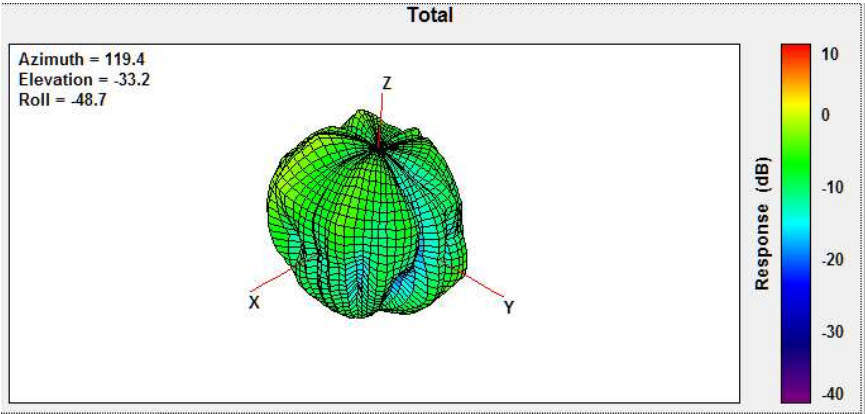


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	2.21

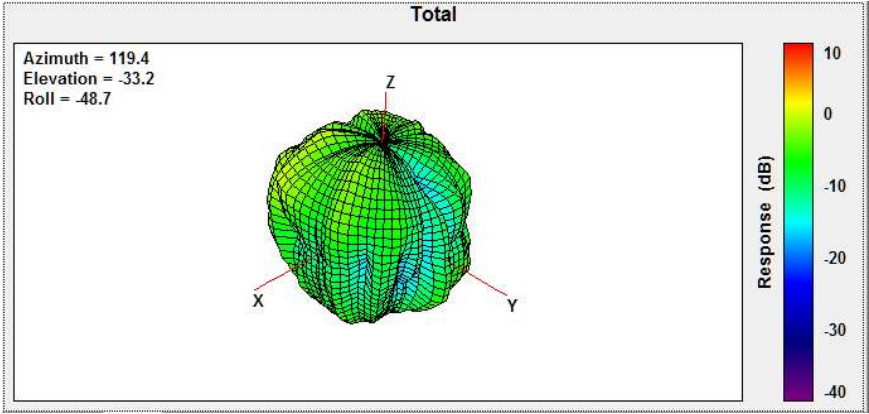


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	2.47

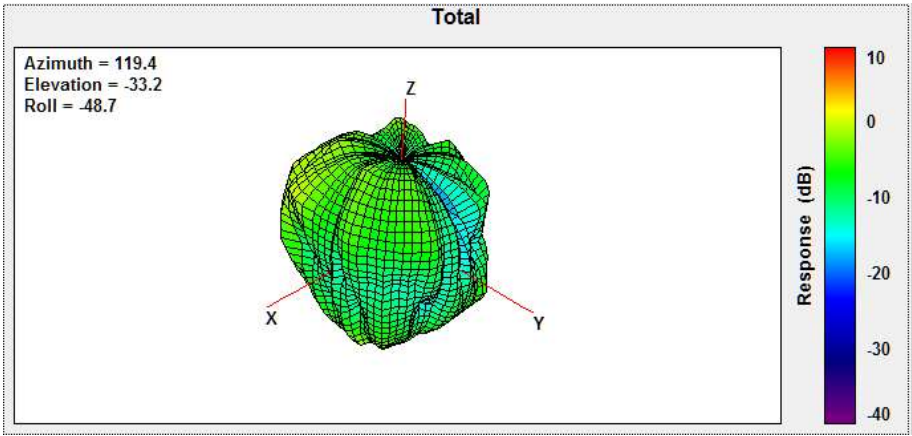


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	2.47

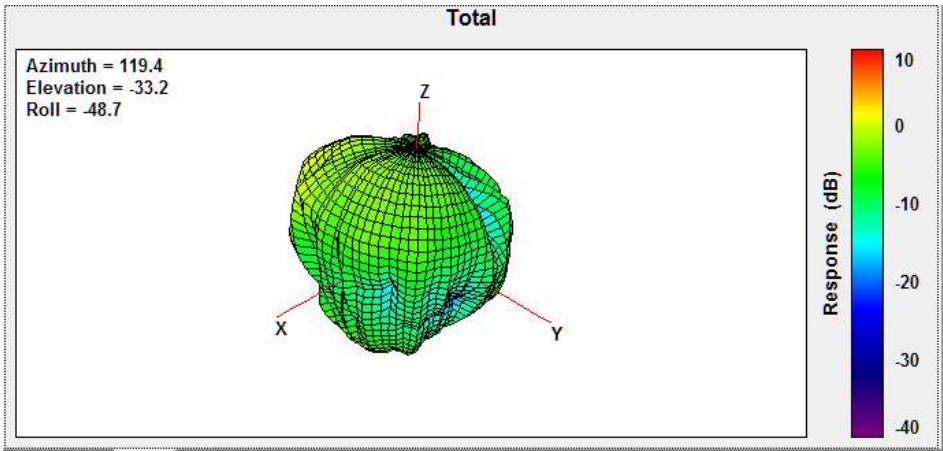

Max Antenna 3D Radiation Pattern 5850-5895 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	1.68

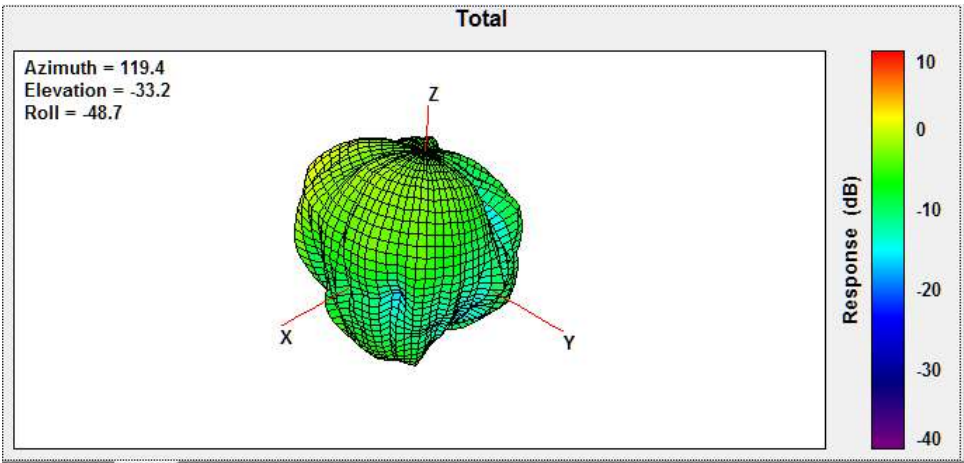

Section 4. Antenna Host Platform Location Information

Include a **dimensioned photo(s) or dimensioned drawing(s)** of Main and Aux antenna placements (measurements are not required for receive-only antenna).

Any antenna that transmits must show dimensions to bottom of laptop. Provide a description of the materials that are used for supporting or surrounding transmit antennas; for example, non-conductive plastics vs. conductive coated plastic or metallic materials.

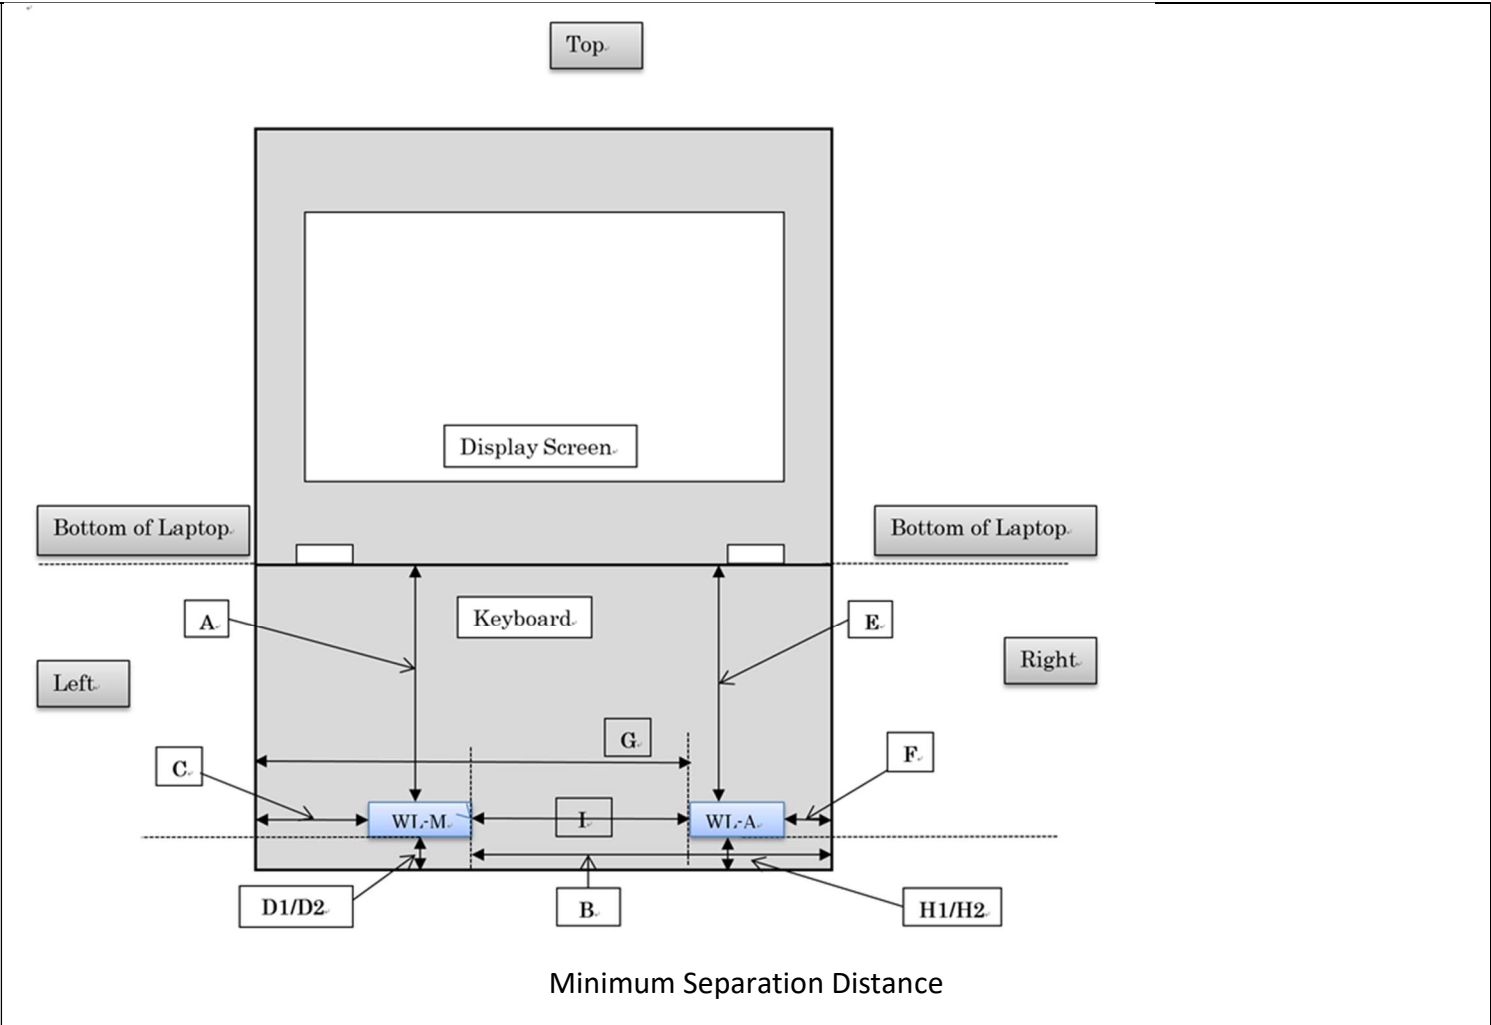


Item	Antenna	Position	Distance (mm)
A	WLAN-Main	to Top	225.0mm
B	WLAN-Main	to Right	339.4mm
C	WLAN-Main	to Left	1.5mm
D-1	WLAN-Main	to Bottom of Laptop (Include Bumper)	5.77mm
D-2	WLAN-Main	to Bottom of Laptop (NOT include Bumper)	4.77mm
E	WLAN-Aux	to Top	225.0mm

F	WLAN-Aux	to Right	1.5mm
G	WLAN-Aux	to Left	339.4mm
H-1	WLAN-Aux	to Bottom of Laptop (Include Bumper)	5.77mm
H-1	WLAN-Aux	to Bottom of Laptop (NOT include Bumper)	4.77mm
I	WLAN Main	to WLAN Aux	332.4mm

Section 5. Antenna dimensional information for SAR evaluation


Include a **dimensioned photo(s) or dimensioned drawing(s)** showing the distance (mm) between the transmit antennas and the user. For notebook/laptop hosts show lapheld position (example below). For tablet hosts show all orientations including lapheld, primary & secondary portrait, primary & secondary landscape positions. Include a description of any proximity sensors or power throttling implementations that limit or exclude use of any host orientation.

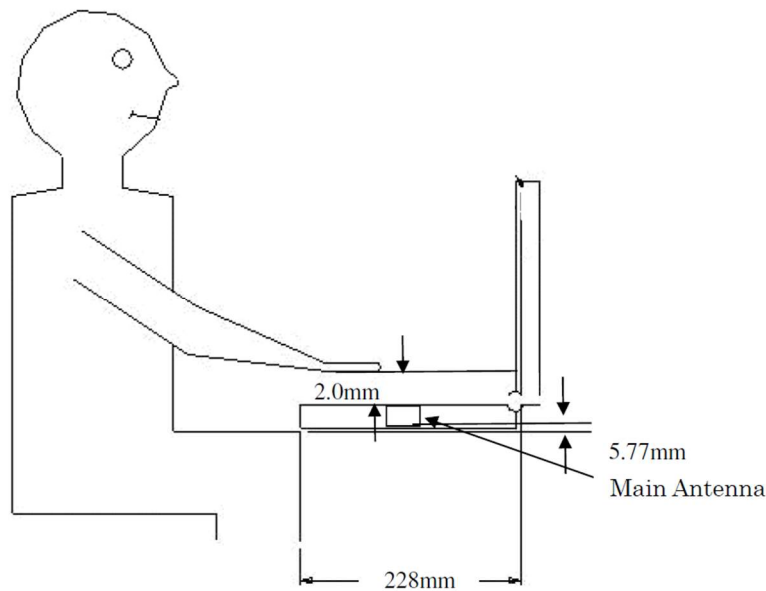

Section 6. Diagram Example of Co-Location Antenna Separation

Include a **dimensioned photo or dimensioned drawing** showing the distance (mm) between all WLAN transmit antennas and other co-located radiator transmit antenna such as Bluetooth, WWAN,..

(Note: Due to the evolving rules regarding co-location, each platform will need to be reviewed on a case by case basis)

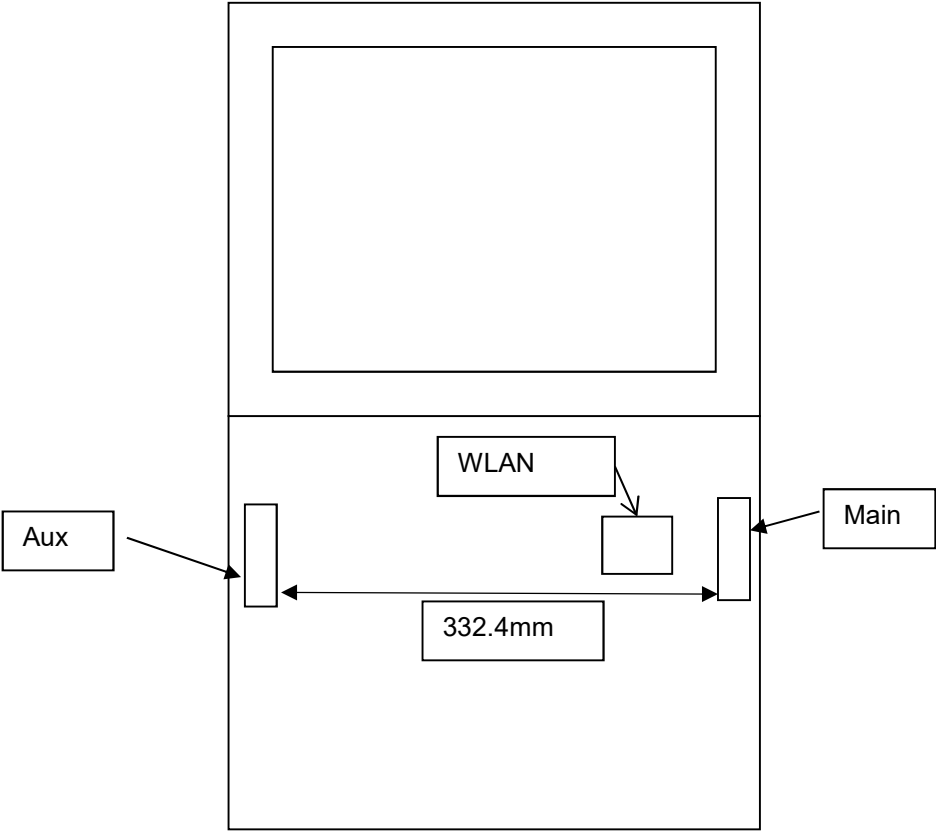

Revision History

Revision	Description	Date
10.3	Page2-5 Add Applicable test method, Test & System Description and Setup photo	July 24, 2022
10.4	Cover page Add Intel 5.9GHz reference antenna gain Cover page/Section1/Section3 Add 5.9GHz antenna gain information	September 15, 2022