

#01_WLAN2.4GHz_802.11b 1Mbps_Edge1_0mm_Ch11;Ant 1

Communication System: WLAN 2.4GHz; Frequency: 2462.0

Medium: HSL_2450_220416. Medium parameters used: $f = 2462.0$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 39.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(7.82, 7.82, 7.82); Calibrated: 2022-03-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn854; Calibrated: 2021-08-19
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1238; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10315-AAB
- MAIA: Area Scan: N/A; Zoom Scan: N/A

Area Scan (96.0 mm x 168.0 mm): Measurement Grid: 12.0 mm x 12.0 mm


SAR (1g) = 0.881 W/kg; SAR (10g) = 0.388 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.05 dB

SAR (1g) = 1.12 W/kg; SAR (8g) = 0.482 W/kg; SAR (10g) = 0.427 W/kg;

psAPD (1.0cm², sq) = 11.2 [W/m²]; psAPD (4.0cm², sq) = 9.64

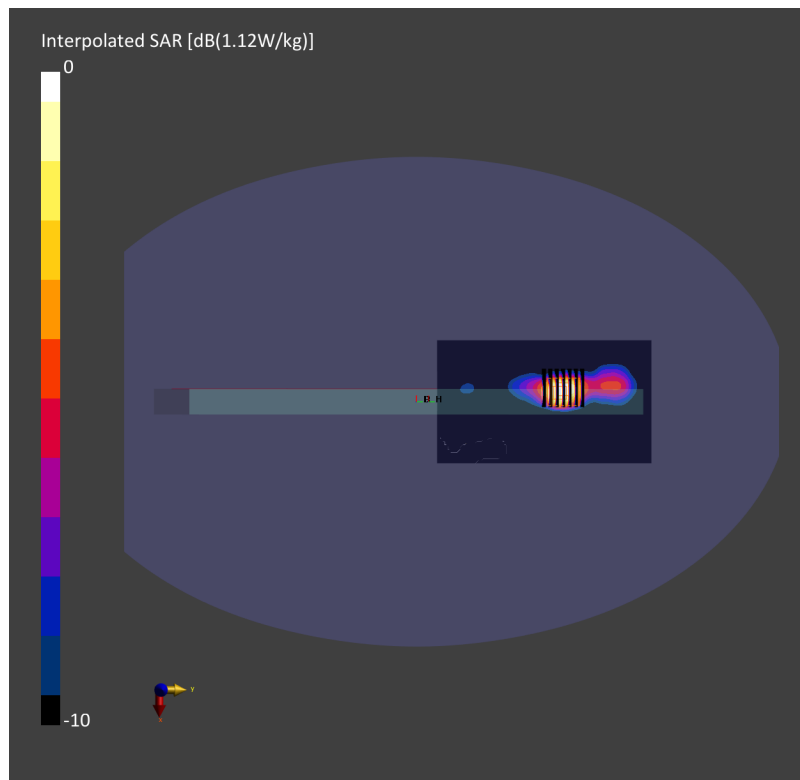

#02_WLAN5GHz_802.11ac-VHT80 MCS0_Edge1_0mm_Ch58;Ant 1

Communication System: WLAN 5GHz; Frequency: 5290.0

Medium: HSL_5G_220416. Medium parameters used: $f = 5290.0$ MHz; $\sigma = 4.83$ S/m; $\epsilon_r = 36.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(5.5, 5.5, 5.5); Calibrated: 2022-03-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn854; Calibrated: 2021-08-19
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1238; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10544-AAC
- MAIA: Area Scan: N/A; Zoom Scan: N/A

Area Scan (80.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm


SAR (1g) = 0.922 W/kg; SAR (10g) = 0.316 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.03 dB

SAR (1g) = 1.08 W/kg; SAR (8g) = 0.380 W/kg; SAR (10g) = 0.335 W/kg;

psAPD (1.0cm², sq) = 10.8 [W/m²]; psAPD (4.0cm², sq) = 7.60

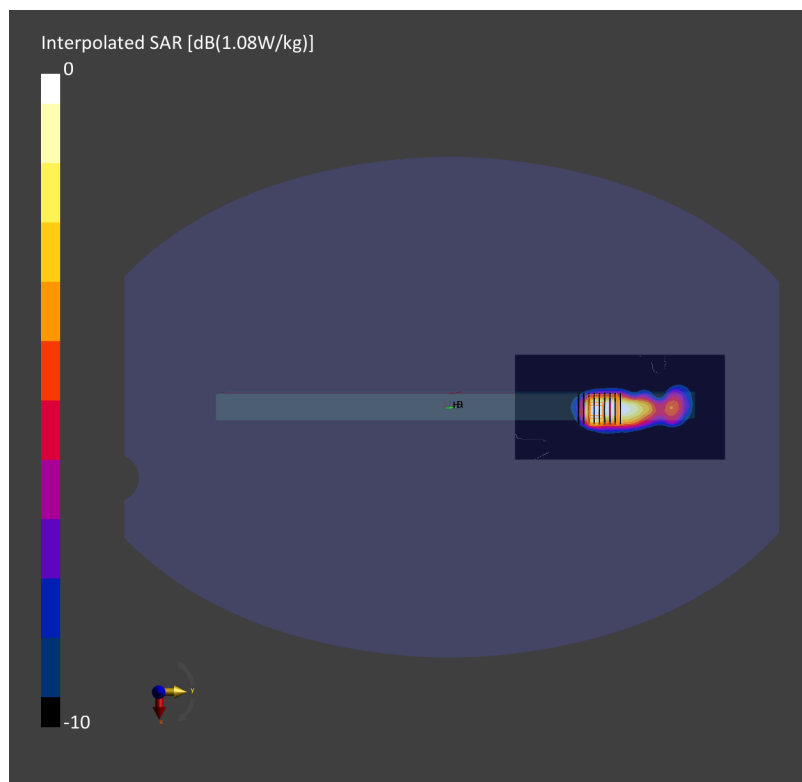

#03_WLAN5GHz_802.11ac-VHT80 MCS0_Edge1_0mm_Ch122;Ant 1

Communication System: WLAN 5GHz; Frequency: 5610.0

Medium: HSL_5G_220416. Medium parameters used: $f = 5610.0$ MHz; $\sigma = 5.03$ S/m; $\epsilon_r = 35.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(4.98, 4.98, 4.98); Calibrated: 2022-03-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn854; Calibrated: 2021-08-19
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1238; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10544-AAC
- MAIA: Area Scan: N/A; Zoom Scan: N/A

Area Scan (100.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm


SAR (1g) = 0.853 W/kg; SAR (10g) = 0.301 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.11 dB

SAR (1g) = 0.936 W/kg; SAR (8g) = 0.353 W/kg; SAR (10g) = 0.313 W/kg;

psAPD (1.0cm², sq) = 9.36 [W/m²]; psAPD (4.0cm², sq) = 7.06

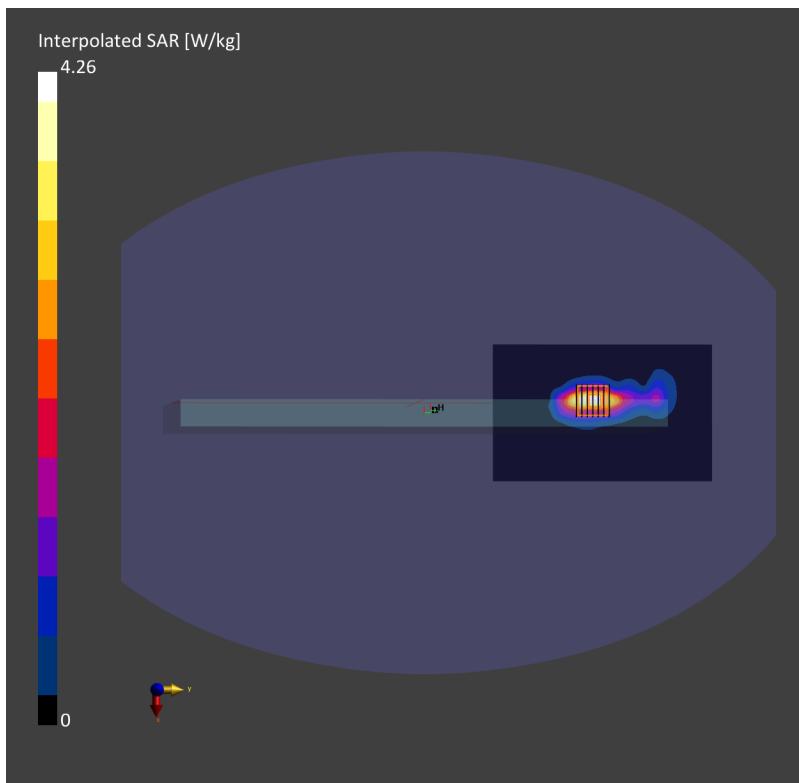

#04_WLAN5GHz_802.11ac-VHT80 MCS0_Edge1_0mm_Ch155;Ant 1

Communication System: WLAN 5GHz; Frequency: 5775.0

Medium: HSL_5750_220415. Medium parameters used: $f = 5775.0$ MHz; $\sigma = 5.16$ S/m; $\epsilon_r = 35.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(5.23, 5.23, 5.23); Calibrated: 2022-03-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn854; Calibrated: 2021-08-19
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1238; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10544-AAC
- MAIA: Area Scan: Y; Zoom Scan: N/A

Area Scan (100.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm


SAR (1g) = 0.586 W/kg; SAR (10g) = 0.205 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.05 dB

SAR (1g) = 0.719 W/kg; SAR (8g) = 0.251 W/kg; SAR (10g) = 0.219 W/kg;

psAPD (1.0cm², sq) = 7.19 [W/m²]; psAPD (4.0cm², sq) = 5.02

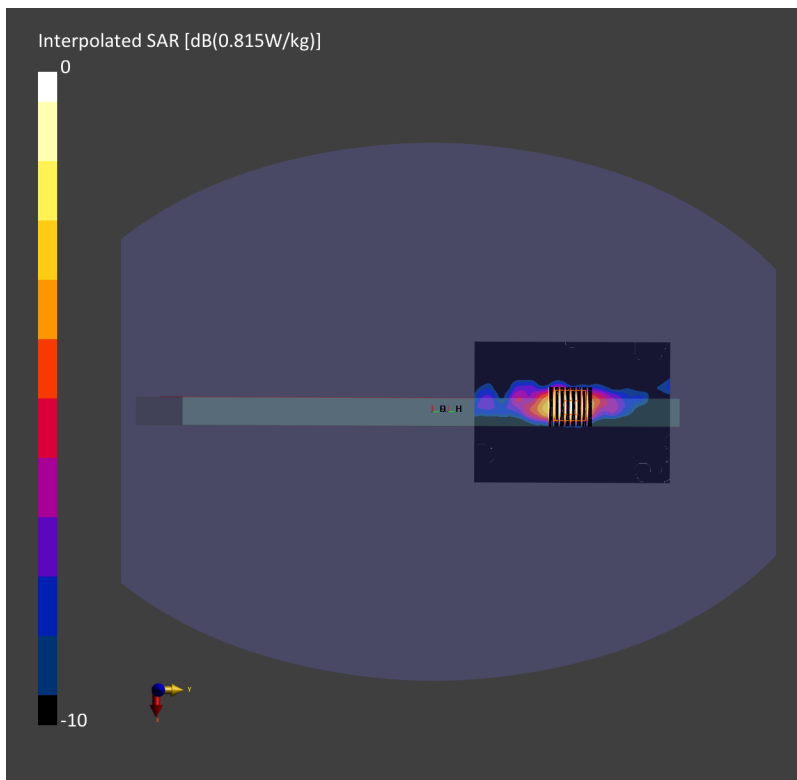

#05_WLAN6GHz_802.11ax-HE160 MCS0_Edge 1_0mm_Ch207;Ant 1

Communication System: U-NII-8; Frequency: 6985.0

Medium: HSL_6G_220415 Medium parameters used: $f = 6985.0$ MHz; $\sigma = 6.75$ S/m; $\epsilon_r = 34.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(5.9, 5.9, 5.9); Calibrated: 2021-11-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2021-11-03
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10755-AAC
- MAIA: Area Scan: Y; Zoom Scan: N/A

Area Scan (68.0 mm x 136.0 mm): Measurement Grid: 8.5 mm x 8.5 mm


SAR (1g) = 0.589 W/kg; SAR (10g) = 0.165 W/kg;

Zoom Scan (23.8 mm x 23.8 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.13 dB

SAR (1g) = 0.724 W/kg; SAR (8g) = W/kg; SAR (10g) = 0.173 W/kg;

psAPD (1.0cm², sq) = 7.24 [W/m²]; psAPD (4.0cm², sq) = 4.08

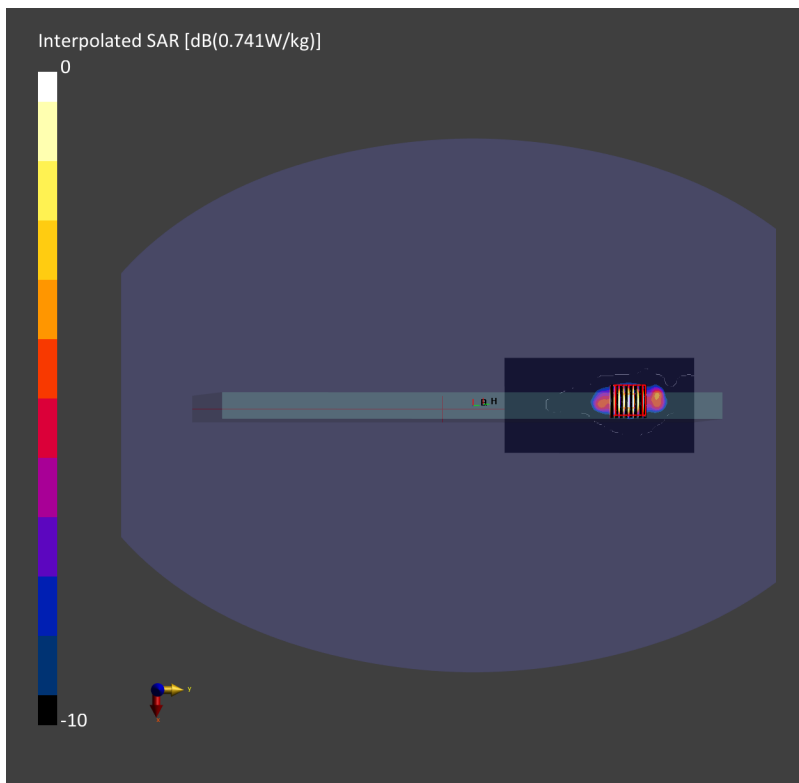

#06_Bluetooth_1 Mbps_Edge1_0mm_Ch78;Ant 2

Communication System: Bluetooth; Frequency: 2480.0

Medium: HSL_2450_220416. Medium parameters used: $f = 2480.0$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 39.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(7.82, 7.82, 7.82); Calibrated: 2022-03-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn854; Calibrated: 2021-08-19
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1238; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: Bluetooth, 10032-CAA
- MAIA: Area Scan: Y; Zoom Scan: Y

Area Scan (96.0 mm x 144.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.125 W/kg; SAR (10g) = 0.054 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.01 dB

SAR (1g) = 0.130 W/kg; SAR (8g) = 0.057 W/kg; SAR (10g) = 0.051 W/kg;

psAPD (1.0cm², sq) = 1.30 [W/m²]; psAPD (4.0cm², sq) = 1.14

