

#01_WLAN2.4GHz_802.11b 1Mbps_Top Edge_0mm_ch1;Main Ant

Communication System: WLAN 2.4GHz; Frequency: 2412.0

Medium: HSL_2450_220514 Medium parameters used: $f = 2412.0$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(8.41, 8.41, 8.41); Calibrated: 2021-11-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2021-11-03
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10415-AAA
- MAIA: Area Scan: N/A; Zoom Scan: N/A


Area Scan (60.0 mm x 144.0 mm): Measurement Grid: 10.0 mm x 12.0 mm

SAR (1g) = 0.658 W/kg; SAR (10g) = 0.312 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.654 W/kg; SAR (10g) = 0.307 W/kg;

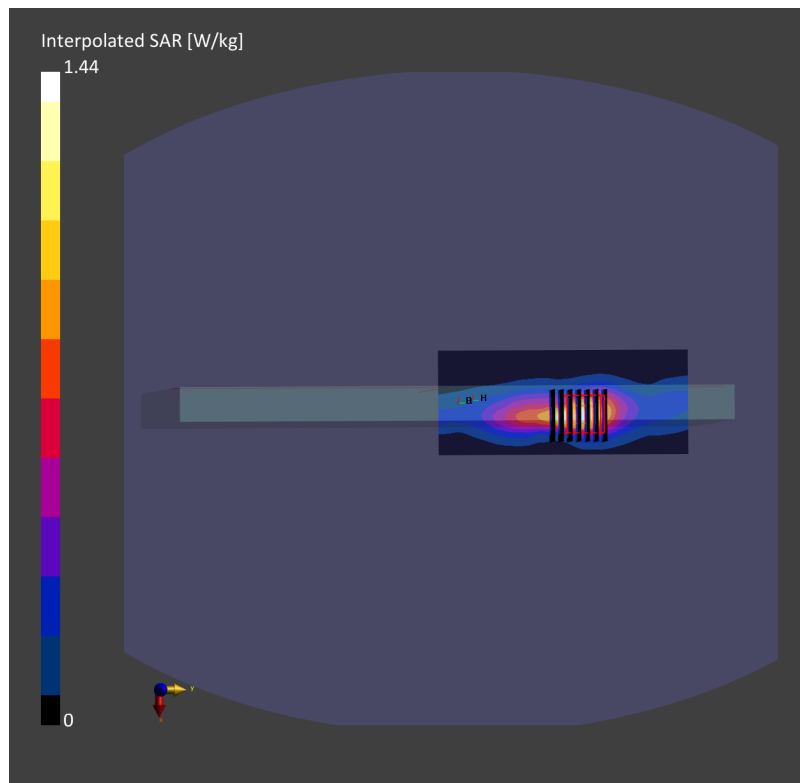

#02_WLAN5GHz_802.11ac-VHT80 MCS0_Top Edge_0mm_ch58;Main Ant

Communication System: WLAN 5GHz; Frequency: 5290.0

Medium: HSL_5G_220514 Medium parameters used: $f = 5290.0$ MHz; $\sigma = 4.70$ S/m; $\epsilon_r = 35.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(5.45, 5.45, 5.45); Calibrated: 2021-11-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2021-11-03
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10402-AAE
- MAIA: Area Scan: N/A; Zoom Scan: N/A


Area Scan (60.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.874 W/kg; SAR (10g) = 0.298 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.05 dB

SAR (1g) = 0.945 W/kg; SAR (10g) = 0.301 W/kg;

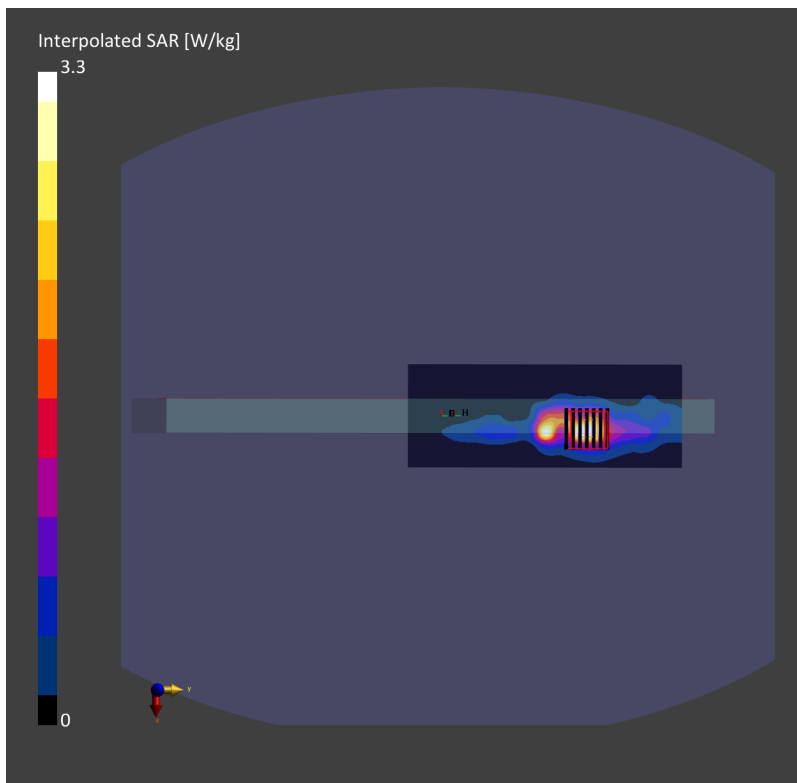

#03_WLAN5GHz_802.11ac-VHT80 MCS0_Top Edge_0mm_ch122;Main Ant

Communication System: WLAN 5GHz; Frequency: 5610.0

Medium: HSL_5G_220514 Medium parameters used: $f = 5610.0$ MHz; $\sigma = 5.06$ S/m; $\epsilon_r = 34.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(4.75, 4.75, 4.75); Calibrated: 2021-11-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2021-11-03
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10402-AAE
- MAIA: Area Scan: N/A; Zoom Scan: N/A


Area Scan (60.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.990 W/kg; SAR (10g) = 0.342 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.00 dB

SAR (1g) = 1.12 W/kg; SAR (10g) = 0.346 W/kg;

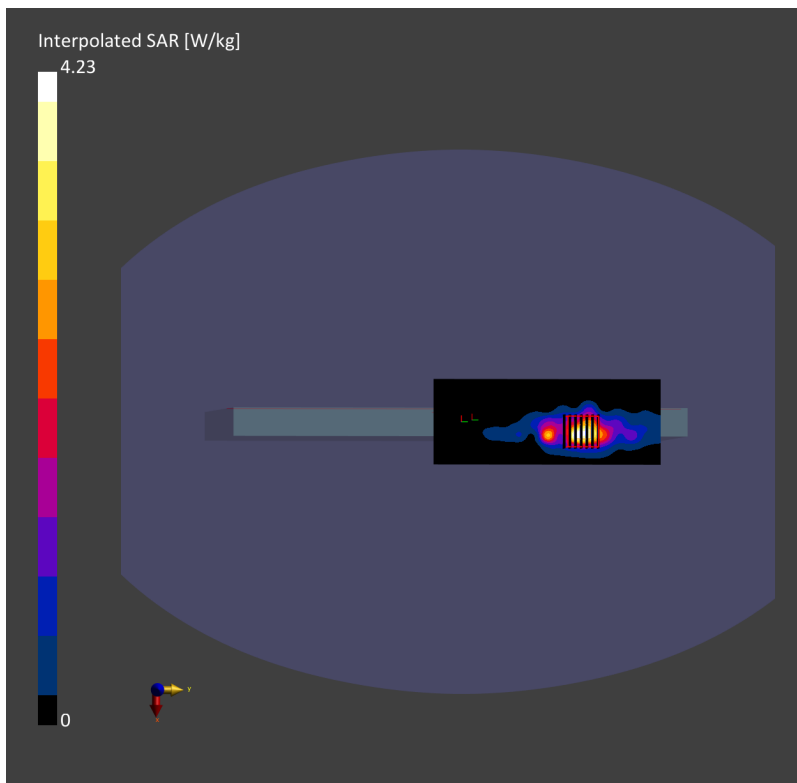

#04_WLAN5GHz_802.11ac-VHT80 MCS0_Top Edge_0mm_ch155;Main Ant

Communication System: WLAN 5GHz; Frequency: 5775.0

Medium: HSL_5G_220514 Medium parameters used: $f = 5775.0$ MHz; $\sigma = 5.27$ S/m; $\epsilon_r = 34.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(5.0, 5.0, 5.0); Calibrated: 2021-11-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2021-11-03
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10402-AAE
- MAIA: Area Scan: N/A; Zoom Scan: N/A


Area Scan (60.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.12 W/kg; SAR (10g) = 0.366 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 1.19 W/kg; SAR (10g) = 0.374 W/kg;

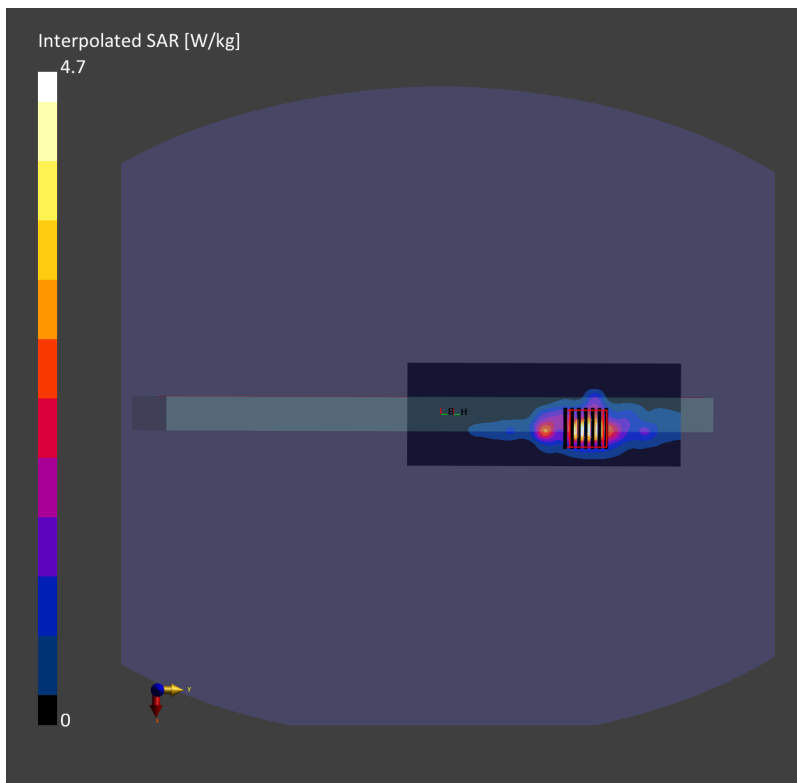

#05_WLAN6GHz_802.11ax-HE160 MCS0_Top Edge_0mm_ch207;Main Ant

Communication System: WLAN 6GHz; Frequency: 6985.0

Medium: HSL_6G_220514 Medium parameters used: $f = 6985.0$ MHz; $\sigma = 6.84$ S/m; $\epsilon_r = 33.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(5.9, 5.9, 5.9); Calibrated: 2021-11-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2021-11-03
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10743-AAC
- MAIA: Area Scan: Y; Zoom Scan: N/A

Area Scan (68.0 mm x 153.0 mm): Measurement Grid: 8.5 mm x 8.5 mm


SAR (1g) = 0.453 W/kg; SAR (10g) = 0.133 W/kg;

Zoom Scan (23.8 mm x 23.8 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 0.439 W/kg; SAR (10g) = 0.119 W/kg;

psAPD (1.0cm², sq) = 4.39 [W/m²]; psAPD (4.0cm², sq) = 2.85 [W/m²]

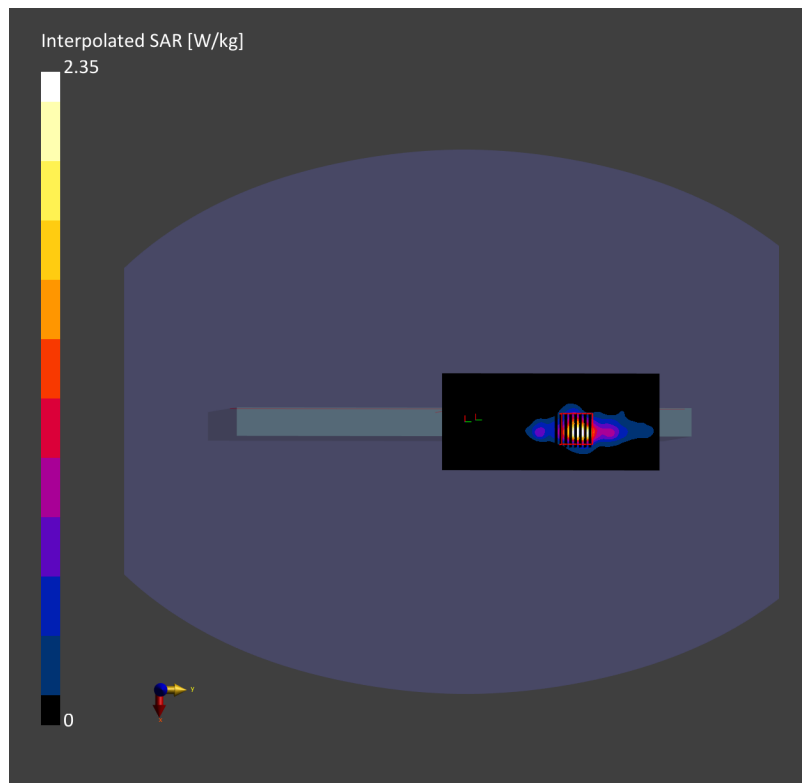

#06_Bluetooth_1Mbps_Top Edge_0mm_ch78;Aux Ant

Communication System: 2.4 GHz Band; Frequency: 2480.0

Medium: HSL_2450_220514 Medium parameters used: $f = 2480.0$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 38.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(8.41, 8.41, 8.41); Calibrated: 2021-11-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2021-11-03
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: Bluetooth, 10032-CAA
- MAIA: Area Scan: Y; Zoom Scan: Y

Area Scan (72.0 mm x 168.0 mm): Measurement Grid: 10.0 mm x 12.0 mm

SAR (1g) = 0.025 W/kg; SAR (10g) = 0.012 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.06 dB

SAR (1g) = 0.027 W/kg; SAR (10g) = 0.011 W/kg;

