

Regulatory WLAN Antenna Information (TB mode)

Platform information										
Brand		ODM		RMN		Intel platform (ex: Yes, No or NA)		Platform type (ex: regular NB, convertible PC, AIO...etc)		*SAR minimum separation (mm)
HP Inc.		Compal		TPN-C157		Yes		Convertible PC		1.95
*****Please fill in exact product model name and make sure the model name is visible on product cover or any parts for end users recognize for authority inspection.										
Antenna information										
Vendor			Type		Antenna Part number (Main/Tx2)			Antenna Part number (Aux/Tx1)		
High-Tek Electronics Co., Ltd			PIFA		219HCTN12198			219HCTN12197		
Peak gain w/ cable loss (dBi)*										
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
Main	1.84	2.30	2.52	2.86	2.85	2.40	2.90	1.18	2.60	0.16
Aux	0.80	1.87	2.64	2.68	2.68	2.38	2.81	1.81	2.01	1.93
Module Information										
Model		Form factor and suffixes								
AX211NGW		Intel Garfield Peak 2 AX211 Wi-Fi 6E +Bluetooth 5.3 M.2 2230 160MHz CNVi WW WLAN								

Table of contents

1. Applicable test method
2. Test & System Description
 - a. Test setup
 - b. Equipment list
3. Setup photo

[Section 1. Antenna Assembly Specifications](#)

[Section 2. Dimensioned Photos or Drawings of Antennas](#)

[Section 3. Radiation characteristics of antenna loaded in Host Platform](#)


[Section 4. Antenna Host Platform Location Information](#)

[Section 5. Antenna dimensional information for SAR evaluation](#)

[Section 6. Diagram Example of Co-Location Antenna Separation](#)

1. Applicable test methods

The radiation pattern of antenna is measured in both horizontal polarization and vertical polarization. The radiation pattern measurements are performed in the three-dimensional anechoic chamber. The chamber provides less than -30dB reflectivity from 800MHz through 8GHz . The chamber is calibrated using both standard dipole antenna and horn antenna. The Gain here is expressed as dBi that standardizes the isotropic antenna. The Gain measurements and antenna radiation pattern are also performed in the same chamber described previously. Figure 2 shows the schematic diagram for measuring radiation pattern and Gain.

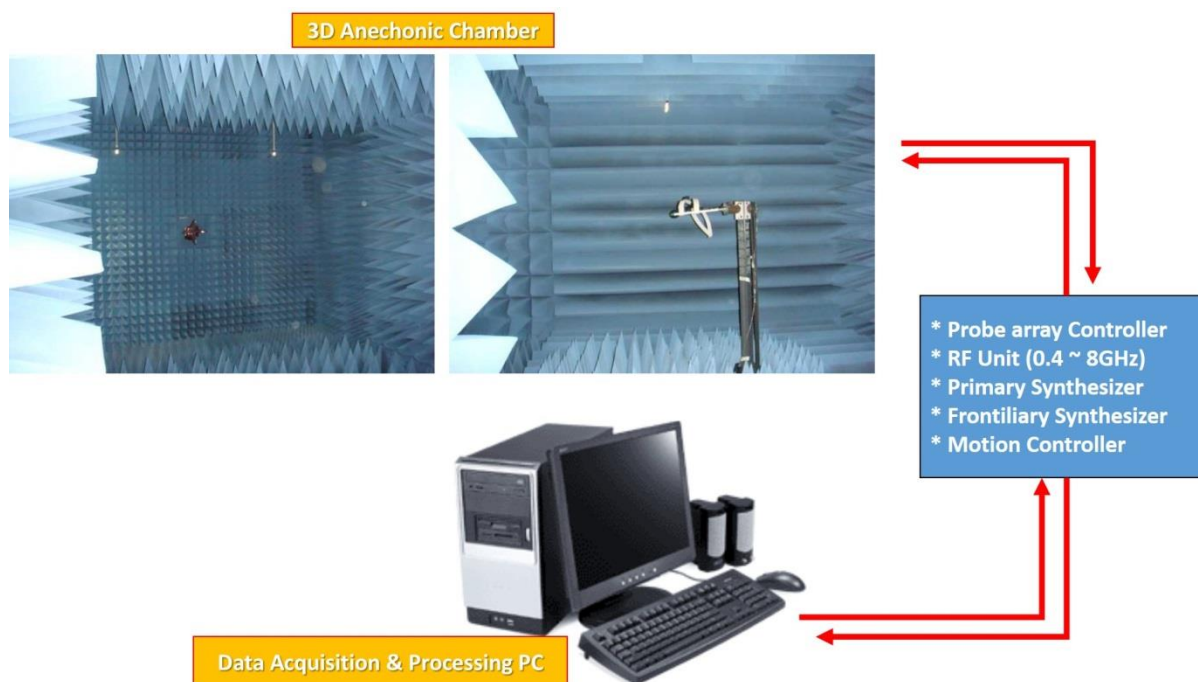

2. Test & System Description

a. Test setup

1. Frequency Range

2400~2500MHz, for WLAN application.
 5150~5850MHz, for WLAN application
 5925~7125MHz,for WLAN application

2. Antenna Configuration

The antenna basically has two parts; the stamping and the cable assembly with the connector on one side. The detailed drawing is attached.

3. VSWR

The VSWR is measured with network analyzer that support up to 8GHz . All the measurements are performed with the customer provided fixture. Figure 1 shows the typical schematic diagram for measuring VSWR.

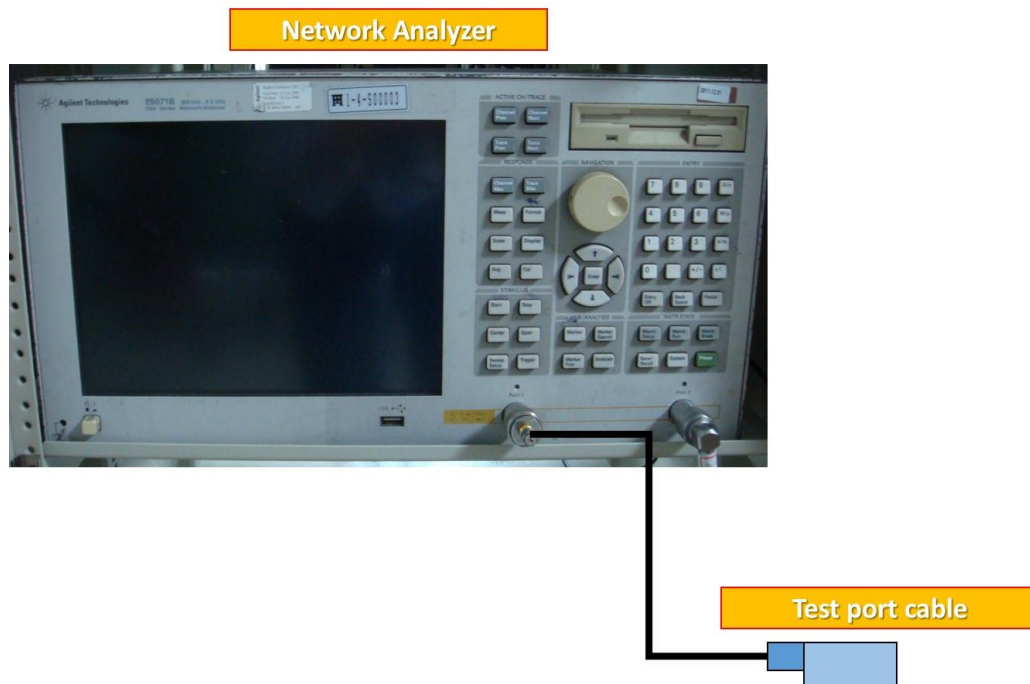


Figure 1. The schematic diagram for measuring VSWR

b. Equipment list

Test Equipment

The equipment for the antenna measurement we used is as follows:


- A. Network Analyzer, support up to 8GHz, to measure the VSWR and input impedance of antenna.
- B. Three-dimensional anechoic chamber to measure antenna gain and radiation pattern(Standard horn antenna was used to calibrate the chamber)
- C. Digital caliper to measure the dimensions.
- D. Climatic chamber for mechanical tests.

Radiated Setup

item	Device	Type/Model	manufacturer	Cal. Date	Cal. Due Date
1	Anechoic Chamber	AMS-8500	ETS-Lindgren	2021/12/20	2022/12/20
2	Turn Table	ETS	ETS-Lindgren	N/A	N/A
3	Measurement SW	EMQuest1.08	ETS-Lindgren	N/A	N/A
4	Vector Network Analyzer	Agilent E5071B	Agilent	2021/12/17	2022/12/17
5	Receive Antenna Absorber Nested Dual- Polarized Dual-Vivaldi Array Antenna 700MHz to 6GHz	EMCO 3164-08	ETS-Lindgren	N/A	N/A
6	Multi Axis Positioning System (MAPS™)	EMCO 2115CR	ETS-Lindgren	N/A	N/A
7	MAPS™ Controller	MECO 2090	ETS-Lindgren	N/A	N/A
8	Horn antenna	3164-08	ETS-Lindgren	2021/12/15	2022/12/15
9	Cable 0.5m - 700MHz~10GHz	RG316	Senyu	2021/12/21	2022/12/21

N/A : Not Applicable

3. Setup photo

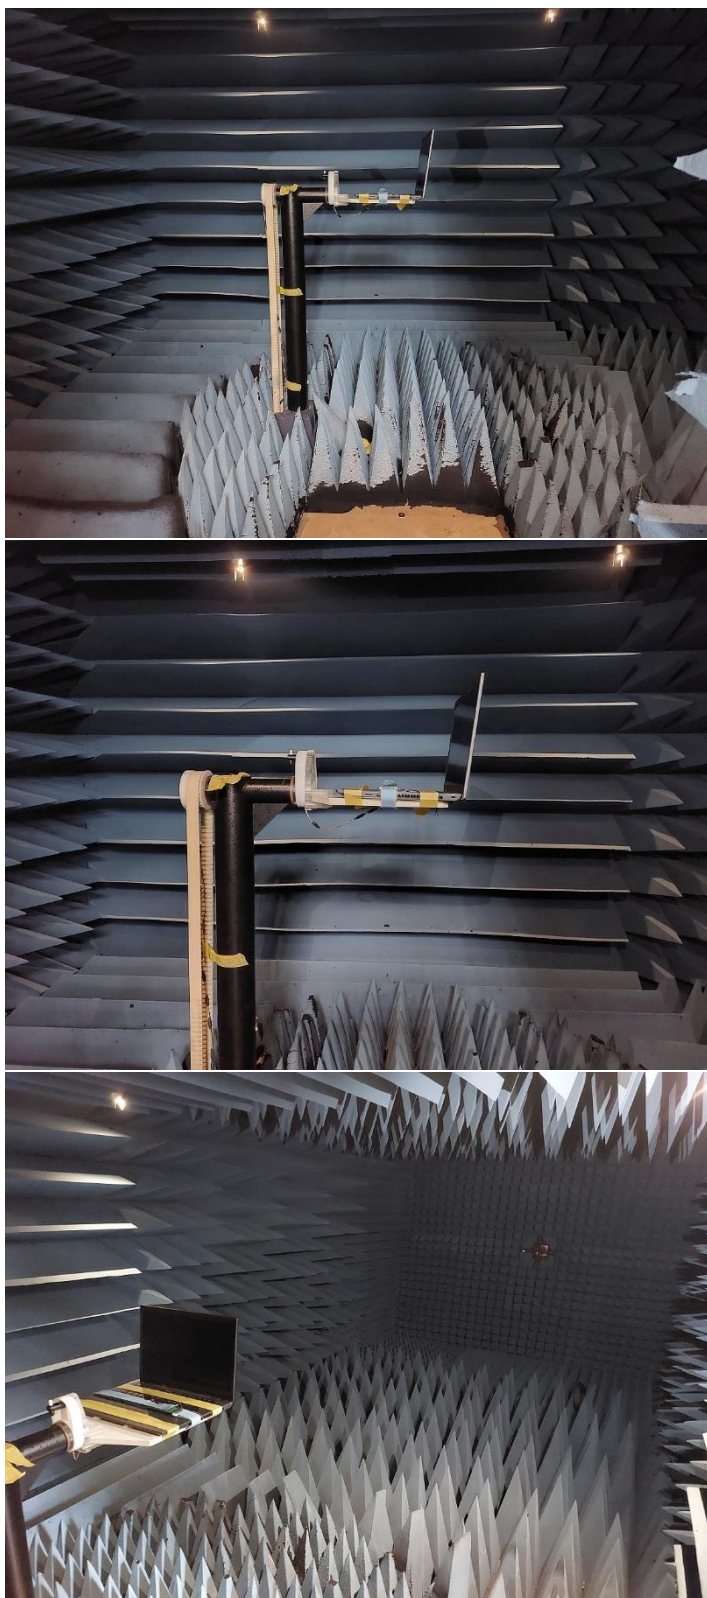

Antenna Information

Section 1. Antenna Assembly Specifications


1A Antenna Part Number	1B Manufacturer	1C Antenna Type	1D Cable Assembly Part Number and Information	Freq Range MHz	1E * Peak Gain W/ Cable loss (dBi)	1F Peak Gain w/o Cable Loss (dBi)	1G Max VSWR	1H Cable Loss (dB)
(P/N: 219HCTN12198) Tx2/ Rx2 Antenna	High-Tek Electronics Co., Ltd	PIFA	Connector: CM 958-C437-CM-B-YHU-AO 50 Ohm Coaxial Cable Length: 535 mm Diameter: 1.37 mm	2400-2495	1.84 dBi (peak)	3.15 dBi (peak)	3.00 max	1.31 dBi (peak)
				5150-5250	2.30 dBi (peak)	4.21 dBi (peak)	3.00 max	1.91 dBi (peak)
				5250-5350	2.52 dBi (peak)	4.43 dBi (peak)	3.00 max	1.91 dBi (peak)
				5470-5725	2.86 dBi (peak)	4.86 dBi (peak)	3.00 max	2.00 dBi (peak)
				5725-5850	2.85 dBi (peak)	5.01 dBi (peak)	3.00 max	2.16 dBi (peak)
				5850-5925	2.40 dBi (peak)	4.56 dBi (peak)	3.00 max	2.16 dBi (peak)
				5925-6425	2.90 dBi (peak)	5.13 dBi (peak)	3.00 max	2.23 dBi (peak)
				6425-6525	1.18 dBi (peak)	3.44 dBi (peak)	3.00 max	2.26 dBi (peak)
				6525-6875	2.60 dBi (peak)	4.90 dBi (peak)	3.00 max	2.30 dBi (peak)
				6875-7125	0.16 dBi (peak)	2.52 dBi (peak)	3.00 max	2.36 dBi (peak)
(P/N: 219HCTN12197) Tx1/ Rx1 Antenna	High-Tek Electronics Co., Ltd	PIFA	Connector: CM 958-C437-CM-B-YHU-AO 50 Ohm Coaxial Cable Length: 430 mm Diameter: 1.37 mm	2400-2495	0.80 dBi (peak)	1.85 dBi (peak)	3.00 max	1.05 dBi (peak)
				5150-5250	1.87 dBi (peak)	3.40 dBi (peak)	3.00 max	1.53 dBi (peak)
				5250-5350	2.64 dBi (peak)	4.18 dBi (peak)	3.00 max	1.54 dBi (peak)
				5470-5725	2.68 dBi (peak)	4.29 dBi (peak)	3.00 max	1.61 dBi (peak)
				5725-5850	2.68 dBi (peak)	4.42 dBi (peak)	3.00 max	1.74 dBi (peak)
				5850-5925	2.38 dBi (peak)	4.12 dBi (peak)	3.00 max	1.74 dBi (peak)
				5925-6425	2.81 dBi (peak)	4.61 dBi (peak)	3.00 max	1.80 dBi (peak)
				6425-6525	1.81 dBi (peak)	3.63 dBi (peak)	3.00 max	1.82 dBi (peak)
				6525-6875	2.01 dBi (peak)	3.86 dBi (peak)	3.00 max	1.85 dBi (peak)
				6875-7125	1.93 dBi (peak)	3.83 dBi (peak)	3.00 max	1.90 dBi (peak)

- Antenna Peak Gain required being test in system basis.
- 1E frame contend absolutely peak antenna gain include H/V


Section 2. Dimensioned Photos and Drawings of Antennas

Include the dimensioned photo and drawing of Main antenna here.

Main Antenna Drawing:

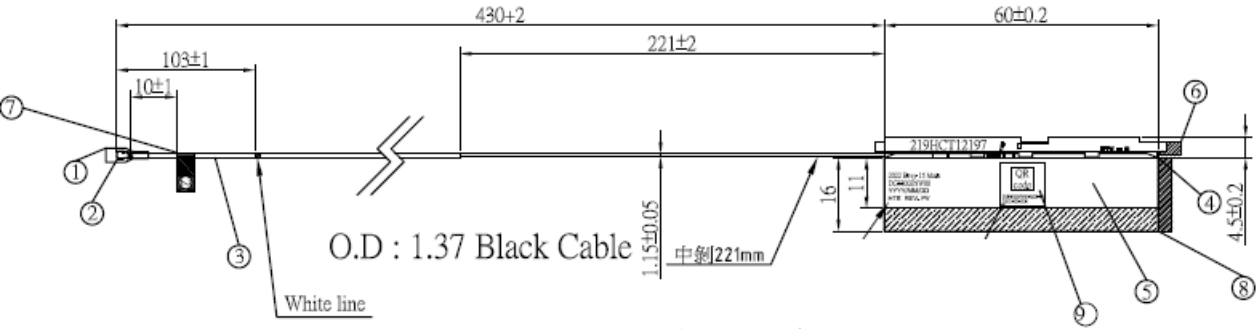

Main Antenna Photo (Front/Back):

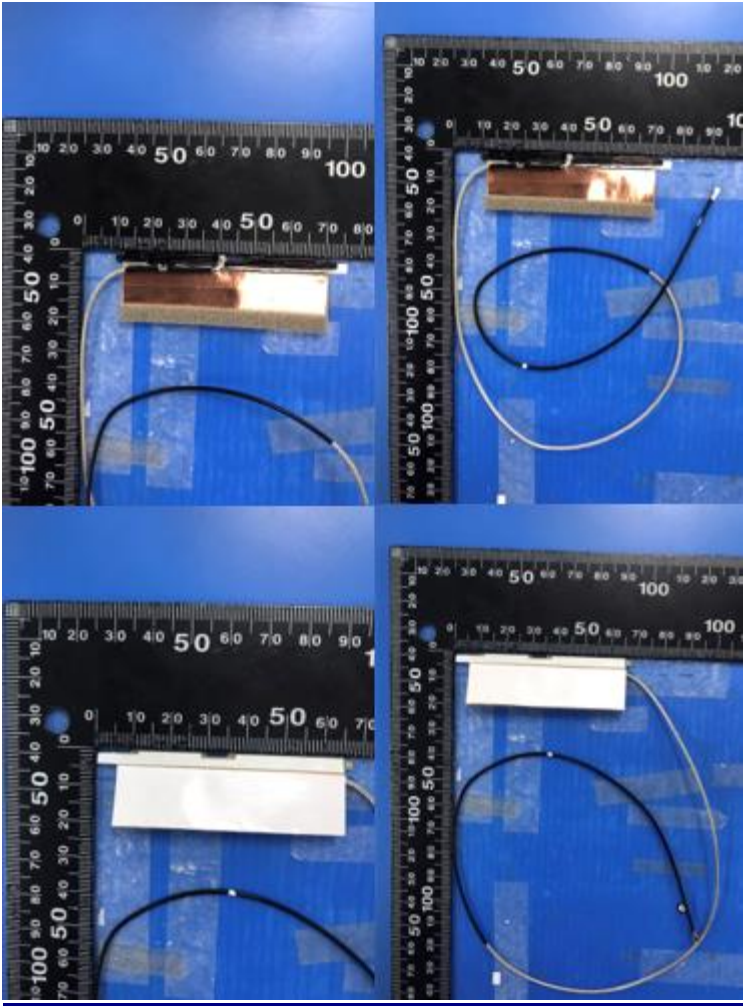


Section 3. Radiation characteristics of antenna loaded in Host Platform

Main Antenna


Max Antenna 2D Radiation Pattern 2400 – 2495 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
2400-2495	0.8

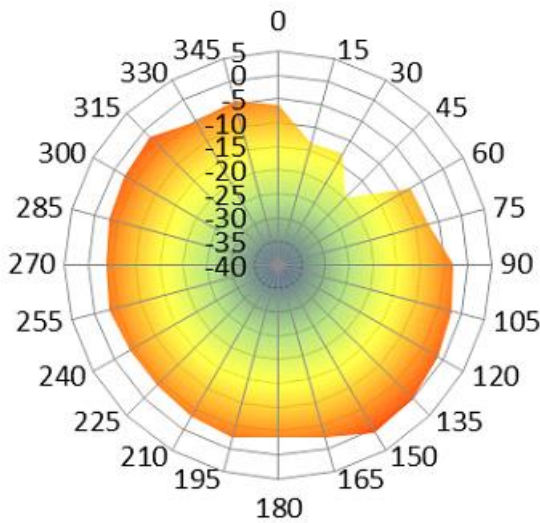


Max Antenna 2D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5150-5250	1.87

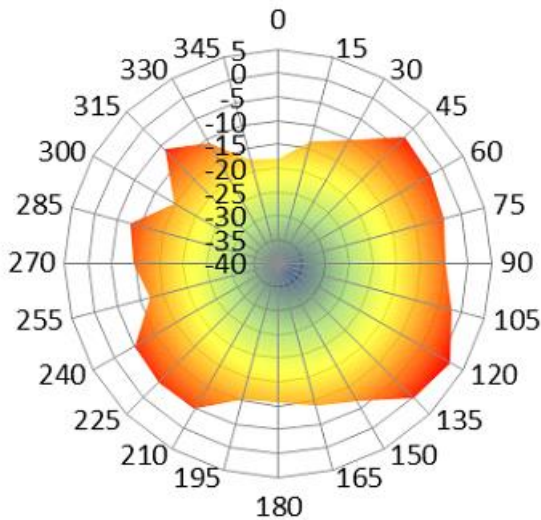


Max Antenna 2D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5250-5350	2.64

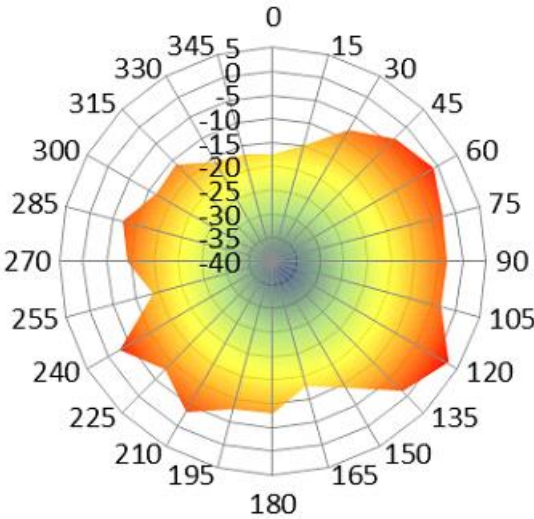


Max Antenna 2D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5470-5725	2.68

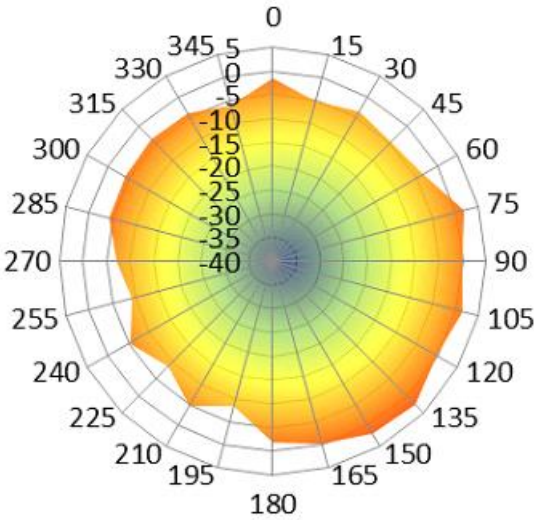


Max Antenna 2D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5725-5850	2.68

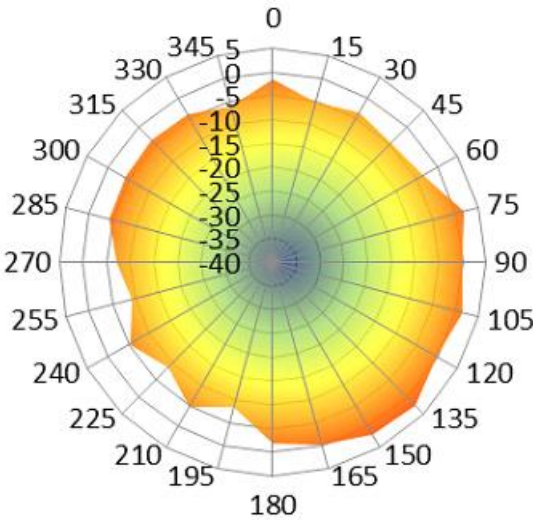


Max Antenna 2D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5850-5895	2.38

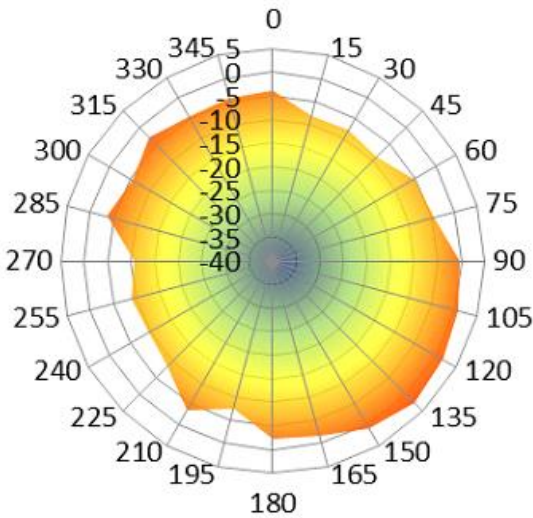


Max Antenna 2D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5925-6425	2.81

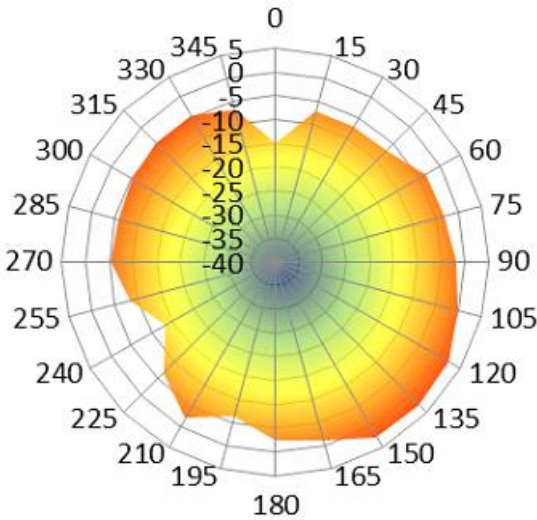


Max Antenna 2D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6425-6525	1.81

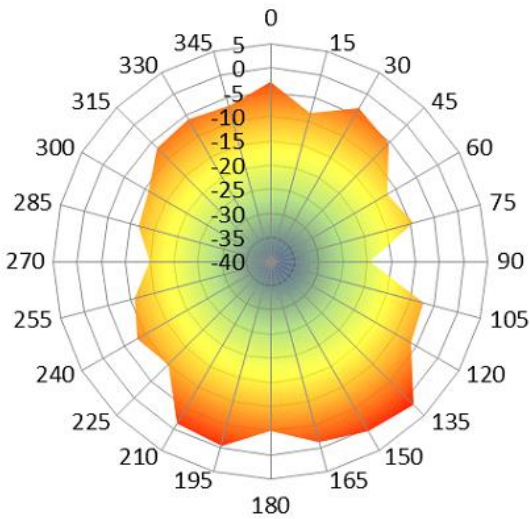


Max Antenna 2D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6525-6875	2.01

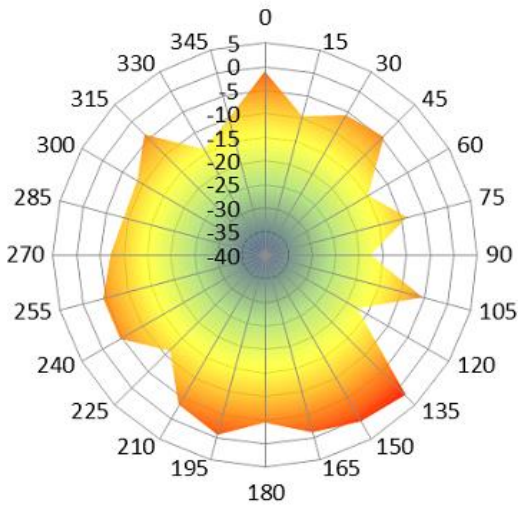

Max Antenna 2D Radiation Pattern 6875-7125 MHz


Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6875-7125	1.93

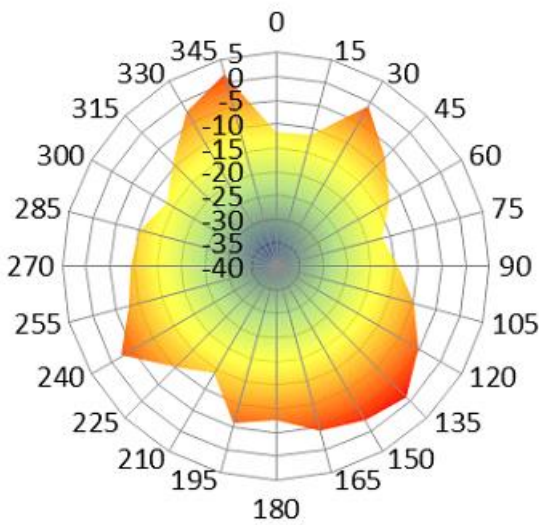

Auxiliary Antenna


Max Antenna 2D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
2400-2483.5	1.84

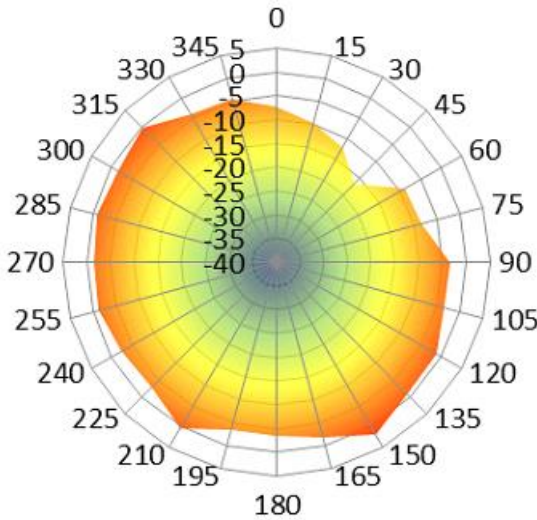


Max Antenna 2D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5150-5250	2.3

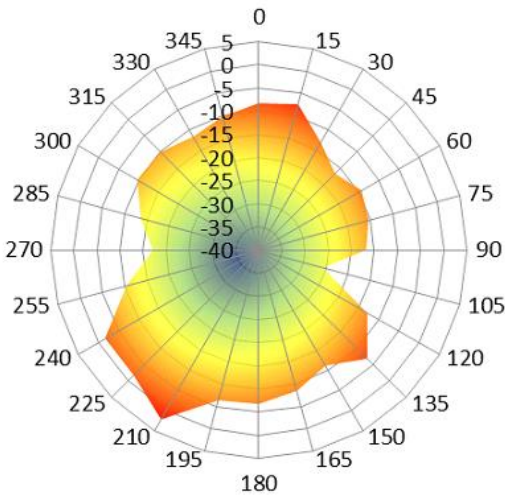


Max Antenna 2D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5250-5350	2.52

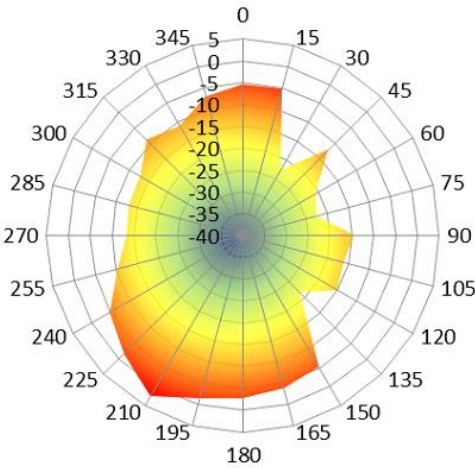


Max Antenna 2D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5470-5725	2.86

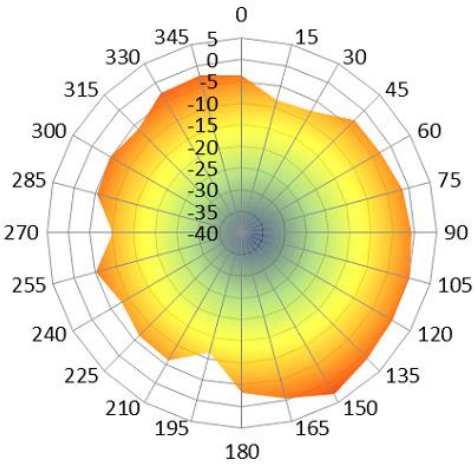


Max Antenna 2D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5725-5850	2.85

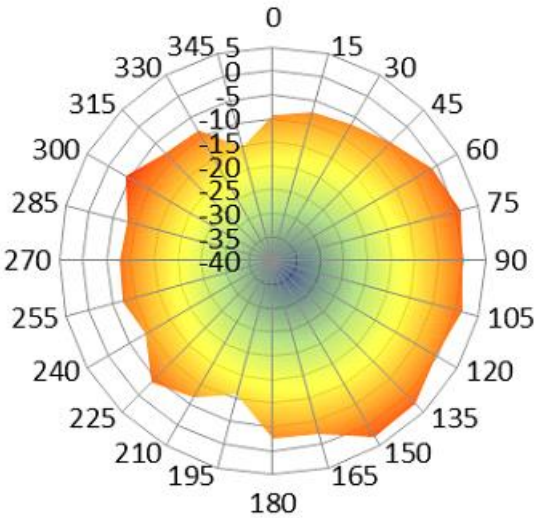


Max Antenna 2D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5850-5895	2.4

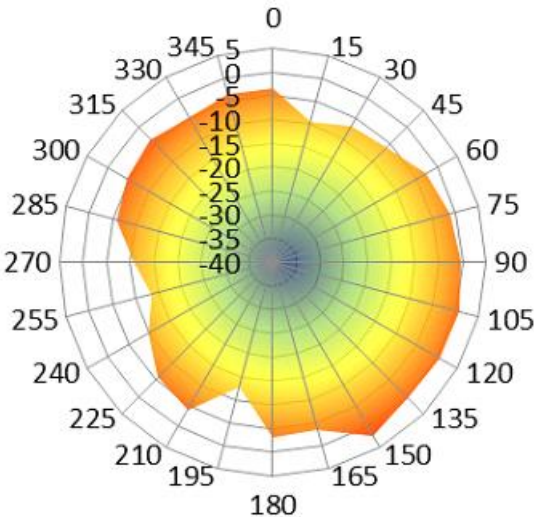


Max Antenna 2D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5925-6425	2.9

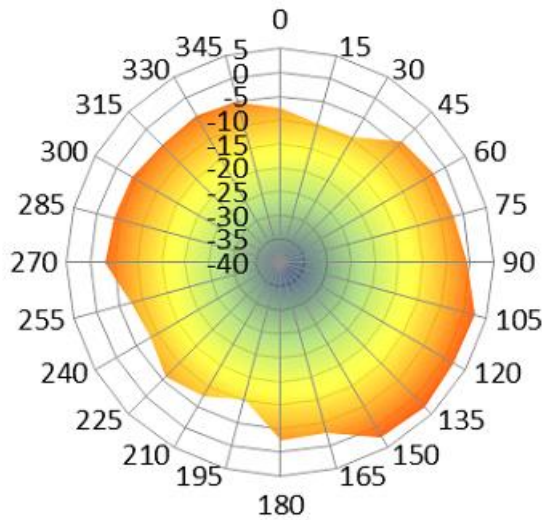


Max Antenna 2D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6425-6525	1.18

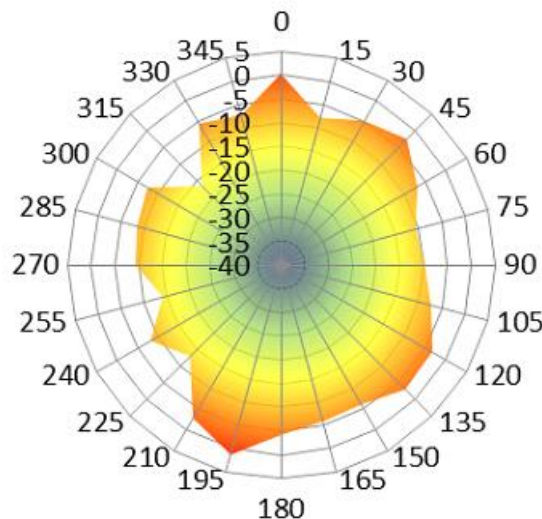


Max Antenna 2D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6525-6875	2.6

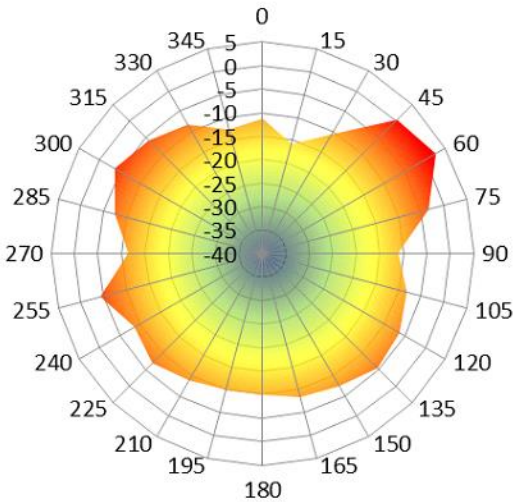

Max Antenna 2D Radiation Pattern 6875-7125 MHz


Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6875-7125	0.16

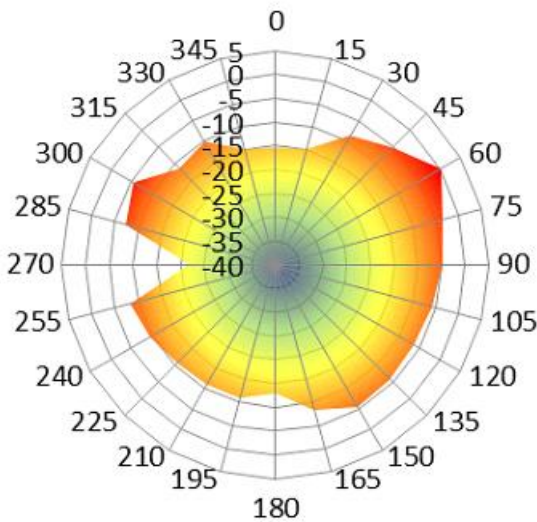

Section 4. Antenna Host Platform Location Information


Include a **dimensioned photo(s) or dimensioned drawing(s)** of Main and Aux antenna placements (measurements are not required for receive-only antenna).

Any antenna that transmits must show dimensions to bottom of laptop. Provide a description of the materials that are used for supporting or surrounding transmit antennas; for example, non-conductive plastics vs. conductive coated plastic or metallic materials.

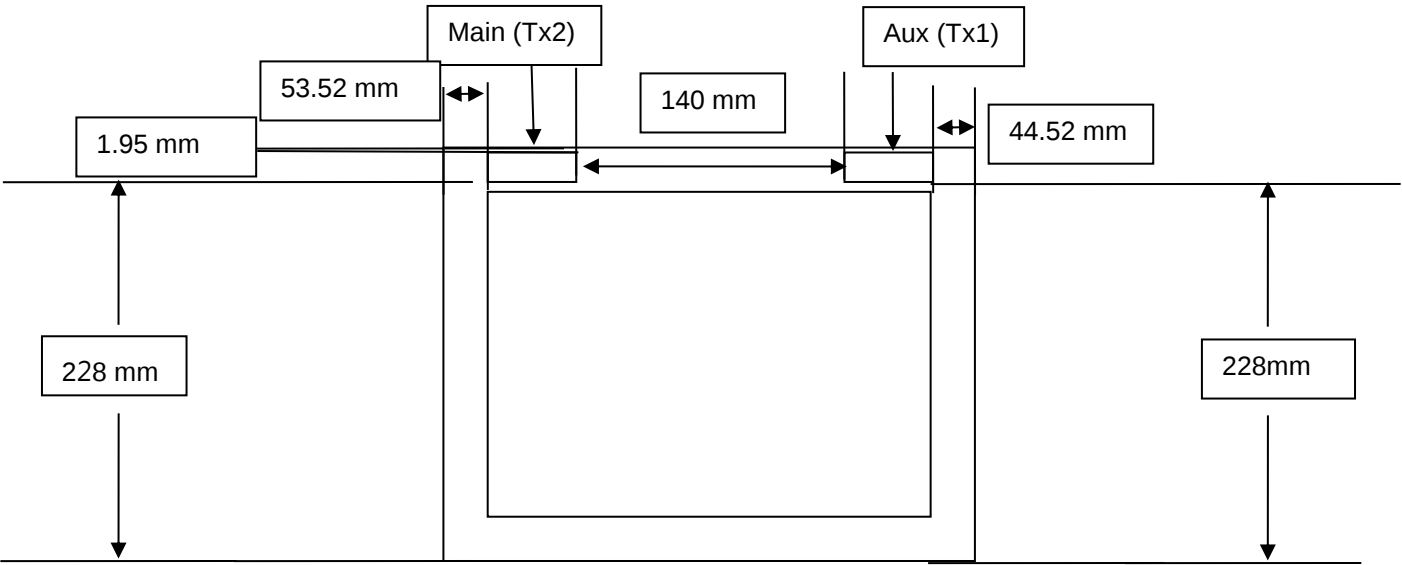

Section 5. Antenna dimensional information for SAR evaluation

Include a **dimensioned photo(s) or dimensioned drawing(s)** showing the distance (mm) between the transmit antennas and the user. For notebook/laptop hosts show lapheld position (example below). For tablet hosts show all orientations including lapheld, primary & secondary portrait, primary & secondary landscape positions. Include a description of any proximity sensors or power throttling implementations that limit or exclude use of any host orientation.

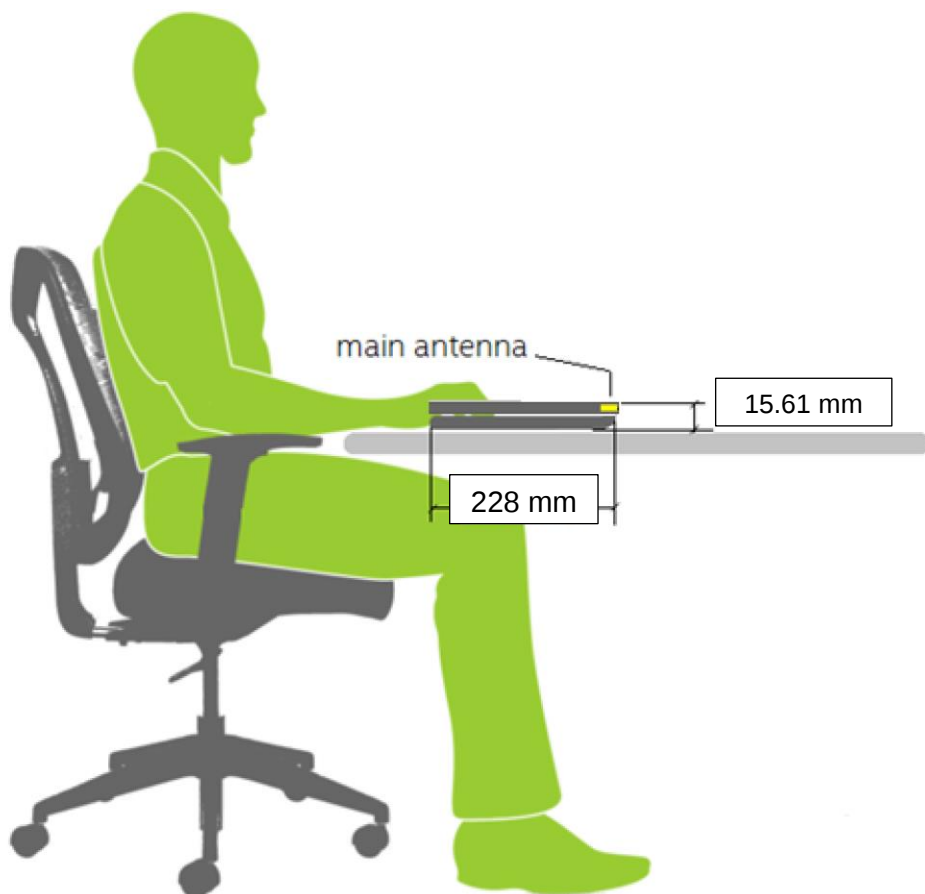

Section 6. Diagram Example of Co-Location Antenna Separation

Include a **dimensioned photo or dimensioned drawing** showing the distance (mm) between all WLAN transmit antennas and other co-located radiator transmit antenna such as Bluetooth, WWAN,..

(Note: Due to the evolving rules regarding co-location, each platform will need to be reviewed on a case by case basis)

