

TEST REPORT

EUT Description	Convertible PC
Brand Name	HP
Model Name	TPN-C165
FCC ID	PD9AX211NG
ISED ID	1000M-AX211NG
Date of Test Start/End	2023-02-17 / 2023-02-17
Features	IEEE 802.11a/b/g/n/ac/ax

Applicant	Intel Mobile Communications
Address	100 Center Point Circle, Suite 200 Columbia, South Carolina 29210 USA
Contact Person	Steven Hackett
Telephone/Fax/ Email	steven.c.hackett@intel.com

Test Report identification	221202-01.TR01
Revision Control	Rev. 00 This test report replaces any previous versions of this test report (see Section 7)

The test results relate only to the samples tested.

Reviewed by _____

Intel Corporation S.A.S – WRF Lab
425 rue de Goa – Le Cargo B6 - 06600, Antibes, France
Tel. +33493001400 / Fax +33493001401

Table of Contents

1. Standards, reference documents and applicable test methods	3
2. General conditions, competences and guarantees	3
3. Environmental Conditions	3
4. Test Sample	3
5. EUT Features	4
6. Remarks and comments	4
7. Test Results summary	4
7.1. WLAN TX POWER TABLE SUMMARY	4
8. Document Revision History	5
Annex A. Test & System description	6
A.1 TEST SETUP	6
A.2 PROCEDURE	6
A.3 TEST EQUIPMENT LIST	7
Annex B. Test Results	8
B.1 TRIGGER LID ANGLE DETECTION AND POWER VERIFICATION 2.4GHz	8
B.1.1 LCD DIRECTION 0°	8
B.1.2 LCD DIRECTION 90/270°	10
B.1.3 LCD DIRECTION 180°	12
B.2 TRIGGER LID ANGLE DETECTION AND POWER VERIFICATION 5GHz	14
B.2.1 LCD DIRECTION 0°	14
B.2.2 LCD DIRECTION 90/270°	16
B.2.3 LCD DIRECTION 180°	18

1. Standards, reference documents and applicable test methods

- a. KDB 388624 D02 Pre-Approval Guidance List v18, PRE-APPROVAL GUIDANCE LIST
- b. FCC Presentations TCB Workshop November 2019, RF exposure procedures.

2. General conditions, competences and guarantees

- ✓ Intel WRF Lab only provides testing services and is committed to providing reliable, unbiased test results and interpretations.
- ✓ Intel WRF Lab is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.
- ✓ Intel WRF Lab has developed calibration and proficiency programs for its measurement equipment to ensure correlated and reliable results to its customers.
- ✓ This report is only referred to the item that has undergone the test.
- ✓ This report does not imply an approval of the product by the Certification Bodies or competent Authorities.

3. Environmental Conditions

- ✓ At the site where the measurements were performed the following limits were not exceeded during the tests:

Temperature	22.9°C ± 1°C
Humidity	23.9% ± 2%

4. Test Sample

Sample	ID #	Description	Model	Serial #	Note
#1	221202-01.S07	Convertible PC	TPN-C165	540JPR5	-

5. EUT Features

The herein information is provided by the customer.

Intel WRF Lab declines any responsibility for the accuracy of the stated customer provided information, especially if it has any impact on the correctness of test results presented in this report.

Brand Name	HP
Model Name	TPN-C165
Prototype / Production	Production
Host Identification	Convertible PC

6. Remarks and comments

1. The test report is validation of the G sensor functionality

7. Test Results summary

7.1. WLAN Tx Power Table Summary

Device Mode	Lid Angle range	LCD Direction	2.4GHz-CH6 802.11b				5GHz-CH120 802.11a			
			Target Power (dBm)		Measured Power (dBm)		Target Power (dBm)		Measured Power (dBm)	
			Antenna AUX	Antenna MAIN	Antenna AUX	Antenna MAIN	Antenna AUX	Antenna MAIN	Antenna AUX	Antenna MAIN
Lid Close	0°≤ - <30°	-	Standby	Standby	Standby	Standby	Standby	Standby	Standby	Standby
Notebook	30°≤ - <130°	0°	20.0	20.0	19.3	19.4	20.0	20.0	19.5	19.2
Tent	200°≤ - <340°	180°	19.0	19.0	18.6	18.5	17.0	17.0	16.4	16.1
Stand	200°≤ - <340°	0°	20.0	20.0	19.3	19.5	20.0	20.0	19.5	19.2
Tablet	130°≤ - <200° 200°≤ - <340° 340°≤ - <360°	0° 90°or 270°	19.0	19.0	18.6	18.6	17.0	17.0	16.4	16.1
Book	30°≤ - <200°	90°; 270°	19.0	19.0	18.6	18.7	17.0	17.0	16.4	16.1

8. Document Revision History

Revision #	Date	Modified by	Revision Details
Rev.00	2023-02-17	Axel. G	Initial release


Annex A. Test & System description

A.1 Test setup

The conducted power measurement test setup is described in the following and illustrated in Figure 1.

- The DUT is convertible PC from HP model TPN-C165. An AX211NGW connectivity module is installed inside
- A control PC is used to configure the call box as an access point to manage the uplink and downlink data traffic.
- Uplink signal power is measured with the Call Box.
- Path loss in the power measurement setup from the wireless module antenna port to the Call Box.

Figure.1 – Power measurement test setup.

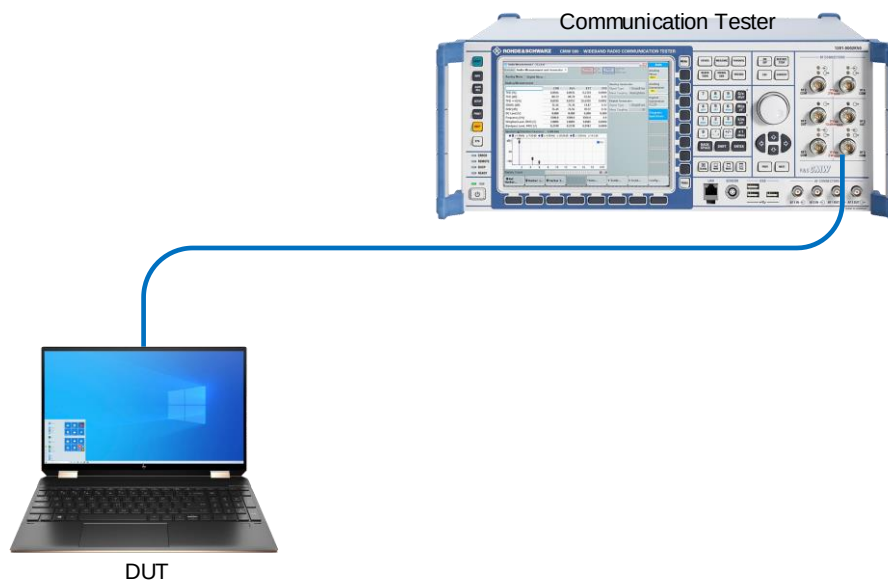

A.2 Procedure

The following additional guidance applies only to convertible laptops whose screen rotates around one axis, from 0 degrees to 360 degrees, in a clamshell style, i.e., from closed mode to open mode, to “tent” mode, and finally, to tablet mode. This process must be followed to determine the lid angle where a power reduction occurs, by taking power measurements at each step, as indicated in the step listed here below:

1. From the lid in closed mode (0 degrees), open the screen in 10-degree steps until laptop mode is obtained
2. Lower the screen by 5 degrees increments to verify that the “closed mode” is triggered
3. From the position of the previous step, open the screen in 1-degree increments until laptop mode is triggered again
4. Continue opening the screen in 1-degree increments until at least 5 degrees past where “laptop mode” was obtained, then continue opening the screen in 10-degree steps until the device switches to tablet mode
5. Reverse the previous procedure to go from tablet mode back down to closed mode

A.3 Test Equipment List

Equipment and accessories used for the conducted power measurement test setup are listed below. The Test Platform (DUT), test setup and associated equipment are shown in A.1.

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
125-000	Communication Tester	CMW500	129337	Rohde & Schwartz	2021-04-12	2023-04-12
022-003 022-004	RF path (RF cable + Adapters)	-	-	-	RF path loss was verified before usage	

Annex B. Test Results

B.1 Trigger lid angle detection and power verification 2.4GHz

B.1.1 LCD direction 0°

The lid is rotating from 0 to 360. The screen is vertical, LCD direction is 0 degree.

Mode	Angle (degree)	Power measured 2.4GHz-Ch6(dBm)	
		AUX	MAIN
Lid close	0	Standby	Standby
	10	Standby	Standby
	20	Standby	Standby
Notebook	30	19.3	19.4
Lid close	25	Standby	Standby
	26	Standby	Standby
	27	Standby	Standby
	28	Standby	Standby
Notebook	29	Standby	Standby
	30	19.3	19.4
	31	19.3	19.4
	32	19.3	19.4
	33	19.3	19.4
	34	19.3	19.4
	35	19.3	19.4
	40	19.3	19.4
	50	19.3	19.4
	60	19.3	19.4
	70	19.3	19.4
	80	19.3	19.4
	90	19.3	19.4
	100	19.3	19.4
	110	19.3	19.4
	120	19.3	19.4
	130	19.3	19.4
Tablet	140	18.6	18.6
Notebook	135	19.3	19.4
Tablet	136	18.6	18.6
	137	18.6	18.6
	138	18.6	18.6
	139	18.6	18.6
	140	18.6	18.6
	150	18.6	18.6
	160	18.6	18.6
	170	18.6	18.6
	180	18.6	18.6
	190	18.6	18.6
Stand	210	19.3	19.5
Tablet	205	18.6	18.6
Stand	206	19.3	19.5
	207	19.3	19.5
	208	19.3	19.5
	209	19.3	19.5
	210	19.3	19.5
	220	19.3	19.5
	230	19.3	19.5

Mode	Angle (degree)	Power measured 2.4GHz-Ch6(dBm)	
		AUX	MAIN
Stand	240	19.3	19.5
	250	19.3	19.5
	260	19.3	19.5
	270	19.3	19.5
	280	19.3	19.5
	290	19.3	19.5
	300	19.3	19.5
	310	19.3	19.5
	320	19.3	19.5
	330	19.3	19.5
Tablet	340	19.3	19.5
Tablet	350	18.6	18.6
Stand	345	19.3	19.5
Tablet	346	18.6	18.6
	347	18.6	18.6
	348	18.6	18.6
	349	18.6	18.6
	350	18.6	18.6
	351	18.6	18.6
	360	18.6	18.6

Test Report No: 221202-01.TR01

The lid is rotating from 360 degrees to 0 degree. The screen is vertical, LCD direction to 0 degree.

Mode	Angle	Power measured		Mode	Angle	Power measured	
	(degree)	2.4GHz-Ch6(dBm)			(degree)	2.4GHz-Ch6(dBm)	
		AUX	MAIN			AUX	MAIN
Tablet	360	18.6	18.6	Notebook	110	19.3	19.4
	350	18.6	18.6		100	19.3	19.4
	340	18.6	18.6		90	19.3	19.4
Stand	330	19.3	19.5		80	19.3	19.4
Tablet	335	18.6	18.6		70	19.3	19.4
Stand	334	19.3	19.5		60	19.3	19.4
	333	19.3	19.5		50	19.3	19.4
	332	19.3	19.5		40	19.3	19.4
	331	19.3	19.5		30	19.3	19.4
	330	19.3	19.5	Lid close	20	Standby	Standby
	329	19.3	19.5	Notebook	25	19.3	19.4
	320	19.3	19.5	Lid close	24	Standby	Standby
	310	19.3	19.5		23	Standby	Standby
	300	19.3	19.5		22	Standby	Standby
	290	19.3	19.5		21	Standby	Standby
	280	19.3	19.5		20	Standby	Standby
	270	19.3	19.5		10	Standby	Standby
	260	19.3	19.5		0	Standby	Standby
	250	19.3	19.5				
	240	19.3	19.5				
	230	19.3	19.5				
	220	19.3	19.5				
	210	19.3	19.5				
	200	19.3	19.5				
Tablet	190	18.6	18.6				
Stand	195	19.3	19.5				
Tablet	194	18.6	18.6				
	193	18.6	18.6				
	192	18.6	18.6				
	191	18.6	18.6				
	190	18.6	18.6				
	180	18.6	18.6				
	170	18.6	18.6				
	160	18.6	18.6				
	150	18.6	18.6				
	140	18.6	18.6				
	130	18.6	18.6				
Notebook	120	19.3	19.4				
Tablet	125	18.6	18.6				
Notebook	124	19.3	19.4				
	123	19.3	19.4				
	122	19.3	19.4				
	121	19.3	19.4				
	120	19.3	19.4				

Test Report No: 221202-01.TR01

B.1.2 LCD direction 90/270°

The lid is rotating from 0 to 360 degrees. The screen is vertical, LCD direction to 90 degrees.

Mode	Angle	Power measured	
	(degree)	2.4GHz-Ch6(dBm)	
		AUX	MAIN
Lid close	0	Standby	Standby
	10	Standby	Standby
	20	Standby	Standby
Book	30	18.6	18.7
Lid close	25	Standby	Standby
	26	Standby	Standby
	27	Standby	Standby
	28	Standby	Standby
	29	Standby	Standby
Book	30	18.6	18.7
	31	18.6	18.7
	32	18.6	18.7
	33	18.6	18.7
	34	18.6	18.7
	35	18.6	18.7
	40	18.6	18.7
	50	18.6	18.7
	60	18.6	18.7
	70	18.6	18.7
	80	18.6	18.7
	90	18.6	18.7
	100	18.6	18.7
	110	18.6	18.7
	120	18.6	18.7
	130	18.6	18.7
	140	18.6	18.7
	150	18.6	18.7
	160	18.6	18.7
	170	18.6	18.7
	180	18.6	18.7
	190	18.6	18.7
	200	18.6	18.7
Tablet	210	18.6	18.5
Book	205	18.6	18.7
Tablet	206	18.6	18.5
	207	18.6	18.5
	208	18.6	18.5
	209	18.6	18.5
	210	18.6	18.5
	220	18.6	18.5
	230	18.6	18.5
	240	18.6	18.5
	250	18.6	18.5
	260	18.6	18.5
	270	18.6	18.5
	280	18.6	18.5
	290	18.6	18.5
	300	18.6	18.5
	310	18.6	18.5
	320	18.6	18.5
	330	18.6	18.5
	340	18.6	18.5
	350	18.6	18.5
	360	18.6	18.5

The lid is rotating from 360 to 0 degree. The screen is vertical, LCD direction to 90 or 270 degrees.

Test Report No: 221202-01.TR01

Mode	Angle	Power measured	
	(degree)	2.4GHz-Ch6(dBm)	
		AUX	MAIN
Tablet	360	18.6	18.6
	350	18.6	18.6
	340	18.6	18.6
	330	18.6	18.6
	320	18.6	18.6
	310	18.6	18.6
	300	18.6	18.6
	290	18.6	18.6
	280	18.6	18.6
	270	18.6	18.6
	260	18.6	18.6
	250	18.6	18.6
	240	18.6	18.6
	230	18.6	18.6
	220	18.6	18.6
	210	18.6	18.6
	200	18.6	18.6
Book	190	18.6	18.7
Tablet	195	18.6	18.6
Book	194	18.6	18.7
	193	18.6	18.7
	192	18.6	18.7
	191	18.6	18.7
	190	18.6	18.7
	180	18.6	18.7
	170	18.6	18.7
	160	18.6	18.7
	150	18.6	18.7
	140	18.6	18.7
	130	18.6	18.7
	120	18.6	18.7
	110	18.6	18.7
	100	18.6	18.7
	90	18.6	18.7
	80	18.6	18.7
	70	18.6	18.7
	60	18.6	18.7
	50	18.6	18.7
	40	18.6	18.7
	30	18.6	18.7
Lid close	20	Standby	Standby
Book	25	18.6	18.7
Lid close	24	Standby	Standby
	23	Standby	Standby
	22	Standby	Standby
	21	Standby	Standby
	20	Standby	Standby
	10	Standby	Standby
	0	Standby	Standby

B.1.3 LCD direction 180°

The lid is rotating from 360 degrees to 180 degrees. The screen is vertical, LCD direction to 180 degrees.
 Note: The LCD direction switch to 0 degrees for low angle.

Mode	Angle (degree)	Power measured 2.4GHz-Ch6(dBm)	
		AUX	MAIN
Tablet	360	18.6	18.6
	350	18.6	18.6
	340	18.6	18.6
Tent	330	18.6	18.5
Tablet	335	18.6	18.6
Tent	334	18.6	18.5
	333	18.6	18.5
	332	18.6	18.5
	331	18.6	18.5
	330	18.6	18.5
	320	18.6	18.5
	310	18.6	18.5
	300	18.6	18.5
	290	18.6	18.5
	280	18.6	18.5
	270	18.6	18.5
	260	18.6	18.5
	250	18.6	18.5
	240	18.6	18.5
	230	18.6	18.5
	220	18.6	18.5
	210	18.6	18.5
	200	18.6	18.5
Tablet	190	18.6	18.6
Tent	195	18.6	18.5
Tablet	194	18.6	18.6
	193	18.6	18.6
	192	18.6	18.6
	191	18.6	18.6
	190	18.6	18.6
	180	18.6	18.6

Test Report No: 221202-01.TR01

The lid is rotating from 180 degrees to 360 degrees. The screen is vertical, LCD direction to 180 degrees.

Note: The LCD direction switch to 0 degrees for low angle.

Mode	Angle (degree)	Power measured 2.4GHz-Ch6(dBm)	
		AUX	MAIN
Tablet	180	18.6	18.6
	190	18.6	18.6
Tent	200	18.6	18.5
Tablet	195	18.6	18.6
Tent	196	18.6	18.5
	197	18.6	18.5
	198	18.6	18.5
	199	18.6	18.5
	200	18.6	18.5
	210	18.6	18.5
	220	18.6	18.5
	230	18.6	18.5
	240	18.6	18.5
	250	18.6	18.5
	260	18.6	18.5
	270	18.6	18.5
	280	18.6	18.5
	290	18.6	18.5
	300	18.6	18.5
	310	18.6	18.5
	320	18.6	18.5
	330	18.6	18.5
Tablet	340	18.6	18.6
Tent	335	18.6	18.5
	336	18.6	18.5
	337	18.6	18.5
	338	18.6	18.5
	339	18.6	18.5
Tablet	340	18.6	18.6
	350	18.6	18.6
	360	18.6	18.6

B.2 Trigger lid angle detection and power verification 5GHz

B.2.1 LCD direction 0°

The lid is rotating from 0 to 360. The screen is vertical, LCD direction is 0 degree.

Mode	Angle	Power measured	
	(degree)	5GHz-Ch120(dBm)	
		AUX	MAIN
Lid close	0	Standby	Standby
	10	Standby	Standby
	20	Standby	Standby
Notebook	30	19.5	19.2
Lid close	25	Standby	Standby
	26	Standby	Standby
	27	Standby	Standby
	28	Standby	Standby
	29	Standby	Standby
Notebook	30	19.5	19.2
	31	19.5	19.2
	32	19.5	19.2
	33	19.5	19.2
	34	19.5	19.2
	35	19.5	19.2
	40	19.5	19.2
	50	19.5	19.2
	60	19.5	19.2
	70	19.5	19.2
	80	19.5	19.2
	90	19.5	19.2
	100	19.5	19.2
	110	19.5	19.2
	120	19.5	19.2
	130	19.5	19.2
Tablet	140	16.4	16.1
Notebook	135	19.5	19.2
Tablet	136	16.4	16.1
	137	16.4	16.1
	138	16.4	16.1
	139	16.4	16.1
	140	16.4	16.1
	150	16.4	16.1
	160	16.4	16.1
	170	16.4	16.1
	180	16.4	16.1
	190	16.4	16.1
Stand	200	16.4	16.1
Stand	210	19.5	19.2
Tablet	205	16.4	16.1
Stand	206	19.5	19.2
	207	19.5	19.2
	208	19.5	19.2
	209	19.5	19.2
	210	19.5	19.2
	220	19.5	19.2
	230	19.5	19.2

Mode	Angle	Power measured	
	(degree)	5GHz-Ch120(dBm)	
		AUX	MAIN
Stand	240	19.5	19.2
	250	19.5	19.2
	260	19.5	19.2
	270	19.5	19.2
	280	19.5	19.2
	290	19.5	19.2
	300	19.5	19.2
	310	19.5	19.2
	320	19.5	19.2
	330	19.5	19.2
	340	19.5	19.2
Tablet	350	16.4	16.1
Stand	345	19.5	19.2
Tablet	346	16.4	16.1
	347	16.4	16.1
	348	16.4	16.1
	349	16.4	16.1
	350	16.4	16.1
	351	16.4	16.1
	360	16.4	16.1

The lid is rotating from 360 degrees to 0 degree. The screen is vertical, LCD direction to 0 degree.

Mode	Angle	Power measured	
	(degree)	5GHz-Ch120(dBm)	
		AUX	MAIN
Tablet	360	16.4	16.1
	350	16.4	16.1
	340	16.4	16.1
Stand	330	19.5	19.2
Tablet	335	16.4	16.1
Stand	334	19.5	19.2
	333	19.5	19.2
	332	19.5	19.2
	331	19.5	19.2
	330	19.5	19.2
	329	19.5	19.2
	320	19.5	19.2
	310	19.5	19.2
	300	19.5	19.2
	290	19.5	19.2
	280	19.5	19.2
	270	19.5	19.2
	260	19.5	19.2
	250	19.5	19.2
	240	19.5	19.2
	230	19.5	19.2
	220	19.5	19.2
	210	19.5	19.2
	200	19.5	19.2
Tablet	190	16.4	16.1
Stand	195	19.5	19.2
Tablet	194	16.4	16.1
	193	16.4	16.1
	192	16.4	16.1
	191	16.4	16.1
	190	16.4	16.1
	180	16.4	16.1
	170	16.4	16.1
	160	16.4	16.1
	150	16.4	16.1
	140	16.4	16.1
Notebook	130	16.4	16.1
	120	19.5	19.2
Tablet	125	16.4	16.1
Notebook	124	19.5	19.2
	123	19.5	19.2
	122	19.5	19.2
	121	19.5	19.2
Notebook	120	19.5	19.2
	110	19.5	19.2
	100	19.5	19.2
	90	19.5	19.2
	80	19.5	19.2
	70	19.5	19.2
	60	19.5	19.2
	50	19.5	19.2
	40	19.5	19.2
	30	19.5	19.2
Lid close	20	Standby	Standby
Notebook	25	19.5	19.2
Lid close	24	Standby	Standby
	23	Standby	Standby
	22	Standby	Standby
	21	Standby	Standby
	20	Standby	Standby
	10	Standby	Standby
	0	Standby	Standby

B.2.2 LCD direction 90/270°

The lid is rotating from 0 to 360 degrees. The screen is vertical, LCD direction to 90 degrees.

Mode	Angle (degree)	Power measured 5GHz-Ch120(dBm)	
		AUX	MAIN
Lid close	0	Standby	Standby
	10	Standby	Standby
	20	Standby	Standby
Book	30	16.4	16.1
Lid close	25	Standby	Standby
	26	Standby	Standby
	27	Standby	Standby
	28	Standby	Standby
	29	Standby	Standby
Book	30	16.4	16.1
	31	16.4	16.1
	32	16.4	16.1
	33	16.4	16.1
	34	16.4	16.1
	35	16.4	16.1
	40	16.4	16.1
	50	16.4	16.1
	60	16.4	16.1
	70	16.4	16.1
	80	16.4	16.1
	90	16.4	16.1
	100	16.4	16.1
	110	16.4	16.1
	120	16.4	16.1
	130	16.4	16.1
	140	16.4	16.1
	150	16.4	16.1
	160	16.4	16.1
	170	16.4	16.1
	180	16.4	16.1
	190	16.4	16.1
	200	16.4	16.1
Tablet	210	16.4	16.1
Book	205	16.4	16.1
Tablet	206	16.4	16.1
	207	16.4	16.1
	208	16.4	16.1
	209	16.4	16.1
	210	16.4	16.1
	220	16.4	16.1
	230	16.4	16.1
	240	16.4	16.1
	250	16.4	16.1
	260	16.4	16.1
	270	16.4	16.1
	280	16.4	16.1
	290	16.4	16.1
	300	16.4	16.1
	310	16.4	16.1
	320	16.4	16.1
	330	16.4	16.1
	340	16.4	16.1
	350	16.4	16.1
	360	16.4	16.1

Test Report No: 221202-01.TR01

The lid is rotating from 360 to 0 degree. The screen is vertical, LCD direction to 90 or 270 degrees.

Mode	Angle	Power measured	
	(degree)	5GHz-Ch120(dBm)	
		AUX	MAIN
Tablet	360	16.4	16.1
	350	16.4	16.1
	340	16.4	16.1
	330	16.4	16.1
	320	16.4	16.1
	310	16.4	16.1
	300	16.4	16.1
	290	16.4	16.1
	280	16.4	16.1
	270	16.4	16.1
	260	16.4	16.1
	250	16.4	16.1
	240	16.4	16.1
	230	16.4	16.1
	220	16.4	16.1
	210	16.4	16.1
	200	16.4	16.1
Book	190	16.4	16.1
Tablet	195	16.4	16.1
Book	194	16.4	16.1
	193	16.4	16.1
	192	16.4	16.1
	191	16.4	16.1
	190	16.4	16.1
	180	16.4	16.1
	170	16.4	16.1
	160	16.4	16.1
	150	16.4	16.1
	140	16.4	16.1
	130	16.4	16.1
	120	16.4	16.1
	110	16.4	16.1
	100	16.4	16.1
	90	16.4	16.1
	80	16.4	16.1
	70	16.4	16.1
	60	16.4	16.1
	50	16.4	16.1
	40	16.4	16.1
	30	16.4	16.1
Lid close	20	Standby	Standby
Book	25	16.4	16.1
Lid close	24	Standby	Standby
	23	Standby	Standby
	22	Standby	Standby
	21	Standby	Standby
	20	Standby	Standby
	10	Standby	Standby
	0	Standby	Standby

B.2.3 LCD direction 180°

The lid is rotating from 360 degrees to 180 degrees. The screen is vertical, LCD direction to 180 degrees.
Note: The LCD direction switch to 0 degrees for low angle.

Mode	Angle (degree)	Power measured 5GHz-Ch120(dBm)	
		AUX	MAIN
Tablet	360	16.4	16.1
	350	16.4	16.1
	340	16.4	16.1
Tent	330	16.4	16.1
Tablet	335	16.4	16.1
Tent	334	16.4	16.1
	333	16.4	16.1
	332	16.4	16.1
	331	16.4	16.1
	330	16.4	16.1
	320	16.4	16.1
	310	16.4	16.1
	300	16.4	16.1
	290	16.4	16.1
	280	16.4	16.1
	270	16.4	16.1
	260	16.4	16.1
	250	16.4	16.1
	240	16.4	16.1
	230	16.4	16.1
	220	16.4	16.1
	210	16.4	16.1
	200	16.4	16.1
Tablet	190	16.4	16.1
Tent	195	16.4	16.1
Tablet	194	16.4	16.1
	193	16.4	16.1
	192	16.4	16.1
	191	16.4	16.1
	190	16.4	16.1
	180	16.4	16.1

Test Report No: 221202-01.TR01

The lid is rotating from 180 degrees to 360 degrees. The screen is vertical, LCD direction to 180 degrees.
 Note: The LCD direction switch to 0 degrees for low angle.

Mode	Angle (degree)	Power measured 5GHz-Ch120(dBm)	
		AUX	MAIN
Tablet	180	16.4	16.1
	190	16.4	16.1
Tent	200	16.4	16.1
Tablet	195	16.4	16.1
Tent	196	16.4	16.1
	197	16.4	16.1
	198	16.4	16.1
	199	16.4	16.1
	200	16.4	16.1
	210	16.4	16.1
	220	16.4	16.1
	230	16.4	16.1
	240	16.4	16.1
	250	16.4	16.1
	260	16.4	16.1
	270	16.4	16.1
	280	16.4	16.1
	290	16.4	16.1
	300	16.4	16.1
	310	16.4	16.1
	320	16.4	16.1
	330	16.4	16.1
Tablet	340	16.4	16.1
Tent	335	16.4	16.1
	336	16.4	16.1
	337	16.4	16.1
	338	16.4	16.1
	339	16.4	16.1
Tablet	340	16.4	16.1
	350	16.4	16.1
	360	16.4	16.1