

#01_WLAN2.4GHz_802.11b 1Mbps_Back_8mm_Ch6;Main Ant

Communication System: WLAN 2.4GHz; Frequency: 2437.0 ; Duty Cycle: 1:1.012

Medium: HSL_2450_220523 Medium parameters used: $f = 2437.0$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 38.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(8.41, 8.41, 8.41); Calibrated: 2021-11-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2021-11-03
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10415-AAA
- MAIA: Area Scan: N/A; Zoom Scan: N/A


Area Scan (80.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 12.0 mm

SAR (1g) = 0.629 W/kg; SAR (10g) = 0.326 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.672 W/kg; SAR (10g) = 0.353 W/kg;

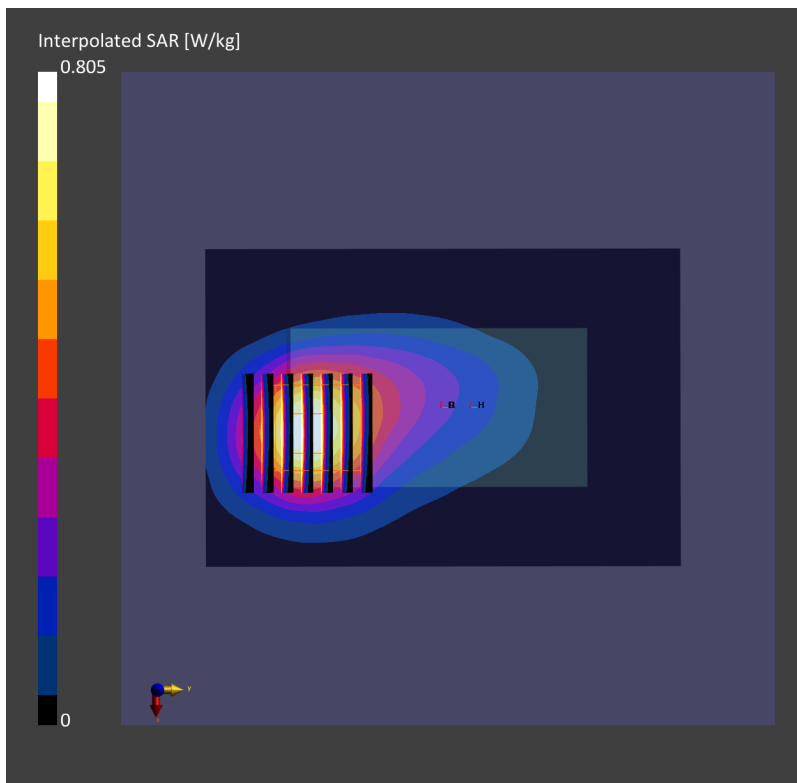

#02_WLAN5GHz_802.11ac-VHT80 MCS0_Left side_8mm_Ch58;Main Ant

Communication System: WLAN 5GHz; Frequency: 5290.0 ; Duty Cycle: 1:1.022

Medium: HSL_5250_220519 Medium parameters used: $f = 5290.0$ MHz; $\sigma = 4.79$ S/m; $\epsilon_r = 37.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(5.45, 5.45, 5.45); Calibrated: 2021-11-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2021-11-03
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10544-AAC
- MAIA: Area Scan: N/A; Zoom Scan: N/A


Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.592 W/kg; SAR (10g) = 0.210 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.17 dB

SAR (1g) = 0.687 W/kg; SAR (10g) = 0.223 W/kg;

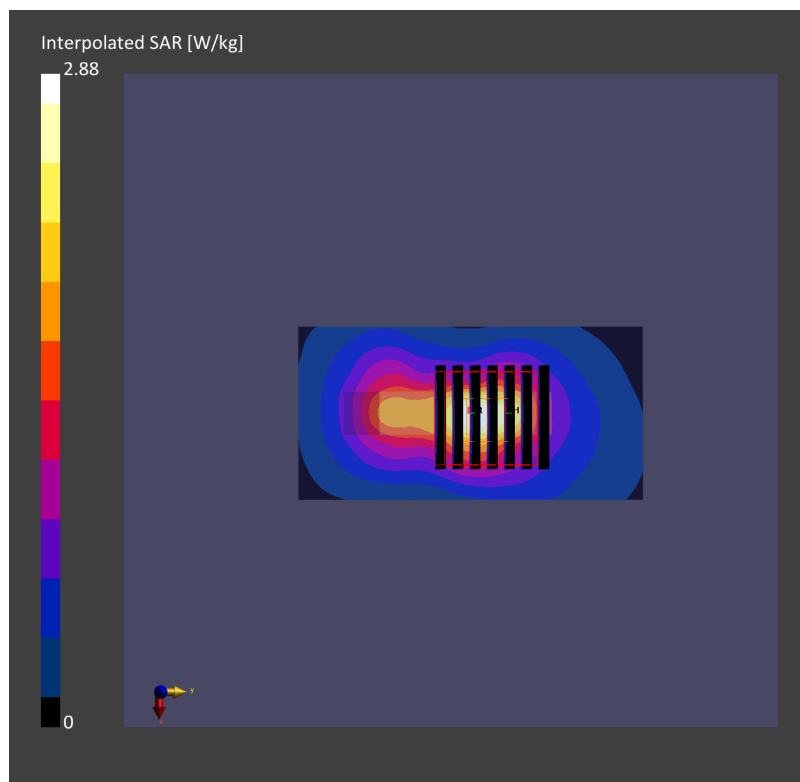

#03_WLAN5GHz_802.11ac-VHT80 MCS0_Left side_8mm_Ch106;Main Ant

Communication System: WLAN 5GHz; Frequency: 5530.0 ; Duty Cycle: 1:1.022

Medium: HSL_5600_220519 Medium parameters used: $f = 5530.0$ MHz; $\sigma = 5.05$ S/m; $\epsilon_r = 36.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(4.75, 4.75, 4.75); Calibrated: 2021-11-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2021-11-03
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10544-AAC
- MAIA: Area Scan: N/A; Zoom Scan: N/A


Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.452 W/kg; SAR (10g) = 0.151 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.11 dB

SAR (1g) = 0.526 W/kg; SAR (10g) = 0.160 W/kg;

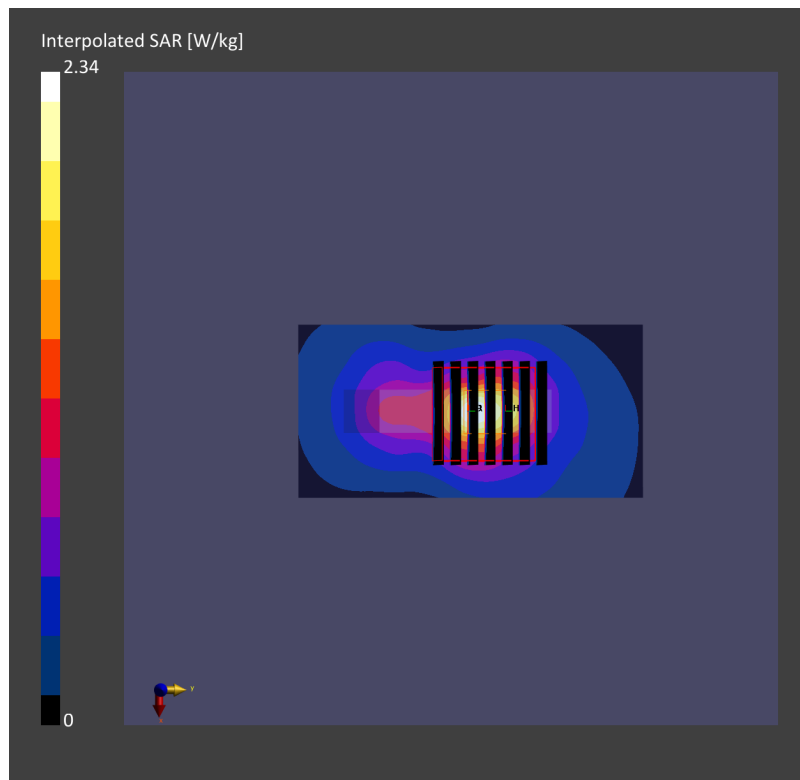

#04_WLAN5GHz_802.11ac-VHT80 MCS0_Left side_8mm_Ch138;Main Ant

Communication System: WLAN 5GHz; Frequency: 5690.0 ; Duty Cycle: 1:1.022

Medium: HSL_5750_220519 Medium parameters used: $f = 5690.0$ MHz; $\sigma = 5.23$ S/m; $\epsilon_r = 36.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(5.0, 5.0, 5.0); Calibrated: 2021-11-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2021-11-03
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10402-AAE
- MAIA: Area Scan: N/A; Zoom Scan: N/A


Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.366 W/kg; SAR (10g) = 0.120 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.07 dB

SAR (1g) = 0.412 W/kg; SAR (10g) = 0.123 W/kg;

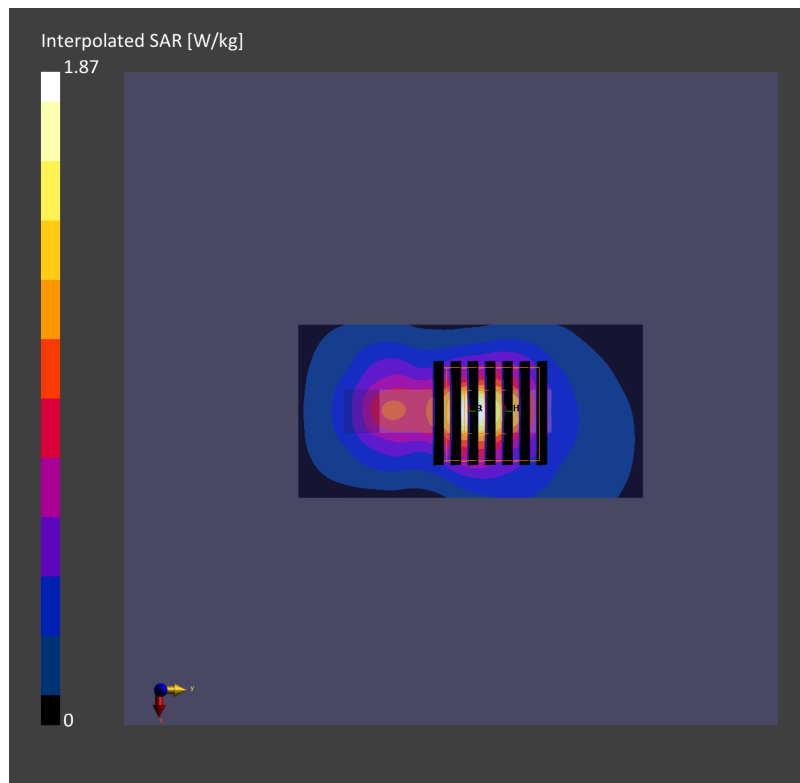

#05_Bluetooth_1Mbps_Back_8mm_Ch39;Aux Ant

Communication System: ISM 2.4 GHz Band; Frequency: 2441.0 ; Duty Cycle: 1:1.362

Medium: HSL_2450_220523 Medium parameters used: $f = 2441.0$ MHz; $\sigma = 1.84$ S/m; $\epsilon_r = 38.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(8.41, 8.41, 8.41); Calibrated: 2021-11-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2021-11-03
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: Bluetooth, 10670-AAA
- MAIA: Area Scan: N/A; Zoom Scan: N/A

Area Scan (72.0 mm x 120.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.118 W/kg; SAR (10g) = 0.061 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.122 W/kg; SAR (10g) = 0.064 W/kg;

