Regulatory WLAN Antenna Information

Platform information					
Brand	**ODM**	**RMN**	**Intel platform** (ex: Yes, No or NA)	**Platform type** (ex: regular NB, convertible PC, AIO…etc)	***SAR minimum separation (mm)**
HP Inc.	Quanta	TPN-Q292	Yes	convertible PC	1.1 mm

Antenna information			
Vendor	**Type**	**Antenna Part number** (Ant1/Tx1)	**Antenna Part number** (Ant2/Tx2)
WNC	**PIFA**	**(DQ6P15G6600) 81EABP15.G66**	**(DQ6P15G6600) 81EABP15.G66**

Antenna vendor Address
NO. 20, PARK AVENUE II , HSINCHU SCIENCE PARK, HSINCHU 30844, TAIWAN

Peak gain w/ cable loss (dBi)*										
	2.4GHz 2400-2483.5 MHz	**5.2GHz** 5150-5250MHz	**5.3GHz** 5250-5350MHz	**5.6GHz** 5470-5725MHz	**5.8GHz** 5725-5850MHz	**5.9GHz** 5850-5895MHz	**6.2GHz** 5925-6425MHz	**6.5GHz** 6425-6525MHz	**6.7GHz** 6525-6875MHz	**7.0 GHz** 6875-7125MHz
Ant1	2.95	2.97	2.97	2.64	1.95	1.83	2.31	0.71	0.30	-1.31
Ant2	2.93	2.95	2.53	2.09	2.61	1.36	2.48	-1.77	-1.83	-0.98

Module Information	
Model	**Form factor and suffixes**
AX211NGW	Intel Garfield Peak 2 AX211 Wi-Fi 6e +Bluetooth 5.2 M.2 2230 160MHz CNVi WW WLAN
BE200NGW	Intel Gale Peak 2 BE200 Wi-Fi 7 + BT5.4 (802.11be 2x2)

Table of contents

1. Applicable test method
2. Test & System Description
    a. Test setup
    b. Equipment list
3. Setup photo

Section 1. Antenna Assembly Specifications

Section 2. Dimensioned Photos or Drawings of Antennas

Section 3. Radiation characteristics of antenna loaded in Host Platform

Section 4. Antenna Host Platform Location Information

Section 5. Antenna dimensional information for SAR evaluation

Section 6. Diagram Example of Co-Location Antenna Separation

1. **Applicable test methods**

ETS-Lindgren AMS-8500 system is 3D fully anechoic chamber, it is applied to the “Conical Cut test method”, the detail description is described as below.

The Conical Cut method requires the ability of the Measurement Antenna to be physically rotated in the theta plane (overhead) of the EUT for implementations using a single Measurement Antenna, Eleven conical cuts are required to capture data at every 15 degrees from the EUT, with the top (0 degrees) and bottom (180 degrees) cuts not being measured. Typically, the EUT will reAnt1 affixed to a turntable during the entire measurement process. The Measurement Antenna will be positioned at a starting theta angle. The EUT will then be rotated around the full 360 degrees of phi rotation. The Measurement Antenna will then be positioned at the next theta angle, and the process repeated.

		θ -Axis	Φ-Axis
Passive	Step size	15º~165º step: 15º	0º~345º step: 15º
	N / M (Points)	12	24

2. Test & System Description

a. Test setup

Typical Setup for ETS-Lindgren AMS-8500:

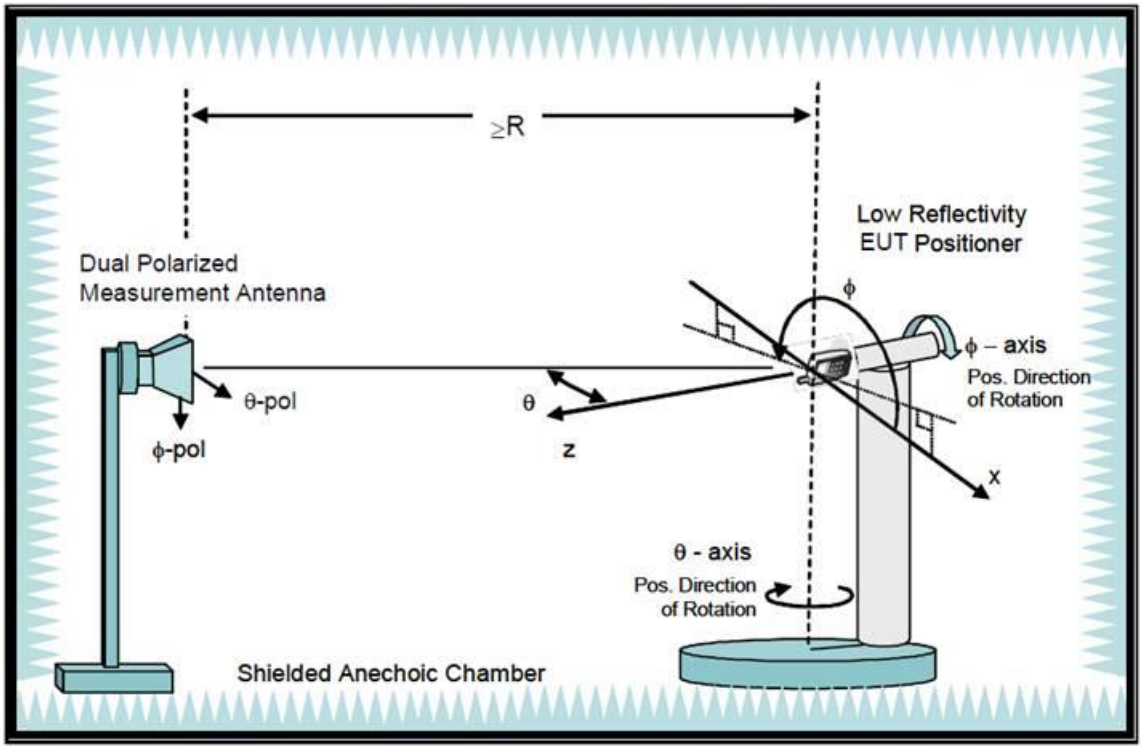

b. Equipment list

Equipment Description	Manufacturer	Identification no.	Current calibration date	Next calibration date
Network analyzer	Agilent	E5071C	2022/1/7	2023/1/6
Measurement software	ETS-Lindgren	EMQuest	N/A	N/A
Multi axis positioning system(MAPSTM)	ETS-Lindgren	EMCO 2115	N/A	N/A
Multi axis positioning system(MAPSTM)	ETS-Lindgren	EMCO 2110	N/A	N/A
MAPSTM controller	ETS-Lindgren	EMCO 2090	N/A	N/A
ETS OTA Chamber	ETS-Lindgren	AMS8500	2022/3/3	2022/3/2
Horn antenna	ETS-Lindgren	3164-10	2022/3/3	2022/3/2
Test Cable	ETS-Lindgren	RFC-SMR-100-SMS-350 IN	N/A	N/A

Note : Chamber calibration included full set of implement

Antenna Information

Section 1. Antenna Assembly Specifications

1A Antenna Part Number	1B Manufacturer	1C Antenna Type	1D Cable Assembly Part Number and Information	Freq Range MHz	1E * Peak Gain W/ Cable loss (dBi)	1F Peak Gain w/o Cable Loss (dBi)	1G Max VSWR	1H Cable Loss (dB)
P/N: DQ6P15G6600 (81EABP15.G66) Ant1 Antenna (TX1)	WNC	PIFA	Connector: I-PEX (P/N: 20.F2063.L01) 50 ohm Coaxial length: 113cm diameter: 1.37mm low loss	2400-2495	2.95	3.29	3	0.34
				5150-5250	2.97	3.47	3	0.50
				5250-5350	2.97	3.48	3	0.51
				5470-5725	2.64	3.16	3	0.52
				5725-5850	1.95	2.48	3	0.53
				5850-5895	1.83	2.36	3	0.53
				5925-6425	2.31	2.86	3	0.55
				6425-6525	0.71	1.27	3	0.56
				6525-6875	0.30	0.88	3	0.58
				6875-7125	-1.31	-0.71	3	0.60
P/N: DQ6P15G6600 (81EABP15.G66) Ant1 Antenna (TX2)	WNC	PIFA	Connector: I-PEX (P/N: 20.F2063.L01) 50 ohm Coaxial length: 183cm diameter: 1.37mm low loss	2400-2495	2.93	3.41	3	0.48
				5150-5250	2.95	3.66	3	0.71
				5250-5350	2.53	3.24	3	0.71
				5470-5725	2.09	2.82	3	0.73
				5725-5850	2.61	3.35	3	0.74
				5850-5895	1.36	2.11	3	0.75
				5925-6425	2.48	3.25	3	0.77
				6425-6525	-1.77	-0.97	3	0.80
				6525-6875	-1.83	-1.01	3	0.82
				6875-7125	-0.98	-0.14	3	0.84

Section 3. Radiation characteristics of antenna loaded in Host Platform

Ant1 Antenna

Max Antenna 2D Radiation Pattern 2400 – 2495 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
2400-2495	2.95

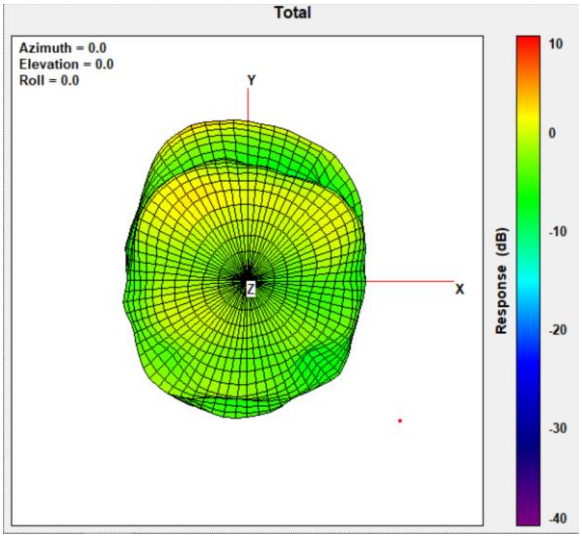

Max Antenna 2D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5150-5250	2.97

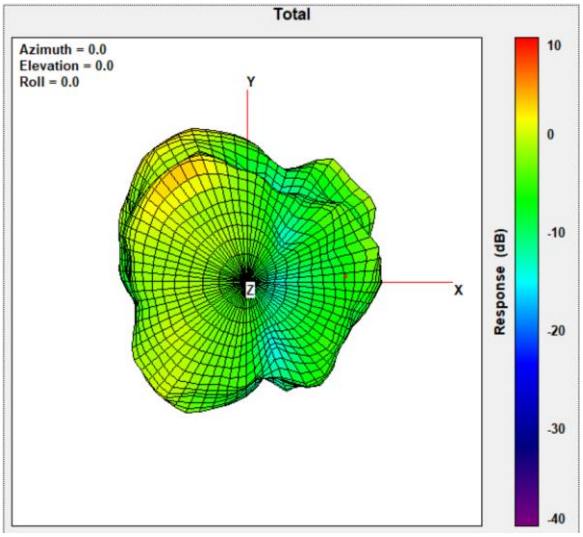

Max Antenna 2D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5250-5350	2.97

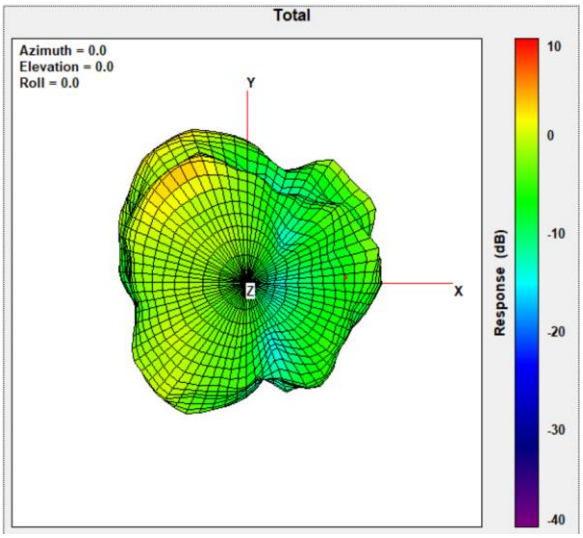

Max Antenna 2D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5470-5725	2.64

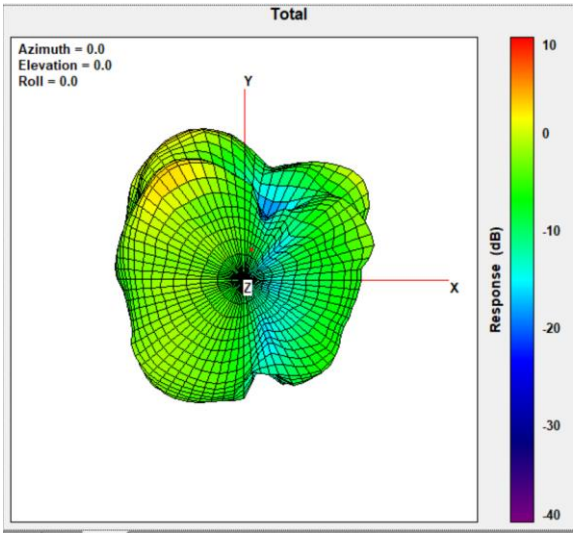

Max Antenna 2D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5725-5850	1.95

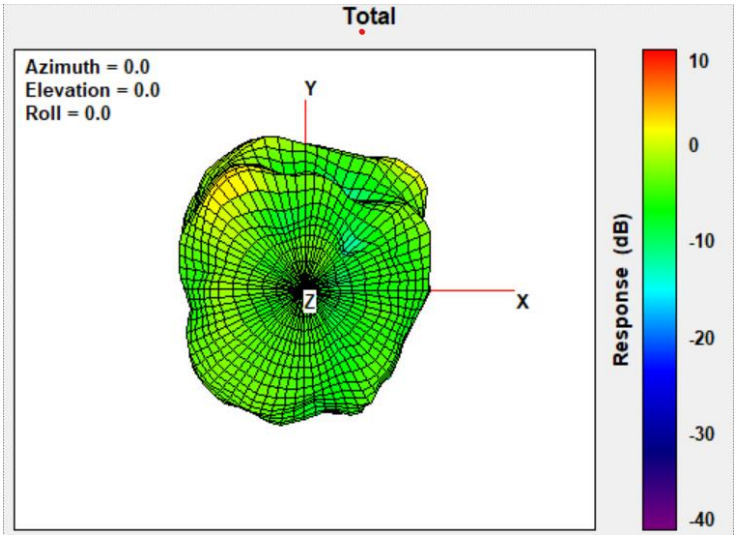

Max Antenna 2D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5850-5895	1.83

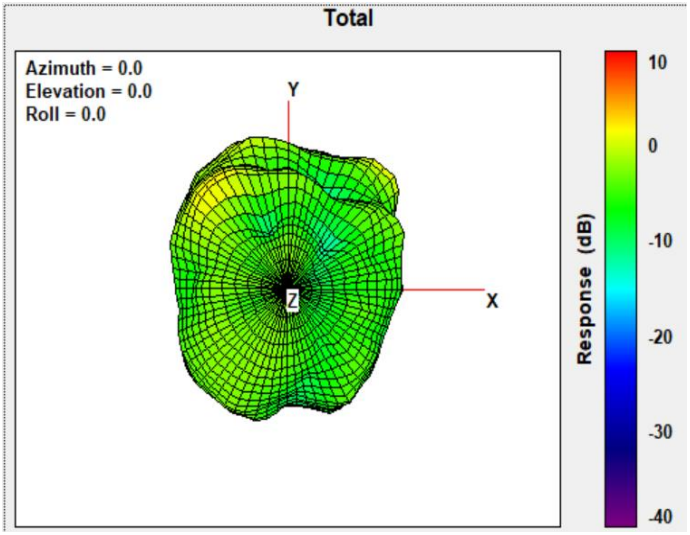

Max Antenna 2D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5925-6425	2.31

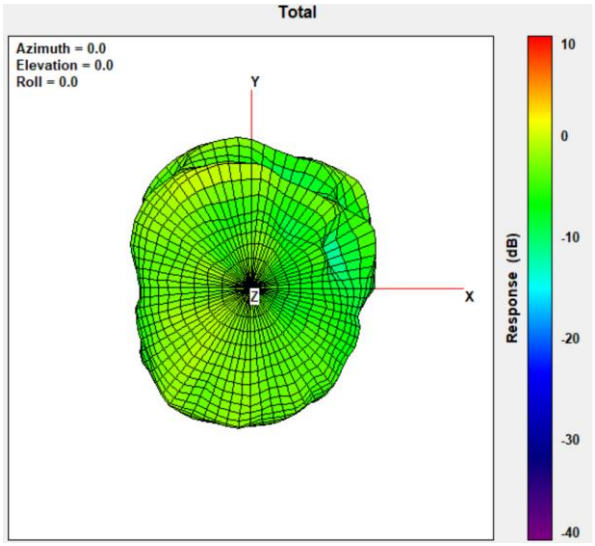

Max Antenna 2D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6425-6525	0.71

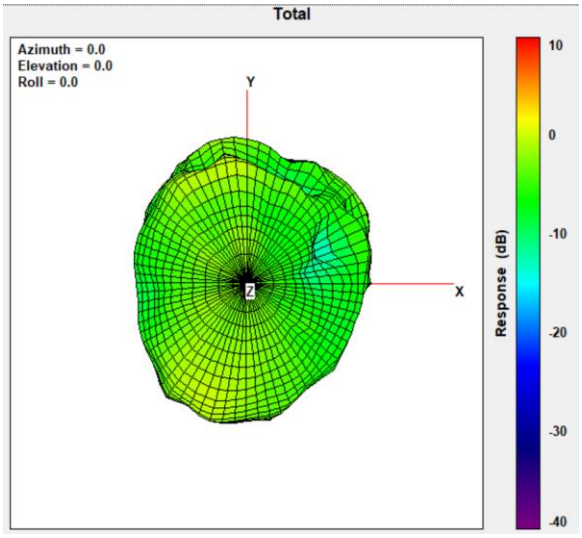

Max Antenna 2D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6525-6875	0.30

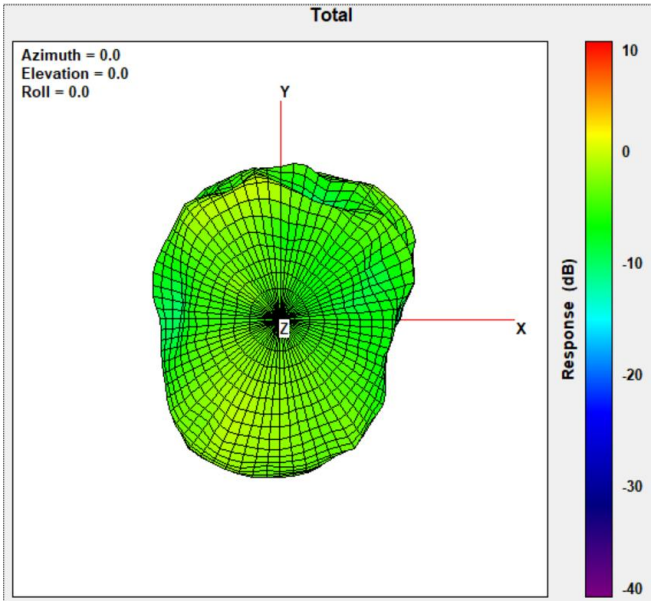

Max Antenna 2D Radiation Pattern 6875-7125 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6875-7125	-1.31

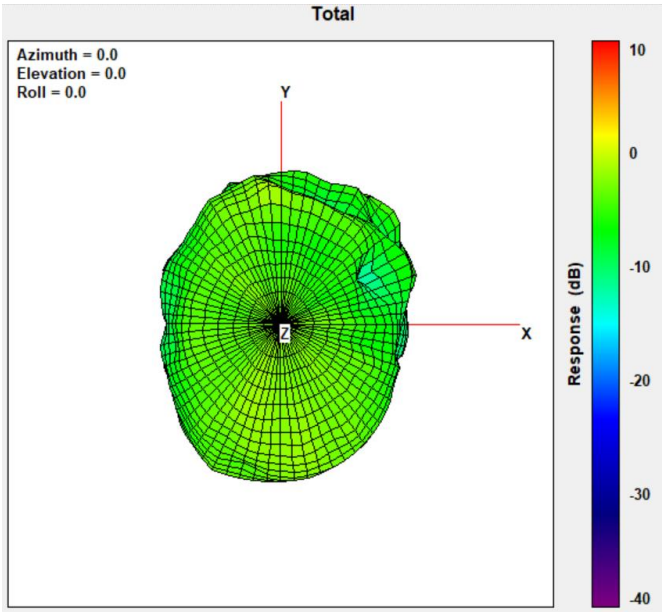

Ant2iliary Antenna

Max Antenna 2D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
2400-2483.5	2.93

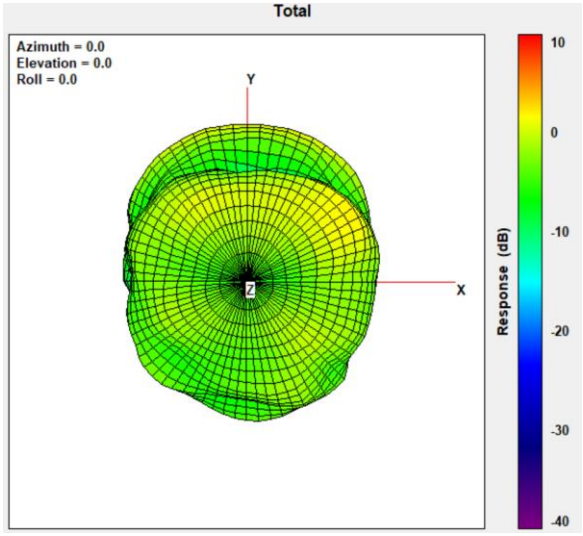

Max Antenna 2D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5150-5250	2.95

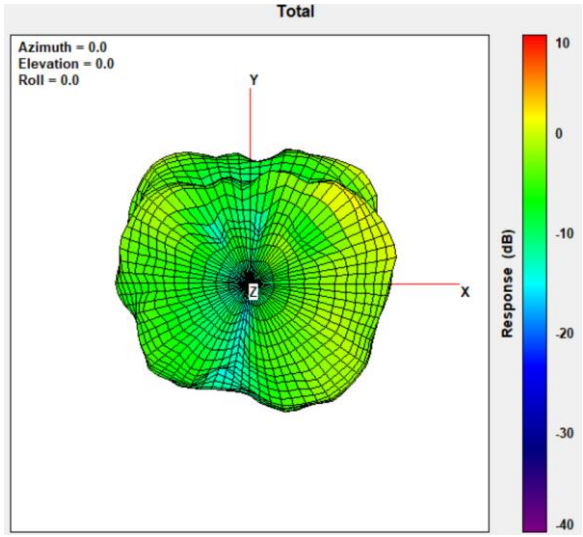

Max Antenna 2D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5250-5350	2.53

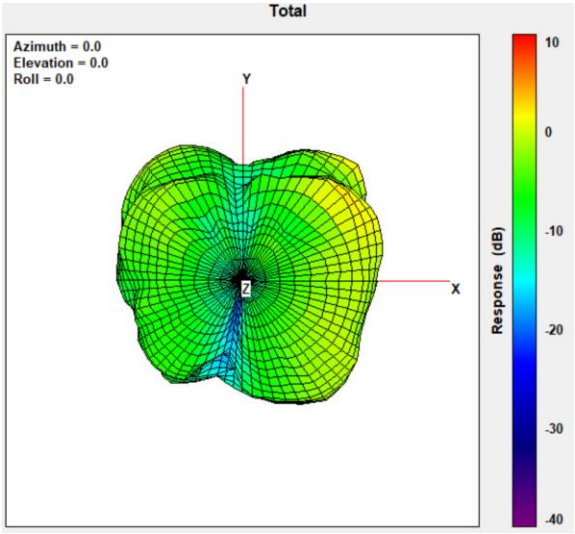

Max Antenna 2D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5470-5725	2.09

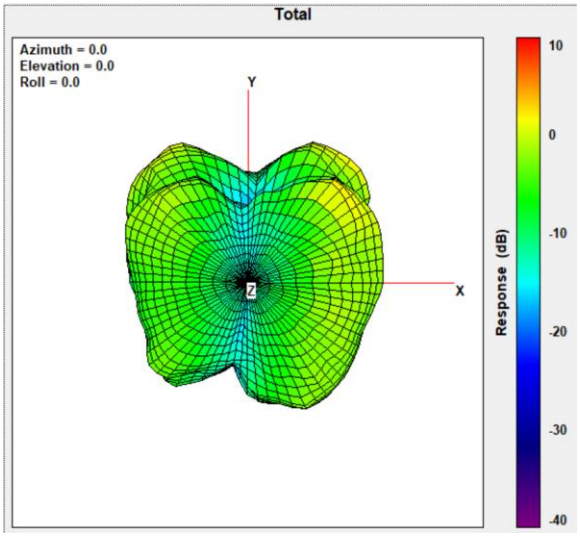

Max Antenna 2D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5725-5850	2.61

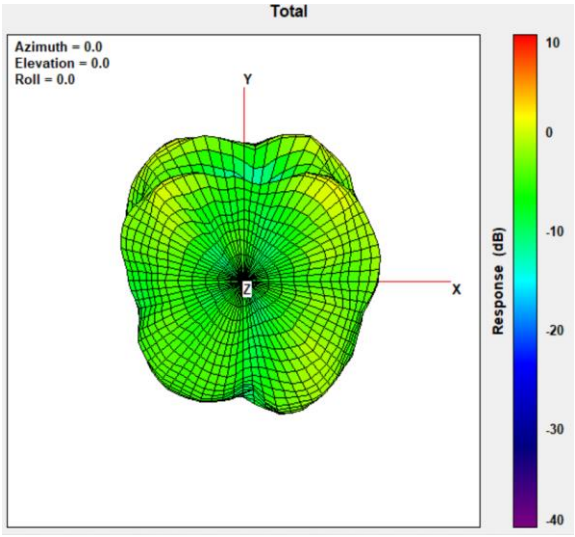

Max Antenna 2D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5850-5895	1.36

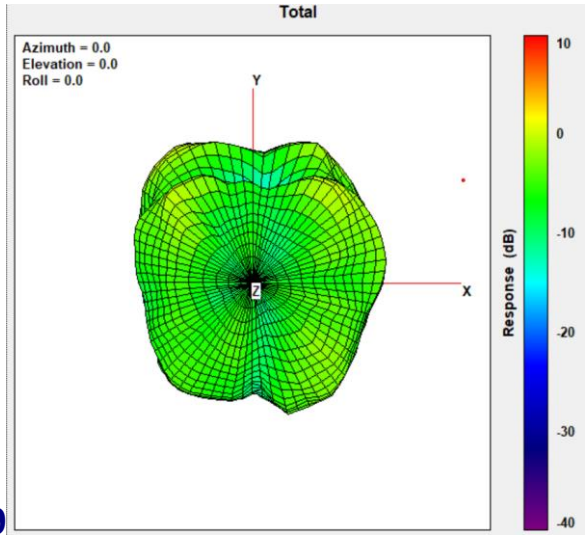

9

Max Antenna 2D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5925-6425	2.48

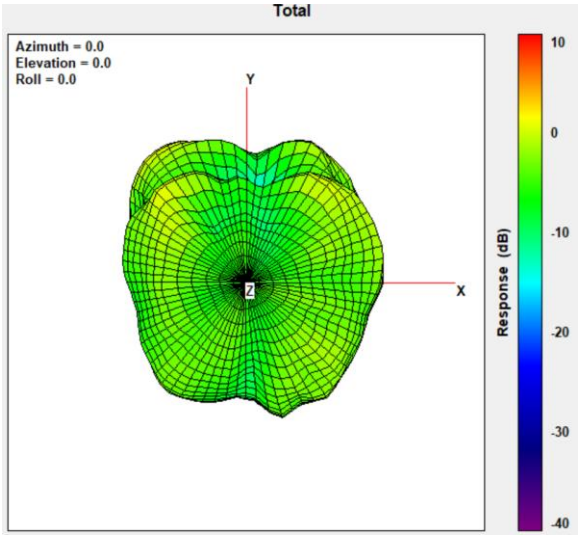

Max Antenna 2D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6425-6525	-1.77

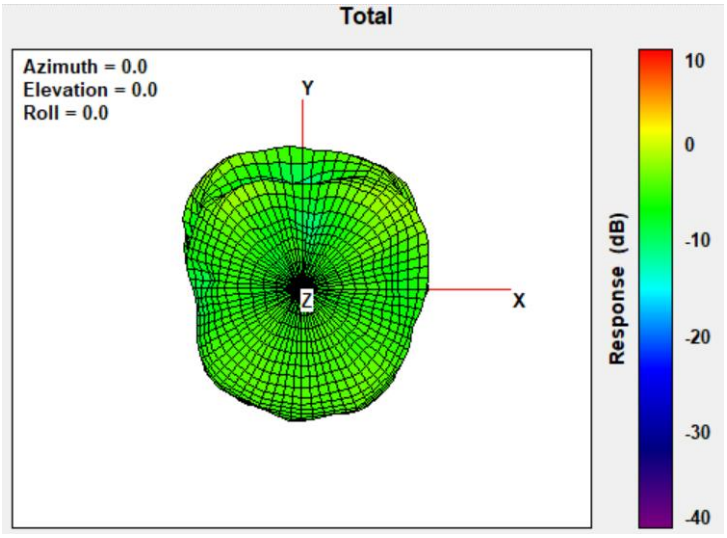

Max Antenna 2D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6525-6875	-1.83

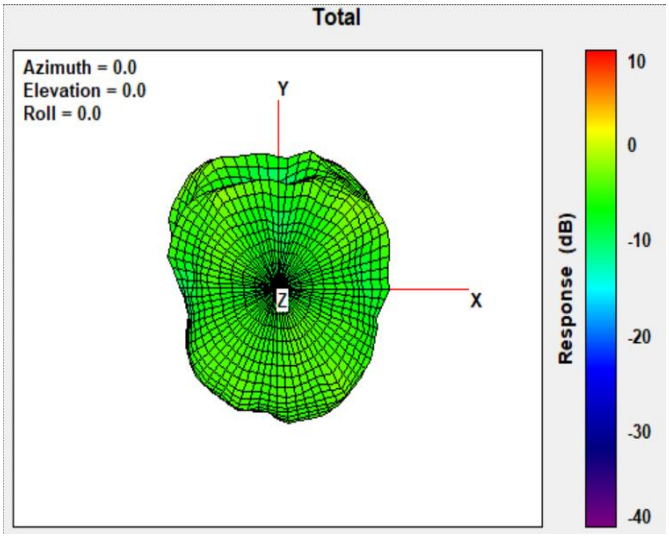

Max Antenna 2D Radiation Pattern 6875-7125 MHz
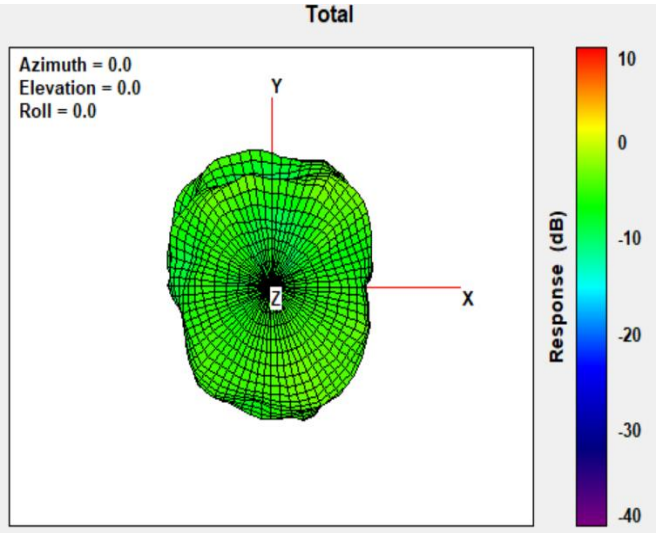
Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6875-7125	-0.98