



TEST REPORT

EUT Description	Wireless Module installed in Convertible PC
Brand Name	Intel®
Model Name	BE201D2W
FCC ID	PD9BE201D2
Date of Test Start/End	2024-06-17 / 2024-06-24
Features	2x2 Wi-Fi- Bluetooth® (see section 4)
Description	Platform: TPN-Q301 / Vendor 1 / Vendor 2 antenna

Applicant	Intel Corporation SAS
Address	425 Rue de Goa – Le Cargo B6 – 06600 Antibes, FRANCE
Contact Person	Benjamin Lavenant
Telephone/Fax/ Email	Benjamin.lavenant@intel.com

Reference Standards	FCC 47 CFR Part §2.1093 (see section 0)	
RF Exposure Environment	Portable devices - General population/uncontrolled exposure	
Exposure Conditions	Body worn	
	SAR Result	SAR Limit
Maximum SAR Result & Limit	1.37 W/kg (1g)	1.6 W/kg (1g)
Min. test separation distance	0mm to phantom, 1.17mm to antenna edge	

Test Report identification	240325-02.TR02
Revision Control	Rev. 00 This test report revision replaces any previous test report revision (see section 7)

The test results relate only to the samples tested.

Reference to accreditation shall be used only by full reproduction of test report.

Issued by

Reviewed by

Malika FARIA
(Test Engineer)

Adel LOUNES
(Test Lead Engineer)

Intel Corporation S.A.S – WRF Lab
425 rue de Goa – Le Cargo B6 - 06600 Antibes, France
Tel. +33493001400 / Fax +33493001401

Table of Contents

1. Standards, reference documents and applicable test methods	4
2. General conditions, competences and guarantees	4
3. Environmental Conditions	5
4. Test samples	5
5. EUT Features	6
6. Remarks and comments	12
7. Test Verdicts summary	12
8. Document Revision History	12
Annex A. Test & System Description	13
A.1 SAR DEFINITION	13
A.2 SPEAG SAR MEASUREMENT SYSTEM	14
A.2.1 SAR Measurement Setup	14
A.2.2 E-Field Measurement Probe	15
A.2.3 Flat Phantom	15
A.2.4 Device Positioner	16
A.3 DATA EVALUATION	17
A.4 SYSTEM AND LIQUID CHECK	19
A.4.1 System Check	19
A.4.2 Liquid Check	20
A.5 TEST EQUIPMENT LIST	21
A.5.1 issue Simulant Liquid	22
A.6 MEASUREMENT UNCERTAINTY EVALUATION	23
A.7 RF EXPOSURE LIMITS	24
Annex B. Test Results	25
B.1 TEST CONDITIONS	25
B.1.1 Test SAR Test positions relative to the phantom	25
B.1.2 Test signal, Output power and Test Frequencies	25
B.1.3 Evaluation Exclusion and Test Reductions	26
B.2 CONDUCTED POWER MEASUREMENTS	29
B.2.1 WLAN 2.4GHz- Tablet mode	29
B.2.2 WLAN 2.4GHz- Notebook mode	30
B.2.3 WLAN 5GHz (U-NII)	31
B.3 TISSUE PARAMETERS MEASUREMENT	45
B.4 SYSTEM CHECK MEASUREMENTS	45
B.5 SAR TEST RESULTS	46
B.5.1 Bluetooth 802.11b/g/n/ax/be – 2.4GHz – DTS	46
B.5.2 802.11a/n/ac/ax/be – 5.3 GHz – U-NII-2A	46
B.5.3 802.11a/n/ac/ax/be – 5.6 GHz – U-NII-2C	46
B.5.4 802.11a/n/ac/ax/be – 5.8 GHz – U-NII-3	47
B.5.5 802.11A/N/AC/AX/BE – 5.9 GHz – U-NII-4	47
B.5.5 SAR Measurement Variability	48
B.5.6 Simultaneous Transmission SAR Evaluation	49
Annex C. Test System Plots	51
Annex D. TSL Dielectric Parameters	61
D.1 BODY DTS 2450MHz	61
D.2 BODY 5200MHz-5900MHz	62

Annex E. Calibration Certificates	65
Annex F. Photograph	67
F.1 TEST SAMPLE	67
F.2 TEST POSITIONS.....	69
F.3 ANTENNA HOST PLATFORM LOCATION AND ADJACENT EDGE POSITIONS RELATIVE TO THE BODY.....	70
F.4 PHANTOM LIQUID LEVEL DURING MEASUREMENTS	71

Standards, reference documents and applicable test methods

FCC	<ol style="list-style-type: none">1. FCC Title 47 CFR Part §2.1093 – Radiofrequency radiation exposure evaluation: portable devices. <small>2023-10-01 Edition</small>2. FCC OET KDB 447498 D04 interim v01 General RF Exposure Guidance v01– RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices.3. FCC OET KDB 616217 D04 v01r02 – SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers.4. FCC OET KDB 865664 D01 v01r04 – SAR Measurement Requirements for 100 MHz to 6 GHz.5. FCC OET KDB 865664 D02 v01r02 – RF Exposure Compliance Reporting and Documentation Considerations.6. IEEE Std 1528-2013 – IEEE Recommended Practice Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communication Devices: Measurement Techniques...
-----	---

Choose a building block.

1. General conditions, competences and guarantees

- ✓ Tests performed under FCC standards identified in section 1 are covered by A2LA accreditation.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an ISO/IEC 17025:2017 laboratory accredited by the American Association for Laboratory Accreditation (A2LA) with the certificate number 3478.01.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an Accredited Test Firm recognized by the FCC, with Designation Number FR0011.
- ✓ Intel WRF Lab only provides testing services and is committed to providing reliable, unbiased test results and interpretations.
- ✓ Intel WRF Lab is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.
- ✓ Intel WRF Lab has developed calibration and proficiency programs for its measurement equipment to ensure correlated and reliable results to its customers.
- ✓ This report is only referred to the item that has undergone the test.
- ✓ This report does not imply an approval of the product by the Certification Bodies or competent Authorities.

2. Environmental Conditions

- ✓ At the site where the measurements were performed the following limits were not exceeded during the tests:

Temperature	22.2°C ± 0.5°C
Humidity	49.2% ± 3.6%
Liquid Temperature	22.5°C ± 0.3°C

3. Test samples

Sample	Control #	Description	Model	Serial #	Date of receipt	Note
#01	240325-02.S02	Wireless Module installed in Convertible PC	TPN-Q301	A5CD42083MS	2024-06-11	Vendor 2
#02	240325-02.S03	Wireless Module installed in Convertible PC	TPN-Q301	A5CD42083MT	2024-06-11	Vendor 1

4. EUT Features

The herein information is provided by the customer

Intel WRF Lab declines any responsibility for the accuracy of the stated customer provided information, especially if it has any impact on the correctness of test results presented in this report.

Brand Name	Intel®		
Model Name	BE201D2W		
Software Version	DRTU.06414.23.60.0		
Driver Version	23.65.0.2		
Prototype / Production	Production		
Host Identification	TPN-Q301		
Supported Radios	802.11b/g/n/ax/be	2.4GHz (2400.0 – 2483.5 MHz)	
	802.11a/n/ac/ax/be	5.2GHz (5150.0 – 5350.0 MHz)	
	802.11ax/be	5.6GHz (5470.0 – 5725.0 MHz)	
		5.8GHz (5725.0 – 5850.0 MHz)	
	Bluetooth	5.9GHz (5850.0 – 5895.0 MHz)	
		6.0GHz (5925.0 – 7125.0 MHz)	
		2.4GHz (2400.0 – 2483.5 MHz)	
Antenna Information	Transmitter	Aux (Ant 1/Tx1)	Main (Ant 2/Tx2)
	Manufacturer	Vendor 1	Vendor 1
	Antenna type	PIFA	PIFA
	Part number	DQ6615G2701 (81EAB615.G27)	DQ6615G2701 (81EAB615.G27)
	Transmitter	Aux (Ant 1/Tx1)	Main (Ant 2/Tx2)
	Manufacturer	Vendor 2	Vendor 2
	Antenna type	PIFA	PIFA
	Part number	DQ602384400 (260-23844)	DQ602384400 (260-23844)
	See Annex F for more details on antennas location.		
	WLAN 2.4GHz Main + BT Aux WLAN 2.4GHz Main + WLAN 2.4GHz Aux WLAN 5GHz Main + BT Aux WLAN 5GHz Main + WLAN 5GHz Aux WLAN 5GHz Main + WLAN 5GHz Aux + BT Aux WLAN 6GHz Main + BT Aux * WLAN 6GHz Main + WLAN 6GHz Aux * WLAN 6GHz Main + WLAN 6GHz Aux + BT Aux *		
Additional Information	No WWAN transmitter is considered in this report		
	5.60-5.65 GHz band (TDWR) is supported by the device		
	Band gap is supported by the device		

*For WiFi 6E band refer to report: 240325-02.TR04

Supported Radios

Mode	Duty Cycle	Modulation	Band	UL Freq Range (MHz)	Measured Max. Conducted Power (dBm)
802.11b/g/n/ax/be	100%	BPSK QPSK 16QAM 64QAM	2.4GHz	2400-2483.5	23.82
802.11a/n/ac/ax/be	100%	802.11a/n/ac/ax/be	5.3GHz	5250-5350	21.96
			5.6GHz	5475-5725	23.43
			5.8GHz	5725-5850	23.72
			5.9GHz	5850-5895	23.15
BDR/EDR	77%	GFSK $\pi/4$ DQPSK 8DPSK	2.4GHz	2400-2483.5	15.02
Bluetooth LE	32%	GFSK	2.4GHz	2400-2483.5	NM

NM: Not Measured

Maximum Output power specification + Tune up tolerance limit			Tablet config /SISO mode	
Equipment Class	Mode	BW (MHz)	Aux/Tx1 (dBm)	Main/Tx2 (dBm)
DTS	802.11b	20	18.50	18.50
	802.11g	20	18.50	18.50
	802.11n20	20	18.50	18.50
	802.11ax20/be20	20	18.50	18.50
	802.11n40	40	18.50	18.50
	802.11ax40/be40	40	18.50	18.50
U-NII-1	802.11a	20	15.50	15.50
	802.11n20	20	15.50	15.50
	802.11ax20/be20	20	15.50	15.50
	802.11n40	40	15.50	15.50
	802.11ax40/be40	40	15.50	15.50
	802.11ac80	80	15.50	15.50
	802.11ax80/be80	80	15.50	15.50
U-NII-2A	802.11a	20	15.50	15.50
	802.11n20	20	15.50	15.50
	802.11ax20/be20	20	15.50	15.50
	802.11n40	40	15.50	15.50
	802.11ax40/be40	40	15.50	15.50
	802.11ac80	80	15.50	15.50
	802.11ax80/be80	80	15.50	15.50
	802.11ac160	160	15.50	15.50
	802.11ax160/be160	160	15.50	15.50
U-NII-2C	802.11a	20	15.50	15.50
	802.11n20	20	15.50	15.50
	802.11ax20/be20	20	15.50	15.50
	802.11n40	40	15.50	15.50
	802.11ax40/be40	40	15.50	15.50
	802.11ac80	80	15.50	15.50
	802.11ax80/be80	80	15.50	15.50
	802.11ac160	160	15.50	15.50
	802.11ax160/be160	160	15.50	15.50
U-NII-3	802.11a	20	15.50	15.50
	802.11n20	20	15.50	15.50
	802.11ax20/be20	20	15.50	15.50
	802.11n40	40	15.50	15.50
	802.11ax40/be40	40	15.50	15.50
	802.11ac80	80	15.50	15.50
	802.11ax80/be80	80	15.50	15.50

U-NII-4	802.11a	20	15.50	15.50
	802.11n20	20	15.50	15.50
	802.11ax20/be20	20	15.50	15.50
	802.11n40	40	15.50	15.50
	802.11ax40/be40	40	15.50	15.50
	802.11ac80	80	15.50	15.50
	802.11ax80/be80	80	15.50	15.50
	802.11ac160	160	15.50	15.50
	802.11ax160/be160	160	15.50	15.50
BT	Bluetooth BDR	1	15.25	
	Bluetooth EDR2	1	15.00	
	Bluetooth EDR3	1	15.25	
	BLE	2	15.25	

Maximum Output power specification + Tune up tolerance limit			Laptop config /SISO mode	
Equipment Class	Mode	BW (MHz)	Aux/Tx1 (dBm)	Main/Tx2 (dBm)
DTS	802.11b	20	23.25	24.25
	802.11g	20	21.25	22.75
	802.11n20	20	21.25	22.50
	802.11ax20/be20	20	20.25	22.00
	802.11n40	40	20.00	21.00
	802.11ax40/be40	40	20.00	21.00
U-NII-1	802.11a	20	21.25	21.50
	802.11n20	20	21.50	21.75
	802.11ax20/be20	20	21.50	21.50
	802.11n40	40	21.75	21.50
	802.11ax40/be40	40	21.50	21.75
	802.11ac80	80	21.25	21.25
	802.11ax80/be80	80	21.25	21.50
U-NII-2A	802.11a	20	21.25	21.50
	802.11n20	20	21.25	21.50
	802.11ax20/be20	20	21.75	21.75
	802.11n40	40	21.50	22.00
	802.11ax40/be40	40	21.75	22.00
	802.11ac80	80	21.50	21.00
	802.11ax80/be80	80	21.50	21.00
	802.11ac160	160	18.00	19.00
	802.11ax160/be160	160	18.00	19.00
U-NII-2C	802.11a	20	21.25	21.25
	802.11n20	20	21.50	21.50
	802.11ax20/be20	20	21.75	21.50
	802.11n40	40	23.25	23.50
	802.11ax40/be40	40	23.25	23.50
	802.11ac80	80	21.50	22.00
	802.11ax80/be80	80	21.75	22.00
	802.11ac160	160	18.25	18.75
	802.11ax160/be160	160	18.25	21.00
U-NII-3	802.11a	20	23.75	23.75
	802.11n20	20	23.75	23.75
	802.11ax20/be20	20	23.50	23.75
	802.11n40	40	23.50	23.75
	802.11ax40/be40	40	23.50	23.75
	802.11ac80	80	23.25	23.50
	802.11ax80/be80	80	21.25	21.50

U-NII-4	802.11a	20	19.50	19.50
	802.11n20	20	19.25	19.75
	802.11ax20/be20	20	19.75	19.75
	802.11n40	40	23.00	23.25
	802.11ax40/be40	40	23.00	23.25
	802.11ac80	80	22.50	22.50
	802.11ax80/be80	80	22.50	22.50
	802.11ac160	160	18.75	18.75
	802.11ax160/be160	160	18.50	18.75
BT	Bluetooth BDR	1	15.25	
	Bluetooth EDR2	1	15.00	
	Bluetooth EDR3	1	15.25	
	BLE	2	15.25	

5. Remarks and comments

1. The conducted values are obtained by applying the BIOS SAR power values to the BE201D2W Intel module installed in the TPN-Q301 identified in this report, as requested by the customer.
2. Variability and simultaneous transmission results shown in this report are based on the highest SAR value obtained among all antenna manufacturers.
3. Only the plots for the test positions with the highest measured SAR per band/mode are included in Annex C as required per FCC OET KDB 865664 D02, paragraph 2.3.8.

6. Test Verdicts summary

The statement of conformity to applicable standards in the table below are based on the measured values, without taking into account the measurement uncertainties.

Standard	Band	Highest Reported SAR (1g) (W/kg)	Verdict
802.11b/g/n/ax/be	2.4GHz	0.90	P
802.11a/n/ac/ax/be	5.2GHz	NM	NA
	5.3GHz	0.91	P
	5.6GHz	0.93	P
	5.8GHz	1.37	P
	5.9GHz	0.83	P
	Bluetooth	0.22	P

P: Pass

F: Fail

NM: Not Measured

NA: Not Applicable

According to the FCC OET KDB 690783 D01, this is the summary of the values for the Grant Listing:

Exposure Condition	Highest Reported SAR (1g) (W/kg)		
	Equipment Class		
	DTS	DSS	U-NII
Body Worn	0.90	0.22	1.37
Simultaneous Tx	Sum-SAR:1.79 SPLSR:0.04	Sum-SAR:1.59 SPLSR: NA	Sum-SAR:1.59 SPLSR:NA

Considering the results of the performed test according to FCC 47CFR Part 2.1093 the item under test is IN COMPLIANCE with the requested specifications specified in Section1. Standards, reference documents and applicable test methods

7. Document Revision History

Revision #	Modified by	Revision Details
Rev. 00	M.FARIA	First Issue

Annex A. Test & System Description

A.1 SAR Definition

Specific Absorption rate is defined as the time derivative of the incremental energy (dW) absorbed by (dissipated in) and incremental mass (dm) contained in a volume element (dV) of a given density (ρ).

$$SAR = \frac{d}{dt} \cdot \left(\frac{dW}{dm} \right) = \frac{d}{dt} \cdot \left(\frac{dW}{\rho \cdot dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:

σ = Conductivity of the tissue (S/m)


ρ = Mass density of the tissue (kg/m³)

E = RMS electric field strength (V/m)

A.2 SPEAG SAR Measurement System

A.2.1 SAR Measurement Setup

The DASY6 system for performing compliance tests consists of the following items:

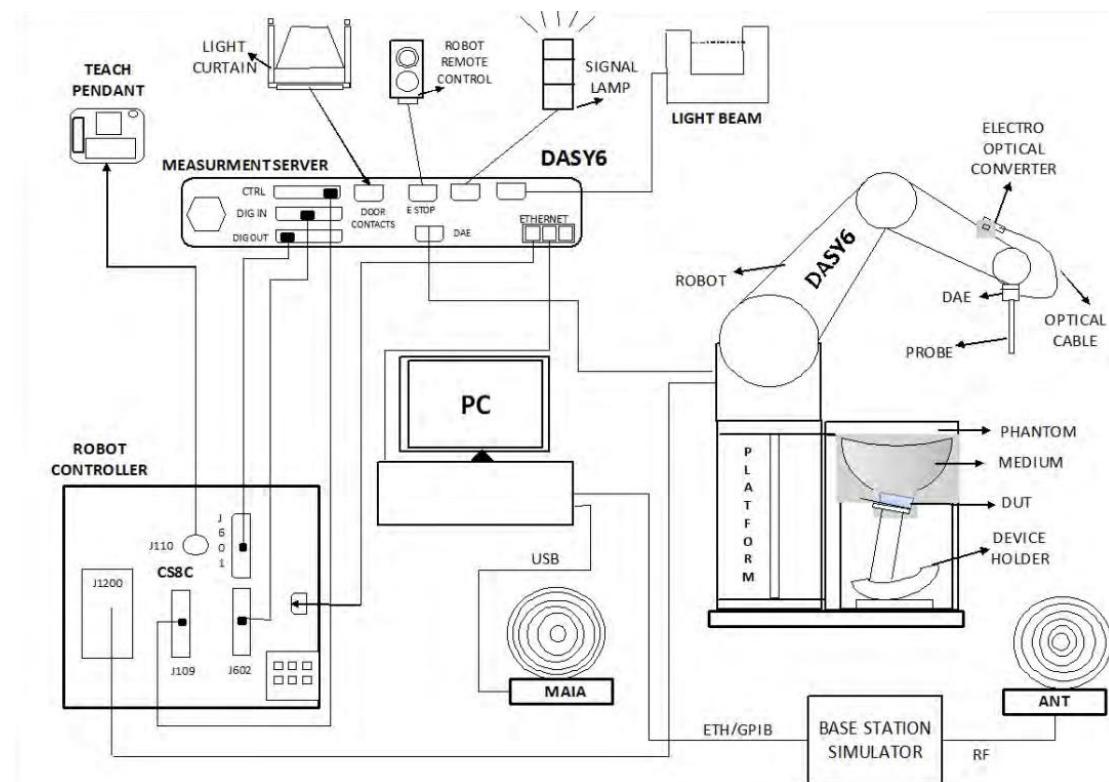

- ✓ A standard high precision 6-axis robot (Staubli TX/RX family) with controller, teach pendant and software. It includes an arm extension for accommodating the data acquisition electronics (DAE)
- ✓ An isotropic field probe optimized and calibrated for the targeted measurements.
- ✓ A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The signal is optically transmitted to the EOC.
- ✓ The Electro-optical Converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. The EOC signal is transmitted to the measurement server.
- ✓ The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movements interrupts.
- ✓ The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- ✓ A computer running Windows professional operating system and the DASY6 software.
- ✓ Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- ✓ The phantom, the device holder and other accessories according to the targeted measurement.
- ✓ MAIA is a hardware interface (Antenna) used to evaluate the modulation and audio interference characteristics of RF signals.
- ✓ ANT is an ultra-wideband antenna for use with the base station simulators over 698 MHz to 6GHz.
- ✓ The base station simulator is an equipment used for SAR cellular tests in order to emulate the cellular signals characteristics and behavior between a regular base station and the equipment under test.
- ✓ Tissue simulating liquid.
- ✓ System Validation dipoles.
- ✓ Network emulator or RF test tool.

A.2.2 E-Field Measurement Probe

The probe is constructed using three orthogonal dipole sensors arranged on an interlocking, triangular prism core. The probe has built-in shielding against static charges and is contained within a PEEK cylindrical enclosure material at the tip.



The probe's characteristics are:


Frequency Range	30MHz – 6GHz
Length	337 mm
Probe tip external diameter	2.5 mm
Typical distance between dipoles and the probe tip	1 mm
Axial Isotropy (in human-equivalent liquids)	± 0.3 dB
Hemispherical Isotropy (in human-equivalent liquids)	± 0.5 dB
Linearity	± 0.2 dB
Maximum operating SAR	100 W/kg
Lower SAR detection threshold	0.001 W/kg

A.2.3 Flat Phantom

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

The phantom's characteristics are:

Material	Vinylester, glass fiber reinforced (VE-GF)
Shell thickness	2 mm ± 0.2 mm
Filling volume	30 Liters approx.
Dimensions	Major axis: 600mm / Minor axis: 400mm

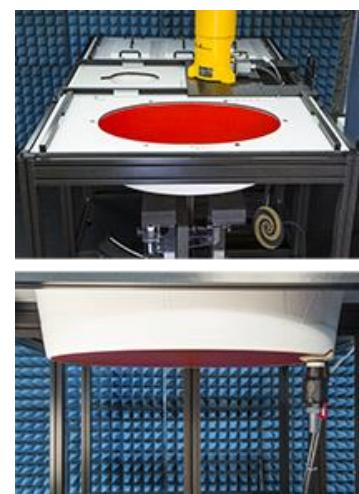

A.2.4 Device Positioner

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of 0.5 mm would produce a SAR uncertainty of 20%. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.



The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

A simple but effective and easy-to-use extension for the Mounting Device; facilitates testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.); lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI and other Flat Phantoms.



A.3 Data Evaluation

- **Power Reference measurement**

The robot measures the E field in a specified reference position that can be either the selected section's grid reference point or a user point in this section at 4mm of the inner surface of the phantom, 2mm for frequencies above 3GHz.

- **Area Scan**

Measurement procedures for evaluating SAR from wireless handsets typically start with a coarse measurement grid to determine the approximate location of the local peak SAR values. This is known as the area-scan procedure. The SAR distribution is scanned along the inside surface of one side of the phantom head, at least for an area larger than the projection of the handset and antenna. The distance between the measured points and phantom surface should be less than 8 mm, and should remain constant (with variation less than ± 1 mm) during the entire scan in order to determine the locations of the local peak SAR with sufficient accuracy. The angle between the probe axis and the surface normal line is recommended but not required to be less than 30°. If this angle is larger than 30° and the closest point on the probe-tip housing to the phantom surface is closer than a probe diameter, the boundary effect may become larger and polarization dependent. This additional uncertainty needs to be analyzed and accounted for. To achieve this, modified test procedures and additional uncertainty analyses not described in this recommended practice may be required. The measurement and interpolation point spacing should be chosen such as to allow identification of the local peak locations to within one-half of the linear dimension of a side of the zoom-scan volume. Because a local peak having specific amplitude and steep gradients may produce a lower peak spatial-average SAR compared to peaks with slightly lower amplitude and less steep gradients, it is necessary to evaluate these other peaks as well. However, since the spatial gradients of local SAR peaks are a function of the wavelength inside the tissue-equivalent liquid and the incident magnetic field strength, it is not necessary to evaluate local peaks that are less than 2 dB or more below the global maximum peak. Two-dimensional spline algorithms (Brishoual et al. 2001; Press et al., 1996) are typically used to determine the peaks and gradients within the scanned area. If a peak is found at a distance from the scan border of less than one-half the edge dimension of the desired 1 g or 10 g cube, the measurement area should be enlarged if possible.

- **Zoom Scan**

To evaluate the peak spatial-average SAR values for 1 g or 10 g cubes, fine resolution volume scans, called zoom scans, are performed at the peak SAR locations identified during the area scan. The minimum zoom scan volume size should extend at least 1.5 times the edge dimension of a 1 g cube in all directions from the center of the scan volume, for both 1 g and 10 g peak spatial-average SAR evaluations. Along the phantom curved surfaces, the front face of the volume facing the tissue/liquid interface conforms to the curved boundary, to ensure that all SAR peaks are captured. The back face should be equally distorted to maintain the correct averaging mass. The flatness and orientation of the four side faces are unchanged from that of a cube whose orientation is within ± 30 ° of the line normal to the phantom at the center of the cube face next to the phantom surface. The peak local SAR locations that were determined in the area scan (interpolated values) should be used for the centers of the zoom scans. If a scan volume cannot be centered due to proximity of a phantom shape feature, the probe should be tilted to allow scan volume enlargement. If probe tilt is not feasible, the zoom-scan origin may be shifted, but not by more than half of the 1 g or 10 g cube edge dimension.

After the zoom-scan measurement, extrapolations from the closest measured points to the surface, for example along lines parallel to the zoom-scan centerline, and interpolations to a finer resolution between all measured and extrapolated points are performed. Extrapolation algorithm considerations are described in 6.5.3, and 3-D spline methods (Brishoual et al., 2001; Kreyszig, 1983; Press et al., 1996) can be used for interpolation. The peak spatial-average SAR is finally determined by a numerical averaging of the local SAR values in the interpolation grid, using for example a trapezoidal algorithm for the integration (averaging).

In some areas of the phantom, such as the jaw and upper head regions, the angle of the probe with respect to the line normal to the surface may be relatively large, e.g., greater than ± 30 °, which could increase the boundary effect error to a larger level. In these cases, during the zoom scan a change in the orientation of the probe, the phantom, or both is recommended but not required for the duration of the zoom scan, so that the angle between the probe axis and the line normal to the surface is within 30° for all measurement points.

- **Power Drift measurement**

The robot re-measures the E-Field in the same reference location measured at the Power Reference. The drift measurement gives the field difference in dB from the first to the last reference reading. This allows a user to monitor the power drift of the device under test that must remain within a maximum variation of $\pm 5\%$.

- **Post-processing**

The procedure for spatial peak SAR evaluation has been implemented according to the IEEE1528 and IEC 62209-1/2 and IEC/IEEE 62209-1528:2020 standards. It can be conducted for 1g and 10g.

The software allows evaluations that combine measured data and robot positions, such as:

- ✓ Maximum search
- ✓ Extrapolation
- ✓ Boundary correction
- ✓ Peak search for averaged SAR

Interpolation between the measured points is performed when the resolution of the grid is not fine enough to compute the average SAR over a given mass.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation.


A.4 System and Liquid Check

A.4.1 System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results.

The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

In the simplified setup for system check, the EUT is replaced by a calibrated dipole and the power source is replaced by a controlled continuous wave generated by a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the phantom at the correct distance.

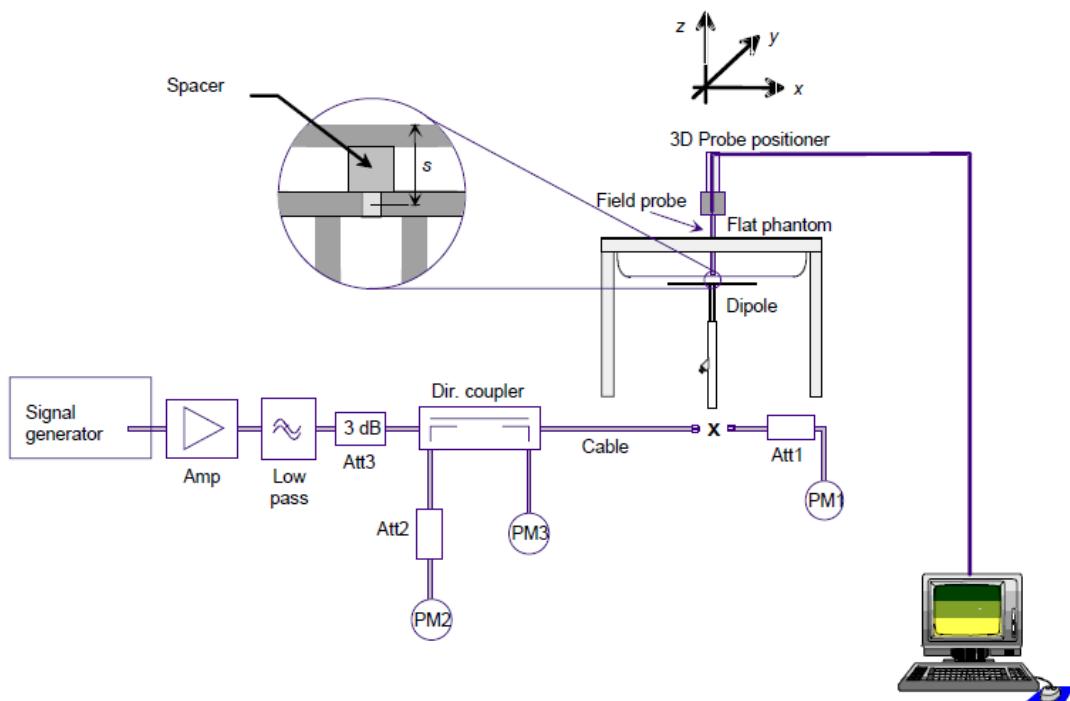

The equipment setup is shown below:

- ✓ Signal Generator
- ✓ Amplifier
- ✓ Directional coupler
- ✓ Power meter
- ✓ Calibrated dipole

First, the power meter PM1 (including attenuator Att1) is connected to the cable to measure the forward power at the location of the connector (x) to the system check source. The signal generator is adjusted for the desired forward power at the connector as read by power meter PM1 after attenuation Att1 and also as coupled through Att2 to PM2. After connecting the cable to the source, the signal generator is readjusted for the same reading at power meter PM2.

SAR results are normalized to a forward power of 1W to compare the values with the calibration reports results as described at IEEE 1528, IEC 62209 and IEC/IEEE 62209-1528:2020 standards

A.4.2 Liquid Check

The dielectric parameters check is done prior to the use of the tissue simulating liquid. The verification is made by comparing the relative permittivity and conductivity to the values recommended by the applicable standards.

The liquid verification was performed using the following test setup:

- ✓ VNA (Vector Network Analyzer)
- ✓ Open-Short-Load calibration kit
- ✓ RF Cable
- ✓ Open-Ended Coaxial probe
- ✓ DAK software tool
- ✓ SAR Liquid
- ✓ De-ionized water
- ✓ Thermometer

These are the target dielectric properties of the tissue-equivalent liquid material as defined in FCC OET KDB 865664 D01.

Frequency (MHz)	Head SAR	
	ϵ_r (F/m)	σ (S/m)
150	52.30	0.76
300	45.30	0.87
450	43.50	0.87
835	41.55	0.91
900	41.50	0.97
915	41.50	0.98
1450	40.50	1.20
1610	40.30	1.29
1800-2000	40.00	1.40
2450	39.20	1.80
3000	38.50	2.40
5800	35.30	5.27

(ϵ_r = relative permittivity, σ = conductivity and ρ = 1000 kg/m³)

The measurement system implement a SAR error compensation algorithm as documented in IEEE Std 1528-2013 and IEC/IEEE 62209-1528:2020 (equivalent to draft standard IEEE P1528-2011) to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters (applied to only scale up the measured SAR, and not downward) so, according to FCC OET KDB 865664 D01, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$.

A.5 Test Equipment List

SAR system #2

ID #	Device	Type/Model	Serial Number	Manufacturer	Cal. Date	Cal. Due Date
002-000	6-Axis Robot	TX60L Speag	F16/55FXA1/A/01	STAÜBLI	NA	NA
002-001	Robot Controller	CS8C-TX60	F16/55FXA1/C/01	STAÜBLI	NA	NA
002-002	Measurement Server	DASY6 Server	1489	SPEAG	NA	NA
002-003	Electro Optical Converter	EOC60	1098	SPEAG	NA	NA
002-004	Light Beam Unit	LB5/80	NA	Di-soric	NA	NA
002-005	Oval Flat Phantom	ELI V8.0	2048	SPEAG	NA	NA
002-007	Measurement Software	DASY6 v16.2	9-5DEE27C2	SPEAG	NA	NA
003-016	Data Acquisition Electronics	DAEip	1705	SPEAG	2024-04-08	2025-04-08
002-009	Dosimetric E-Field probe	EX3DV4	3978	SPEAG	2024-04-03	2025-04-03

SAR system #3

ID #	Device	Type/Model	Serial Number	Manufacturer	Cal. Date	Cal. Due Date
003-000	6-Axis Robot	TX60 Lspeag	F17/59RCB1/A/01	STAÜBLI	NA	NA
003-001	Robot Controller	CS8C	F17/59RCB1/C/01	STAÜBLI	NA	NA
003-002	Oval Flat Phantom	ELI V5.0	1260	SPEAG	NA	NA
003-003	Light Beam Unit	SE UKS 030 AA	1170	Di-soric	NA	NA
003-004	Measurement Server	DASY6	1547	SPEAG	NA	NA
003-005	Electro Optical Converter	EOC60	1104	SPEAG	NA	NA
004-005	Measurement Software	DASY6 16.2.4	9-658E90FA	SPEAG	NA	NA
086-000	Dosimetric E-Field probe	EX3DV4	7455	SPEAG	2024-03-08	2025-03-08
004-014	Data Acquisition Electronics	DAEip	1704	SPEAG	2024-03-11	2025-03-11

Shared equipment

ID #	Device	Type/Model	Serial Number	Manufacturer	Cal. Date	Cal. Due Date
123-000	USB Power Sensor	NRP-Z81	102278	R&S	2023-04-18	2025-04-18
124-000	USB Power Sensor	NRP-Z81	102279	R&S	2023-04-19	2025-04-19
099-000	Liquid measurement SW	DAK-3.5 V2.6.0.5	9-2687B491	SPEAG	NA	NA
069-000	Dielectric Probe Kit	DAK-3.5	1037	SPEAG	2023-07-04	2025-07-04
017-004	Coupler	UDC-0.5G-18G-10dB-SF	000813	Amd-group	2024-02-21	2025-02-21
079-001	RF Cable	CBL-0.5M-SMSM+	226527	Mini-Circuits	2024-02-16	2025-02-16
167-001	RF Cable	CBL-2M-SMSM+	233846	Mini-Circuits	2024-02-16	2025-02-16
129-000	Signal Generator	SMB100A	178212	R&S	2024-01-31	2026-01-31
496-000	Temp & Humidity Logger	RA32E-TH1-RAS	RA32-FC8485	AVTECH	2023-04-20	2025-04-20
339-000	VNA Analyzer	ZNB 40	101740	R&S	2023-05-19	2025-05-19
198-000	0.8-21GHz RF amplifier	TVA-82-213A+	2004003	Mini-Circuits	2024-02-16	2025-02-16
384-000	0.1-6GHz RF amplifier	AMT-A0328	1818	Agile Microwave Technology	2024-02-19	2025-02-19
068-000	5GHz System Validation Dipole	D5GHzv2	1164	SPEAG	2023-10-03	2024-10-03
070-000	2450GHz System Validation Dipole	D2450GHzV2	937	SPEAG	2022-05-19	2025-05-19
458-000	Measurement Software	SARA V2.3	NA	Intel	NA	NA

A.5.1 issue Simulant Liquid

TSL System	Manufacturer / Model	Freq Range (MHz)	Main Ingredients
Head WideBand	SPEAG HBBL 600-10000 Batch 230425-2 #System 3	600-10000	Ethanediol, Sodium petroleum sulfonate, Hexylene Glycol / 2-Methyl-pentane-2,4-diol, Alkoxylated alcohol
Head WideBand	SPEAG HBBL600-10000V6 Batch 210331-1 #System 2	600-10000	Ethanediol, Sodium petroleum sulfonate, Hexylene Glycol / 2-Methyl-pentane-2,4-diol, Alkoxylated alcohol

A.6 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the table below with a coverage factor of $k = 2$ to indicate a 95% level of confidence:

SPEAG DASY6 Uncertainty Budget According to IEC/IEEE 62209-1528 (4 MHz - 6 GHz) including IEEE 1528-2013 and IEC 62209-1/2016, IEC 62209-2/2010								
Symbol	Error Description	Uncert. Value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std Unc. (1g)	Std Unc. (10g)
Measurement System Errors								
CF	Probe Calibration	±14.0 %	N	2	1	1	±7.0 %	±7.0 %
CF _{drift}	Probe Calibration Drift	±1.0 %	N	1	1	1	±1.0 %	±1.0 %
LIN	Probe Linearity	±4.7 %	R	√3	1	1	±2.7 %	±2.7 %
BBS	Broadband Signal	±3.0 %	N	2	1	1	±1.5 %	±1.5 %
ISO	Axial Isotropy	±4.7 %	R	√3	0.5	0.5	±1.4 %	±1.4 %
ISO	Hemispherical Isotropy	±9.6 %	R	√3	0.5	0.5	±2.8 %	±2.8 %
DAE	Data Acquisition	±0.3 %	N	1	1	1	±0.3 %	±0.3 %
AMB	RF Ambient	±1.8 %	N	1	1	1	±1.8 %	±1.8 %
Δ _{sys}	Probe Positioning	±0.2 %	N	1	0.33	0.33	±0.1 %	±0.1 %
DAT	Data Processing	±2.3 %	N	1	1	1	±2.3 %	±2.3 %
Phantom and Device Errors								
LIQ(σ)	Conductivity (meas.) _{DAK}	±2.5 %	N	1	0.78	0.71	±2.0 %	±1.8 %
LIQ(T _σ)	Conductivity (temp.) _{BB}	±3.4 %	R	√3	0.78	0.71	±1.5 %	±1.4 %
EPS	Phantom Permittivity	±14.0 %	R	√3	0.25	0.25	±2.0 %	±2.0 %
DAS	Distance DUT - TSL	±2.0 %	N	1	2	2	±4.0 %	±4.0 %
H	Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %
MOD	DUT Modulation _m	±2.4 %	R	√3	1	1	±1.4 %	±1.4 %
TAS	Time-average SAR	±2.6 %	R	√3	1	1	±1.5 %	±1.5 %
RF _{drift}	DUT drift	±5.0 %	N	1	1	1	±2.9 %	±2.9 %
Correction to the SAR results								
C(ε, σ)	Deviation to Target	±1.9 %	N	1	1	0.84	±1.9 %	±1.6 %
Combined Std. Uncertainty							±11.5 %	±11.4 %
Expanded STD Uncertainty							±23.1 %	±22.9 %

A.7 RF Exposure Limits

SAR assessments have been made in line with the requirements of FCC 47CFR Part 2.1093 on the limitation of exposure of the general population / uncontrolled exposure for portable devices.

Exposure Type	General Population / Uncontrolled Environment
Peak spatial-average SAR (averaged over any 1 gram of tissue)	1.6 W/kg
Whole body average SAR	0.08 W/kg
Peak spatial-average SAR (extremities) (averaged over any 10 grams of tissue)	4.0 W/kg

Annex B. Test Results

The herein test results were performed by:

Test case measurement	Test Personnel
Conducted measurement	F. Heurtematte
SAR measurement	M.FARIA

B.1 Test Conditions

B.1.1 Test SAR Test positions relative to the phantom

The device under test was an Intel® card inside a Convertible host platform (TPN-Q301) using a set of PIFA antennas. The card was operated utilizing proprietary software (DRTU version DRTU.06414.23.60.0) and each channel was measured using a broadband power meter to determine the maximum average power.

According to FCC OET KDB 616217 D04, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR Test Exclusion Threshold in FCC OET KDB 447498 can be applied to determine SAR test exclusion for adjacent edge configurations.

The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

Antenna	Aux	Main
Position	<ul style="list-style-type: none"> • Laptop • Bottom edge • Back face 	<ul style="list-style-type: none"> • Laptop • Bottom edge • Back face

See B. 1.3.1 for a more detailed list of the applied reductions.

See *F.2 Test positions* section for more information on the tested positions.

B.1.2 Test signal, Output power and Test Frequencies

For 802.11 transmission modes the device was put into operation by using an own control software to program the test mode required to select the continuous transmission with 100% duty cycle.

The output power of the device was set to transmit at maximum power for all tests.

B.1.3 Evaluation Exclusion and Test Reductions

B.1.3.1 SAR evaluation exclusion

For FCC:

The SAR Test Exclusion Threshold in FCC OET KDB 447498 can be applied to determine SAR test exclusion for adjacent edge configurations. For 100MHz to 6GHz and test separation distances $\leq 50\text{mm}$, the 1-g and 10-g SAR test exclusion thresholds are determined by the following formula:

$$[(\text{max. power of channel, including tune - up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot \left[\sqrt{f_{(\text{GHz})}} \right] \quad (1)$$

$\leq 3.0 \text{ for } 1\text{g SAR, and } \leq 7.5 \text{ for } 10\text{g extremity SAR}$

Where:

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- The values 3.0 and 7.5 are referred to as numeric thresholds

The test exclusions are applicable only when the minimum test separation distance is $\leq 50 \text{ mm}$, and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is $< 5 \text{ mm}$, a distance of 5 mm is applied to determine SAR test exclusion.

For test separation distances $> 50 \text{ mm}$, the 1-g and 10-g SAR test exclusion thresholds are determined using the following formulas:

$$\langle (\text{Power allowed at numeric threshold for } 50 \text{ mm in (1)}) + (\text{test separation distance} - 50 \text{ mm}) \cdot (f_{\text{MHz}}/150) \rangle \text{mW,} \quad (2)$$

for 100MHz to 1500MHz

$$\langle (\text{Power allowed at numeric threshold for } 50 \text{ mm in (1)}) + (\text{test separation distance} - 50 \text{ mm}) \cdot 10 \rangle \text{mW,} \quad (3)$$

for 1500MHz and } \leq 6\text{GHz}

WLAN Antenna	Band Name	Output power Tablet mode		Output power Notebook mode		Laptop	Back Face	Top Edge	Right Edge	Left Edge	Bottom Edge	Bottom Edge
		dBm	mW	dBm	mW							
Aux	DTS	18.50	70.79	23.25	211.35	<50	<50	>50	>50	>50	<50	T
	U-NII-1	15.50	35.48	21.75	149.62	<50	<50	>50	>50	>50	<50	R
	U-NII-2A	15.50	35.48	21.75	149.62	<50	<50	>50	>50	>50	<50	T
	U-NII-2C	15.50	35.48	23.25	211.35	<50	<50	>50	>50	>50	<50	T
	U-NII-3	15.50	35.48	23.75	237.14	<50	<50	>50	>50	>50	<50	T
	U-NII-4	15.50	35.48	23.00	199.53	<50	<50	>50	>50	>50	<50	T
	BT	15.25	33.50	15.25	33.50	<50	<50	>50	>50	>50	<50	T
Main	DTS	18.50	70.79	24.25	266.07	<50	<50	>50	>50	>50	<50	T
	U-NII-1	15.50	35.48	21.75	149.62	<50	<50	>50	>50	>50	<50	R
	U-NII-2A	15.50	35.48	22.00	158.49	<50	<50	>50	>50	>50	<50	T
	U-NII-2C	15.50	35.48	23.50	223.87	<50	<50	>50	>50	>50	<50	T
	U-NII-3	15.50	35.48	23.75	237.14	<50	<50	>50	>50	>50	<50	T
	U-NII-4	15.50	35.48	23.25	211.35	<50	<50	>50	>50	>50	<50	T

T: Tested position

R: Reduced

* Back face position is covered by following modular report: 231120-08.TR07

See Annex F for a more detailed explanation of the separation distance related to the platform.

B.1.3.2 General SAR test reduction

According to FCC OET KDB 447498, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- $\leq 0.8 \text{ W/kg}$ or 2.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\leq 100 \text{ MHz}$
- $\leq 0.6 \text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- $\leq 0.4 \text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200 \text{ MHz}$

WLAN SAR Test reduction

Transmission Mode	SAR test exclusion/reduction
DSSS	<p>According to FCC OET KDB 248227 D01, SAR is measured for 2.4 GHz 802.11b, SAR test reduction is determined according to the following:</p> <ul style="list-style-type: none"> ▪ When the reported SAR of the highest measured maximum output power channel for the exposure configuration is $\leq 0.8 \text{ W/kg}$, no further SAR testing is required for 802.11b DSSS in that exposure configuration. ▪ When the reported SAR is $> 0.8 \text{ W/kg}$, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is $> 1.2 \text{ W/kg}$, SAR is required for the third channel. <p>According to FCC OET KDB 248227 D01, SAR is not required for 2.4 GHz OFDM conditions when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2 \text{ W/kg}$.</p>
OFDM	<p>According to FCC OET KDB 248227 D01, 802.11a/g/n/ac modes have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.</p> <p>According to FCC OET KDB 248227 D01, an <i>initial test configuration</i> is determined for OFDM and DSSS transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. SAR test reduction for subsequent highest output test channels is determined according to reported SAR of the initial test configuration.</p> <p>The <i>initial test configuration</i> for 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures.</p> <p>According to FCC OET KDB 248227 D01, when the reported SAR of the initial test configuration is $> 0.8 \text{ W/kg}$, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is $\leq 1.2 \text{ W/kg}$ or all required channels are tested.</p>

B.2 Conducted Power Measurements

B.2.1 WLAN 2.4GHz- Tablet mode

Band	Mode	Data Rate	Ch #	Freq (MHz)	Average power (dBm)						SAR Test ?	
					Main			Aux				
					Avg Pwr (dBm)-Vendor 2	Avg Pwr (dBm)-Vendor 1	Tune-up Pwr (dBm)	Avg Pwr (dBm)-Vendor 2	Avg Pwr (dBm)-Vendor 1	Tune-up Pwr (dBm)		
2.4GHz (DTS)	802.11b	1Mbps	1	2412	17.77	17.32	18.50	17.11	17.34	18.50	Yes	
			6	2437	18.40	17.34	18.50	18.48	18.44	18.50		
			11	2462	17.96	18.35	18.50	17.40	18.38	18.50		
	802.11g	6Mbps	1	2412	NR1	NR1	18.50	NR1	NR1	18.50	No ²	
			6	2437			18.50			18.50		
			11	2462			18.50			18.50		
	802.11n20	HT0	1	2412			18.50			18.50		
			6	2437			18.50			18.50		
			11	2462			18.50			18.50		
	802.11ax2 0/be20	MCS0	1	2412			18.50			18.50	No ²	
			6	2437			18.50			18.50		
			11	2462			18.50			18.50		
	802.11n40	HT0	3	2422			18.50			18.50	No ²	
			6	2437			18.50			18.50		
			9	2452			18.50			14.50		
	802.11ax4 0/be40	MCS0	3	2422			18.50			18.50	No ²	
			6	2437			18.50			18.50		
			9	2452			18.50			18.50		

Initial test configuration

1. NR: Not Required
2. As per FCC OET KDB 248227 D01, conducted output power and SAR testing are not required for 802.11g/n/ax/be channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2\text{W/kg}$.
3. When the reported SAR of the initial test configuration is $> 0.8 \text{ W/kg}$, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is $\leq 1.2 \text{ W/kg}$ or all required channels are tested.

B.2.2 WLAN 2.4GHz- Notebook mode

Band	Mode	Data Rate	Ch #	Freq (MHz)	Average power (dBm)					SAR Test ?	
					Main			Aux			
					Avg Pwr (dBm)-Vendor 2	Avg Pwr (dBm)-Vendor 1	Tune-up Pwr (dBm)	Avg Pwr (dBm)-Vendor 2	Avg Pwr (dBm)-Vendor 1	Tune-up Pwr (dBm)	
2.4GHz (DTS)	802.11b	1Mbps	1	2412	22.96	22.50	23.00	22.72	22.66	22.75	Yes
			6	2437	23.79	23.64	24.25	22.33	23.09	23.25	
			11	2462	23.82	23.59	24.25	22.96	22.45	23.25	
	802.11g	6Mbps	1	2412	NR1	NR1	22.00	NR1	NR1	20.75	No
			6	2437			22.75			21.25	
			11	2462			21.75			21.00	
	802.11n20	HT0	1	2412			21.75			20.50	No
			6	2437			22.50			21.25	
			11	2462			22.00			21.00	
	802.11ax2 0/be20	MCS0	1	2412			21.75			20.25	
			6	2437			22.00			20.50	
			11	2462			21.75			20.25	
	802.11n40	HT0	3	2422			21.00			20.00	No
			6	2437			21.00			19.75	
			9	2452			20.00			14.50	
	802.11ax4 0/be40	MCS0	3	2422			20.75			19.50	
			6	2437			21.00			20.00	
			9	2452			20.00			19.50	

Initial test configuration

4. NR: Not Required
5. As per FCC OET KDB 248227 D01, conducted output power and SAR testing are not required for 802.11g/n/ax/be channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2\text{W/kg}$.
6. When the reported SAR of the initial test configuration is $> 0.8 \text{ W/kg}$, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is $\leq 1.2 \text{ W/kg}$ or all required channels are tested.

B.2.3 WLAN 5GHz (U-NII)

B.2.3.1 5.2GHz and 5.3GHz (U-NII-1 and U-NII-2A)-Tablet mode

Band	Mode	Data Rate	Ch #	Freq (MHz)	Average power (dBm)						SAR Test ?	
					Main			Aux				
					Avg Pwr (dBm)-Vendor 2	Avg Pwr (dBm)-Vendor 1	Tune-up Pwr (dBm)	Avg Pwr (dBm)-Vendor 2	Avg Pwr (dBm)-Vendor 1	Tune-up Pwr (dBm)		
5.2GHz (U-NII-1)	802.11a	6Mbps	36	5180	NR ¹	NR1	15.50	NR1	NR1	15.50	No	
			40	5200			15.50			15.50		
			44	5220			15.50			15.50		
			48	5240			15.50			15.50		
	802.11n20	HT0	36	5180			15.50			15.50		
			40	5200			15.50			15.50		
			44	5220			15.50			15.50		
			48	5240			15.50			15.50		
	802.11ax2 0/be20	MCS0	52	5260			15.50			15.50		
			56	5280			15.50			15.50		
			60	5300			15.50			15.50		
			64	5320			15.50			15.50		
	802.11n40	HT0	38	5190			15.50			15.50		
			46	5230			15.50			15.50		
	802.11ax4 0/be40	MCS0	38	5190			15.50			15.50		
			46	5230			15.50			15.50		
	802.11ac8 0	VHT0	42	5210			15.50			15.50		
	802.11ax8 0/be80	MCS0	42	5210			15.50			15.50		

Initial test configuration

1. NR: Not Required
2. When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band (see §0 in this document).
3. Additional conducted power measurement is required when reported SAR is > 1.2 W/kg. In case the subsequent test configuration and the channel bandwidth is smaller than the initial test configuration, all channels that overlap with the larger channel bandwidth in the initial configuration should be tested.
4. The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. a, g, n, ac then ax)
5. When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is $= 1.2$ W/kg or all required channels are tested.
6. When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure requirements, is adjusted by the ratio of the subsequent test configuration to the initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration
7. SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is > 1.2 W/kg or until all required channels are tested.

Band	Mode	Data Rate	C h #	Freq (MHz)	Average power (dBm)						SAR Test?	
					Main			Aux				
					Avg Pwr (dBm)-Vendor 2	Avg Pwr (dBm)-Vendor 1	Tune-up Pwr (dBm)	Avg Pwr (dBm)-Vendor 2	Avg Pwr (dBm)-Vendor 1	Tune-up Pwr (dBm)		
5.3GHz (U-NII-2A)	802.11a	6Mbps	52	5260	NR ¹	NR1	15.50	NR1	NR1	15.50	No	
			56	5280			15.50			15.50		
			60	5300			15.50			15.50		
			64	5320			15.50			15.50		
	802.11n20	HT0	52	5260			15.50			15.50	No	
			56	5280			15.50			15.50		
			60	5300			15.50			15.50		
			64	5320			15.50			15.50		
	802.11ax20/ be20	MCS0	52	5260			15.50			15.50	No	
			56	5280			15.50			15.50		
			60	5300			15.50			15.50		
			64	5320			15.50			15.50		
	802.11n40	HT0	54	5270			15.50			15.50	Yes	
			62	5310			15.50			15.50		
	802.11ax40/ be40	MCS0	54	5270			15.50			15.50	Yes	
			62	5310			15.50			15.50		
	802.11ac80	VHT0	58	5290			15.50			15.50	Yes	
	802.11ax80/ be80	MCS0	58	5290			15.50			15.50		
	802.11ac160	VHT0	50	5250	14.72	14.86	15.50	14.59	14.76	15.50	Yes	
	802.11ax160/be160	MCS0	50	5250	NR ¹	NR ¹	15.50	NR ¹	NR ¹	15.50	No	

Initial test configuration

1. NR: Not Required
2. The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. a, g, n, ac then ax)
3. Additional conducted power measurement is required when reported SAR is > 1.2W/kg. In case the subsequent test configuration and the channel bandwidth is smaller than the initial test configuration, all channels that overlap with the larger channel bandwidth in the initial configuration should be tested.
4. When the reported SAR of the initial test configuration is > 0.8W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is ≤1.2W/kg or all required channels are tested.
5. When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure requirements, is adjusted by the ratio of the subsequent test configuration to the initial test configuration specified maximum output power and the adjusted SAR is ≤1.2 W/kg, SAR is not required for that subsequent test configuration.
6. SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is >1.2 W/kg or until all required channels are tested.

B.2.3.2 5.2GHz and 5.3GHz (U-NII-1 and U-NII-2A)-Notebook mode

Band	Mode	Data Rate	Ch #	Freq (MHz)	Average power (dBm)					SAR Test ?
					Main		Aux			
Avg Pwr (dBm)-Vendor 2	Avg Pwr (dBm)-Vendor 1	Tune-up Pwr (dBm)	Avg Pwr (dBm)-Vendor 2	Avg Pwr (dBm)-Vendor 1	Tune-up Pwr (dBm)					
5.2GHz (U-NII-1)	802.11a	6Mbps	36	5180	NR ¹	NR1	21.25	NR1	21.25	No
			40	5200			21.50		21.25	
			44	5220			21.50		21.25	
			48	5240			21.50		21.25	
	802.11n20	HT0	36	5180			21.50		21.50	
			40	5200			21.75		21.50	
			44	5220			21.50		21.50	
			48	5240			21.50		21.50	
	802.11ax2 0/be20	MCS0	52	5260			21.50		21.25	
			56	5280			21.50		21.50	
			60	5300			21.50		21.50	
			64	5320			21.50		21.50	
	802.11n40	HT0	38	5190			20.50		21.00	
			46	5230			21.50		21.75	
	802.11ax4 0/be40	MCS0	38	5190			20.50		21.00	
			46	5230			21.75		21.50	
	802.11ac8 0	VHT0	42	5210			21.25		21.25	
	802.11ax8 0/be80	MCS0	42	5210			21.50		21.25	

Initial test configuration

8. NR: Not Required
9. When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is $\leq 1.2 \text{ W/kg}$, SAR is not required for U-NII-1 band (see §0 in this document).
10. Additional conducted power measurement is required when reported SAR is $> 1.2 \text{ W/kg}$. In case the subsequent test configuration and the channel bandwidth is smaller than the initial test configuration, all channels that overlap with the larger channel bandwidth in the initial configuration should be tested.
11. The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. a, g, n, ac then ax)
12. When the reported SAR of the initial test configuration is $> 0.8 \text{ W/kg}$, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is $\leq 1.2 \text{ W/kg}$ or all required channels are tested.
13. When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure requirements, is adjusted by the ratio of the subsequent test configuration to the initial test configuration specified maximum output power and the adjusted SAR is $\leq 1.2 \text{ W/kg}$, SAR is not required for that subsequent test configuration
14. SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is $> 1.2 \text{ W/kg}$ or until all required channels are tested.

Band	Mode	Data Rate	C h #	Freq (MHz)	Average power (dBm)						SAR Test?	
					Main			Aux				
					Avg Pwr (dBm)-Vendor 2	Avg Pwr (dBm)-Vendor 1	Tune-up Pwr (dBm)	Avg Pwr (dBm)-Vendor 2	Avg Pwr (dBm)-Vendor 1	Tune-up Pwr (dBm)		
5.3GHz (U-NII-2A)	802.11a	6Mbps	52	5260	NR ¹	NR1	21.50	NR1	NR1	21.25	No	
			56	5280			21.25			21.25		
			60	5300			21.25			21.25		
			64	5320			21.25			21.25		
	802.11n20	HT0	52	5260		NR1	21.50		NR1	21.25		
			56	5280			21.50			21.25		
			60	5300			21.25			21.25		
			64	5320			21.25			21.25		
	802.11ax20/ be20	MCS0	52	5260		NR1	21.50			21.50		
			56	5280			21.50			21.75		
			60	5300			21.75			21.75		
			64	5320			21.75			21.75		
	802.11n40	HT0	54	5270	21.96	NR1	21.89	NR1	22.00	21.50	Yes	
			62	5310	19.99	NR1	20.19	NR1	20.25	20.50		
	802.11ax40/ be40	MCS0	54	5270	NR1	22.00	NR1	21.65	21.59	21.75	No	
			62	5310		20.00		20.35	20.38	20.50		
	802.11ac80	VHT0	58	5290	NR ¹	21.00	NR1			21.50	No	
	802.11ax80/ be80	MCS0	58	5290		21.00				21.50		
	802.11ac160	VHT0	50	5250		19.00				18.00		
	802.11ax160/be160	MCS0	50	5250		19.00				18.00		

Initial test configuration

7. NR: Not Required
8. The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. a, g, n, ac then ax)
9. Additional conducted power measurement is required when reported SAR is > 1.2W/kg. In case the subsequent test configuration and the channel bandwidth is smaller than the initial test configuration, all channels that overlap with the larger channel bandwidth in the initial configuration should be tested.
10. When the reported SAR of the initial test configuration is > 0.8W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is ≤1.2W/kg or all required channels are tested.
11. When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure requirements, is adjusted by the ratio of the subsequent test configuration to the initial test configuration specified maximum output power and the adjusted SAR is ≤1.2 W/kg, SAR is not required for that subsequent test configuration.
12. SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is >1.2 W/kg or until all required channels are tested.

B.2.3.3 5.6 (U-NII-2C)-Tablet mode

Band	Mode	Data Rate	Ch #	Freq (MHz)	Average power (dBm)					SA R Test?	
					Main			Aux			
					Avg Pwr (dBm)-Vendor 2	Avg Pwr (dBm)-Vendor 1	Tune-up Pwr (dBm)	Avg Pwr (dBm)-Vendor 2	Avg Pwr (dBm)-Vendor 1		
5.6GHz (U-NII-2C)	802.11a	6Mbps	100	5500	NR	NR	15.50	NR	NR	15.50	
			104	5520			15.50			15.50	
			108	5540			15.50			15.50	
			112	5560			15.50			15.50	
			116	5580			15.50			15.50	
			120	5600			15.50			15.50	
			124	5620			15.50			15.50	
			128	5640			15.50			15.50	
	802.11n20	HT0	100	5500			15.50			15.50	
			104	5520			15.50			15.50	
			108	5540			15.50			15.50	
			112	5560			15.50			15.50	
			116	5580			15.50			15.50	
			120	5600			15.50			15.50	
			124	5620			15.50			15.50	
			128	5640			15.50			15.50	
	802.11ax20/be20	MCS0	100	5500			15.50			15.50	
			104	5520			15.50			15.50	
			108	5540			15.50			15.50	
			112	5560			15.50			15.50	
			116	5580			15.50			15.50	
			120	5600			15.50			15.50	
			124	5620			15.50			15.50	
			128	5640			15.50			15.50	
	802.11n40	HT0	102	5510			15.50			15.50	
			110	5550			15.50			15.50	
			118	5590			15.50			15.50	
			126	5630			15.50			15.50	
	802.11ax40/be40	MCS0	102	5510			15.50			15.50	
			110	5550			15.50			15.50	
			118	5590			15.50			15.50	
			126	5630			15.50			15.50	
	802.11ac80	VHT0	106	5530			15.50			15.50	
			122	5610			15.50			15.50	
	802.11ax80/be80	MCS0	106	5530			15.50			15.50	
			122	5610			15.50			15.50	
	802.11ac160	VHT0	114	5570	14.79	14.90	15.50	14.76	14.89	15.50	
	802.11ac160-MIMO	VHT0	114	5570	11.79	NR	12.50	11.76	NR	12.50	
	802.11ax160/b160	MCS0	114	5570	NR	NR	15.50	NR	NR	15.50	

Initial test configuration

1. NR: Not Required

2. When band gap channels between U-NII-2C and U-NII-3 band are supported channels in U-NII-2C band below 5.65 GHz are considered as one band and channels above 5.65 GHz, together with channels in 5.8 GHz U-NII-3 or §15.247 band, are considered as a separate band
3. Additional conducted power measurement is required when reported SAR is $> 1.2\text{W/kg}$. In case the subsequent test configuration and the channel bandwidth is smaller than the initial test configuration, all channels that overlap with the larger channel bandwidth in the initial configuration should be tested
4. The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. a, g, n, ac then ax)
5. When the reported SAR of the initial test configuration is $> 0.8\text{W/kg}$, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is $\leq 1.2\text{W/kg}$ or all required channels are tested.
6. When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure requirements, is adjusted by the ratio of the subsequent test configuration to the initial test configuration specified maximum output power and the adjusted SAR is $\leq 1.2\text{ W/kg}$, SAR is not required for that subsequent test configuration.
7. SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is $> 1.2\text{ W/kg}$ or until all required channels are tested.

B.2.3.4 5.6 (U-NII-2C)-Notebook mode

Band	Mode	Data Rate	Ch #	Freq (MHz)	Average power (dBm)					SA R Test?	
					Main			Aux			
					Avg Pwr (dBm)-Vendor 2	Avg Pwr (dBm)-Vendor 1	Tune-up Pwr (dBm)	Avg Pwr (dBm)-Vendor 2	Avg Pwr (dBm)-Vendor 1		
5.6GHz (U-NII-2C)	802.11a	6Mbps	100	5500	NR1	NR1	21.00	NR1	NR1	21.25	No
			104	5520			21.00			21.25	
			108	5540			21.00			21.25	
			112	5560			21.00			21.25	
			116	5580			21.00			21.25	
			120	5600			21.25			21.25	
			124	5620			21.25			21.25	
			128	5640			21.25			21.25	
	802.11n20	HT0	100	5500	NR1	NR1	21.50	NR1	NR1	21.50	Yes
			104	5520			21.50			21.50	
			108	5540			21.50			21.50	
			112	5560			21.50			21.50	
			116	5580			21.50			21.50	
			120	5600			21.25			21.50	
			124	5620			21.25			21.50	
			128	5640			21.25			21.50	
	802.11ax20/be20	MCS0	100	5500	NR1	NR1	21.50	NR1	NR1	21.50	No
			104	5520			21.50			21.50	
			108	5540			21.50			21.50	
			112	5560			21.50			21.50	
			116	5580			21.50			21.50	
			120	5600			21.50			21.75	
			124	5620			21.50			21.75	
			128	5640			21.50			21.75	
	802.11n40	HT0	102	5510	21.84	21.97	22.00	21.40	21.37	21.50	Yes
			110	5550	22.00	21.89	22.00	21.06	21.32	21.50	
			118	5590	23.43	23.29	23.50	23.16	23.14	23.25	
			126	5630	23.39	23.38	23.50	23.12	23.22	23.25	
	802.11ax40/be40	MCS0	102	5510	NR1	NR1	21.75	NR1	NR1	21.50	No
			110	5550			21.75			21.50	
			118	5590			23.50			23.25	
			126	5630			23.50			23.25	
	802.11ac80	VHT0	106	5530	NR1	NR1	21.75	NR1	NR1	21.50	No
			122	5610			22.00			21.50	
	802.11ax80/be80	MCS0	106	5530	NR1	NR1	22.00	NR1	NR1	21.75	Yes
			122	5610			22.00			21.75	
	802.11ac160	VHT0	114	5570	NR1	NR1	18.75	NR1	NR1	18.25	Yes
			114	5570			21.00			18.25	

Initial test configuration

8. NR: Not Required
9. When band gap channels between U-NII-2C and U-NII-3 band are supported channels in U-NII-2C band below 5.65 GHz are considered as one band and channels above 5.65 GHz, together with channels in 5.8 GHz U-NII-3 or §15.247 band, are considered as a separate band

10. Additional conducted power measurement is required when reported SAR is $> 1.2\text{W/kg}$. In case the subsequent test configuration and the channel bandwidth is smaller than the initial test configuration, all channels that overlap with the larger channel bandwidth in the initial configuration should be tested
11. The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. a, g, n, ac then ax)
12. When the reported SAR of the initial test configuration is $> 0.8\text{W/kg}$, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is $\leq 1.2\text{W/kg}$ or all required channels are tested.
13. When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure requirements, is adjusted by the ratio of the subsequent test configuration to the initial test configuration specified maximum output power and the adjusted SAR is $\leq 1.2 \text{ W/kg}$, SAR is not required for that subsequent test configuration.
14. SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is $> 1.2 \text{ W/kg}$ or until all required channels are tested.

B.2.3.5 5.8GHz (U-NII-3)-Tablet mode

Band	Mode	Data Rate	Ch #	Freq (MHz)	Average power (dBm)						SAR Test?	
					Main			Aux				
					Avg Pwr (dBm)-Vendor 2	Avg Pwr (dBm)-Vendor 1	Tune-up Pwr (dBm)	Avg Pwr (dBm)-Vendor 2	Avg Pwr (dBm)-Vendor 1	Tune-up Pwr (dBm)		
5.6-5.8GHz (U-NII-3)	802.11a	6Mbps	132	5660	NR	NR	15.50	NR	NR	15.50	No	
			136	5680			15.50			15.50		
			140	5700			15.50			15.50		
			149	5745			15.50			15.50		
			153	5765			15.50			15.50		
			157	5785			15.50			15.50		
			161	5805			15.50			15.50		
			165	5825			15.50			15.50		
	802.11n20	HT0	132	5660			15.50			15.50	Yes	
			136	5680			15.50			15.50		
			140	5700			15.50			15.50		
			149	5745			15.50			15.50		
			153	5765			15.50			15.50		
			157	5785			15.50			15.50		
			161	5805			15.50			15.50		
			165	5825			15.50			15.50		
	802.11ax20/b e20	MCS0	132	5660			15.50			15.50	Yes	
			136	5680			15.50			15.50		
			140	5700			15.50			15.50		
			149	5745			15.50			15.50		
			153	5765			15.50			15.50		
			157	5785			15.50			15.50		
			161	5805			15.50			15.50		
			165	5825			15.50			15.50		
	802.11n40	HT0	134	5670			15.50			15.50	Yes	
			142	5710			15.50			15.50		
			151	5755			15.50			15.50		
			159	5795			15.50			15.50		
	802.11ax40/b e40	MCS0	134	5670			15.50			15.50	Yes	
			142	5710			15.50			15.50		
			151	5755			15.50			15.50		
			159	5795			15.50			15.50		
	802.11ac80	VHT0	138	5690	15.26	15.15	15.50	15.09	15.29	15.50	Yes	
	155		5775	14.97	15.04	15.50	14.96	15.06	15.50			
	802.11ac80-MIMO	VHT0	155	5775	11.97	NR	12.50	11.96	NR	12.50		
	802.11ax80/b e80	MCS0	138	5690	14.83	14.97	15.50	14.90	14.98	15.50		
			155	5775	15.19	15.04	15.50	14.99	15.18	15.50		

Initial test configuration

1. NR: Not Required
2. When band gap channels between U-NII-2C and U-NII-3 band are supported channels in U-NII-2C band below 5.65 GHz are considered as one band and channels above 5.65 GHz, together with channels in 5.8 GHz U-NII-3 or §15.247 band, are considered as a separate band
3. Additional conducted power measurement is required when reported SAR is > 1.2W/kg. In case the subsequent test configuration and the channel bandwidth is smaller than the initial test configuration, all channels that overlap with the larger channel bandwidth in the initial configuration should be tested
4. The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. a, g, n, ac then ax)

5. When the reported SAR of the initial test configuration is $> 0.8\text{W/kg}$, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is $\leq 1.2\text{W/kg}$ or all required channels are tested.
6. When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure requirements, is adjusted by the ratio of the subsequent test configuration to the initial test configuration specified maximum output power and the adjusted SAR is $\leq 1.2 \text{ W/kg}$, SAR is not required for that subsequent test configuration.
7. SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is $> 1.2 \text{ W/kg}$ or until all required channels are tested.

B.2.3.6 5.8GHz (U-NII-3)-Notebook mode

Band	Mode	Data Rate	Ch #	Freq (MHz)	Average power (dBm)						SAR Test?	
					Main			Aux				
					Avg Pwr (dBm)-Vendor 2	Avg Pwr (dBm)-Vendor 1	Tune-up Pwr (dBm)	Avg Pwr (dBm)-Vendor 2	Avg Pwr (dBm)-Vendor 1	Tune-up Pwr (dBm)		
5.6-5.8GHz (U-NII-3)	802.11a	6Mbps	132	5660	NR	NR	21.25	21.37	21.36	21.50	Yes	
			136	5680			21.25	21.43	21.44	21.50		
			140	5700			21.25	21.47	21.11	21.50		
			144	5720			21.25	21.30	21.19	21.50		
			149	5745			23.75	23.55	23.57	23.75		
			153	5765			23.75	23.70	23.67	23.75		
			157	5785			23.75	23.69	23.69	23.75		
			161	5805			23.75	23.72	23.70	23.75		
			165	5825			23.25	22.72	22.95	23.00		
	802.11n20	HT0	132	5660			21.25	NR	NR	21.25	No	
			136	5680			21.25			21.25		
			140	5700			21.25			21.25		
			144	5720			21.25			21.25		
			149	5745			21.25			21.25		
			153	5765			23.75			23.50		
			157	5785			23.75			23.50		
	802.11ax20/b e20	MCS0	161	5805			23.75	NR	NR	23.75	No	
			165	5825			23.75			23.75		
			132	5660			23.25			23.00		
			136	5680			21.50			21.50		
			140	5700			21.50			21.50		
			144	5720			21.50			21.50		
			149	5745			21.50			21.50		
			153	5765			21.50			21.50		
			157	5785			23.50			23.50		
	802.11n40	HT0	161	5805			23.50			23.50	Yes	
			165	5825			23.75			23.50		
			134	5670	21.80	21.73	22.00			23.50		
			142	5710	21.92	21.88	22.00			23.00		
	802.11ax40/b e40	MCS0	151	5755	22.17	22.20	22.25			22.00	No	
			159	5795	23.70	23.45	23.75			22.00		
			134	5670	NR	NR	22.25			22.50		
			142	5710			23.75			23.50		
	802.11ac80	VHT0	151	5755			22.00			22.00		
			159	5795			22.00			22.00		
			138	5690			22.25			23.25	No	
			155	5775			23.50			23.25		
	802.11ax80/b e80	MCS0	138	5690			21.50			21.25	No	
			155	5775			21.50			21.25		

Initial test configuration

8. NR: Not Required
9. When band gap channels between U-NII-2C and U-NII-3 band are supported channels in U-NII-2C band below 5.65 GHz are considered as one band and channels above 5.65 GHz, together with channels in 5.8 GHz U-NII-3 or §15.247 band, are considered as a separate band
10. Additional conducted power measurement is required when reported SAR is > 1.2W/kg. In case the subsequent test configuration and the channel bandwidth is smaller than the initial test configuration, all channels that overlap with the larger channel bandwidth in the initial configuration should be tested
11. The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power

measurement procedures. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. a, g, n, ac then ax)

12. When the reported SAR of the initial test configuration is $> 0.8\text{W/kg}$, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is $\leq 1.2\text{W/kg}$ or all required channels are tested.
13. When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure requirements, is adjusted by the ratio of the subsequent test configuration to the initial test configuration specified maximum output power and the adjusted SAR is $\leq 1.2 \text{ W/kg}$, SAR is not required for that subsequent test configuration.
14. SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is $> 1.2 \text{ W/kg}$ or until all required channels are tested.

B.2.3.1 5.9GHz (U-NII-4)-Tablet mode

Band	Mode	Data Rate	Ch #	Freq (MHz)	Average power (dBm)						SA R Test ?	
					Main			Aux				
					Avg Pwr (dBm)-Vendor 2	Avg Pwr (dBm)-Vendor 1	Tune-up Pwr (dBm)	Avg Pwr (dBm)-Vendor 2	Avg Pwr (dBm)-Vendor 1	Avg Pwr (dBm)-Vendor 2		
5.9GHz (U-NII-4)	802.11a	6Mbps	169	5845	NR	NR	15.50	NR	NR	15.50	No	
			173	5865			15.50			15.50		
			177	5885			15.50			15.50		
	802.11n20	HT0	169	5845			15.50			15.50		
			173	5865			15.50			15.50		
			177	5885			15.50			15.50		
	802.11ax20/b e20	MCS0	169	5845			15.50			15.50		
			173	5865			15.50			15.50		
			177	5885			15.50			15.50		
	802.11n40	HT0	167	5835			15.50			15.50		
			175	5875			15.50			15.50		
	802.11ax40/b e40	MCS0	167	5835			15.50			15.50		
			175	5875			15.50			15.50		
	802.11ac80	VHT0	171	5855			15.50			15.50		
	802.11ax80/b e80	MCS0	171	5855			15.50			15.50		
	802.11ac160	VHT0	163	5815	14.81	14.78	15.50	14.75	14.92	15.50	Yes	
	802.11ax160 /be160	MCS0	163	5815	NR	NR	15.50	NR	NR	15.50	No	

B.2.3.1 5.9GHz (U-NII-4)-Notebook mode

Band	Mode	Data Rate	Ch #	Freq (MHz)	Average power (dBm)						SA R Test ?
					Main			Aux			
Avg Pwr (dBm)-Vendor 2	Avg Pwr (dBm)-Vendor 1	Tune-up Pwr (dBm)	Avg Pwr (dBm)-Vendor 2	Avg Pwr (dBm)-Vendor 1	Avg Pwr (dBm)-Vendor 2						
5.9GHz (U-NII-34)	802.11a	6Mbps	169	5845	NR	NR	19.50	NR	NR	19.50	No
			173	5865			19.25			19.25	
			177	5885			19.50			19.25	
	802.11n20	HT0	169	5845			19.50			19.25	
			173	5865			19.75			19.25	
			177	5885			19.50			19.25	
	802.11ax20/b e20	MCS0	169	5845			19.75			19.75	
			173	5865			19.50			19.75	
			177	5885			19.75			19.75	
	802.11n40	HT0	167	5835	23.15	22.94	23.25	22.94	22.84	23.00	Yes
			175	5875	22.70	22.34	22.75	22.25	22.44	22.50	
	802.11ax40/b e40	MCS0	167	5835	23.25	NR	NR	23.00	No		
			175	5875	22.75			22.75			
	802.11ac80	VHT0	171	5855	22.50			22.50			
	802.11ax80/b e80	MCS0	171	5855	22.50			22.50			
	802.11ac160	VHT0	163	5815	18.75			18.75			
	802.11ax160 /be160	MCS0	163	5815	18.75			18.50			

B.2.3.2 Bluetooth-Tablet mode

Band	Mode	Data Rate	Channel	Frequency (MHz)	Antenna	Avg Pwr (dBm)-Vendor 2	Avg Pwr (dBm)-Vendor 1	Tune-up Pwr (dBm)
2.4GHz	Bluetooth	Basic rate GFSK	0	2402	Aux	14.74	14.65	15.00
			39	2441		14.94	14.87	15.00
			78	2480		15.02	14.94	15.25
		Basic rate π/4 DQPSK	0	2402				14.50
			39	2441				14.75
			78	2480				15.00
		Basic rate 8-DPSK	0	2402				15.00
			39	2441				15.00
			78	2480				15.25
		Low energy GFSK	0	2412				15.00
			20	2442				15.00
			39	2480				15.25

Initial test configuration

1. NR: Not Required

B.2.3.3 Bluetooth-Notebook mode

Band	Mode	Data Rate	Channel	Frequency (MHz)	Antenna	Avg Pwr (dBm)-Vendor 2	Avg Pwr (dBm)-Vendor 1	Tune-up Pwr (dBm)
2.4GHz	Bluetooth	Basic rate GFSK	0	2402	Aux	14.65	14.65	15.00
			39	2441		14.83	14.87	15.00
			78	2480		14.96	14.94	15.25
		Basic rate π/4 DQPSK	0	2402				14.50
			39	2441				14.75
			78	2480				15.00
		Basic rate 8-DPSK	0	2402				15.00
			39	2441				15.00
			78	2480				15.25
		Low energy GFSK	0	2412				15.00
			20	2442				15.00
			39	2480				15.25

Initial test configuration

2. NR: Not Required

B.3 Tissue Parameters Measurement

Head TSL
#System 2

Freq. (MHz)	Target Parameters		Measured TSL Parameters		Deviation (%)		Date
	ϵ' (F/m)	σ (S/m)	ϵ' (F/m)	σ (S/m)	ϵ'	σ	
2450.0	39.20	1.80	41.35	1.87	5.48	3.89	2024-06-17
5300.0	35.87	4.76	36.40	4.74	1.48	-0.42	2024-06-17
5500.0	35.64	4.96	36.12	4.97	1.35	0.20	2024-06-17
5600.0	35.53	5.07	35.91	5.07	1.07	0.00	2024-06-17
5800.0	35.30	5.27	35.55	5.25	0.71	-0.38	2024-06-17
5900.0	35.19	5.37	35.39	5.35	0.57	-0.37	2024-06-17

#System 3

Freq. (MHz)	Target Parameters		Measured TSL Parameters		Deviation (%)		Date
	ϵ' (F/m)	σ (S/m)	ϵ' (F/m)	σ (S/m)	ϵ'	σ	
2450.0	39.20	1.80	41.71	1.87	6.4	3.89	2024-06-17
5300.0	35.87	4.76	36.53	4.83	1.84	1.47	2024-06-17
5500.0	35.64	4.96	36.21	5.08	1.60	2.42	2024-06-17
5600.0	35.53	5.07	36.01	5.18	1.35	2.17	2024-06-17
5800.0	35.30	5.27	35.62	5.37	0.91	1.90	2024-06-17
5900.0	35.19	5.37	35.44	5.47	0.71	1.86	2024-06-17

See Annex D for more details.

B.4 System Check Measurements

Frequency (MHz)	Average	Target SAR (W/kg)	Measured SAR (W/kg)	Forwarded Power (mW)	Deviation to target (%)	Limit (%)	Date
2450	1g	51.00	48.20	50.00	-5.49	± 10	2024-06-17
	10g	23.80	22.80		-4.20		
5300	1g	80.40	77.80	50.00	-3.23	± 10	2024-06-18
	10g	22.90	22.00		-3.93		
5500	1g	85.00	82.20	50.00	-3.29	± 10	2024-06-17
	10g	24.00	23.40		-2.50		
5600	1g	83.50	86.40	50.00	3.47	± 10	2024-06-17
	10g	23.90	24.60		2.93		
5800	1g	80.50	77.20	50.00	-4.10	± 10	2024-06-17
	10g	22.70	21.80		-3.96		

See Annex C for more details.

B.5 SAR Test Results

B.5.1 Bluetooth 802.11b/g/n/ax/be – 2.4GHz – DTS

Antenna Manufacturer	Mode	Data rate	BW (MHz)	Channel Number	Freq (MHz)	Test position mode	Antenna	Scaling Factor (dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Vendor 1	802.15	DH5	1	78	2480	Laptop	Aux	0.31	0.01	0.01	
	802.11b	1Mbps	20	6	2437		Aux	0.16	0.08	0.09	
	802.15	DH5	1	78	2480		Main	0.61	0.30	0.34	
	802.11b	1Mbps	20	6	2437	Bottom edge	Aux	0.31	0.08	0.09	
	802.11b	1Mbps	20	11	2462		Aux	0.06	0.20	0.21	
Vendor 2	802.11b	1Mbps	20	11	2462	Laptop	Main	0.16	0.76	0.79	
	802.15	DH5	1	78	2480		Aux	0.29	0.13	0.14	
	802.11b	1Mbps	20	6	2437		Main	0.43	0.19	0.21	
	802.11b	1Mbps	20	11	2462	Bottom edge	Aux	0.29	0.02	0.02	
	802.11b	1Mbps	20	11	2462		Aux	0.23	0.21	0.22	
	802.11b	1Mbps	20	11	2462		Main	0.10	0.88	0.90	1
	802.11b	1Mbps	20	11	2462		Aux	0.02	0.89	0.89	

B.5.2 802.11a/n/ac/ax/be – 5.3 GHz – U-NII-2A

Antenna Manufacturer	Mode	Data rate	BW (MHz)	Channel Number	Freq (MHz)	Test position mode	Antenna	Scaling Factor (dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Vendor 1	802.11ax	HE0	40	54	5270	Laptop	Aux	0.16	0.20	0.21	
	802.11n	HT0					Main	0.11	0.22	0.23	
	802.11ac	VHT0	160	50	5250	Bottom edge	Aux	0.74	0.77	0.91	2
	802.11ac	VHT0	160	50	5250		Main	0.64	0.70	0.81	
Vendor 2	802.11ax	HE0	40	54	5270	Laptop	Aux	0.10	0.15	0.15	
	802.11n	HT0					Main	0.04	0.03	0.03	
	802.11ac	VHT0	160	50	5250	Bottom edge	Aux	0.91	0.61	0.76	
	802.11ac	VHT0	160	50	5250		Main	0.78	0.49	0.59	

B.5.3 802.11a/n/ac/ax/be – 5.6 GHz – U-NII-2C

Antenna Manufacturer	Mode	Data rate	BW (MHz)	Channel Number	Freq (MHz)	Test position mode	Antenna	Scaling Factor (dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Vendor 1	802.11n	HT0	40	126	5630	Laptop	Aux	0.03	0.07	0.07	
	802.11ac	VHT0	160	114	5570		Main	0.12	0.18	0.18	
	802.11n	HT0	40	118	5590	Laptop	Aux	0.61	0.38	0.44	
	802.11ac	VHT0	160	114	5570		Main	0.60	0.50	0.58	
Vendor 2	802.11n	HT0	40	118	5590	Laptop	Aux	0.09	0.23	0.23	
	802.11ac	VHT0	160	114	5570		Main	0.07	0.06	0.07	
	802.11ac-MIMO	VHT0	160	114	5570	Bottom edge	Aux	0.74	0.79	0.93	3
	802.11ac-MIMO	VHT0	160	114	5570		Main	0.71	0.79	0.93	
	802.11ac-MIMO	VHT0	160	114	5570		Aux	0.74	0.33	0.39	
	802.11ac-MIMO	VHT0	160	114	5570	Bottom edge	Main	0.71	0.46	0.54	

B.5.4 802.11a/n/ac/ax/be – 5.8 GHz – U-NII-3

Antenna Manufacturer	Mode	Data rate	BW (MHz)	Channel Number	Freq (MHz)	Test position mode	Antenna	Scaling Factor (dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #	
Vendor 1	802.11a	6	20	161	58.05	Laptop	Aux	0.05	0.14	0.14		
	802.11n	HT0	40	159	5795		Main	0.30	0.09	0.10		
	802.11ac	VHT0	80	138	5690	Bottom edge	Aux	0.41	0.40	0.44		
							Main	0.35	0.32	0.34		
Vendor 2	802.11a	6	20	161	58.05	Laptop	Aux	0.03	0.13	0.13		
	802.11n	HT0	40	159	5795		Main	0.05	0.15	0.15		
	802.11ac	VHT0	80	138	5690	Bottom edge	Aux	0.41	0.54	0.59		
							Main	0.24	1.21	1.28		
	802.11ax	HE0	80	155	5775		Main	0.53	1.21	1.37	4	
							Main	0.31	1.02	1.10		
	802.11ac-MIMO	VHT0	80	155	5775	Bottom edge	Aux	0.54	0.22	0.25		
							Main	0.53	0.65	0.74		

B.5.5 802.11a/n/ac/ax/be – 5.9 GHz – U-NII-4

Antenna Manufacturer	Mode	Data rate	BW (MHz)	Channel Number	Freq (MHz)	Test position mode	Antenna	Scaling Factor (dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Vendor 1	802.11n	HT0	40	167	5835	Laptop	Aux	0.16	0.11	0.11	
							Main	0.31	0.08	0.09	
	802.11ac	VHT0	160	163	5815	Bottom edge	Aux	0.58	0.03	0.03	
							Main	0.72	0.02	0.02	
Vendor 2	802.11n	HT0	40	167	5835	Laptop	Aux	0.06	0.19	0.19	
							Main	0.10	0.17	0.17	
	802.11ac	VHT0	160	163	5815	Bottom edge	Aux	0.75	0.69	0.83	5
							Main	0.69	0.46	0.54	

B.5.5 SAR Measurement Variability

According to FCC OET KDB 865664, SAR Measurement variability is assessed when the maximum initial measured SAR is ≥ 0.8 W/kg for a certain band mode. If the measured SAR value of the initial repeated measurement is < 1.45 W/kg with $< 20\%$ variation, only one repeated measurement is required to confirm that the results are not expected to have substantial variations.

A second repeated measurement is required only if the measured results for the initial repeated measurement are within 10% of the SAR limit or vary by more than 20%.

A third repeated measurement is required only if the original, first or second repeated measurement ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurement is > 1.2 .

Band / Mode	Position	Ch #	Freq. (MHz)	Measured SAR 1g (W/kg)	1st Repeated SAR 1g (W/kg)	2nd Repeated SAR 1g (W/kg)	3rd Repeated SAR 1g (W/kg)	Highest Ratio
2.4 GHz / 802.11b - 20 MHz	Bottom edge	6	2437	0.89	0.80	--	--	1.11
5.6 GHz / 802.11ac - 160 MHz	Bottom edge	138	5690	1.21	1.11	--	--	1.09
5.8 GHz / 802.11ac - 80 MHz	Bottom edge	155	5775	1.21	1.05	--	--	1.15

B.5.6 Simultaneous Transmission SAR Evaluation

According to FCC OET KDB 447498, when the sum of 1g SAR for all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration.

All the values stated in the table below are the worst case found for standalone measurement with disregard of the transmission mode or channel where the worst case was found.

Antenna	Position	Highest Reported SAR (1g) (W/kg)		
		WLAN 2.4 GHz	WLAN 5GHz	Bluetooth
Main	Bottom edge	0.90	1.37**	0.74*
Aux		0.89	0.93**	0.39*
Main	Laptop	0.34	0.23	
Aux		0.14	0.23	

* CH114 and ch155 is considered for this position as the highest standalone measurement and UNII-2C, UNII-3 for Aux and Main transmitters for the simultaneous transmission with MIMO power.

** This combination requires SISO value for simultaneous considerations.

Position	Simultaneous Tx Antenna Combination		Σ SAR 1g (W/kg)	Limit (W/kg)
	Main Antenna	Aux Antenna		
Bottom edge	WLAN 5GHz*	WLAN 5GHz*	1.13	1.6
	WLAN 5GHz*	WLAN 5GHz* + BT	1.35	
	WLAN 5GHz	BT	1.59	
	WLAN 2.4GHz	WLAN 2.4GHz	1.79	
	WLAN 2.4GHz	BT	1.12	
Laptop	WLAN 5GHz	WLAN 5GHz	0.46	1.6
	WLAN 5GHz	WLAN 5GHz + BT	0.55	
	WLAN 5GHz	BT	0.32	
	WLAN 2.4GHz	WLAN 2.4GHz	0.48	
	WLAN 2.4GHz	BT	0.43	

In case the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR to peak location separation ratio:

Position	Antenna	Reported SAR 1g (W/kg)	Σ SAR 1g (W/kg)	Peak Location (mm) (x,y,z)	SAR to peak location separation ratio	Limit
Bottom edge	Main WLAN 2.4GHz	0.90	1.79	(2.1; 17.8; -177.0)	0.04	0.04
	Aux WLAN 2.4GHz	0.89		(1.8; -43.8;-177.0)		

Considering the results described above and according to the simultaneous transmission evaluation exclusions described in FCC OET KDB 447498, no enlarged zoom scan measurements are required.

Annex C. Test System Plots

1. DTS - 802.11b, CH6, Main Antenna –Bottom edge– Vendor 2	52
2. U-NII-2A - 802.11ac160, CH50, Aux Antenna –Bottom edge– Vendor 1.....	53
3. U-NII-2C - 802.11ac160, CH114, Aux Antenna –Bottom edge– Vendor 2.....	54
4. U-NII-3 - 802.11ac80, CH155, Main Antenna –Bottom edge –Vendor 2.....	55
5. U-NII-4 - 802.11ac160, CH163, Aux Antenna –Bottom edge– Vendor 2	56
6. System Check Head Liquid 2450MHz.....	57
7. System Check Head Liquid 5300MHz.....	58
8. System Check Head Liquid 5600MHz.....	59
9. System Check Head Liquid 5800MHz.....	60

1. DTS - 802.11b, CH6, Main Antenna –Bottom edge– Vendor 2**Device under Test Properties**

Model, Manufacturer	Dimensions [mm]		SN	DUT Type	
HP, TPN-Q301	310.0 x 215.0 x 8.0		A5CD42083MS	Convertible PC	

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 0.00	WLAN 2.4GHz	WLAN, 10415-AAA	2437.000, 6	7.51	1.86	41.4

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	HBBL-600-10000, 2024-Jun-17	EX3DV4 - SN3978, 2024-04-03	DAE4ip Sn1705, 2024-04-08

Scan Setup

	Area Scan	Zoom Scan	Measurement Results
Grid Extents [mm]	120.0 x 120.0	30.0 x 30.0 x 30.0	Date 2024-06-17, 22:21
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5	psSAR1g [W/kg] 0.906
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg] 0.432
Graded Grid	N/A	Yes	Power Drift [dB] -0.07
Grading Ratio	N/A	1.5	Power Scaling Factor Disabled
MAIA	Confirmed by MAIA	Confirmed by MAIA	Scaling Factor [dB]
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction
Scan Method	Measured	Measured	M2/M1 [%] Positive Only
			Dist 3dB Peak [mm] 59.6
			6.8

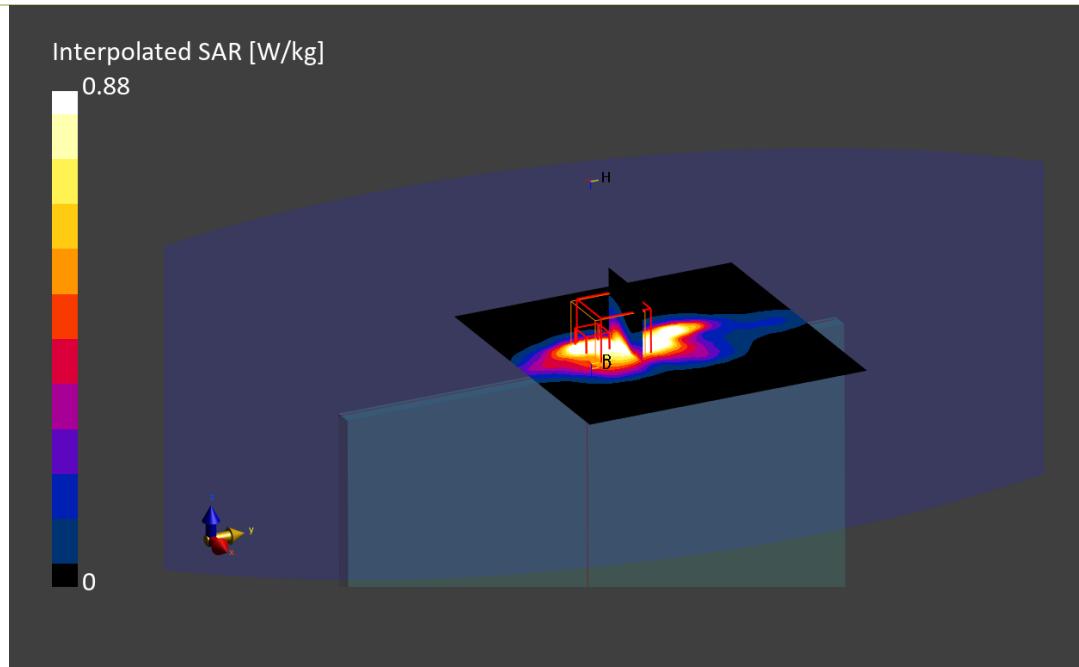

2. U-NII-2A - 802.11ac160, CH50, Aux Antenna –Bottom edge– Vendor 1

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	SN	DUT Type
HP, TPN-Q301	310.0 x 215.0 x 8.0	A5CD42083MT	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 0.00	WLAN 5GHz	WLAN, 10456-AAD	5250.000, 50	5.27	4.76	36.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt)	HBBL-600-10000, 2024-Jun-17	EX3DV4 - SN7455, 2024-03-08	DAE4ip Sn1704, 2024-03-11

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 120.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-06-18, 13:27	2024-06-18, 13:35
psSAR1g [W/kg]	0.768	0.771
psSAR10g [W/kg]	0.256	0.244
Power Drift [dB]	-0.05	-0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction M2/M1 [%]	Positive Only	Positive Only
Dist 3dB Peak [mm]	58.4	5.4

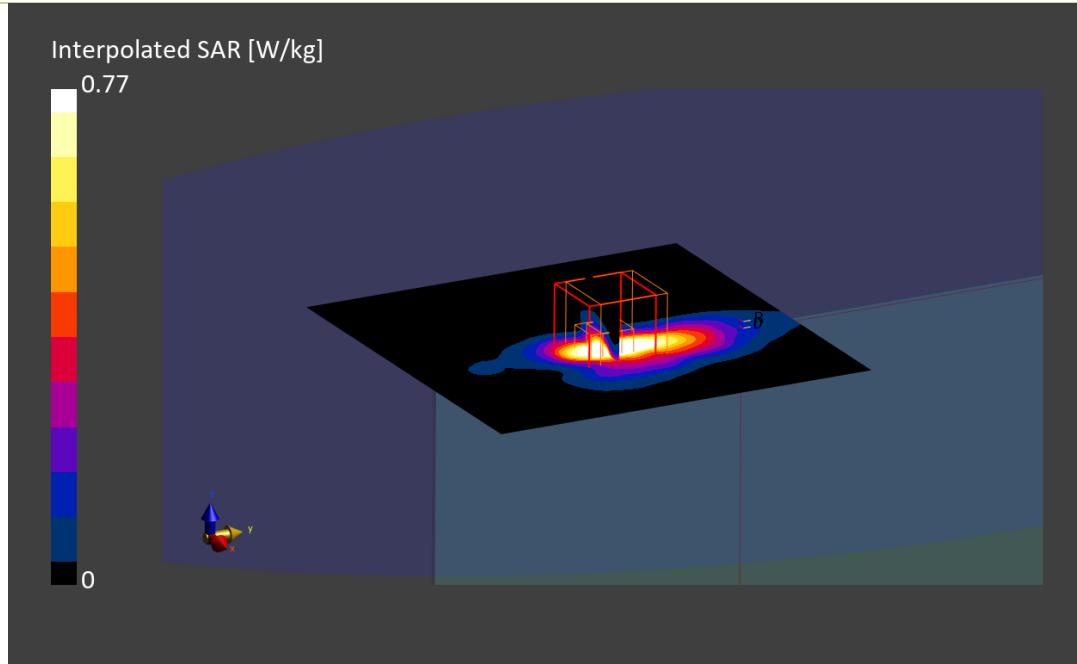

3. U-NII-2C - 802.11ac160, CH114, Aux Antenna –Bottom edge– Vendor 2

Model, Manufacturer	Dimensions [mm]	SN	DUT Type
HP, TPN-Q301	310.0 x 215.0 x 8.0	A5CD42083MS	Convertible PC

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 0.00	WLAN 5GHz	WLAN, 10456-AAD	5570.000, 114	4.85	5.04	36.0

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	HBBL-600-10000 , 2024-Jun-17	EX3DV4 - SN3978, 2024-04-03	DAE4ip Sn1705, 2024-04-08

Scan Setup

	Area Scan	Zoom Scan	Measurement Results
Grid Extents [mm]	120.0 x 120.0	22.0 x 22.0 x 22.0	Date 2024-06-17, 17:55
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4	psSAR1g [W/kg] 0.648
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg] 0.253
Graded Grid	N/A	Yes	Power Drift [dB] 0.10
Grading Ratio	N/A	1.4	Power Scaling Disabled
MAIA	Confirmed by MAIA	Confirmed by MAIA	Scaling Factor [dB]
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction
Scan Method	Measured	Measured	M2/M1 [%] Positive Only
			Dist 3dB Peak [mm] Positive Only 66.1 4.8

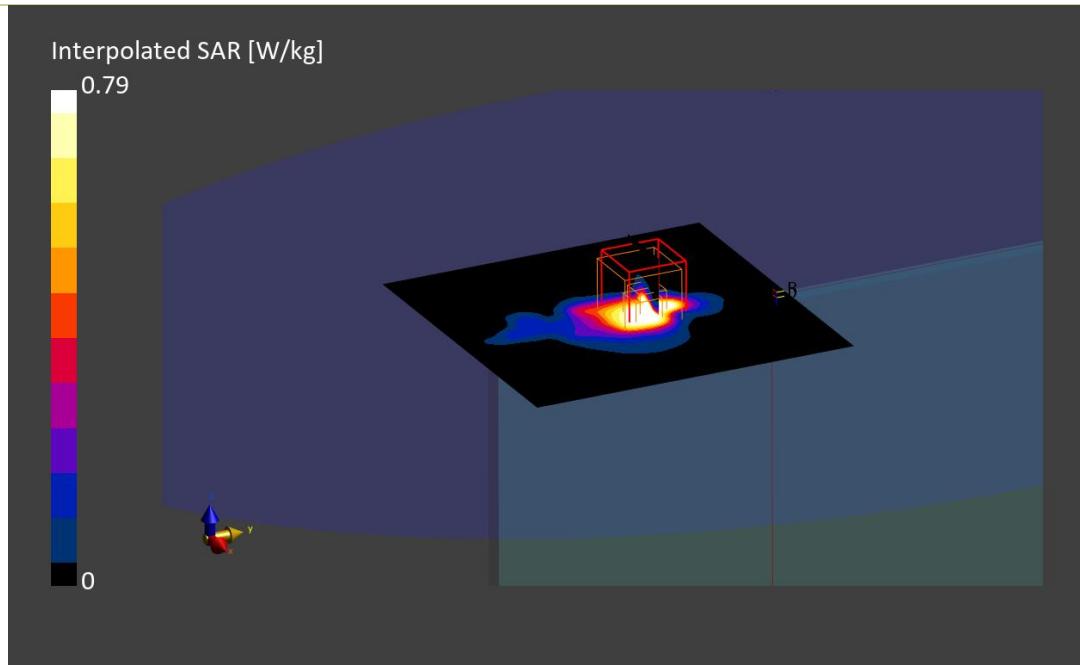

4. U-NII-3 - 802.11ac80, CH155, Main Antenna –Bottom edge –Vendor 2

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	SN	DUT Type
HP, TPN-Q301	310.0 x 215.0 x 8.0	A5CD42083MS	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 0.00	WLAN 5GHz	WLAN, 10402-AAF	5775.000, 155	5.04	5.23	35.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	HBBL-600-10000, 2024-Jun-17	EX3DV4 - SN3978, 2024-04-03	DAE4ip Sn1705, 2024-04-08

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 120.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	3.9 x 3.9 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-06-19, 19:04	2024-06-19, 19:12
psSAR1g [W/kg]	1.20	1.21
psSAR10g [W/kg]	0.327	0.330
Power Drift [dB]	-0.06	0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction M2/M1 [%]	Positive Only	Positive Only
Dist 3dB Peak [mm]	63.4	5.3

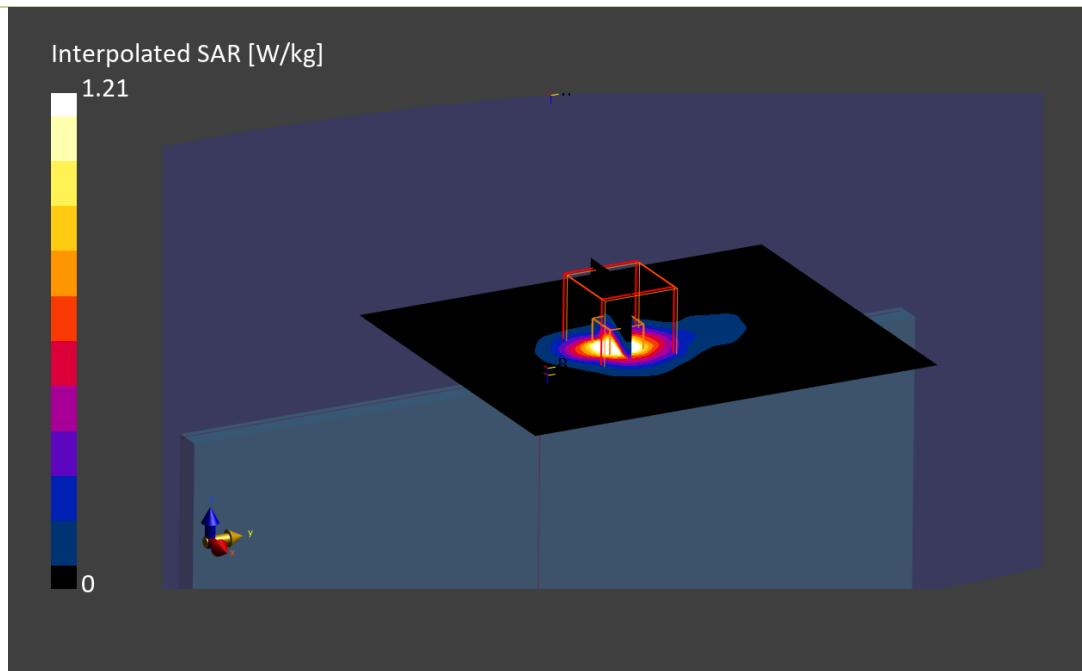

5. U-NII-4 - 802.11ac160, CH163, Aux Antenna –Bottom edge– Vendor 2**Device under Test Properties**

Model, Manufacturer	Dimensions [mm]	SN	DUT Type
HP, TPN-Q301	310.0 x 215.0 x 8.0	A5CD42083MS	Convertible PC

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 0.00	Custom Band	CW, 10456-AAD	5815.000, 5815000	5.04	5.27	35.5

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	HBBL-600-10000, 2024-Jun-17	EX3DV4 - SN3978, 2024-04-03	DAE4ip Sn1705, 2024-04-08

Scan Setup

	Area Scan	Zoom Scan	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 120.0	22.0 x 22.0 x 22.0	Date	2024-06-19, 16:47
Grid Steps [mm]	10.0 x 10.0	3.4 x 3.4 x 1.4	psSAR1g [W/kg]	0.605
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.174
Graded Grid	N/A	Yes	Power Drift [dB]	0.02
Grading Ratio	N/A	1.4	Power Scaling	Disabled
MAIA	Confirmed by MAIA	Confirmed by MAIA	Scaling Factor [dB]	Disabled
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction M2/M1 [%]	Positive Only
Scan Method	Measured	Measured	Dist 3dB Peak [mm]	Positive Only

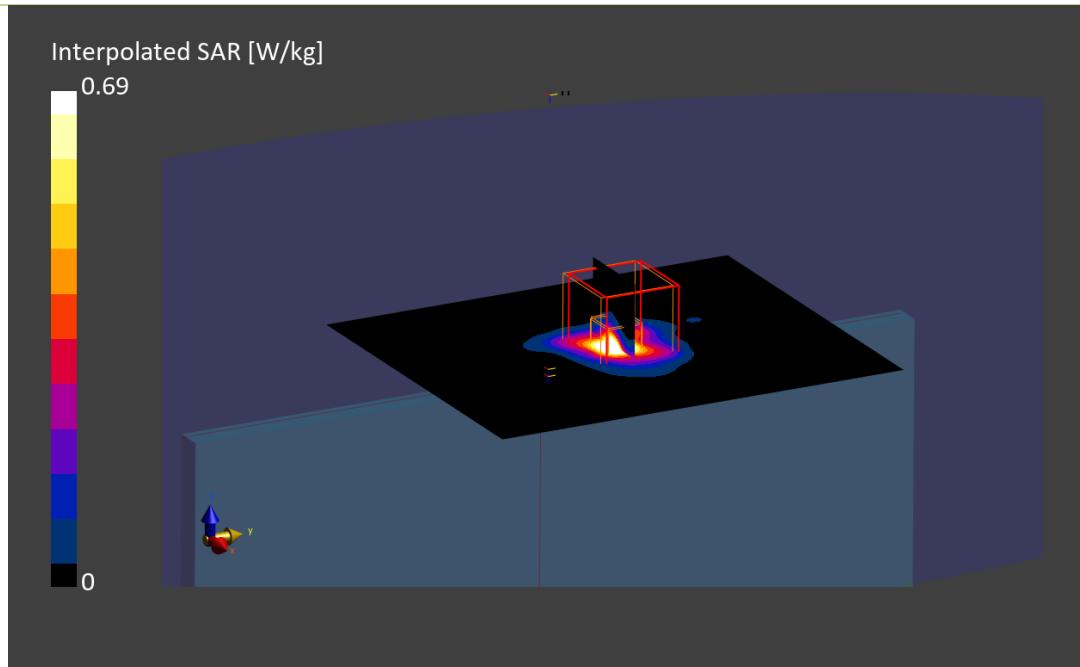

6. System Check Head Liquid 2450MHz

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	SN	DUT Type
D2450GHzV2 , SPEAG	50.0 x 10.0 x 15.0	937	Validation Dipole

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	,		CW, 0--	2450.000, 0	7.51	1.87	41.3

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	HBBL-600-10000, 2024-Jun-17	EX3DV4 - SN3978, 2024-04-03	DAE4ip Sn1705, 2024-04-08

Scan Setup

	Area Scan	Zoom Scan	Measurement Results	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 30.0	Date	2024-06-17, 15:25	2024-06-17, 15:32
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5	psSAR1g [W/kg]	2.34	2.41
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	1.14	1.14
Graded Grid	N/A	Yes	Power Drift [dB]	0.17	-0.05
Grading Ratio	N/A	1.5	Power Scaling	Disabled	Disabled
MAIA	Confirmed by MAIA	Confirmed by MAIA	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	Positive Only	Positive Only
Scan Method	Measured	Measured	M2/M1 [%]	80.9	80.9
			Dist 3dB Peak [mm]	9.0	9.0

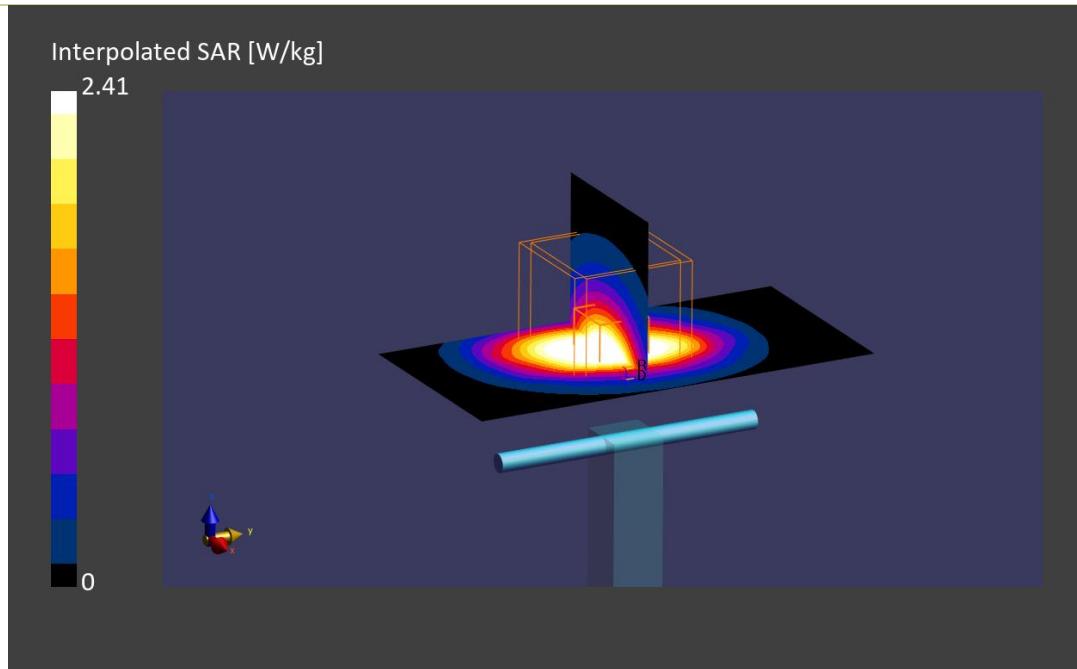

7. System Check Head Liquid 5300MHz

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	SN	DUT Type
D5GHzV2 , SPEAG	50.0 x 10.0 x 15.0	1164	Validation Dipole


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	,	CW, 0--		5300.000, 0	5.01	4.83	36.5

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt)	HBBL-600-10000 , 2024-Jun-17	EX3DV4 - SN7455, 2024-03-08	DAE4ip Sn1704, 2024-03-11

Scan Setup	Area Scan	Zoom Scan	Measurement Results	
			Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	22.0 x 22.0 x 22.0	Date	2024-06-18, 10:20
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4	psSAR1g [W/kg]	3.75
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	1.08
Graded Grid	N/A	Yes	Power Drift [dB]	-0.08
Grading Ratio	N/A	1.4	Power Scaling	0.02
MAIA	Confirmed by MAIA	Confirmed by MAIA	Scaling Factor [dB]	Disabled
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	Disabled
Scan Method	Measured	Measured	M2/M1 [%]	Positive Only
			Dist 3dB Peak [mm]	Positive Only
				64.5
				7.4

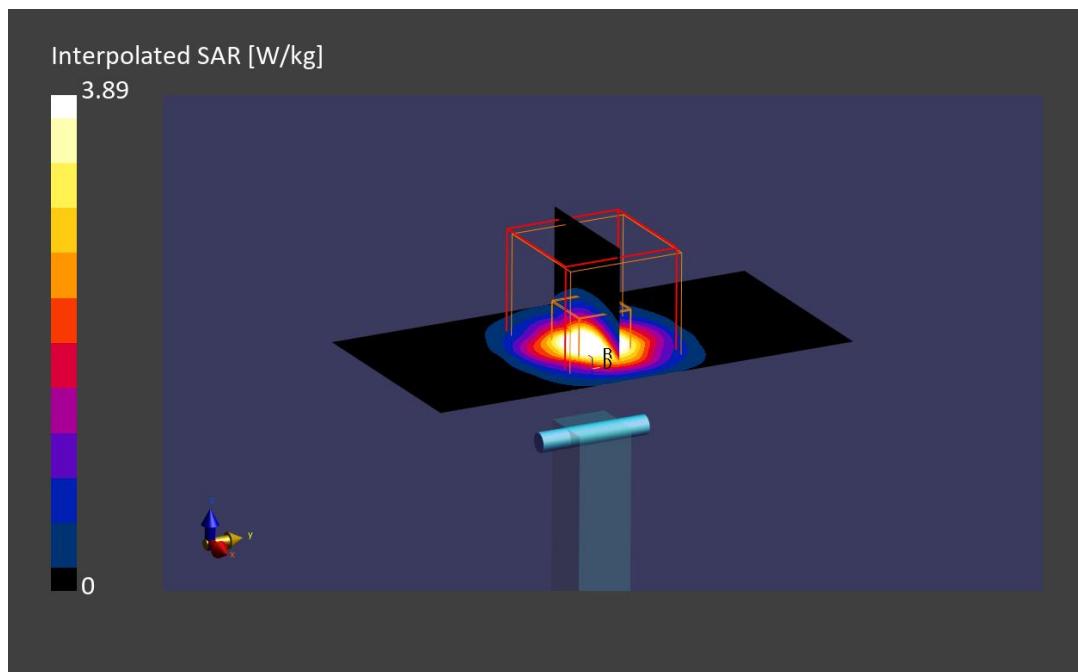

8. System Check Head Liquid 5600MHz

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	SN	DUT Type
D5GHzV2 , SPEAG	50.0 x 10.0 x 15.0	1164	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	,		CW, 0--	5600.000, 0	4.85	5.07	35.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	HBBL-600-10000, 2024-Jun-17	EX3DV4 - SN3978, 2024-04-03	DAE4ip Sn1705, 2024-04-08

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-06-17, 15:00	2024-06-17, 15:06
psSAR1g [W/kg]	3.77	4.32
psSAR10g [W/kg]	1.13	1.23
Power Drift [dB]	-0.03	-0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		
Dist 3dB Peak [mm]	61.1	7.4

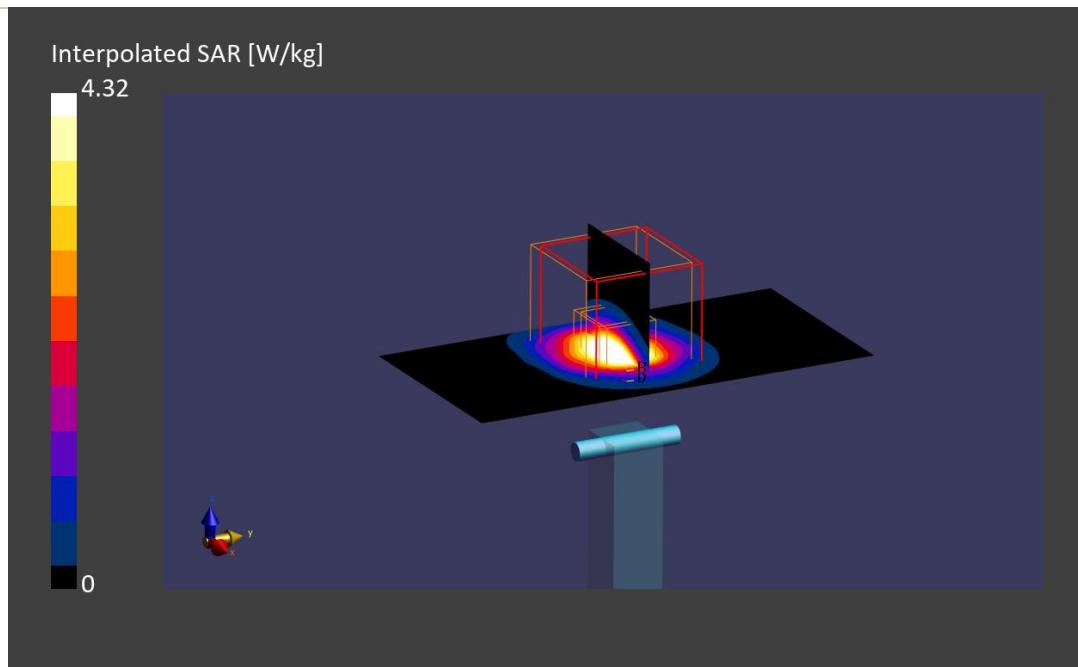

9. System Check Head Liquid 5800MHz

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	SN	DUT Type
D5GHzV2 , SPEAG	50.0 x 10.0 x 15.0	1164	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	,		CW, 0--	5800.000, 0	5.04	5.25	35.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	HBBL-600-10000, 2024-Jun-17	EX3DV4 - SN3978, 2024-04-03	DAE4ip Sn1705, 2024-04-08

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-06-19, 15:14	2024-06-19, 15:21
psSAR1g [W/kg]	3.50	3.93
psSAR10g [W/kg]	1.05	1.12
Power Drift [dB]	0.04	-0.11
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction M2/M1 [%]	Positive Only	Positive Only
Dist 3dB Peak [mm]	58.9	7.4

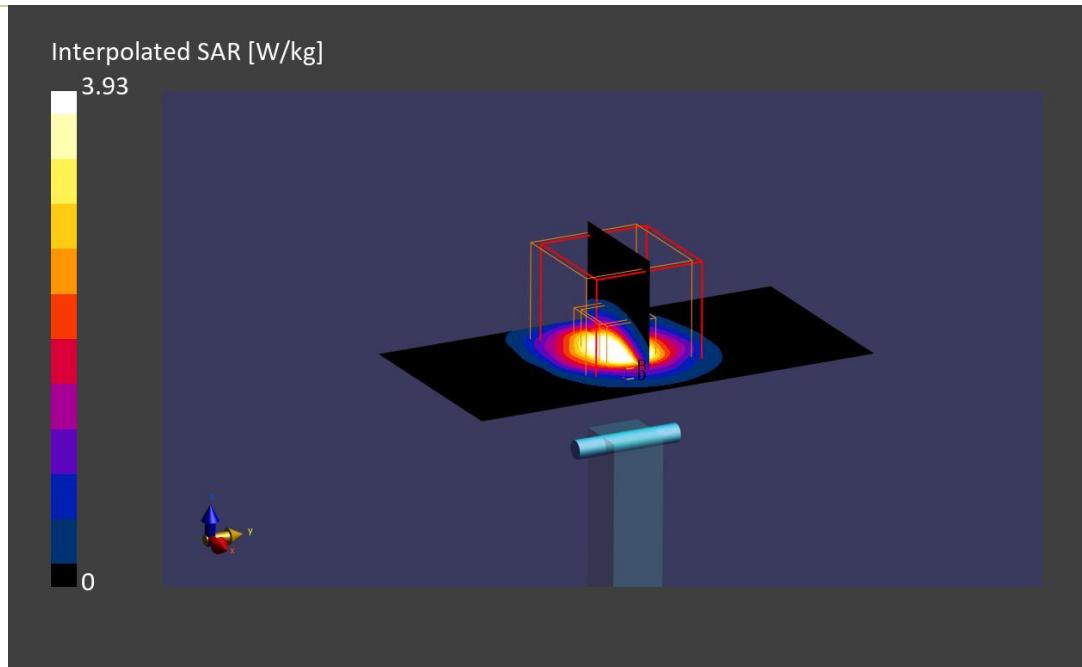


Annex D. TSL Dielectric Parameters

D.1 Body DTS 2450MHz

#System 2


Freq.(MHz)	Target		Measured 2024-06-17	
	$\epsilon'(F/m)$	$\sigma(S/m)$	$\epsilon'1(F/m)$	$\sigma1(S/m)$
2400	39.29	1.76	41.40	1.83
2450	39.20	1.80	41.35	1.87
2500	39.14	1.86	41.29	1.92

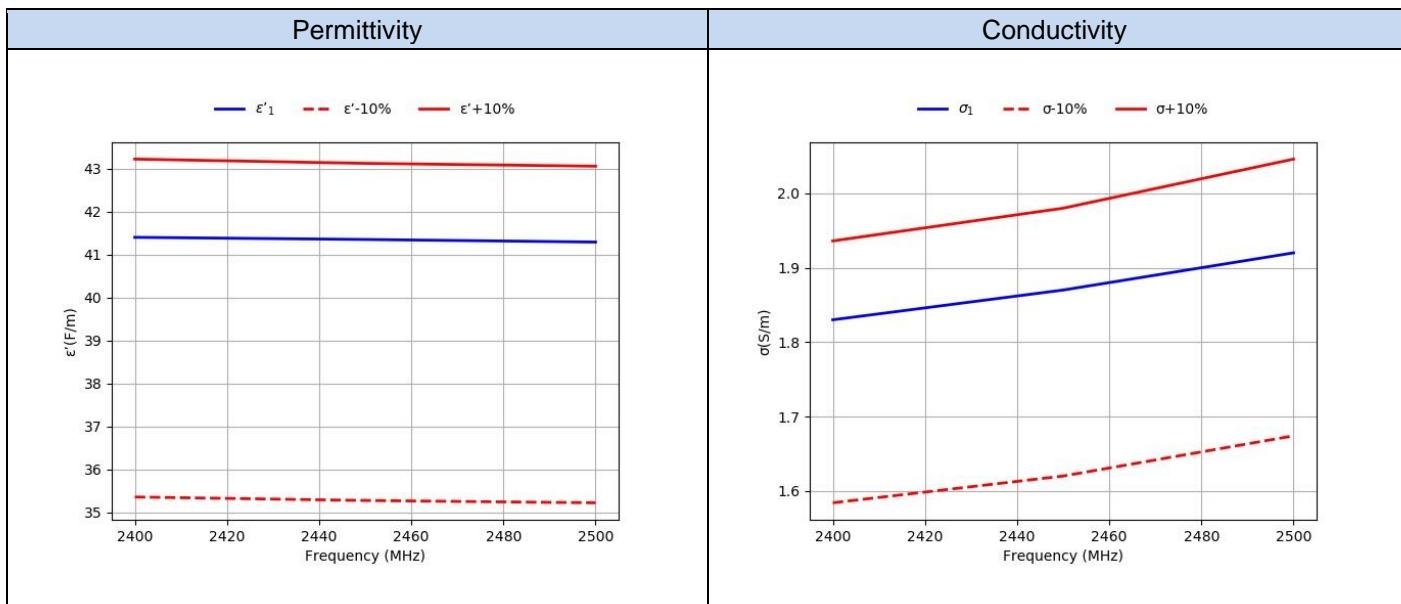

D.2 Body 5200MHz-5900MHz


#System 2

Freq.(MHz)	Target		Measured 2024-06-17	
	$\epsilon'(F/m)$	$\sigma(S/m)$	$\epsilon'1(F/m)$	$\sigma1(S/m)$
5200	35.99	4.66	36.54	4.60
5250	35.93	4.71	36.47	4.67
5300	35.87	4.76	36.40	4.74
5350	35.81	4.81	36.34	4.80
5400	35.76	4.86	36.28	4.86
5450	35.70	4.91	36.20	4.91
5500	35.64	4.96	36.12	4.97
5550	35.59	5.01	36.02	5.03
5600	35.53	5.07	35.91	5.07
5650	35.47	5.12	35.82	5.12
5700	35.41	5.17	35.74	5.16
5750	35.36	5.22	35.64	5.21
5800	35.30	5.27	35.55	5.25
5850	35.24	5.32	35.48	5.30
5900	35.19	5.37	35.39	5.35

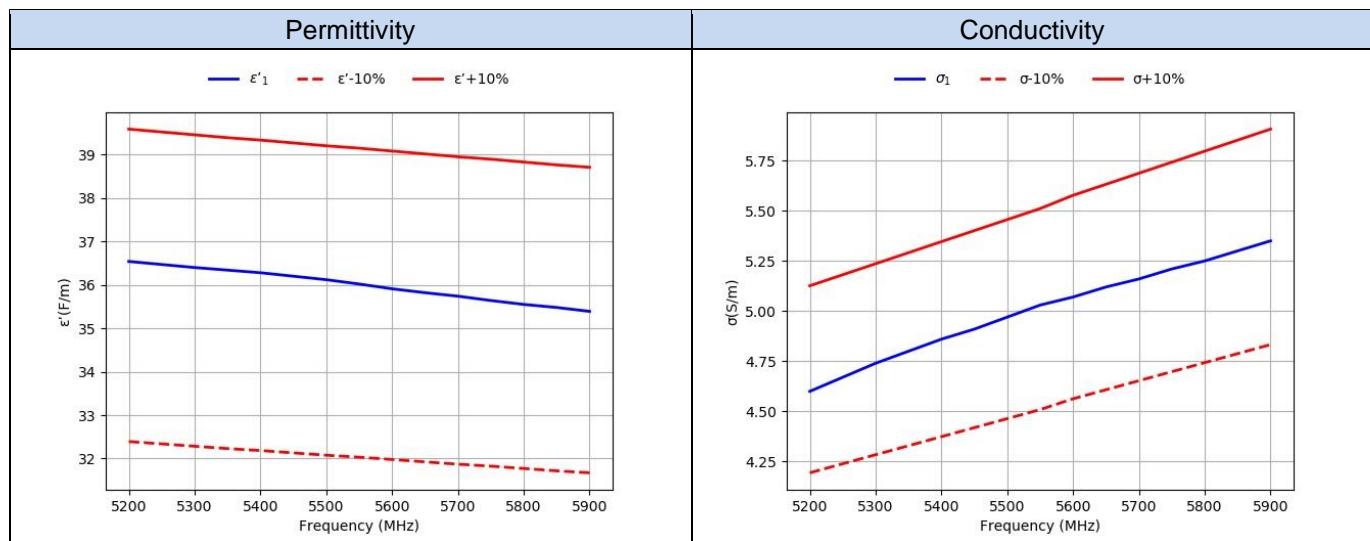

#System 3

Freq.(MHz)	Target		Measured 2024-06-17	
	$\epsilon'(F/m)$	$\sigma(S/m)$	$\epsilon'1(F/m)$	$\sigma1(S/m)$
2400	39.29	1.76	41.76	1.82
2450	39.20	1.80	41.71	1.87
2500	39.14	1.86	41.65	1.91

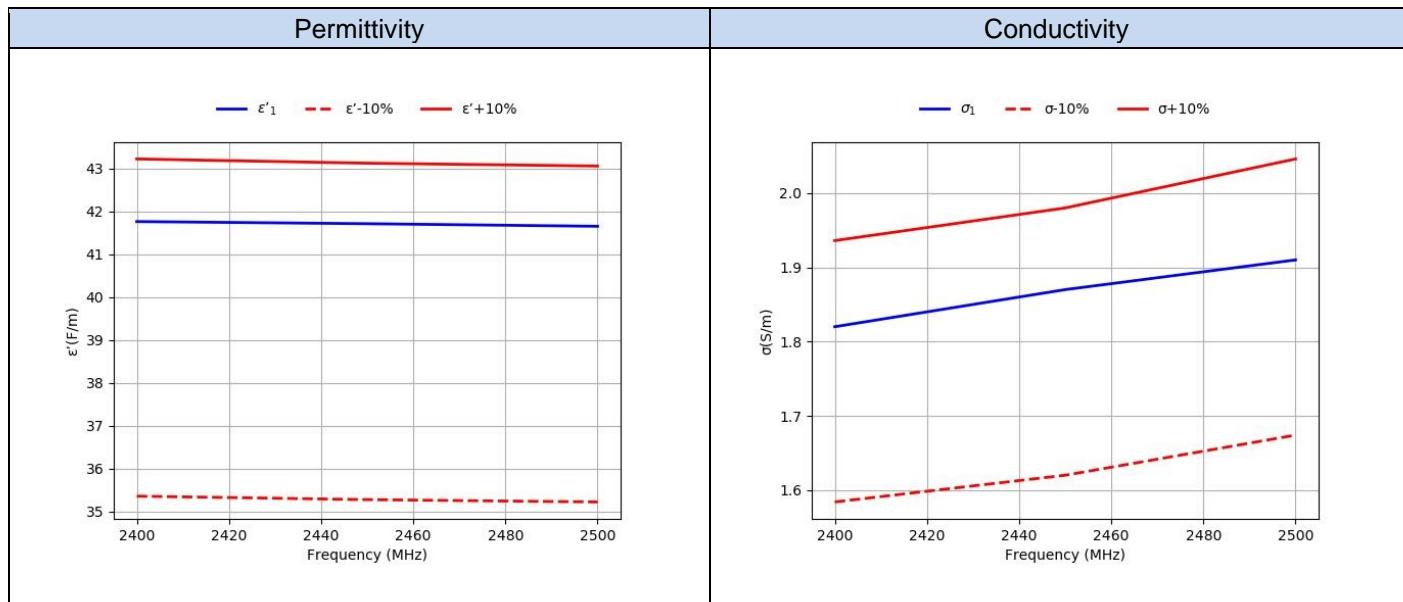

#System 3

Freq.(MHz)	Target		Measured 2024-06-17	
	$\epsilon'(F/m)$	$\sigma(S/m)$	$\epsilon'1(F/m)$	$\sigma1(S/m)$
5200	35.99	4.66	36.69	4.69
5250	35.93	4.71	36.61	4.76
5300	35.87	4.76	36.53	4.83
5350	35.81	4.81	36.46	4.90
5400	35.76	4.86	36.39	4.96
5450	35.70	4.91	36.3	5.02
5500	35.64	4.96	36.21	5.08
5550	35.59	5.01	36.11	5.13
5600	35.53	5.07	36.01	5.18
5650	35.47	5.12	35.92	5.23
5700	35.41	5.17	35.82	5.28
5750	35.36	5.22	35.72	5.32
5800	35.30	5.27	35.62	5.37
5850	35.24	5.32	35.53	5.42
5900	35.19	5.37	35.44	5.47

