

ANTENNA INFORMATION

OEM	Lenovo
ODM	LCFC
Platform model name	Yoga Book 9 14IAH10
Intel platform (ex: Yes, No or NA)	Yes
Platform type (ex: regular NB, convertible PC, AIO...etc)	Convertible PC
SAR minimum separation (mm)	FCC (1g) NB Mode : 4.4mm ;Pad Mode : 3.06mm ISED (1g) NB Mode : 3.06mm ;Pad Mode : 3.06mm ISED (10g) 3.06mm

Antenna manufacturer	Company name	Luxshare-ict
	Address	No. 277, Baisheng Road, Jinxi Town, Kunshan City, Suzhou
Test location	Company name	Luxshare-ict
	Address	No. 277, Baisheng Road, Jinxi Town, Kunshan City, Suzhou
Test Personnel	Name(Full name)	Fei.Luo
	E-mail	Fei.Luo@luxshare-ict.com
	Tel/Mobile	13235167216
Testing date		2024/12/14

Antenna Part number	Main	DC330027F00
	Aux	DC330027F10
Antenna type (ex: PIFA, Dipole...etc)		PIFA

Antenna Peak gain w/ cable loss (dBi)*										
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
Main	0.92	0.15	0.66	1.05	0.97	0.97	1.74	2.10	2.32	2.90
Aux	1.31	0.80	1.32	1.96	0.89	1.48	1.54	1.75	2.00	2.69

Cable Assembly Part Number and Information					
	Cable PN	Cable length(mm)	Cable diameter(mm)	Impedance(ohm)	Connector type
Main	SY113L/50-001	289.5	1.13	50	IPEX
Aux	SY113L/50-003	237.5	1.13	50	IPEX

* 3D Antenna Peak Gain required being test in system basis.

1A Antenna Part Number	1B Manufacturer	1C Antenna Type	1D Cable Assembly Part Number and Information	Freq Range MHz	1E * Peak Gain W/ Cable loss (dBi)	1F Peak Gain w/o Cable Loss (dBi)	1G Max VSWR	1H Cable Loss (dB)
(P/N:DC330027F00) Main Antenna	LUXSHARE- ICT	PIFA	Connector type: IPEX (Connector P/N: MHF-B13L-N-01) 50ohm Coaxial length: 289.5mm diameter: 1.13mm	2400-2483.5	0.92	1.63	3.0	0.71
				5150-5250	0.15	1.21	3.0	1.06
				5250-5350	0.66	1.73	3.0	1.07
				5470-5725	1.05	2.14	3.0	1.09
				5725-5850	0.97	2.08	3.0	1.11
				5850-5895	0.97	2.09	3.0	1.12
				5925-6425	1.74	2.89	3.0	1.15
				6425-6525	2.10	3.27	3.0	1.17
				6525-6875	2.32	3.52	3.0	1.20
				6875-7125	2.90	4.13	3.0	1.23
(P/N:DC330027F10) Main Antenna	LUXSHARE- ICT	PIFA	Connector type: IPEX (Connector P/N: MHF-B13L-N-01) 50ohm Coaxial length: 237.5mm diameter: 1.13mm	2400-2483.5	1.31	1.89	3.0	0.58
				5150-5250	0.80	1.67	3.0	0.87
				5250-5350	1.32	2.20	3.0	0.88
				5470-5725	1.96	2.86	3.0	0.90
				5725-5850	0.89	1.81	3.0	0.92
				5850-5895	1.48	2.41	3.0	0.93
				5925-6425	1.54	2.50	3.0	0.96
				6425-6525	1.75	2.73	3.0	0.98
				6525-6875	2.00	3.01	3.0	1.01
				6875-7125	2.69	3.73	3.0	1.04

- 3D Antenna Peak Gain required being test in system basis.

Table of Contents

Cover page.....	1
1. Intel Reference Gain and Type.....	3
2. Document Revision History.....	3
3. Test & System Description	
3.1 Measurement Method and System.....	4
3.2 Test setup.....	4
3.3 Equipment list.....	5
4. Radiation characteristics of antenna loaded in Host Platform.....	6

1. Intel Reference Gain and Type

Antenna Peak gain w/ cable loss (dBi)											
Band/Frequency		2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
Design	EU/UK	3.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00
PIFA	For WiFi 6E and earlier	3.24	3.64	3.73	4.77	4.97	4.72	4.83	4.30	5.37	5.59
	From WiFi 7	2.95	5.11	4.55	5.15	5.13	4.45	5.02	5.02	4.96	4.96
Dipole	For WiFi 6E and earlier	2.89	2.92	3.19	4.41	4.22	4.22	4.83	4.30	4.49	5.34
	From WiFi 7	2.95	4.03	4.11	5.15	5.13	4.45	5.02	4.71	4.49	4.96
Monopole	From WiFi 7	2.83	4.57	4.44	4.95	4.95	4.43	4.87	4.91	4.91	4.79

3D Peak Antenna gain should be equal or greater than -2 dBi

If a host integrator plans to use a lower gain antenna of the same type, additional CBP(FCC)/EDT(EU) testing need to be performed while the module is installed in the host.

2. Document Revision History


Revision #	Revision Details	Issued Date
Rev. 00	First Issue	

3. Test & System Description

3.1 Measurement Method and System

This test report is prepared by testing in a dark room that is completely silenced and shielded from external signals .

a. Test setup

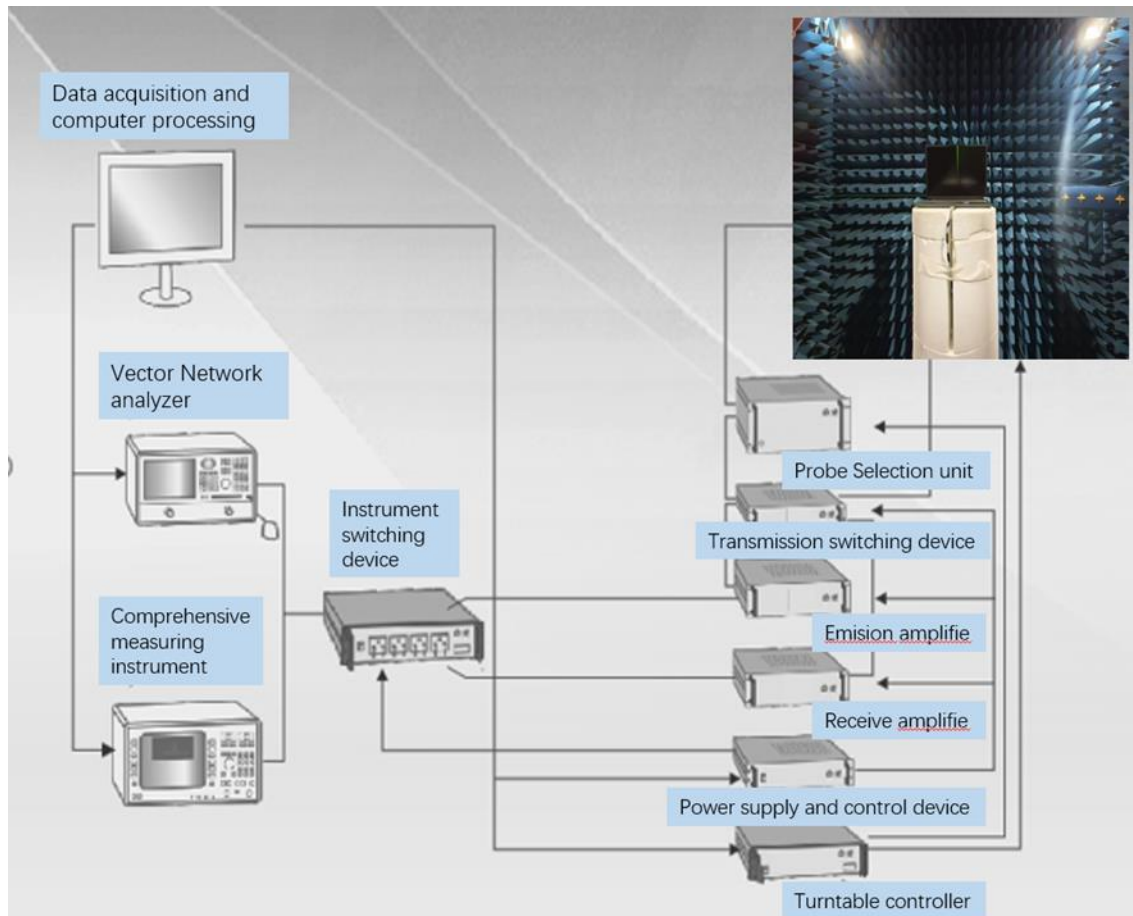

3.2 Equipment list


Number	Device	Type/Model	Serial	Manufacturer	Cal. Date	Cal. Due Date
1	EMT24 Chamber	EM-testing	1603000653	EMT	2024/12/5	2024/12/31
2	Turntable control box	EM-testing	1603000653	EMT	2024/12/5	2024/12/31
3	Turntable control computer	EM-testing	1603000653	EMT	2024/12/5	2024/12/31
4	Tx/rx RF power and its control unit	EM-testing	1603000653	EMT	N/A	N/A
5	Probe switch array	EM-testing	1603000653	EMT	N/A	N/A
6	Test system host	EM-testing	1603000653	EMT	N/A	N/A
7	Network analyzer	E5071C	1603000653	EMT	2023/12/31	2024/12/31
8	RF line TX	EM-testing	1603000653	EMT	N/A	N/A
9	RF line RX	EM-testing	1603000653	EMT	N/A	N/A
10	UPS uninterruptible power supply	Castle	1603000653	EMT	N/A	N/A
11	24 Probe Antenna	EM-testing	1603000653	EMT	2024/12/5	2024/12/31
12	Cable 3m 400MHz~8.5GHz	EM-testing	1603000653	EMT	2023/9/30	2024/12/31

4. Radiation characteristics of antenna loaded in Host Platform

Main Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	0.92

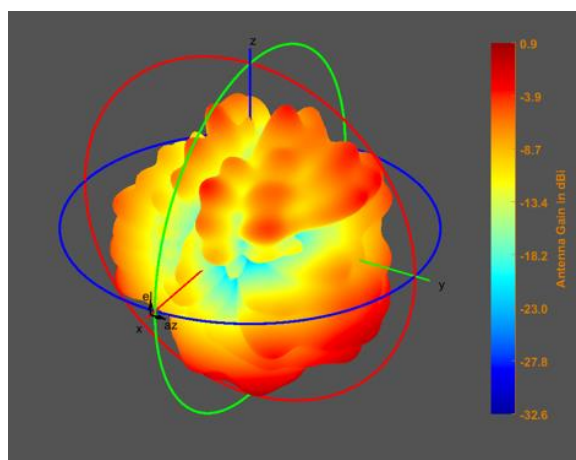


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	0.15

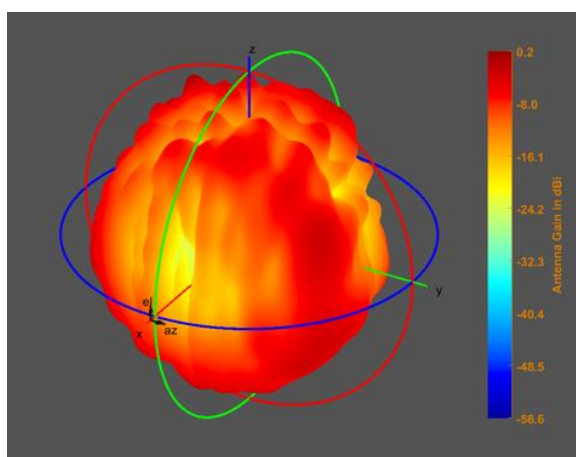


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	0.66

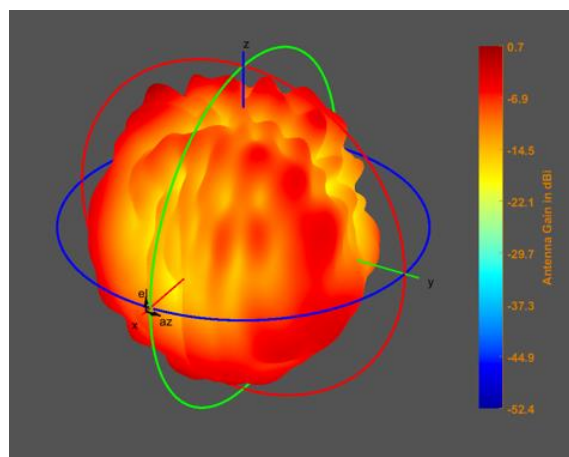


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	1.05

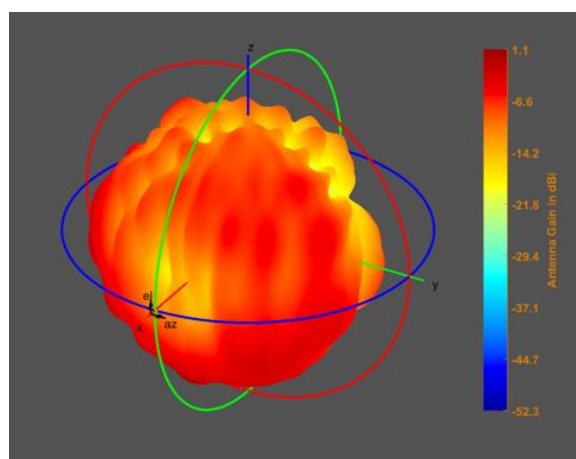


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	0.97

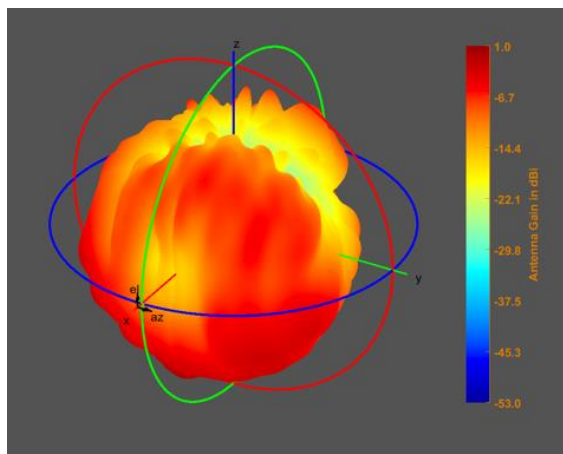


Max Antenna 3D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	0.97

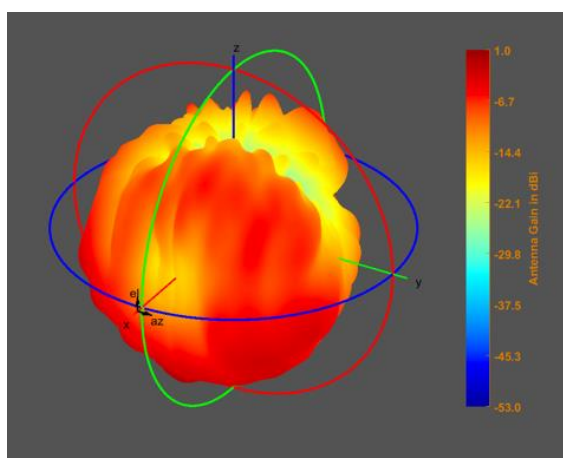


Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	1.74

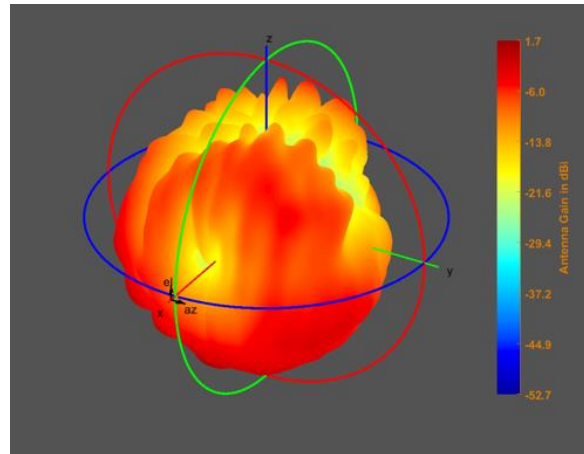


Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	2.10

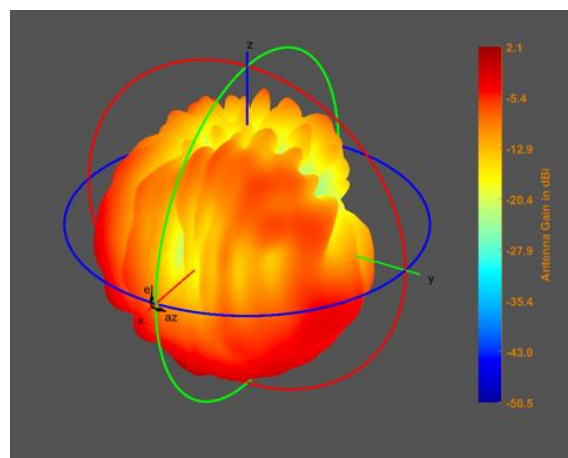


Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	2.32

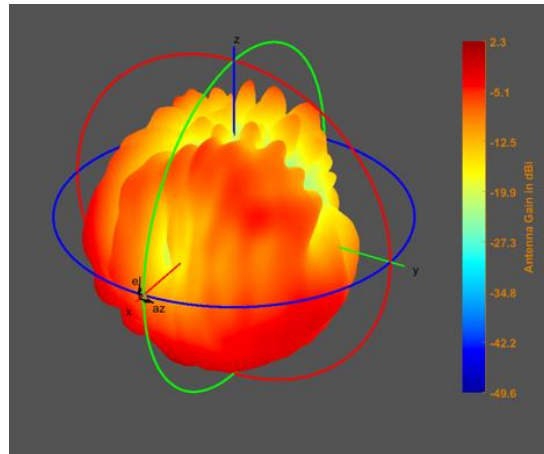

Max Antenna 3D Radiation Pattern 6875-7125 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	2.90

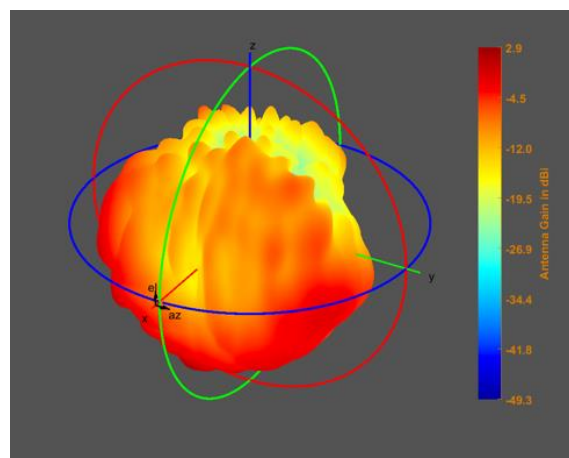

Auxiliary Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	1.31

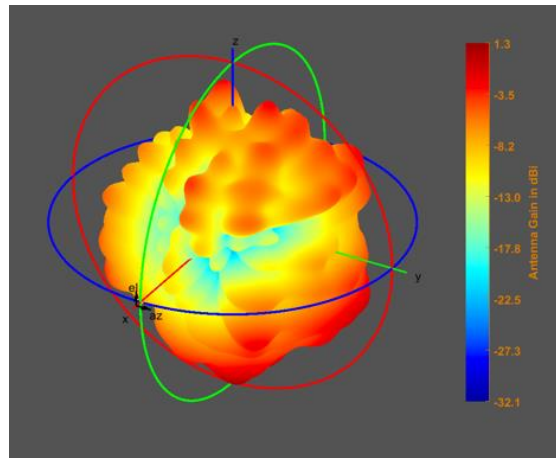


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	0.80

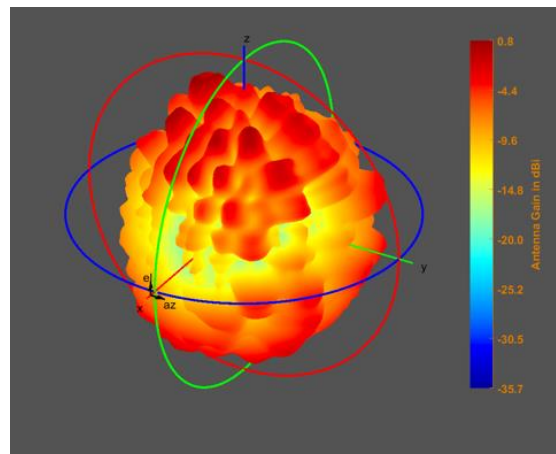


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	1.32

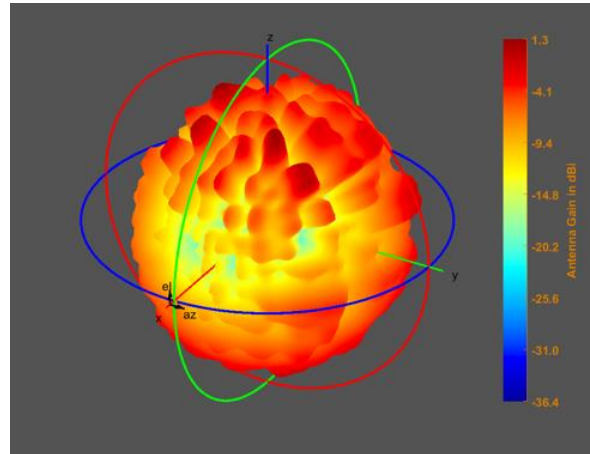


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	1.96

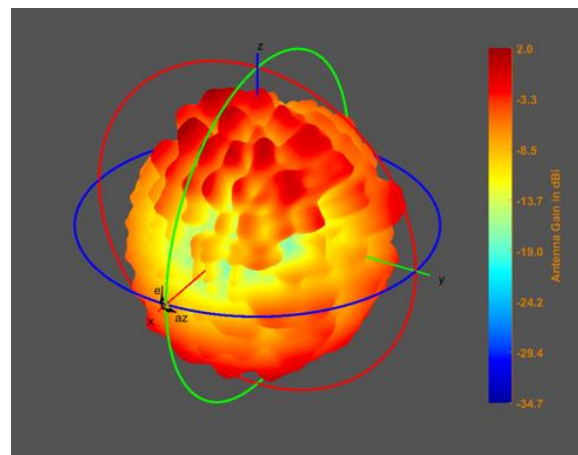


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	0.89

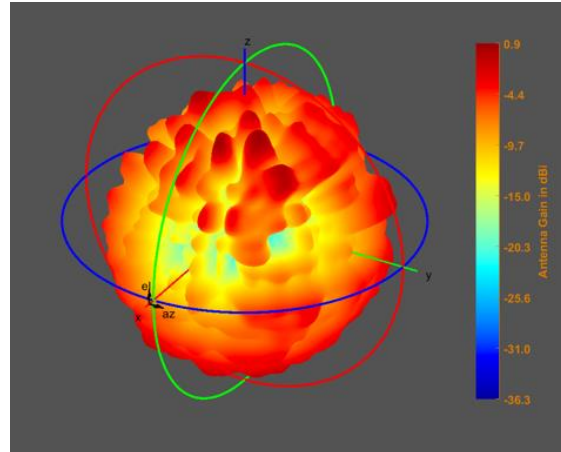


Max Antenna 3D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	1.48

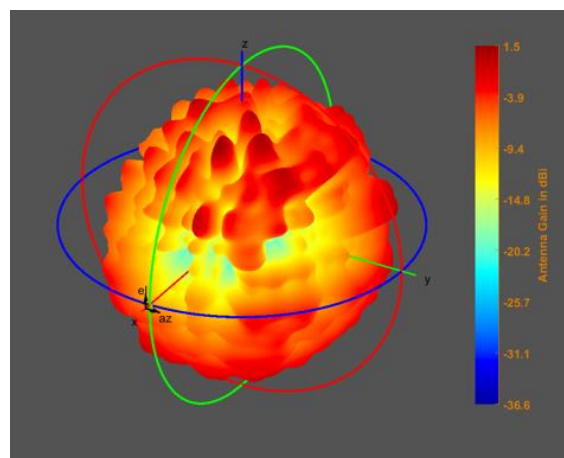


Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	1.54

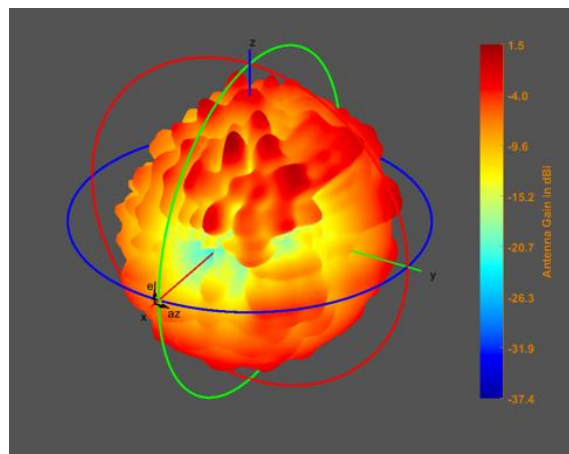


Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	1.75

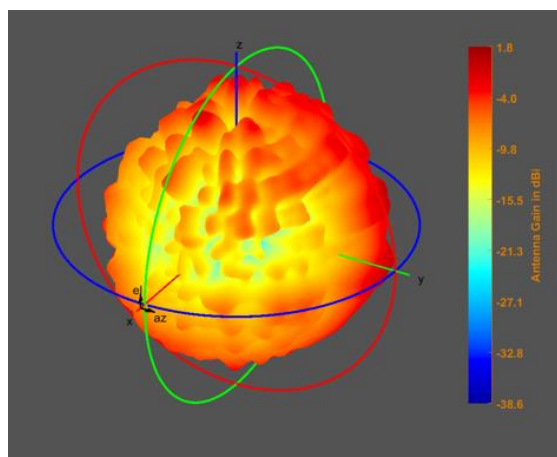

Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	2.00

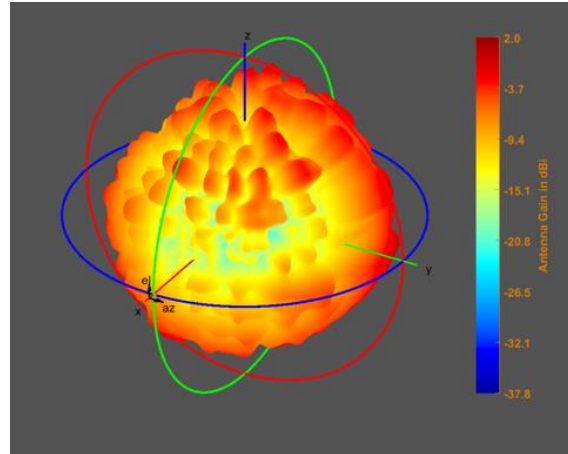

Max Antenna 3D Radiation Pattern 6875-7125 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	2.69

