

TEST REPORT

EUT Description	Convertible PC
Brand Name	HP
Model Name	HSN-I62C
FCC ID	PD9BE201NG
ISED ID	1000M-BE201NG
Date of Test Start/End	2025-01-17 / 2025-01-017
Features	2x2 Wi-Fi- Bluetooth® (see section 5)

Applicant	Intel Corporation SAS
Address	425 Rue de Goa – Le Cargo B6 – 06600 Antibes, FRANCE
Contact Person	Benjamin Lavenant
Telephone/Fax/ Email	Benjamin.lavenant@intel.com

Reference Standards	FCC 47 CFR Part §2.1093 RSS 102, issue 6 (see section 1)
---------------------	--

Test Report identification	240828-04.TR07
Revision Control	Rev. 00 This test report revision replaces any previous test report revision (see section 8)

The test results relate only to the samples tested.
Reference to accreditation shall be used only by full reproduction of test report

Reviewed by _____

Table of Contents

1. Standards, reference documents and applicable test methods	3
2. General conditions, competences and guarantees	3
3. Environmental Conditions	3
4. Test Sample	3
5. EUT Features	4
6. Remarks and comments	4
7. Test Results summary.....	4
7.1. WLAN TX POWER TABLE SUMMARY	4
8. Document Revision History	5
Annex A. Test & System description	6
A.1 TEST SETUP	6
A.2 PROCEDURE	6
A.3 TEST EQUIPMENT LIST.....	7
A.4 MEASUREMENT UNCERTAINTY EVALUATION.....	7
Annex B. Test Results	8
B.1 TRIGGER LID ANGLE DETECTION AND POWER VERIFICATION 2.4GHZ	9
B.1.1 LCD DIRECTION 0°	9
B.1.2 LCD DIRECTION 180°	11
B.1.3 LCD DIRECTION 90° OR 170	12
B.2 TRIGGER LID ANGLE DETECTION AND POWER VERIFICATION 5GHZ	13
B.2.1 LCD DIRECTION 0°	13
B.2.2 LCD DIRECTION 180°	15
B.2.3 LCD DIRECTION 90° OR 170	16

1. Standards, reference documents and applicable test methods

FCC	1. FCC Title 47 CFR Part §2.1093 – Radiofrequency radiation exposure evaluation: portable devices. 2022-10-01 Edition 2. KDB 388624 D02 Pre-Approval Guidance List v18, PRE-APPROVAL GUIDANCE LIST 3. FCC Presentations TCB Workshop November 2019, RF exposure procedures.
ISED	1. RSS 102 Issue 6 - Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)

2. General conditions, competences and guarantees

- ✓ Tests performed under FCC standards identified in section 1 are covered by A2LA accreditation.
- ✓ Tests performed under ISED standards identified in section 1 are covered by Cofrac accreditation.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an ISO/IEC 17025:2017 laboratory accredited by the American Association for Laboratory Accreditation (A2LA) with the certificate number 3478.01.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an Accredited Test Firm recognized by the FCC, with Designation Number FR0011.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an ISO/IEC 17025:2017 testing laboratory accredited by the French Committee for Accreditation (Cofrac) with the certificate number 1-6736.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is a Registered Test Site listed by ISED, with ISED company number 1000Y and CAB identifier FR0005.
- ✓ Intel WRF Lab only provides testing services and is committed to providing reliable, unbiased test results and interpretations.
- ✓ Intel WRF Lab is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.
- ✓ Intel WRF Lab has developed calibration and proficiency programs for its measurement equipment to ensure correlated and reliable results to its customers.
- ✓ This report is only referred to the item that has undergone the test.
- ✓ This report does not imply an approval of the product by the Certification Bodies or competent Authorities.

3. Environmental Conditions

- ✓ At the site where the measurements were performed the following limits were not exceeded during the tests:

Temperature	Min: 18.05°C Max: 20.97°C AVG: 20.20°C
Humidity	Min: 21.79% Max: 35.40% AVG: 27.12%

4. Test Sample

Sample	ID #	Description	Model	Serial #	Note
#1	240828-04.S06	Convertible PC	HSN-I62C	0004770L6F	-

5. EUT Features

The herein information is provided by the customer.

Intel WRF Lab declines any responsibility for the accuracy of the stated customer provided information, especially if it has any impact on the correctness of test results presented in this report.

Brand Name	HP		
Model Name	HSN-I62C		
Prototype / Production	Production		
Host Identification	Convertible PC		
Supported Radios	802.11b/g/n/ax/be	2.4GHz (2400.0 – 2483.5 MHz)	
	802.11a/n/ac/ax/be	5.2GHz (5150.0 – 5250.0 MHz)	
		5.3GHz (5250.0 – 5350.0 MHz)	
		5.6GHz (5470.0 – 5725.0 MHz)	
		5.8GHz (5725.0 – 5895.0 MHz)	
	802.11ax/be	6.0GHz (5925.0 – 7125.0 MHz)	
	Bluetooth	2.4GHz (2400.0 – 2483.5 MHz)	

6. Remarks and comments

1. The test report is a validation of the G sensor functionality

7. Test Results summary

The statement of conformity to applicable standards in the table below are based on the measured values, without considering the measurement uncertainties.

7.1. WLAN Tx Power Table Summary

Device Mode	Lid Angle range	LCD Direction	2.4GHz-CH6 802.11b - 1Mbps				5GHz-CH120 802.11a - 6Mbps			
			Target Power (dBm)		Measured Power (dBm)		Target Power (dBm)		Measured Power (dBm)	
			Ant AUX (1)	Ant MAIN (2)	Ant AUX (1)	Ant MAIN (2)	Ant AUX (1)	Ant MAIN (2)	Ant AUX (1)	Ant MAIN (2)
Lid Close	$0^{\circ} \leq \varphi < 30^{\circ}$	-	Standby	Standby	Standby	Standby	Standby	Standby	Standby	Standby
Notebook	$30^{\circ} \leq \varphi < 130^{\circ}$	0°	22.25	18.5	20.77	18.00	20.5	20.5	19.81	19.22
Stand	$200^{\circ} \leq \varphi < 340^{\circ}$	0°	22.25	18.5	20.77	18.00	20.5	20.5	19.81	19.22
Tent	$200^{\circ} \leq \varphi < 340^{\circ}$	180°	16.0	18.0	15.25	17.52	12.0	12.0	11.30	11.14
Tablet	$130^{\circ} \leq \varphi < 200^{\circ}$ $200^{\circ} \leq \varphi < 340^{\circ}$ $340^{\circ} \leq \varphi \leq 360^{\circ}$	0° 90° or 270° 0°	16.0	18.0	15.25	17.52	12.0	12.0	11.30	11.14
Book	$30^{\circ} \leq \varphi < 200^{\circ}$	90° or 270°	16.0	18.0	15.25	17.52	12.0	12.0	11.30	11.14

8. Document Revision History

Revision #	Modified by	Revision Details
Rev.00	Estelle GILLES	First Issue


Annex A. Test & System description

A.1 Test setup

The conducted power measurement test setup is described in the following and illustrated in Figure 1.

- The DUT is convertible PC from HP model HSN-I62C. An BE201NGW connectivity module is installed inside
- Uplink signal power is measured with the access point.
- Path loss in the power measurement setup from the wireless module antenna port to the access point is compensated
- ANT tool version .01433.23.10.0 is used on the DUT to query the power table index and sensor status

Figure.1 – Power measurement test setup.

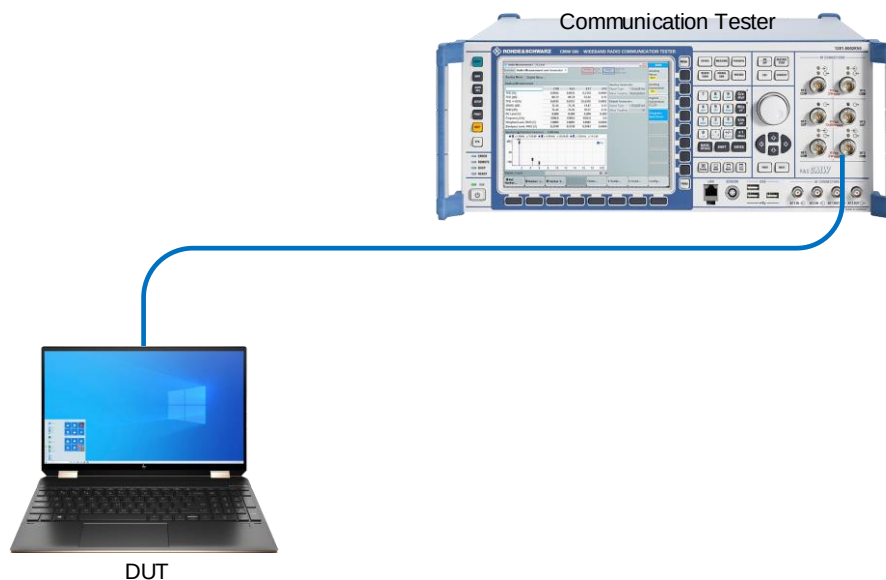

A.2 Procedure

The following additional guidance applies only to convertible laptops whose screen rotates around one axis, from 0 degrees to 360 degrees, in a clamshell style, i.e., from closed mode to open mode, to “tent” mode, and finally, to tablet mode. This process must be followed to determine the lid angle where a power reduction occurs, by taking power measurements at each step, as indicated in the step listed here below:

1. From the lid in closed mode (0 degrees), open the screen in 10-degree steps until laptop mode is obtained
2. Lower the screen by 5 degrees increments to verify that the “closed mode” is triggered
3. From the position of the previous step, open the screen in 1-degree increments until laptop mode is triggered again
4. Continue opening the screen in 1-degree increments until at least 5 degrees past where “laptop mode” was obtained, then continue opening the screen in 10-degree steps until the device switches to tablet mode
5. Reverse the previous procedure to go from tablet mode back down to closed mode

A.3 Test Equipment List

Equipment and accessories used for the conducted power measurement test setup are listed below. The Test Platform (DUT), test setup and associated equipment are shown in A.1.3.

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
125-000	Communication Tester	CMW500	129337	Rohde & Schwartz	2023-04-20	2025-04-20
022-003 022-004	RF path (RF cable + Adapters)	-	-	-	RF path loss was verified before usage	

A.4 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the table below with a coverage factor of $k = 2$ to indicate a 95% level of confidence:

Measurement type	Uncertainty	Unit
Power level	± 1	dB

Annex B. Test Results

The herein test results were performed by:

Test case measurement	Test Personnel
G-Sensor Validation	Estelle GILLES

B.1 Trigger lid angle detection and power verification 2.4GHz**B.1.1 LCD direction 0°**

The lid is rotating from 0° to 360°. The screen is vertical, LCD direction is 0°

Device Mode	Angle (°)	Meas. Power (dBm) 2.4GHz Ch6 Aux (1) Ant.	Meas. Power (dBm) 2.4GHz Ch6 Main (2) Ant.	Device Mode	Angle (°)	Meas. Power (dBm) 2.4GHz Ch6 Aux (1) Ant.	Meas. Power (dBm) 2.4GHz Ch6 Main (2) Ant.
Lid close	0	Standby	Standby	Tablet	195	15.25	17.52
Lid close	10	Standby	Standby	Tablet	196	15.25	17.52
Lid close	20	Standby	Standby	Tablet	197	15.25	17.52
Notebook	30	20.77	18.00	Tablet	198	15.25	17.52
Lid close	25	Standby	Standby	Tablet	199	15.25	17.52
Lid close	26	Standby	Standby	Stand	200	20.77	18.00
Lid close	27	Standby	Standby	Stand	210	20.77	18.00
Lid close	28	Standby	Standby	Stand	211	20.77	18.00
Lid close	29	Standby	Standby	Stand	220	20.77	18.00
Notebook	30	20.77	18.00	Stand	230	20.77	18.00
Notebook	40	20.77	18.00	Stand	240	20.77	18.00
Notebook	50	20.77	18.00	Stand	250	20.77	18.00
Notebook	60	20.77	18.00	Stand	260	20.77	18.00
Notebook	70	20.77	18.00	Stand	270	20.77	18.00
Notebook	80	20.77	18.00	Stand	280	20.77	18.00
Notebook	90	20.77	18.00	Stand	290	20.77	18.00
Notebook	100	20.77	18.00	Stand	300	20.77	18.00
Notebook	110	20.77	18.00	Stand	310	20.77	18.00
Notebook	120	20.77	18.00	Stand	320	20.77	18.00
Notebook	130	20.77	18.00	Stand	330	20.77	18.00
Tablet	140	15.25	17.52	Tablet	340	15.25	17.52
Notebook	135	20.77	18.00	Stand	335	20.77	18.00
Tablet	130	15.25	17.52	Stand	336	20.77	18.00
Tablet	131	15.25	17.52	Stand	337	20.77	18.00
Tablet	132	15.25	17.52	Stand	338	20.77	18.00
Tablet	133	15.25	17.52	Stand	339	20.77	18.00
Tablet	134	15.25	17.52	Tablet	340	15.25	17.52
Tablet	135	15.25	17.52	Tablet	350	15.25	17.52
Tablet	140	15.25	17.52	Tablet	360	15.25	17.52
Tablet	150	15.25	17.52				
Tablet	160	15.25	17.52				
Tablet	180	15.25	17.52				
Tablet	190	15.25	17.52				
Stand	200	20.77	18.00				

The lid is rotating from 360° to 0°. The screen is vertical, LCD direction to 0°.

Device Mode	Angle (°)	Meas. Power (dBm) 2.4GHz Ch6 Aux (1) Ant.	Meas. Power (dBm) 2.4GHz Ch6 Main (2) Ant.	Device Mode	Angle (°)	Meas. Power (dBm) 2.4GHz Ch6 Aux (1) Ant.	Meas. Power (dBm) 2.4GHz Ch6 Main (2) Ant.
Tablet	360	15.25	17.52	Tablet	180	15.25	17.52
Tablet	350	15.25	17.52	Tablet	170	15.25	17.52
Tablet	340	15.25	17.52	Tablet	160	15.25	17.52
Stand	330	20.77	18.00	Tablet	150	15.25	17.52
Stand	335	20.77	18.00	Tablet	140	15.25	17.52
Tablet	340	15.25	17.52	Tablet	130	15.25	17.52
Stand	339	20.77	18.00	Notebook	120	20.77	18.00
Stand	338	20.77	18.00	Notebook	125	20.77	18.00
Stand	337	20.77	18.00	Tablet	130	15.25	17.52
Stand	336	20.77	18.00	Notebook	129	20.77	18.00
Stand	335	20.77	18.00	Notebook	128	20.77	18.00
Stand	330	20.77	18.00	Notebook	127	20.77	18.00
Stand	320	20.77	18.00	Notebook	126	20.77	18.00
Stand	310	20.77	18.00	Notebook	125	20.77	18.00
Stand	300	20.77	18.00	Notebook	120	20.77	18.00
Stand	290	20.77	18.00	Notebook	110	20.77	18.00
Stand	280	20.77	18.00	Notebook	100	20.77	18.00
Stand	270	20.77	18.00	Notebook	90	20.77	18.00
Stand	260	20.77	18.00	Notebook	80	20.77	18.00
Stand	250	20.77	18.00	Notebook	70	20.77	18.00
Stand	240	20.77	18.00	Notebook	60	20.77	18.00
Stand	230	20.77	18.00	Notebook	50	20.77	18.00
Stand	220	20.77	18.00	Notebook	40	20.77	18.00
Stand	210	20.77	18.00	Notebook	30	20.77	18.00
Stand	200	20.77	18.00	Lid close	20	Standby	Standby
Tablet	190	15.25	17.52	Lid close	25	Standby	Standby
Tablet	195	15.25	17.52	Notebook	30	20.77	18.00
Stand	200	20.77	18.00	Lid close	29	Standby	Standby
Tablet	199	15.25	17.52	Lid close	28	Standby	Standby
Tablet	198	15.25	17.52	Lid close	27	Standby	Standby
Tablet	197	15.25	17.52	Lid close	26	Standby	Standby
Tablet	196	15.25	17.52	Lid close	25	Standby	Standby
Tablet	195	15.25	17.52	Lid close	20	Standby	Standby
Tablet	190	15.25	17.52	Lid close	10	Standby	Standby
				Lid close	0	Standby	Standby

B.1.2 LCD direction 180°

The lid is rotating from 200° to 360°. The screen is vertical, LCD direction to 180°.

Device Mode	Angle (°)	Meas. Power (dBm) 2.4GHz Ch6 Aux (1) Ant.	Meas. Power (dBm) 2.4GHz Ch6 Main (2) Ant.
Tent	200	15.25	17.52
Tent	210	15.25	17.52
Tent	220	15.25	17.52
Tent	230	15.25	17.52
Tent	240	15.25	17.52
Tent	250	15.25	17.52
Tent	260	15.25	17.52
Tent	270	15.25	17.52
Tent	280	15.25	17.52
Tent	290	15.25	17.52
Tent	300	15.25	17.52
Tent	310	15.25	17.52
Tent	320	15.25	17.52
Tent	330	15.25	17.52
Tablet	340	15.25	17.52
Tent	335	15.25	17.52
Tent	336	15.25	17.52
Tent	337	15.25	17.52
Tent	338	15.25	17.52
Tent	339	15.25	17.52
Tablet	340	15.25	17.52
Tablet	350	15.25	17.52
Tablet	360	15.25	17.52

The lid is rotating from 360° to 200°. The screen is vertical, LCD direction to 180°.

Device Mode	Angle (°)	Meas. Power (dBm) 2.4GHz Ch6 Aux (1) Ant.	Meas. Power (dBm) 2.4GHz Ch6 Main (2) Ant.
Tablet	360	15.25	17.52
Tablet	350	15.25	17.52
Tablet	340	15.25	17.52
Tent	330	15.25	17.52
Tent	335	15.25	17.52
Tablet	340	15.25	17.52
Tent	339	15.25	17.52
Tent	338	15.25	17.52
Tent	337	15.25	17.52
Tent	336	15.25	17.52
Tent	335	15.25	17.52
Tent	330	15.25	17.52
Tent	320	15.25	17.52
Tent	310	15.25	17.52
Tent	300	15.25	17.52
Tent	290	15.25	17.52
Tent	280	15.25	17.52
Tent	270	15.25	17.52
Tent	260	15.25	17.52
Tent	250	15.25	17.52
Tent	240	15.25	17.52
Tent	230	15.25	17.52
Tent	220	15.25	17.52
Tent	210	15.25	17.52
Tent	200	15.25	17.52

B.1.3 LCD direction 90° or 170

The lid is rotating from 0° to 360°. The screen is vertical, LCD direction to 90° or 170°.

Device Mode	Angle (°)	Meas. Power (dBm) 2.4GHz Channel 6 Aux (1) Ant.	Meas. Power (dBm) 2.4GHz Channel 6 Main (2) Ant.
Lid close	0	Standby	Standby
Lid close	10	Standby	Standby
Lid close	20	Standby	Standby
Book	30	15.25	17.52
Lid close	25	Standby	Standby
Lid close	26	Standby	Standby
Lid close	27	Standby	Standby
Lid close	28	Standby	Standby
Lid close	29	Standby	Standby
Book	30	15.25	17.52
Book	31	15.25	17.52
Book	32	15.25	17.52
Book	33	15.25	17.52
Book	34	15.25	17.52
Book	35	15.25	17.52
Book	40	15.25	17.52
Book	50	15.25	17.52
Book	60	15.25	17.52
Book	70	15.25	17.52
Book	80	15.25	17.52
Book	90	15.25	17.52
Book	100	15.25	17.52
Book	110	15.25	17.52
Book	120	15.25	17.52
Book	130	15.25	17.52
Book	140	15.25	17.52
Book	150	15.25	17.52
Book	160	15.25	17.52
Book	170	15.25	17.52
Book	180	15.25	17.52
Book	190	15.25	17.52
Book	200	15.25	17.52
Book	210	15.25	17.52
Book	220	15.25	17.52
Book	230	15.25	17.52
Book	240	15.25	17.52
Book	250	15.25	17.52
Book	260	15.25	17.52
Book	270	15.25	17.52
Book	280	15.25	17.52
Book	290	15.25	17.52
Book	300	15.25	17.52
Book	310	15.25	17.52
Book	320	15.25	17.52
Book	330	15.25	17.52
Tablet	340	15.25	17.52
Tablet	350	15.25	17.52
Tablet	360	15.25	17.52

The lid is rotating from 360° to 0°. The screen is vertical, LCD direction to 90° or 170°.

Device Mode	Angle (°)	Meas. Power (dBm) 2.4GHz Channel 6 Aux (1) Ant.	Meas. Power (dBm) 2.4GHz Channel 6 Main (2) Ant.
Tablet	360	15.25	17.52
Tablet	350	15.25	17.52
Tablet	340	15.25	17.52
Book	330	15.25	17.52
Book	320	15.25	17.52
Book	310	15.25	17.52
Book	300	15.25	17.52
Book	290	15.25	17.52
Book	280	15.25	17.52
Book	270	15.25	17.52
Book	260	15.25	17.52
Book	250	15.25	17.52
Book	240	15.25	17.52
Book	230	15.25	17.52
Book	220	15.25	17.52
Book	210	15.25	17.52
Book	200	15.25	17.52
Book	190	15.25	17.52
Book	180	15.25	17.52
Book	170	15.25	17.52
Book	160	15.25	17.52
Book	150	15.25	17.52
Book	140	15.25	17.52
Book	130	15.25	17.52
Book	120	15.25	17.52
Book	110	15.25	17.52
Book	100	15.25	17.52
Book	90	15.25	17.52
Book	80	15.25	17.52
Book	70	15.25	17.52
Book	60	15.25	17.52
Book	50	15.25	17.52
Book	40	15.25	17.52
Lid close	30	Standby	Standby
Book	35	15.25	17.52
Book	40	15.25	17.52
Book	39	15.25	17.52
Book	38	15.25	17.52
Book	37	15.25	17.52
Book	36	15.25	17.52
Book	35	15.25	17.52
Lid close	34	Standby	Standby
Lid close	32	Standby	Standby
Lid close	31	Standby	Standby
Lid close	30	Standby	Standby
Lid close	29	Standby	Standby
Lid close	20	Standby	Standby
Lid close	10	Standby	Standby
Lid close	0	Standby	Standby

B.2 Trigger lid angle detection and power verification 5GHz

B.2.1 LCD direction 0°

The lid is rotating from 0° to 360°. The screen is vertical, LCD direction is 0°

Device Mode	Angle (°)	Meas. Power (dBm) 5GHz Ch120 Aux (1) Ant.	Meas. Power (dBm) 5GHz Ch120 Main (2) Ant.
Lid close	0	Standby	Standby
Lid close	10	Standby	Standby
Lid close	20	Standby	Standby
Notebook	30	19.81	19.22
Lid close	25	Standby	Standby
Lid close	26	Standby	Standby
Lid close	27	Standby	Standby
Lid close	28	Standby	Standby
Lid close	29	Standby	Standby
Notebook	30	19.81	19.22
Notebook	40	19.81	19.22
Notebook	50	19.81	19.22
Notebook	60	19.81	19.22
Notebook	70	19.81	19.22
Notebook	80	19.81	19.22
Notebook	90	19.81	19.22
Notebook	100	19.81	19.22
Notebook	110	19.81	19.22
Notebook	120	19.81	19.22
Notebook	130	19.81	19.22
Tablet	140	11.30	11.14
Notebook	135	19.81	19.22
Tablet	130	11.30	11.14
Tablet	131	11.30	11.14
Tablet	132	11.30	11.14
Tablet	133	11.30	11.14
Tablet	134	11.30	11.14
Tablet	135	11.30	11.14
Tablet	140	11.30	11.14
Tablet	150	11.30	11.14
Tablet	160	11.30	11.14
Tablet	180	11.30	11.14
Tablet	190	11.30	11.14
Stand	200	19.81	19.22

Device Mode	Angle (°)	Meas. Power (dBm) 5GHz Ch120 Aux (1) Ant.	Meas. Power (dBm) 5GHz Ch120 Main (2) Ant.
Tablet	195	11.30	11.14
Tablet	196	11.30	11.14
Tablet	197	11.30	11.14
Tablet	198	11.30	11.14
Tablet	199	11.30	11.14
Stand	200	19.81	19.22
Stand	210	19.81	19.22
Stand	211	19.81	19.22
Stand	220	19.81	19.22
Stand	230	19.81	19.22
Stand	240	19.81	19.22
Stand	250	19.81	19.22
Stand	260	19.81	19.22
Stand	270	19.81	19.22
Stand	280	19.81	19.22
Stand	290	19.81	19.22
Stand	300	19.81	19.22
Stand	310	19.81	19.22
Stand	320	19.81	19.22
Stand	330	19.81	19.22
Tablet	340	11.30	11.14
Stand	335	19.81	19.22
Stand	336	19.81	19.22
Stand	337	19.81	19.22
Stand	338	19.81	19.22
Stand	339	19.81	19.22
Tablet	340	11.30	11.14
Tablet	350	11.30	11.14
Tablet	360	11.30	11.14

The lid is rotating from 360° to 0°. The screen is vertical, LCD direction to 0°.

Device Mode	Angle (°)	Meas. Power (dBm) 5GHz Ch120 Aux (1) Ant.	Meas. Power (dBm) 5GHz Ch120 Main (2) Ant.
Tablet	360	11.30	11.14
Tablet	350	11.30	11.14
Tablet	340	11.30	11.14
Stand	330	19.81	19.22
Stand	335	19.81	19.22
Tablet	340	11.30	11.14
Stand	339	19.81	19.22
Stand	338	19.81	19.22
Stand	337	19.81	19.22
Stand	336	19.81	19.22
Stand	335	19.81	19.22
Stand	330	19.81	19.22
Stand	320	19.81	19.22
Stand	310	19.81	19.22
Stand	300	19.81	19.22
Stand	290	19.81	19.22
Stand	280	19.81	19.22
Stand	270	19.81	19.22
Stand	260	19.81	19.22
Stand	250	19.81	19.22
Stand	240	19.81	19.22
Stand	230	19.81	19.22
Stand	220	19.81	19.22
Stand	210	19.81	19.22
Stand	200	19.81	19.22
Tablet	190	11.30	11.14
Tablet	195	11.30	11.14
Stand	200	19.81	19.22
Tablet	199	11.30	11.14
Tablet	198	11.30	11.14
Tablet	197	11.30	11.14
Tablet	196	11.30	11.14
Tablet	195	11.30	11.14
Tablet	190	11.30	11.14

Device Mode	Angle (°)	Meas. Power (dBm) 5GHz Ch120 Aux (1) Ant.	Meas. Power (dBm) 5GHz Ch120 Main (2) Ant.
Tablet	180	11.30	11.14
Tablet	170	11.30	11.14
Tablet	160	11.30	11.14
Tablet	150	11.30	11.14
Tablet	140	11.30	11.14
Tablet	130	11.30	11.14
Notebook	120	19.81	19.22
Notebook	125	19.81	19.22
Tablet	130	11.30	11.14
Notebook	129	19.81	19.22
Notebook	128	19.81	19.22
Notebook	127	19.81	19.22
Notebook	126	19.81	19.22
Notebook	125	19.81	19.22
Notebook	120	19.81	19.22
Notebook	110	19.81	19.22
Notebook	100	19.81	19.22
Notebook	90	19.81	19.22
Notebook	80	19.81	19.22
Notebook	70	19.81	19.22
Notebook	60	19.81	19.22
Notebook	50	19.81	19.22
Notebook	40	19.81	19.22
Notebook	30	19.81	19.22
Lid close	20	Standby	Standby
Lid close	25	Standby	Standby
Notebook	30	19.81	19.22
Lid close	29	Standby	Standby
Lid close	28	Standby	Standby
Lid close	27	Standby	Standby
Lid close	26	Standby	Standby
Lid close	25	Standby	Standby
Lid close	20	Standby	Standby
Lid close	10	Standby	Standby
Lid close	0	Standby	Standby

B.2.2 LCD direction 180°

The lid is rotating from 200° to 360°. The screen is vertical, LCD direction to 180°.

Device Mode	Angle (°)	Meas. Power (dBm) 5GHz Ch120 Aux (1) Ant.	Meas. Power (dBm) 5GHz Ch120 Main (2) Ant.
Tent	200	11.30	11.14
Tent	210	11.30	11.14
Tent	220	11.30	11.14
Tent	230	11.30	11.14
Tent	240	11.30	11.14
Tent	250	11.30	11.14
Tent	260	11.30	11.14
Tent	270	11.30	11.14
Tent	280	11.30	11.14
Tent	290	11.30	11.14
Tent	300	11.30	11.14
Tent	310	11.30	11.14
Tent	320	11.30	11.14
Tent	330	11.30	11.14
Tablet	340	11.30	11.14
Tent	335	11.30	11.14
Tent	336	11.30	11.14
Tent	337	11.30	11.14
Tent	338	11.30	11.14
Tent	339	11.30	11.14
Tablet	340	11.30	11.14
Tablet	350	11.30	11.14
Tablet	360	11.30	11.14

The lid is rotating from 360° to 200°. The screen is vertical, LCD direction to 180°.

Device Mode	Angle (°)	Meas. Power (dBm) 5GHz Ch120 Aux (1) Ant.	Meas. Power (dBm) 5GHz Ch120 Main (2) Ant.
Tablet	360	11.30	11.14
Tablet	350	11.30	11.14
Tablet	340	11.30	11.14
Tent	330	11.30	11.14
Tent	335	11.30	11.14
Tablet	340	11.30	11.14
Tent	339	11.30	11.14
Tent	338	11.30	11.14
Tent	337	11.30	11.14
Tent	336	11.30	11.14
Tent	335	11.30	11.14
Tent	330	11.30	11.14
Tent	320	11.30	11.14
Tent	310	11.30	11.14
Tent	300	11.30	11.14
Tent	290	11.30	11.14
Tent	280	11.30	11.14
Tent	270	11.30	11.14
Tent	260	11.30	11.14
Tent	250	11.30	11.14
Tent	240	11.30	11.14
Tent	230	11.30	11.14
Tent	220	11.30	11.14
Tent	210	11.30	11.14
Tent	200	11.30	11.14

B.2.3 LCD direction 90° or 170

The lid is rotating from 0° to 360°. The screen is vertical, LCD direction to 90° or 270°.

Device Mode	Angle (°)	Meas. Power (dBm) 5GHz Ch120 Aux (1) Ant.	Meas. Power (dBm) 5GHz Ch120 Main (2) Ant.
Lid close	0	Standby	Standby
Lid close	10	Standby	Standby
Lid close	20	Standby	Standby
Book	30	Standby	Standby
Lid close	25	11.30	11.14
Lid close	26	11.30	11.14
Lid close	27	Standby	Standby
Lid close	28	Standby	Standby
Lid close	29	Standby	Standby
Book	30	Standby	Standby
Book	31	Standby	Standby
Book	32	11.30	11.14
Book	33	11.30	11.14
Book	34	11.30	11.14
Book	35	11.30	11.14
Book	40	11.30	11.14
Book	50	11.30	11.14
Book	60	11.30	11.14
Book	70	11.30	11.14
Book	80	11.30	11.14
Book	90	11.30	11.14
Book	100	11.30	11.14
Book	110	11.30	11.14
Book	120	11.30	11.14
Book	130	11.30	11.14
Book	140	11.30	11.14
Book	150	11.30	11.14
Book	160	11.30	11.14
Book	170	11.30	11.14
Book	180	11.30	11.14
Book	190	11.30	11.14
Book	200	11.30	11.14
Book	210	11.30	11.14
Book	220	11.30	11.14
Book	230	11.30	11.14
Book	240	11.30	11.14
Book	250	11.30	11.14
Book	260	11.30	11.14
Book	270	11.30	11.14
Book	280	11.30	11.14
Book	290	11.30	11.14
Book	300	11.30	11.14
Book	310	11.30	11.14
Book	320	11.30	11.14
Book	330	11.30	11.14
Tablet	340	11.30	11.14
Tablet	350	11.30	11.14
Tablet	360	11.30	11.14

The lid is rotating from 360° to 0°. The screen is vertical, LCD direction to 90° or 270°.

Device Mode	Angle (°)	Meas. Power (dBm) 5GHz Ch120 Aux (1) Ant.	Meas. Power (dBm) 5GHz Ch120 Main (2) Ant.
Tablet	360	11.30	11.14
Tablet	350	11.30	11.14
Tablet	340	11.30	11.14
Book	330	11.30	11.14
Book	320	11.30	11.14
Book	310	11.30	11.14
Book	300	11.30	11.14
Book	290	11.30	11.14
Book	280	11.30	11.14
Book	270	11.30	11.14
Book	260	11.30	11.14
Book	250	11.30	11.14
Book	240	11.30	11.14
Book	230	11.30	11.14
Book	220	11.30	11.14
Book	210	11.30	11.14
Book	200	11.30	11.14
Book	190	11.30	11.14
Book	180	11.30	11.14
Book	170	11.30	11.14
Book	160	11.30	11.14
Book	150	11.30	11.14
Book	140	11.30	11.14
Book	130	11.30	11.14
Book	120	11.30	11.14
Book	110	11.30	11.14
Book	100	11.30	11.14
Book	90	11.30	11.14
Book	80	11.30	11.14
Book	70	11.30	11.14
Book	60	11.30	11.14
Book	50	11.30	11.14
Book	40	11.30	11.14
Lid close	30	Standby	Standby
Book	35	11.30	11.14
Book	40	11.30	11.14
Book	39	11.30	11.14
Book	38	11.30	11.14
Book	37	11.30	11.14
Book	36	11.30	11.14
Book	35	11.30	11.14
Lid close	34	Standby	Standby
Lid close	32	Standby	Standby
Lid close	31	Standby	Standby
Lid close	30	Standby	Standby
Lid close	29	Standby	Standby
Lid close	20	Standby	Standby
Lid close	10	Standby	Standby
Lid close	0	Standby	Standby

End of the report

This page is left intentionally blank and marks the last page of the test report.