



Test report No: 2560545R-0E3012110014-A

FCC TEST REPORT

Compliance with Canada Interference-Causing Equipment Standard ICES-003

Product Name	Intel® BE211D2W
Trademark	Intel
Model and /or type reference	BE211D2W
Applicant's name / address	INTEL CORPORATION SAS / 425 rue de Goa - Le Cargo B6 - 06600, Antibes, France
Manufacturer's name / address	INTEL CORPORATION SAS / 425 rue de Goa - Le Cargo B6 - 06600, Antibes, France
Test method requested, standard	FCC CFR Title 47 Part 15 Subpart B:2023, Class B ICES-003 Issue 7:2020, Class B
Verdict Summary	IN COMPLIANCE
Documented By (Adm. Specialist / Peggy Tu)	Peggy Tu
Approved By (Director / Vincent Lin)	
Date of Report	2025/06/18
Date of Issue	2025/07/09
Report No.	2560545R-0E3012110014-A
Report Version	V1.0

INDEX

Description	Page
1. General Information.....	5
1.1. EUT Description	5
1.2. Mode of Operation.....	6
1.3. Configuration & Details of Tested System	7
1.4. EUT Exercise Software	8
2. Technical Test.....	9
2.1. Summary of Test Result	9
2.2. List of Test Equipment	10
2.3. Measurement Uncertainty	11
2.4. Test Environment.....	12
3. Conducted Emission	13
3.1. Test Specification	13
3.2. Test Setup	13
3.3. Limit.....	13
3.4. Test Procedure	14
3.5. Test Result.....	15
3.6. Test Photograph	17
4. Radiated Emission	18
4.1. Test Specification	18
4.2. Test Setup	18
4.3. Limit.....	19
4.4. Test Procedure	21
4.5. Test Result.....	23
4.6. Test Photograph	31

Product Photos: Please refer to the file: 2560545R-Product Photos

Competences and Guarantees

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

General conditions

1. The test results relate only to the samples tested.
2. The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.
3. This report must not be used to claim product endorsement by TAF or any agency of the government.
4. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.
5. Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Revision History

Report No.	Version	Description	Issued Date
2560545R-0E3012110014-A	V1.0	Initial issue of report.	2025-07-09

1. General Information

1.1. EUT Description


Product Name	Intel® BE211D2W
Trademark	Intel
Model No.	BE211D2W
EUT Max Frequency	7125MHz
EUT Rated Voltage	DC 3.3V
EUT Test Voltage	AC 120V / 60Hz

1.2. Mode of Operation

DEKRA has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Pre-Test Mode	
Mode 1: BE211D2W, Normal Operation(Wi-Fi)	
Final Test Mode	
Emission	Mode 1

1.3. Configuration & Details of Tested System

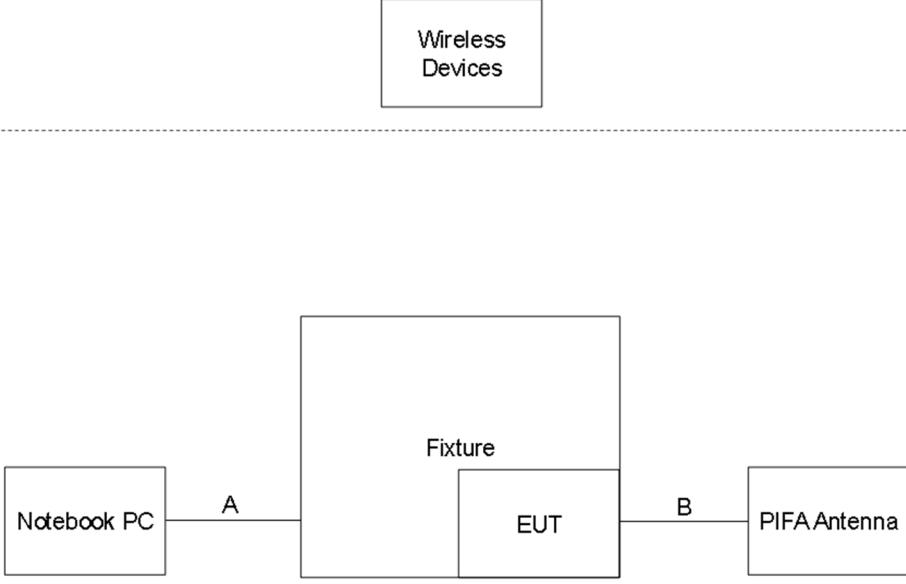Connection Diagram				
Remote				
Tested System Details				
Product	Manufacturer	Model No.	No.	Cable Type & Description
Notebook PC	DELL	5530	A	USB, shielded 1m
PIFA Antenna	WRF	WRF-Tri	B	IPEX *2, shielded 0.3m
Fixture	Intel	PCB00866-00_A		
Wireless Devices Inf.				
Product	Manufacturer	Model No.		
Wireless Router	ASUS	ROG RAPTURE GT-AXE11000		
Mobile Phone	Realme	Narzo 50i		

Note:

- Use Full system setup configuration determines Worst-Case Mode.
- Use 2dB law program determines Max. Cable Configuration and Worst-Case Mode.
- Radiated emission item test: Performed using the Horn Antenna 3dB Beamwidth to 3m from the EUT size sufficient to cover the procedure.
- Radiated emission item test: Performed using the Horn Antenna 3dB Beamwidth non 3m distance sufficient to cover the size of the EUT program.

1.4. EUT Exercise Software

1	Setup the EUT and simulators as shown on 1.3.
2	Turn on the power of all equipment.
3	All the features of the EUT operation normally.

2. Technical Test

2.1. Summary of Test Result

No deviations from the test standards
 Deviations from the test standards as below description:

Emission				
Performed Item	Normative References	Test Performed	Test Site	Verdict
Conducted Emission (Class B)	FCC CFR Title 47 Part 15 Subpart B: 2023 ICES-003 Issue 7: 2020	Yes	HY-SR09	Pass
Radiated Emission (Class B)	FCC CFR Title 47 Part 15 Subpart B: 2023 ICES-003 Issue 7: 2020	Yes	HY-CB05	Pass

Note:

1. Test Site information refers to test Laboratory Information.
2. The test facility, measurement instrumentation and measurement methods used for verifying the compliance of ITE or digital apparatus with FCC CFR Title 47 Part 15 Subpart B shall comply either with the requirements in ANSI C63.4, ICES-003 shall comply either with the requirements in CAN/CSA-CISPR 32:17 or with those in ANSI C63.4.

Test Laboratory:	DEKRA Testing and Certification Co., Ltd. Linkou Laboratory
Address:	No. 85, Wenlin St., Linkou Dist., New Taipei City, 244017, Taiwan, R.O.C
Phone number:	+886 2-77532700
Fax number:	+886 2-26026881
Test Site	
FS: No.6, Lane 75, Wenlin St., Linkou Dist., New Taipei City, 244017, Taiwan, R.O.C No. 85, Wenlin St., Linkou Dist., New Taipei City, 244017, Taiwan, R.O.C	
HY: No.26, Huaya 1 st Rd., Guishan Dist., Taoyuan City 333411, Taiwan, R.O.C	

2.2. List of Test Equipment

Conducted Emission / HY-SR09

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Due Date
EMI TEST RECEIVER	R&S	ESR3	102917	2024/11/25	2025/11/24
Two-Line V-Network	R&S	ENV216	101493	2023/12/1	2025/11/30
Two-Line V-Network	R&S	ENV216	101492	2023/12/12	2025/12/11
Impedance Stabilization Network	TESEQ	ISN T800	61676	2024/6/5	2026/6/4
Impedance Stabilization Network	TESEQ	ISN T8-Cat6	61286	2024/6/18	2026/6/17
Impedance Stabilization Network	TESEQ	ISN ST08	61833	2024/6/19	2026/6/18
Coaxial Cable	SUHNER	RG 400	HC001-RG	2025/5/30	2026/5/29
Note : ISN T800 for LAN 10Mbps to 1Gbps, T8-Cat6 for LAN above 1Gbps, ST08 for Shielded LAN					
Test Software version : e3 V9					

Note: Test Receiver Detector: Quasipeak and Average Bandwidth: 9kHz

Radiated Emission (Below 1GHz) / HY-CB05

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Due Date
Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	1398	2024/6/19	2026/6/18
Receiver	R&S	ESR7	101602	2025/4/14	2026/4/13
Coaxial Cable	ROSNOL	R-Test EW0630	HC003R	2025/6/17	2026/6/16
Coaxial Cable	VEGINEAN	VCA-VA500	HQ003C	2025/6/17	2026/6/16
Preamplifier	Jet-Power	JPA-10M1G33	170101000330008	2025/5/20	2026/5/19
NSA	DEKRA	N/A	N/A	2024/8/23	2025/8/22
Test Software version : e3 V9					

Note: Test Receiver Detector: Quasipeak Bandwidth: 120kHz

Radiated Emission (Above 1GHz) / HY-CB05

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Due Date
Double Ridged Guide Horn Antenna	RF SPIN	DRH18-E	210504A18ES	2024/4/25	2026/4/24
Horn Antenna	COM-POWER	AH-840	10090015	2023/9/23	2025/9/22
Receiver	R&S	ESR7	101602	2025/4/14	2026/4/13
Signal Analyzer	R&S	FSV3044	101245	2024/4/15	2026/4/14
Coaxial Cable	ROSNOL	R-Test EW0630	HC002R	2025/6/17	2026/6/16
Coaxial Cable	ROSNOL	R-Test EW0630	HC003R	2025/6/17	2026/6/16
Coaxial Cable	VEGINEAN	VCA-VA500	HQ003C	2025/6/17	2026/6/16
Preamplifier	SGH	SGH118-HS	20220411-2	2025/4/22	2026/4/21
Microwave Preamplifier with cable	SGH	SGH184	20220411-3	2025/4/22	2026/4/21
VSWR	DEKRA	N/A	N/A	2024/8/22	2025/8/21
Test Software version : e3 V9					

2.3. Measurement Uncertainty

Test Items	Uncertainty
Conducted Emission	± 2.40 dB
Radiated Emission (Below 1GHz)	± 5.60 dB
Radiated Emission (Above 1GHz)	± 4.40 dB

2.4. Test Environment


Performed Item	Items	Required
Conducted Emission	Temperature (°C)	10-40
	Humidity (%RH)	10-90
Radiated Emission	Temperature (°C)	10-40
	Humidity (%RH)	10-90

3. Conducted Emission

3.1. Test Specification

According to Standard : FCC Part 15 Subpart B, ICES-003 Issue 7

3.2. Test Setup

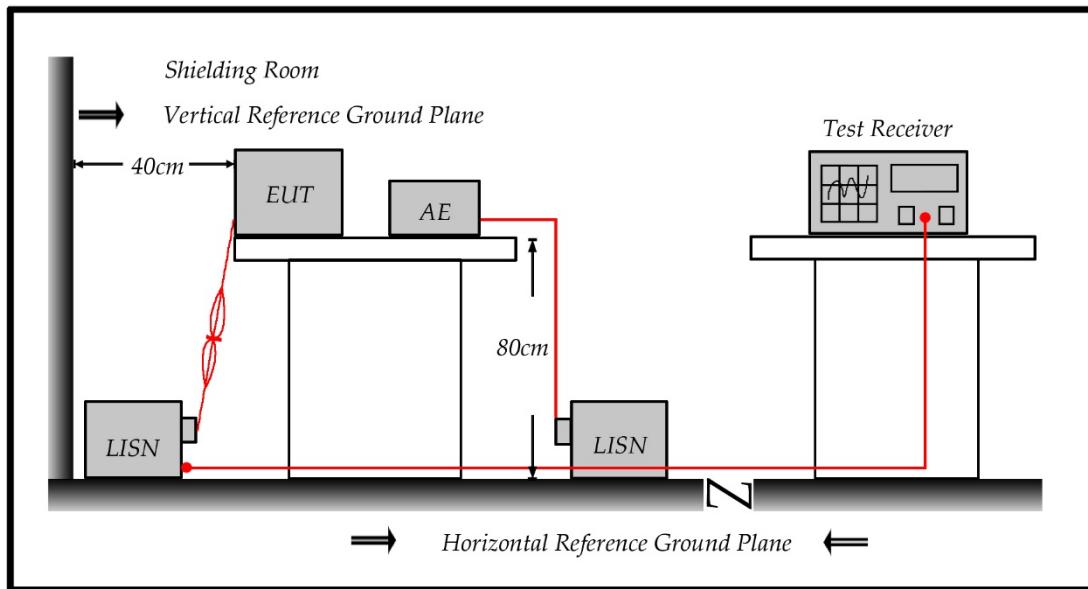

3.3. Limit

Conducted emissions limits (AC mains power terminals)				
Frequency range (MHz)	Class A Quasi-peak (dB μ V)	Class A Average (dB μ V)	Class B Quasi-peak (dB μ V)	Class B Average (dB μ V)
0.15 – 0.5	79	66	66 to 56	56 to 46
0.5 – 5	73	60	56	46
5 – 30	73	60	60	50

Note:

1. The more stringent limit applies at transition frequencies.
2. The limit level in dB μ V decreases linearly with the logarithm of frequency

3.4. Test Procedure


The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

3.5. Test Result

Model No	BE211D2W	Site	HY-SR09
Test Voltage	AC 120V/60Hz	Test Date	2025-06-27
Test Mode	Mode 1	Engineer	Monica Wu
Phase	Line	Temperature (°C)	26
Test Condition	--	Humidity (%RH)	48

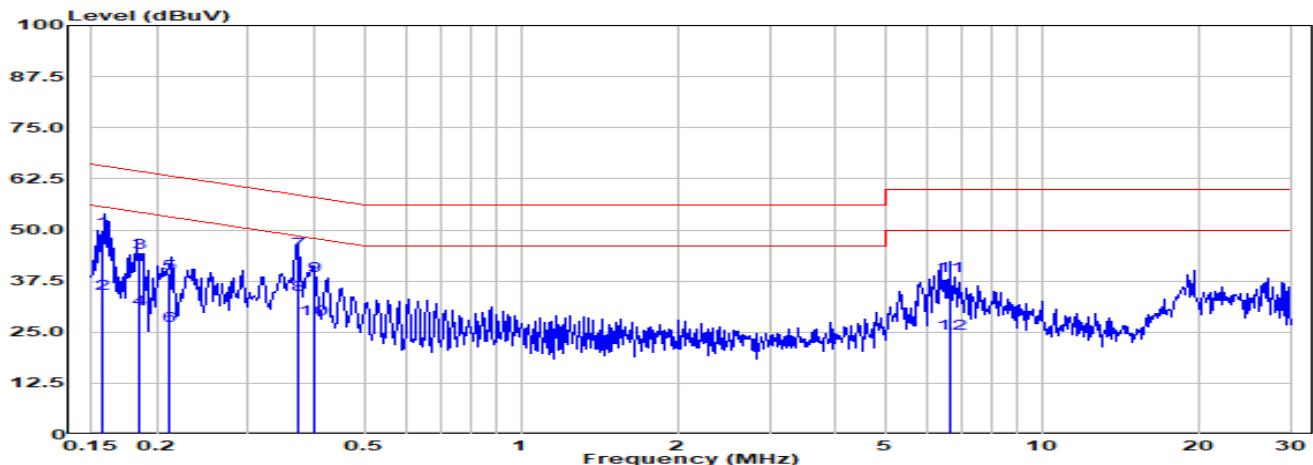


No	Frequency (MHz)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	0.158	49.85	65.57	-15.72	40.25	9.60	QP
2	0.158	34.39	55.57	-21.18	24.79	9.60	Average
3	0.184	44.41	64.29	-19.89	34.80	9.61	QP
4	0.184	30.73	54.29	-23.56	21.12	9.61	Average
5	0.212	39.38	63.14	-23.76	29.77	9.61	QP
6	0.212	26.58	53.14	-26.57	16.97	9.61	Average
7	0.373	44.81	58.43	-13.61	35.19	9.62	QP
8	0.373	34.03	48.43	-14.39	24.41	9.62	Average
9	0.399	38.87	57.87	-19.00	29.25	9.62	QP
10	0.399	28.12	47.87	-19.75	18.50	9.62	Average
11	6.653	38.64	60.00	-21.36	28.75	9.90	QP
12	6.653	24.65	50.00	-25.35	14.75	9.90	Average

Remark:

- ** means this data is the worst margin; ! means this data is over limit.
- Emission Level=Reading Level + Correct Factor (Correct Factor=LISN Factor+Cable Loss).
- Margin=Emission Level-Limit

Model No	BE211D2W	Site	HY-SR09
Test Voltage	AC 120V/60Hz	Test Date	2025-06-27
Test Mode	Mode 1	Engineer	Monica Wu
Phase	Neutral	Temperature (°C)	26
Test Condition	--	Humidity (%RH)	48

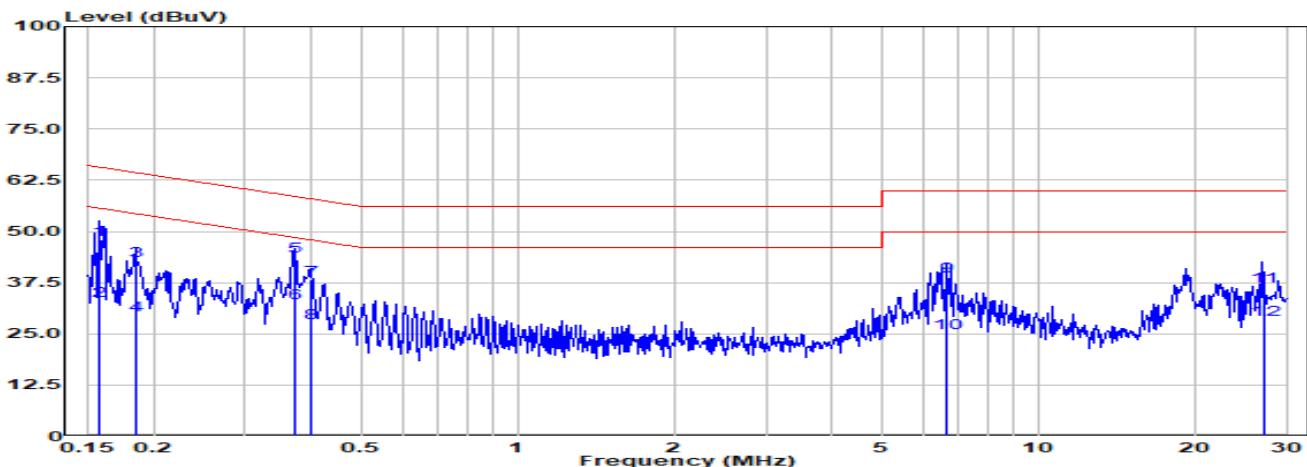

No	Frequency (MHz)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	0.158	47.95	65.58	-17.63	38.31	9.64	QP
2	0.158	33.05	55.58	-22.54	23.41	9.64	Average
3	0.185	42.92	64.24	-21.32	33.27	9.64	QP
4	0.185	29.41	54.24	-24.83	19.76	9.64	Average
5	0.374	43.86	58.42	-14.56	34.20	9.65	QP
6	0.374	32.63	48.42	-15.79	22.98	9.65	Average
7	0.400	38.23	57.85	-19.62	28.57	9.65	QP
8	0.400	27.52	47.85	-20.33	17.86	9.65	Average
9	6.678	39.01	60.00	-20.99	29.06	9.95	QP
10	6.678	25.31	50.00	-24.69	15.35	9.95	Average
11	27.122	36.72	60.00	-23.28	26.20	10.51	QP
12	27.122	28.54	50.00	-21.46	18.03	10.51	Average

Remark:

- ** means this data is the worst margin; ! means this data is over limit.
- Emission Level=Reading Level + Correct Factor (Correct Factor=LISN Factor+Cable Loss).
- Margin=Emission Level-Limit

3.6. Test Photograph


Test Mode : Mode 1

Description : Front View of Conducted Test



Test Mode : Mode 1

Description : Back View of Conducted Test

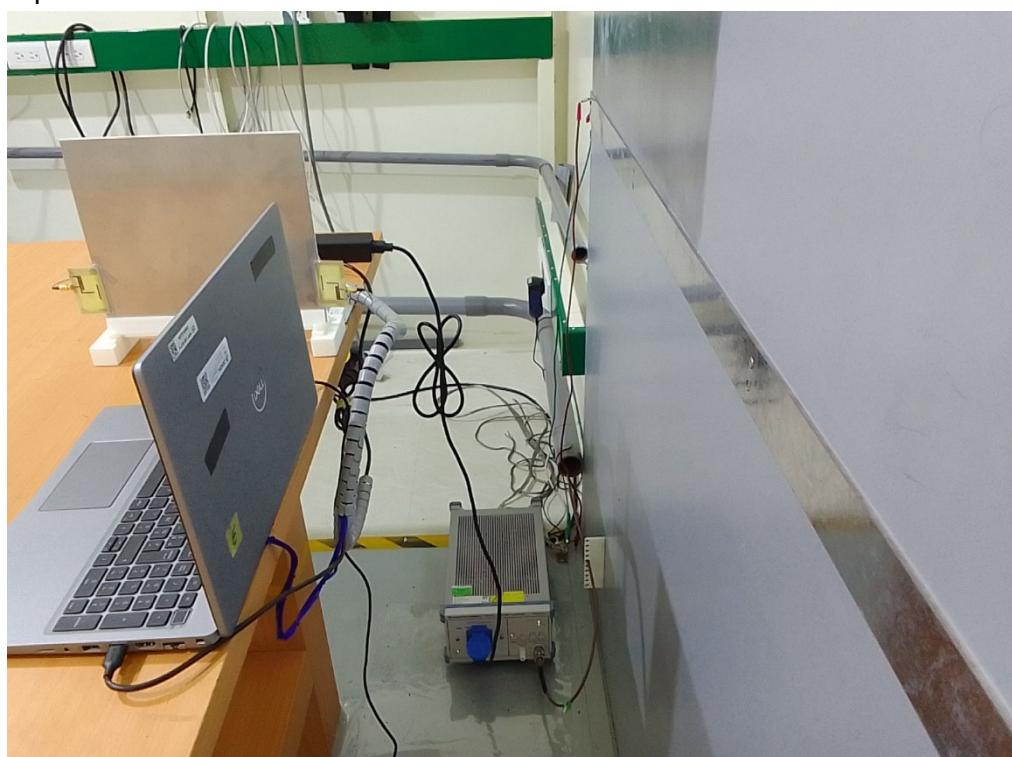


4. Radiated Emission

4.1. Test Specification


According to Standard : FCC Part 15 Subpart B, ICES-003 Issue 7

4.2. Test Setup

Under 1GHz Test Setup:

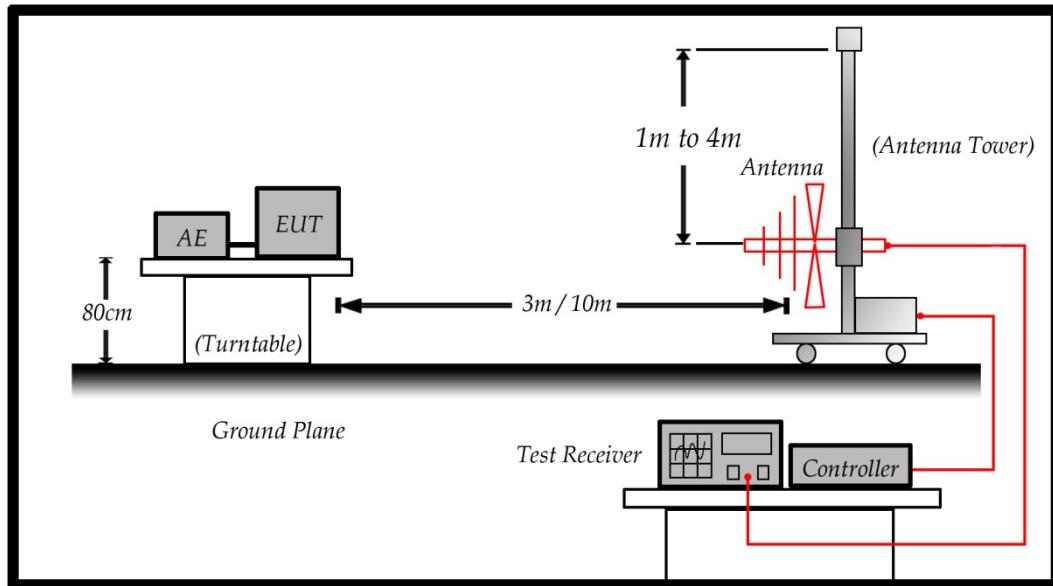

Above 1GHz Test Setup:

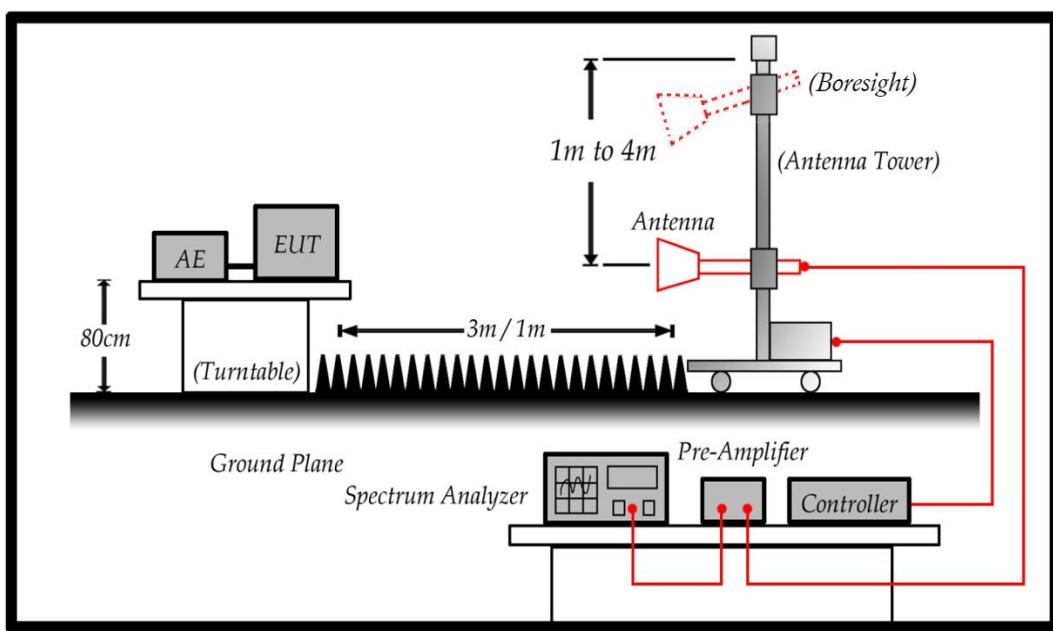

4.3. Limit

Test shall not exceed the following value:

FCC Part 15 Subpart B Paragraph 15.109 Limits (dBuV/m)		
Frequency (MHz)	Distance (m)	dBuV/m
30-88	3	40
88-216	3	43.5
216-960	3	46.0
960-1000	3	54
1000-40000	3	54
18000-40000	1	63.5

Remark:

1. The tighter limit shall apply at the edge between two frequency bands.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
3. RF Voltage (dBuV/m) = $20 \log_{10}$ RF Voltage (uV/m)

ICES-003 Issue 7

Radiated emissions limits (30 MHz to 1 GHz)				
Frequency range (MHz)	Class A (3 m) Quasi-peak (dBuV/m)	Class A (10 m) Quasi-peak (dBuV/m)	Class B (3 m) Quasi-peak (dBuV/m)	Class B (10 m) Quasi-peak (dBuV/m)
30-88	50.0	40.0	40.0	30.0
88-216	54.0	43.5	43.5	33.1
216-230	56.9	46.4	46.0	35.6
230-960	57.0	47.0	47.0	37.0
960-1000	60.0	49.5	54.0	43.5

Note: The more stringent limit applies at transition frequencies.

Required highest measurement frequency for radiated emissions

Highest internal frequency (F_x)	Highest measured frequency
$F_x \leq 108 \text{ MHz}$	1 GHz
$108 \text{ MHz} < F_x \leq 500 \text{ MHz}$	2 GHz
$500 \text{ MHz} < F_x \leq 1 \text{ GHz}$	5 GHz
$F_x > 1 \text{ GHz}$	$5 \times F_x$ up to a maximum of 40 GHz

Note: F_x is the highest fundamental frequency generated and/or used in the ITE or digital apparatus under test.

Radiated emission limits at 3 m distance (at and above 1 GHz)				
Frequency range (GHz)	Class A Average dB(uV/m)	Class A) Peak dB(uV/m)	Class B Average dB(uV/m)	Class B Peak dB(uV/m)
1 - F_M	60	80	54	74

Note:

1. The highest measurement frequency, F_M , in GHz, shall be determined as per table 3.
2. The measurement bandwidth shall be 1 MHz or greater.
3. These limit levels apply for a measurement distance of 3 m. If using a different measurement distance, the measured levels shall be extrapolated to the 3 m limit distance using a factor of 20 dB per decade of distance. The measurement distance shall place the measurement antenna in the far field of the ITE or digital apparatus under test.
4. The test site shall have been validated at the distance used for radiated emission measurements on the ITE or digital apparatus under test.

4.4. Test Procedure

FCC Part 15 Subpart B

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground.

The turn table can rotate 360 degrees to determine the position of the maximum emission level and the antenna (boresight antenna tower) can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated on radiated measurement.

For an unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a radiated emission limit is specified, up to the frequency shown in the following table:

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

On any frequency or frequencies below or equal to 1000 MHz, the radiated limits shown are based on measuring equipment employing a quasi-peak detector function and above 1000MHz, the radiated limits shown are based measuring equipment employing an average detector function.

When average radiated emission measurement are included emission measurement Above 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

For class A, the measurement distance between the EUT and antenna is 10 meters for under 1GHz and above 1GHz.

For class B, the measurement distance between the EUT and antenna is 10 meters for under 1GHz and 3 meters for above 1GHz.

The bandwidth below 1GHz setting on the field strength meter (Test Receiver) is 120 kHz and above 1GHz is 1MHz.

ICES-003 Issue 7

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground.

The turn table can rotate 360 degrees to determine the position of the maximum emission level and the antenna (boresight antenna tower) can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated on radiated measurement.


On any frequency or frequencies below or equal to 1000MHz, the radiated limits shown are based on measuring equipment employing a quasi-peak detector function and above 1000MHz, the radiated limits shown are based measuring equipment employing an peak & average detector function.

The measurement distance between the EUT and antenna is 3 meters or 10 meters for under 1GHz and 3 meters for above 1GHz.

The bandwidth below 1GHz setting on the field strength meter (Test Receiver) is 120 kHz and above 1GHz is 1MHz

4.5. Test Result

Model No	BE211D2W	Site	HY-CB05
Test Voltage	AC 120V/60Hz	Test Date	2025-06-26
Test Mode	Mode 1	Engineer	Monica Wu
Polarity	Horizontal	Temperature (°C)	24
Test Condition	--	Humidity (%RH)	48

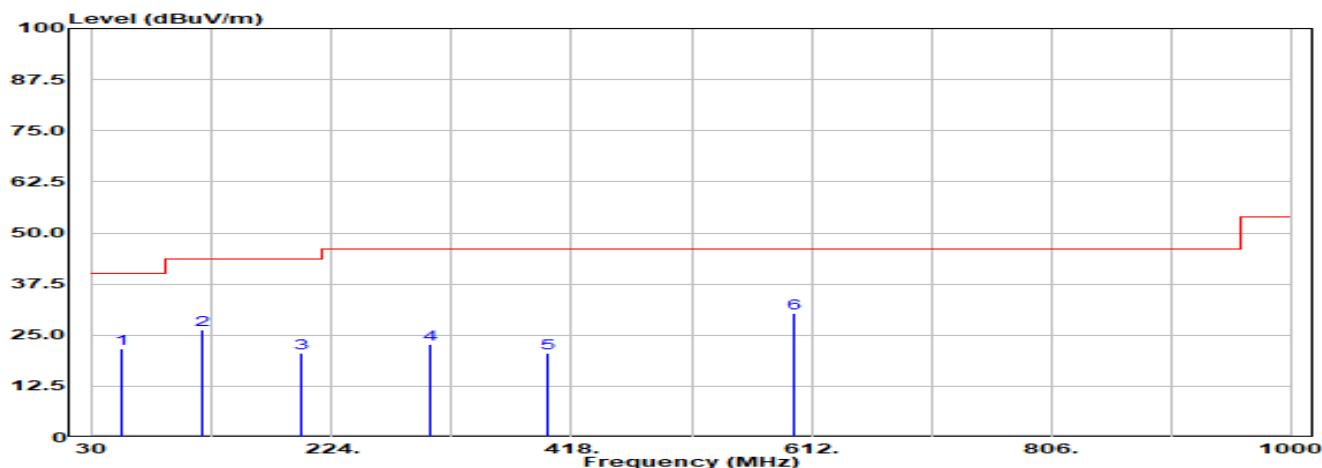


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Ant Pos (cm)	TT Pos (deg)	Detector Type
1	53.280	21.77	40.00	-18.23	33.90	-12.13	100	360	QP
2	119.240	26.35	43.50	-17.15	41.20	-14.85	100	214	QP
3	199.750	20.67	43.50	-22.83	35.90	-15.23	100	0	QP
4	303.540	22.82	46.00	-23.18	34.10	-11.28	100	25	QP
5	398.600	20.61	46.00	-25.39	29.40	-8.79	100	360	QP
6	597.450	30.42	46.00	-15.58	34.30	-3.88	100	210	QP

Remark:

- ** means this data is the worst margin; ! means this data is over limit.
- Emission Level=Reading Level + Correct Factor (Correct Factor=Ant Factor+Cable Loss-Pre Amp).
- Margin=Emission Level - Limit.
- The above 1 GHz test. When PEAK measures level less than AV limit by 20 dBuV, its average is not measured separately.

Model No	BE211D2W	Site	HY-CB05
Test Voltage	AC 120V/60Hz	Test Date	2025-06-26
Test Mode	Mode 1	Engineer	Monica Wu
Polarity	Vertical	Temperature (°C)	24
Test Condition	--	Humidity (%RH)	48

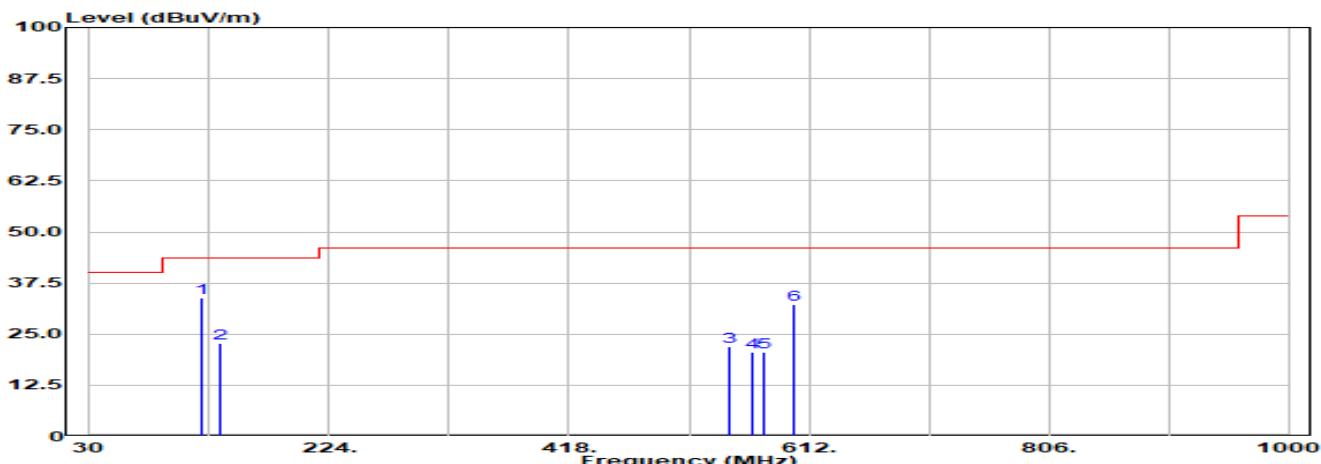


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Ant Pos (cm)	TT Pos (deg)	Detector Type
1	121.180	33.75	43.50	-9.75	48.50	-14.75	100	0	QP
2	134.760	22.88	43.50	-20.62	36.10	-13.22	100	0	QP
3	547.010	21.90	46.00	-24.10	27.30	-5.40	100	50	QP
4	565.440	20.62	46.00	-25.38	25.50	-4.88	100	208	QP
5	576.110	20.58	46.00	-25.42	25.10	-4.52	100	138	QP
6	600.360	32.30	46.00	-13.70	36.10	-3.80	100	307	QP

Remark:

1. *** means this data is the worst margin; ! means this data is over limit.
2. Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+Cable Loss-Pre Amp).
3. Margin=Emission Level - Limit.
4. The above 1 GHz test. When PEAK measures level less than AV limit by 20 dBuV, its average is not measured separately.

Model No	BE211D2W	Site	HY-CB05
Test Voltage	AC 120V/60Hz	Test Date	2025-06-26
Test Mode	Mode 1	Engineer	Monica Wu
Polarity	Horizontal	Temperature (°C)	24
Test Condition	--	Humidity (%RH)	48

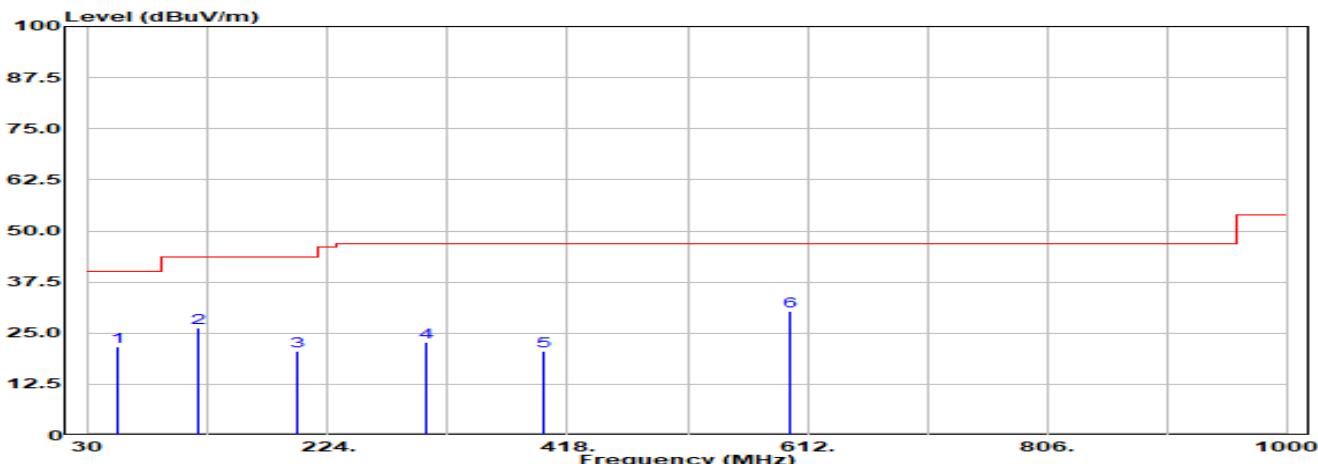


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Ant Pos (cm)	TT Pos (deg)	Detector Type
1	53.280	21.77	40.00	-18.23	33.90	-12.13	100	360	QP
2	119.240	26.35	43.50	-17.15	41.20	-14.85	100	214	QP
3	199.750	20.67	43.50	-22.83	35.90	-15.23	100	0	QP
4	303.540	22.82	47.00	-24.18	34.10	-11.28	100	25	QP
5	398.600	20.61	47.00	-26.39	29.40	-8.79	100	360	QP
6	597.450	30.42	47.00	-16.58	34.30	-3.88	100	210	QP

Remark:

- *** means this data is the worst margin; ! means this data is over limit.
- Emission Level=Reading Level + Correct Factor (Correct Factor=Ant Factor+Cable Loss-Pre Amp).
- Margin=Emission Level - Limit.
- The above 1 GHz test. When PEAK measures level less than AV limit by 20 dBuV, its average is not measured separately.

Model No	BE211D2W	Site	HY-CB05
Test Voltage	AC 120V/60Hz	Test Date	2025-06-26
Test Mode	Mode 1	Engineer	Monica Wu
Polarity	Vertical	Temperature (°C)	24
Test Condition	--	Humidity (%RH)	48

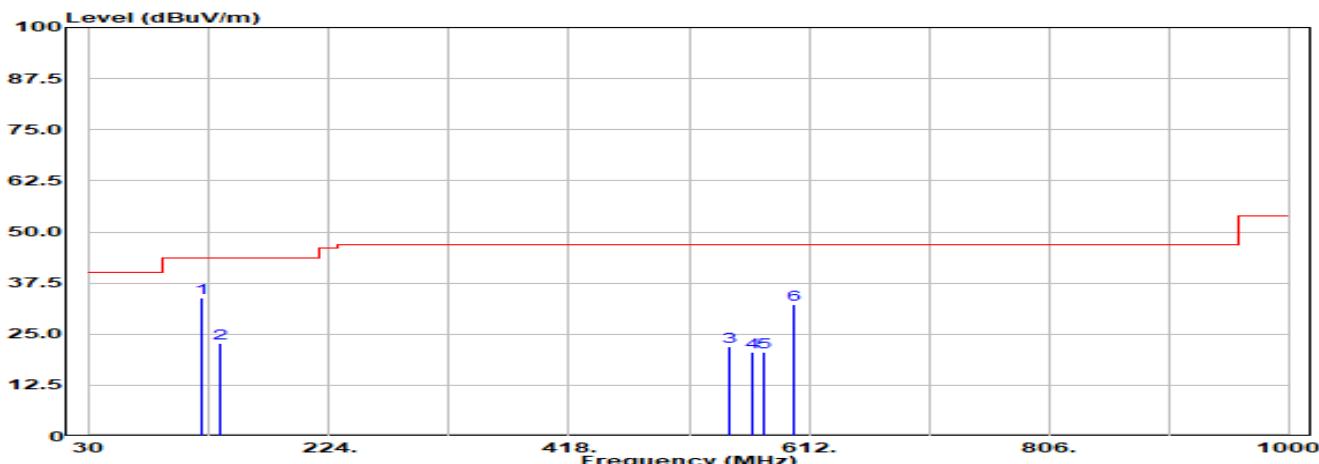


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Ant Pos (cm)	TT Pos (deg)	Detector Type
1	121.180	33.75	43.50	-9.75	48.50	-14.75	100	0	QP
2	134.760	22.88	43.50	-20.62	36.10	-13.22	100	0	QP
3	547.010	21.90	47.00	-25.10	27.30	-5.40	100	50	QP
4	565.440	20.62	47.00	-26.38	25.50	-4.88	100	208	QP
5	576.110	20.58	47.00	-26.42	25.10	-4.52	100	138	QP
6	600.360	32.30	47.00	-14.70	36.10	-3.80	100	307	QP

Remark:

- *** means this data is the worst margin;!" means this data is over limit.
- Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+Cable Loss-Pre Amp).
- Margin=Emission Level - Limit.
- The above 1 GHz test. When PEAK measures level less than AV limit by 20 dBuV, its average is not measured separately.

Model No	BE211D2W	Site	HY-CB05
Test Voltage	AC 120V/60Hz	Test Date	2025-06-26
Test Mode	Mode 1	Engineer	Monica Wu
Polarity	Horizontal	Temperature (°C)	24
Test Condition	--	Humidity (%RH)	48

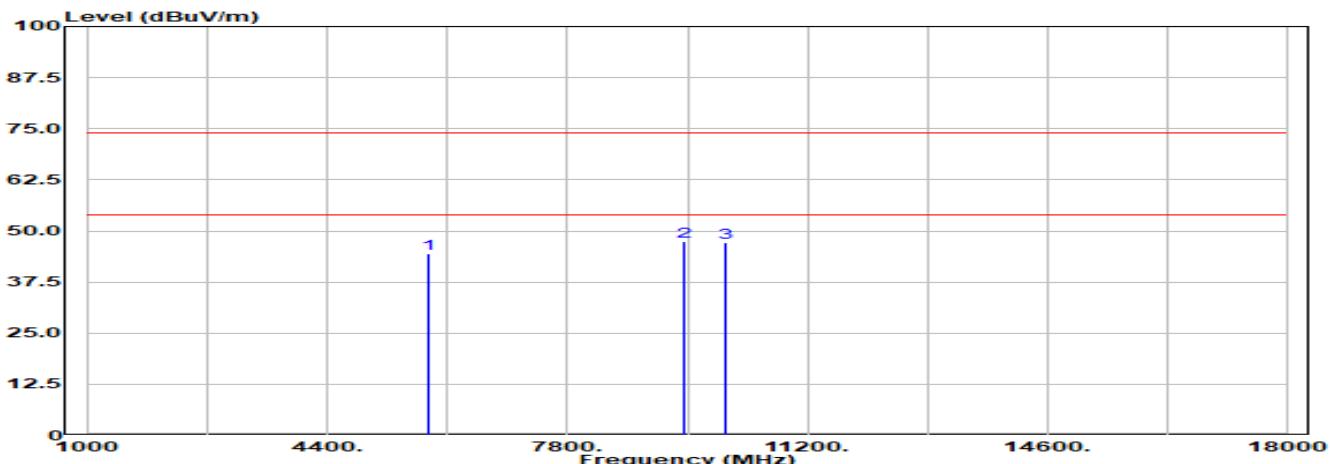


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Ant Pos (cm)	TT Pos (deg)	Detector Type
1	5836.500	44.37	74.00	-29.63	44.15	0.22	100	131	Peak
2	9457.500	47.31	74.00	-26.69	41.20	6.11	100	346	Peak
3	10044.000	47.23	74.00	-26.77	39.79	7.43	100	80	Peak

Remark:

- ** means this data is the worst margin; ! means this data is over limit.
- Emission Level=Reading Level + Correct Factor (Correct Factor=Ant Factor+Cable Loss+Pre Amp).
- Margin=Emission Level - Limit.
- The above 1 GHz test. When PEAK measures level less than AV limit by 20 dBuV, its average is not measured separately.

Model No	BE211D2W	Site	HY-CB05
Test Voltage	AC 120V/60Hz	Test Date	2025-06-26
Test Mode	Mode 1	Engineer	Monica Wu
Polarity	Vertical	Temperature (°C)	24
Test Condition	--	Humidity (%RH)	48

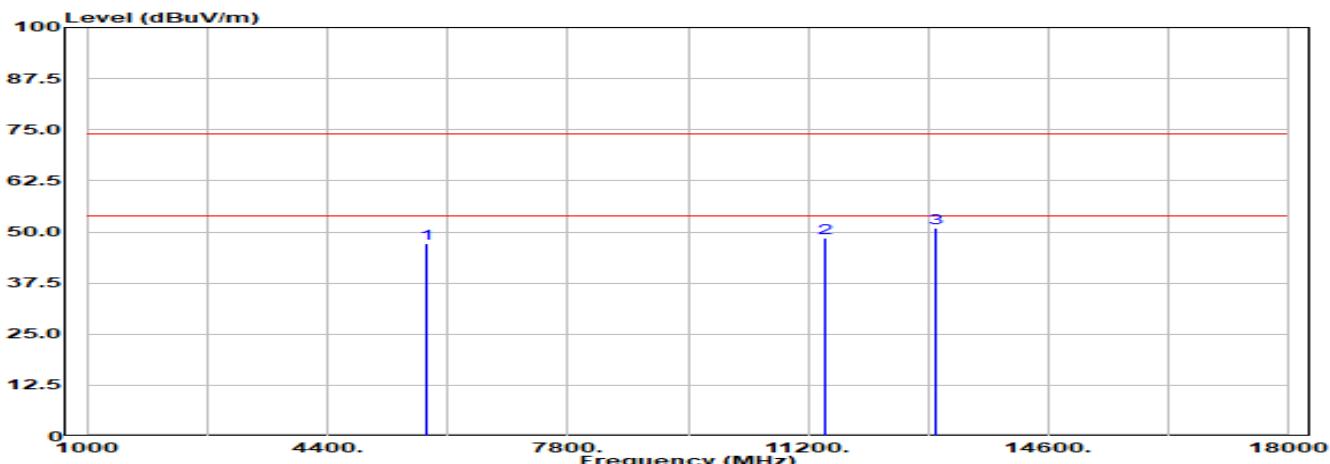


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Ant Pos (cm)	TT Pos (deg)	Detector Type
1	5794.000	47.19	74.00	-26.81	46.98	0.22	100	155	Peak
2	11438.000	48.64	74.00	-25.36	38.63	10.02	100	104	Peak
3	13019.000	50.91	74.00	-23.09	38.61	12.30	100	191	Peak

Remark:

- ** means this data is the worst margin; ! means this data is over limit.
- Emission Level=Reading Level + Correct Factor (Correct Factor=Ant Factor+Cable Loss+Pre Amp).
- Margin=Emission Level - Limit.
- The above 1 GHz test. When PEAK measures level less than AV limit by 20 dBuV, its average is not measured separately.

Model No	BE211D2W	Site	HY-CB05
Test Voltage	AC 120V/60Hz	Test Date	2025-06-26
Test Mode	Mode 1	Engineer	Monica Wu
Polarity	Horizontal	Temperature (°C)	24
Test Condition	--	Humidity (%RH)	48

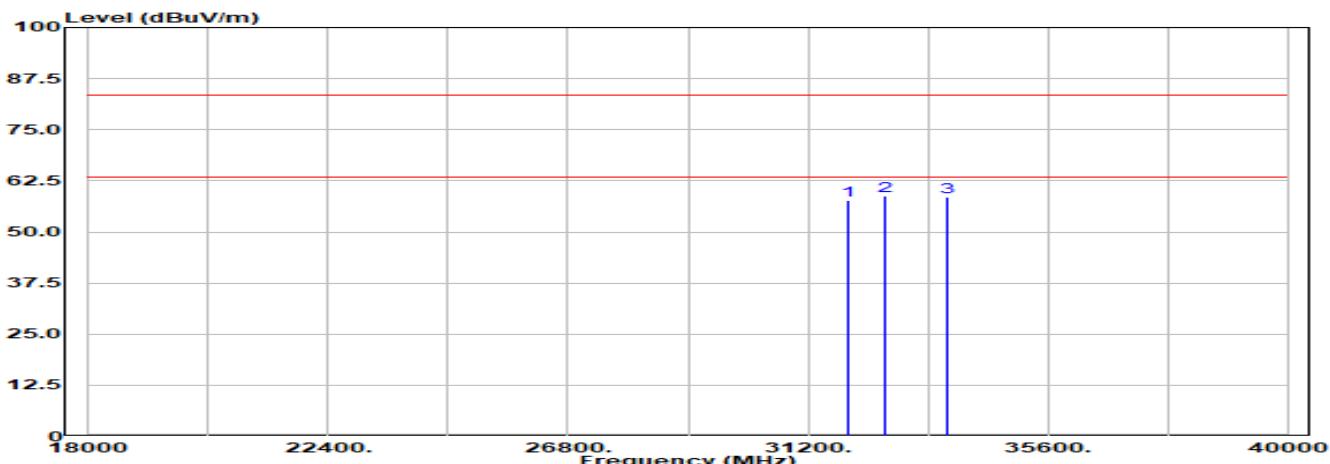


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Ant Pos (cm)	TT Pos (deg)	Detector Type
1	31926.000	57.73	83.50	-25.77	41.16	16.57	100	102	Peak
2	32608.000	58.86	83.50	-24.64	42.62	16.24	100	116	Peak
3	33774.000	58.60	83.50	-24.90	42.17	16.43	100	267	Peak

Remark:

- ** means this data is the worst margin; ! means this data is over limit.
- Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+Cable Loss+Pre Amp).
- Margin=Emission Level - Limit.
- The above 1 GHz test. When PEAK measures level less than AV limit by 20 dBuV, its average is not measured separately.

Model No	BE211D2W	Site	HY-CB05
Test Voltage	AC 120V/60Hz	Test Date	2025-06-26
Test Mode	Mode 1	Engineer	Monica Wu
Polarity	Vertical	Temperature (°C)	24
Test Condition	--	Humidity (%RH)	48

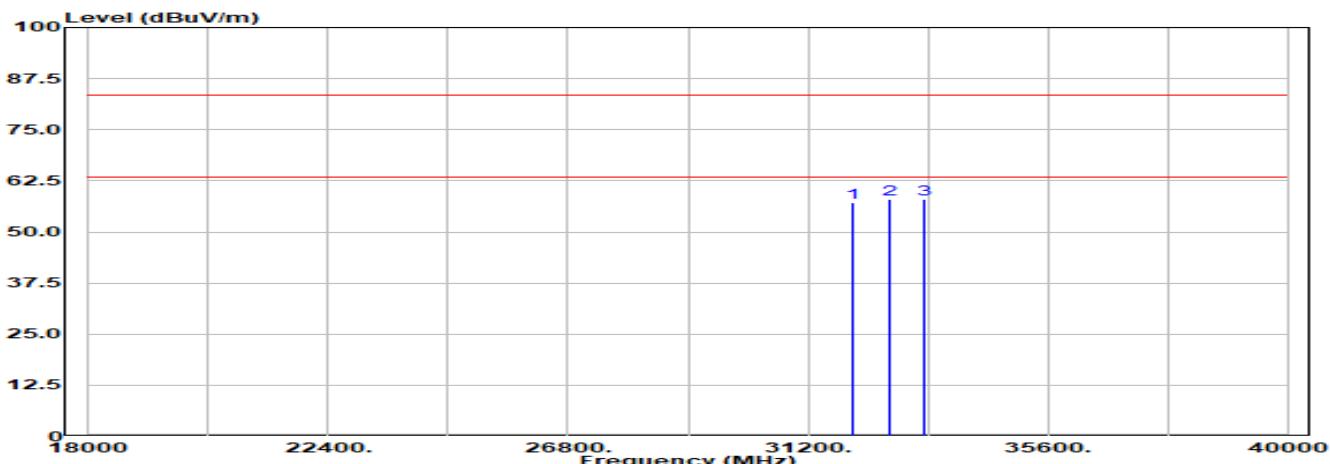

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Ant Pos (cm)	TT Pos (deg)	Detector Type
1	32014.000	57.31	83.50	-26.19	40.73	16.58	100	0	Peak
2	32696.000	57.88	83.50	-25.62	41.32	16.57	100	176	Peak
3	33356.000	57.92	83.50	-25.58	41.42	16.50	100	269	Peak


Remark:

- ** means this data is the worst margin; ! means this data is over limit.
- Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+Cable Loss-Pre Amp).
- Margin=Emission Level - Limit.
- The above 1 GHz test. When PEAK measures level less than AV limit by 20 dBuV, its average is not measured separately.

4.6 Test Photograph


Test Mode : Mode 1

Description : Front View of Radiated Test

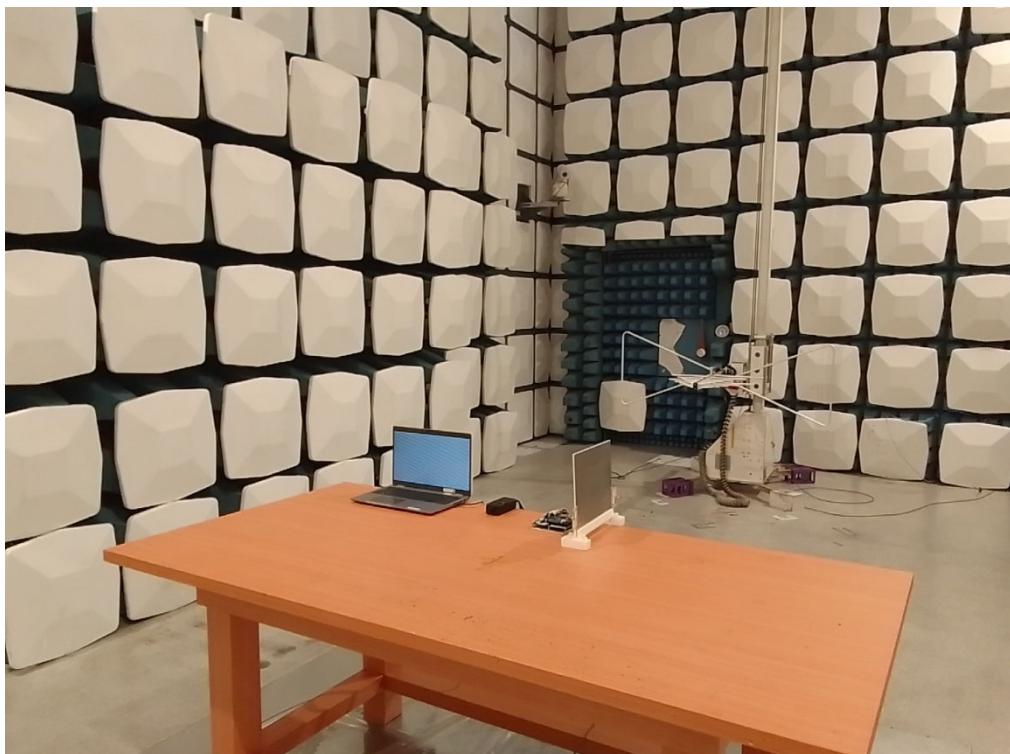

Test Mode : Mode 1

Description : Back View of Radiated Test

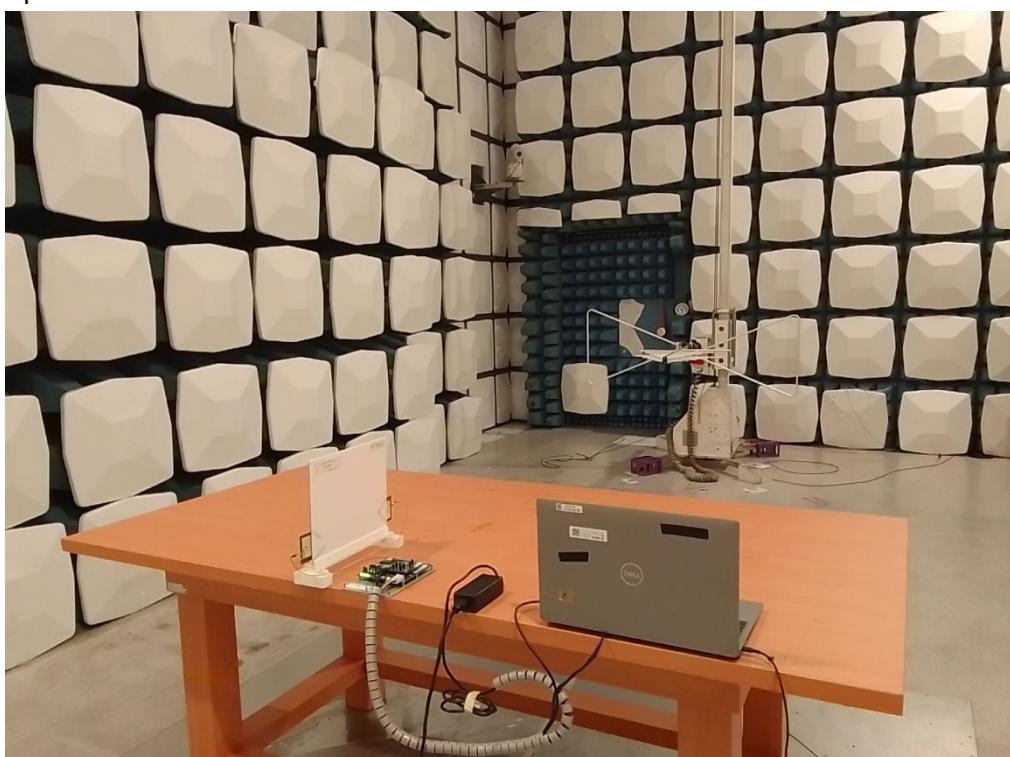

Test Mode : Mode 1

Description : Front View of High Frequency Radiated Test

