

TEST REPORT

EUT Description	WLAN and BT, 2x2 PCIe M.2 1216 adapter card
Brand Name	Intel® BE211D2W
Model Name	BE211D2W, BE211D2W M
FCC/IC ID	FCC ID: PD9BE211D2 / IC ID: 1000M-BE211D2
Date of Test Start/End	2025-06-26 / 2025-06-26
Features	2x2 Wi-Fi - Bluetooth® (see section 5)

Applicant	Intel Corporation SAS
Address	425 Rue de Goa – Le Cargo B6 – 06600 Antibes, FRANCE
Contact Person	Benjamin Lavenant
Telephone/Fax/ Email	Benjamin.lavenant@intel.com

Reference Standards	FCC CFR Title 47 Part 15E RSS-247 issue 3 (see section 1)
---------------------	---

Test Report identification	250519-02.TR07
Revision Control	Rev. 00 This test report revision replaces any previous test report revision (see section 0)

The test results relate only to the samples tested.
Reference to accreditation shall be used only by full reproduction of test report.

Reviewed by _____

Zayd OUACHICHA
(Technical Manager)

Intel Corporation S.A.S – WRF Lab
425 rue de Goa – Le Cargo B6 - 06600, Antibes, France
Tel. +33493001400 / Fax +33493001401

Table of Contents

1. Standards, reference documents and applicable test methods	3
2. General conditions, competences and guarantees	3
3. Environmental Conditions	3
4. Test samples	4
5. EUT Features	4
6. Remarks and comments	4
7. Test Verdicts summary	5
7.1. DYNAMIC FREQUENCY SELECTION	5
8. Document Revision History	5
Annex A. Test & System Description	6
A.1 MEASUREMENT SYSTEM	6
A.2 TEST EQUIPMENT LIST	7
A.3 MEASUREMENT UNCERTAINTY EVALUATION	8
Annex B. Test Results	9
B.1 TEST CONDITIONS	9
B.2 TEST RESULTS FOR DYNAMIC FREQUENCY SELECTION (DFS)	9
Annex C. Photographs	11
C.1 TEST SAMPLE	11

1. Standards, reference documents and applicable test methods

FCC	<ol style="list-style-type: none"> 1. FCC Title 47 CFR part 15 - Subpart E – Unlicensed National Information Infrastructure Devices. 2024-10-01 Edition 2. FCC OET KDB 905462 D02 v02 - UNII DFS Compliance Procedures New Rules – Compliance Measurement procedures for Unlicensed-National Information Infrastructure Devices Operating in the 5250-5350 MHz and 5470-5725 MHz Bands Incorporating Dynamic Frequency Selection. 3. ANSI C63.10-2020 American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.
ISED	<ol style="list-style-type: none"> 1. RSS-247 Issue 3 – Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSS) and License-Exempt Local Area Network (LE-LAN) Devices 2. FCC OET KDB 905462 D02 v02 - UNII DFS Compliance Procedures New Rules – Compliance Measurement procedures for Unlicensed-National Information Infrastructure Devices Operating in the 5250-5350 MHz and 5470-5725 MHz Bands Incorporating Dynamic Frequency Selection. 3. ANSI C63.10-2020+Cor2023+Amd2024 American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

2. General conditions, competences and guarantees

- ✓ Tests performed under FCC standards identified in section 1 are covered by A2LA accreditation.
- ✓ Tests performed under ISED standards identified in section 1 are covered by Cofrac accreditation.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an ISO/IEC 17025:2017 laboratory accredited by the American Association for Laboratory Accreditation (A2LA) with the certificate number 3478.01.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an Accredited Test Firm recognized by the FCC, with Designation Number FR0011.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an ISO/IEC 17025:2017 testing laboratory accredited by the French Committee for Accreditation (Cofrac) with the certificate number 1-6736.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is a Registered Test Site listed by ISED, with ISED company number 1000Y and CAB identifier FR0005.
- ✓ Intel WRF Lab only provides testing services and is committed to providing reliable, unbiased test results and interpretations.
- ✓ Intel WRF Lab is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.
- ✓ Intel WRF Lab has developed calibration and proficiency programs for its measurement equipment to ensure correlated and reliable results to its customers.
- ✓ This report is only referred to the item that has undergone the test.
- ✓ This report does not imply an approval of the product by the Certification Bodies or competent Authorities.

3. Environmental Conditions

- ✓ At the site where the measurements were performed the following limits were not exceeded during the tests:

Temperature	Min: 22.25°C Max: 25.39°C AVG: 22.85°C
Humidity	Min: 39.37% Max: 63.89% AVG: 49.20%

4. Test samples

Sample	Control #	Description	Model	Serial #	Date of receipt	Note
#1	250528-01.S01	Module	BE211D2W	289200F964C4	2025-05-28	RF Conducted
	240000-01.S03	Extender MotherBoard	PCB00887-00_A	202207569	2024-12-12	
	210916-09.S03	Laptop	HP HSN-i45C	000176090Y	2021-12-10	

5. EUT Features

The herein information is provided by the customer.

Intel WRF Lab declines any responsibility for the accuracy of the stated customer provided information, especially if it has any impact on the correctness of test results presented in this report

Brand Name	Intel® BE211D2W														
Model Name	BE211D2W, BE211D2W M														
Software Version	DRTU.08798.99.0.99														
Driver Version	99.0.99.2														
Prototype / Production	Production														
Supported Radios	802.11b/g/n/ac/ax/be	2.4GHz													
	802.11a/n/ac/ax/be	5.2GHz													
Antenna Information		5.6GHz													
		5.8GHz													
		5.9GHz													
	802.11ax/be	6.0GHz													
	Bluetooth	2.4GHz													
<table border="1"> <thead> <tr> <th>Transmitter</th> <th>Chain A(1)</th> <th>Chain B(2)</th> </tr> </thead> <tbody> <tr> <td>Manufacturer</td> <td>Intel WRF Lab</td> <td>Intel WRF Lab</td> </tr> <tr> <td>Antenna type</td> <td>PIFA</td> <td>PIFA</td> </tr> <tr> <td>Part number</td> <td>WRF-Tri Band-Antenna</td> <td>WRF-Tri Band-Antenna</td> </tr> </tbody> </table>				Transmitter	Chain A(1)	Chain B(2)	Manufacturer	Intel WRF Lab	Intel WRF Lab	Antenna type	PIFA	PIFA	Part number	WRF-Tri Band-Antenna	WRF-Tri Band-Antenna
Transmitter	Chain A(1)	Chain B(2)													
Manufacturer	Intel WRF Lab	Intel WRF Lab													
Antenna type	PIFA	PIFA													
Part number	WRF-Tri Band-Antenna	WRF-Tri Band-Antenna													

6. Remarks and comments

1. No deviations were made from the test methods listed in section 1 of this report
2. The operating mode of the sample is client only without radar detection.
3. The maximum antenna gain is +5.15dBi.

7. Test Verdicts summary

The statement of conformity to applicable standards in the table below are based on the measured values, without taking into account the measurement uncertainties.

7.1. Dynamic frequency selection

FCC part	RSS part	Test name	Verdict
15.407 (h) (2)	RSS-247 part 6.3	Non Occupancy Period	P
		DFS Detection Threshold	NA
		Channel Availability Check Time	NA
		Uniform Spreading	NA
		U-NII Detection Bandwidth	NA
		Channel Closing Transmission Time	P
		Channel Move Time	P

8. Document Revision History


Revision #	Modified by	Revision Details
Rev. 00	T. GAMAIN	First Issue

Annex A. Test & System Description

A.1 Measurement System

Measurements were performed using the following setups, made in accordance to the general provisions of FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02.

The EUT was installed in a test fixture and this test fixture is connected to a laptop computer and AC/DC power adapter. A second computer was used to configure the access point on the DFS channels; a channel was selected randomly by the access point. To enable channel loading, data is streamed between the EUT laptop and the second computer.

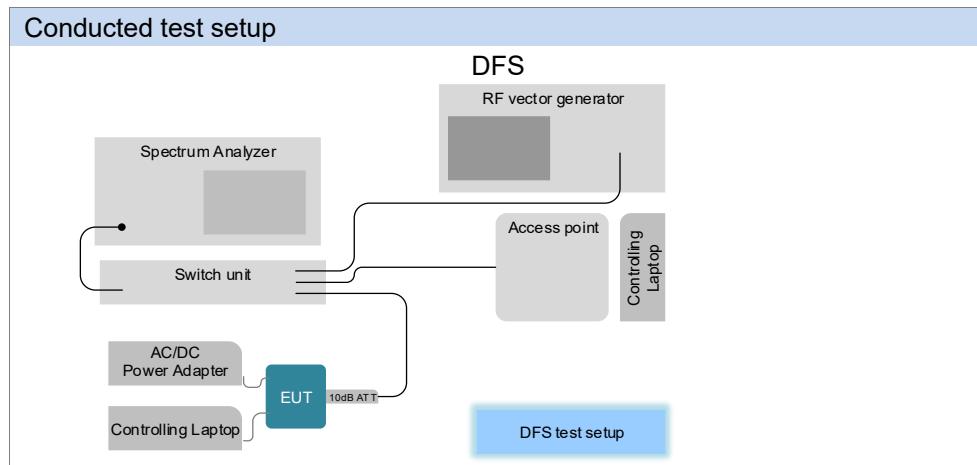

A.2 Test Equipment List

Conducted Setup

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
017-015	Switch unit	OSP 120	101172	Rohde & Schwarz	2024-05-22	2026-05-22
481-000	Access point 802.11n	AIR-CAP3502E-A-K9	FTX1438S6P4	Cisco	N/A	N/A
017-003	DC Power supply	E3640A	MY40006885	Agilent	N/A	N/A
133-000	Oscilloscope	RTE1052	101135	Rohde & Schwarz	2024-03-04	2026-03-04
299-000	Multimeter	34401A	US360546853146A00597	HPAgilent	2024-03-14	2026-03-14
311-000	Climatic chamber	SLT34/40	56746020930010	Secasi	2023-12-20	2025-12-20
017-038	Spectrum analyzer	FSVA3013	102344	Rohde & Schwarz	2024-05-29	2026-05-29
017-000	Measurement Software	WMS32 V11.40	200226	Rohde & Schwarz	N/A	N/A
412-000	Measurement Software	DRTU Power Finder V2	N/A	WRF Lab	N/A	N/A
094-004	Temp & Humidity Logger	RMS-HCD-S	24050483	Rotronic	2024-09-02	2026-09-02
237-000	10dB directional coupler	MC2047-10	01-062	Fairview	2025-02-24	2026-02-24
017-005	RF Cable 0.5m	PE3CA1039	-	Paternack	2025-02-24	2026-02-24
017-006	RF Cable 1.2m	PE3C0666	-	Paternack	2025-02-24	2026-02-24
017-007	Cable SMA Male to ML51-P	HRMP-ML51LP	DTR178-100RS	Hirose	2025-02-24	2026-02-24
017-008	Cable SMA Male to ML51-P	HRMP-ML51LP	DTR178-100RS	Hirose	2025-02-24	2026-02-24
281-000	Thermometer	t3000FC	46320036	Fluke	2024-04-17	2026-04-17
053-000	Thermometer	t3000FC	46320032	Fluke	2023-12-13	2025-12-13
017-011	RF Cable 2m	0900670672000PJ	1936949	Radiall	2025-02-24	2026-02-24
017-012	RF Cable 2m	0900670672000PJ	1936947	Radiall	2025-02-24	2026-02-24
017-019	10dB attenuator	-	-	Paternack	2025-02-24	2026-02-24
017-020	10dB attenuator	-	-	Paternack	2025-02-24	2026-02-24
008-025	Power Sensor	NRP-Z57	101280	Rohde & Schwarz	2024-05-22	2026-05-22

N/A: Not applicable

A.3 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the table below with a coverage factor of $k = 2$ to indicate a 95% level of confidence:

Measurement type	Uncertainty	Unit
Timing	±0.01	%

Annex B. Test Results

The herein test results were performed by:

Test case measurement	Test Personnel
DFS	Thomas GAMAIN

B.1 Test Conditions

The EUT power supply was provided by the Extender test board, $V_{\text{nominal}} = 3.3 \text{ V}_{\text{DC}}$.
The software PROSet/Wireless was used to set the EUT in normal operation mode.

B.2 Test results for Dynamic Frequency Selection (DFS)

Test procedure


The conducted setup shown on *Section A.1* was used to measure the Channel Closing Transmission Time and Channel Move Time.

The *Client Device* (UUT) is set up to associate with the *Master Device*. Data is streamed between the *Master Device* and the *Client Device*. Radar test waveforms generated with the vector signal generator are injected into the *Master* on the operating channel above the DFS detection threshold. Observations are done on the transmissions of the UUT at the end of the radar burst on the Operating Channel for a duration greater than 10 seconds. We measured the transmissions from the UUT during the observation time, after radar detection occurs the Channel Move Time and Channel Closing Transmission Time are recorded.


Results tables

Tested Channel: 64, Frequency: 5320 MHz

Test item	Results	Limit
Transmit Test Duty Cycle	0.05%	-
Channel Closing Transmission Time	<5.640ms	200 ms + an aggregate of 60ms over remaining 10 seconds period.
Channel Move Time	615 ms	10 seconds
Non-Occupancy Period	32 min	Minimum 30 minutes

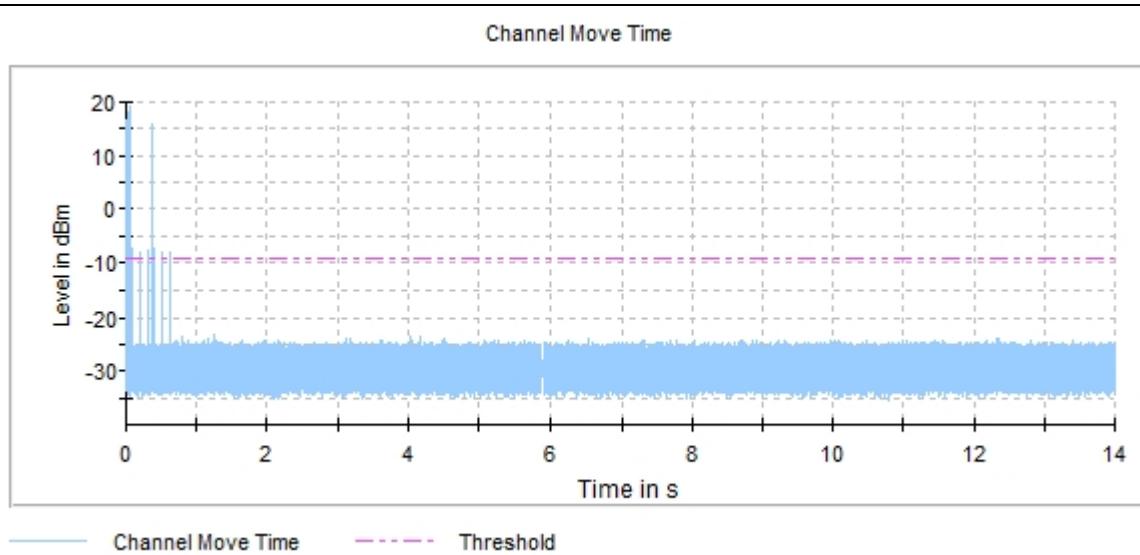Results Screenshot

Channel move time < 10s, test PASS

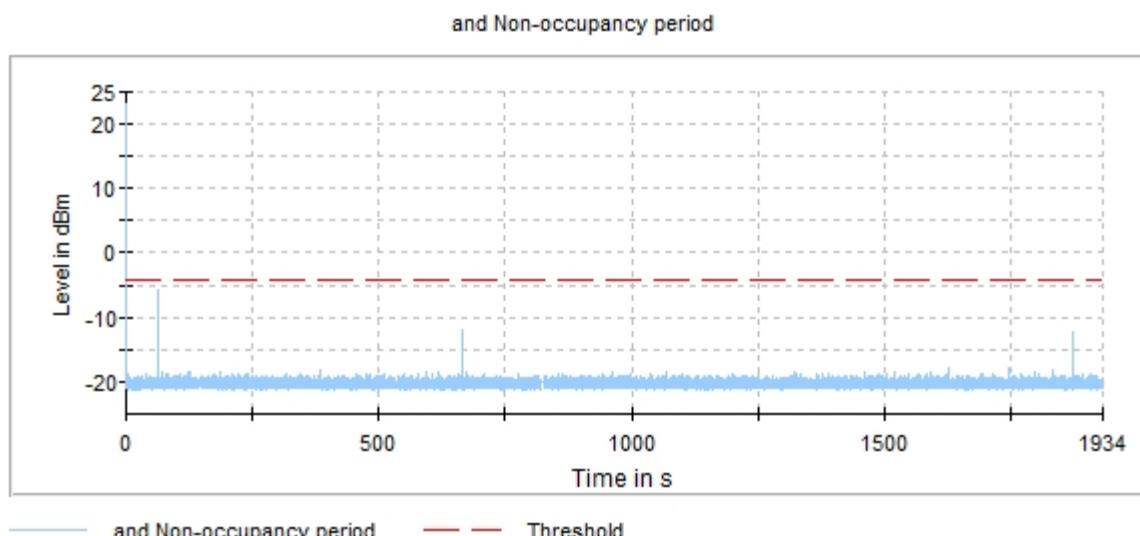

No transmission of any type has occurred for 30 minutes, test PASS