

TEST REPORT

EUT Description	WLAN and BT, 2x2 Wi-Fi and BT, M.2 1216 adapter card
Brand Name	Intel® BE211D2W
Model Name	BE211D2W , BE211D2W M
FCC ID / IC ID	FCC ID: PD9BE211D2 ; IC ID: 1000M-BE211D2
Date of Test Start/End	2025-06-11 / 2025-07-17
Features	2x2 WiFi - Bluetooth® (see section 5)
Applicant	Intel Corporation SAS
Address	425 Rue de Goa – Le Cargo B6 – 06600 Antibes, FRANCE
Contact Person	Benjamin Lavenant
Telephone/Fax/ Email	Benjamin.lavenant@intel.com
Reference Standards	FCC CFR Title 47 Part 15 E RSS-247 issue 3, RSS-Gen issue 5 - A1 (see section 1)
Test Report identification	250519-02.TR10
Revision Control	Rev. 00 This test report revision replaces any previous test report revision (see section 8)

The test results relate only to the samples tested.
Reference to accreditation shall be used only by full reproduction of test report.

Issued by

Reviewed by

Zayd OUACHICHA
(Technical Manager)

Ines KHARRAT
(Technical Officer)

Intel Corporation S.A.S – WRF Lab
425 rue de Goa – Le Cargo B6 - 06600, Antibes, France
Tel. +33493001400 / Fax +33493001401

Table of Contents

1.	Standards, reference documents and applicable test methods.....	3
2.	General conditions, competences and guarantees.....	3
3.	Environmental Conditions	3
4.	Test samples.....	4
5.	EUT Features	5
6.	Remarks and comments.....	6
7.	Test Verdicts summary.....	6
7.1.	802.11 A/N/AC/AX – U-NII- 3	6
8.	Document Revision History	6
Annex A. Test & System Description.....		7
A.1	MEASUREMENT SYSTEM.....	7
A.2	TEST EQUIPMENT LIST	9
A.3	MEASUREMENT UNCERTAINTY EVALUATION	10
Annex B. Test Results U-NII-3.....		11
B.1	TEST CONDITIONS.....	11
B.2	TEST RESULTS TABLES	12
B.2.1	6dB & 99% Bandwidth	12
B.2.2	Power Limits. Maximum output power & Maximum power spectral Density.....	14
B.2.3	Undesirable emission limits : out of band (Conducted).....	22
B.2.4	Radiated spurious emission.....	23
B.3	TEST RESULTS SCREENSHOT	26
B.3.1	Maximum output power	26
B.3.2	Undesirable emission limits : out of band (Conducted).....	29
Photographs		38
B.4	TEST SETUP	38
B.5	TEST SAMPLE	40

1. Standards, reference documents and applicable test methods

FCC	1. FCC Title 47 CFR part 15 – Subpart E – Unlicensed National Information Infrastructure Devices. 2024-10-01 Edition 2. FCC Title 47 CFR part 15 – Subpart C – §15.209 Radiated emission limits; general requirements. 2024-10-01 Edition 3. FCC OET KDB 789033 D02 v02r01 - General U-NII Test Procedures New Rules – Guidelines for compliance testing of Unlicensed National Information Infrastructure (U-NII) Devices (Part 15, Subpart E) 4. FCC OET KDB 662911 D01 v02r01 - Emissions Testing of Transmitters with Multiple Outputs in the Same Band. 5. ANSI C63.10-2020 American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.
ISED	1. RSS-Gen Issue 5 Amendment 1 - General Requirements for Compliance of Radio Apparatus. 2. RSS-247 Issue 3 - Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and License-Exempt Local Area Network (LE-LAN) Devices. 3. FCC OET KDB 789033 D02 v02r01 - General U-NII Test Procedures New Rules – Guidelines for compliance testing of Unlicensed National Information Infrastructure (U-NII) Devices (Part 15, Subpart E) 4. FCC OET KDB 662911 D01 v02r01 - Emissions Testing of Transmitters with Multiple Outputs in the Same Band. 5. ANSI C63.10-2020+Cor2023+Amd2024 American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

2. General conditions, competences and guarantees

- ✓ Tests performed under FCC standards identified in section 1 are covered by A2LA accreditation.
- ✓ Tests performed under ISED standards identified in section 1 are covered by Cofrac accreditation.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an ISO/IEC 17025:2017 laboratory accredited by the American Association for Laboratory Accreditation (A2LA) with the certificate number 3478.01.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an Accredited Test Firm recognized by the FCC, with Designation Number FR0011.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an ISO/IEC 17025:2017 testing laboratory accredited by the French Committee for Accreditation (Cofrac) with the certificate number 1-6736.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is a Registered Test Site listed by ISED, with ISED #1000Y and CAB identifier FR0005.
- ✓ Intel WRF Lab only provides testing services and is committed to providing reliable, unbiased test results and interpretations.
- ✓ Intel WRF Lab is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.
- ✓ Intel WRF Lab has developed calibration and proficiency programs for its measurement equipment to ensure correlated and reliable results to its customers.
- ✓ This report is only referred to the item that has undergone the test.
- ✓ This report does not imply an approval of the product by the Certification Bodies or competent Authorities.

3. Environmental Conditions

- ✓ At the site where the measurements were performed the following limits were not exceeded during the tests:

Temperature [°C]	Min: 22.11°C Max: 27.84°C AVG: 24.98°C
Humidity [%]	Min: 42.15% Max: 58.44% AVG: 50.3%

4. Test samples

Sample	Control #	Description	Model	Serial #	Date of receipt	Note
#01	250528-01.S02	WiFi 7 Module	BE211D2W	289200F964B5	2025-05-28	Used for Conducted Tests
	230824-01.S02	Laptop	HP TPN-Q292	A5CD32257RT	2023-08-28	
	231109-03.S70	Extender Daughter Board	CRF xVT DB 2230 BNJ C0 PCB00862-00-A	2207308398	2024-06-05	
	230526-08.S03	Extender Mother Board	XVT MB Extender V3 PCB00887-00_A	2202207510	2023-05-26	
#02	250528-01.S07	Module	BE211D2W	289200F96596	2025-05-28	Used for Radiated Spurious Emissions tests
	200803-01.S01	Extender	ADEXELEC	139245	2020-08-31	
	170000-01.S57	Adapter	BNJ C0 V3	ASS00959-00-0C	2025-03-24	
	200611-03.S30	Test PC	Latitude 5401	6DJLK13	2020-08-19	
	230223-02.S48	Triband Antenna	-	006	2023-04-20	
	230526-09.S08	Triband Antenna	-	016	2023-07-06	
#03	250528-01.S29	Module	BE211D2W	C0A810A3BB50	2025-07-16	Used for Radiated Spurious Emissions tests
	180001-01.S21	Socket	1216SD to M.2	-	2021-06-07	
	200904-01.S14	Extender	ADEXELEC	12	2023-06-22	
	170000-01.S56	Adapter	BNJ C0 V3	E1578726888186A	2025-03-24	
	170000-01.S55	Test PC	LATITUDE 5530	004250000000002 AA521	2025-03-24	
	230526-09.S06	Triband Antenna	-	014	2023-07-06	
	230526-09.S05	Triband Antenna	-	013	2023-07-06	
#04	250528-01.S07	Module	BE211D2W	289200F96596	2025-05-28	Used for Radiated Spurious Emissions tests
	200904-01.S14	Extender	ADEXELEC	12	2023-06-22	
	170000-01.S56	Adapter	BNJ C0 V3	E1578726888186A	2025-03-24	
	170000-01.S55	Test PC	LATITUDE 5530	004250000000002 AA521	2025-03-24	
	230526-09.S06	Triband Antenna	-	014	2023-07-06	
	230526-09.S05	Triband Antenna	-	013	2023-07-06	

5. EUT Features

The herein information is provided by the customer

Intel WRF Lab declines any responsibility for the accuracy of the stated customer provided information, especially if it has any impact on the correctness of test results presented in this report.

Brand Name	Intel® BE211D2W		
Model Name	BE211D2W , BE211D2W M		
Software Version	DRTU.08798.99.0.99		
Driver Version	99.0.99.2		
Prototype / Production	Production		
Supported Radios	802.11b/g/n/ax/be	2.4GHz	
	802.11a/n/ac/ax/be	5.2GHz	
		5.6GHz	
		5.8GHz	
	802.11ax/be	6.0GHz	
Antenna Information	Bluetooth	2.4GHz	
	Transmitter	Chain A(1)	Chain B(2)
	Manufacturer	Intel WRFLab	Intel WRFLab
	Antenna type	PIFA	PIFA
	Part number	WRF Tri Band Antenna	WRF Tri Band Antenna
	Antenna peak gain (dBi)	+5.15	+5.15

6. Remarks and comments

1. No deviations were made from the test methods listed in section 1 of this report
2. Only the worst-case plot per bandwidth have been reported excepted for band edge measurements where all plots are reported

7. Test Verdicts summary

The statement of conformity to applicable standards in the table below are based on the measured values, without taking into account the measurement uncertainties.

7.1. 802.11 a/n/ac/ax – U-NII- 3

FCC part	RSS clause	Test name	Verdict
15.407 (a) (3)	RSS-247 Clause 6.2.4.1	Power Limits. Maximum output power	Pass
15.407 (a) (3)	RSS-247 Clause 6.2.4.1	Power spectral density	Pass
15.407 (b) (3)	RSS-247 Clause 6.2.4.2	Undesirable emissions limits: out of band (conducted)	Pass
15.407 (b) (3) 15.209	RSS-247 Clause 6.2.4.2 RSS-GEN A1 Clause 8.9	Undesirable emissions limits: Spurious emissions (radiated)	Pass

8. Document Revision History


Revision #	Modified by	Revision Details
Rev. 00	T.MATHIEU K.RIDA	First Issue

Annex A. Test & System Description

A.1 Measurement System


Measurements were performed using the following setups, made in accordance to the general provisions of FCC KDB 789033 D02 General UNII Test Procedures.

The DUT was installed in a test fixture and this test fixture is connected to a laptop computer and AC/DC power adapter. The laptop computer was used to configure the EUT to continuously transmit at a specified output power using all different modes and modulation schemes, using the Intel proprietary tool DRTU.

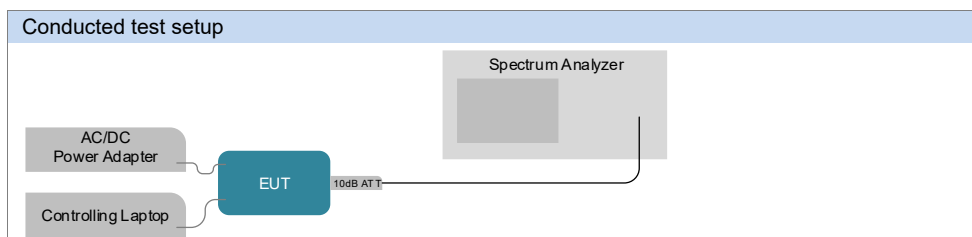


Radiated test setup


Radiated Setup 30 MHz – 1 GHz (Transmitter tests)

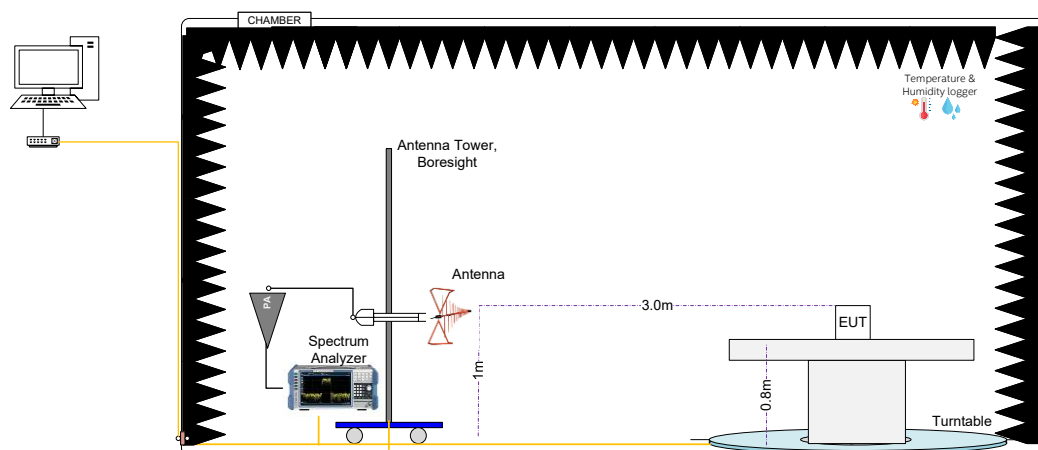

Radiated Setup 1 GHz – 11 GHz (Transmitter tests)

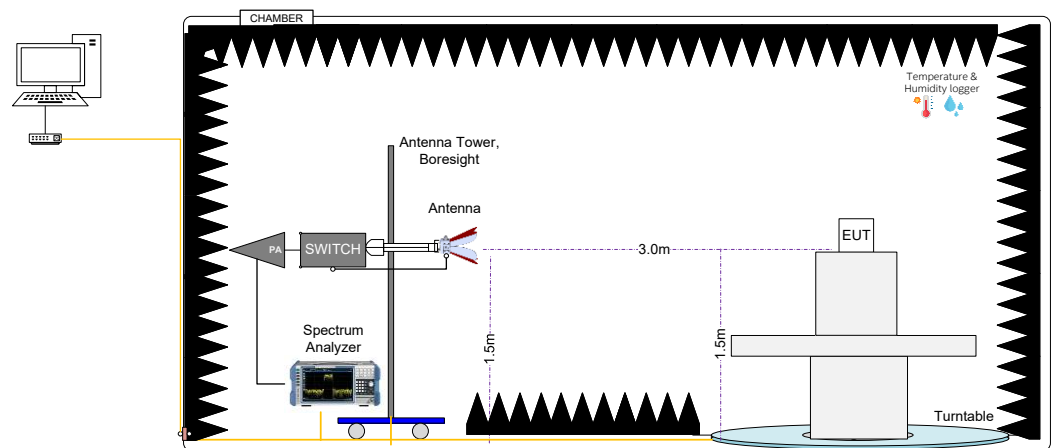

Radiated Setup 11 GHz – 40 GHz (Transmitter tests)

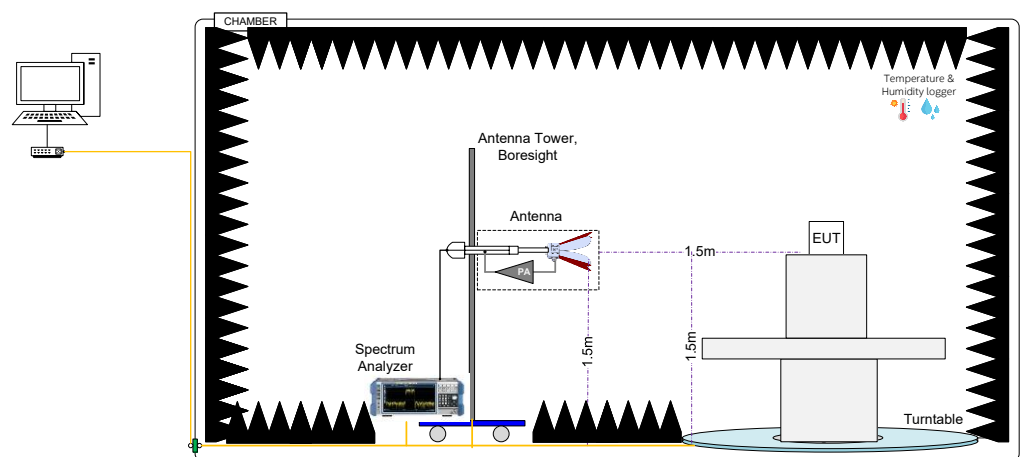

Sample Calculation

The spurious received voltage $V(\text{dB}\mu\text{V})$ in the spectrum Analyzer is converted to Electric field strength using the transducer factor F corresponding to the Rx path Loss:

$$F(\text{dB/m}) = \text{Rx Antenna Factor}(\text{dB/m}) + \text{Cable losses}(\text{dB}) - \text{Amplifiers Gain}(\text{dBi})$$

$$E(\text{dB}\mu\text{V/m}) = V(\text{dB}\mu\text{V}) + F(\text{dB/m})$$

For field strength measurements made at other than the distance at which the applicable limit is specified, the field strength of the emission at the distance specified by the limit is deduced as follows:

$$E_{\text{SpecLimit}} = E_{\text{Meas}} + 20 \cdot \log(D_{\text{Meas}}/D_{\text{SpecLimit}})$$

where

$E_{\text{SpecLimit}}$ is the field strength of the emission at the distance specified by the limit, in $\text{dB}\mu\text{V/m}$

E_{Meas} is the field strength of the emission at the measurement distance, in $\text{dB}\mu\text{V/m}$

D_{Meas} is the measurement distance, in m

$D_{\text{SpecLimit}}$ is the distance specified by the limit, in m

A.2 Test Equipment List

Conducted setup

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
273-000	Spectrum Analyzer	FSV30	103309	Rohde & Schwarz	2024-03-22	2026-03-22
019-000	RF cable 50cm	PE360-50CM	N/A	PASTERNAK	2025-02-24	2026-02-24
019-002	10dB Attenuator + MH4	PE7395-10	N/A	PASTERNAK	2025-02-24	2026-02-24
094-004	Temp & Humidity Logger	RMS-HCD-S	24050483	Rotronic	2024-09-02	2026-09-02
413-000	Measurement SW v1.5.4.2	Octopi	N/A	Step AT	N/A	N/A

Radiated Setup #1

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
006-000	Anechoic Chamber	FACT3	5720	ETS-Lindgren	2024-01-17	2026-01-17
006-001	Turn Table	ETS	-	ETS-Lindgren	N/A	N/A
094-002	Thermo-hygrometer sensor	RMS-HCD-S	24050486	Rotronic	2024-09-02	2026-09-02
006-011	Boresight antenna mast	BAM 4.0-P	P/278/2890.01	Maturo	N/A	N/A
006-002	Switch & Positioning systems	EMC Center	00159757	ETS-Lindgren	N/A	N/A
147-000	Spectrum analyzer	FSW43	101847	Rohde & Schwarz	2025-03-07	2027-03-07
006-008	Measurement SW, v11.3	EMC32	100623	Rohde & Schwarz	N/A	N/A
301-000	Amplifier 9kHz-1300MHz	8447F	3113A07440	HP	2025-02-11	2026-02-11
006-067	Low Pass Filter 1.6GHz	LPM17671	G002	Micro-Tronics	2025-02-11	2026-02-11
007-034	Broadband RF Power Amplifier 0.5-40.0GHz	DEPA0540-43	2024A02	Diamond Engineering	2025-02-11	2026-02-11
189-000	Double Horn Ridged antenna 10GHz-40GHz	3116C	227716	ETS-Lindgren	2024-05-29	2026-05-29
057-000	Double ridged horn antenna (1GHz to 18GHz)	ETS-Lindgren-3117	167062	ETS-Lindgren	2024-07-23	2026-07-23
006-061	Bi-Log Periodic antenna	CBL6143A	61382	Teseq	2024-11-13	2026-11-13
006-068	RF Switch DC-40GHz	LPM17671	G002	Mini-Circuits	2025-02-11	2026-02-11
261-000	RF Amplifier Used for 1 GHz-11GHz	ETS-Lindgren-3117-PA	00157993	ETS-Lindgren	2025-02-11	2026-02-11
009-007	Filter HPF 11GHz	Mini-Circuits-ZHSS-k11G+	84931831830	Mini-Circuits	2025-02-11	2026-02-11
006-051	RF Cable 1.0m	CBL-1.5M-SMSM+	202879	Mini-Circuits	2025-03-12	2026-03-12
006-066	Cable 7m – 25MHz to 40GHz	R286304174	20.46.370	Radiall	2025-02-10	2026-02-10
006-063	Cable 30cm – 1GHz to 40GHz	PE371-12	-	Pasternack	2025-02-10	2026-02-10
006-064	Cable 30cm – 1GHz to 40GHz	PE371-12	-	Pasternack	2025-02-10	2026-02-10
006-065	Cable 60cm – 25MHz to 1GHz	PE300-24	-	Pasternack	2025-02-10	2026-02-10

N/A: Not Applicable

Radiated Setup #2

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
007-000	Anechoic chamber	RFD-FA-100	5996	ETS Lindgren	2024-01-18	2026-01-18
138-000	Spectrum Analyzer	FSV40**	101556	Rohde & Schwarz	2024-02-27	2026-02-27
137-000	Spectrum Analyzer	FSW67*	103266	Rohde & Schwarz	2025-02-11	2027-02-11
007-007	Double Ridge Horn Antenna (1- 18GHz)	3117	00152266	ETS Lindgren	2024-03-26	2026-03-26
026-008	Low noise amplifier 1-18GHz	LA1018N3209	J10100000407	A-INFO	2025-02-19	2026-02-19
007-004	Switch & Positioner	EMCenter	00162359	ETS Lindgren	N/A	N/A
007-006	EMControl & EMSwitch	EMCenter	00151232	ETS Lindgren	N/A	N/A
007-036	SMA-SMA 6.5m Cable	140-8500-11-51-001	001	Atem	2025-03-12	2026-03-12
007-005	Measurement SW, v11.30.00	EMC32	100401	Rohde & Schwarz	N/A	N/A
007-001	Styrofoam Column, 151mm	-	-	-	N/A	N/A
007-002	Turntable	-	-	ETS Lindgren	N/A	N/A
007-003	Antenna Tower	2171B-3.0M	00150123	ETS Lindgren	N/A	N/A
007-015	N-SMA 1.5m Cable	-	-	Spirent	2025-02-19	2026-02-19
007-018	SMA-SMA 1.2m Cable	0500990991200KE	-	Radiall	2025-02-19	2026-02-19
094-001	Temp & Humidity Logger	RMS-HCD-S	24050487	Rotronic	2024-09-02	2026-09-02

*Used from 12/06/2025 to 16/06/2025

**Used since 17/06/2025

Shared Radiated Equipment

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
412-000	DRTU Power finder V2.1	-	-	Intel	N/A	N/A
139-000	Power Sensor	NRP-Z81	104383	Rohde & Schwarz	2025-05-20	2027-05-20
140-000	Power Sensor	NRP-Z81	104382	Rohde & Schwarz	2024-04-04	2026-04-04

A.3 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the table below with a coverage factor of $k = 2$ to indicate a 95% level of confidence:

Measurement type	Uncertainty	Unit
Timing	± 0.12	%
Power Spectral density	± 1.47	dB
Occupied bandwidth	± 2.07	%
Conducted Power	± 1.03	dB
Conducted Spurious Emission <40 GHz	± 3.45	dB
Radiated tests <1GHz	± 6.33	dB
Radiated tests 1GHz – 40 GHz	± 6.72	dB

Annex B. Test Results U-NII-3

The herein test results were performed by:

Test case measurement	Test Personnel
6dB and 99% Bandwidth	T.MATHIEU
Maximum output power & Maximum PSD	T.MATHIEU
Undesirable emission limits: out of band	T.MATHIEU
Radiated spurious emissions	K. RIDA

B.1 Test Conditions

For 802.11a mode the EUT can transmit at both CHAIN A and CHAIN B RF outputs individually, but not simultaneously.

For 802.11n20 & 802.11ax/be20 (20 MHz channel bandwidth), 802.11n40 and 802.11ax/be40 (40MHz channel bandwidth) 802.11ac80 & 802.11ax/be80 (80MHz channel bandwidth) modes the EUT can transmit at both CHAIN A and CHAIN B RF outputs individually, and also simultaneously.

The following data rates were selected based on preliminary testing that identified those rates as the worst cases for output power and spurious levels at the band edges:

Transmission	Mode	Bandwidth (MHz)	Worst Case Data Rate
SISO	802.11a	20	6Mbps
	802.11n	20	HT0
		40	HT0
	802.11ac	80	VHT0
	802.11ax/be	20	MCS0
		40	MCS0
		80	MCS0
MIMO	802.11n	20/40	HT8
	802.11ac	80	VHT0
	802.11ax/be	20/40/80	MCS0

B.2 Test Results Tables

B.2.1 6dB & 99% Bandwidth

Test limits

FCC part	RSS clause	Limits
15.407 (e)	RSS-247 Clause 6.2.4.1	For equipment operating in the band 5725-5850 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

Test procedure

The conducted setup shown in section *Test & System Description* was used to measure the 6dB & 99% Bandwidth. The antenna terminal of the EUT is connected to the spectrum analyzer through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

For the overlapped channels between U-NII-2C and U-NII-3 bands, and according to FCC KDB 789033 D02, the boundary frequency between the bands is used as one edge for defining the portion of the 6dB bandwidth that falls within a particular U-NII band. This rule is only applicable for the 6dB bandwidth and for those channels marked as overlapped.

Results tables

U-NII-3 channels

Mode	Rate	Antenna	Channel	Freq [MHz]	6dB BW [MHz]	99% BW [MHz]
802.11a	6Mbps	SISO A	149	5745	15.13	17.32
			157	5785	15.13	17.60
			165	5825	15.01	17.88
		SISO B	149	5745	16.30	25.92
			157	5785	15.09	18.80
			165	5825	16.28	25.72
802.11n20	HT0	SISO A	149	5745	15.03	18.00
			157	5785	15.71	18.24
			165	5825	15.07	18.60
		SISO B	149	5745	16.88	26.12
			157	5785	15.07	19.24
			165	5825	17.50	26.32
	HT8	MIMO A	149	5745	15.25	17.92
			157	5785	16.28	18.04
			165	5825	15.00	18.04
		MIMO B	149	5745	17.56	26.68
			157	5785	17.31	26.56
			165	5825	17.55	26.36
802.11n40	HT0	SISO A	151	5755	35.03	36.16
			159	5795	32.62	36.00
		SISO B	151	5755	33.74	36.48
			159	5795	35.10	36.32
	HT8	MIMO A	151	5755	34.99	36.16
			159	5795	35.08	36.08
		MIMO B	151	5755	35.05	36.16
			159	5795	35.07	36.24
802.11ac80	VHT0	SISO A	155	5775	71.30	75.24
		SISO B			75.10	75.24
		MIMO A			71.40	75.12
		MIMO B			72.63	75.12

Max Value

Mode	Rate	Antenna	Channel	Freq [MHz]	RU config.	6dB BW [MHz]	99% BW [MHz]
802.11ax/be20	MCS0	SISO A	149	5745	Full	16.37	19.04
					26/0	12.02	18.36
					52/37	16.98	17.92
					106/53	17.11	18.36
			157	5785	Full	16.33	19.08
					165	5825	Full
		SISO B	149	5745	Full	16.95	19.64
					26/0	17.08	20.16
					52/37	15.07	18.92
					106/53	2.04	18.12
			157	5785	Full	17.02	18.56
					165	5825	Full
		MIMO A	149	5745	Full	15.11	24.92
					26/0	14.51	19.40
					52/37	16.97	18.52
					106/53	17.17	18.24
			157	5785	Full	15.47	25.20
					165	5825	Full
		MIMO B	149	5745	Full	14.94	19.00
					26/0	16.89	24.80
					52/37	17.50	25.08
					106/53	18.25	25.08
			157	5785	Full	16.98	18.96
					165	5825	Full
802.11ax/be40	MCS0	SISO A	151	5755	Full	36.32	37.52
			159	5795	242/61	16.79	18.96
		SISO B	151	5755	Full	35.27	37.52
			159	5795	Full	16.69	18.96
		MIMO A	151	5755	242/61	36.29	37.52
			159	5795	Full	15.16	18.88
		MIMO B	151	5755	Full	35.06	18.88
			159	5795	242/61	17.36	37.68
		MIMO B	151	5755	Full	36.05	37.76
			159	5795	Full	35.22	37.60
802.11ax/be80	MCS0	SISO A	155	5775	242/61	35.10	37.84
					Full	32.58	37.68
		SISO B			Full	75.10	76.80
					484/65	35.57	37.32
		MIMO A			Full	75.13	76.80
					484/65	34.63	37.44
		MIMO B			Full	73.80	76.68
					484/65	36.07	37.44
MIMO B	Full	73.90	76.80				
	484/65	36.57	37.32				

Max Value

B.2.2 Power Limits. Maximum output power & Maximum power spectral Density

Test limits

FCC part	RSS clause	Limits
15.407 (a) (3)	RSS-247 Clause 6.2.4.1	For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band

Test procedure

The Maximum Conducted Output Power was measured using the channel integration method according to section E) 2) e) (Method SA-2 Alternative) of FCC KDB 789033 D02

The maximum power spectral density (PSD) was measured using the method according to section F) (Method SA-2 Alternative) of FCC KDB 789033 D02

In the measure-and-sum approach for MIMO mode, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically in linear power units to determine the total emission level from the device.

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power.

The conducted setup shown in section *Test & System Description* was used to measure the maximum conducted output power and power spectral density. The antenna terminal of the EUT is connected to the spectrum analyser through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

For the overlapped channels between U-NII-2C and U-NII-3, and according to FCC KDB 789033 D02, the power is computed based on the portion of the emission bandwidth (26dB) contained within that band. This rule is only applicable for those channels marked as overlapped.

Results tables

Duty cycle

Mode	Rate	Antenna	Duty Cycle [%]
802.11a	6Mbps	SISO A	97.9
		SISO B	97.9
802.11n20	HT0	SISO A	98.9
		SISO B	98.9
	HT8	MIMO A	98.9
		MIMO B	98.9
802.11ax/be20	MCS0	SISO A	98.9
		SISO B	98.9
		MIMO A	98.9
		MIMO B	98.9
802.11n40	HT0	SISO A	98.9
		SISO B	98.9
	HT8	MIMO A	98.9
		MIMO B	98.9
802.11ax/be40	MCS0	SISO A	98.9
		SISO B	98.9
		MIMO A	98.9
		MIMO B	98.9
802.11ac80	VHT0	SISO A	98.9
		SISO B	98.9
		MIMO A	98.9
		MIMO B	98.9
802.11ax/be80	MCS0	SISO A	98.9
		SISO B	98.9
		MIMO A	98.9
		MIMO B	98.9
802.11ac160	VTH0	SISO A	98.9
		SISO B	98.9
		MIMO A	98.9
		MIMO B	98.9

Maximum output power – U-NII-3 Channels

Mode	Rate	Channel	Freq [MHz]	Antenna	Average Conducted Output Power [dBm]	Avg Max* Conducted Output Power [dBm]	Avg Max* EIRP [dBm]	Avg Max* Conducted Power [mW]
802.11a	6Mbps	149	5745	SISO A	23.72	23.81	28.96	240.66
				SISO B	23.73	23.82	28.97	241.21
		157	5785	SISO A	24.94	25.03	30.18	318.72
				SISO B	24.82	24.91	30.06	310.03
		165	5825	SISO A	23.76	23.85	29.00	242.89
				SISO B	23.49	23.58	28.73	228.25
802.11n20	HT0	149	5745	SISO A	23.67	23.67	28.82	232.81
				SISO B	23.65	23.65	28.80	231.74
		157	5785	SISO A	24.96	24.96	30.11	313.33
				SISO B	24.75	24.75	29.90	298.54
		165	5825	SISO A	23.68	23.68	28.83	233.35
				SISO B	23.42	23.42	28.57	219.79
	HT8	149	5745	MIMO A	22.86	22.86	28.01	193.20
				MIMO B	22.82	22.82	27.97	191.43
				Combined A+B	25.85	25.85	31.00	384.62
		157	5785	MIMO A	22.91	22.91	28.06	195.43
				MIMO B	22.90	22.90	28.05	194.98
				Combined A+B	25.92	25.92	31.07	390.42
		165	5825	MIMO A	22.99	22.99	28.14	199.07
				MIMO B	22.78	22.78	27.93	189.67
				Combined A+B	25.90	25.90	31.05	388.74
802.11n40	HT0	151	5755	SISO A	21.84	21.84	26.99	152.76
				SISO B	21.28	21.28	26.43	134.28
		159	5795	SISO A	23.06	23.06	28.21	202.30
				SISO B	22.34	22.34	27.49	171.40
	HT8	151	5755	MIMO A	21.65	21.65	26.80	146.22
				MIMO B	21.29	21.29	26.44	134.59
				Combined A+B	24.48	24.48	29.63	280.80
		159	5795	MIMO A	21.63	21.63	26.78	145.55
				MIMO B	21.53	21.53	26.68	142.23
				Combined A+B	24.59	24.59	29.74	287.78
802.11ac80	VHT0	155	5775	SISO A	21.59	21.59	26.74	144.21
				SISO B	21.28	21.28	26.43	134.28
				MIMO A	19.68	19.68	24.83	92.90
				MIMO B	19.76	19.76	24.91	94.62
				Combined A+B	22.73	22.73	27.88	187.52

* Maximum values are the duty cycle compensated values calculated from the average (measured)

Max Value

Min Value

Mode	Rate	Channel	Freq [MHz]	Antenna	RU config.	Average Conducted Output Power [dBm]	Avg Max* Conducted Output Power [dBm]	Avg Max* EIRP [dBm]	Avg Max* Conducted Power [mW]
802.11ax/be20	MCS0	149	5745	SISO A	Full	23.59	23.59	28.74	228.56
					26/0	23.62	23.62	28.77	230.14
					52/37	23.81	23.81	28.96	240.44
					106/53	23.75	23.75	28.90	237.14
				SISO B	Full	23.57	23.57	28.72	227.51
					26/0	23.39	23.39	28.54	218.27
					52/37	23.56	23.56	28.71	226.99
					106/53	23.67	23.67	28.82	232.81
				MIMO A	Full	22.92	22.92	28.07	195.88
					26/0	23.06	23.06	28.21	202.30
					52/37	23.01	23.01	28.16	199.99
					106/53	23.06	23.06	28.21	202.30
				MIMO B	Full	22.69	22.69	27.84	185.78
					26/0	22.80	22.80	27.95	190.55
					52/37	22.88	22.88	28.03	194.09
					106/53	22.92	22.92	28.07	195.88
				Combined A+B	Full	25.82	25.82	30.97	381.66
					26/0	25.94	25.94	31.09	392.85
					52/37	25.96	25.96	31.11	394.07
					106/53	26.00	26.00	31.15	398.19
		157	5785	SISO A	Full	24.93	24.93	30.08	311.17
				SISO B	Full	24.69	24.69	29.84	294.44
				MIMO A	Full	22.68	22.68	27.83	185.35
				MIMO B	Full	22.73	22.73	27.88	187.50
				Combined A+B	Full	25.72	25.72	30.87	372.85
		165	5825	SISO A	Full	23.58	23.58	28.73	228.03
				SISO B	Full	23.25	23.25	28.40	211.35
				MIMO A	Full	22.42	22.42	27.57	174.58
				MIMO B	Full	22.49	22.49	27.64	177.42
				Combined A+B	Full	25.47	25.47	30.62	352.00
802.11ax/be40	MCS0	151	5755	SISO A	Full	21.94	21.94	27.09	156.31
					242/61	23.71	23.71	28.86	234.96
				SISO B	Full	21.88	21.88	27.03	154.17
					242/61	23.63	23.63	28.78	230.67
				MIMO A	Full	21.20	21.20	26.35	131.83
					242/61	22.77	22.77	27.92	189.23
				MIMO B	Full	21.11	21.11	26.26	129.12
					242/61	22.82	22.82	27.97	191.43
		159	5795	Combined A+B	Full	24.17	24.17	29.32	260.95
					242/61	25.81	25.81	30.96	380.66
				SISO A	Full	22.88	22.88	28.03	194.09
				SISO B	Full	22.20	22.20	27.35	165.96
				MIMO A	Full	21.77	21.77	26.92	150.31
				MIMO B	Full	20.98	20.98	26.13	125.31
				Combined A+B	Full	24.40	24.40	29.55	275.63
802.11ax/be80	MCS0	155	5775	SISO A	Full	21.76	21.76	26.91	149.97
					484/65	22.16	22.16	27.31	164.44
				SISO B	Full	21.45	21.45	26.60	139.64
					484/65	22.05	22.05	27.20	160.32
				MIMO A	Full	20.73	20.73	25.88	118.30
					484/65	21.47	21.47	26.62	140.28
				MIMO B	Full	20.42	20.42	25.57	110.15
					484/65	21.40	21.40	26.55	138.04
				Combined A+B	Full	23.59	23.59	28.74	228.46
					484/65	24.45	24.45	29.60	278.32

* Maximum values are the duty cycle compensated values calculated from the average (measured)

Max Value

Min Value

Maximum output power – Overlapped channels between U-NII-2C and U-NII-3

Mode	Rate	Channel	Freq [MHz]	Antenna	Chain	Average Cond. Output Power UNII-3 [dBm]	Max.* Cond. Output Power UNII-3 [dBm]	Max.* EIRP UNII-3 [dBm]	Max.* Cond. Output Power UNII-3 [mW]
802.11n20	HT0	144	5720	SISO	A	13.39	13.39	18.54	21.83
					B	13.56	13.56	18.71	22.70
	HT8			MIMO	A	10.56	10.56	15.71	11.38
					B	10.50	10.50	15.65	11.22
				Combined	A+B	13.54	13.54	18.69	22.60
802.11n40	HT0	142	5710	SISO	A	11.09	11.09	16.24	12.85
					B	10.92	10.92	16.07	12.36
	HT8			MIMO	A	8.15	8.15	13.30	6.53
					B	8.27	8.27	13.42	6.71
				Combined	A+B	11.22	11.22	16.37	13.25
802.11ac80	VHT0	138	5690	SISO	A	7.64	7.64	12.79	5.81
					B	7.93	7.93	13.08	6.21
				MIMO	A	4.62	4.62	9.77	2.90
					B	4.50	4.50	9.65	2.82
				Combined	A+B	7.57	7.57	12.72	5.72
802.11ax/be20	MCS0	144	5720	SISO	A	13.93	13.93	19.08	24.72
					B	13.84	13.84	18.99	24.21
				MIMO	A	10.77	10.77	15.92	11.94
					B	10.71	10.71	15.86	11.78
				Combined	A+B	13.75	13.75	18.90	23.72
802.11ax/be40	MCS0	142	5710	SISO	A	11.60	11.60	16.75	14.45
					B	11.61	11.61	16.76	14.49
				MIMO	A	8.71	8.71	13.86	7.43
					B	9.07	9.07	14.22	8.07
				Combined	A+B	11.90	11.90	17.05	15.50
802.11ax/be80	MCS0	138	5690	SISO	A	8.39	8.39	13.54	6.90
					B	8.56	8.56	13.71	7.18
				MIMO	A	5.31	5.31	10.46	3.40
					B	5.46	5.46	10.61	3.52
				Combined	A+B	8.40	8.40	13.55	6.91

* Maximum values are the duty cycle compensated values calculated from the average (measured)

Max Value

Min Value

Maximum Power Spectral Density (PSD) – U-NII-3 channels

Mode	Rate	Channel	Freq [MHz]	Antenna	Average conducted PSD [dBm/500kHz]	Max.* conducted PSD [dBm/500kHz]
802.11a	6Mbps	149	5745	SISO A	9.93	10.02
				SISO B	9.92	10.01
		157	5785	SISO A	11.16	11.25
				SISO B	10.98	11.07
		165	5825	SISO A	10.01	10.10
				SISO B	9.68	9.77
802.11n20	HT0	149	5745	SISO A	9.72	9.72
				SISO B	9.68	9.68
		157	5785	SISO A	10.97	10.97
				SISO B	10.73	10.73
		165	5825	SISO A	9.75	9.75
				SISO B	9.41	9.41
	HT8	149	5745	MIMO A	8.88	8.88
				MIMO B	8.82	8.82
				Combined A+B	11.86	11.86
				MIMO A	8.96	8.96
		157	5785	MIMO B	8.86	8.86
				Combined A+B	11.92	11.92
				MIMO A	8.97	8.97
				MIMO B	8.74	8.74
		165	5825	Combined A+B	11.87	11.87
802.11n40	HT0	151	5755	SISO A	4.41	4.41
				SISO B	3.90	3.90
		159	5795	SISO A	5.59	5.59
				SISO B	4.91	4.91
	HT8	151	5755	MIMO A	4.23	4.23
				MIMO B	3.87	3.87
				Combined A+B	7.06	7.06
		159	5795	MIMO A	4.26	4.26
				MIMO B	4.13	4.13
				Combined A+B	7.21	7.21
802.11ac80	VHT0	155	5775	SISO A	1.16	1.16
				SISO B	0.85	0.85
				MIMO A	-0.72	-0.72
				MIMO B	-0.66	-0.66
				Combined A+B	2.32	2.32

* Maximum values are the duty cycle compensated values calculated from the average (measured)

Max Value

Mode	Rate	Channel	Freq [MHz]	Antenna	RU config.	Average conducted PSD [dBm/500kHz]	Max.* conducted PSD [dBm/500kHz]
802.11ax/be20	MCS0	149	5745	SISO A	Full	9.41	9.41
					26/0	17.98	17.98
					52/37	15.17	15.17
					106/53	12.08	12.08
				SISO B	Full	9.38	9.38
					26/0	17.76	17.76
					52/37	14.96	14.96
					106/53	11.86	11.86
				MIMO A	Full	8.73	8.73
					26/0	17.37	17.37
					52/37	14.27	14.27
					106/53	11.19	11.19
				MIMO B	Full	8.37	8.37
					26/0	17.03	17.03
					52/37	14.17	14.17
					106/53	11.14	11.14
				Combined A+B	Full	11.56	11.56
					26/0	20.21	20.21
					52/37	17.23	17.23
					106/53	14.18	14.18
		157	5785	SISO A	Full	10.74	10.74
				SISO B	Full	10.46	10.46
				MIMO A	Full	8.53	8.53
				MIMO B	Full	8.48	8.48
				Combined A+B	Full	11.52	11.52
		165	5825	SISO A	Full	9.32	9.32
				SISO B	Full	8.96	8.96
				MIMO A	Full	8.24	8.24
				MIMO B	Full	8.30	8.30
				Combined A+B	Full	11.28	11.28
802.11ax/be40	MCS0	151	5755	SISO A	Full	4.33	4.33
					242/61	9.47	9.47
				SISO B	Full	4.31	4.31
					242/61	9.41	9.41
				MIMO A	Full	3.57	3.57
					242/61	8.58	8.58
				MIMO B	Full	3.52	3.52
					242/61	8.59	8.59
		159	5795	Combined A+B	Full	6.56	6.56
					242/61	11.60	11.60
				SISO A	Full	5.35	5.35
				SISO B	Full	4.67	4.67
				MIMO A	Full	4.15	4.15
				MIMO B	Full	3.42	3.42
				Combined A+B	Full	6.81	6.81
802.11ax/be80	MCS0	155a	5775	SISO A	Full	1.20	1.20
					484/65	4.51	4.51
				SISO B	Full	0.94	0.94
					484/65	4.44	4.44
				MIMO A	Full	0.21	0.21
					484/65	3.87	3.87
				MIMO B	Full	-0.10	-0.10
					484/65	3.81	3.81
				Combined A+B	Full	3.07	3.07
					484/65	6.85	6.85

* Maximum values are the duty cycle compensated values calculated from the average (measured)

Max Value

Maximum Power Spectral Density (PSD) – Overlapped channels between U-NII-2C and U-NII-3

Mode	Rate	Channel	Freq [MHz]	Antenna	Chain	Average conducted PSD [dBm/500kHz]	Max.* conducted PSD [dBm/500kHz]
802.11n20	HT0	144	5720	SISO	A	6.17	6.17
	B				6.37	6.37	
	HT8			MIMO	A	3.38	3.38
					B	3.44	3.44
	Combined			A+B	6.42	6.42	
802.11n40	HT0	142	5710	SISO	A	3.17	3.17
	B				2.88	2.88	
	HT8			MIMO	A	0.37	0.37
					B	0.51	0.51
	Combined			A+B	3.45	3.45	
802.11ac80	VHT0	138	5690	SISO	A	-0.30	-0.30
					B	-0.14	-0.14
				MIMO	A	-3.18	-3.18
					B	-3.32	-3.32
				Combined	A+B	-0.24	-0.24
802.11ax/be20	MCS0	144	5720	SISO	A	6.19	6.19
					B	6.13	6.13
				MIMO	A	3.08	3.08
					B	2.99	2.99
				Combined	A+B	6.05	6.05
802.11ax/be40	MCS0	142	5710	SISO	A	2.93	2.93
					B	2.82	2.82
				MIMO	A	0.07	0.07
					B	0.48	0.48
				Combined	A+B	3.29	3.29
802.11ax/be80	MCS0	138	5690	SISO	A	-0.39	-0.39
					B	-0.25	-0.25
				MIMO	A	-3.38	-3.38
					B	-3.23	-3.23
				Combined	A+B	-0.29	-0.29

* Maximum values are the duty cycle compensated values calculated from the average (measured)

Max Value

See Section B.3.1 for the screenshot results

B.2.3 Undesirable emission limits : out of band (Conducted)Test limits

FCC part	RSS clause	Limits
15.407 (b) (4)	RSS-247 Clause 6.2.4.2	For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Test procedure

The conducted setup shown in section *Test & System Description* was used to measure undesirable emissions on the Band Edge domain. The antenna terminal of the EUT is connected to the spectrum analyzer through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss and the declared antenna gain.

See Section B.3.2 for the screenshot results.

B.2.4 Radiated spurious emission

Standard references

FCC part	RSS clause	Limits																				
15.407 (b) (4)	RSS-247 Clause 6.2.4.2	For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.																				
15.209	RSS-GEN A1, Clause 8.9	Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a): <table><tr><th>Freq Range (MHz)</th><th>Field Strength (μV/m)</th><th>Field Strength (dBμV/m)</th><th>Meas. Distance (m)</th></tr><tr><td>30-88</td><td>100</td><td>40</td><td>3</td></tr><tr><td>88-216</td><td>150</td><td>43.5</td><td>3</td></tr><tr><td>216-960</td><td>200</td><td>46</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>54</td><td>3</td></tr></table> The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.	Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)	30-88	100	40	3	88-216	150	43.5	3	216-960	200	46	3	Above 960	500	54	3
Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)																			
30-88	100	40	3																			
88-216	150	43.5	3																			
216-960	200	46	3																			
Above 960	500	54	3																			

Test procedure

The radiated setup shown in section *Test & System Description* was used to measure the radiated spurious emissions. Depending of the frequency range and bands being tested, different antennas and filters were used. The final measurement is done by varying the antenna height, the EUT azimuth over 360° and for both Vertical and Horizontal polarizations.

According to ANSI c63.10, it might be possible to identify one or more specific operational modes that produce the “worst-case” test results with respect to all of the required technical limits (e.g., output power, power spectral density, unwanted emission power at the band edge and in all spurious emissions, and for each possible output data stream), and then reduce the testing to just these modes on each of the frequencies/channels required per Section 15.31(m).

In order to determine the worst case, a comprehensive evaluation was performed by varying all available bandwidths and operational modes. The results indicated that the narrowest bandwidth (20 MHz) represents the worst case, as it resulted in the lowest margins to the applicable spurious emission limits. Radiated spurious emissions were measured on the lowest, middle and highest channels.

For the 20 MHz bandwidth, only the operational modes identified as worst-case were retained and reported in this test report.

Test Results**Radiated spurious - 30 MHz – 1 GHz****Radiated Spurious – All modes**

Frequency	MaxPeak	Limit	Margin	Polarization
MHz	dBµV/m	dBµV/m	dB	---
228.2	23.2	46	22.8	H

1 GHz – 40 GHz, 802.11ax/be20, MCS0, Chain A**Radiated Spurious – CH157**

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
10649.5	58.9	Peak	74.0	15.1	V
10649.5	48.0	Average	54.0	6.0	H
11552.5	48.2	Peak	74.0	25.8	H
11552.5	42.5	Average	54.0	11.5	H
23106.0	54.8	Peak	74.0	19.2	V
23106.0	47.9	Average	54.0	6.1	V
28883.8	53.5	Peak	68.2	14.7	V

1 GHz – 40 GHz, 802.11ax/be20, MCS0, Chain B**Radiated Spurious – CH157**


Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
10649.5	58.9	Peak	74.0	15.1	V
10649.5	48.0	Average	54.0	6.0	H
11552.5	48.2	Peak	74.0	25.8	H
11552.5	42.5	Average	54.0	11.5	H
23106.0	54.8	Peak	74.0	19.2	V
23106.0	47.9	Average	54.0	6.1	V
28883.8	53.5	Peak	68.2	14.7	V

1 GHz – 40 GHz, 802.11ax/be20, MCS0, Chain A+B**Radiated Spurious – CH149**

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
4780.7	61.2	Peak	74.0	12.8	H
4780.7	52.9	Average	54.0	1.1	H
10584.5	64.3	Peak	68.2	3.9	V
22946.1	50.1	Average	54.0	3.9	V


B.3 Test Results Screenshot

B.3.1 Maximum output power per BW

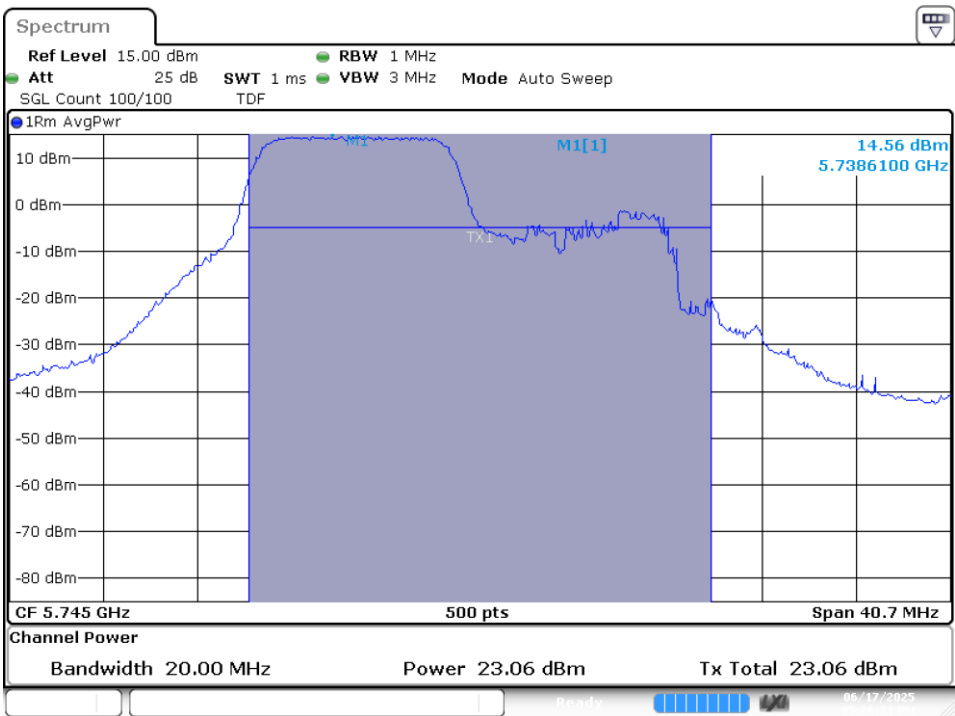


17 JUN 2025 17:28:34

MIMO A-802.11ax/be20-Ch149-5745MHz-MCS0

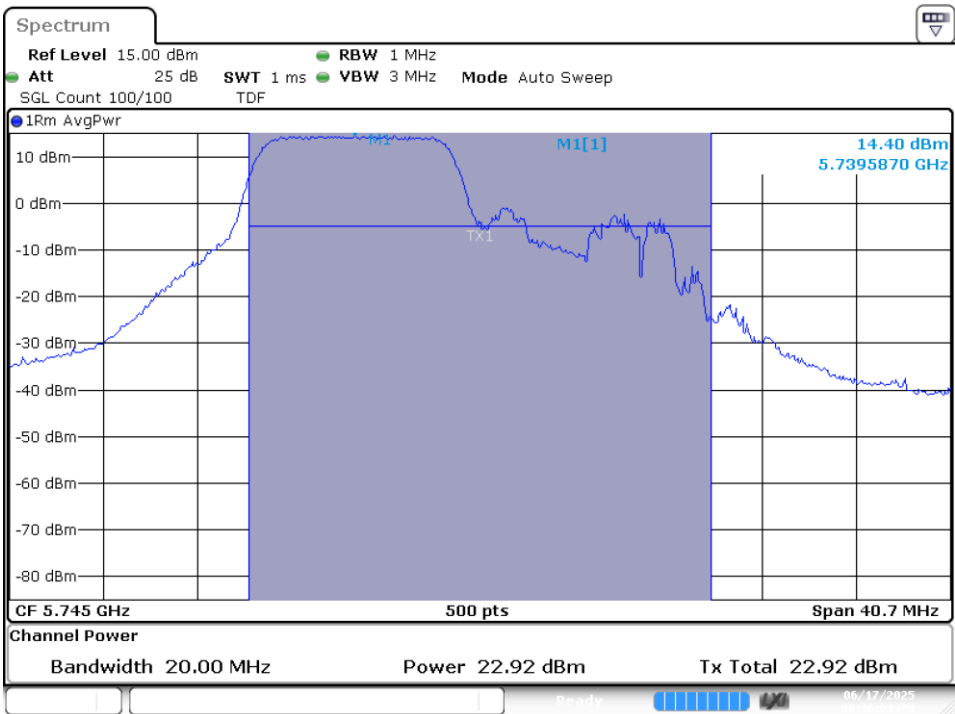


17 JUN 2025 18:40:03


MIMO B-802.11ax/be20-Ch149-5745MHz-MCS0

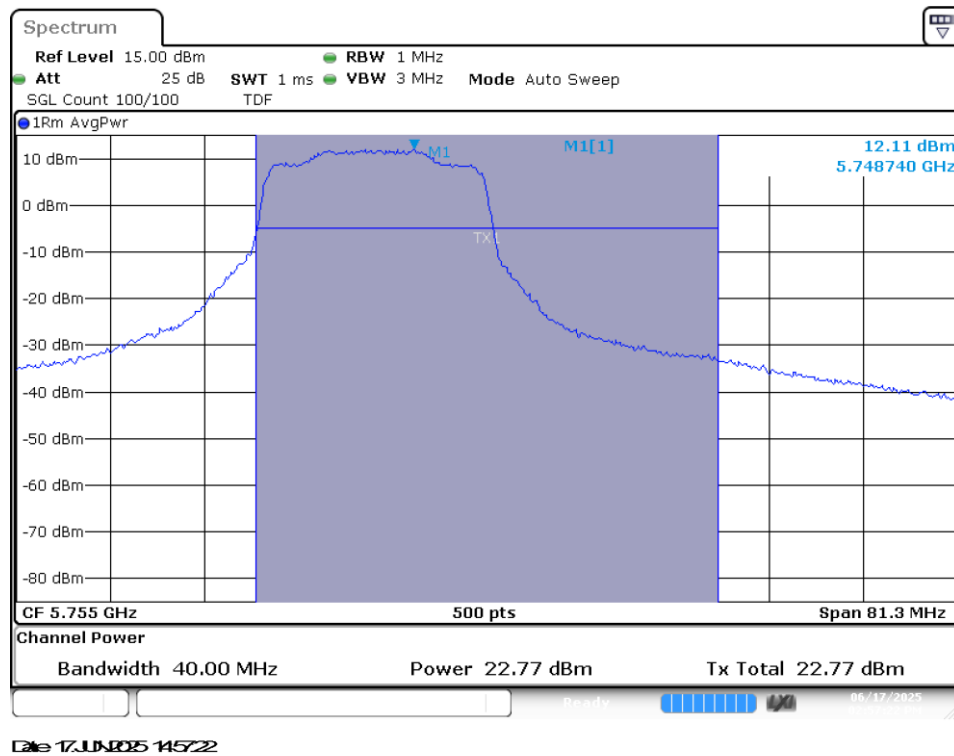


MIMO A-802.11ax/be40-Ch151-5755MHz-MCS0

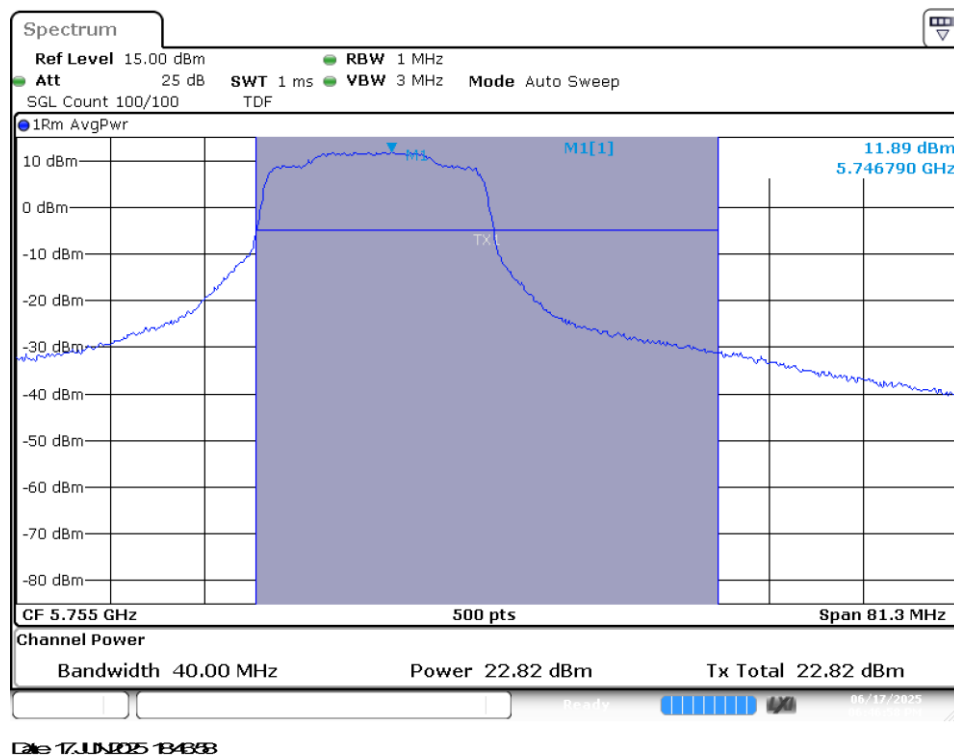

MIMO B-802.11ax/be40-Ch151-5755MHz-MCS0

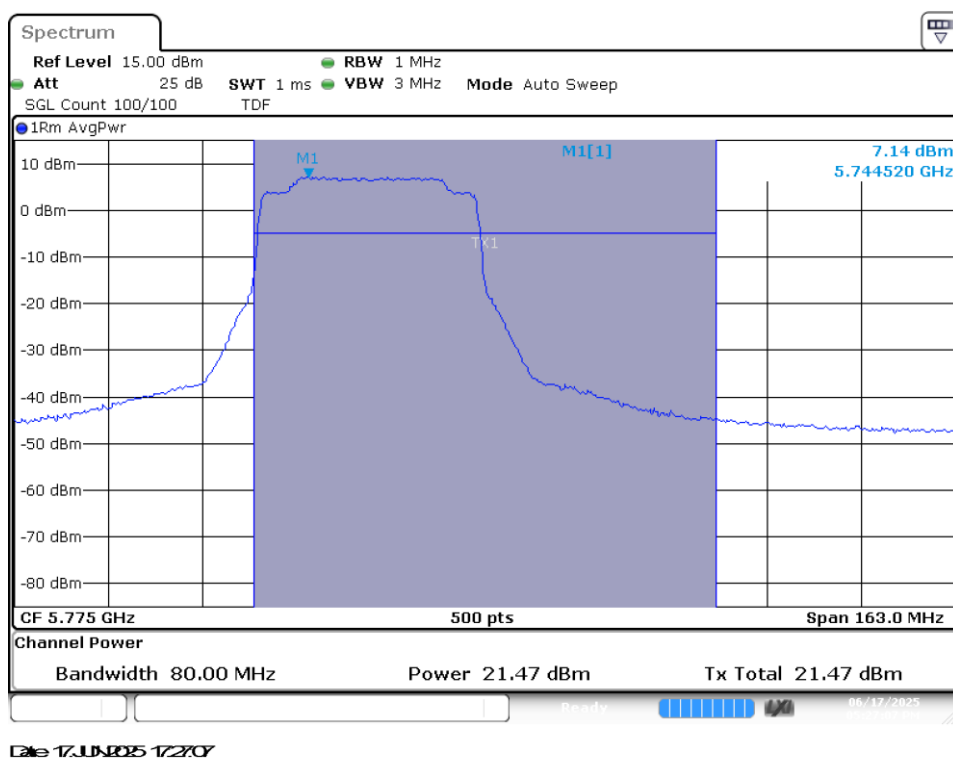


MIMO A-802.11ax/be80-Ch155-5775MHz-MCS0

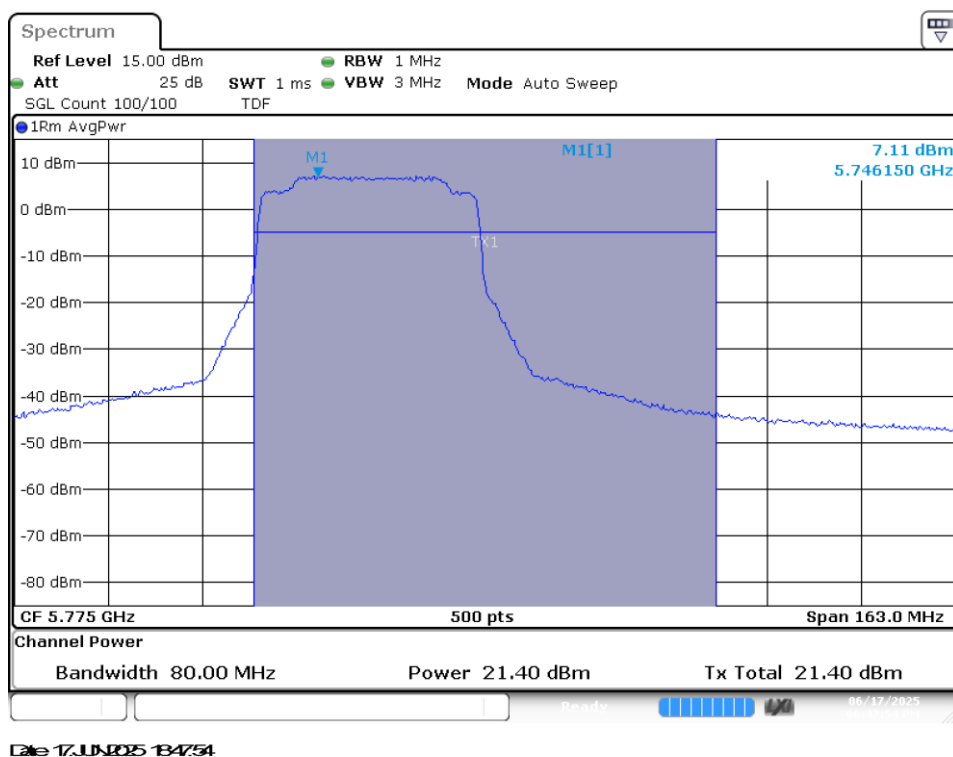


MIMO B-802.11ax/be80-Ch155-5775MHz-MCS0


B.3.2 Undesirable emission limits : out of band (Conducted)

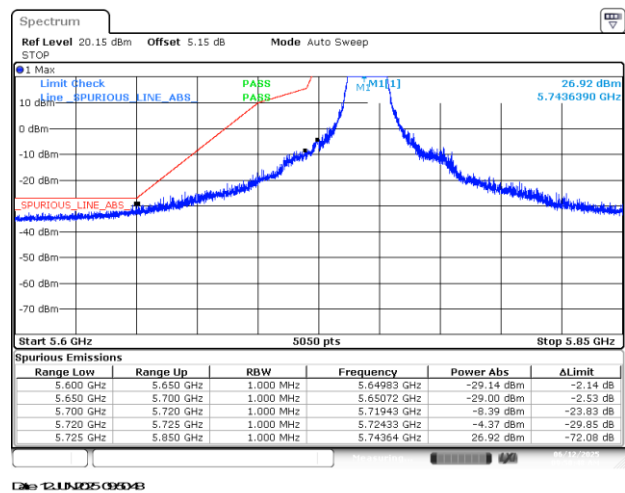


BE-NR-LOW, SISO-A, 802.11a-6Mbps, Ch149

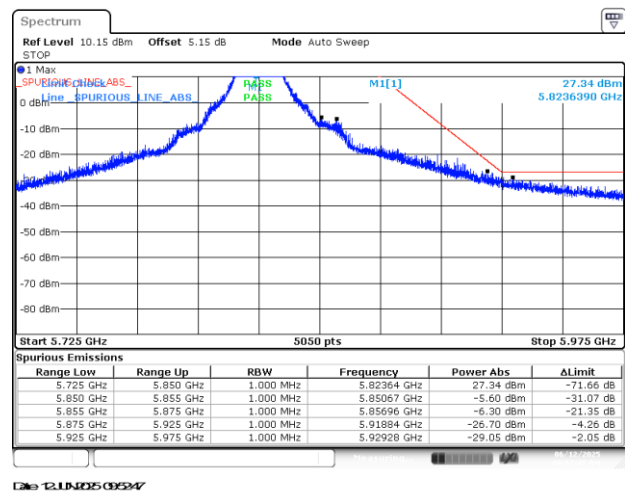


BE-NR-HIGH, SISO-A, 802.11a-6Mbps, Ch165

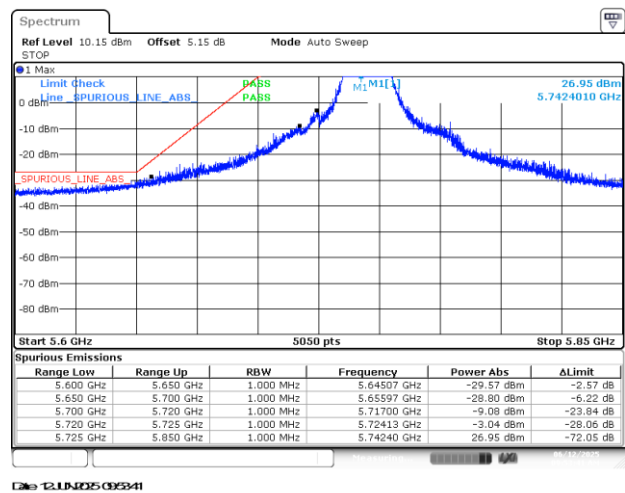


BE-NR-LOW, SISO-A, 802.11n20-HT0, Ch149

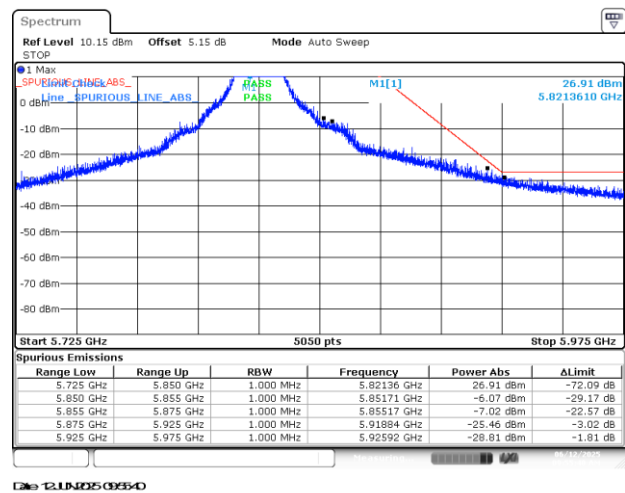


BE-NR-HIGH, SISO-A, 802.11n20-HT0, Ch165

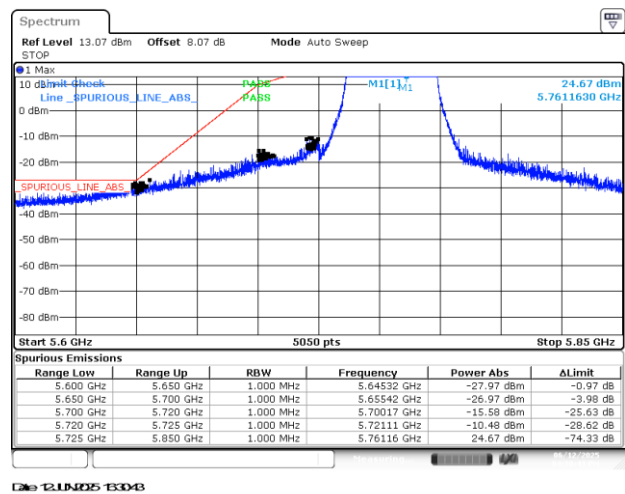


BE-NR-LOW, SISO-A, 802.11n40-HT0, Ch151

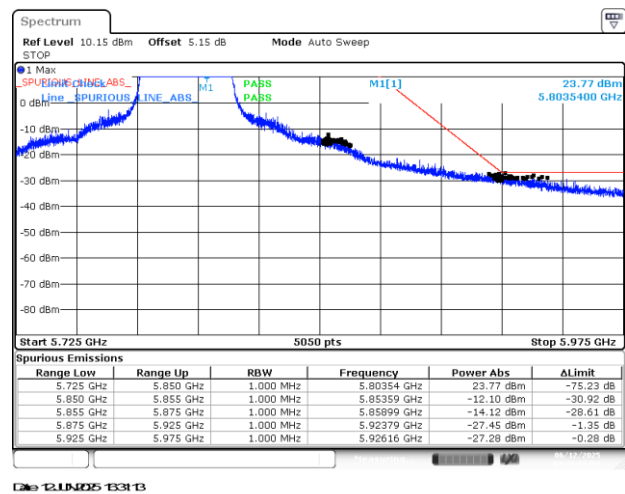


BE-NR-HIGH, SISO-A, 802.11n40-HT0, Ch159

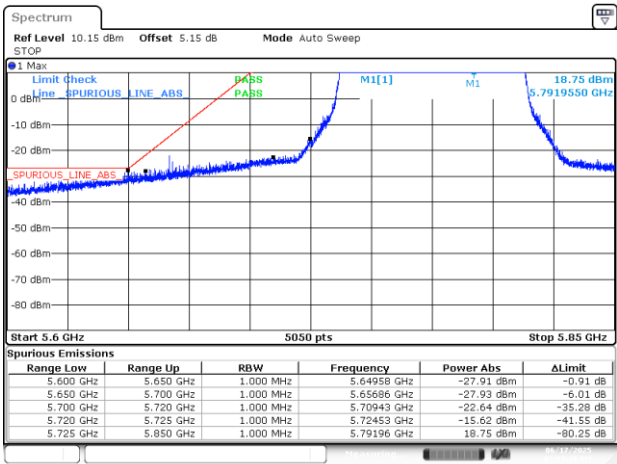


BE-NR-LOW, SISO-A, 802.11ac80-VHT0, Ch155

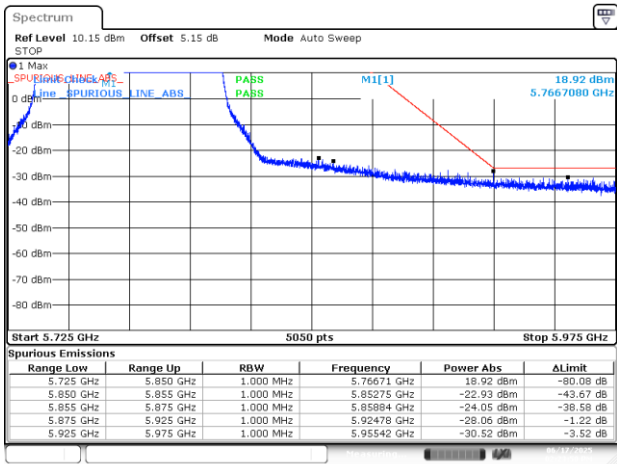


BE-NR-HIGH, SISO-A, 802.11ac80-VHT0, Ch155

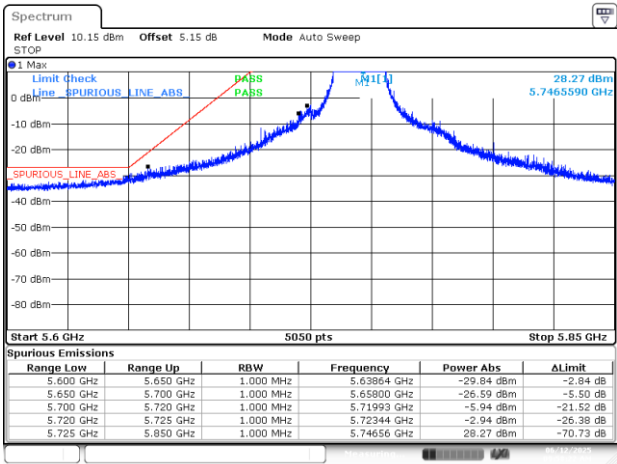


BE-NR-LOW, SISO-A, 802.11ax/be20-MCS0, Ch149

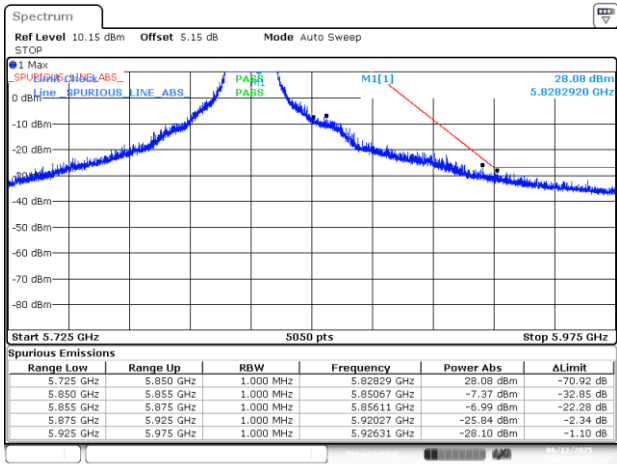


BE-NR-HIGH, SISO-A, 802.11ax/be20-MCS0, Ch165

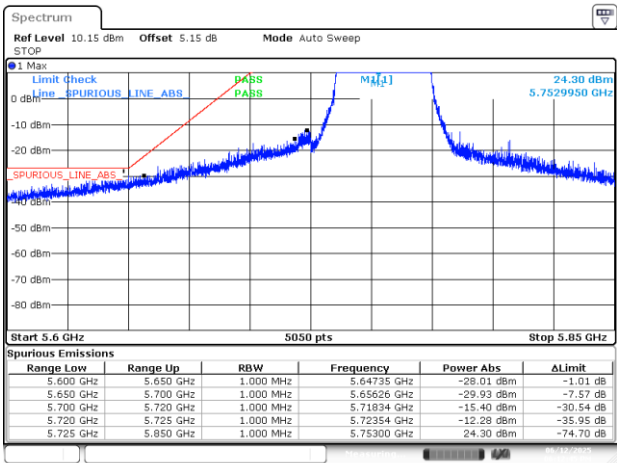


BE-NR-LOW, SISO-A, 802.11ax/be40-MCS0, Ch151

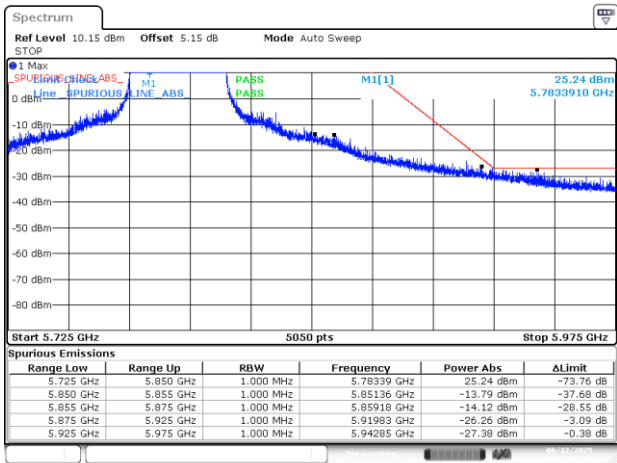

BE-NR-HIGH, SISO-A, 802.11ax/be40-MCS0, Ch159

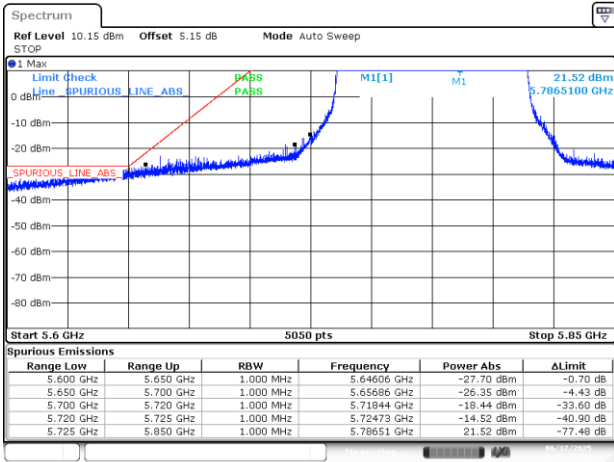


BE-NR-LOW, SISO-A, 802.11ax/be80-MCS0, Ch155

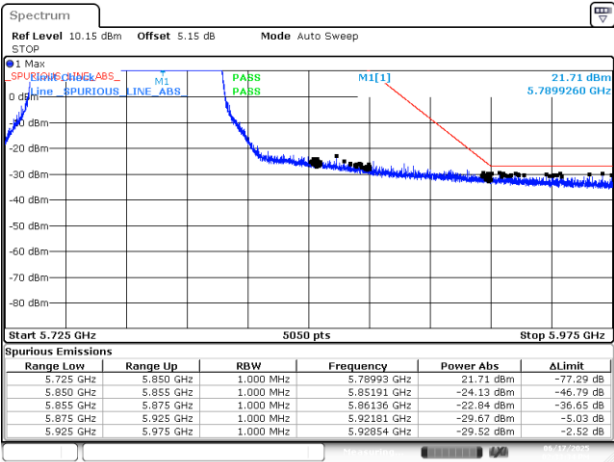


BE-NR-HIGH, SISO-A, 802.11ax/be80-MCS0, Ch155


BE-

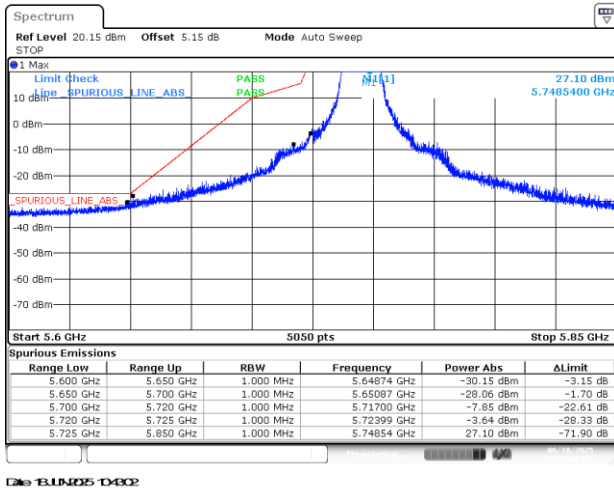


BE-NR-LOW, SISO-B, 802.11a-6Mbps, Ch149

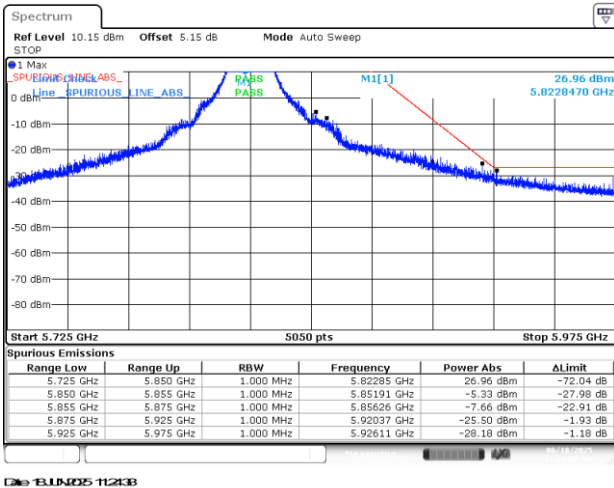


BE-NR-HIGH, SISO-B, 802.11a-6Mbps, Ch165

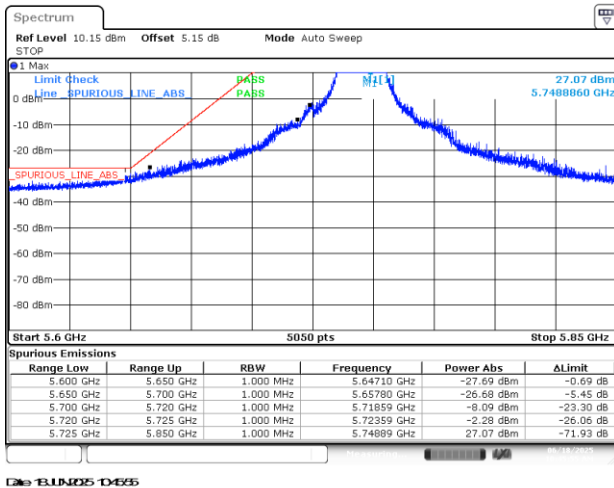


BE-NR-LOW, SISO-B, 802.11n20-HT0, Ch149

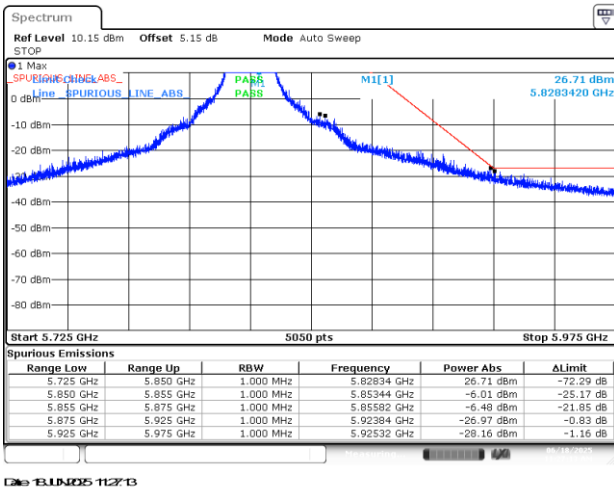

BE-NR-HIGH, SISO-B, 802.11n20-HT0, Ch165

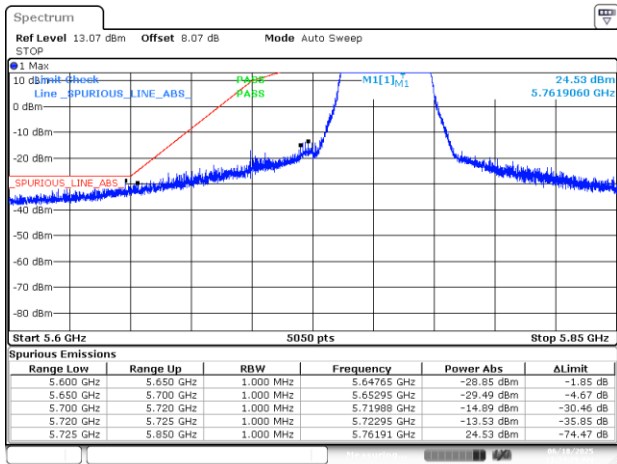


BE-NR-LOW, SISO-B, 802.11n40-HT0, Ch151

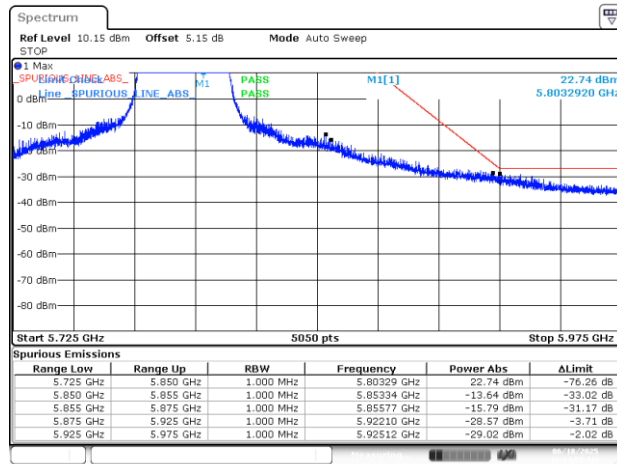


BE-NR-LOW, SISO-B, 802.11n40-HT0, Ch159


BE-

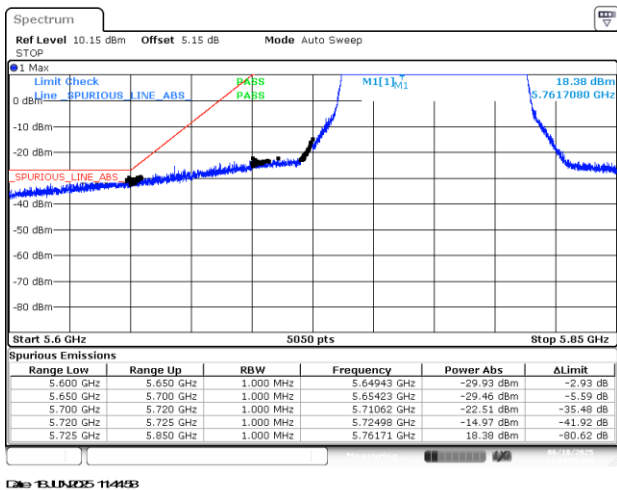


BE-NR-LOW, SISO-B, 802.11ac80-VHT0, Ch155

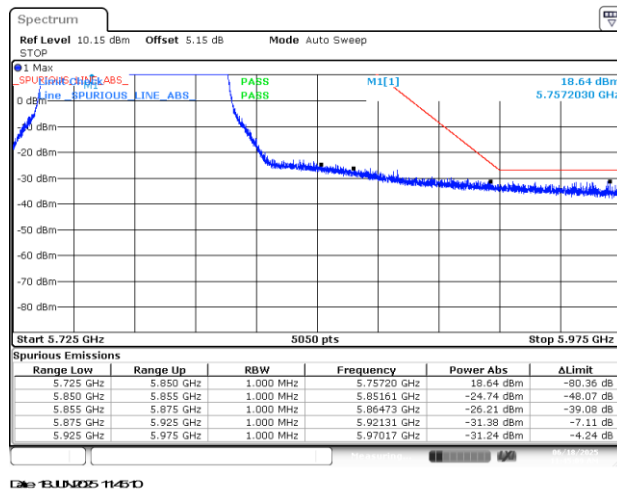

BE-NR-HIGH, SISO-B, 802.11ac80-VHT0, Ch155

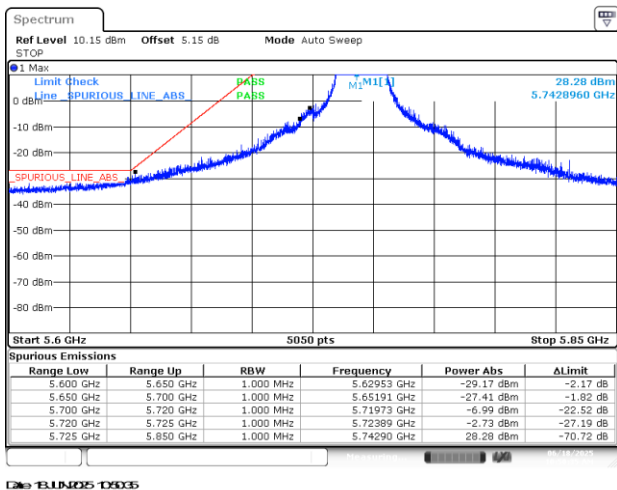


BE-NR-LOW, SISO-B, 802.11ax/be20-MCS0, Ch149

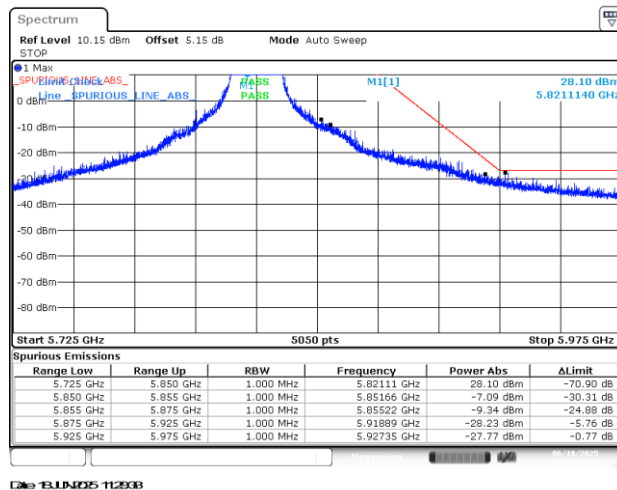


BE-NR-LOW, SISO-B, 802.11ax/be20-MCS0, Ch165


BE-

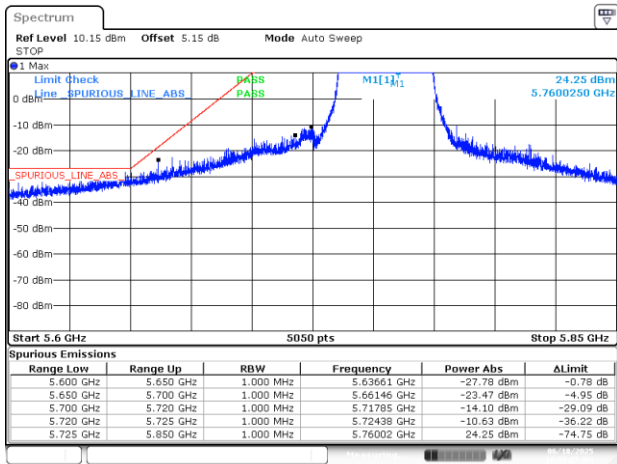


BE-NR-LOW, SISO-B, 802.11ax/be40-MCS0, Ch151

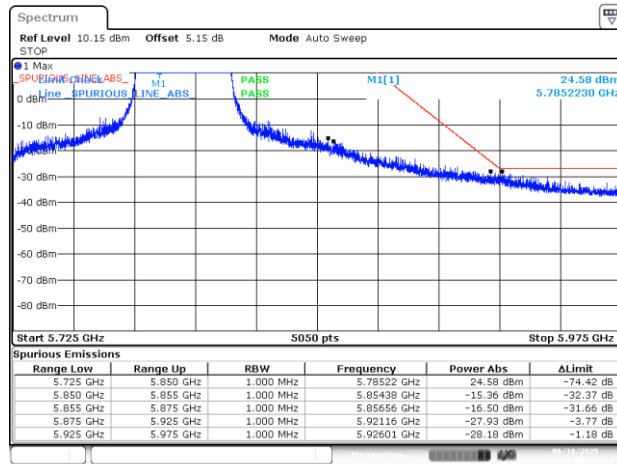


BE-NR-LOW, SISO-B, 802.11ax/be40-MCS0, Ch159

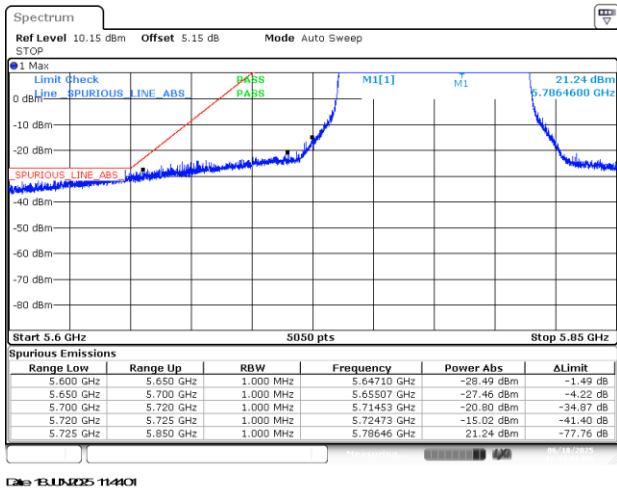


BE-NR-LOW, SISO-B, 802.11ax/be80-MCS0, Ch155

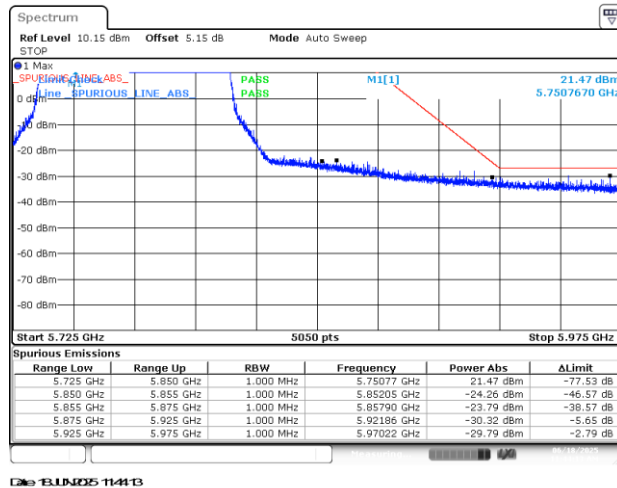


BE-NR-LOW, SISO-B, 802.11ax/be80-MCS0, Ch155

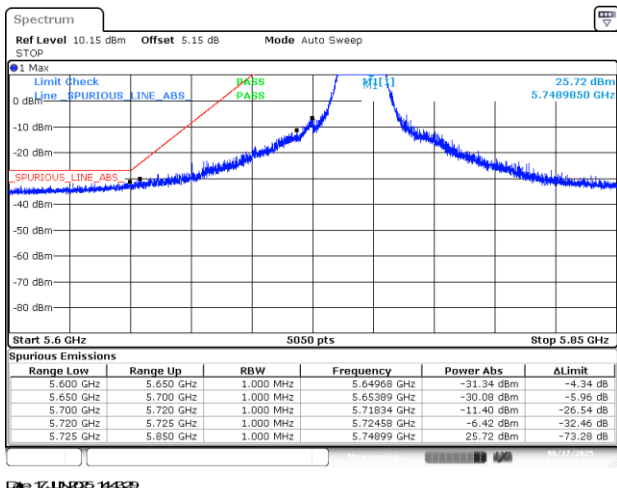


BE-NR-LOW, MIMO-A, 802.11n20-HT8, Ch149

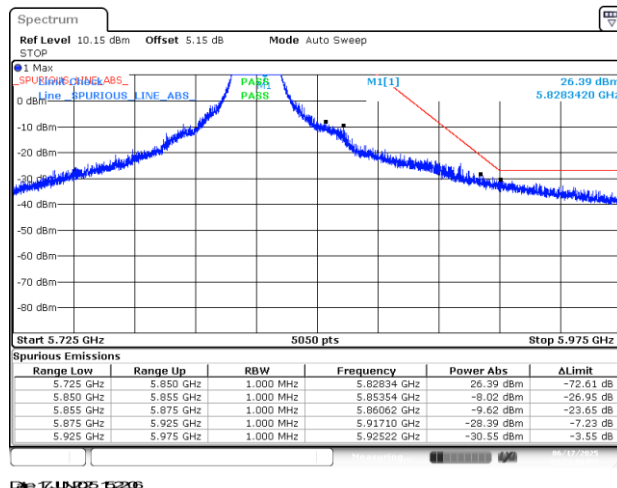

BE-NR-HIGH, MIMO-A, 802.11n20-HT8, Ch165

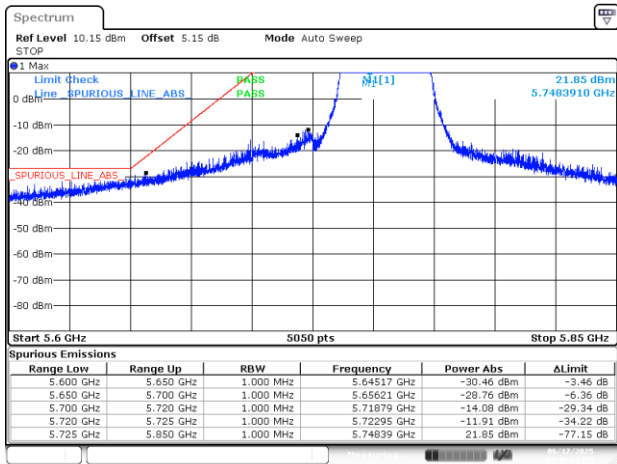


BE-NR-LOW, MIMO-A, 802.11n40-HT8, Ch151

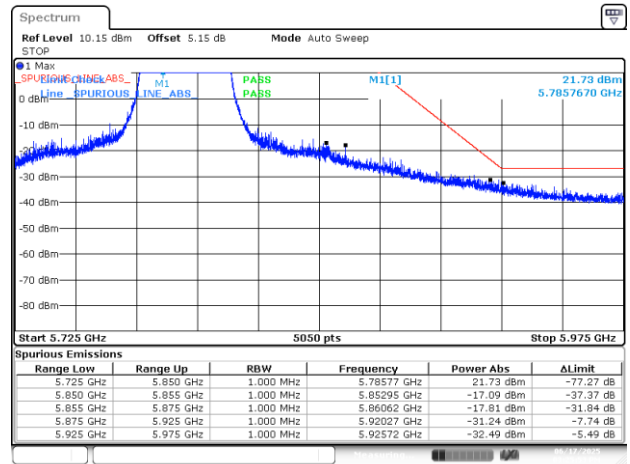


BE-NR-HIGH, MIMO-A, 802.11n40-HT8, Ch150


BE-

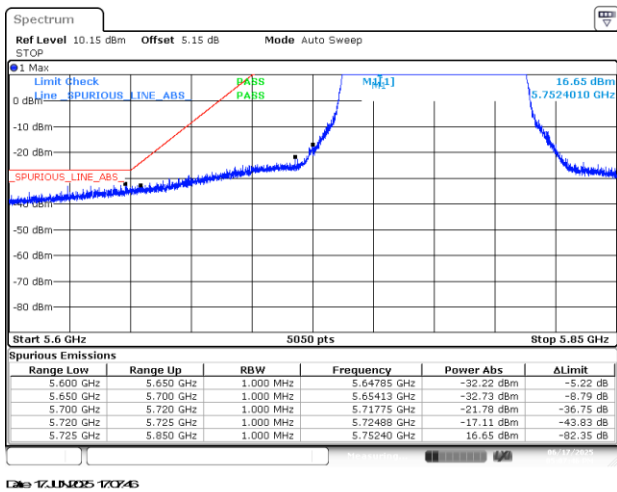


BE-NR-LOW, MIMO-A, 802.11ac80-VHT0, Ch155

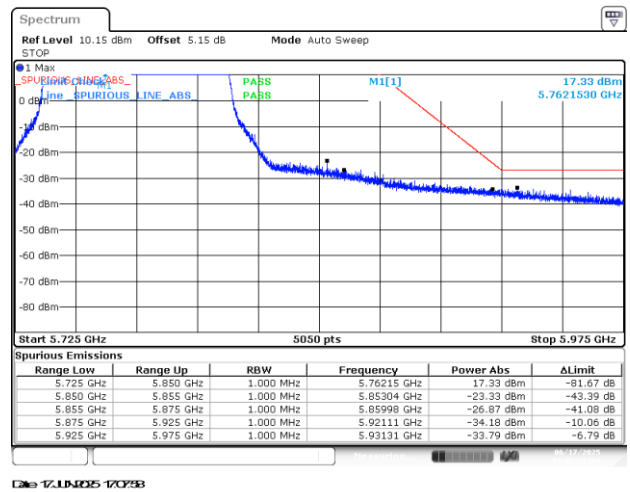

BE-NR-HIGH, MIMO-A, 802.11ac80-VHT0, Ch155

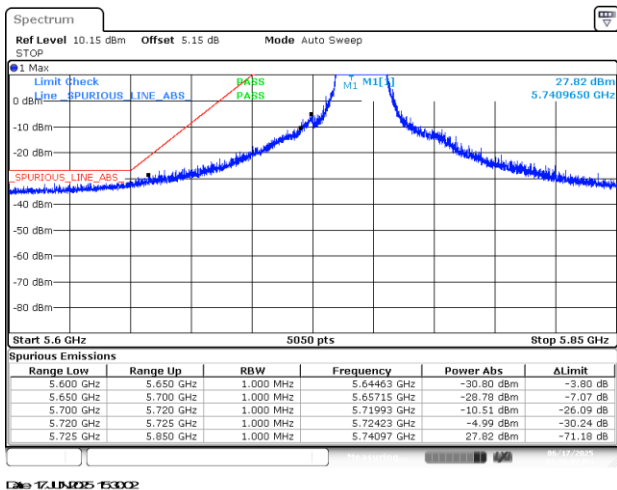


BE-NR-LOW, MIMO-A, 802.11ax/be20-MCS0, Ch149

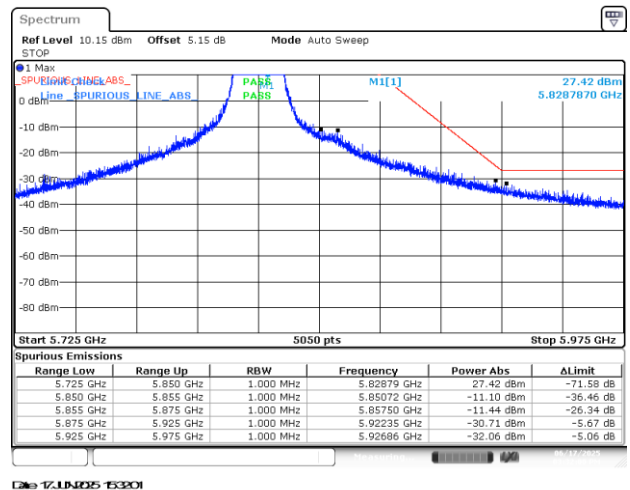


BE-NR-HIGH, MIMO-A, 802.11ax/be20-MCS0, Ch165


BE-

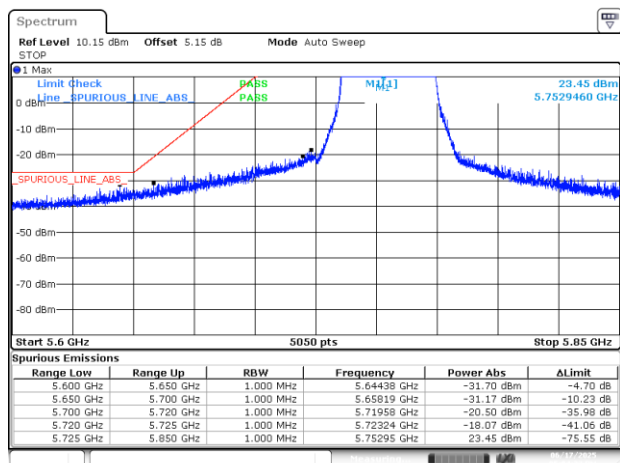


BE-NR-LOW, MIMO-A, 802.11ax/be40-MCS0, Ch151

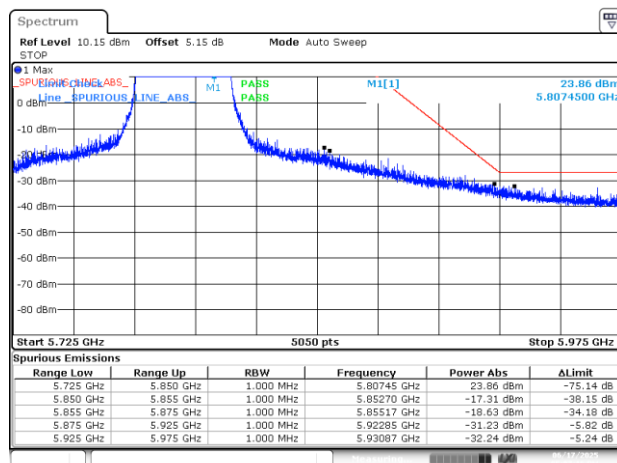


BE-NR-HIGH, MIMO-A, 802.11ax/be40-MCS0, Ch159

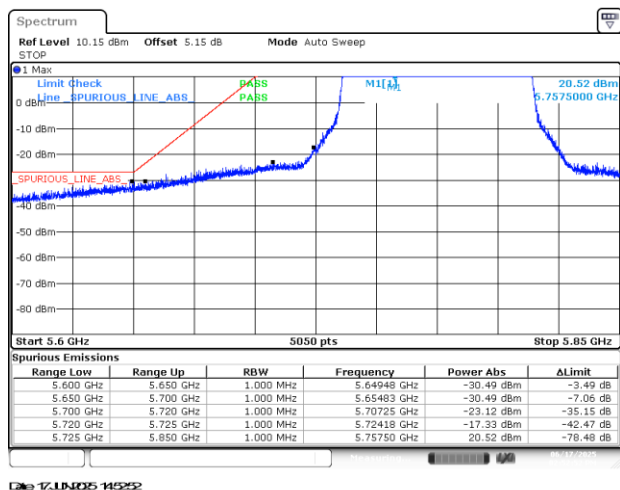


BE-NR-LOW, MIMO-A, 802.11ax/be80-MCS0, Ch155

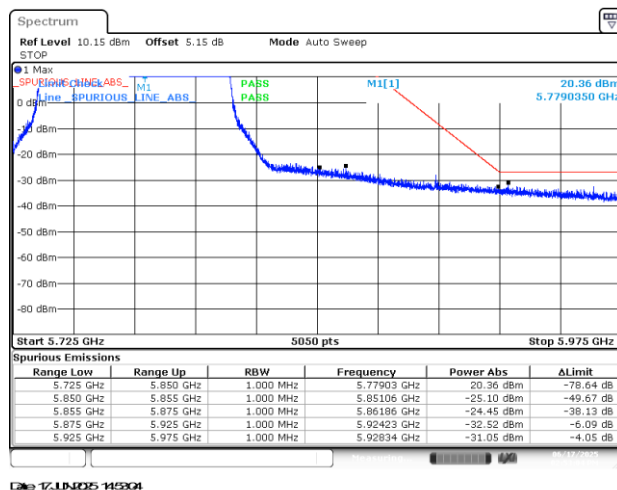


BE-NR-HIGH, MIMO-A, 802.11ax/be80-MCS0, Ch155

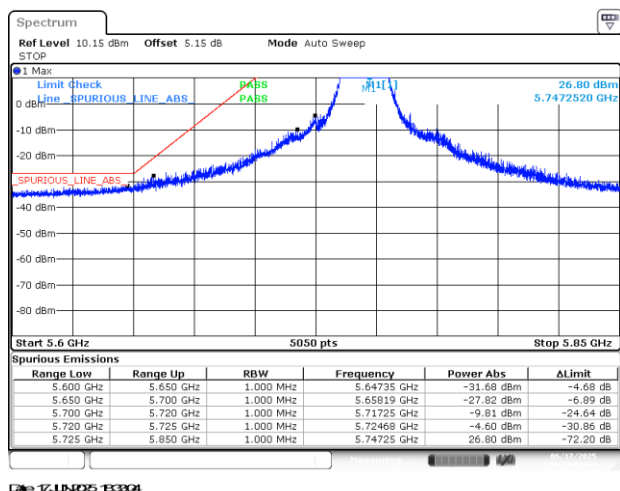


BE-NR-LOW, MIMO-B, 802.11n20-HT8, Ch149

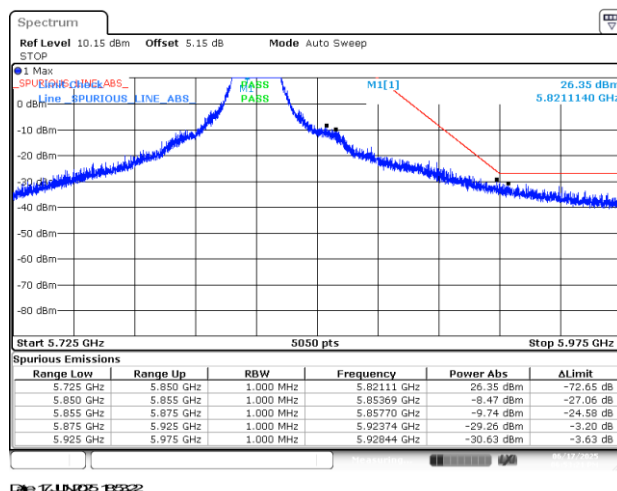

BE-NR-HIGH, MIMO-B, 802.11n20-HT8, Ch165

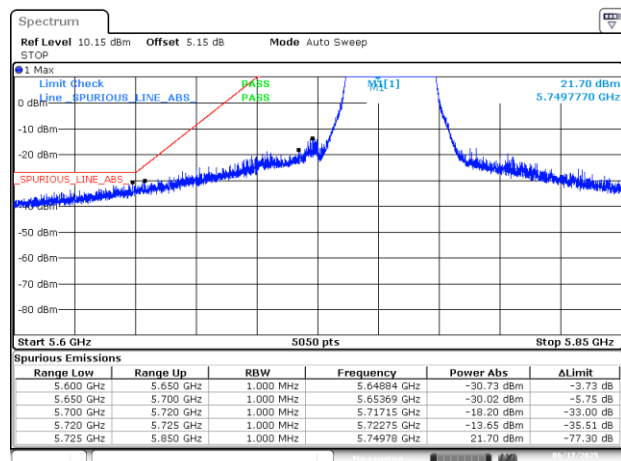


BE-NR-LOW, MIMO-B, 802.11n40-HT8, Ch151

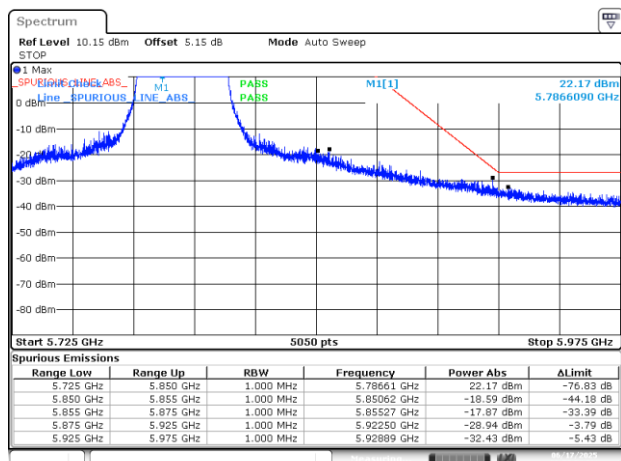


BE-NR-HIGH, MIMO-B, 802.11n40-HT8, Ch150


BE-

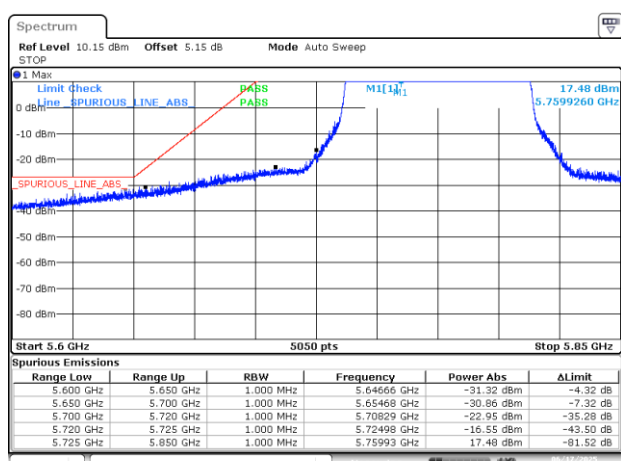


BE-NR-LOW, MIMO-B, 802.11ac80-VHT0, Ch155

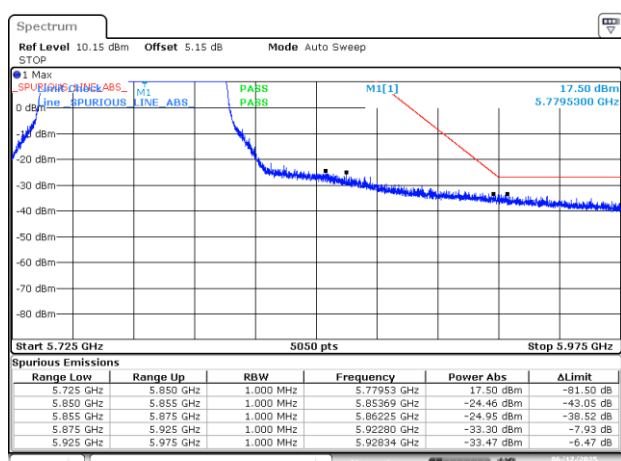

BE-NR-HIGH, MIMO-B, 802.11ac80-VHT0, Ch155

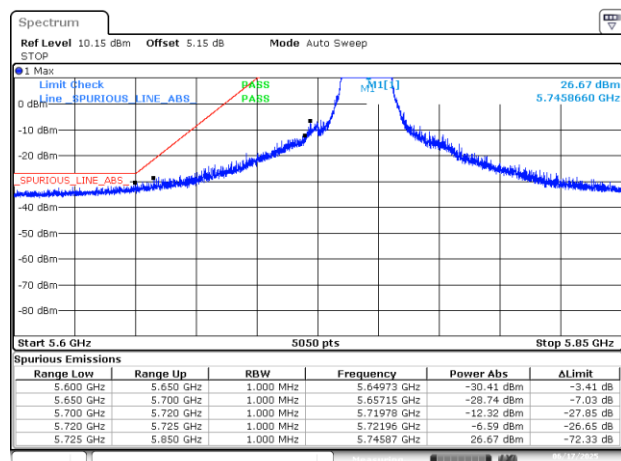


BE-NR-LOW, MIMO-B, 802.11ax/be20-MCS0, Ch149

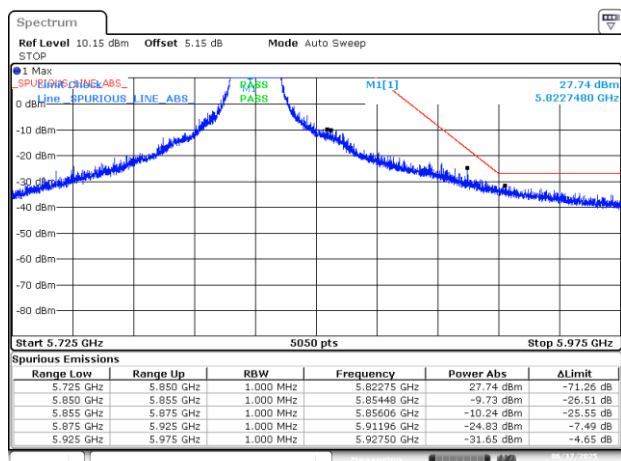


BE-NR-HIGH, MIMO-B, 802.11ax/be20-MCS0, Ch165


BE-

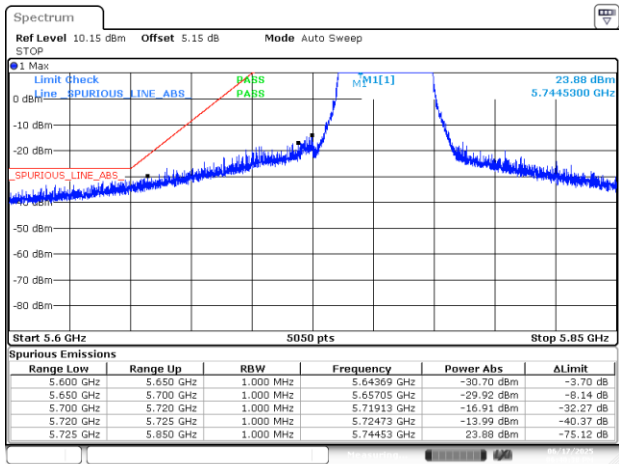


BE-NR-LOW, MIMO-B, 802.11ax/be40-MCS0, Ch151

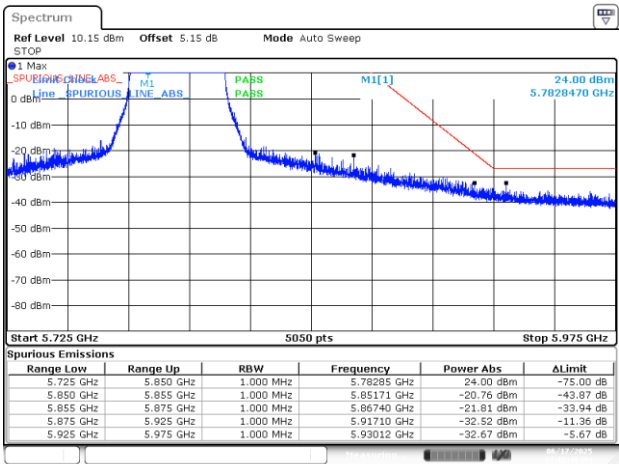

BE-NR-LOW, MIMO-B, 802.11ax/be40-MCS0, Ch159

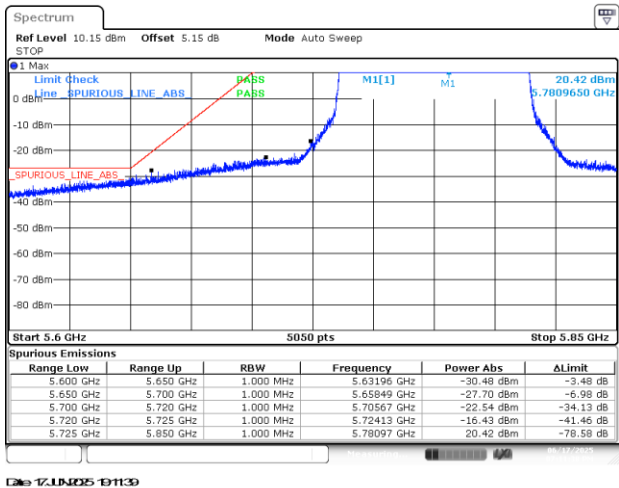

BE-NR-LOW, MIMO-B, 802.11ax/be80-MCS0, Ch155

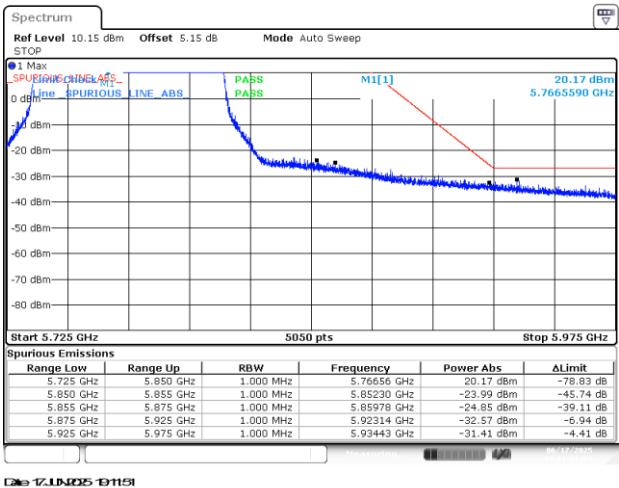

BE-NR-LOW, MIMO-B, 802.11ax/be80-MCS0, Ch155