

TEST REPORT

EUT Description	WLAN and BT, 2x2 PCIe M.2 2230 adapter card
Brand Name	Intel® BE211NGW
Model Name	BE211NGW, BE211NGW M
FCC/ISED ID	FCC ID: PD9BE211NG / IC ID: 1000M-BE211NG
Date of Test Start/End	2025-06-09 / 2025-06-23
Features	2x2 Wi-Fi - Bluetooth® (see section 5)

Applicant	Intel Corporation SAS
Address	425 Rue de Goa – Le Cargo B6 – 06600 Antibes, FRANCE
Contact Person	Benjamin Lavenant
Telephone/Fax/ Email	Benjamin.lavenant@intel.com

Reference Standards	FCC CFR Title 47 Part 15 E RSS-247 issue 3, RSS-Gen A1 issue 5 - A1 (see section 1)
---------------------	---

Test Report identification	250519-01.TR02
Revision Control	Rev. 00 This test report revision replaces any previous test report revision (see section 8)

The test results relate only to the samples tested.
Reference to accreditation shall be used only by full reproduction of test report.

Issued by

Reviewed by

Zayd OUACHICHA
(Test Engineer Lead)

Ines KHARRAT
(Technical Officer)

Intel Corporation S.A.S – WRF Lab
425 rue de Goa – Le Cargo B6 - 06600, Antibes, France
Tel. +33493001400 / Fax +33493001401

Table of Contents

1.	Standards, reference documents and applicable test methods	3
2.	General conditions, competences and guarantees	3
3.	Environmental Conditions.....	4
4.	Test samples.....	4
5.	EUT Features	5
6.	Remarks and comments.....	5
7.	Test Verdicts summary.....	6
7.1.	802.11 A/N/AC/AX/BE – U-NII- 4	6
8.	Document Revision History	6
Annex A.	Test & System Description.....	7
A.1	MEASUREMENT SYSTEM.....	7
A.2	TEST EQUIPMENT LIST	7
A.3	MEASUREMENT UNCERTAINTY EVALUATION	7
Annex B.	Test Results U-NII-4.....	8
B.1	TEST CONDITIONS.....	8
B.2	TEST RESULTS TABLES	9
B.2.1	6dB & 99% Bandwidth	9
B.2.2	Maximum output power & Maximum power spectral Density	11
B.2.3	Undesirable emission limits : out of band (Conducted).....	17
B.3	TEST RESULTS SCREENSHOT	18
B.3.1	Maximum output power per Bandwidth	18
B.3.2	Undesirable emission limits : out of band (Conducted).....	21
Annex C.	Photographs	48
C.1	TEST SETUP	48
C.2	TEST SAMPLE	49

1. Standards, reference documents and applicable test methods

FCC	1. FCC Title 47 CFR part 15 – Subpart E – Unlicensed National Information Infrastructure Devices. 2024-10-01 Edition 2. FCC Title 47 CFR part 15 – Subpart C – §15.209 Radiated emission limits; general requirements. 2024-10-01 Edition 3. FCC OET KDB 662911 D01 v02r01 - Emissions Testing of Transmitters with Multiple Outputs in the Same Band. 4. FCC OET KDB 789033 D02 v02r01 - Guidelines for compliance testing of unlicensed national information infrastructure (U-NII) devices part 15, subpart E 5. ANSI C63.10-2020 American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. 6. FCC OET KDB 291074 D01 v01 - General Requirements 7. FCC OET KDB 291074 D02 v01 - EMC Measurement 8. FCC OET KDB 291074 D03 v01 - QA General Questions and Answers 9. FCC OET KDB 291074 D04 v01 – UN5GHz Checklist v01
ISED	1. RSS-247 Issue 3 - Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and License-Exempt Local Area Network (LE-LAN) Devices. 2. RSS-Gen Issue 5 A1- General Requirements for Compliance of Radio Apparatus 3. ANSI C63.10-2020+Cor2023+Amd2024 American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. 4. FCC OET KDB 291074 D01 v01 - General Requirements 5. FCC OET KDB 291074 D02 v01 - EMC Measurement 6. FCC OET KDB 291074 D03 v01 - QA General Questions and Answers 7. FCC OET KDB 291074 D04 v01 – UN5GHz Checklist v01

2. General conditions, competences and guarantees

- ✓ Tests performed under FCC standards identified in section 1 are covered by A2LA accreditation.
- ✓ Tests performed under ISED standards identified in section 1 are covered by Cofrac accreditation.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an ISO/IEC 17025:2017 laboratory accredited by the American Association for Laboratory Accreditation (A2LA) with the certificate number 3478.01.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an Accredited Test Firm recognized by the FCC, with Designation Number FR0011.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an ISO/IEC 17025:2017 testing laboratory accredited by the French Committee for Accreditation (Cofrac) with the certificate number 1-6736.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is a Registered Test Site listed by ISED, with ISED company number 1000Y and CAB identifier FR0005.
- ✓ Intel WRF Lab only provides testing services and is committed to providing reliable, unbiased test results and interpretations.
- ✓ Intel WRF Lab is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.
- ✓ Intel WRF Lab has developed calibration and proficiency programs for its measurement equipment to ensure correlated and reliable results to its customers.
- ✓ This report is only referred to the item that has undergone the test.
- ✓ This report does not imply an approval of the product by the Certification Bodies or competent Authorities.

3. Environmental Conditions

✓ At the site where the measurements were performed the following limits were not exceeded during the tests:

Temperature	Min: 21.27°C Max: 27.42°C AVG: 24.52°C
Humidity	Min: 36.33% Max: 67.06% AVG: 49.45%

4. Test samples

Sample	Control #	Description	Model	Serial #	Date of receipt	Note
#01	250514-01.S04	Module	BE211NGW	28920086B915	2025-05-14	Used for Conducted tests
	230824-01.S02	Laptop	HP Willie	A5CD32257RT	2023-08-28	
	231109-03.S70	Extender Mother Board	PCB00887-00_A	2207308398	2024-06-05	
	230526-08.S03	Extender Daughter Board	PCB00862-00_A	2202207510	2023-05-26	
#02	250514-01.S13	Module	BE211NGW	FC6D77BADAC4	2025-06-17	
	210916-09.S03	Laptop	HP HSN-I45C	000176090Y	2021-12-10	
	240000-01.S07	Extender Mother Board	PCB00887-00_A	2202130047	2024-12-12	
	240000-01.S08	Extender Daughter Board	PCB00862-00_A	2305108213	2024-12-12	

5. EUT Features

The herein information is provided by the customer.

Intel WRF Lab declines any responsibility for the accuracy of the stated customer provided information, especially if it has any impact on the correctness of test results presented in this report.

Brand Name	Intel® BE211NGW		
Model Name	BE211NGW		
Software Version	DRTU.08798.99.0.99		
Driver Version	99.0.99.2		
Prototype / Production	Production		
Supported Radios	802.11b/g/n/ac/ax/be 802.11a/n/ac/ax/be 802.11ax/be Bluetooth 2.4GHz 5.2GHz 5.6GHz 5.8GHz 5.9GHz 6.0GHz 2.4GHz		
Antenna Information	Transmitter	Chain A(1)	Chain B(2)
	Manufacturer	Intel WRF Lab	Intel WRF Lab
	Antenna type	PIFA	PIFA
	Part number	WRF-Tri Band-Antenna	WRF-Tri Band-Antenna
	Declared antenna gain (dBi)	+5.15	+5.15

6. Remarks and comments

- No deviations were made from the test methods listed in section 1 of this report
- Only the worst-case plot per BW have been reported excepted for band edge measurements where all plots are reported

7. Test Verdicts summary

The statement of conformity to applicable standards in the table below are based on the measured values, without taking into account the measurement uncertainties.

7.1. 802.11 a/n/ac/ax/be – U-NII- 4

FCC part	RSS part	Test name	Verdict
15.407 (a) (3)	RSS-247 Clause 6.2.5.2	Maximum output power	P
14.407 (e)	RSS-247 Clause 6.2.5.2	6dB Emission Bandwidth	P
15.407 (a) (13)	RSS-247 Clause 6.2.5.2	Power spectral density	P
15.407 (b) (5)	RSS-247 Clause 6.2.5.3	Undesirable emissions limits: out of band (conducted)	P

P: Pass
F: Fail
NM: Not Measured
NA: Not Applicable

8. Document Revision History


Revision #	Modified by	Revision Details
Rev. 00	Zayd Ouachicha	First Issue

Annex A. Test & System Description

A.1 Measurement System

Measurements were performed using the following setups, made in accordance to the general provisions of ANSI C63.10 2020.

The DUT was installed in a test fixture and this test fixture is connected to a laptop computer and AC/DC power adapter. The laptop computer was used to configure the EUT to continuously transmit at a specified output power using all different modes and modulation schemes, using the Intel proprietary tool DRTU.

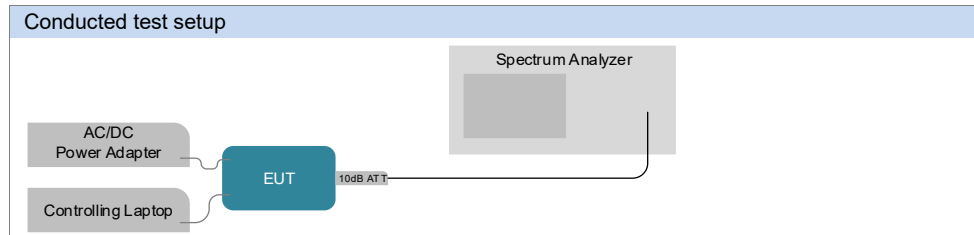

A.2 Test Equipment List

Conducted setup #1

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
178-000	Spectrum Analyzer	FSV13	101311	Rohde & Schwarz	2023-05-25	2025-06-25*
019-003	RF cable 50cm	FLC-1M-SMSM	N/A	Mini-circuit	2025-02-20	2026-02-20
019-004	10dB Attenuator + MH4	3M-6	N/A	WEINSCHL	2025-02-20	2026-02-20
094-006	Temp & Humidity Logger	RMS-HCD-S	24050483	Rotronic	2024-09-02	2026-09-02
413-000	Measurement SW v1.5.4.2	Octopi	N/A	Step AT	N/A	N/A

*Within a grace period of 30 days

Conducted setup #2

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
159-000	Spectrum Analyzer	FSV40	101072	Rohde & Schwarz	2025-06-16	2027-06-16
019-000	RF cable 50cm	PE360-50CM	N/A	PASTERNAK	2025-02-24	2026-02-24
019-002	10dB Attenuator + MH4	PE7395-10	N/A	PASTERNAK	2025-02-24	2026-02-24
094-004	Temp & Humidity Logger	RMS-HCD-S	24050488	Rotronic	2024-09-02	2026-09-02
413-000	Measurement SW v1.5.4.2	Octopi	N/A	Step AT	N/A	N/A

A.3 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the table below with a coverage factor of $k = 2$ to indicate a 95% level of confidence:

Measurement type	Uncertainty	Unit
Timing	± 0.12	%
Power Spectral density	± 1.47	dB
Occupied bandwidth	± 2.07	%
Conducted Power	± 1.03	dB
Conducted Spurious Emission <26.5 GHz	± 2.93	dB

Annex B. Test Results U-NII-4

The herein test results were performed by:

Test case measurement	Test Personnel
6dB and 99% Bandwidth	Zayd Ouachicha
Maximum output power & Maximum PSD	Zayd Ouachicha
Undesirable emission limits: out of band	Zayd Ouachicha

B.1 Test Conditions

For 802.11a mode the EUT can transmit at both CHAIN A and CHAIN B RF outputs individually, but not simultaneously.

For 802.11n20 & 802.11ax/be20 (20 MHz channel bandwidth), 802.11n40 and 802.11ax/be40 (40MHz channel bandwidth) 802.11ac80 & 802.11ax/be80 (80MHz channel bandwidth), 802.11ac160 & 802.11ax/be160 (160MHz channel bandwidth) modes the EUT can transmit at both CHAIN A and CHAIN B RF outputs individually, and also simultaneously.

The following data rates were selected based on preliminary testing that identified those rates as the worst cases for output power and spurious levels at the band edges:

Transmission	Mode	Bandwidth (MHz)	Worst Case Data Rate
SISO	802.11a	20	6Mbps
	802.11n	20	HT0
		40	HT0
	802.11ac	80/160	VHT0
MIMO	802.11ax/be	20/40/80/160	MCS0
	802.11n	20/40	HT8
	802.11ac	80/160	VHT0
	802.11ax/be	20/40/80/160	MCS0

B.2 Test Results Tables

B.2.1 6dB & 99% Bandwidth

Test limits

FCC part	RSS-247	Limits
15.407 (e)	6.2.5.2	For equipment operating in the band 5725-5895 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

Test procedure

The conducted setup shown in section *Test & System Description* was used to measure the 6dB & 99% Bandwidth. The antenna terminal of the EUT is connected to the spectrum analyzer through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

Results tables

Mode	Rate	Antenna	Channel	Freq [MHz]	6dB BW [MHz]	99% BW [MHz]
802.11a	6Mbps	SISO A	169	5845	15.13	16.80
			173	5865	15.31	16.64
			177	5885	15.43	16.68
		SISO B	169	5845	14.94	16.72
			173	5865	15.13	16.76
			177	5885	15.09	16.64
802.11n20	HT0	SISO A	169	5845	15.29	17.80
			173	5865	14.48	17.76
			177	5885	15.45	17.76
		SISO B	169	5845	15.10	17.76
			173	5865	16.03	17.80
			177	5885	15.01	17.84
	HT8	MIMO A	169	5845	15.11	17.80
			173	5865	16.29	17.80
			177	5885	13.79	17.84
		MIMO B	169	5845	16.90	17.84
			173	5865	14.20	17.80
			177	5885	16.28	17.84
802.11n40	HT0	SISO A	167	5835	33.84	36.24
			175	5875	35.06	36.16
		SISO B	167	5835	35.04	36.08
			175	5875	35.04	36.08
	HT8	MIMO A	167	5835	35.03	36.08
			175	5875	35.07	36.00
		MIMO B	167	5835	35.04	36.16
			175	5875	35.02	36.08
802.11ac80	VHT0	SISO A	171	5855	70.03	75.36
		SISO B			72.59	75.36
		MIMO A			72.64	75.20
		MIMO B			73.87	75.04
802.11ac160	VHT0	SISO A	163	5815	146.33	153.78
		SISO B			153.93	153.78
		MIMO A			152.63	153.60
		MIMO B			153.88	153.92

Max Value

Mode	Rate	Antenna	Channel	Freq [MHz]	6dB BW [MHz]	99% BW [MHz]
802.11ax/be20	HE0	SISO A	169	5845	17.40	18.96
			173	5865	17.90	18.88
			177	5885	16.89	18.96
		SISO B	169	5845	13.77	18.96
			173	5865	15.20	19.00
			177	5885	17.72	18.92
		MIMO A	169	5845	17.89	18.96
			173	5865	15.50	18.88
			177	5885	17.39	18.96
		MIMO B	169	5845	17.48	19.00
			173	5865	15.31	18.96
			177	5885	16.25	19.00
802.11ax/be40	HE0	SISO A	167	5835	35.42	37.60
			175	5875	35.06	37.52
		SISO B	167	5835	35.54	37.60
			175	5875	35.08	37.44
		MIMO A	167	5835	35.71	37.76
			175	5875	35.10	37.68
		MIMO B	167	5835	36.38	37.68
			175	5875	33.28	37.68
802.11ax/be80	HE0	SISO A	171	5855	62.99	76.80
		SISO B			71.47	76.96
		MIMO A			73.92	76.96
		MIMO B			73.97	76.80
802.11ax/be160	HE0	SISO A	163	5815	150.13	155.23
		SISO B			143.93	155.13
		MIMO A			152.93	155.20
		MIMO B			155.18	155.52

Max Value

B.2.2 Maximum output power & Maximum power spectral Density

Test limits

FCC part	RSS-247	Limits
15.407 (a) (3) (iii)	6.2.5.2	For client devices operating under the control of an indoor access point in the 5.850-5.895 GHz band, the maximum power spectral density must not exceed 14 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm. Client devices operating on a channel that spans the 5.725-5.850 GHz and 5.850-5.895 GHz bands must not exceed an e.i.r.p. of 30 dBm.
15.407 (a) (13)	-	Power spectral density measurement: The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. Measurements in the 5.725-5.895 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less.

Test procedure

The Maximum Conducted Output Power was measured using the channel integration method over the entire 99% occupied bandwidth according to section E) 2) d) (Method SA-2) of KDB 789033

The maximum power spectral density (PSD) was measured using the method according to section F) of KDB 789033.

In the measure-and-sum approach for MIMO mode, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically in linear power units to determine the total emission level from the device.

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power.

The conducted setup shown in section *Test & System Description* was used to measure the maximum conducted output power and power spectral density. The antenna terminal of the EUT is connected to the spectrum analyser through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

Results tables

Duty cycle

Mode	Rate	Antenna	Duty Cycle [%]
802.11a	6Mbps	SISO A	97.9
		SISO B	97.9
802.11n20	HT0	SISO A	98.9
		SISO B	98.9
	HT8	MIMO A	98.9
		MIMO B	98.9
802.11ax/be20	HE0	SISO A	98.9
		SISO B	98.9
		MIMO A	98.9
		MIMO B	98.9
802.11n40	HT0	SISO A	98.9
		SISO B	98.9
	HT8	MIMO A	98.9
		MIMO B	98.9
802.11ax/be40	HE0	SISO A	98.9
		SISO B	98.9
		MIMO A	98.9
		MIMO B	98.9
802.11ac80	VHT0	SISO A	98.9
		SISO B	98.9
		MIMO A	98.9
		MIMO B	98.9
802.11ax/be80	HE0	SISO A	98.9
		SISO B	98.9
		MIMO A	98.9
		MIMO B	98.9
802.11ac160	VTH0	SISO A	98.9
		SISO B	98.9
		MIMO A	98.9
		MIMO B	98.9
802.11ax/be160	HE0	SISO A	98.9
		SISO B	98.9
		MIMO A	98.9
		MIMO B	98.9

Maximum output power – U-NII-4 Channels

Mode	Rate	Channel	Freq [MHz]	Antenna	Average Conducted Ouput Power [dBm]	Avg Max* Conducted Ouput Power [dBm]	Avg Max*. EIRP [dBm]	Avg Max* Conducted Ouput Power [mW]
802.11a	6Mbps	169	5845	SISO A	19.25	19.34	24.49	85.98
				SISO B	19.06	19.15	24.30	82.30
		173	5865	SISO A	19.18	19.27	24.42	84.60
				SISO B	19.16	19.25	24.40	84.22
		177	5885	SISO A	19.28	19.37	24.52	86.58
				SISO B	19.18	19.27	24.42	84.61
802.11n20	HT0	169	5845	SISO A	19.22	19.22	24.37	83.56
				SISO B	19.36	19.36	24.51	86.30
		173	5865	SISO A	19.17	19.17	24.32	82.60
				SISO B	19.41	19.41	24.56	87.30
		177	5885	SISO A	19.40	19.40	24.55	87.10
				SISO B	19.18	19.18	24.33	82.79
	HT8	169	5845	MIMO A	16.68	16.68	21.83	46.56
				MIMO B	16.32	16.32	21.47	42.85
				Combined A+B	19.51	19.51	24.66	89.41
		173	5865	MIMO A	16.56	16.56	21.71	45.29
				MIMO B	16.31	16.31	21.46	42.76
				Combined A+B	19.45	19.45	24.60	88.05
		177	5885	MIMO A	16.66	16.66	21.81	46.34
				MIMO B	16.70	16.70	21.85	46.77
				Combined A+B	19.69	19.69	24.84	93.12
802.11n40	HT0	167	5835	SISO A	22.77	22.77	27.92	189.23
				SISO B	22.85	22.85	28.00	192.75
		175	5875	SISO A	22.56	22.56	27.71	180.30
				SISO B	23.07	23.07	28.22	202.77
	HT8	167	5835	MIMO A	20.11	20.11	25.26	102.57
				MIMO B	19.69	19.69	24.84	93.11
				Combined A+B	22.92	22.92	28.07	195.68
		175	5875	MIMO A	20.19	20.19	25.34	104.47
				MIMO B	19.60	19.60	24.75	91.20
				Combined A+B	22.92	22.92	28.07	195.67
802.11ac80	VHT0	171	5855	SISO A	21.72	21.72	26.87	148.59
				SISO B	22.72	22.72	27.87	187.07
				MIMO A	21.00	21.00	26.15	125.89
				MIMO B	20.87	20.87	26.02	122.18
				Combined A+B	23.95	23.95	29.10	248.07
802.11ac160	VHT0	163	5815	SISO A	18.22	18.22	23.37	66.37
				SISO B	18.32	18.32	23.47	67.92
				MIMO A	16.95	16.95	22.10	49.55
				MIMO B	17.18	17.18	22.33	52.24
				Combined A+B	20.08	20.08	25.23	101.78

* Maximum values are the duty cycle compensated values calculated from the average (measured)

Max Value

Min Value

Mode	Rate	Channel	Freq [MHz]	Antenna	Average Conducted Ouput Power [dBm]	Avg Max* Conducted Ouput Power [dBm]	Avg Max*. EIRP [dBm]	Avg Max* Conducted Ouput Power [mW]
802.11ax/be20	HE0	169	5845	SISO A	19.61	19.61	24.76	91.41
				SISO B	19.74	19.74	24.89	94.19
				MIMO A	16.54	16.54	21.69	45.08
				MIMO B	16.68	16.68	21.83	46.56
				Combined A+B	19.62	19.62	24.77	91.64
		173	5865	SISO A	19.55	19.55	24.70	90.16
				SISO B	19.80	19.80	24.95	95.50
				MIMO A	16.46	16.46	21.61	44.26
				MIMO B	16.70	16.70	21.85	46.77
				Combined A+B	19.59	19.59	24.74	91.03
		177	5885	SISO A	19.37	19.37	24.52	86.50
				SISO B	19.81	19.81	24.96	95.72
				MIMO A	16.42	16.42	21.57	43.85
				MIMO B	16.35	16.35	21.50	43.15
				Combined A+B	19.40	19.40	24.55	87.00
802.11ax/be40	HE0	167	5835	SISO A	22.91	22.91	28.06	195.43
				SISO B	22.94	22.94	28.09	196.79
				MIMO A	19.82	19.82	24.97	95.94
				MIMO B	19.59	19.59	24.74	90.99
				Combined A+B	22.72	22.72	27.87	186.93
		175	5875	SISO A	22.78	22.78	27.93	189.67
				SISO B	22.98	22.98	28.13	198.61
				MIMO A	19.87	19.87	25.02	97.05
				MIMO B	20.00	20.00	25.15	100.00
				Combined A+B	22.95	22.95	28.10	197.05
802.11ax/be80	HE0	171	5855	SISO A	21.63	21.63	26.78	145.55
				SISO B	22.66	22.66	27.81	184.50
				MIMO A	20.92	20.92	26.07	123.59
				MIMO B	20.96	20.96	26.11	124.74
				Combined A+B	23.95	23.95	29.10	248.33
802.11ax/be160	HE0	163	5815	SISO A	17.75	17.75	22.90	59.57
				SISO B	18.30	18.30	23.45	67.61
				MIMO A	16.82	16.82	21.97	48.08
				MIMO B	17.22	17.22	22.37	52.72
				Combined A+B	20.03	20.03	25.18	100.81

* Maximum values are the duty cycle compensated values calculated from the average (measured)

Max Value

Min Value

See Section B.3.1 for the screenshot results

Maximum Power Spectral Density (PSD) – U-NII-4 channels

Mode	Rate	Channel	Freq [MHz]	Antenna	Average conducted PSD [dBm/500kHz]	Max.* conducted PSD [dBm/500kHz]	Max.* conducted PSD [dBm/MHz]	EIRP PSD [dBm/MHz]
802.11a	6Mbps	169	5845	SISO A	5.46	5.55	8.56	13.71
				SISO B	5.19	5.28	8.29	13.44
		173	5865	SISO A	5.43	5.52	8.53	13.68
				SISO B	5.16	5.25	8.26	13.41
		177	5885	SISO A	5.54	5.63	8.64	13.79
				SISO B	5.27	5.36	8.37	13.52
802.11n20	HT0	169	5845	SISO A	5.21	5.21	8.22	13.37
				SISO B	5.40	5.40	8.41	13.56
		173	5865	SISO A	5.17	5.17	8.18	13.33
				SISO B	5.42	5.42	8.43	13.58
		177	5885	SISO A	5.27	5.27	8.28	13.43
				SISO B	5.22	5.22	8.23	13.38
	HT8	169	5845	MIMO A	2.70	2.70	5.71	10.86
				MIMO B	2.34	2.34	5.35	10.50
				Combined A+B	5.53	5.53	8.54	13.69
		173	5865	MIMO A	2.60	2.60	5.61	10.76
				MIMO B	2.36	2.36	5.37	10.52
				Combined A+B	5.49	5.49	8.50	13.65
		177	5885	MIMO A	2.64	2.64	5.65	10.80
				MIMO B	2.61	2.61	5.62	10.77
				Combined A+B	5.64	5.64	8.65	13.80
802.11n40	HT0	167	5835	SISO A	5.32	5.32	8.33	13.48
				SISO B	5.25	5.25	8.26	13.41
		175	5875	SISO A	5.12	5.12	8.13	13.28
				SISO B	5.47	5.47	8.48	13.63
	HT8	167	5835	MIMO A	2.54	2.54	5.55	10.70
				MIMO B	2.23	2.23	5.24	10.39
				Combined A+B	5.40	5.40	8.41	13.56
		175	5875	MIMO A	2.60	2.60	5.61	10.76
				MIMO B	2.21	2.21	5.22	10.37
				Combined A+B	5.42	5.42	8.43	13.58
802.11ac80	VHT0	171	5855	SISO A	1.22	1.22	4.23	9.38
				SISO B	2.19	2.19	5.20	10.35
				MIMO A	0.53	0.53	3.54	8.69
				MIMO B	0.14	0.14	3.15	8.30
				Combined A+B	3.35	3.35	6.36	11.51
802.11ac160	VHT0	163	5815	SISO A	-5.08	-5.08	-2.07	3.08
				SISO B	-5.04	-5.04	-2.03	3.12
				MIMO A	-6.46	-6.46	-3.45	1.70
				MIMO B	-6.32	-6.32	-3.31	1.84
				Combined A+B	-3.38	-3.38	-0.37	4.78

* Maximum values are the duty cycle compensated values calculated from the average (measured)

Max Value

Min Value

Mode	Rate	Channel	Freq [MHz]	Antenna	Average conducted PSD [dBm/500kHz]	Max.* conducted PSD [dBm/500kHz]	Max.* conducted PSD [dBm/MHz]	EIRP PSD [dBm/MHz]
802.11ax/be20	HE0	169	5845	SISO A	5.41	5.41	8.42	13.57
				SISO B	5.57	5.57	8.58	13.73
				MIMO A	2.36	2.36	5.37	10.52
				MIMO B	2.50	2.50	5.51	10.66
				Combined A+B	5.44	5.44	8.45	13.60
		173	5865	SISO A	5.36	5.36	8.37	13.52
				SISO B	5.58	5.58	8.59	13.74
				MIMO A	2.30	2.30	5.31	10.46
				MIMO B	2.52	2.52	5.53	10.68
				Combined A+B	5.42	5.42	8.43	13.58
		177	5885	SISO A	5.21	5.21	8.22	13.37
				SISO B	5.64	5.64	8.65	13.80
				MIMO A	2.06	2.06	5.07	10.22
				MIMO B	2.20	2.20	5.21	10.36
				Combined A+B	5.14	5.14	8.15	13.30
802.11ax/be40	HE0	167	5835	SISO A	5.31	5.31	8.32	13.47
				SISO B	5.20	5.20	8.21	13.36
				MIMO A	2.25	2.25	5.26	10.41
				MIMO B	1.99	1.99	5.00	10.15
				Combined A+B	5.13	5.13	8.14	13.29
		175	5875	SISO A	5.01	5.01	8.02	13.17
				SISO B	5.20	5.20	8.21	13.36
				MIMO A	2.26	2.26	5.27	10.42
				MIMO B	2.38	2.38	5.39	10.54
				Combined A+B	5.33	5.33	8.34	13.49
802.1axc80	HE0	171	5855	SISO A	1.08	1.08	4.09	9.24
				SISO B	2.00	2.00	5.01	10.16
				MIMO A	0.37	0.37	3.38	8.53
				MIMO B	0.33	0.33	3.34	8.49
				Combined A+B	3.36	3.36	6.37	11.52
802.11ax/be160	HE0	163	5815	SISO A	-5.67	-5.67	-2.66	2.49
				SISO B	-5.19	-5.19	-2.18	2.97
				MIMO A	-6.69	-6.69	-3.68	1.47
				MIMO B	-6.44	-6.44	-3.43	1.72
				Combined A+B	-3.55	-3.55	-0.54	4.61

* Maximum values are the duty cycle compensated values calculated from the average (measured)

Max Value

Min Value

Note :PSD [dBm/500KHz] is the actual measurement done using RBW = 500KHz. To obtain the PSD [dBm/1MHz] a correction factor is applied: $10\log\left(\frac{1\text{MHz}}{500\text{kHz}}\right) = +3.01\text{dB}$

B.2.3 Undesirable emission limits : out of band (Conducted)

Test limits

FCC part	RSS-247	Limits
15.407 (b) (4)	6.2.5.3	All emissions below 5.725 GHz shall not exceed an e.i.r.p of -27 dBm/MHz at 5.65GHz increasing linearly to 10dBm/MHz at 5.7 GHz, and from 5.7GHz increasing linearly to a level of 15.6 dBm/MHz at 5.72GHz, and from 5.72 GHz increasing linearly to a level of 27dBm/MHz at 5.725GHz.
15.407 (b) (5) (ii)	6.2.5.3	All emissions at or above 5.895GHz shall not exceed an e.i.r.p of -5dBm/MHz and shall decrease linearly to an e.i.r.p of -27dBm/MHz at or above 5.925GHz.
15.35 (b)	-	Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz. When average radiated emission measurements are specified in this part, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. Unless otherwise specified, e.g., see §§ 15.250, 15.252, 15.253(d), 15.255, 15.256, and 15.509 through 15.519, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device, e.g., the total peak power level. Note that the use of a pulse desensitization correction factor may be needed to determine the total peak emission level. The instruction manual or application note for the measurement instrument should be consulted for determining pulse desensitization factors, as necessary.

Test procedure

The conducted setup shown in section *Test & System Description* was used to measure undesirable emissions on the Band Edge domain. The antenna terminal of the EUT is connected to the spectrum analyzer through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss and the declared antenna gain.

For lower OOBE, Peak detector is used according to FCC OET KDB 789033 D02 v02r01.

For upper OOBE, RMS detector is used according to FCC OET KDB 291074 D02 v01 - EMC Measurement

Integration method as described in KDB Publication 789033.3.d)(ii) can be used in order to optimize the power. In this report, the integration method is applied in the band 5895 - 5896MHz and compared with interpolation limit of curve (-5.367dBm/MHz EIRP) at 5895.5MHz.


Band Edge measurements above 5895 MHz should also include Peak plots to show compliance with 15.35(b) where the peak emissions must be limited to no more than 20 dB above the average limit.

The RBW is set to 100KHz according to the integration method, the applicable limit is updated accordingly (Shifted by 10dB)

See Section B.3.2 for the screenshot results.


B.3 Test Results Screenshot

B.3.1 Maximum output power per Bandwidth

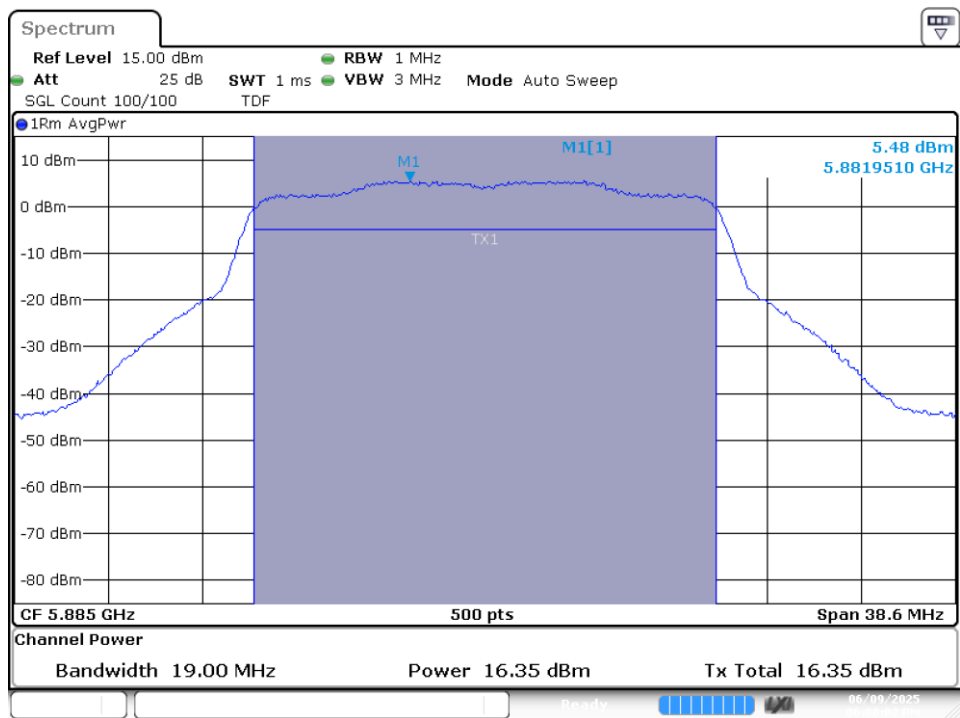


23 JUN 2025 18:03

SISO B-802.11ax/be20-Ch177-5885MHz-MCS0

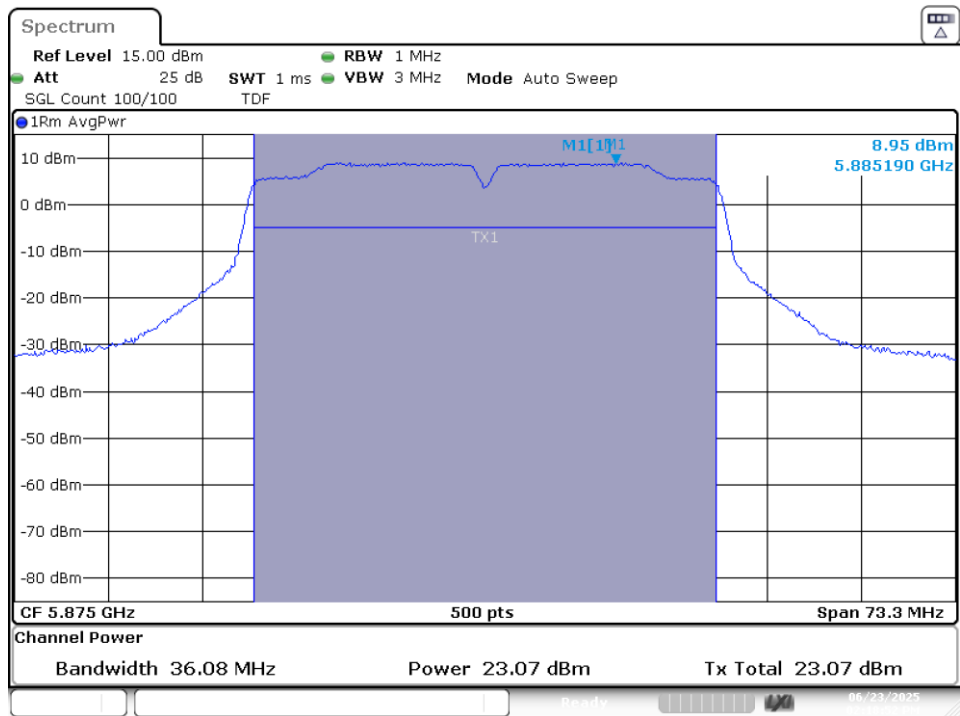


Date: 23.JUN.2025 14:18:52


SISO B-802.11n40-Ch175-5875MHz-HT0

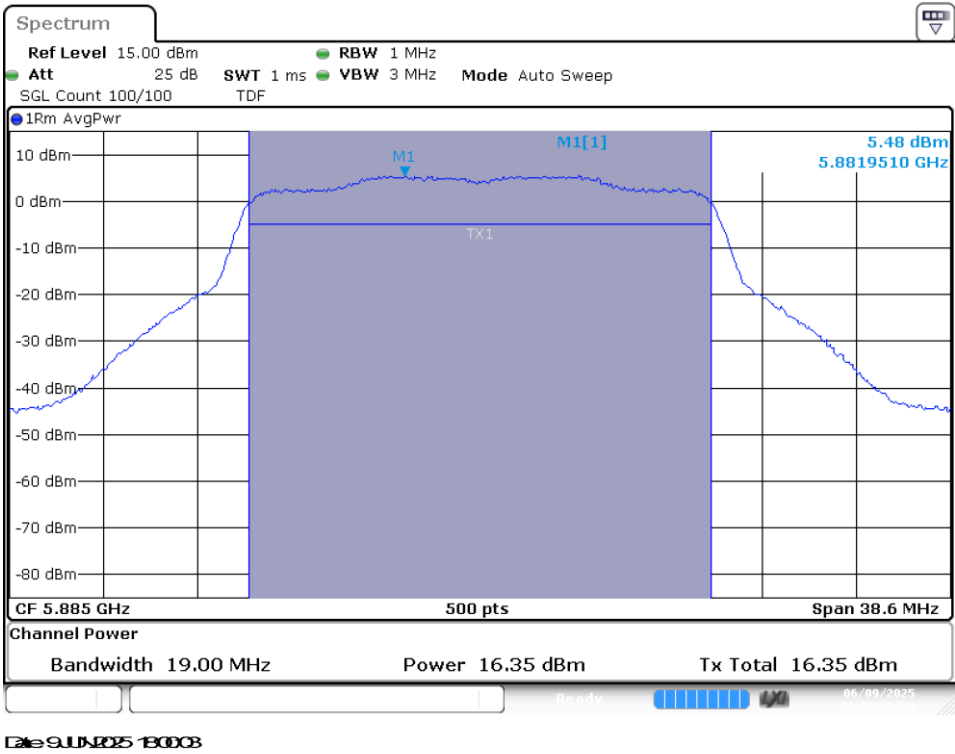


MIMO A-802.11ax/be80-Ch171-5855MHz-MCS0

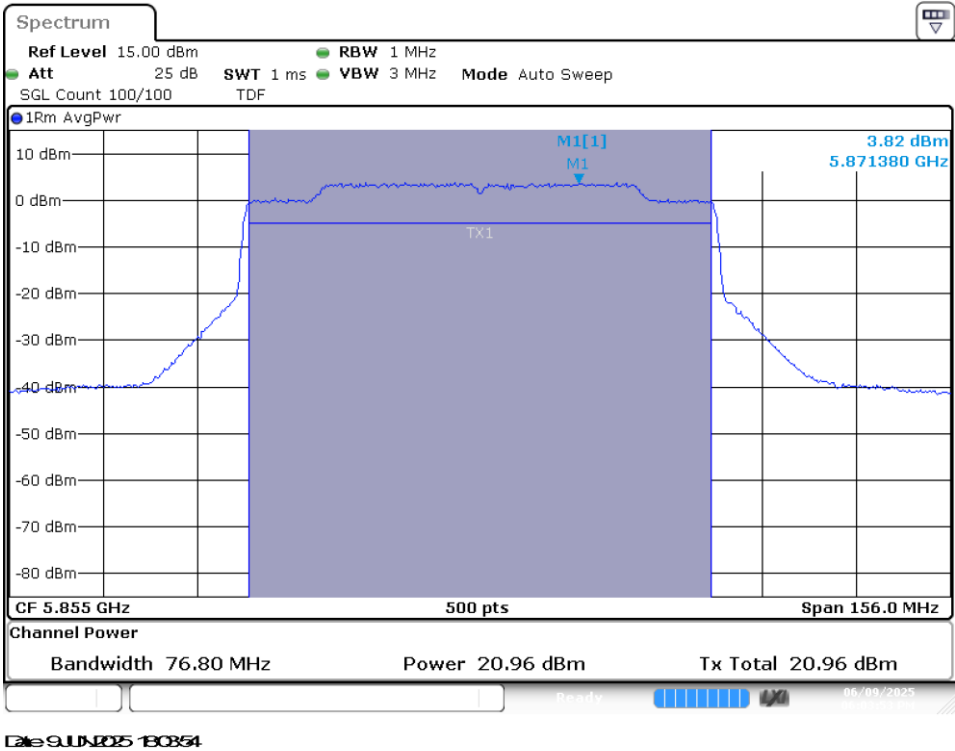

MIMO B-802.11ax/be80-Ch171-5855MHz-MCS0

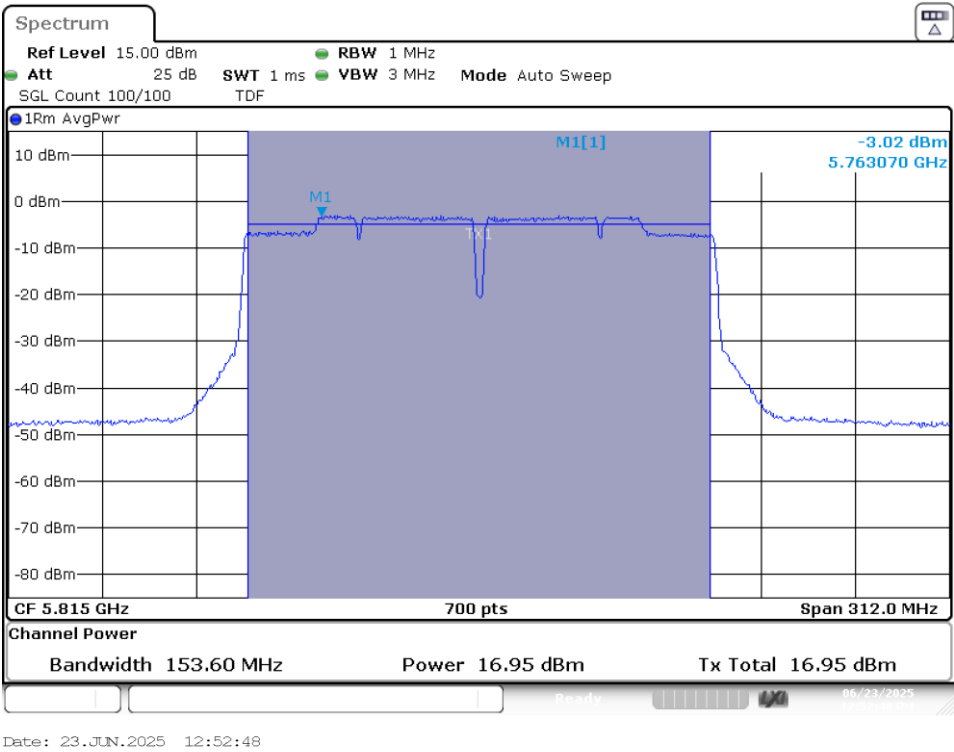


MIMO A-802.11ac160-Ch163-5815MHz-VHT0

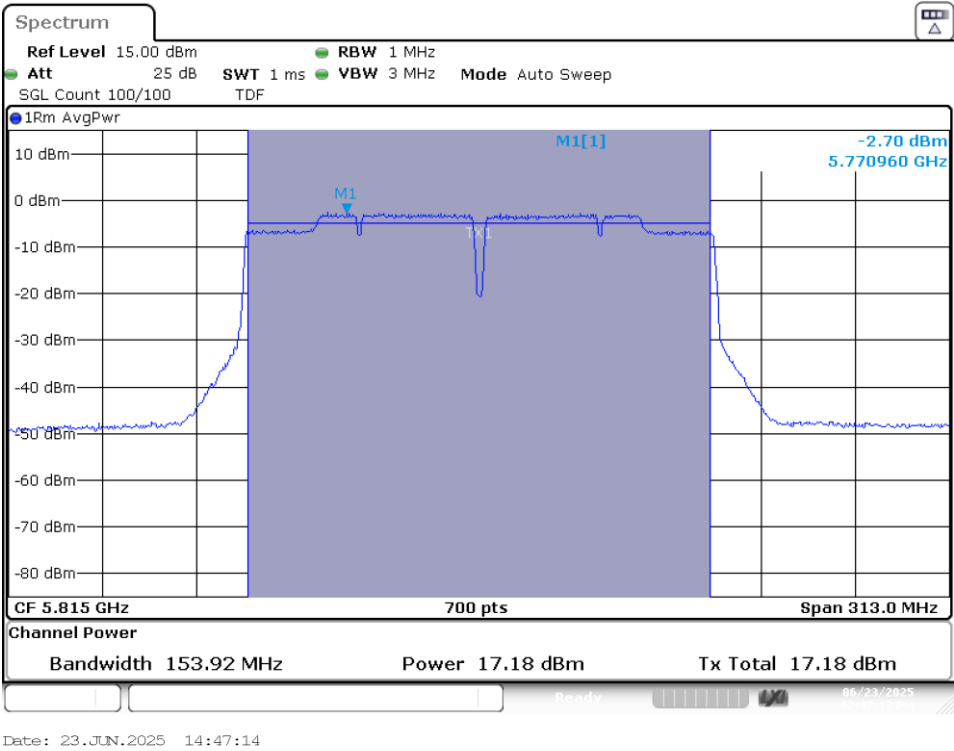


MIMO B-802.11ac160-Ch163-5815MHz-VHT0


B.3.2 Undesirable emission limits : out of band (Conducted)

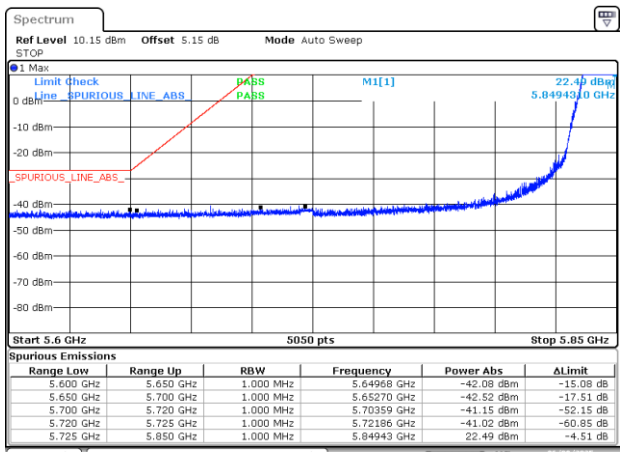


BE-NR-LOW, SISO-A, 802.11a20-6Mbps, Ch169

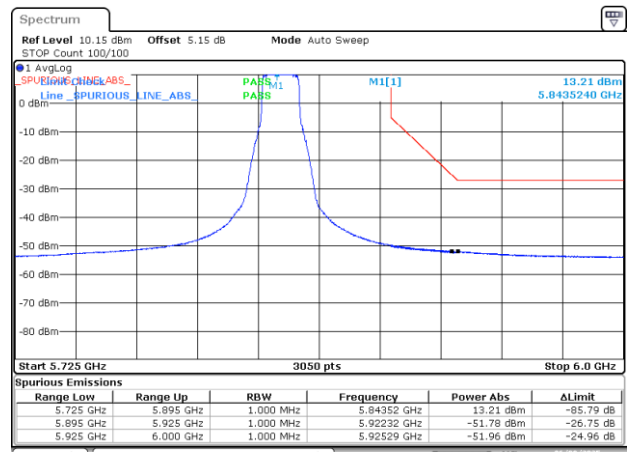


BE-NR-HIGH, SISO-A, 802.11a20-6Mbps, Ch169

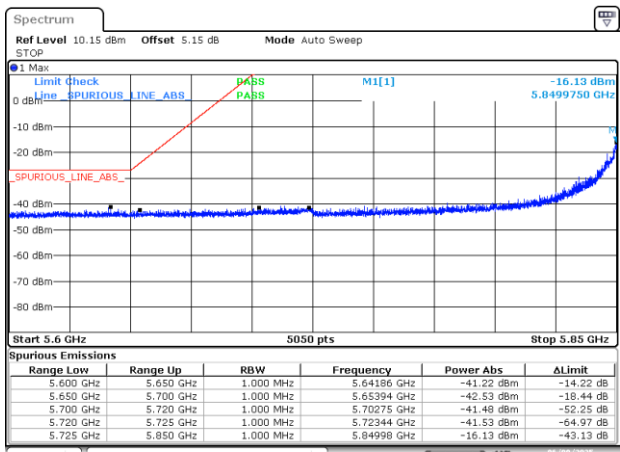


BE-NR-LOW, SISO-A, 802.11a20-6Mbps, Ch173

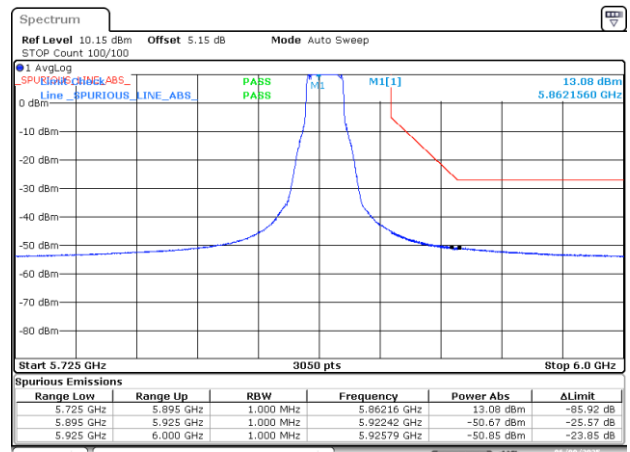


BE-NR-HIGH, SISO-A, 802.11a20-6Mbps, Ch173

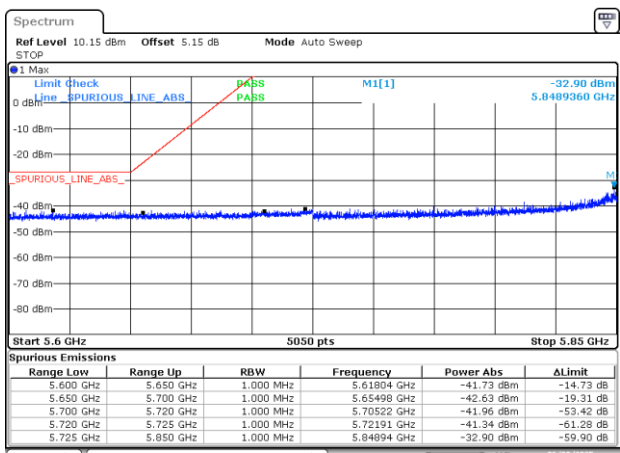


BE-NR-LOW, SISO-A, 802.11a20-6Mbps, Ch177

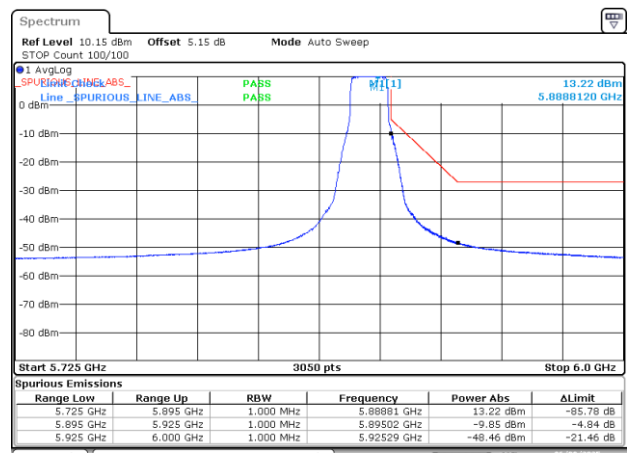


BE-NR-HIGH, SISO-A, 802.11a20-6Mbps, Ch177

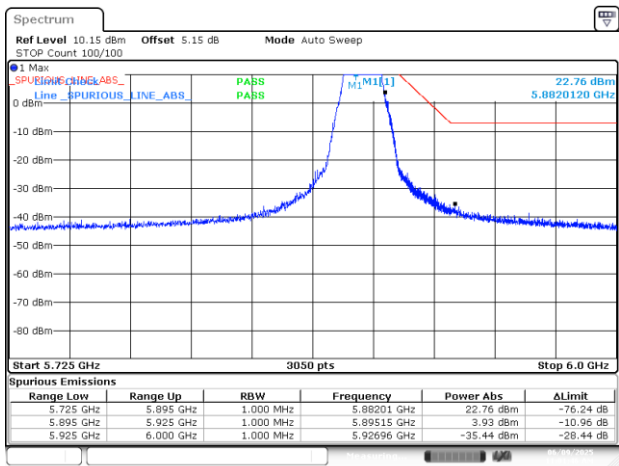


BE-NR-HIGH-PEAK, SISO-A, 802.11a20-6Mbps, Ch177

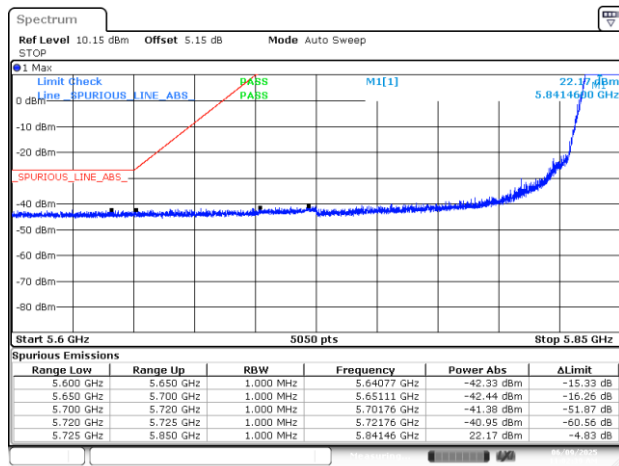


BE-NR-LOW, SISO-A, 802.11n20-HT0, Ch169

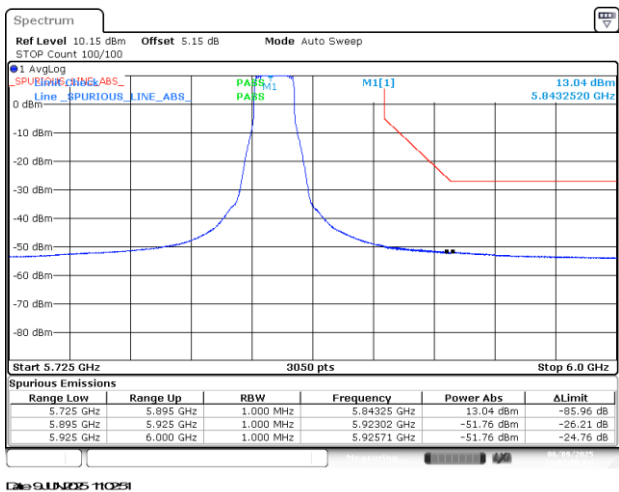


BE-NR-HIGH, SISO-A, 802.11n20-HT0, Ch169

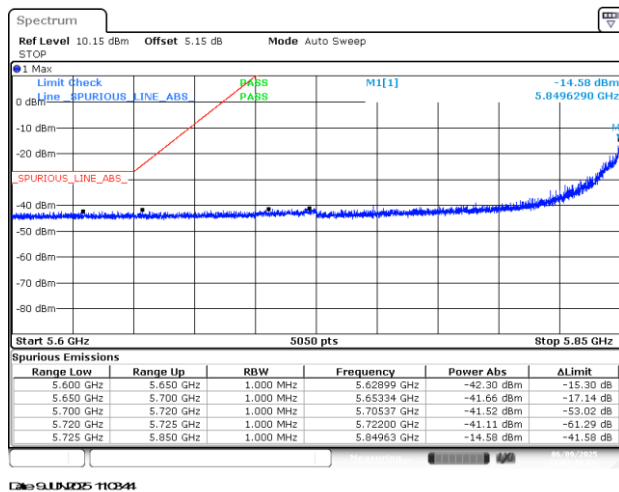


BE-NR-LOW, SISO-A, 802.11n20-HT0, Ch173

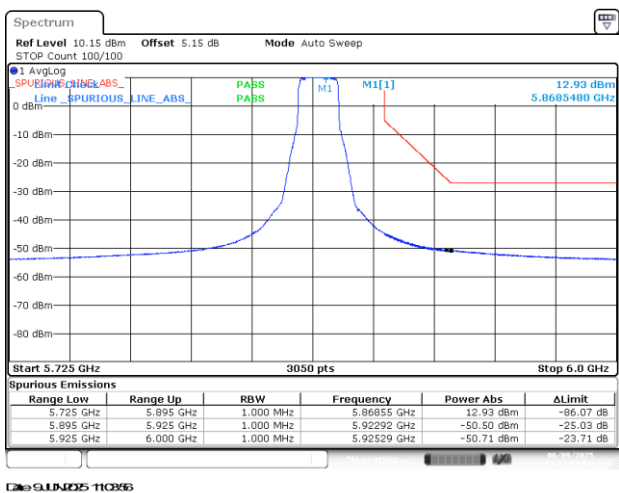

BE-NR-HIGH, SISO-A, 802.11n20-HT0, Ch173

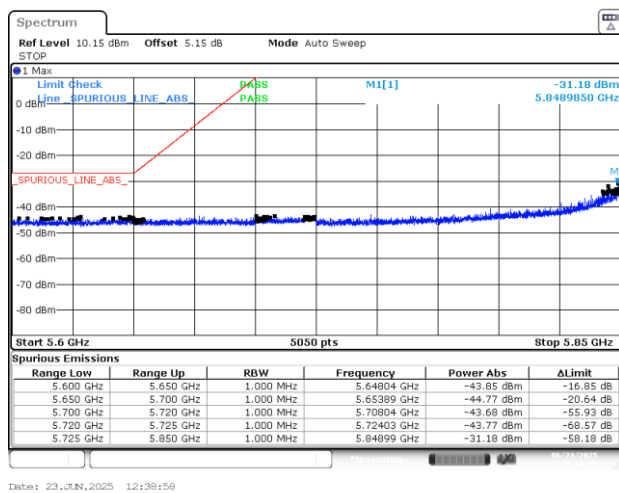


BE-NR-LOW, SISO-A, 802.11n20-HT0, Ch177

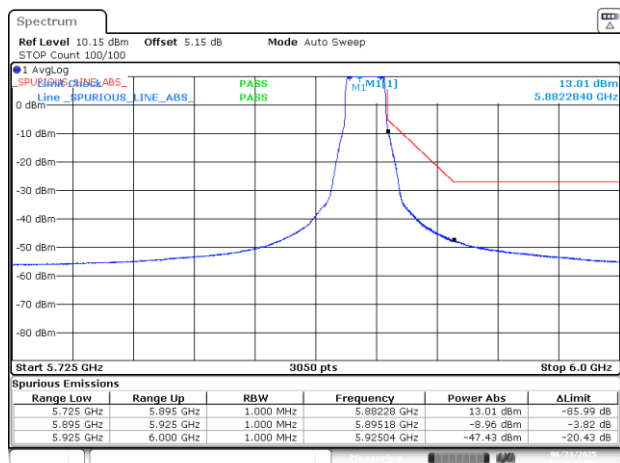


Date: 23.JUN.2025 12:39:11

BE-NR-HIGH, SISO-A, 802.11n20-HT0, Ch177

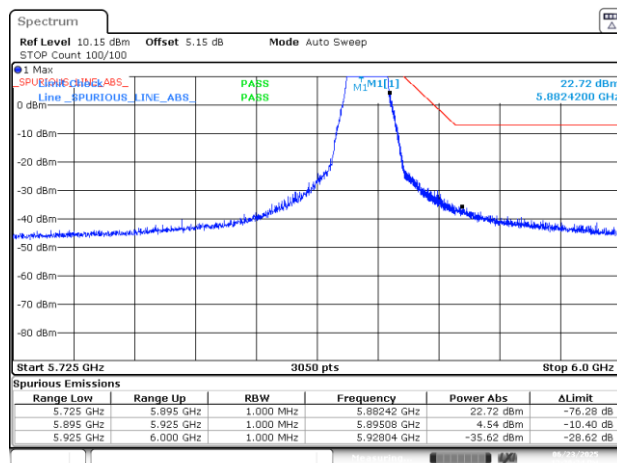


Date: 23.JUN.2025 12:39:24

BE-NR-HIGH-PEAK, SISO-A, 802.11n20-HT0, Ch177

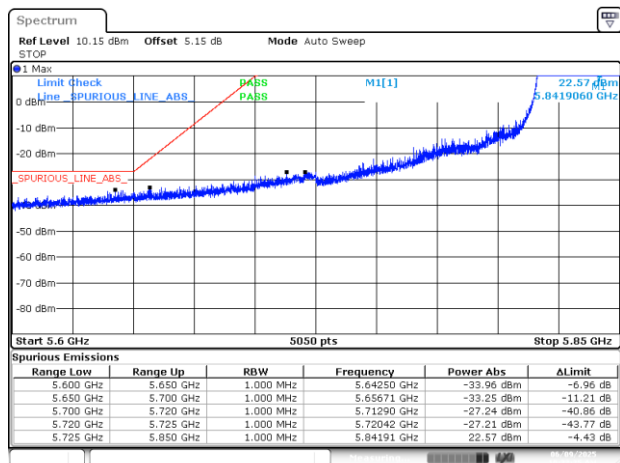


Date: 23.JUN.2025 12:39:25

BE-NR-LOW, SISO-A, 802.11n40-HT0, Ch167

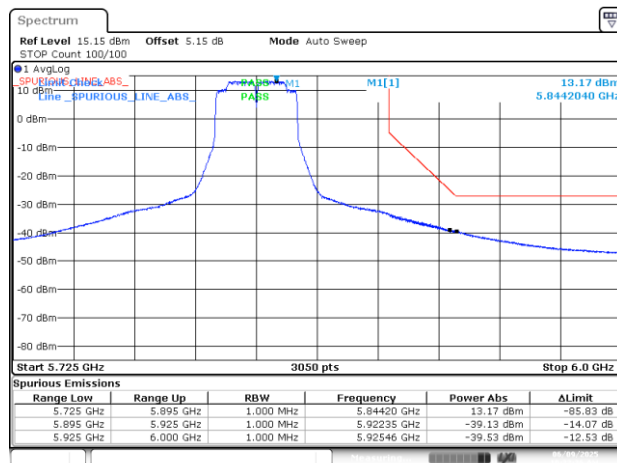


Date: 23.JUN.2025 12:39:27

BE-NR-HIGH, SISO-A, 802.11n40-HT0, Ch167

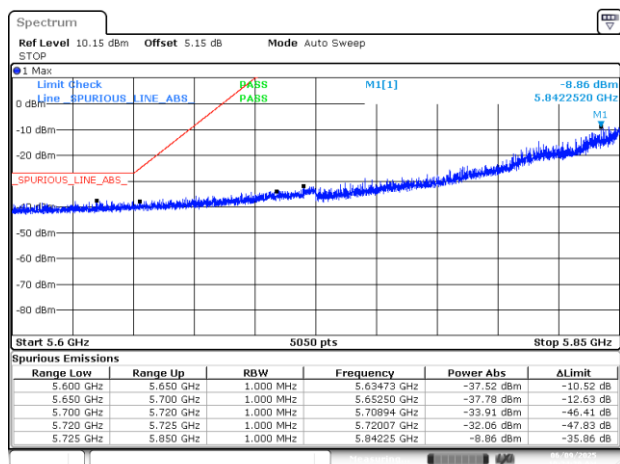


Date: 23.JUN.2025 12:39:30

BE-NR-LOW, SISO-A, 802.11n40-HT0, Ch175

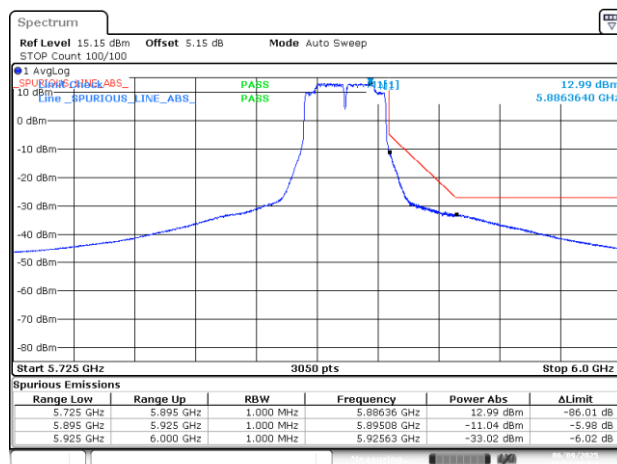


Date: 23.JUN.2025 12:39:32


BE-NR-HIGH, SISO-A, 802.11n40-HT0, Ch175

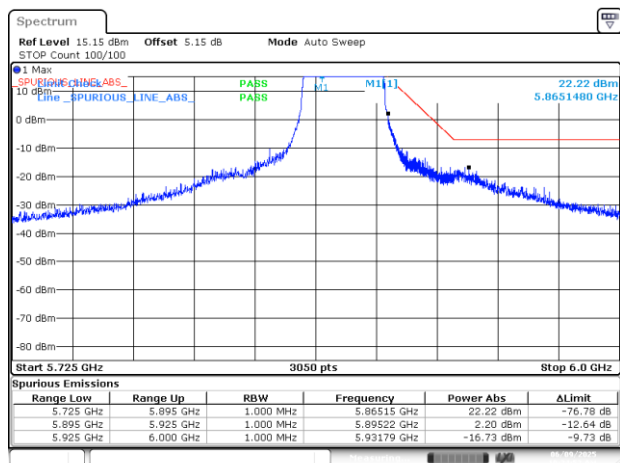


BE-NR-HIGH-PEAK, SISO-A, 802.11n40-HT0, Ch175

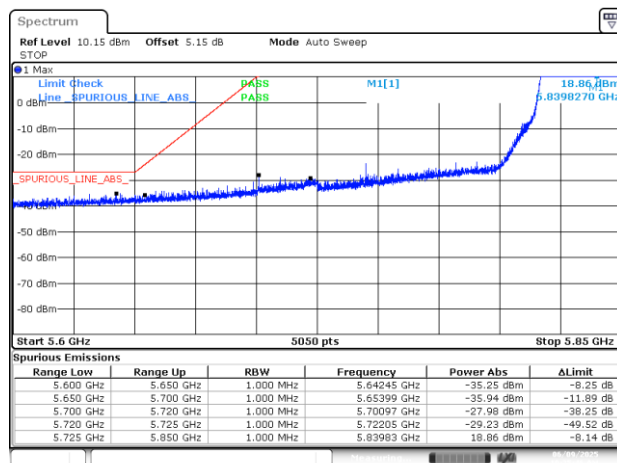


BE-NR-LOW, SISO-A, 802.11ac80-VHT0, Ch171

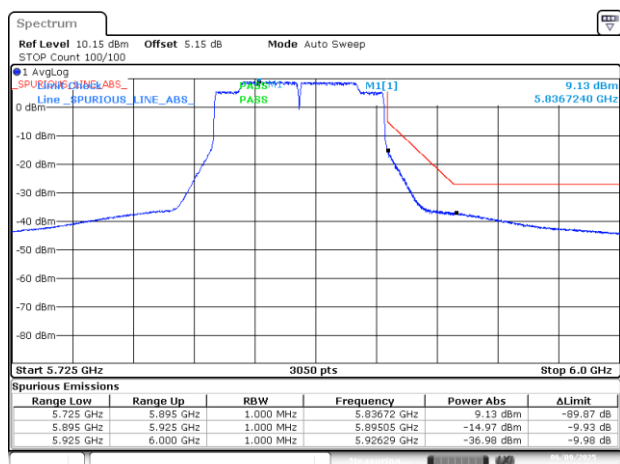


BE-NR-HIGH, SISO-A, 802.11ac80-VHT0, Ch171

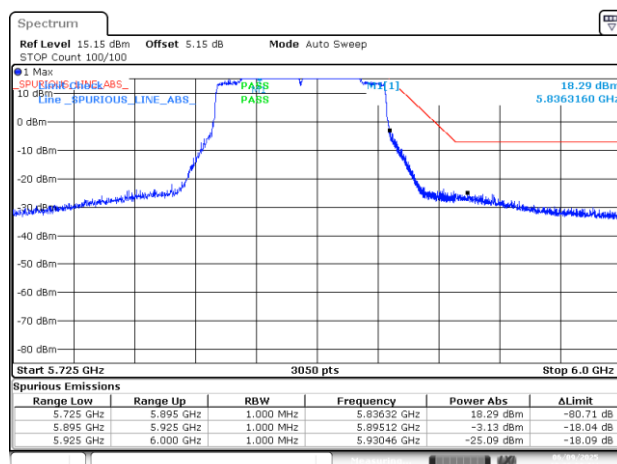

BE-NR-HIGH-PEAK, SISO-A, 802.11ac80-VHT0, Ch171

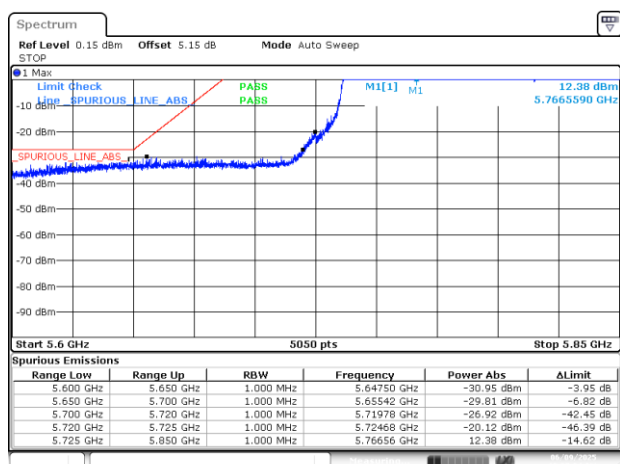


BE-NR-LOW, SISO-A, 802.11ac160-VHT0, Ch163

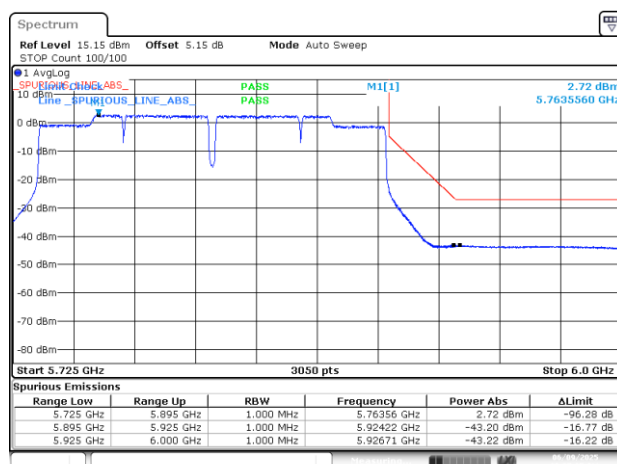


BE-NR-HIGH, SISO-A, 802.11ac160-VHT0, Ch163


Test Report N° 250519-01.TR02

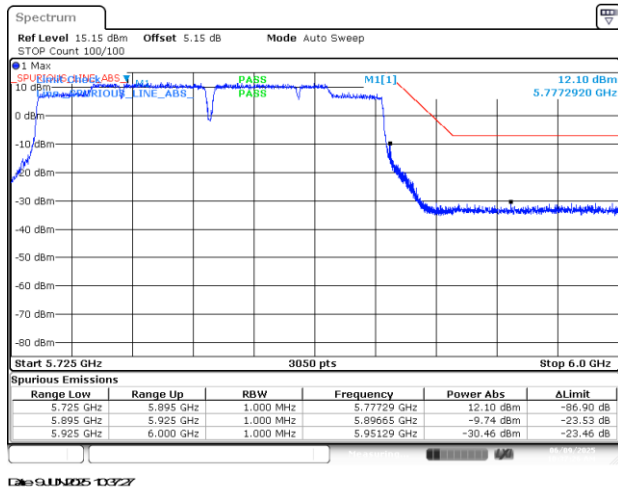


BE-NR-HIGH-PEAK, SISO-A, 802.11ac160-VHT0, Ch163

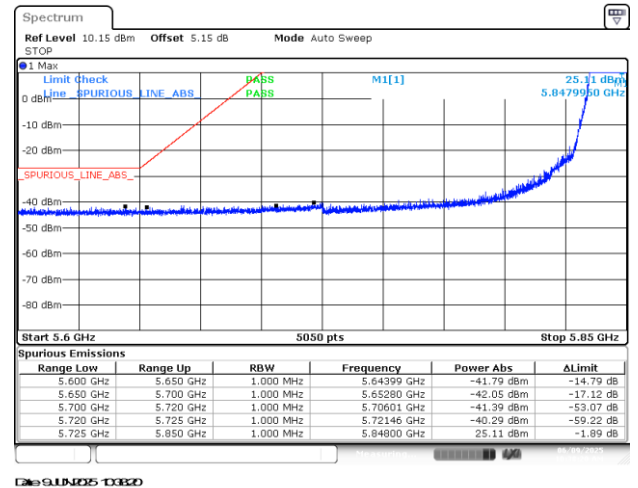


BE-NR-LOW, SISO-A, 802.11ax/be20-HE0, Ch169

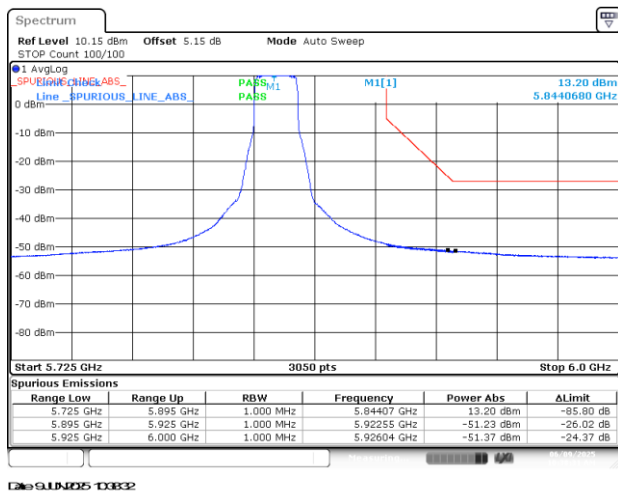


BE-NR-HIGH, SISO-A, 802.11ax/be20-HE0, Ch169

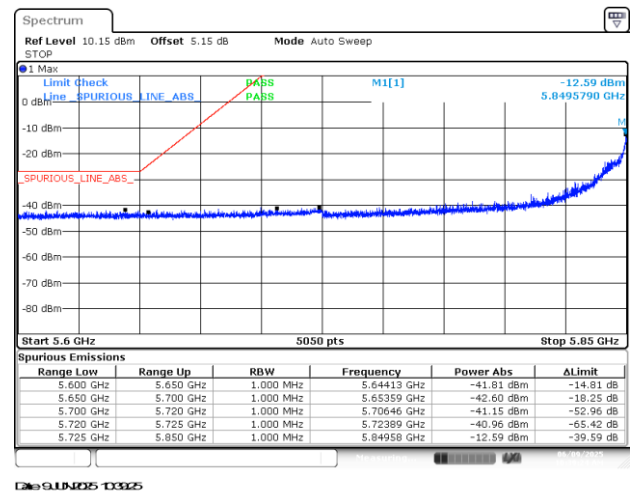


BE-NR-LOW, SISO-A, 802.11ax/be20-HE0, Ch173

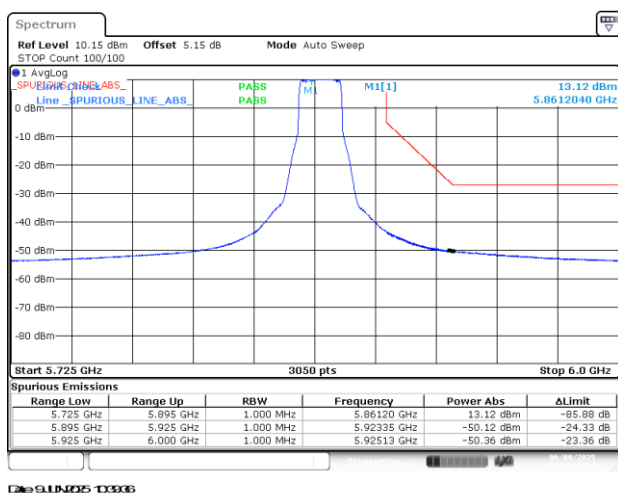


BE-NR-HIGH, SISO-A, 802.11ax/be20-HE0, Ch173

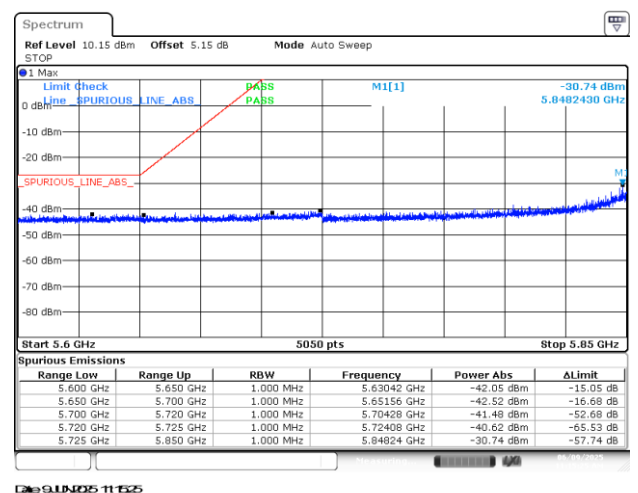


BE-NR-LOW, SISO-A, 802.11ax/be20-HE0, Ch177

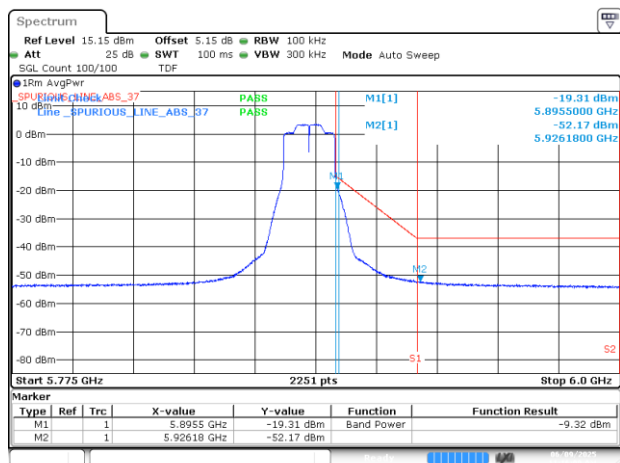


BE-NR-HIGH, SISO-A, 802.11ax/be20-HE0, Ch177

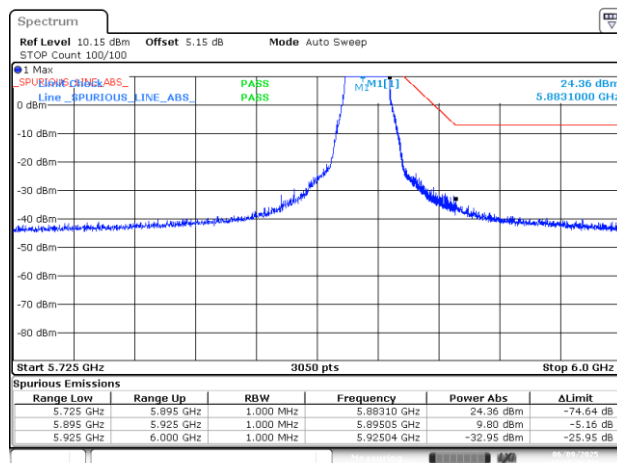


BE-NR-HIGH-PEAK, SISO-A, 802.11ax/be20-HE0, Ch177

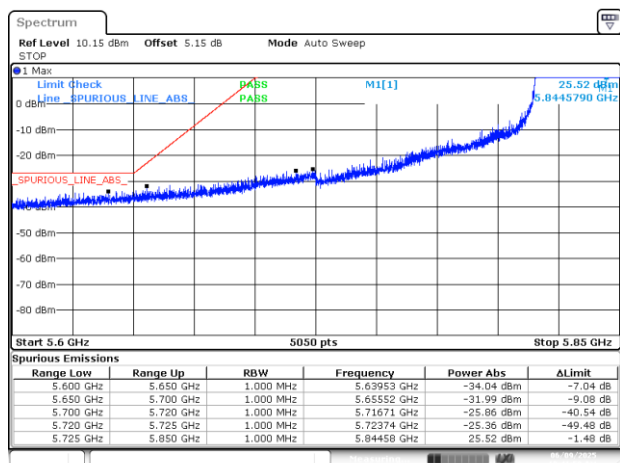


BE-NR-LOW, SISO-A, 802.11ax/be40-MCS0, Ch175

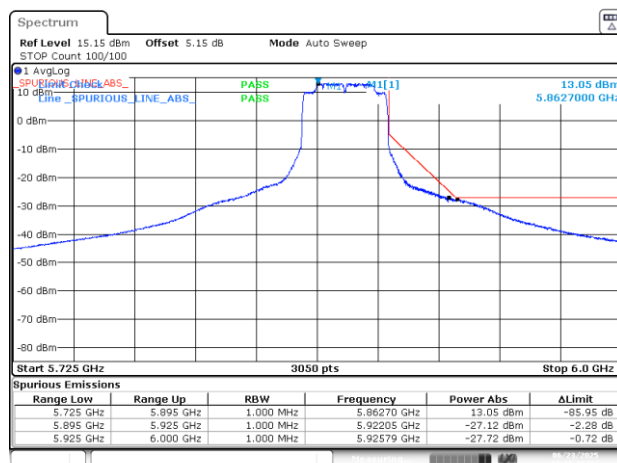


BE-NR-HIGH, SISO-A, 802.11ax/be40-MCS0, Ch175

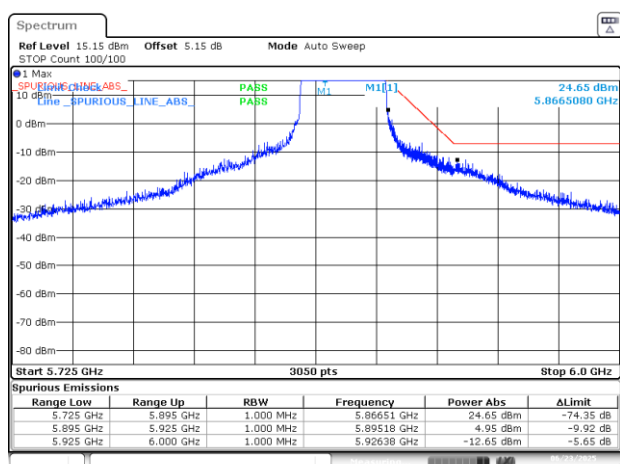

BE-NR-HIGH-PEAK, SISO-A, 802.11ax/be40-MCS0, Ch175

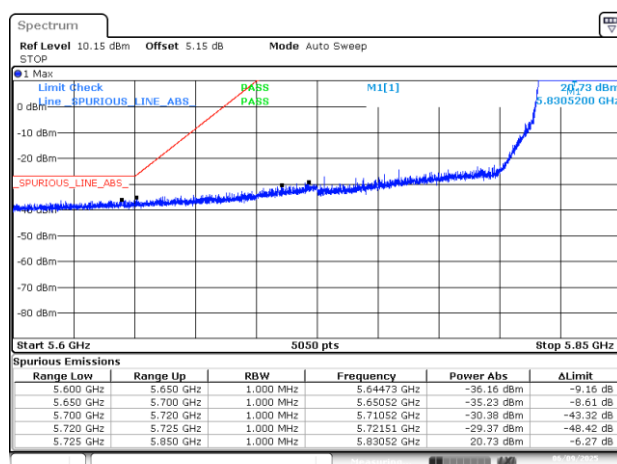


BE-NR-LOW, SISO-A, 802.11ax/be80-MCS0, Ch171

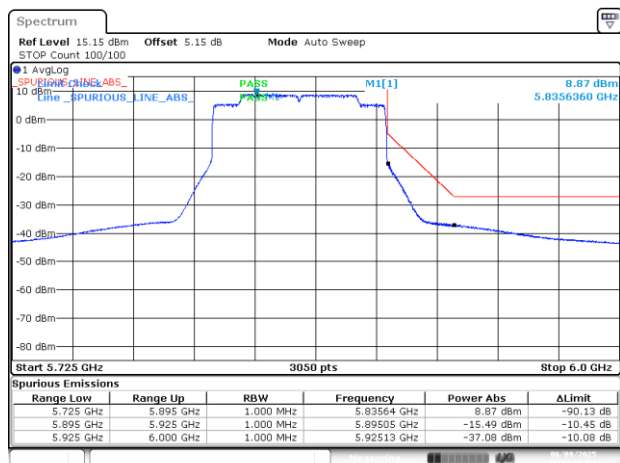


9UN05 D432

BE-NR-HIGH, SISO-A, 802.11ax/be80-MCS0, Ch171

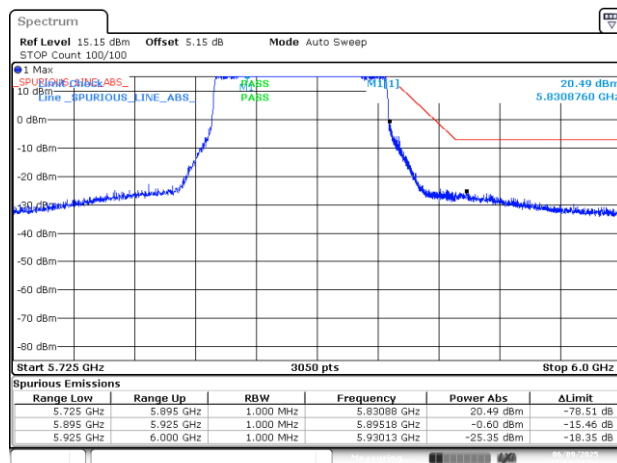


9UN05 D443

BE-NR-HIGH-PEAK, SISO-A, 802.11ax/be80-MCS0, Ch171-

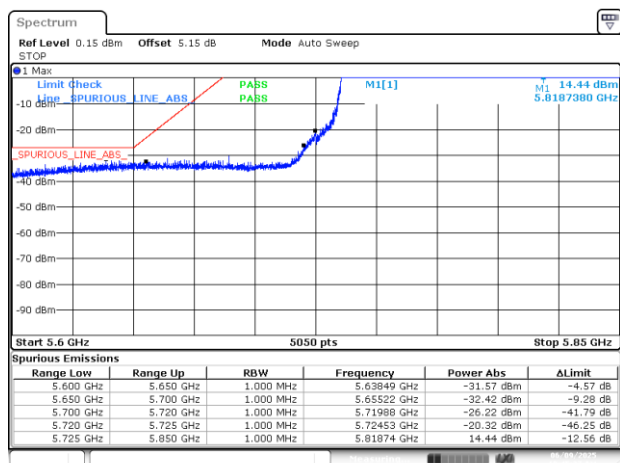

9UN05 D437

BE-NR-LOW, SISO-A, 802.11ax/be160-HE0, Ch163-

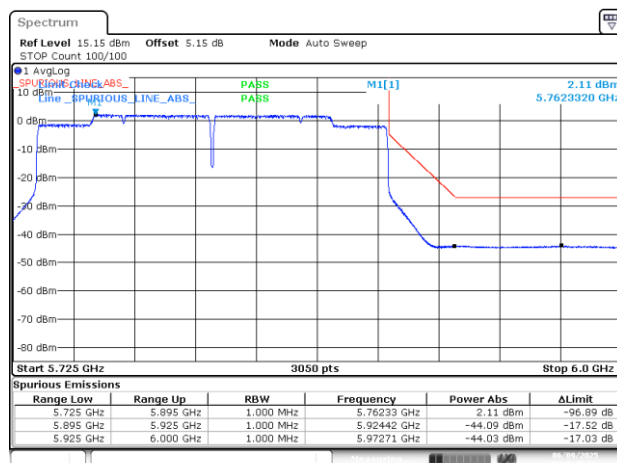


9UN05 D440

BE-NR-HIGH, SISO-A, 802.11ax/be160-HE0, Ch163-




9UN05 D460

BE-NR-HIGH-PEAK, SISO-A, 802.11ax/be160-HE0, Ch163-

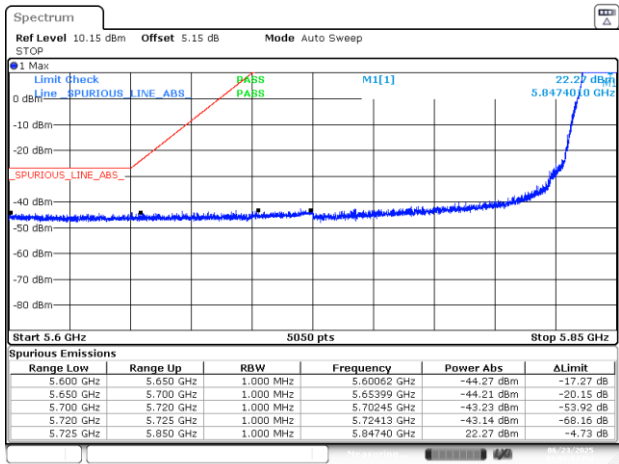


Date: 23 JUN 2025 14:09:54

BE-NR-LOW, SISO-B, 802.11a20-6Mbps, Ch169

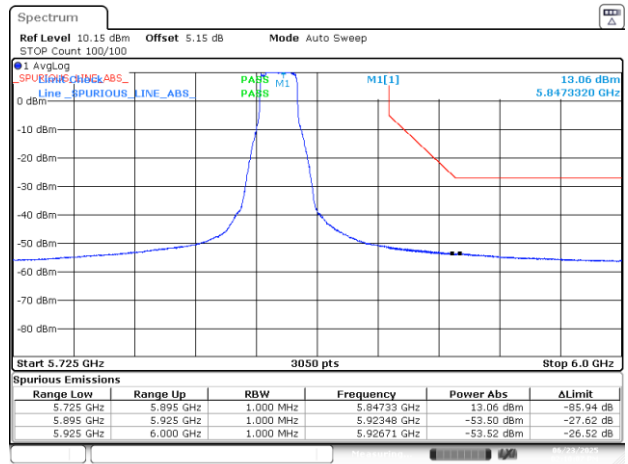


Date: 23 JUN 2025 14:10:07

BE-NR-HIGH, SISO-B, 802.11a20-6Mbps, Ch169

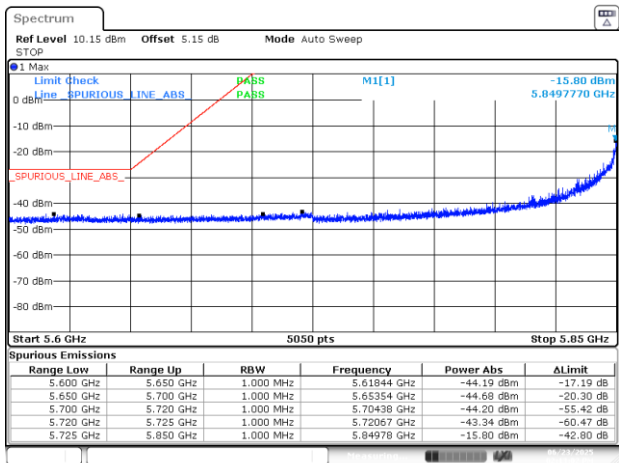


Date: 23 JUN 2025 14:13:02

BE-NR-LOW, SISO-B, 802.11a20-6Mbps, Ch173

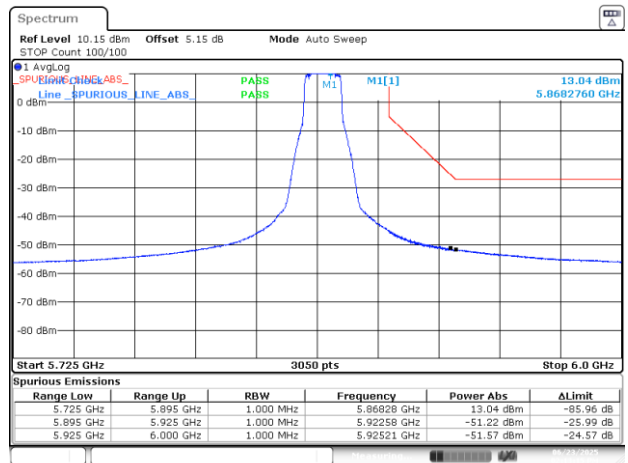


Date: 23 JUN 2025 14:13:15

BE-NR-HIGH, SISO-B, 802.11a20-6Mbps, Ch173

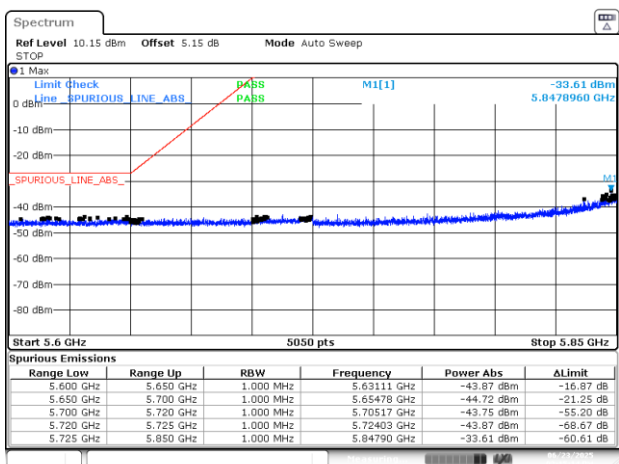


Date: 23 JUN 2025 14:15:14

BE-NR-LOW, SISO-B, 802.11a20-6Mbps, Ch177

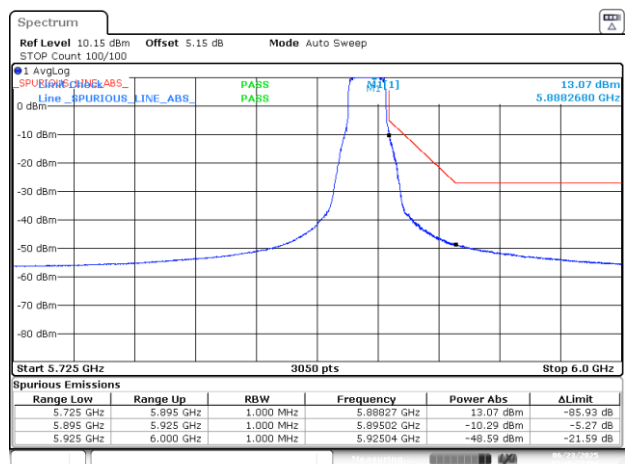


Date: 23 JUN 2025 14:15:27

BE-NR-HIGH, SISO-B, 802.11a20-6Mbps, Ch177

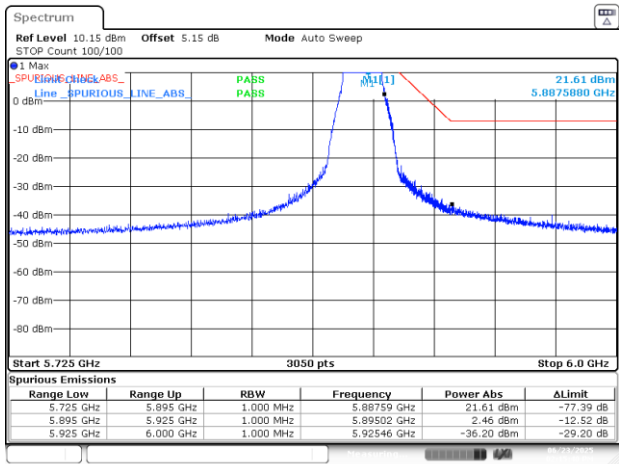


Date: 23.JUN.2025 14:15:40

BE-NR-HIGH-PEAK, SISO-B, 802.11a20-6Mbps, Ch177

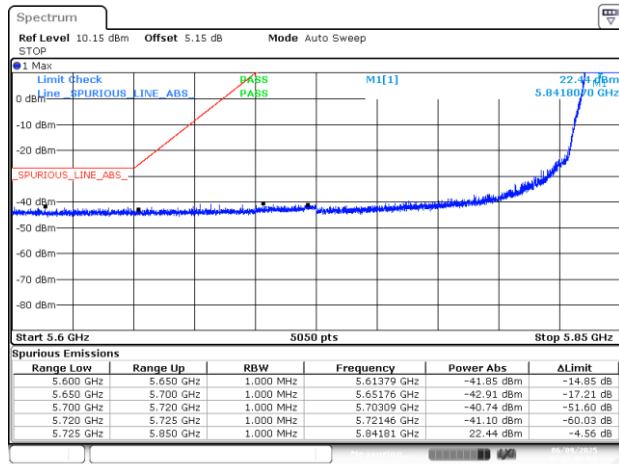


Date: 23.JUN.2025 12:06

BE-NR-LOW, SISO-B, 802.11n20-HT0, Ch169

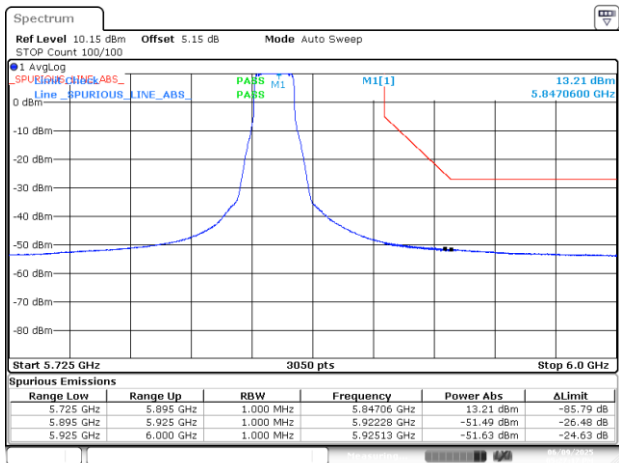


Date: 23.JUN.2025 12:17

BE-NR-HIGH, SISO-B, 802.11n20-HT0, Ch169

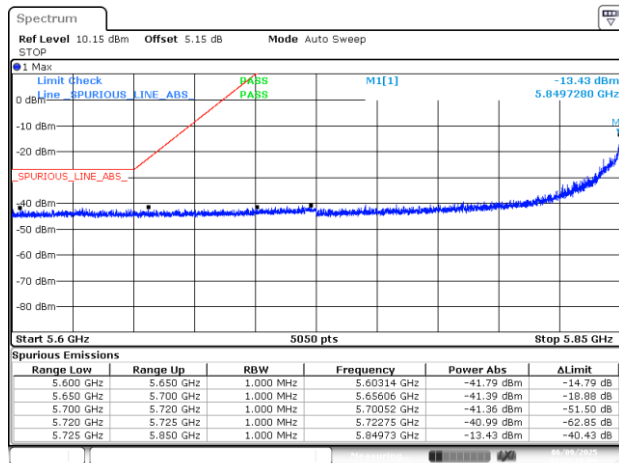


Date: 23.JUN.2025 12:20

BE-NR-LOW, SISO-B, 802.11n20-HT0, Ch173

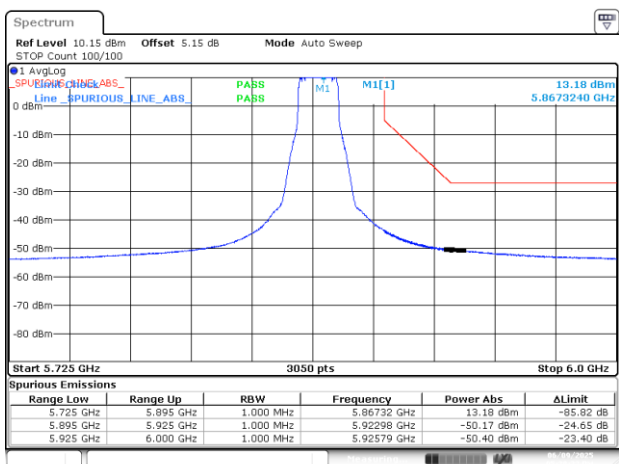


Date: 23.JUN.2025 12:22

BE-NR-HIGH, SISO-B, 802.11n20-HT0, Ch173

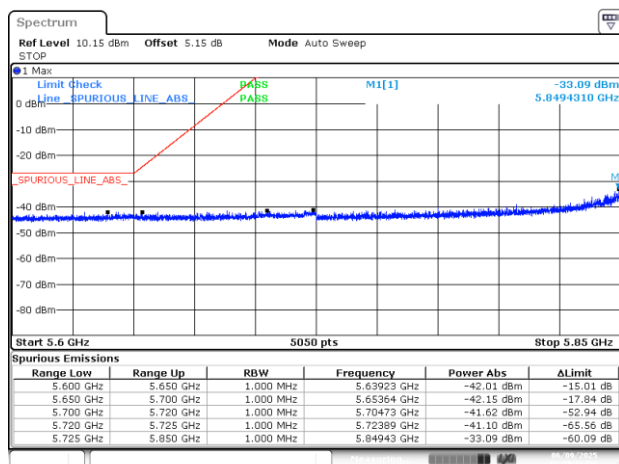


Date: 23.JUN.2025 12:26

BE-NR-LOW, SISO-B, 802.11n20-HT0, Ch177

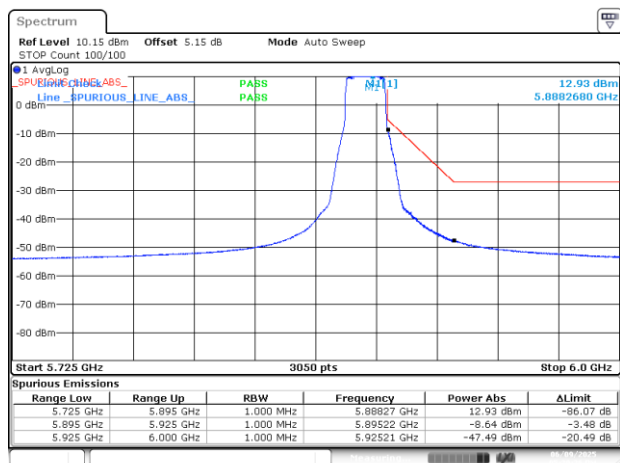


23 JUN 2025 12:07

BE-NR-HIGH, SISO-B, 802.11n20-HT0, Ch177

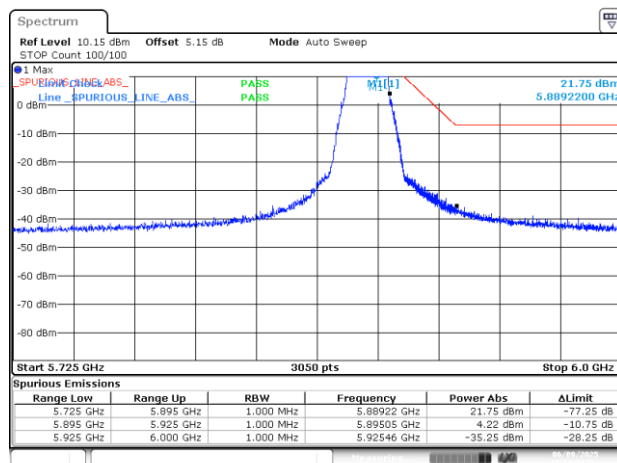


23 JUN 2025 12:03

BE-NR-HIGH-PEAK, SISO-B, 802.11n20-HT0, Ch177

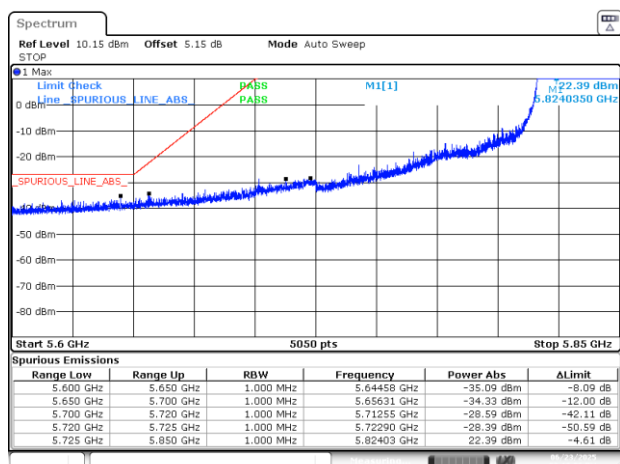


Date: 23 JUN 2025 14:18:06

BE-NR-LOW, SISO-B, 802.11n40-HT0, Ch167

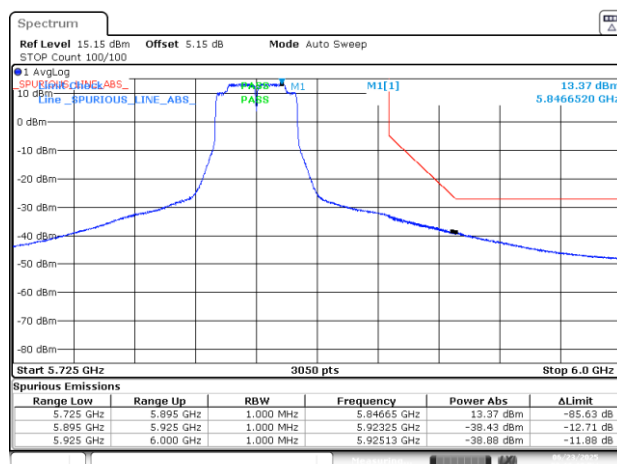


Date: 23 JUN 2025 14:18:19

BE-NR-HIGH, SISO-B, 802.11n40-HT0, Ch167

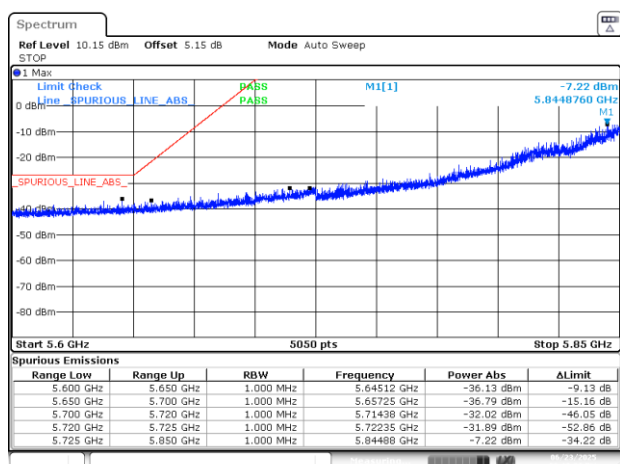


Date: 23 JUN 2025 14:19:20

BE-NR-LOW, SISO-B, 802.11n40-HT0, Ch175

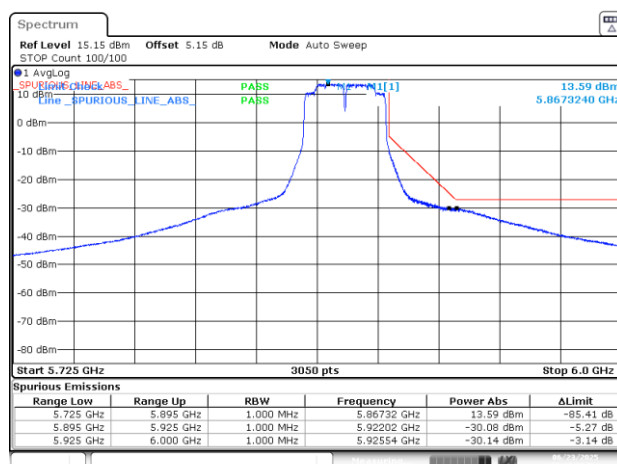


Date: 23 JUN 2025 14:19:33


BE-NR-HIGH, SISO-B, 802.11n40-HT0, Ch175

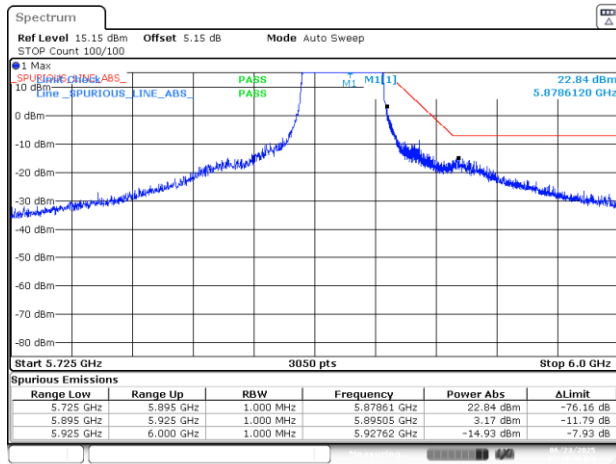


BE-NR-HIGH-PEAK, SISO-B, 802.11n40-HT0, Ch175

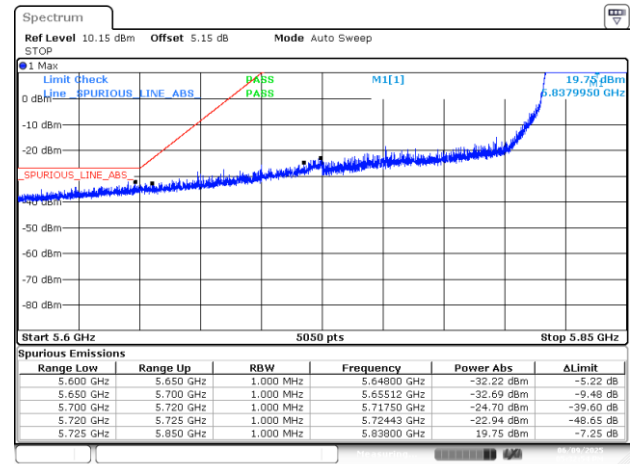


BE-NR-LOW, SISO-B, 802.11ac80-VHT0, Ch171

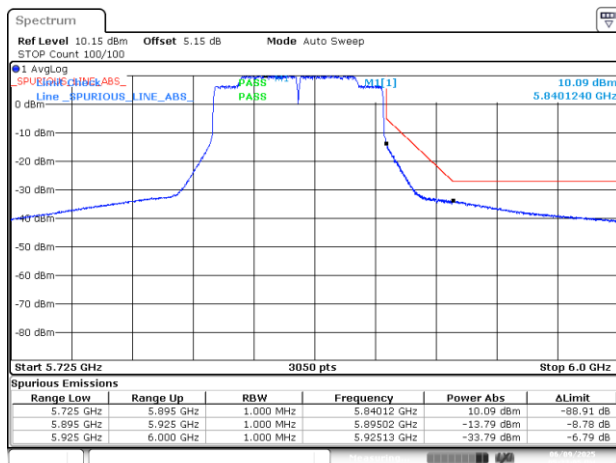


BE-NR-HIGH, SISO-B, 802.11ac80-VHT0, Ch171

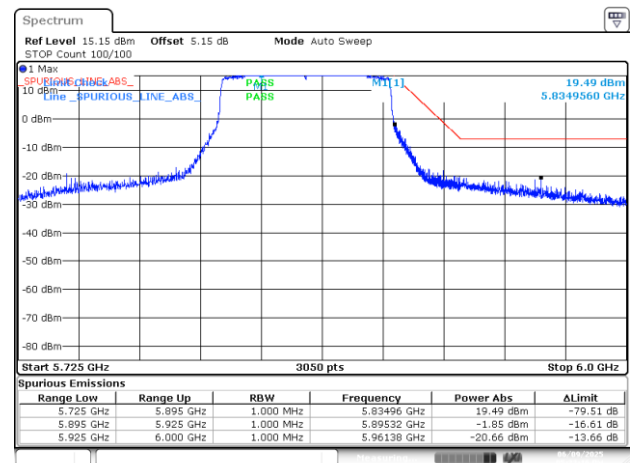

BE-NR-HIGH-PEAK, SISO-B, 802.11ac80-VHT0, Ch171

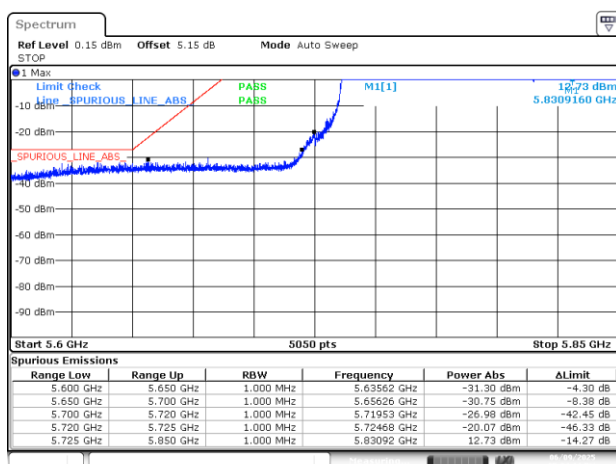


BE-NR-LOW, SISO-B, 802.11ac160-VHT0, Ch163

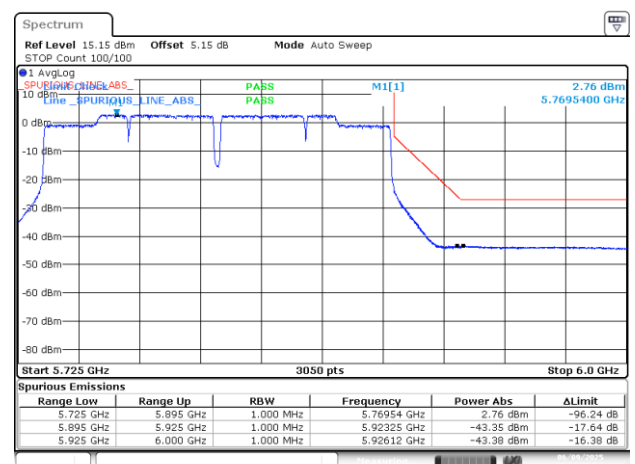


BE-NR-HIGH, SISO-B, 802.11ac160-VHT0, Ch163




BE-NR-HIGH-PEAK, SISO-B, 802.11ac160-VHT0, Ch163

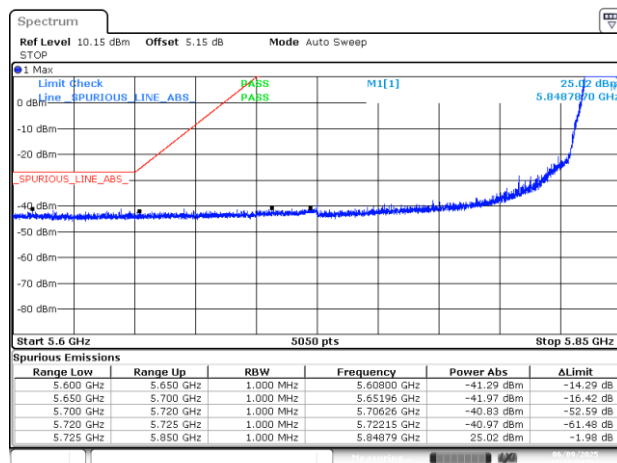


BE-NR-LOW, SISO-B, 802.11ax/be20-MCS0, Ch169

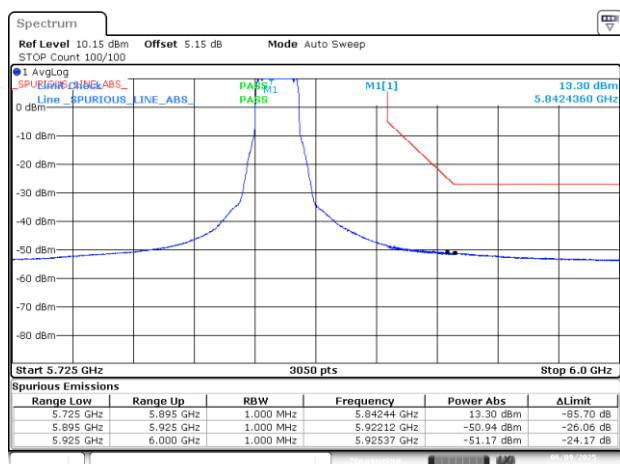


BE-NR-HIGH, SISO-B, 802.11ax/be20-MCS0, Ch169

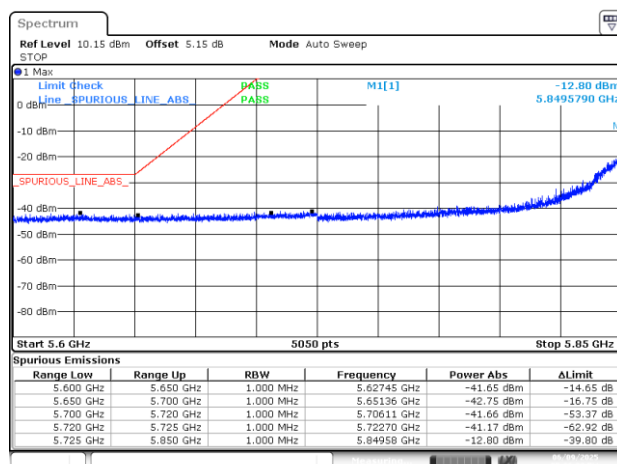

BE-NR-LOW, SISO-B, 802.11ax/be20-MCS0, Ch173

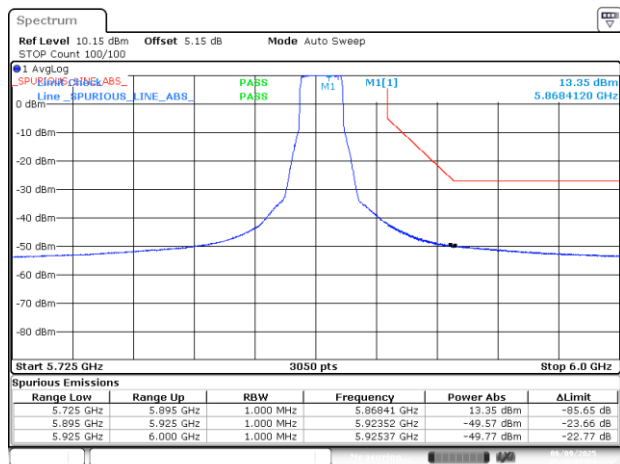

BE-NR-HIGH, SISO-B, 802.11ax/be20-MCS0, Ch173

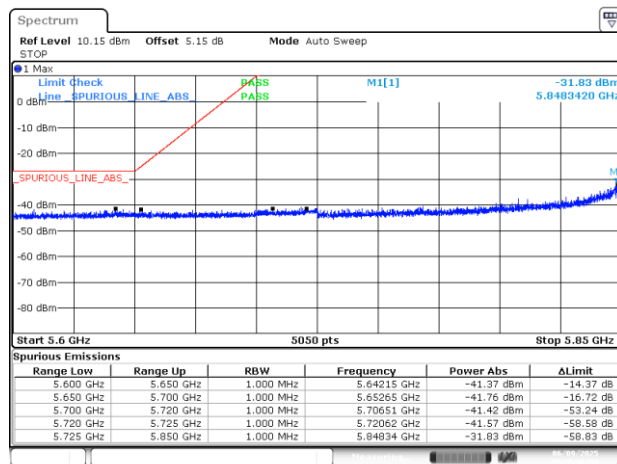

BE-NR-LOW, SISO-B, 802.11ax/be20-MCS0, Ch173