



**AEGIS LABS INC.**



Class II Permissive Change  
Test Report  
And Application for Grant of Equipment Authorization

Pertaining To:

EUT	FCC ID:
<b>Lenovo   X60 Notebook Computer, MN: 1706-BB7</b>	<b>PD9LEN3945ABG</b>

Configuration
<b>Tested with an Intel PRO/Wireless 3945ABG Network Connection, MN: WM3945ABG</b>
With a set of Wistron NeWeb 3A.EDU45.11x dual band antenna

*MEASUREMENTS PERFORMED IN ACCORDANCE WITH*

Regulatory Standard(s)
<b>47 CFR Part 15, Subpart C Section 15.247</b>

Test Method:  
ANSI C63.4: 2003 American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz



Certificate Number: 1111.01

**APPLICANT:**

Intel Corporation  
2111 NE 25<sup>th</sup> Avenue  
Hillsboro, Oregon 97124

Contact(s): Mr. Robert Paxman

**PREPARED BY:**

Aegis Labs, Inc.  
22431 Antonio Parkway B160-417  
Rancho S. Margarita, CA 92688

Agent(s): Mr. Steve Kuiper  
Mr. Rick Candelas  
Mr. Johnny Candelas  
Test Report #: INTEL-051101F  
Test Report Revision: None

	REPORT BODY	APPENDICES	TOTAL PAGES
		A	87
PAGES	18	A	87

The contents of this report shall not be reproduced except in full, without the written approval of Aegis Labs, Inc.

*Page 1 of 18*

*Report Number: INTEL-051101F*

*FCC ID: PD9LEN3945ABG*



AEGIS LABS INC.

## TABLE OF CONTENTS

SECTION	TITLE	PAGE
	<b>COVER SHEET.....</b>	<b>01</b>
	<b>TABLE OF CONTENTS.....</b>	<b>02</b>
<b>1.0</b>	<b>CERTIFICATION OF TEST DATA.....</b>	<b>03</b>
<b>2.0</b>	<b>SUMMARY OF TEST RESULTS.....</b>	<b>06</b>
<b>3.0</b>	<b>ADMINISTRATIVE DATA AND TEST DESCRIPTION.....</b>	<b>07</b>
<b>4.0</b>	<b>DESCRIPTION OF EUT.....</b>	<b>08</b>
4.1	EUT Description.....	08
4.1.1	Channel Number and Frequencies.....	09
4.2	EUT Configuration.....	10
4.3	List of EUT Sub-Assemblies and Host Equipment.....	11
4.4	I/O Cabling Diagram and Description.....	12
<b>5.0</b>	<b>TEST EQUIPMENT AND TEST SETUPS.....</b>	<b>13</b>
5.1	AC Power Line Conducted Emissions.....	13
5.2	Spurious Radiated Emissions.....	14
5.3	Conducted Emissions At The Antenna Port.....	14
5.4	Test and Measurement Equipment Used.....	15
<b>6.0</b>	<b>SAMPLE CALCULATIONS.....</b>	<b>16</b>
<b>7.0</b>	<b>MODIFICATIONS AND RECOMMENDATIONS.....</b>	<b>18</b>

### APPENDICES

A

Test Data

Page 2 of 18  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## 1.0 CERTIFICATION OF TEST DATA

Aegis Labs, Inc. operates as both a Nevada and California Corporation with no organizational or financial relationship with any company, institution, or private individual.

Testing and engineering functions provided by Aegis Labs are furnished through the use of part-time, full-time or consulting engineers with the appropriate qualifications to carry out their duties. The intended purpose of this test report is to describe the measurement procedure and to determine whether the equipment under test "EUT" complies with both the conducted and radiated limits. Limits for emissions testing are described under Subpart C of Part 15 of the FCC rules.

The data, data evaluation and equipment configuration represented herein are a true and accurate representation of the Equipment Under Test (EUT) under the requirements specified in the emissions standard as described below. The test results contained in this report are only representative of the test sample tested as described in Section 3.0 of this report. Certification of the EUT is required as a prerequisite to marketing as defined in Part 2 of the FCC Rules.

### Report Prepared By:

  
\_\_\_\_\_  
**Johnny Candelas**  
Test Technician  
Aegis Labs, Inc.

**11/07/05**  
Date:

### Report Reviewed By:

  
\_\_\_\_\_  
**Rick Candelas**  
Lab Manager  
Aegis Labs, Inc.

**11/07/05**  
Date:

### Report Approved By:

  
\_\_\_\_\_  
**Steve J. Kuiper**  
Quality Assurance Manager  
Aegis Labs, Inc.

**11/07/05**  
Date:



AEGIS LABS INC.

## 2.0 SUMMARY OF TEST RESULTS

The test results provided within this report, indicate that the EUT has been found to be in **COMPLIANCE** with the test specifications based upon the following RF compliance standards:

Pass/Fail determination is based upon the nominal values of the test data.

### 802.11a Mode (5745-5825 MHz)

EMISSIONS STANDARD			
FCC Part 15 Section	Description	Results	Comments
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	5745 MHz = 16.58 MHz 5785 MHz = 16.58 MHz 5825 MHz = 16.58 MHz
15.247(b)(3)	The maximum peak output power of the intentional radiator shall not exceed 1 watt.	PASSED	5745 MHz = 19.71 dBm = 93.54 mW 5785 MHz = 19.59 dBm = 90.99 mW 5825 MHz = 19.64 dBm = 92.04 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(c)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets
15.247(c)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets
15.247(d)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	5745 MHz = -6.83 dB 5785 MHz = -6.17 dB 5825 MHz = -6.17 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheet
15.209	Radiated Emissions (30-1000 MHz)	PASSED	See Data Sheet



AEGIS LABS INC.

## 2.0 Summary of Test Results (Continued)

The test results provided within this report, indicate that the EUT has been found to be in **COMPLIANCE** with the test specifications based upon the following RF compliance standards:

Pass/Fail determination is based upon the nominal values of the test data.

### **802.11b Mode (2412-2462 MHz)**

EMISSIONS STANDARD			
FCC Part 15 Section	Description	Results	Comments
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	2412 MHz = 8.67 MHz 2437 MHz = 8.83 MHz 2462 MHz = 8.75 MHz
15.247(b)(3)	The maximum peak output power of the intentional radiator shall not exceed 1 watt.	PASSED	2412 MHz = 19.91 dBm = 97.95 mW 2437 MHz = 20.79 dBm = 119.95 mW 2462 MHz = 20.65 dBm = 116.14 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(c)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets
15.247(c)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets
15.247(d)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	2412 MHz = -10.00 dB 2437 MHz = -7.83 dB 2462 MHz = -8.67 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheet
15.209	Radiated Emissions (30-1000 MHz)	PASSED	See Data Sheet



AEGIS LABS INC.

## 2.0 Summary of Test Results (Continued)

The test results provided within this report, indicate that the EUT has been found to be in **COMPLIANCE** with the test specifications based upon the following RF compliance standards:

Pass/Fail determination is based upon the nominal values of the test data.

### **802.11g Mode (2412-2462 MHz)**

#### **EMISSIONS STANDARD**

FCC Part 15 Section	Description	Results	Comments
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	2412 MHz = 16.58 MHz 2437 MHz = 16.58 MHz 2462 MHz = 15.75 MHz
15.247(b)(3)	The maximum peak output power of the intentional radiator shall not exceed 1 watt.	PASSED	2412 MHz = 24.36 dBm = 272.90 mW 2437 MHz = 24.81 dBm = 302.69 mW 2462 MHz = 24.14 dBm = 259.42 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(c)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets
15.247(c)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets
15.247(d)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	2412 MHz = -7.00 dB 2437 MHz = -4.83 dB 2462 MHz = -7.67 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheet
15.209	Radiated Emissions (30-1000 MHz)	PASSED	See Data Sheet



AEGIS LABS INC.

### 3.0 ADMINISTRATIVE DATA AND TEST DESCRIPTION

<b>DEVICE TESTED:</b>	ITE Type: Lenovo   X60 Notebook Computer Model Number(s): 1706-BB7 Serial Number: AA-GH38D FCC ID: PD9LEN3945ABG
<b>TEST DATE (S):</b>	November 1 - 4, 2005
<b>DATE EUT RECEIVED:</b>	October 31, 2005
<b>ORIGIN OF TEST SAMPLE (S):</b>	Production Unit
<b>RESPONSIBLE PARTY:</b>	Intel Corporation 2111 NE 25 <sup>th</sup> Avenue Hillsboro, Oregon 97124
<b>CLIENT CONTACT:</b>	Mr. Robert Paxman
<b>MANUFACTURER:</b>	Intel Corporation
<b>TEST LOCATION:</b>	Aegis Labs, Inc. 32231 Trabuco Creek Road Trabuco Canyon, CA 92678 Conducted Site #2 Radiated Site #2
<b>A2LA CERTIFICATE:</b>	1111.01, Valid through February 28, 2006
<b>PURPOSE OF TEST:</b>	To demonstrate compliance with the relevant standards described in Section 2.0 of this report.
<b>TEST (S) PERFORMED:</b>	Refer to Table in Section 2.0 of this report.

All calibration vendors were responsible for certifying Aegis Labs, Inc. test equipment as per the manufacturer's specifications and that the equipment is calibrated using instruments and standards where the accuracy is traceable to the National Institute of Standards and Technology (NIST). Calibration of all test equipment conforms to ANSI/NCSL Z540-1 and ISO 10012-1 and/or ISO/IEC Guide 17025 compliance (Additionally, other pertinent test equipment will carry MIL-STD-45662A). All calibration documents are on file with Aegis Labs, Inc., with copies provided upon request.

Page 7 of 18  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## 4.0 DESCRIPTION OF EUT

### 4.1 EUT Description

<b>Equipment Under Test (EUT)</b>	
<b>Trade Name:</b>	Lenovo   X60 Notebook Computer
<b>Model Number:</b>	1706-BB7 tested with an Intel PRO/Wireless 3945ABG Network Connection, MN: WM3945ABG
<b>Frequency Range:</b>	802.11a = 5745 – 5825 MHz 802.11b/g = 2412 – 2462MHz
<b>Type of Transmission:</b>	Direct Sequence Spread Spectrum
<b>Transfer Rate:</b>	1/5.5/11 Mbps for 802.11b mode 6/36/54 Mbps for 802.11g and 802.11a modes
<b>Number of Channels:</b>	802.11a mode (5725-5850 MHz) = 5 802.11b mode (2400-2483.5 MHz) = 11 802.11g mode (2400-2483.5 MHz) = 11
<b>Modulation Type:</b>	DBPSK, DQPSK, CCK, OFDM
<b>Antenna Type:</b>	<u>Wistron NeWeb Corp.:</u> Inverted F (Main/Aux)
<b>Antenna Gain (See Note 2):</b>	<u>Wistron NeWeb Corp.:</u> 2.4 GHz = 1.10 (Main), 1.40 (Aux) dBi 5 GHz = 2.57 (Main), 2.73 (Aux) dBi
<b>Transmit Output Power:</b>	18-20 dBm (Typical) for 802.11a mode 20 dBm (Typical) for 802.11b mode 24-25 dBm (Typical) for 802.11g mode Please see Appendix A (Data Sheets) for actual output power.
<b>Power Supply:</b>	3.3VDC from computer MPCI slot.
<b>Number of External Test Ports Exercised:</b>	2 Antenna Ports (1 Main & 1 Auxiliary)

The Lenovo | X60 Notebook Computer was tested with an Intel PRO/Wireless 3945ABG Network Connection as an embedded 2.4 GHz and 5 GHz Wireless Local Area Network Mini-PCI adapter. It is based on the Mini Card form factor designed to meet the space and size requirements for thin and light notebook PCs. It is capable of a data rate of up to 52 Mbps.

**NOTE 1:** For a more detailed description, please refer to the manufacturer's specifications or User's Manual.

**NOTE 2:** The EUT was tested with a set of antennas. (Refer to the antenna specifications exhibits).



AEGIS LABS INC.

#### 4.1.1 Channel Number and Frequencies

802.11a Mode		802.11b Mode		802.11g Mode	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	1	2412	1	2412
153	5765	2	2417	2	2417
157	5785	3	2422	3	2422
161	5805	4	2427	4	2427
165	5825	5	2432	5	2432
		6	2437	6	2437
		7	2442	7	2442
		8	2447	8	2447
		9	2452	9	2452
		10	2457	10	2457
		11	2462	11	2462

Page 9 of 18  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

#### 4.2 EUT Configuration

The EUT was tested with an Intel PRO/Wireless 3945ABG Network Connection installed in its Mini PCI-E slot and was connected to a set of Wistron NeWeb Corp. dual band antennas via its main and auxiliary antenna ports. Data can be found in Appendix A.

For conducted emissions at the AC mains port and radiated emissions, the EUT was connected to a Compaq monitor and Logitech mouse via its video and USB ports respectively.

The low, middle, and high channels were tested in 802.11a, b, & g modes. Also, the EUT was tested once transmitting from the MAIN antenna port and once transmitting from the AUX antenna port. The EUT was placed in either continuous transmit or continuous receive mode by a program provided by the manufacturer (*CRTU Version 4.0.18.0000*).

Page 10 of 18  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

#### 4.3 List of EUT, Sub-Assemblies, and Host Equipment

#### LIST OF EUT AND SUB-ASSEMBLIES

Equipment Name	Manufacturer	Model Number	Serial Number
Lenovo   X60 Notebook Computer	Lenovo	1706-BB7	AA-GH38D
<b>EUT Sub-Assemblies</b>			
Intel PRO/Wireless 3945ABG Network Connection	Intel Corporation	WM3945ABG	41W1026Z1ZB425 8R000
Auxiliary Dual Band Antenna	Wistron NeWeb Corp.	3A.EDU45.11x	N/A
Main Dual Band Antenna	Wistron NeWeb Corp.	3A.EDU45.11x	N/A

#### HOST EQUIPMENT LIST

Equipment Name	Manufacturer	Model Number	Serial Number
Monitor	Compaq	610	712BC060B526
Mouse	Logitech	Y-BF37	MCTZ5200581
Keyboard	Logitech	M-BJ58	PMA32715049

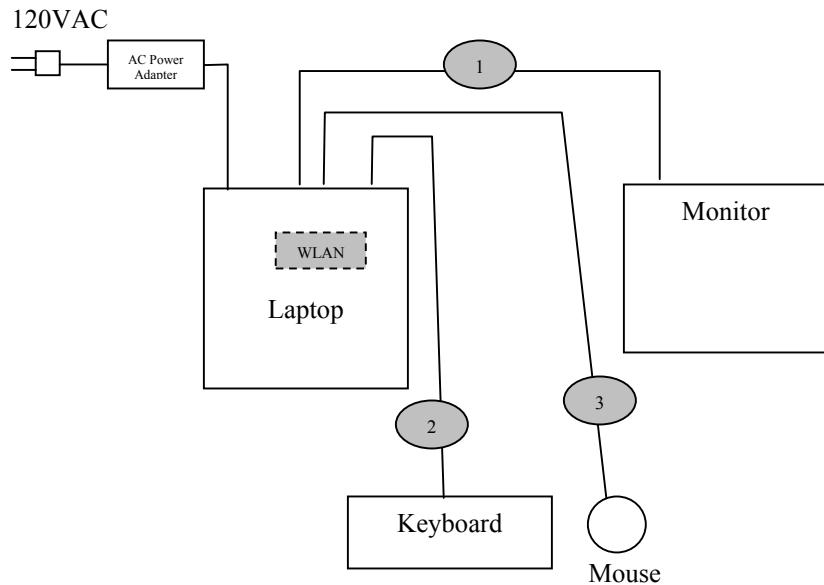
NOTE: All the power cords of the above support equipment are standard non-shielded, 1.8 meters long.

Page 11 of 18  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

#### 4.4 I/O Cabling Diagram and Description



Cable 1: This is a 6-foot braid and foil shielded round cable connecting the host computer with the monitor. It has metallic DB-15 type connector at the computer end and is hardwired to the monitor. The cable is bundled to a length of one meter and the shield of the cable is grounded to the chassis of both devices via the connector shells.

Cable 2: This is a 6-foot braid and foil shielded round cable connecting the host computer to the keyboard. It has a metallic 6-pin mini din type connector at the computer end and is hardwired to the keyboard. The shield of the cable is grounded to the chassis of the computer via the connector shell.

Cable 3: This is a 6-foot braid and foil shielded round cable connecting the host computer to the mouse. It has a metallic 6-pin mini din type connector at the computer end and is hardwired to the mouse. The shield of the cable is grounded to the chassis of the computer via the connector shell.



AEGIS LABS INC.

## 5.0 TEST EQUIPMENT AND TEST SETUPS

The test equipment settings and functions are selected using the guidance of ANSI C63.4: 2003. All test equipment setups and operations during conducted and radiated emissions testing are in accordance with this reference document.

### 5.1 AC Power Line Conducted Emissions

During conducted emissions measurements, a spectrum analyzer was used as the measuring instrument along with a preselector and quasi-peak detector. A 10 dB attenuation pad was used for the protection of the spectrum analyzer input stage. The conducted emissions from the EUT in the frequency range from 150 kHz to 30 MHz were captured for graphical display through the use of automated LABVIEW EMI measurement software. All graphical readings were measured in the “Peak” mode only to reduce testing time. Upon completion of the graphical scan, the test lab personnel performed the conducted measurement scan manually using the spectrum analyzer front panel keys. All peak measurements coming within 3 dB of the limit line were “Averaged” and/or “Quasi-Peaked” and denoted appropriately in the EXCEL spreadsheet.

The Equipment Under Test (EUT) was configured as a system with peripherals connected, so that at least one interface port of each type is connected to one external peripheral when tested for conducted emissions according to ANSI C63.4: 2003. Excess power cord length was wrapped in a bundle 30 to 40 centimeters in length near the center of the cord. The EUT was tested in a tabletop configuration.

The emission readings for Line 1 and Line 2 are highlighted on the data sheets in Appendix A. The graphical scans only reflects peak readings while the tabulated data sheets reflect peak, average, and/or quasi-peak readings which ever applies.



AEGIS LABS INC.

## 5.2 Spurious Radiated Emissions

A spectrum analyzer was used as the measuring instrumentation along with a preselector and quasi-peak-detector. The pre-amplifiers were used to increase the sensitivity of the instrument. The spectrum analyzer was used in the peak detector mode with the “max-hold” feature activated and in Positive Peak mode. In this mode, the spectrum analyzer records the highest measured reading over all the sweeps. The quasi-peak detector was used only for those readings, which are marked accordingly in the data sheet. The effective measurement bandwidth used for the radiated emissions test was 120 kHz for (30 MHz- 1000 MHz). The spectrum analyzer operated such that the modulation of the signal was filtered out to set the analyzer in linear mode. For testing beyond 1000 MHz a spectrum analyzer capable of taking reading above 1000 MHz was connected to the high frequency amplifier, where these measurement readings were taken with the transducer placed at a 3-meter test distance from the EUT.

The Open Area Test Sites (OATS) was used for radiated emission testing. These test sites are designed according to ANSI C63.4: 2003 and ANSI C63.7: 1992 guidelines. The Measurements were conducted in accordance with ANSI C63.4: 2003 and ANSI C63.7: 1992 requirements.

Broadband biconical, log periodic, and horn antennas were used as transducers during the measurement reading phase. The frequency spans were wide (30 MHz-88 MHz, 88 MHz- 216 MHz, 216 MHz- 300 MHz, and 300 MHz- 1000 MHz). After 1000 MHz the horn antenna was used to measure emissions. The emission readings in both horizontal and vertical polarities are highlighted on the data sheets in Appendix A.

## 5.3 Conducted Emissions at the Antenna Port

A spectrum analyzer or power meter was used as the measuring instrumentation along with an attenuator and/or filter connected to the EUT antenna port. The attenuator and filters are used to ensure that the front end of the measurement instrument is not overloaded by the fundamental transmission. The instruments recorded the measured readings with the bandwidths (video and resolution) set in accordance with the FCC Rules and regulations.

For the power out measurements in 802.11b and 802.11g modes a peak power meter was used along with a peak power sensor with a wide enough bandwidth to capture the entire fundamental transmission. For 802.11a mode a spectrum analyzer with “Channel Power Measurement” function was used to measure the peak output power.

The measured readings are on the data sheets in Appendix A.



AEGIS LABS INC.

## 5.4 Test and Measurement Equipment Used

TEST EQUIPMENT USED					
Equipment Name	Manufacturer	Model Number	Serial Number	Calibration Due Date	Calibration Cycle
Spectrum Analyzer	Agilent	8564EC	4046A00387	08/15/06	1 Year
Preamp	Miteq	JS42-01001800-25-10P	815980	07/21/06	1 Year
2.4 GHz Notch Filter	Micro-Tronics	BRM50702-02	003	04/21/06	1 Year
5.15-5.35 GHz Notch Filter	Microwave Circuits	N0452502	3173-01	06/27/06	1 Year
5.725-5.850 GHz Notch Filter	Microwave Circuits	N0257881	3173-01	06/27/06	1 Year
Horn Antenna	EMCO	3115	2230	02/06/06	1 Year
Antenna - 18-26.5 GHz Pre-amplified Horn	Aegis Labs, Inc.	H042	SLK-35-3W	11/04/05	1 Year
Antenna - 26.5-40 GHz Pre-amplified Horn	Aegis Labs, Inc.	H028	GM1260-10	11/04/05	1 Year
Cable	Semflex	60637	S1L29BFS1348	04/11/06	1 Year
Temperature/Humidity Monitor	Dickson	TH550	7255185	N/A	N/A
Power Meter	Anritsu	ML2487A	6K00001785	04/12/06	1 Year
Wide Bandwidth Sensor	Anritsu	MA2491A	31193	04/12/06	1 Year
12dB Attenuator	Narda	4779-12	203	08/06/06	1 Year
Antenna - Biconical	EMCO	3110	9108-1421	05/17/06	1 Year
Antenna - Log Periodic	EMCO	3148	4947	05/11/06	1 Year
LISN (EUT)	FCC	FCC-LISN-50-25-2	9931	02/06/06	1 Year
LISN (Access)	Com-Power	LI-200	12019	07/05/07	1 Year
LISN (Access)	Com-Power	LI-200	12018	07/05/07	1 Year

Page 15 of 18

Report Number: INTEL-051101F

FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## 6.0 SAMPLE CALCULATIONS

If a preamplifier is used during the Radiated Emissions Testing, it is required that the amplifier gain be subtracted from the Spectrum Analyzer (Meter) Reading. In addition, a correction factor for the antenna, cable and a distance factor, if any, must be applied to the Meter Reading before a true field strength reading can be obtained. In the Automatic Mode of A.R.M.S. measurements, these considerations are automatically presented as a part of the printout. In the case of manual measurements and for greater efficiency and convenience, usage of the calibration correction factors in the Appendices is necessary to calculate the Corrected Meter Reading. These correlation factors for each meter reading shall be modified to reflect these correlation factors at each frequency value so that the meter readings can be compared directly to the modified specification limit. This modified specification limit is referred to as the "Corrected Meter Reading Limit" (CML).

The equation shall be derived in the following manner:

$$\text{Corrected Meter Reading} = \text{Meter Reading} + F + C - G - D$$

Where, F = Antenna Factor

C = Cable Factor

G = Amplifier Gain

D = Distance Factor

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

$$\text{CML} = \text{Specification Limit} - F - C + G + D$$

For the manual mode of measurement, a table of corrected meter reading limits shall be used to permit immediate comparison of the meter reading to determine if the measured emission amplitude exceeded the specification limit at that specific frequency. There shall be two calculation sheets done, one for three meter and one for ten-meter measurement distances, where applicable. The correction factors for the antenna and the amplifier gain are attached in the Appendices.



AEGIS LABS INC.

## 6.0 Sample Calculations (Continued)

Peak Transmit Power Output:

A correction factor for the cable must be applied to the Conducted Power before a true power reading can be obtained. This is referred to as the “Corrected Power” (CP).

The equation shall be derived in the following manner:

Corrected Power Reading = Conducted Power Reading + C

Where, C = Cable Factor

The conducted power is taken in units of dBm. To obtain units of mW the following equation is used:

$$mW = 10^{(dBm/10)}$$



*AEGIS LABS INC.*

## **7.0 MODIFICATIONS AND RECOMMENDATIONS**

No modifications were made to the EUT.

*Page 18 of 18  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG*



**AEGIS LABS INC.**

## **APPENDIX A**

### ***TEST DATA***

*Page 1 of 69 (Appendix A)*  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## AC POWER LINE CONDUCTED EMISSIONS TEST RESULTS

<b>CLIENT:</b>	Intel Corporation	<b>DATE:</b>	11/04/05
<b>EUT:</b>	Lenovo   X60 Notebook Computer	<b>PROJECT NUMBER:</b>	INTEL-051101
<b>MODEL NUMBER:</b>	1706-BB7	<b>TEST ENGINEER:</b>	JC
<b>SERIAL NUMBER:</b>	AA-GH38D	<b>SITE #:</b>	2
<b>CONFIGURATION:</b>	Tested with an Intel PRO/Wireless 3945ABG Network Connection installed in its mini PCI slot and connected to a set of <b>Wistron NeWeb Corp.</b> antennas.	<b>TEMPERATURE:</b>	20 C
		<b>HUMIDITY:</b>	41% RH
		<b>TIME:</b>	2:00 PM

<b>Standard:</b>	FCC CFR 47, Part 15.207
<b>Description:</b>	AC Power Line Conducted Emissions
<b>Results:</b>	Passes the conducted limits by -8.06 @ 0.150 MHz

Conducted Limits		
Frequency (MHz)	Quasi-Peak Limit (dBuV)	Average Limit (dBuV)
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

NOTE: During preliminary scans, there wasn't any difference which channel or data rate was used with the EUT; therefore only Channel 1 at a data rate of 1 Mbps was used for final testing. Also, the scan was only done with the Wistron NeWeb Corp. set of antennas.

Page 2 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



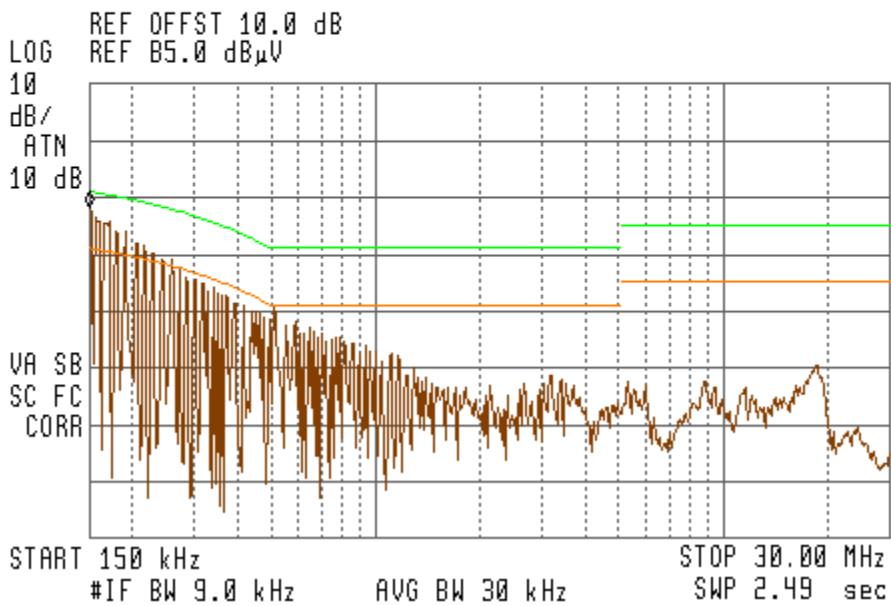
AEGIS LABS INC.

## AC Power Line Conducted Emissions Test Results (Continued)

## CONDUCTED EMISSIONS – LINE 1

Freq. (MHz)	Meter Reading (dB $\mu$ V)	Pk, Avg, or Q-P Reading (dB $\mu$ V)	Average Limit (dB $\mu$ V)	Average Delta (dB)	Quasi-Peak Limit (dB $\mu$ V)	Quasi-Peak Delta (dB)
0.15	53.03	36.79	av	56.00	-9.02	66.00
0.16	51.51	25.32	av	56.00	-20.52	66.00
0.17	50.69	24.51	av	56.00	-21.36	66.00
0.18	48.92	23.66	av	56.00	-22.23	66.00
0.19	49.06	34.35	av	56.00	-11.57	66.00
0.21	46.83	21.78	av	56.00	-24.18	66.00

14:02:07 NOV 04, 2005  
 14:52:53 APR 14, 2003 11:58:46 SEP 23, 2004  
 ACTV DET: PEAK  
 MEAS DET: PEAK QP AVG  
 MKR 150 kHz  
 63.03 dB $\mu$ V



RBW = 100 kHz, VBW = 100 kHz

Page 3 of 69 (Appendix A)  
 Report Number: INTEL-051101F  
 FCC ID: PD9LEN3945ABG



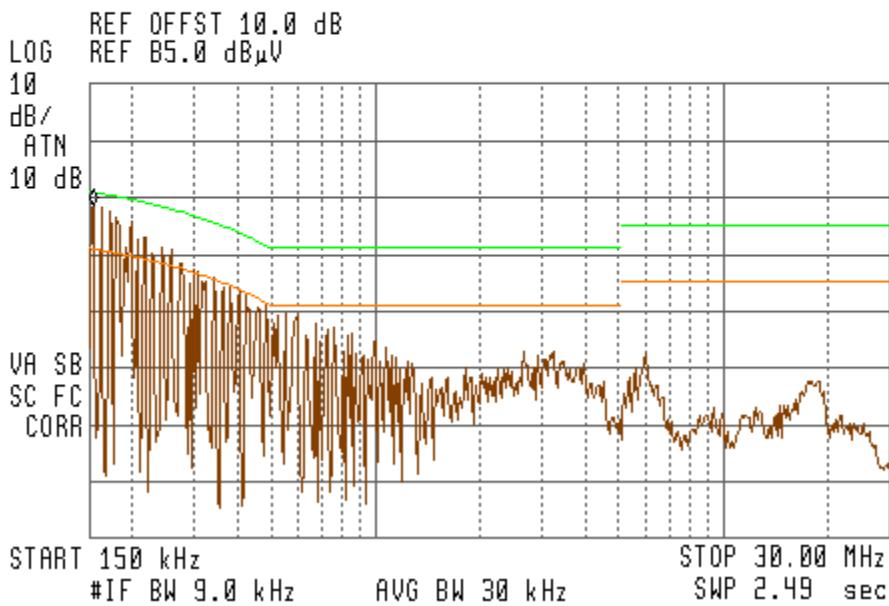
AEGIS LABS INC.

## AC Power Line Conducted Emissions Test Results (Continued)

## CONDUCTED EMISSIONS - LINE 2

Freq. (MHz)	Meter Reading (dBuV)	Pk, Avg, or Q-P Reading (dBuV)	Average Limit (dBuV)	Average Delta (dB)	Quasi-Peak Limit (dBuV)	Quasi-Peak Delta (dB)
0.15	53.43	37.76	av	56.00	-8.06	66.00
0.16	53.24	26.35	av	56.00	-19.50	66.00
0.17	52.29	25.18	av	56.00	-20.69	66.00
0.18	51.26	24.47	av	56.00	-21.43	66.00
0.20	50.81	35.20	av	56.00	-10.75	66.00
0.22	47.90	23.02	av	56.00	-22.94	66.00

13:56:27 NOV 04, 2005  
 14:52:53 APR 14, 2003 11:58:46 SEP 23, 2004  
 ACTV DET: PEAK  
 MEAS DET: PEAK QP AVG  
 MKR 150 kHz  
 63.43 dB $\mu$ V



RBW = 100 kHz, VBW = 100 kHz

Page 4 of 69 (Appendix A)  
 Report Number: INTEL-051101F  
 FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## SPURIOUS RADIATED EMISSIONS TEST RESULTS

<b>CLIENT:</b>	Intel Corporation	<b>DATE:</b>	11/04/05
<b>EUT:</b>	Lenovo   X60 Notebook Computer	<b>PROJECT NUMBER:</b>	INTEL-051101
<b>MODEL NUMBER:</b>	1706-BB7	<b>TEST ENGINEER:</b>	JC
<b>SERIAL NUMBER:</b>	AA-GH38D	<b>SITE #:</b>	2
<b>CONFIGURATION:</b>	Tested with an Intel PRO/Wireless 3945ABG Network Connection installed in its mini PCI slot and connected to a set of <b>Wistron NeWeb Corp.</b> antennas.	<b>TEMPERATURE:</b>	21 C
		<b>HUMIDITY:</b>	44% RH
		<b>TIME:</b>	3:00 PM

<b>Standard:</b>	FCC Pt. 15.209
<b>Description:</b>	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Sec. 15.209.
<b>Results:</b>	Passes the radiated limits by -4.01@ 375.02 MHz (Vertical antenna polarization)

<b>Radiated Limits</b>	
<b>Frequency (MHz)</b>	<b>Quasi-Peak Limit (dBuV) @ 10m</b>
30-88	40
88-216	43.5
216-960	46
960-1000	54

NOTE 1: During preliminary scans, there wasn't any difference which channel or data rate was used with the EUT; therefore only Channel 1 at a data rate of 1 Mbps was used for final testing. Also, the scan was only done with the Wistron NeWeb Corp. set of antennas.

NOTE 2: RBW/VBW = 1 MHz

Page 5 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

**RADIATED EMISSIONS - Horizontal Antenna Polarization**

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Peak, Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	10 Meter Distance Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) + =FAIL
71.99	13.40	400	225			1.32	6.76	10.46	31.94	40.00	-8.06
83.96	12.37	400	90			1.44	7.31	10.46	31.58	40.00	-8.42
119.96	6.66	400	225			1.80	13.19	10.46	32.11	43.50	-11.39
125.00	7.40	400	180			1.85	13.70	10.46	26.01	43.50	-17.49
229.07	5.18	400	315			2.55	17.33	10.46	30.34	46.00	-15.66
249.97	10.83	350	90			2.80	17.50	10.46	41.59	46.00	-4.41
300.01	6.49	325	135			2.90	13.50	10.46	33.35	46.00	-12.65
335.99	7.31	300	180			3.12	15.17	10.46	28.74	46.00	-17.26
374.98	7.60	300	135			3.35	14.80	10.46	36.21	46.00	-9.79
400.02	8.41	300	315			3.50	14.90	10.46	37.27	46.00	-8.73
449.99	6.37	250	0			3.70	16.10	10.46	30.26	46.00	-15.74

**RADIATED EMISSIONS - Vertical Antenna Polarization**

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Peak, Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	10 Meter Distance Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) + =FAIL
46.63	12.47	100	315			1.07	11.71	10.46	35.71	40.00	-4.29
71.96	14.98	100	180			1.32	6.38	10.46	33.14	40.00	-6.86
83.97	14.13	100	225			1.44	7.34	10.46	33.36	40.00	-6.64
119.98	7.05	100	90			1.80	12.10	10.46	24.36	43.50	-19.14
229.06	5.34	100	180			2.55	17.66	10.46	30.67	46.00	-15.33
249.99	8.78	100	225			2.80	18.50	10.46	40.54	46.00	-5.46
300.01	7.91	100	0			2.90	14.50	10.46	35.77	46.00	-10.23
335.98	6.44	100	315			3.12	15.60	10.46	35.62	46.00	-10.38
375.02	12.08	100	45			3.35	16.10	10.46	41.99	46.00	-4.01
385.00	7.86	100	0			3.41	15.82	10.46	37.55	46.00	-8.45
399.98	8.46	100	90			3.50	15.40	10.46	29.36	46.00	-16.64

NOTE: The measurements were taken at 10 meters and extrapolated to 3 meters.

NOTE 2: The measurements are Peak readings unless otherwise specified.



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

<b>CLIENT:</b>	Intel Corporation	<b>DATE:</b>	11/03/05
<b>EUT:</b>	Lenovo   X60 Notebook Computer	<b>PROJECT NUMBER:</b>	INTEL-051101
<b>MODEL NUMBER:</b>	1706-BB7	<b>TEST ENGINEER:</b>	BM
<b>SERIAL NUMBER:</b>	AA-GH38D	<b>SITE #:</b>	2
<b>CONFIGURATION:</b>	Tested with an Intel PRO/Wireless 3945ABG Network Connection installed in its mini PCI slot and connected to a set of <b>Wistron NeWeb Corp.</b> antennas in <b>802.11a (5745-5825 MHz) mode.</b>	<b>TEMPERATURE:</b>	12 C
		<b>HUMIDITY:</b>	90% RH
		<b>TIME:</b>	9:00 PM

<b>Standard:</b>	FCC CFR 47, Part 15.247(c)
<b>Description:</b>	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.
<b>Results:</b>	Passes (See Data Sheets)

Unwanted Spurious Emissions Limits			
Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m) (Emissions in the restricted bands)	Field Strength (dBm/MHz) (Emissions outside the restricted bands)
Above 960	500	54.00 (Average) 74.00 (Peak)	< -20 dBc

Page 7 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

**Fundamental Measurements in 802.11a mode (5745-5825 MHz)**

**Channels 149, 157, & 169**

**Continuous TX at MAIN Antenna port with Wistron NeWeb Corp. Antennas**

**Aegis Labs, Inc. File #: INTEL-051101-06**

### RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)		Note
5745.00	67.33	200	0				4.75	35.05	107.12	
5745.00				55.59	A		4.75	35.05	95.38	
5785.00	67.83	150	0				4.77	35.07	107.67	
5785.00				56.29	A		4.77	35.07	96.13	
5825.00	66.67	100	135				4.78	35.10	106.55	
5825.00				55.54	A		4.78	35.10	95.42	

### RADIATED EMISSIONS – Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)		Note
5745.00	64.50	100	90				4.75	34.85	104.09	
5745.00				53.84	A		4.75	34.85	93.43	
5785.00	68.33	100	90				4.77	34.87	107.97	
5785.00				56.45	A		4.77	34.87	96.09	
5825.00	66.67	100	90				4.78	34.90	106.35	
5825.00				55.89	A		4.78	34.90	95.57	



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

**Band Edge Field Strength Measurements in 802.11a mode (5745-5825 MHz)**  
**Channels 149, 157, & 169**  
**Continuous TX at MAIN Antenna port with Wistron NeWeb Corp. Antennas**  
**Aegis Labs, Inc. File #: INTEL-051101-06**

### RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Correcte d Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Note
5725.00	31.33	200	0				4.74	35.04	71.10	87.12	-16.02
5850.00	30.33	100	135				4.79	35.11	70.23	86.55	-16.31

### RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Correcte d Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Note
5725.00	31.17	100	90				4.74	34.84	70.74	84.09	-13.35
5850.00	30.83	100	90				4.79	34.91	70.53	86.35	-15.81

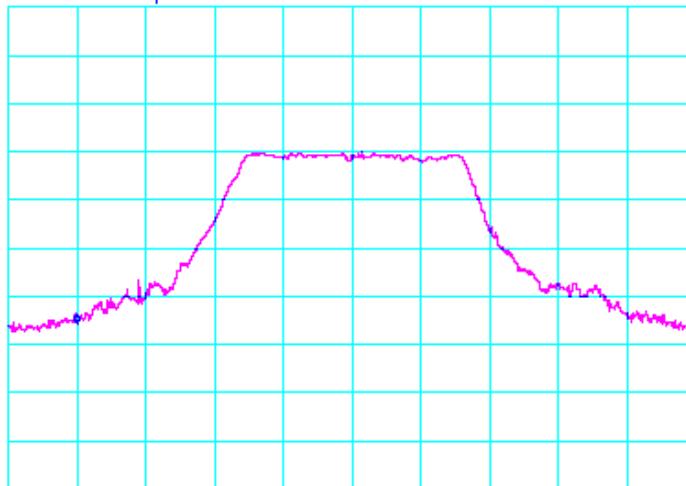
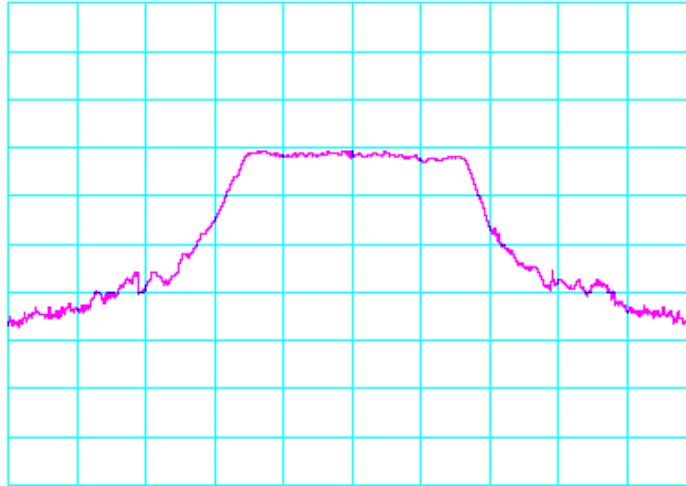
Page 9 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

Test Date	Data	Test Eng.
11/03/05	5.745 GHz band edge PEAK (Horizontal Antenna Polarity) (INTEL-051101-06a05)	BM
	<p>*ATTEN 0dB RL 97.0dB<math>\mu</math>V 10dB/ MKR 31.33dB<math>\mu</math>V 5.72500GHz</p> 	
	<p>CENTER 5.74500GHz SPAN 50.00MHz *RBW 1.0MHz *VBW 1.0MHz SWP 50.0ms</p>	
Test Date	Data	Test Eng.
11/03/05	5.825 GHz band edge PEAK (Horizontal Antenna Polarity) (INTEL-051101-06a06)	BM
	<p>*ATTEN 0dB RL 97.0dB<math>\mu</math>V 10dB/ MKR 30.33dB<math>\mu</math>V 5.85000GHz</p> 	
	<p>CENTER 5.82500GHz SPAN 50.00MHz *RBW 1.0MHz *VBW 1.0MHz SWP 50.0ms</p>	

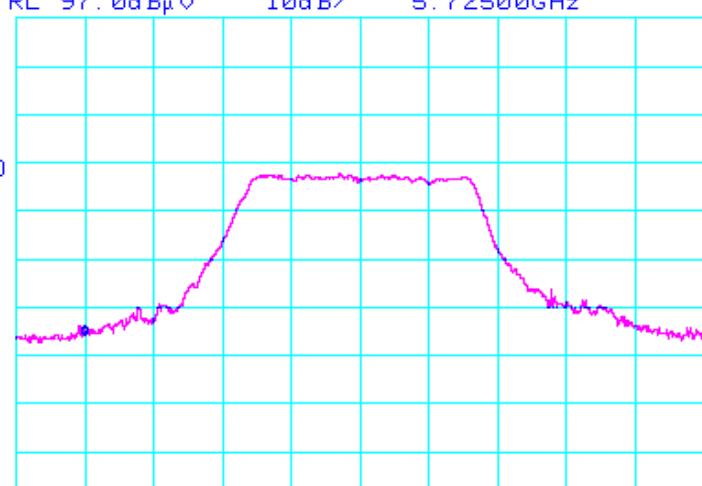
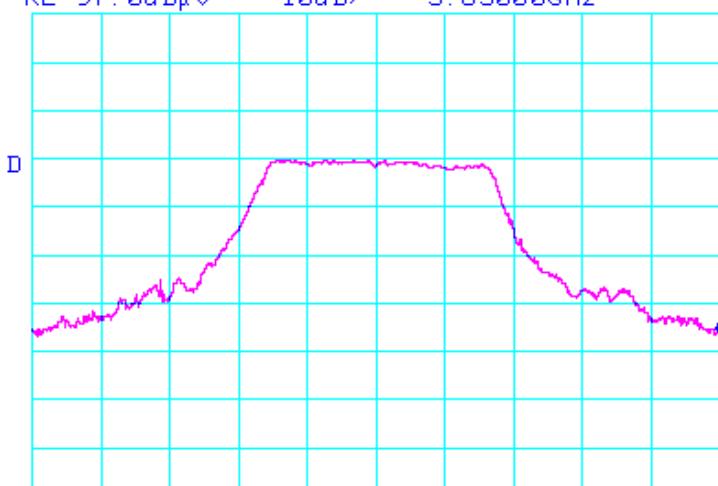
Page 10 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

Test Date	Data	Test Eng.
11/03/05	5.745 GHz band edge PEAK (Vertical Antenna Polarity) (INTEL-051101-06a07)	BM
	<p>*ATTEN 0dB RL 97.0dB<math>\mu</math>V 10dB/ MKR 31.17dB<math>\mu</math>V 5.72500GHz</p> 	
	<p>CENTER 5.74500GHz SPAN 50.00MHz *RBW 1.0MHz *VBW 1.0MHz SWP 50.0ms</p>	
Test Date	Data	Test Eng.
11/03/05	5.825 GHz band edge PEAK (Vertical Antenna Polarity) (INTEL-051101-06a08)	BM
	<p>*ATTEN 0dB RL 97.0dB<math>\mu</math>V 10dB/ MKR 30.83dB<math>\mu</math>V 5.85000GHz</p> 	
	<p>CENTER 5.82500GHz SPAN 50.00MHz *RBW 1.0MHz *VBW 1.0MHz SWP 50.0ms</p>	

Page 11 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11a mode (5745-5825 MHz)*

*Channels 149, 157, & 169*

**Continuous TX at MAIN Antenna port with Wistron NeWeb Corp. Antennas**

*Aegis Labs, Inc. File #: INTEL-051101-08*

### RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Note
3830.00	52.33	100	135		46.75	3.84	32.46	41.88	74.00	-32.12	Ch. 149
3830.00				40.03	A	46.75	3.84	32.46	29.58	54.00	-24.42
3856.66	53.17	100	135		46.74	3.86	32.53	42.81	74.00	-31.19	Ch. 157
3856.66				40.35	A	46.74	3.86	32.53	29.99	54.00	-24.01
11570.00	53.67	100	135		44.97	6.89	39.53	55.12	74.00	-18.88	
11570.00				40.03	A	44.97	6.89	39.53	41.48	54.00	-12.52
3883.33	53.17	100	135		46.74	3.87	32.60	42.90	74.00	-31.10	Ch. 165
3883.33				41.21	A	46.74	3.87	32.60	30.94	54.00	-23.06
11650.00	52.33	100	225		44.96	6.92	39.56	53.84	74.00	-20.16	
11650.00				39.39	A	44.96	6.92	39.56	40.90	54.00	-13.10

Page 12 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

### RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Note
3830.00	53.33	175	45		46.75	3.84	32.46	42.88	74.00	-31.12	Ch. 149
3830.00				41.67	A	46.75	3.84	32.46	31.22	54.00	-22.78
11490.00	52.17	175	45		44.97	6.87	39.49	53.56	74.00	-20.44	
11490.00				39.39	A	44.97	6.87	39.49	40.78	54.00	-13.22
3856.66	54.17	100	45		46.74	3.86	32.53	43.81	74.00	-30.19	Ch. 157
3856.66				41.88	A	46.74	3.86	32.53	31.52	54.00	-22.48
11570.01	59.33	150	0		44.97	6.89	39.54	60.80	74.00	-13.20	
11570.01				45.49	A	44.97	6.89	39.54	46.96	54.00	-7.04
17355.00	57.00	125	0		43.88	8.51	43.65	65.28	87.97	-22.69	
3883.33	54.33	100	135		46.74	3.87	32.60	44.06	74.00	-29.94	Ch. 165
3883.33				44.07	A	46.74	3.87	32.60	33.80	54.00	-20.20
11650.00	58.67	100	135		44.96	6.92	39.59	60.21	74.00	-13.79	
11650.00				45.41	A	44.96	6.92	39.59	46.95	54.00	-7.05
17475.00	53.67	100	90		43.81	8.56	44.27	62.69	86.35	-23.66	

Page 13 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11a mode (5745-5825 MHz)*

*Channels 149, 157, & 165*

**Continuous TX at MAIN Antenna port with Wistron NeWeb Corp. Antennas**

*Aegis Labs, Inc. File #: INTEL-051101-09*

### RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Antenna/ Preamp Factor (dB)	Corrected Reading (dBuV/m)	Limits (dBuV/m)	Diff (dB) +=FAIL
----------------	----------------------------	---------------------------	----------------------	------------------------------	-------------------------	-----------------------------------	----------------------------------	--------------------	---------------------

#### EUT in Continuous Transmit Mode on Channel 149 (5745 MHz)

22980.00	40.67	100	135		10.01	4.99	45.69	74.00	-28.31	
22980.00				28.08	A	10.01	4.99	33.10	54.00	-20.90

#### EUT in Continuous Transmit Mode on Channel 157 (5785 MHz)

23140.00	44.17	100	135		9.99	5.18	48.99	68.00	-19.01
----------	-------	-----	-----	--	------	------	-------	-------	--------

#### EUT in Continuous Transmit Mode on Channel 165 (5825 MHz)

23300.00	46.83	100	135		10.01	5.33	51.51	68.00	-16.49
----------	-------	-----	-----	--	-------	------	-------	-------	--------

### RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Antenna/Pre amp Factor (dB)	Corrected Reading (dBuV/m)	Limits (dBuV/m)	Diff (dB) +=FAIL
----------------	----------------------------	---------------------------	----------------------	------------------------------	-------------------------	-----------------------------------	----------------------------------	--------------------	---------------------

#### EUT in Continuous Transmit Mode on Channel 149 (5745 MHz)

22980.00	42.83	100	315		10.01	5.08	47.76	74.00	-26.24	
22980.00				29.97	A	10.01	5.08	34.90	54.00	-19.10

#### EUT in Continuous Transmit Mode on Channel 157 (5785 MHz)

23140.00	47.83	100	315		9.99	5.21	52.62	68.00	-15.38
----------	-------	-----	-----	--	------	------	-------	-------	--------

#### EUT in Continuous Transmit Mode on Channel 165 (5825 MHz)

23300.00	49.83	100	315		10.01	5.30	54.54	68.00	-13.46
----------	-------	-----	-----	--	-------	------	-------	-------	--------

Page 14 of 69 (Appendix A)

Report Number: INTEL-051101F

FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11a mode (5745-5825 MHz)*

*Channels 149, 157, & 169*

**Continuous RX at MAIN Antenna port with Wistron NeWeb Corp. Antennas**  
Aegis Labs, Inc. File #: INTEL-051101-08

### RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Note
3830.00	52.17	100	135		46.75	3.84	32.46	41.72	74.00	-32.28	Ch. 149
3830.00				39.90	A	46.75	3.84	32.46	29.45	54.00	-24.55
3856.62	53.83	100	135		46.74	3.86	32.53	43.47	74.00	-30.53	Ch. 157
3856.62				41.01	A	46.74	3.86	32.53	30.65	54.00	-23.35
3883.34	53.50	100	135		46.73	3.87	32.60	43.23	74.00	-30.77	Ch. 165
3883.34				41.37	A	46.73	3.87	32.60	31.10	54.00	-22.90

### RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Note
3830.00	53.33	100	135		46.75	3.84	32.46	42.88	74.00	-31.12	Ch. 149
3830.00				41.57	A	46.75	3.84	32.46	31.12	54.00	-22.88
3856.65	54.00	100	135		46.74	3.86	32.53	43.64	74.00	-30.36	Ch. 157
3856.65				42.09	A	46.74	3.86	32.53	31.73	54.00	-22.27
3883.35	53.50	100	135		46.73	3.87	32.60	43.23	74.00	-30.77	Ch. 165
3883.35				42.42	A	46.73	3.87	32.60	32.15	54.00	-21.85

Page 15 of 69 (Appendix A)

Report Number: INTEL-051101F

FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

<b>CLIENT:</b>	Intel Corporation	<b>DATE:</b>	11/03/05
<b>EUT:</b>	Lenovo   X60 Notebook Computer	<b>PROJECT NUMBER:</b>	INTEL-051101
<b>MODEL NUMBER:</b>	1706-BB7	<b>TEST ENGINEER:</b>	BM
<b>SERIAL NUMBER:</b>	AA-GH38D	<b>SITE #:</b>	2
<b>CONFIGURATION:</b>	Tested with an Intel PRO/Wireless 3945ABG Network Connection installed in its mini PCI slot and connected to a set of <b>Wistron NeWeb Corp.</b> antennas in <b>802.11b (2412-2462 MHz) mode.</b>	<b>TEMPERATURE:</b>	12 C
		<b>HUMIDITY:</b>	90% RH
		<b>TIME:</b>	9:00 PM

<b>Standard:</b>	FCC CFR 47, Part 15.247(c)
<b>Description:</b>	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.
<b>Results:</b>	Passes (See Data Sheets)

Unwanted Spurious Emissions Limits			
Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m) (Emissions in the restricted bands)	Field Strength (dBm/MHz) (Emissions outside the restricted bands)
Above 960	500	54.00 (Average) 74.00 (Peak)	< -20 dBc

Page 16 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

**Fundamental Measurements in 802.11b mode (2412-2462 MHz)**

**Channels 1, 6, & 11**

**Continuous TX at MAIN Antenna port with Wistron NeWeb Corp. Antennas**

**Aegis Labs, Inc. File #: INTEL-051101-06**

### RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)		Note
2412.00	74.67	100	135			3.02	29.22	106.92		Ch. 1
2412.00				65.59	A	3.02	29.22	97.84		
2437.00	76.17	100	135			3.04	29.27	108.48		Ch. 6
2437.00				66.35	A	3.04	29.27	98.66		
2462.00	77.33	100	135			3.06	29.32	109.71		Ch. 11
2462.00				66.40	A	3.06	29.32	98.78		

### RADIATED EMISSIONS – Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)		Note
2412.00	72.67	100	0			3.02	29.42	105.12		Ch. 1
2412.00				64.36	A	3.02	29.42	96.81		
2437.00	73.17	100	0			3.04	29.47	105.68		Ch. 6
2437.00				64.77	A	3.04	29.47	97.28		
2462.00	73.67	100	180			3.06	29.52	106.25		Ch. 11
2462.00				65.03	A	3.06	29.52	97.61		

NOTE: Fundamental signals measured to calculate the band edge field strengths using the “Marker Delta Method”.

Page 17 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



## Spurious Radiated Emissions Test Results (Continued)

AEGIS LABS INC.

**Band Edge Field Strength Measurements in 802.11b mode (2412-2462 MHz)**

**Channels 1, 6, & 11**

**Continuous TX at MAIN Antenna port with Wistron NeWeb Corp. Antennas**

Aegis Labs, Inc. File #: INTEL-051101-06

### RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) -=FAIL	Note
2390.00								51.92	74.00	-22.08	<b>Ch. 1</b>
2390.00					A			37.50	54.00	-16.50	
2386.20								53.58	74.00	-20.42	
2386.20					A			39.34	54.00	-14.66	
2400.00	32.50	100	135			3.02	29.20	64.72	86.92	-22.20	
2483.50								53.04	74.00	-20.96	<b>Ch. 11</b>
2483.50					A			36.11	54.00	-17.89	
2488.70								57.04	74.00	-16.96	
2488.70					A			39.94	54.00	-14.06	

### RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Note
2390.00								50.12	74.00	-23.88	<b>Ch. 1</b>
2390.00					A			36.47	54.00	-17.53	
2386.20								51.78	74.00	-22.22	
2386.20					A			38.31	54.00	-15.69	
2400.00	33.00	100	0			3.02	29.40	65.42	85.12	-19.70	
2483.50								49.58	74.00	-24.42	<b>Ch. 11</b>
2483.50					A			34.94	54.00	-19.06	
2488.70								53.58	74.00	-20.42	
2488.70					A			38.77	54.00	-15.23	

NOTE: The "Band Edge Field Strength" was calculated using the "Fundamental" and "Conducted Band Edge" measurements per the "Marker-Delta Method" with the following formula:

$$BE = Fm - \Delta m$$

Where

BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

$\Delta m$  = Measured Conducted Band Edge Delta (Peak or Average)

Page 18 of 69 (Appendix A)

Report Number: INTEL-051101F

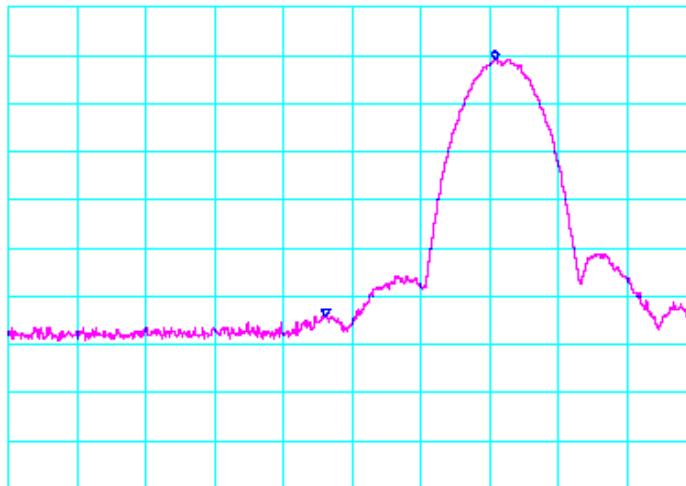
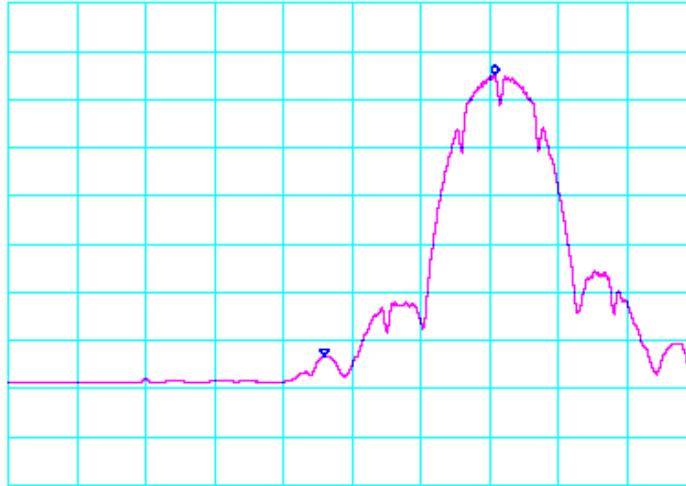
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

Test Date	Data	Test Eng.
11/03/05	2.412 GHz band edge <b>PEAK DELTA</b> (INTEL-051101-02a01)	JC
	*ATTEN 30dB RL 20. 0dBm 10dB/ ΔMKR 53. 34dB 24. 7MHz	
		
	CENTER 2.3900GHz SPAN 100.0MHz *RBW 1.0MHz *VBW 1.0MHz SWP 50.0ms	
Test Date	Data	Test Eng.
11/03/05	2.412 GHz band edge <b>AVERAGE DELTA</b> (INTEL-051101-02a02)	JC
	*ATTEN 30dB RL 20. 0dBm 10dB/ ΔMKR 58. 50dB 24. 8MHz	
		
	CENTER 2.3900GHz SPAN 100.0MHz *RBW 1.0MHz *VBW 10Hz SWP 37.0sec	

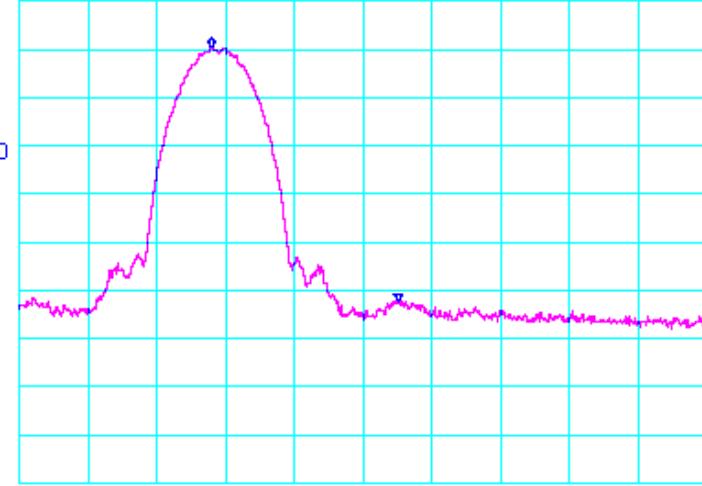
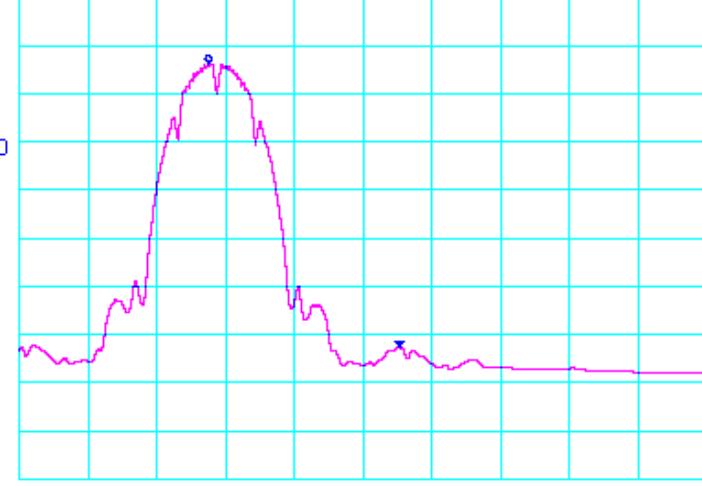
Page 19 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

Test Date	Data	Test Eng.
11/03/05	2.462 GHz band edge PEAK DELTA (INTEL-051101-02a03)	JC
<p>*ATTEN 30dB RL 20. 0dBm 10dB/ ΔMKR 52. 67dB -27. 2MHz</p> 		
<p>CENTER 2. 4835GHz SPAN 100. 0MHz *RBW 1. 0MHz *VBW 1. 0MHz SWP 50. 0ms</p>		
Test Date	Data	Test Eng.
11/03/05	2.462 GHz band edge AVERAGE DELTA (INTEL-051101-02a04)	JC
<p>*ATTEN 30dB RL 20. 0dBm 10dB/ ΔMKR 58. 84dB -27. 8MHz</p> 		
<p>CENTER 2. 4835GHz SPAN 100. 0MHz *RBW 1. 0MHz *VBW 10Hz SWP 37. 0sec</p>		

Page 20 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11b mode (2412-2462 MHz)*  
*Channels 1, 6, & 11*  
**Continuous TX at MAIN Antenna port with Wistron NeWeb Corp. Antennas**  
*Aegis Labs, Inc. File #: INTEL-051101-07*

### RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	1 Meter Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Note
2312.00	31.67	100	135		9.54	1.97	29.02	53.12	74.00	-20.88	Ch. 1
2312.00				14.23	A	9.54	1.97	29.02	35.68	54.00	-18.32
2336.00	31.67	100	270		9.54	1.98	29.07	53.18	74.00	-20.82	Ch. 6
2336.00				14.54	A	9.54	1.98	29.07	36.05	54.00	-17.95
2280.00	30.83	100	135		9.54	1.95	28.96	52.20	74.00	-21.80	Ch. 11
2280.00				13.39	A	9.54	1.95	28.96	34.76	54.00	-19.24

### RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	1 Meter Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Note
2312.00	32.00	100	225		9.54	1.97	29.22	53.65	74.00	-20.35	Ch. 1
2312.00				14.30	A	9.54	1.97	29.22	35.95	54.00	-18.05
2336.00	31.33	100	225		9.54	1.98	29.27	53.04	74.00	-20.96	Ch. 6
2336.00				14.56	A	9.54	1.98	29.27	36.27	54.00	-17.73
2280.00	31.17	100	225		9.54	1.95	29.16	52.74	74.00	-21.26	Ch. 11
2280.00				13.65	A	9.54	1.95	29.16	35.22	54.00	-18.78

NOTE: These spurious emissions measurements were taken without a preamp at a distance on 1 meter to avoid saturating the preamp and analyzer because the signals were close to the fundamental frequency. The readings were extrapolated to 3 meters.

Page 21 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11b mode (2412-2462 MHz)*

*Channels 1, 6, & 11*

**Continuous TX at MAIN Antenna port with Wistron NeWeb Corp. Antennas**

*Aegis Labs, Inc. File #: INTEL-051101-08*

### RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Correcte d Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Note
3216.00	53.83	100	180		46.82	3.51	30.98	41.50	86.92	-45.42	Ch. 1
4824.00	55.67	100	180		46.57	4.35	34.10	47.56	74.00	-26.44	
4824.00				46.44	A	46.57	4.35	34.10	38.33	54.00	-15.67
9648.01	55.67	150	225		44.78	6.19	38.11	55.18	86.92	-31.74	
3249.32	55.00	100	135		46.82	3.53	31.05	42.76	88.48	-45.72	Ch. 6
4873.99	55.33	100	135		46.57	4.37	34.27	47.40	74.00	-26.60	
4873.99				47.06	A	46.57	4.37	34.27	39.13	54.00	-14.87
9747.96	57.67	150	225		44.80	6.23	38.25	57.34	88.48	-31.14	
3282.66	54.17	150	135		46.82	3.55	31.12	42.01	89.71	-47.70	Ch. 11
4924.00	58.50	100	135		46.58	4.40	34.44	50.76	74.00	-23.24	
4924.00				53.59	A	46.58	4.40	34.44	45.85	54.00	-8.15
9848.01	58.00	125	135		44.83	6.27	38.39	57.83	89.71	-31.88	

Page 22 of 69 (Appendix A)

Report Number: INTEL-051101F

FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

### RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Note
3216.00	53.50	100	135		46.82	3.51	31.09	41.28	85.12	-43.84	Ch. 1
4824.01	55.67	100	135		46.57	4.35	34.07	47.53	74.00	-26.47	
4824.01				45.99	A	46.57	4.35	34.07	37.85	54.00	-16.15
9648.01	54.00	100	135		44.78	6.19	38.17	53.57	85.12	-31.55	
3249.32	52.33	100	135		46.82	3.53	31.15	40.19	85.68	-45.49	Ch. 6
4873.99	55.17	100	135		46.57	4.37	34.22	47.19	74.00	-26.81	
4873.99				46.64	A	46.57	4.37	34.22	38.66	54.00	-15.34
9747.96	53.50	175	90		44.80	6.23	38.35	53.27	85.68	-32.41	
3282.66	52.50	100	135		46.82	3.55	31.21	40.43	86.25	-45.82	Ch. 11
4924.00	56.17	100	270		46.58	4.40	34.37	48.36	74.00	-25.64	
4924.00				48.20	A	46.58	4.40	34.37	40.39	54.00	-13.61
9848.01	55.50	150	135		44.83	6.27	38.53	55.47	86.25	-30.78	

Page 23 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11b mode (2412-2462 MHz)*

*Channels 1, 6, & 11*

*Continuous RX at MAIN Antenna port with Wistron NeWeb Corp. Antennas*

*Aegis Labs, Inc. File #: INTEL-051101-08*

### RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Correcte d Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Note
3216.02	52.50	100	225		46.82	3.51	30.98	40.17	74.00	-33.83	Ch. 1
3216.02				40.59	A	46.82	3.51	30.98	28.26	54.00	-25.74
3249.32	52.83	100	225		46.82	3.53	31.05	40.59	74.00	-33.41	Ch. 6
3249.32				41.07	A	46.82	3.53	31.05	28.83	54.00	-25.17
3282.66	55.00	125	135		46.82	3.55	31.12	42.84	74.00	-31.16	Ch. 11
3282.66				44.23	A	46.82	3.55	31.12	32.07	54.00	-21.93

### RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Correcte d Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Note
3216.00	53.33	100	135		46.82	3.51	31.09	41.11	74.00	-32.89	Ch. 1
3216.00				42.63	A	46.82	3.51	31.09	30.41	54.00	-23.59
3249.32	54.33	100	135		46.82	3.53	31.15	42.19	74.00	-31.81	Ch. 6
3249.32				43.71	A	46.82	3.53	31.15	31.57	54.00	-22.43
3282.67	53.83	100	135		46.82	3.55	31.21	41.76	74.00	-32.24	Ch. 11
3282.67				41.48	A	46.82	3.55	31.21	29.41	54.00	-24.59
9847.98				37.10	A	44.83	6.27	38.53	37.07	60.00	-22.93

Page 24 of 69 (Appendix A)

Report Number: INTEL-051101F

FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

<b>CLIENT:</b>	Intel Corporation	<b>DATE:</b>	11/03/05
<b>EUT:</b>	Lenovo   X60 Notebook Computer	<b>PROJECT NUMBER:</b>	INTEL-051101
<b>MODEL NUMBER:</b>	1706-BB7	<b>TEST ENGINEER:</b>	BM
<b>SERIAL NUMBER:</b>	AA-GH38D	<b>SITE #:</b>	2
<b>CONFIGURATION:</b>	Tested with an Intel PRO/Wireless 3945ABG Network Connection installed in its mini PCI slot and connected to a set of <b>Wistron NeWeb Corp.</b> antennas in <b>802.11g (2412-2462 MHz) mode.</b>	<b>TEMPERATURE:</b>	12 C
		<b>HUMIDITY:</b>	90% RH
		<b>TIME:</b>	9:00 PM

<b>Standard:</b>	FCC CFR 47, Part 15.247(c)
<b>Description:</b>	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.
<b>Results:</b>	Passes (See Data Sheets)

Unwanted Spurious Emissions Limits			
Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m) (Emissions in the restricted bands)	Field Strength (dBm/MHz) (Emissions outside the restricted bands)
Above 960	500	54.00 (Average) 74.00 (Peak)	< -20 dBc

Page 25 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

**Fundamental Measurements in 802.11g mode (2412-2462 MHz)**

**Channels 1, 6, & 11**

**Continuous TX at MAIN Antenna port with Wistron NeWeb Corp. Antennas**

**Aegis Labs, Inc. File #: INTEL-051101-06**

### RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)		Note
2412.00	75.83	100	135			3.02	29.22	108.08		Ch. 1
2412.00				62.60	A	3.02	29.22	94.85		
2437.00	77.83	100	135			3.04	29.27	110.14		Ch. 6
2437.00				66.51	A	3.04	29.27	98.82		
2462.00	75.50	100	135			3.06	29.32	107.88		Ch. 11
2462.00				64.07	A	3.06	29.32	96.45		

### RADIATED EMISSIONS – Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)		Note
2412.00	72.83	100	0			3.02	29.42	105.28		Ch. 1
2412.00				61.99	A	3.02	29.42	94.44		
2437.00	75.17	100	0			3.04	29.47	107.68		Ch. 6
2437.00				64.84	A	3.04	29.47	97.35		
2462.00	71.33	100	180			3.06	29.52	103.91		Ch. 11
2462.00				60.95	A	3.06	29.52	93.53		

NOTE: Fundamental signals measured to calculate the band edge field strengths using the “Marker Delta Method”.

Page 26 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

**Band Edge Field Strength Measurements in 802.11g mode (2412-2462 MHz)**  
**Channels 1, 6, & 11**  
**Continuous TX at MAIN Antenna port with Wistron NeWeb Corp. Antennas**  
**Aegis Labs, Inc. File #: INTEL-051101-06**

### RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Note
2390.00								70.74	74.00	-3.26	<b>Ch. 1</b>
2390.00					A			53.35	54.00	-0.65	
2400.00	49.33	100	135			3.02	29.20	81.55	88.08	-6.53	
2483.50								68.72	74.00	-5.28	<b>Ch. 11</b>
2483.50					A			52.61	54.00	-1.39	

### RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Note
2390.00								67.94	74.00	-6.06	<b>Ch. 1</b>
2390.00					A			52.94	54.00	-1.06	
2400.00	49.33	100	135			3.02	29.40	81.75	85.28	-3.53	
2483.50								64.75	74.00	-9.25	<b>Ch. 11</b>
2483.50					A			49.69	54.00	-4.31	

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

$\Delta m$  = Measured Conducted Band Edge Delta (Peak or Average)

Page 27 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

Test Date	Data	Test Eng.
11/03/05	2.412 GHz band edge <b>PEAK DELTA</b> (INTEL-051101-03a01)	JC
	<b>*ATTEN 30dB</b> <b>RL 20. 0dBm</b> <b>10dB/</b> <b>△MKR 37. 34dB</b> <b>23. 0MHz</b>	
	CENTER 2.3900GHz      SPAN 100.0MHz *RBW 1.0MHz      *VBW 1.0MHz      SWP 50.0ms	
Test Date	Data	Test Eng.
11/03/05	2.412 GHz band edge <b>AVERAGE DELTA</b> (INTEL-051101-03a02)	JC
	<b>*ATTEN 30dB</b> <b>RL 20. 0dBm</b> <b>10dB/</b> <b>△MKR 41. 50dB</b> <b>20. 2MHz</b>	
	CENTER 2.3900GHz      SPAN 100.0MHz *RBW 1.0MHz      *VBW 10Hz      SWP 37.0sec	

Page 28 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

Test Date	Data	Test Eng.
11/03/05	2.462 GHz band edge <b>PEAK DELTA</b> (INTEL-051101-03a03)	JC
	<b>*ATTEN 30dB</b> <b>RL 20. 0dBm</b> <b>10dB/</b> <b>△MKR 39. 16dB</b> <b>-28. 2MHz</b>	
	<b>CENTER 2. 4835GHz</b> <b>SPAN 100. 0MHz</b> <b>*RBW 1. 0MHz</b> <b>*VBW 1. 0MHz</b> <b>SWP 50. 0ms</b>	
Test Date	Data	Test Eng.
11/03/05	2.462 GHz band edge <b>AVERAGE DELTA</b> (INTEL-051101-03a04)	JC
	<b>*ATTEN 30dB</b> <b>RL 20. 0dBm</b> <b>10dB/</b> <b>△MKR 43. 84dB</b> <b>-28. 8MHz</b>	
	<b>CENTER 2. 4835GHz</b> <b>SPAN 100. 0MHz</b> <b>*RBW 1. 0MHz</b> <b>*VBW 10Hz</b> <b>SWP 37. 0sec</b>	

Page 29 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11g mode (2412-2462 MHz)*

*Channels 1, 6, & 11*

**Continuous TX at MAIN Antenna port with Wistron NeWeb Corp. Antennas**

*Aegis Labs, Inc. File #: INTEL-051101-07*

### RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	1 Meter Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Note
2312.00	31.17	100	135		9.54	1.97	29.02	52.62	74.00	-21.38	Ch. 1
2312.00				13.80	A	9.54	1.97	29.02	35.25	54.00	-18.75
2336.00	31.50	100	135		9.54	1.98	29.07	53.01	74.00	-20.99	Ch. 6
2336.00				15.45	A	9.54	1.98	29.07	36.96	54.00	-17.04
2358.66	31.67	100	135		9.54	1.99	29.12	53.24	74.00	-20.76	Ch. 11
2358.66				13.63	A	9.54	1.99	29.12	35.20	54.00	-18.80

### RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	1 Meter Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Note
2312.00	31.17	100	135		9.54	1.97	29.22	52.82	74.00	-21.18	Ch. 1
2312.00				14.00	A	9.54	1.97	29.22	35.65	54.00	-18.35
2336.00	32.00	100	135		9.54	1.98	29.27	53.71	74.00	-20.29	Ch. 6
2336.00				14.93	A	9.54	1.98	29.27	36.64	54.00	-17.36
2358.66	31.33	100	135		9.54	1.99	29.32	53.10	74.00	-20.90	Ch. 11
2358.66				14.15	A	9.54	1.99	29.32	35.92	54.00	-18.08

NOTE: These spurious emissions measurements were taken without a preamp at a distance on 1 meter to avoid saturating the preamp and analyzer because the signals were close to the fundamental frequency. The readings were extrapolated to 3 meters.

Page 30 of 69 (Appendix A)

Report Number: INTEL-051101F

FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11g mode (2412-2462 MHz)*

*Channels 1, 6, & 11*

**Continuous TX at MAIN Antenna port with Wistron NeWeb Corp. Antennas**

*Aegis Labs, Inc. File #: INTEL-051101-08*

### RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Note
3216.00	52.83	100	135		46.82	3.51	30.98	40.50	88.08	-47.58	Ch. 1
3249.32	51.50	100	180		46.82	3.53	31.05	39.26	90.14	-50.88	Ch. 6
3282.66	53.83	100	180		46.82	3.55	31.12	41.67	87.88	-46.21	Ch. 11

### RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Note
3216.00	54.33	100	135		46.82	3.51	31.09	42.11	85.28	-43.17	Ch. 1
3249.32	54.17	100	180		46.82	3.53	31.15	42.03	87.68	-45.65	Ch. 6
3282.66	54.50	125	135		46.82	3.55	31.21	42.43	83.91	-41.48	Ch. 11

Page 31 of 69 (Appendix A)

Report Number: INTEL-051101F

FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11g mode (2412-2462 MHz)*  
*Channels 1, 6, & 11*  
*Continuous RX at MAIN Antenna port with Wistron NeWeb Corp. Antennas*  
*Aegis Labs, Inc. File #: INTEL-051101-08*

RADIATED EMISSIONS - Horizontal Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Note
3216.00	53.50	100	180		46.82	3.51	30.98	41.17	74.00	-32.83	Ch. 1
3216.00				42.66	A	46.82	3.51	30.98	30.33	54.00	-23.67
3249.32	54.33	100	135		46.82	3.53	31.05	42.09	74.00	-31.91	Ch. 6
3249.32				43.28	A	46.82	3.53	31.05	31.04	54.00	-22.96
3282.66	55.00	100	180		46.82	3.55	31.12	42.84	74.00	-31.16	Ch. 11
3282.66				42.80	A	46.82	3.55	31.12	30.64	54.00	-23.36

RADIATED EMISSIONS - Vertical Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Note
3216.00	53.83	100	135		46.82	3.51	31.09	41.61	74.00	-32.39	Ch. 1
3216.00				40.19	A	46.82	3.51	31.09	27.97	54.00	-26.03
3249.33	51.67	100	135		46.82	3.53	31.15	39.53	74.00	-34.47	Ch. 6
3249.33				40.65	A	46.82	3.53	31.15	28.51	54.00	-25.49
3282.67	53.50	100	225		46.82	3.55	31.21	41.43	74.00	-32.57	Ch. 11
3282.67				41.54	A	46.82	3.55	31.21	29.47	54.00	-24.53
3216.00	53.83	100	135		46.82	3.51	31.09	41.61	74.00	-32.39	

Page 32 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## PEAK TRANSMIT POWER

<b>CLIENT:</b>	Intel Corporation	<b>DATE:</b>	11/01/05
<b>EUT:</b>	Lenovo   X60 Notebook Computer	<b>PROJECT NUMBER:</b>	INTEL-051101
<b>MODEL NUMBER:</b>	1706-BB7	<b>TEST ENGINEER:</b>	BM
<b>SERIAL NUMBER:</b>	AA-GH38D	<b>SITE #:</b>	2
<b>CONFIGURATION:</b>	Tested with an Intel PRO/Wireless 3945ABG Network Connection installed in its mini PCI slot.	<b>TEMPERATURE:</b>	34 C
		<b>HUMIDITY:</b>	13% RH
		<b>TIME:</b>	1:30 PM

<b>Standard:</b>	FCC CFR 47, Part 15.247(b)(3)
<b>Description:</b>	The maximum peak output power of the intentional radiator shall not exceed 1 watt.
<b>Results:</b>	See Data Sheet

### Peak Transmit Power Limits

Frequency (MHz)	Output Power (W)
5725-5850	1
2412-2462	1

Page 33 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Peak Transmit Power (Continued)

Mode	Channel	Frequency (MHz)	Rate (Mbps)	Average Power (dBm)	Average Power (mW)	Peak Power (dBm)	Peak Power (mW)
802.11a	149	5745	6	17.21	52.60	19.71	93.54
802.11a	157	5785	6	16.77	47.53	19.59	90.99
802.11a	165	5825	6	16.95	49.55	19.64	92.04
802.11b	1	2412	1	17.35	54.33	19.91	97.95
802.11b	6	2437	1	18.28	67.30	20.79	119.95
802.11b	11	2462	1	18.13	65.01	20.65	116.14
802.11g	1	2412	6	16.12	40.93	24.36	272.90
802.11g	6	2437	6	17.08	51.05	24.81	302.69
802.11g	11	2462	6	14.95	31.26	24.14	259.42

NOTE: The output power measurement is conducted.

Page 34 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## 6 dB EMISSIONS BANDWIDTH

<b>CLIENT:</b>	Intel Corporation	<b>DATE:</b>	11/03/05
<b>EUT:</b>	Lenovo   X60 Notebook Computer	<b>PROJECT NUMBER:</b>	INTEL-051101
<b>MODEL NUMBER:</b>	1706-BB7	<b>TEST ENGINEER:</b>	JC
<b>SERIAL NUMBER:</b>	AA-GH38D	<b>SITE #:</b>	2
<b>CONFIGURATION:</b>	Tested with an Intel PRO/Wireless 3945ABG Network Connection installed in its mini PCI slot.	<b>TEMPERATURE:</b>	20 C
		<b>HUMIDITY:</b>	52% RH
		<b>TIME:</b>	11:00 AM

<b>Standard:</b>	FCC CFR 47, Part 15.247(a)(2)
<b>Description:</b>	The minimum 6dB bandwidth shall be at least 500 kHz.
<b>Results:</b>	See Data Sheets

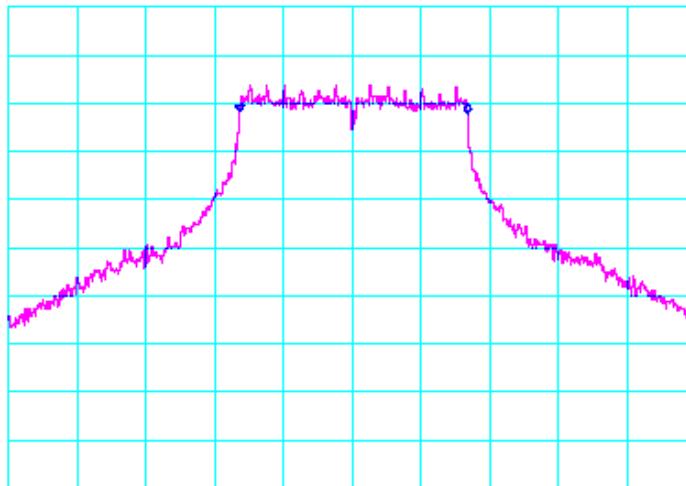
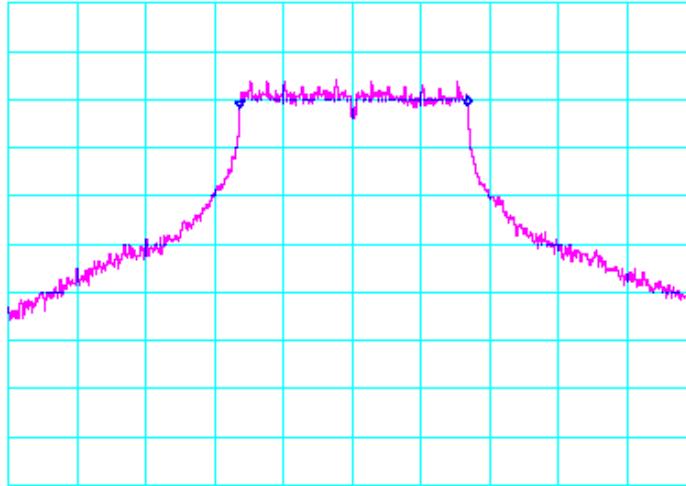
*Page 35 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG*



AEGIS LABS INC.

## 6 dB Emissions Bandwidth (Continued)

### 802.11a Mode

Test Date	Data	Test Eng.
11/03/05	5.745 GHz (INTEL-051101-05a1)	JC
	<b>*ATTEN 30dB</b> <b>RL 20. 0dBm</b> <b>10dB/</b> <b>ΔMKR -.50dB</b> <b>16. 58MHz</b>	
		
	CENTER 5.74500GHz      SPAN 50.00MHz *RBW 100kHz      *VBW 300kHz      SWP 50.0ms	
Test Date	Data	Test Eng.
11/03/05	5.785 GHz (INTEL-051101-05a2)	JC
	<b>*ATTEN 30dB</b> <b>RL 20. 0dBm</b> <b>10dB/</b> <b>ΔMKR .50dB</b> <b>16. 58MHz</b>	
		
	CENTER 5.78500GHz      SPAN 50.00MHz *RBW 100kHz      *VBW 300kHz      SWP 50.0ms	

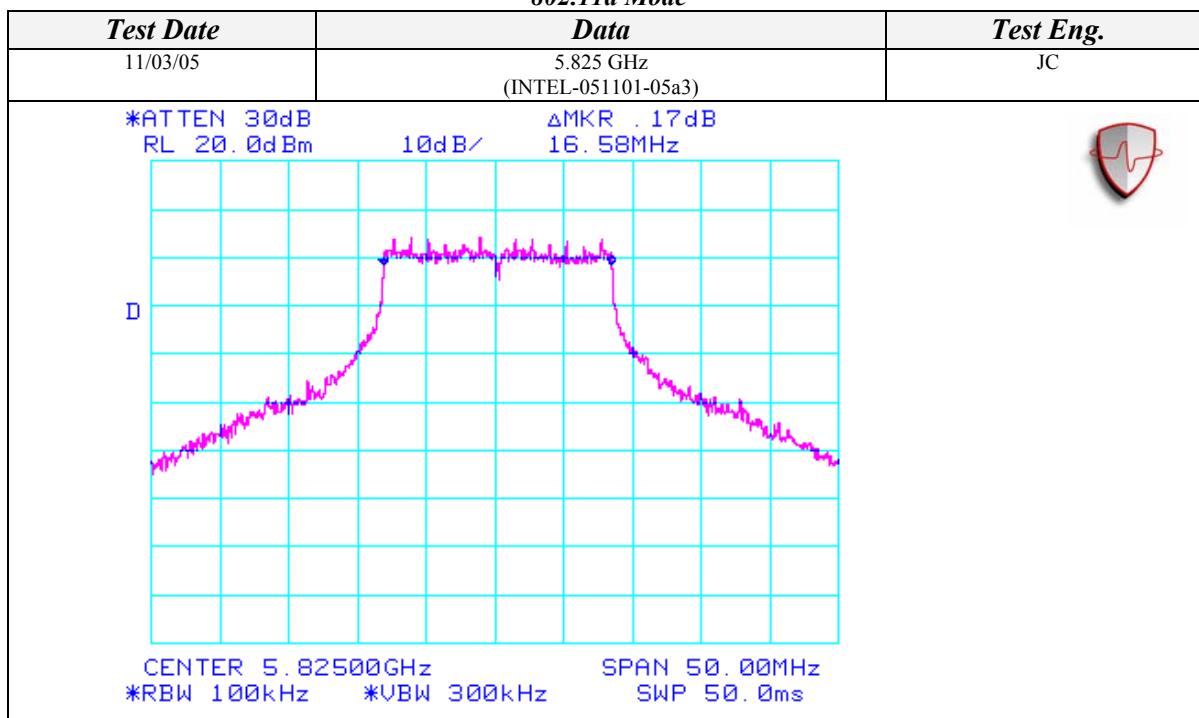
Page 36 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



## 6 dB Emissions Bandwidth (Continued)

AEGIS LABS INC.

### 802.11a Mode



Page 37 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## 6 dB Emissions Bandwidth (Continued)

### 802.11b Mode

Test Date	Data	Test Eng.
11/03/05	2.412 GHz (INTEL-051101-02b1)	JC
*ATTEN 30dB RL 20. 0dBm	10dB/ △MKR 0dB 8.67MHz	

D

CENTER 2.412000GHz SPAN 50.00MHz  
\*RBW 100kHz \*VBW 300kHz SWP 50.0ms

Test Date	Data	Test Eng.
11/03/05	2.437 GHz (INTEL-051101-02b2)	JC
*ATTEN 30dB RL 20. 0dBm	10dB/ △MKR -.17dB 8.83MHz	

D

CENTER 2.437000GHz SPAN 50.00MHz  
\*RBW 100kHz \*VBW 300kHz SWP 50.0ms

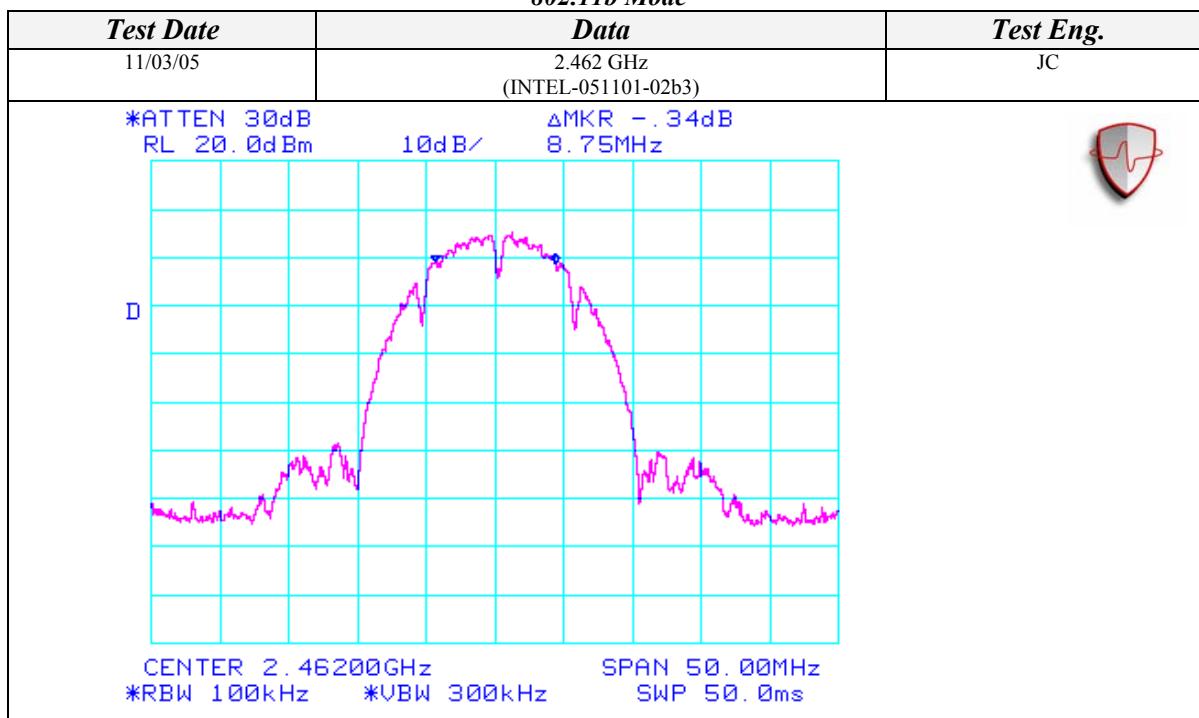
Page 38 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



## 6 dB Emissions Bandwidth (Continued)

AEGIS LABS INC.

### 802.11b Mode



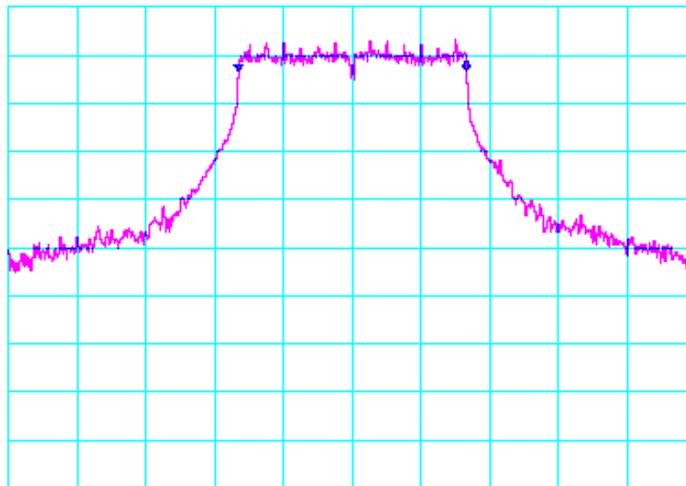
Page 39 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



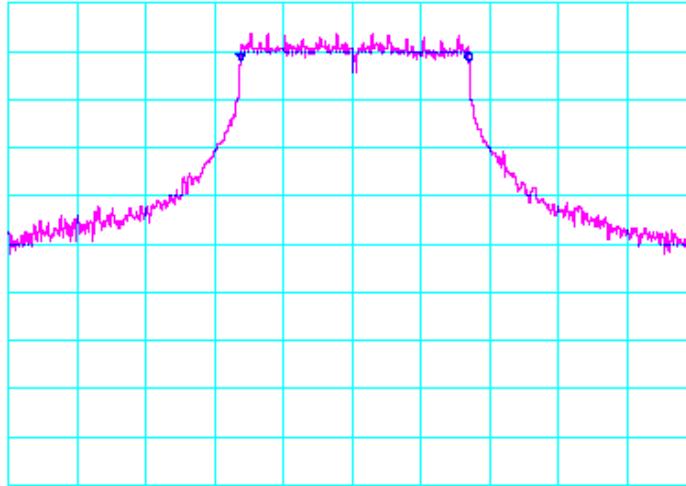
AEGIS LABS INC.

## 6 dB Emissions Bandwidth (Continued)

### 802.11g Mode

Test Date	Data	Test Eng.
11/03/05	2.412 GHz (INTEL-051101-03b1)	JC
<p>*ATTEN 20dB      <math>\Delta</math>MKR 0dB RL 10. 0dBm      10dB/      16. 58MHz</p>  <p>D</p> <p>CENTER 2.41200GHz      SPAN 50.00MHz *RBW 100kHz      *VBW 300kHz      SWP 50.0ms</p>		

Test Date	Data	Test Eng.
11/03/05	2.437 GHz (INTEL-051101-03b2)	JC
<p>*ATTEN 20dB      <math>\Delta</math>MKR - .34dB RL 10. 0dBm      10dB/      16. 58MHz</p>  <p>D</p> <p>CENTER 2.43700GHz      SPAN 50.00MHz *RBW 100kHz      *VBW 300kHz      SWP 50.0ms</p>		

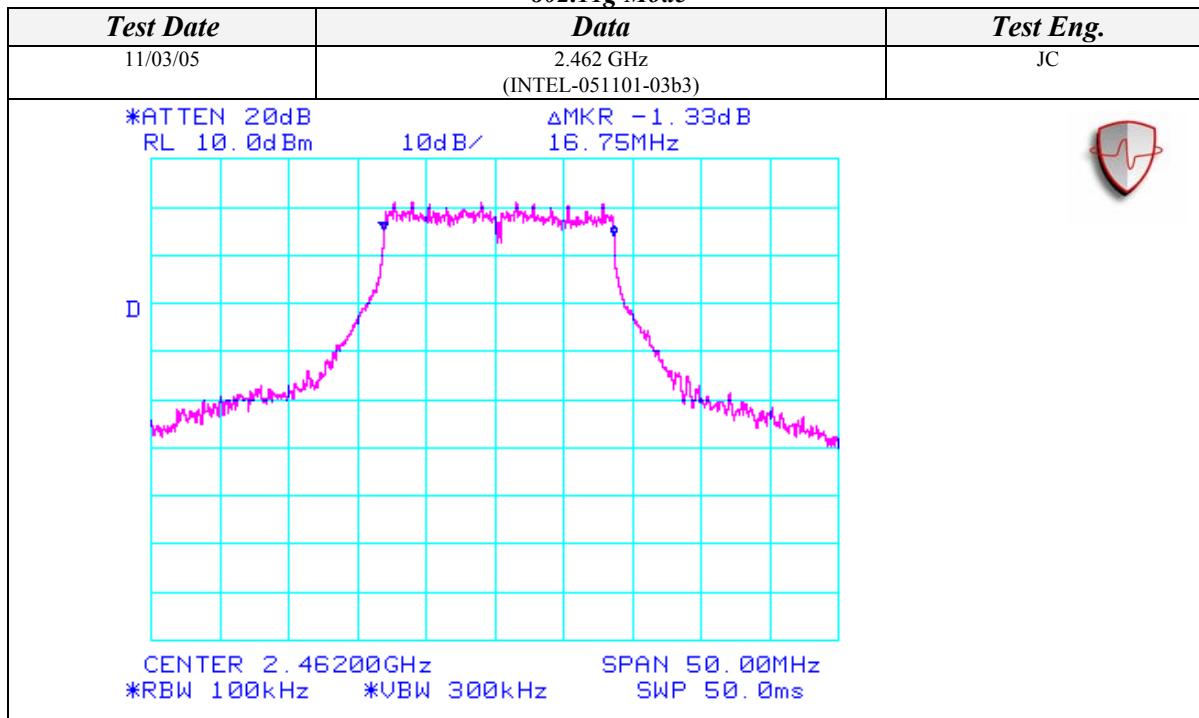
Page 40 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## 6 dB Emissions Bandwidth (Continued)

### 802.11g Mode



Page 41 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## PEAK POWER SPECTRAL DENSITY

<b>CLIENT:</b>	Intel Corporation	<b>DATE:</b>	11/03/05
<b>EUT:</b>	Lenovo   X60 Notebook Computer	<b>PROJECT NUMBER:</b>	INTEL-051101
<b>MODEL NUMBER:</b>	1706-BB7	<b>TEST ENGINEER:</b>	JC
<b>SERIAL NUMBER:</b>	AA-GH38D	<b>SITE #:</b>	2
<b>CONFIGURATION:</b>	Tested with an Intel PRO/Wireless 3945ABG Network Connection installed in its mini PCI slot.	<b>TEMPERATURE:</b>	20 C
		<b>HUMIDITY:</b>	52% RH
		<b>TIME:</b>	11:00 AM

<b>Standard:</b>	FCC CFR 47, Part 15.247(d)
<b>Description:</b>	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
<b>Results:</b>	See Data Sheets

### Peak Power Spectral Density Limits

Frequency (MHz)	Limit (dBm)
5725-5850	8
2412-2462	8

Page 42 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Peak Power Spectral Density (Continued)

### 802.11a Mode

Test Date	Data	Test Eng.
11/03/05	5.745 GHz (INTEL-051101-05c1)	JC
*ATTEN 20dB RL 10.0dBm	10dB/ MKR -6.83dBm 5.744983GHz	

D

CENTER 5.745000GHz SPAN 1.500MHz  
\*RBW 3.0kHz \*VBW 3.0kHz \*SWP 500sec

Test Date	Data	Test Eng.
11/03/05	5.785 GHz (INTEL-051101-05c2)	JC
*ATTEN 20dB RL 10.0dBm	10dB/ MKR -6.17dBm 5.784983GHz	

D

CENTER 5.785000GHz SPAN 1.500MHz  
\*RBW 3.0kHz \*VBW 3.0kHz \*SWP 500sec

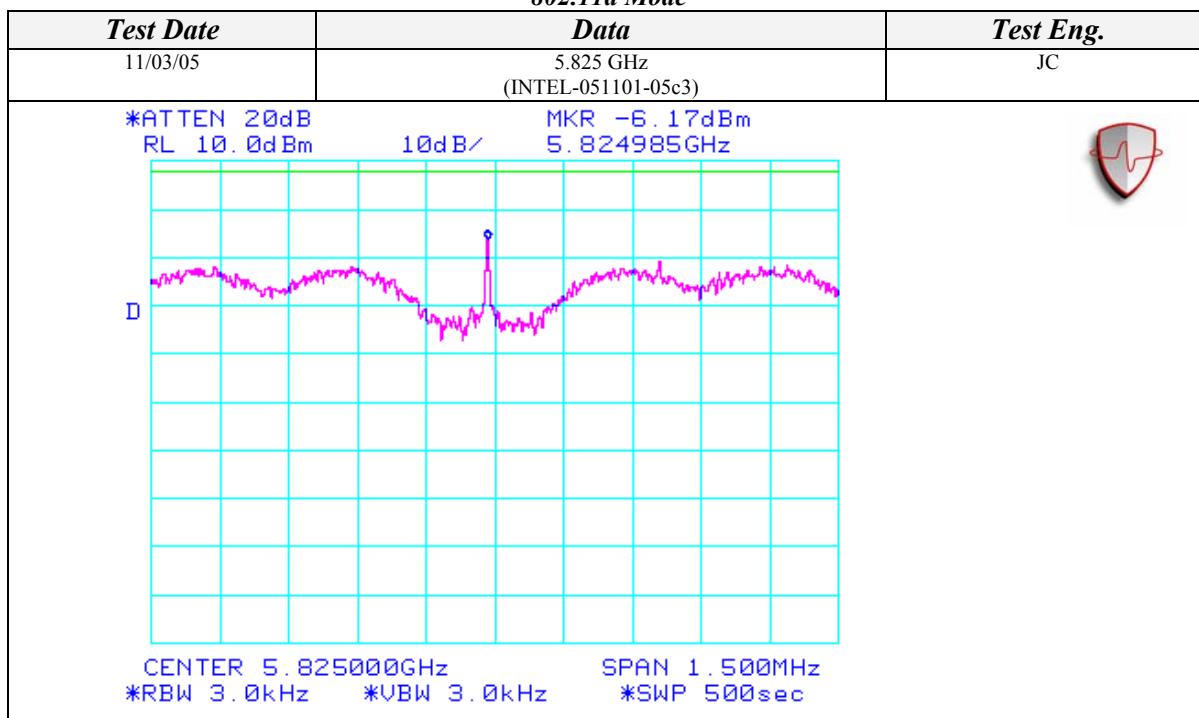
Page 43 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



## Peak Power Spectral Density (Continued)

AEGIS LABS INC.

### 802.11a Mode



Page 44 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



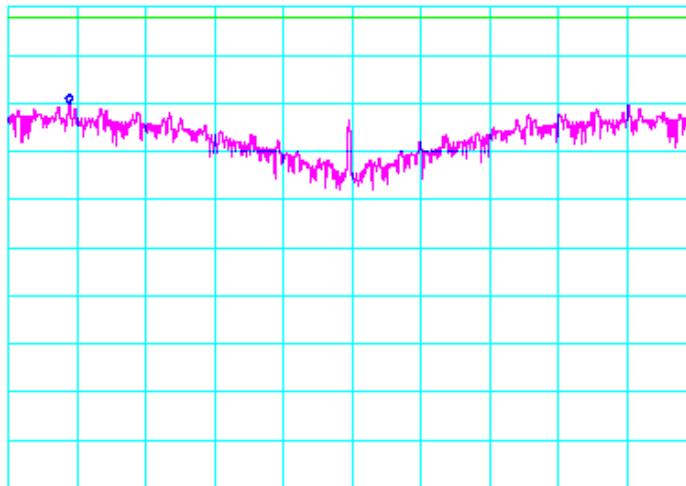
AEGIS LABS INC.

## Peak Power Spectral Density (Continued)

### 802.11b Mode

Test Date	Data	Test Eng.
11/03/05	2.412 GHz (INTEL-051101-02d1)	JC
*ATTEN 20dB RL 10.0dBm	MKR -10.00dBm 2.411383GHz	

D

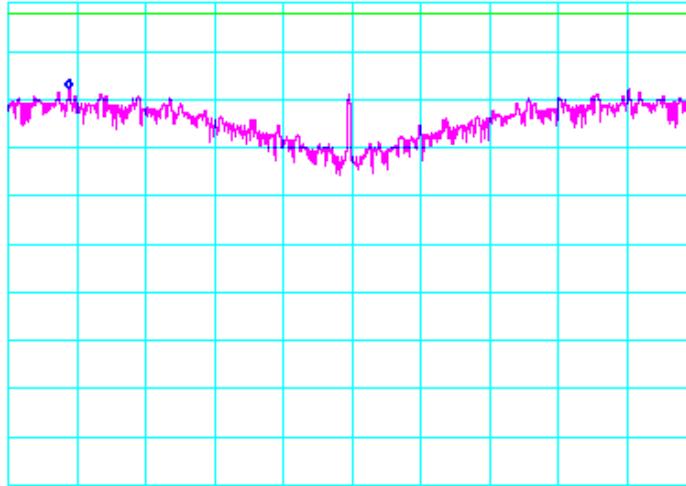


CENTER 2.412000GHz SPAN 1.500MHz  
\*RBW 3.0kHz \*VBW 3.0kHz \*SWP 500sec

Test Date	Data	Test Eng.
11/03/05	2.437 GHz (INTEL-051101-02d2)	JC
*ATTEN 20dB RL 10.0dBm	MKR -7.83dBm 2.436383GHz	

D



CENTER 2.437000GHz SPAN 1.500MHz  
\*RBW 3.0kHz \*VBW 3.0kHz \*SWP 500sec

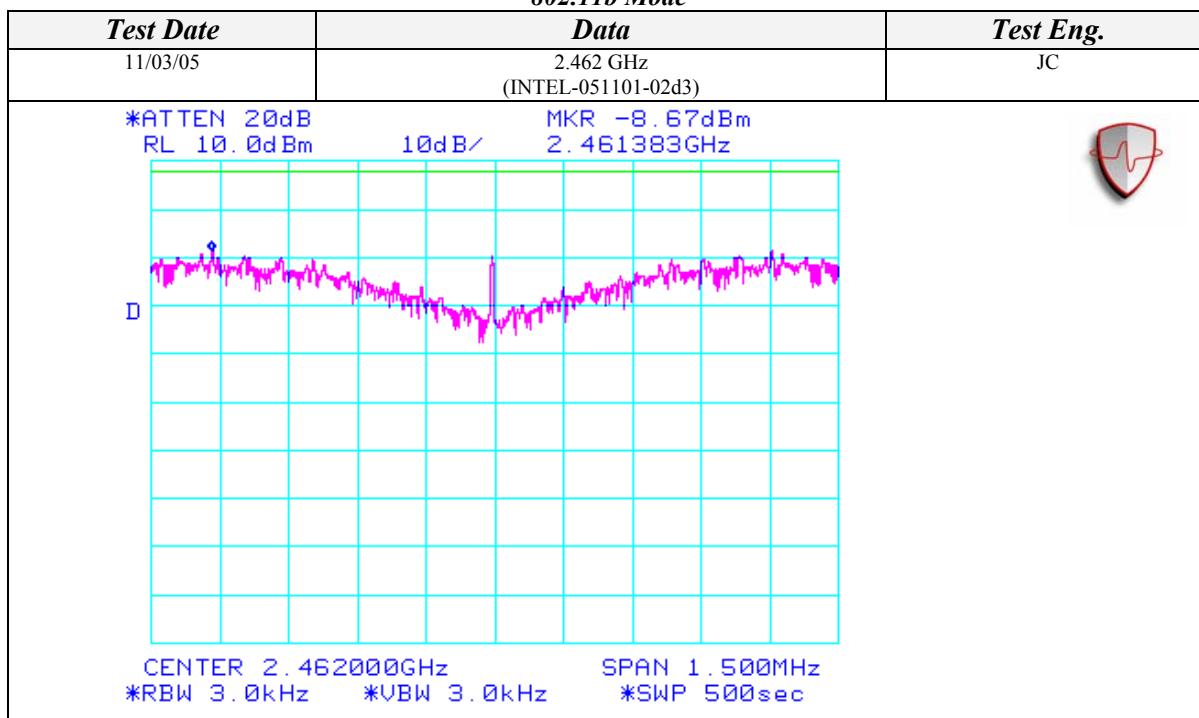
Page 45 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



## Peak Power Spectral Density (Continued)

AEGIS LABS INC.

### 802.11b Mode



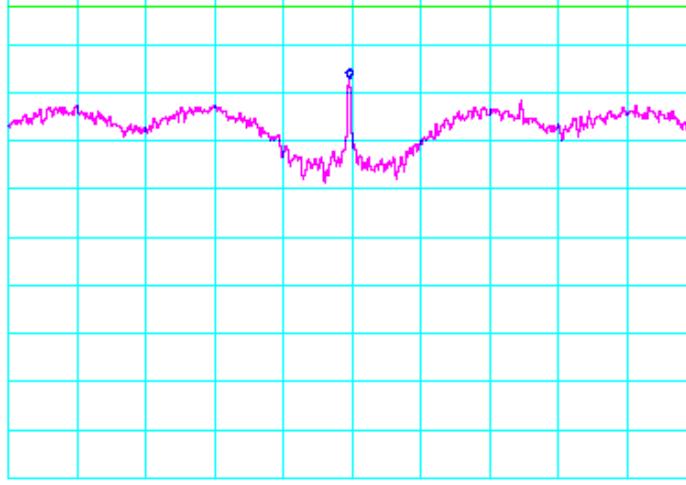
Page 46 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



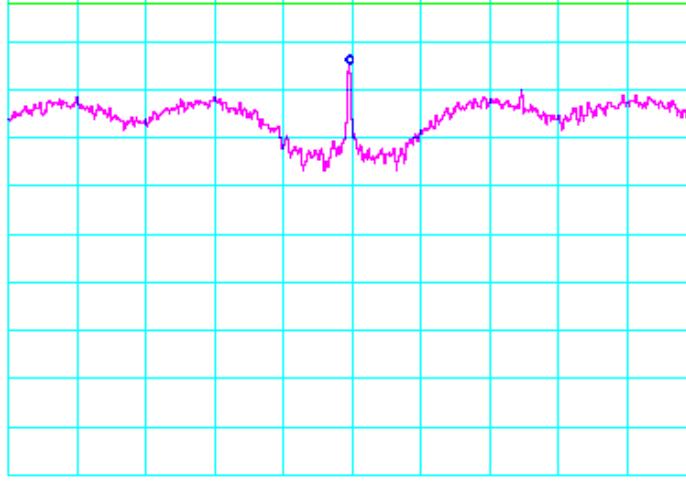
## Peak Power Spectral Density (Continued)

AEGIS LABS INC.

### 802.11g Mode

Test Date	Data	Test Eng.
11/03/05	2.412 GHz (INTEL-051101-03d1)	JC
	<p>*ATTEN 20dB RL 10.0dBm 10dB/</p> <p>MKR -7.00dBm 2.411995GHz</p>  <p>CENTER 2.412000GHz SPAN 1.500MHz *RBW 3.0kHz *VBW 3.0kHz *SWP 500sec</p>	

Test Date	Data	Test Eng.
11/03/05	2.437 GHz (INTEL-051101-03d2)	JC
	<p>*ATTEN 20dB RL 10.0dBm 10dB/</p> <p>MKR -4.83dBm 2.436995GHz</p>  <p>CENTER 2.437000GHz SPAN 1.500MHz *RBW 3.0kHz *VBW 3.0kHz *SWP 500sec</p>	

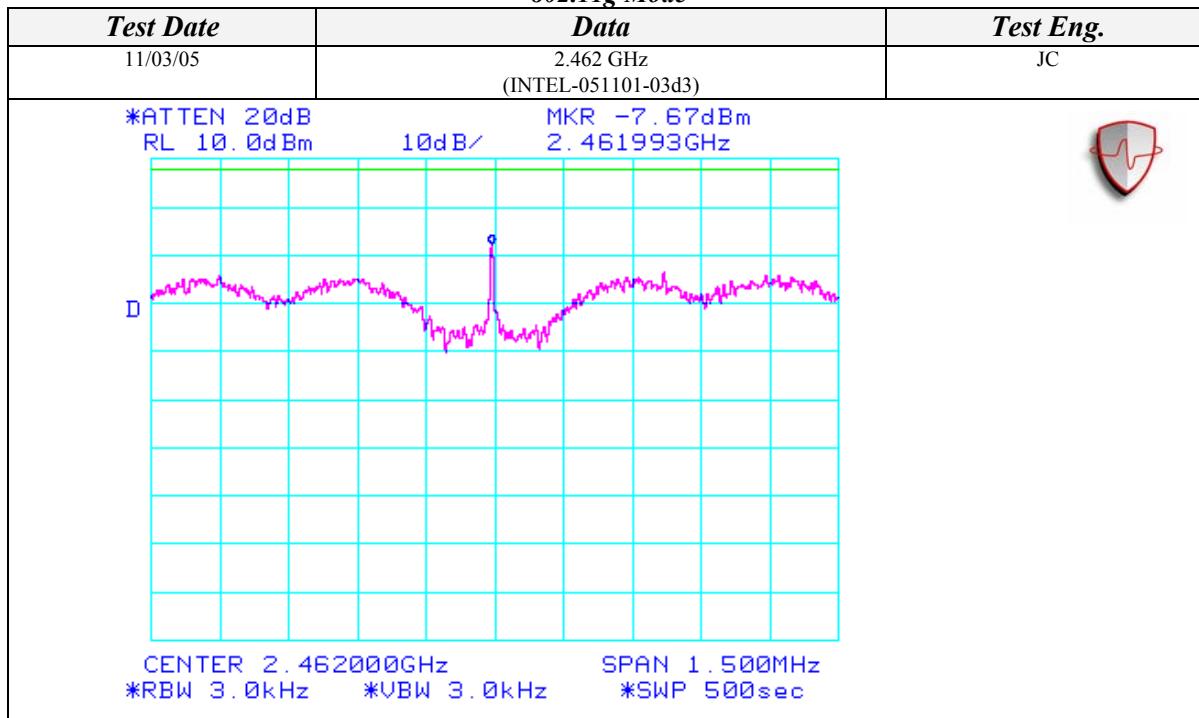
Page 47 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Peak Power Spectral Density (Continued)

### 802.11g Mode



Page 48 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## CONDUCTED OUT OF BAND EMISSIONS

<b>CLIENT:</b>	Intel Corporation	<b>DATE:</b>	11/03/05
<b>EUT:</b>	Lenovo   X60 Notebook Computer	<b>PROJECT NUMBER:</b>	INTEL-051101
<b>MODEL NUMBER:</b>	1706-BB7	<b>TEST ENGINEER:</b>	JC
<b>SERIAL NUMBER:</b>	AA-GH38D	<b>SITE #:</b>	2
<b>CONFIGURATION:</b>	Tested with an Intel PRO/Wireless 3945ABG Network Connection installed in its mini PCI slot.	<b>TEMPERATURE:</b>	20 C
		<b>HUMIDITY:</b>	52% RH
		<b>TIME:</b>	11:00 AM

<b>Standard:</b>	FCC CFR 47, Part 15.247(c)
<b>Description:</b>	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

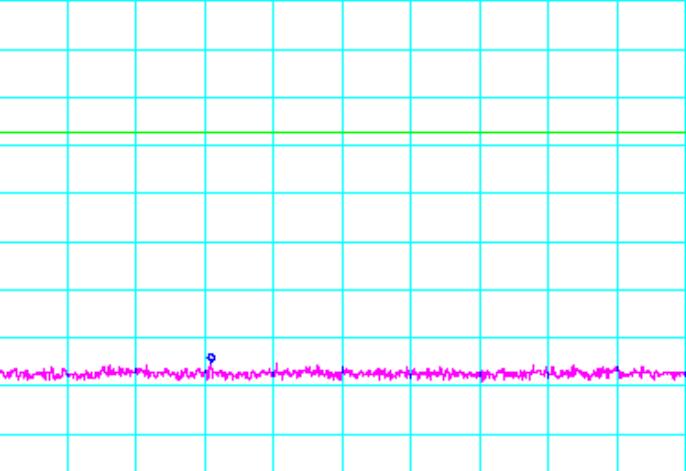
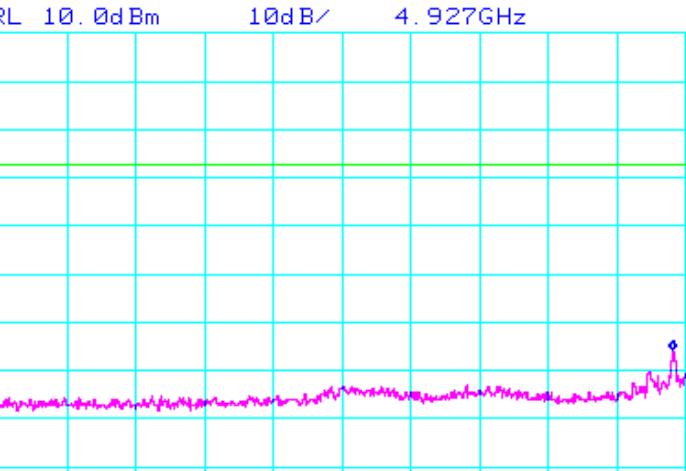
Page 49 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Conducted Out Of Band Emissions (Continued)

### *802.11a Mode*

Test Date	Data	Test Eng.
11/03/05	5.745 GHz (INTEL-051101-05d01)	JC
*ATTEN 20dB RL 10. 0dBm	10dB/ MKR -65. 17dBm 330. 7MHz	
		
START 30.0MHz *RBW 100kHz	STOP 1.0000GHz *VBW 300kHz	SWP 540ms
Test Date	Data	Test Eng.
11/03/05	5.745 GHz (INTEL-051101-05d02)	JC
*ATTEN 20dB RL 10. 0dBm	10dB/ MKR -55. 83dBm 4.927GHz	
		
START 1.000GHz *RBW 100kHz	STOP 5.000GHz *VBW 300kHz	SWP 2.20sec

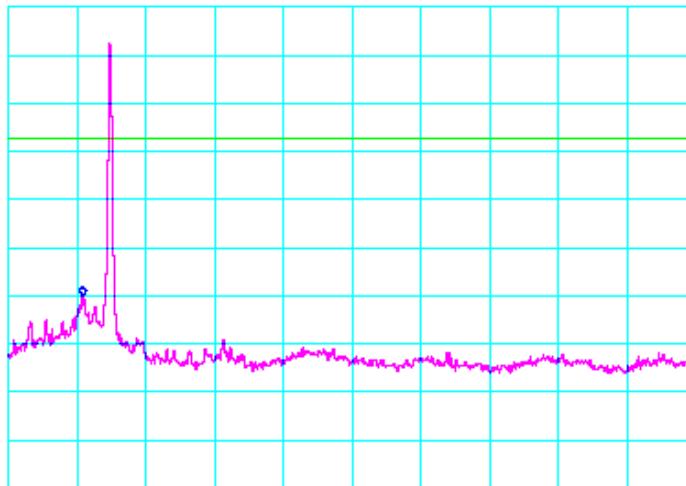
Page 50 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



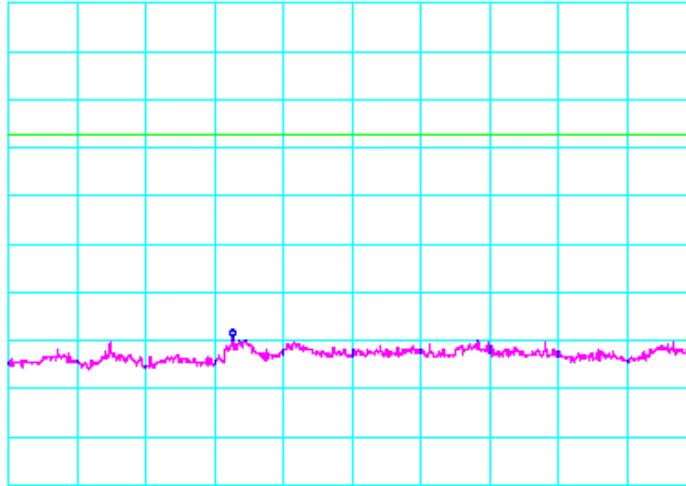
AEGIS LABS INC.

## Conducted Out Of Band Emissions (Continued)

### 802.11a Mode

Test Date	Data	Test Eng.
11/03/05	5.745 GHz (INTEL-051101-05d03)	JC
<p>*ATTEN 20dB RL 10. 0d Bm 10dB/</p> <p>MKR -50. 00dBm 5. 542GHz</p>  <p>START 5. 000GHz STOP 10. 000GHz *RBW 100kHz *VBW 300kHz SWP 2.80sec</p>		

Test Date	Data	Test Eng.
11/03/05	5.745 GHz (INTEL-051101-05d04)	JC
<p>*ATTEN 20dB RL 10. 0d Bm 10dB/</p> <p>MKR -59. 50dBm 13. 27GHz</p>  <p>START 10. 00GHz STOP 20. 00GHz *RBW 100kHz *VBW 300kHz SWP 5.50sec</p>		

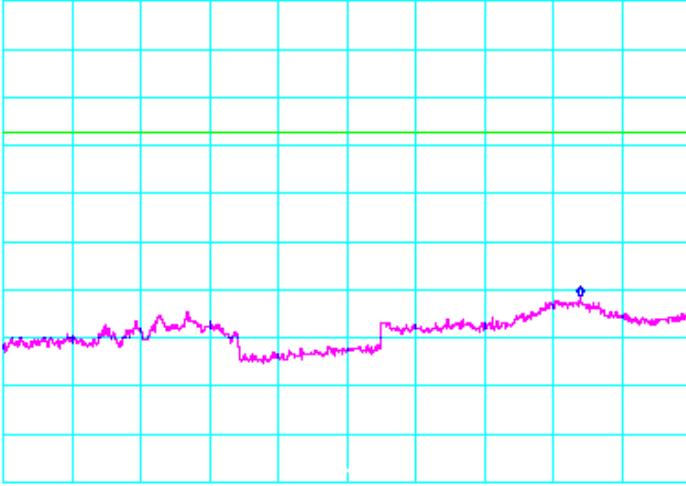
Page 51 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



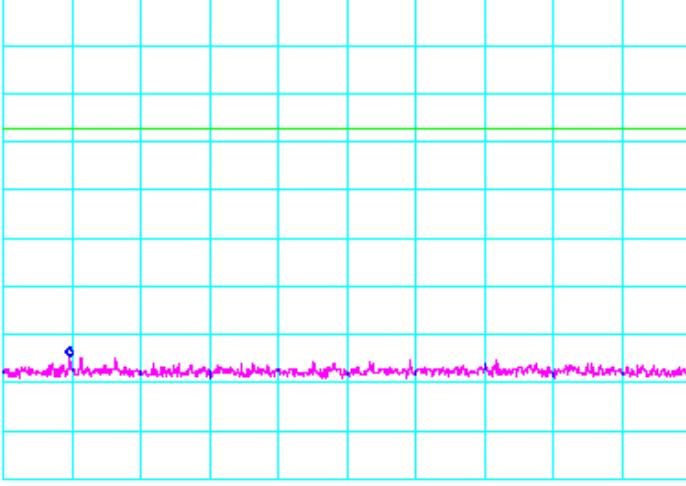
AEGIS LABS INC.

## Conducted Out Of Band Emissions (Continued)

### 802.11a Mode

Test Date	Data	Test Eng.
11/03/05	5.745 GHz (INTEL-051101-05d05)	JC
<b>*ATTEN 20dB RL 10. 0d Bm</b>	<b>MKR -51. 33d Bm 36. 80GHz</b>  D  START 20. 00GHz STOP 40. 00GHz *RBW 100kHz *VBW 300kHz SWP 11. 0sec	

Test Date	Data	Test Eng.
11/03/05	5.785 GHz (INTEL-051101-05d06)	JC
<b>*ATTEN 20dB RL 10. 0d Bm</b>	<b>MKR -64. 67d Bm 123. 8MHz</b>  D  START 30. 0MHz STOP 1. 0000GHz *RBW 100kHz *VBW 300kHz SWP 540ms	

Page 52 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Conducted Out Of Band Emissions (Continued)

### 802.11a Mode

Test Date	Data	Test Eng.
11/03/05	5.785 GHz (INTEL-051101-05d07)	JC
*ATTEN 20dB RL 10.0dBm	MKR -55.00dBm 10dB/ 4.933GHz	

Figure showing a spectrum analysis plot for 802.11a mode. The plot shows a signal at 5.785 GHz with a power of -55.00 dBm. The x-axis represents frequency from 1.000 GHz to 5.000 GHz, and the y-axis represents power from -100 to 0 dBm. The plot shows a strong signal at 5.785 GHz and a smaller signal at 4.933 GHz.

START 1.000GHz STOP 5.000GHz  
\*RBW 100kHz \*VBW 300kHz SWP 2.20sec

Test Date	Data	Test Eng.
11/03/05	5.785 GHz (INTEL-051101-05d08)	JC
*ATTEN 20dB RL 10.0dBm	MKR -48.67dBm 10dB/ 5.592GHz	

Figure showing a spectrum analysis plot for 802.11a mode. The plot shows a signal at 5.785 GHz with a power of -48.67 dBm. The x-axis represents frequency from 5.000 GHz to 10.000 GHz, and the y-axis represents power from -100 to 0 dBm. The plot shows a strong signal at 5.785 GHz and a smaller signal at 5.592 GHz.

START 5.000GHz STOP 10.000GHz  
\*RBW 100kHz \*VBW 300kHz SWP 2.80sec

Page 53 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG

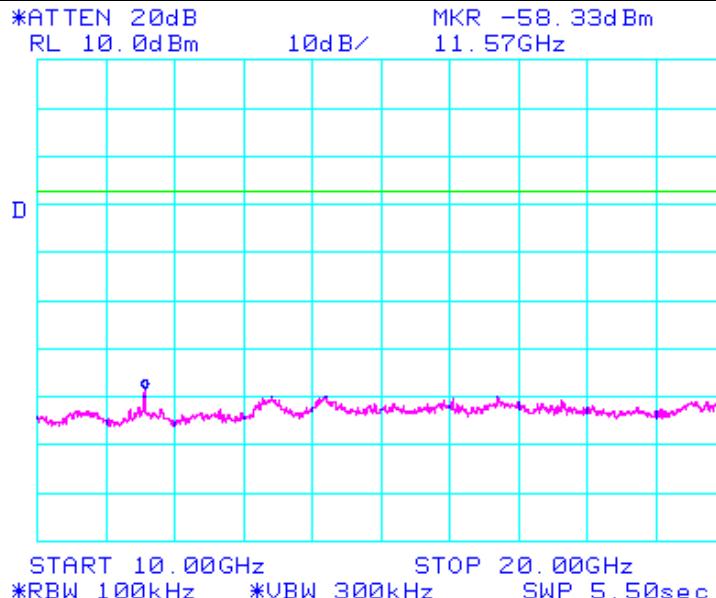


AEGIS LABS INC.

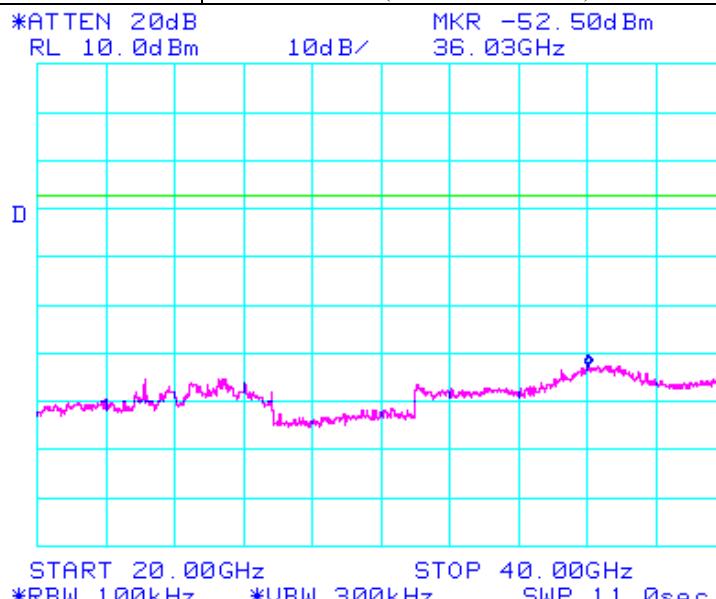
## Conducted Out Of Band Emissions (Continued)

### *802.11a Mode*

<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
11/03/05	5.785 GHz (INTEL-051101-05d09)	JC



<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
11/03/05	5.785 GHz (INTEL-051101-05d10)	JC



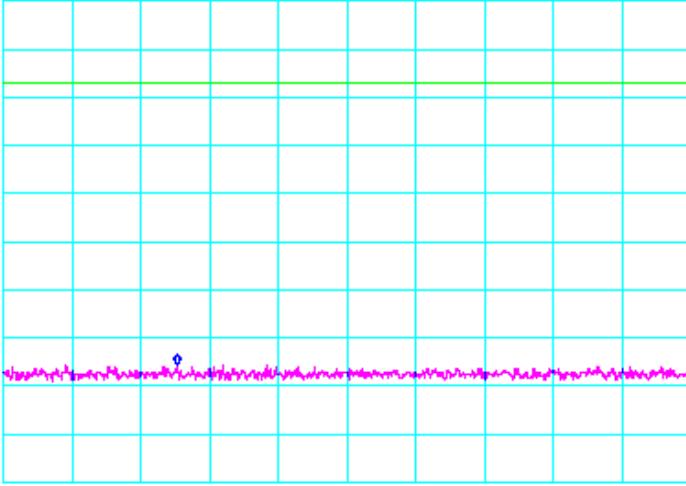
Page 54 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



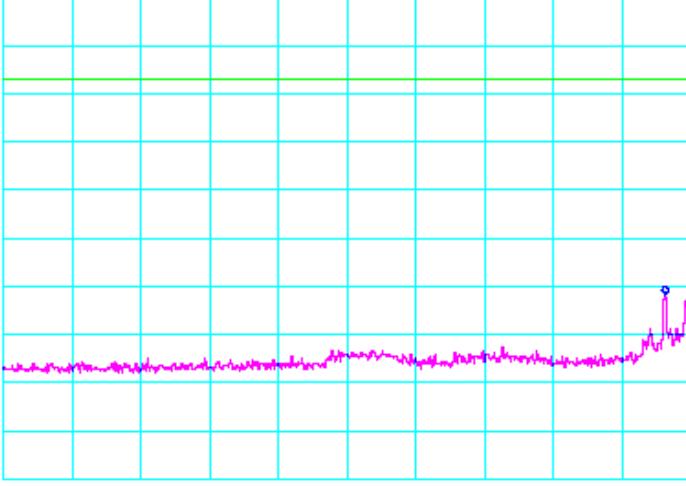
AEGIS LABS INC.

## Conducted Out Of Band Emissions (Continued)

### 802.11a Mode

Test Date	Data	Test Eng.
11/03/05	5.825 GHz (INTEL-051101-05d11)	JC
<b>*ATTEN 20dB</b> <b>RL 10.0dBm</b>	<b>MKR -65.50dBm</b> <b>275.7MHz</b> 	

Test Date	Data	Test Eng.
11/03/05	5.825 GHz (INTEL-051101-05d12)	JC
<b>*ATTEN 20dB</b> <b>RL 10.0dBm</b>	<b>MKR -51.83dBm</b> <b>4.853GHz</b> 	

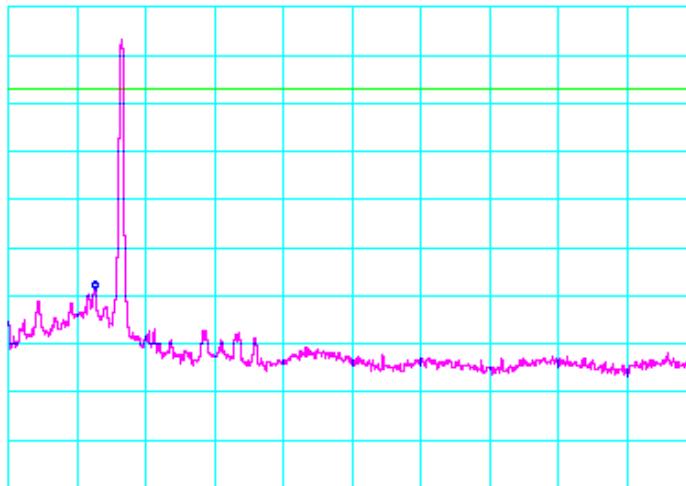
Page 55 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



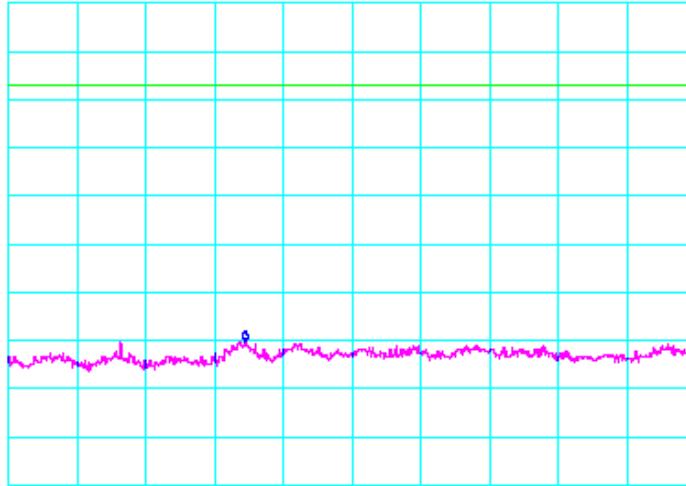
AEGIS LABS INC.

## Conducted Out Of Band Emissions (Continued)

### 802.11a Mode

Test Date	Data	Test Eng.
11/03/05	5.825 GHz (INTEL-051101-05d13)	JC
<p>*ATTEN 20dB RL 10. 0dBm 10dB/</p> <p>MKR -48. 83dBm 5. 633GHz</p>  <p>START 5. 000GHz STOP 10. 000GHz *RBW 100kHz *VBW 300kHz SWP 2.80sec</p>		

Test Date	Data	Test Eng.
11/03/05	5.825 GHz (INTEL-051101-05d14)	JC
<p>*ATTEN 20dB RL 10. 0dBm 10dB/</p> <p>MKR -60. 17dBm 13. 45GHz</p>  <p>START 10. 00GHz STOP 20. 00GHz *RBW 100kHz *VBW 300kHz SWP 5.50sec</p>		

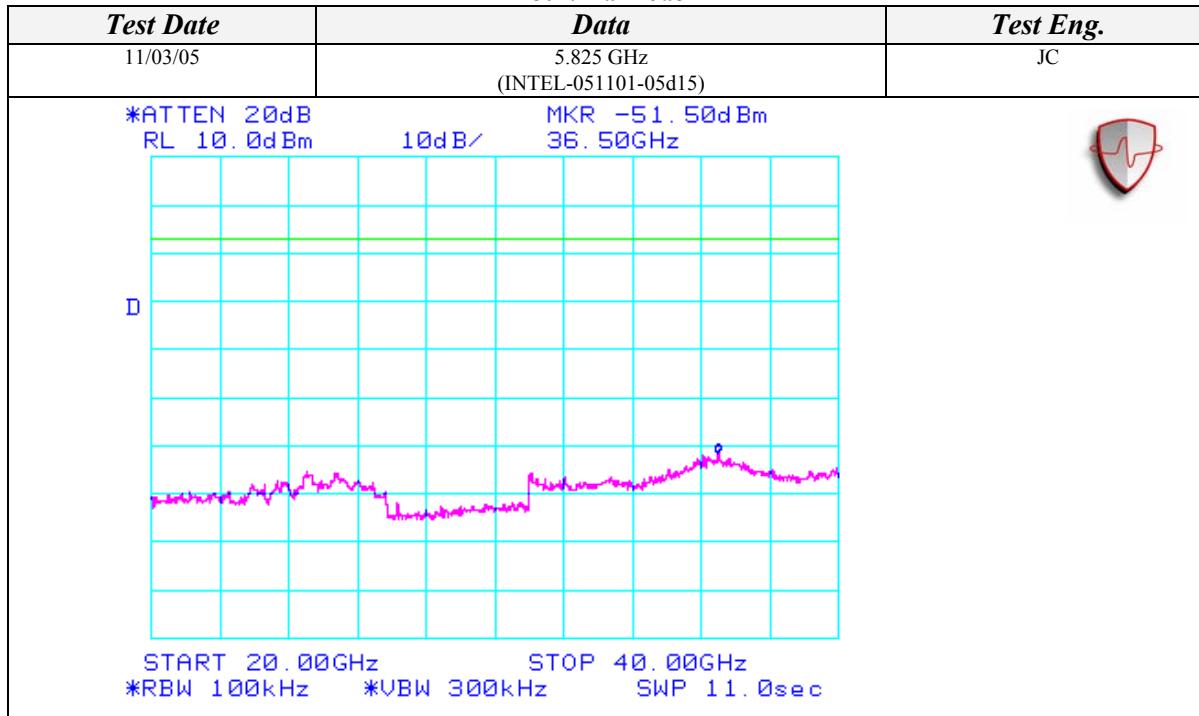
Page 56 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Conducted Out Of Band Emissions (Continued)

### 802.11a Mode



Page 57 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Conducted Out Of Band Emissions (Continued)

### 802.11b Mode

Test Date	Data	Test Eng.
11/03/05	2.412 GHz (INTEL-051101-02e01)	JC
<b>*ATTEN 20dB RL 10. 0d Bm</b>	<b>MKR -53. 67dBm 457MHz</b>	

Figure 1: Spectrum analysis plot for 802.11b mode. The plot shows a single emission at 457 MHz. The x-axis represents frequency from 30 MHz to 2.000 GHz, and the y-axis represents power from -100 to 0 dBm. The plot is labeled 'D' on the left.

Figure 2: Spectrum analysis plot for 802.11b mode. The plot shows a single emission at 2.507 GHz. The x-axis represents frequency from 2.000 GHz to 10.000 GHz, and the y-axis represents power from -100 to 0 dBm. The plot is labeled 'D' on the left.

Test Date: 11/03/05 | Data: 2.412 GHz (INTEL-051101-02e02) | Test Eng: JC

\*ATTEN 20dB  
RL 10. 0d Bm

10dB/

MKR -57. 50dBm  
2.507GHz

START 30MHz STOP 2.000GHz

\*RBW 100kHz \*VBW 300kHz SWP 1.10sec

Test Date: 11/03/05 | Data: 2.412 GHz (INTEL-051101-02e02) | Test Eng: JC

\*ATTEN 20dB  
RL 10. 0d Bm

10dB/

MKR -57. 50dBm  
2.507GHz

START 2.000GHz STOP 10.000GHz

\*RBW 100kHz \*VBW 300kHz SWP 4.40sec

Page 58 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



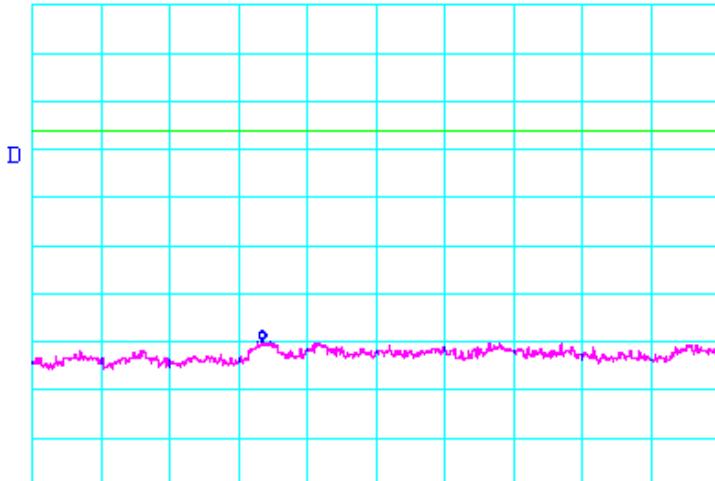
AEGIS LABS INC.

## Conducted Out Of Band Emissions (Continued)

### ***802.11b Mode***

<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
11/03/05	2.412 GHz (INTEL-051101-02e03)	JC

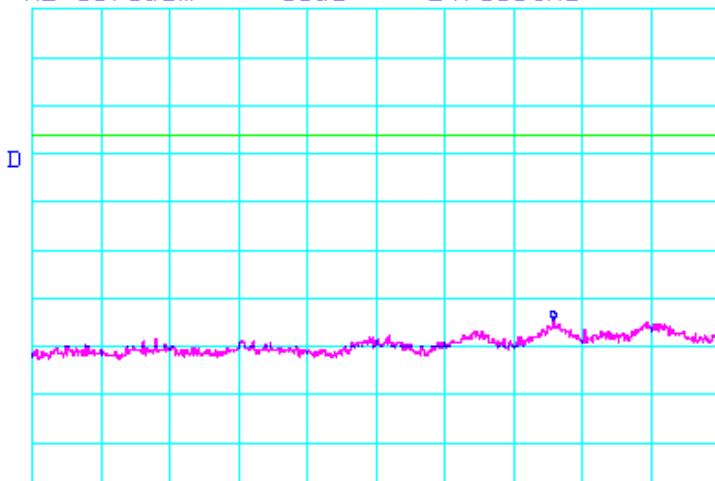
\*ATTEN 20dB MKR -59.67dBm  
RL 10.0dBm 10dB/ 13.35GHz



START 10.00GHz STOP 20.00GHz  
\*RBW 100kHz \*UVBW 300kHz SWP 5.50sec

<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
11/03/05	2.412 GHz (INTEL-051101-02e04)	JC

\*ATTEN 20dB MKR -54.50dBm  
RL 10.0dBm 10dB/ 24.550GHz



START 20.000GHz STOP 26.000GHz  
\*RBW 100kHz \*VBW 300kHz SWP 3.30sec

Page 59 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Conducted Out Of Band Emissions (Continued)

### 802.11b Mode

Test Date	Data	Test Eng.
11/03/05	2.437 GHz (INTEL-051101-02e05)	JC
<p>*ATTEN 20dB RL 10.0dBm 10dB/</p> <p>MKR -47.50dBm 483MHz</p> <p>START 30MHz STOP 2.000GHz *RBW 100kHz *VBW 300kHz SWP 1.10sec</p>		

Test Date	Data	Test Eng.
11/03/05	2.437 GHz (INTEL-051101-02e06)	JC
<p>*ATTEN 20dB RL 10.0dBm 10dB/</p> <p>MKR -51.33dBm 2.333GHz</p> <p>START 2.000GHz STOP 10.000GHz *RBW 100kHz *VBW 300kHz SWP 4.40sec</p>		

Page 60 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



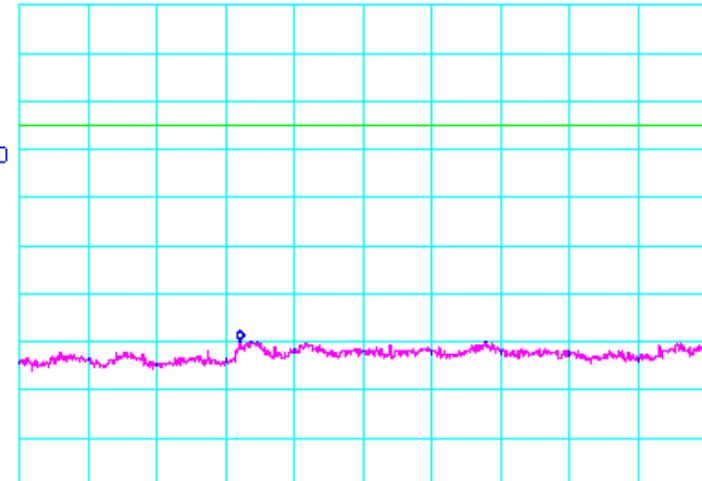
AEGIS LABS INC.

## Conducted Out Of Band Emissions (Continued)

### ***802.11b Mode***

<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
11/03/05	2.437 GHz (INTEL-051101-02e07)	JC

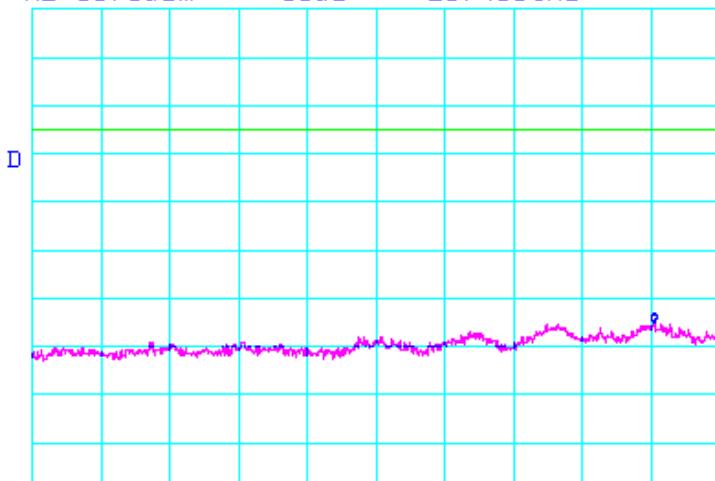
\*ATTEN 20dB MKR -59.67dBm  
RL 10.0dBm 10dB/ 13.22GHz



START 10.00GHz STOP 20.00GHz  
\*RBW 100kHz \*UVBW 300kHz SWP 5.50sec

<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
11/03/05	2.437 GHz (INTEL-051101-02e08)	JC

\*ATTEN 20dB MKR -55.00dBm  
RL 10.0dB 10dB/ 25.430GHz



START 20.000GHz STOP 26.000GHz  
\*RBW 100kHz \*VBW 300kHz SWP 3.30sec

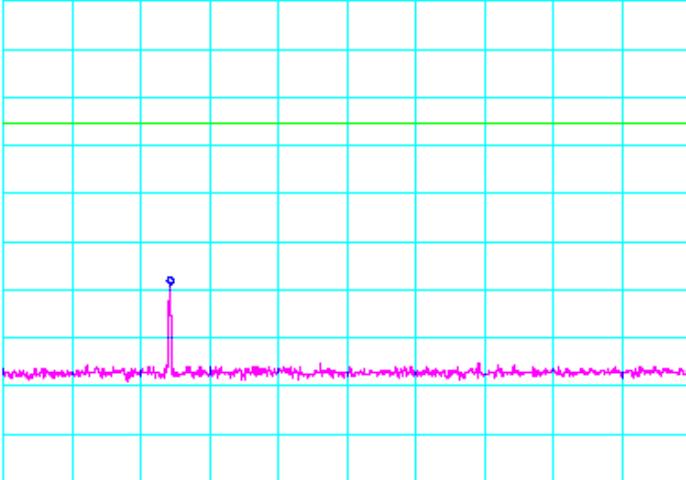
Page 61 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



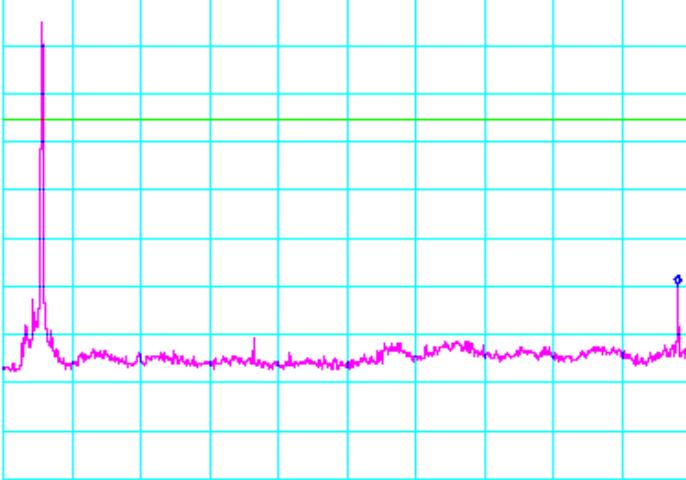
AEGIS LABS INC.

## Conducted Out Of Band Emissions (Continued)

### 802.11b Mode

Test Date	Data	Test Eng.
11/03/05	2.462 GHz (INTEL-051101-02e09)	JC
<p>*ATTEN 20dB RL 10. 0d Bm 10dB/</p> <p>MKR -49. 17d Bm 509MHz</p>  <p>D</p> <p>START 30MHz STOP 2.000GHz *RBW 100kHz *VBW 300kHz SWP 1.10sec</p>		

Test Date	Data	Test Eng.
11/03/05	2.462 GHz (INTEL-051101-02e10)	JC
<p>*ATTEN 20dB RL 10. 0d Bm 10dB/</p> <p>MKR -49. 67d Bm 9.853GHz</p>  <p>D</p> <p>START 2.000GHz STOP 10.000GHz *RBW 100kHz *VBW 300kHz SWP 4.40sec</p>		

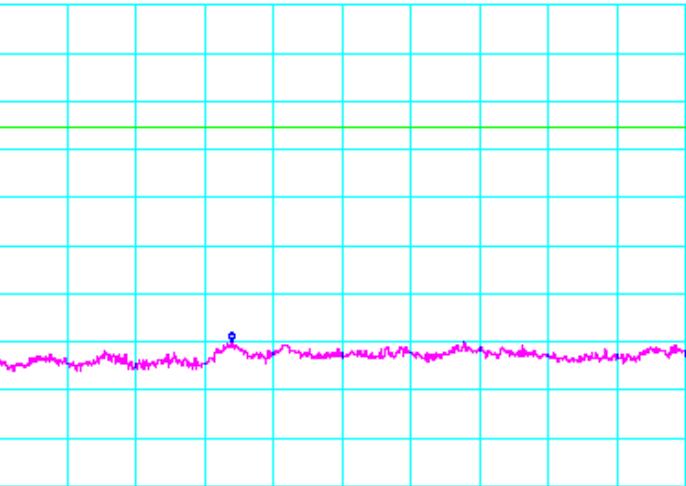
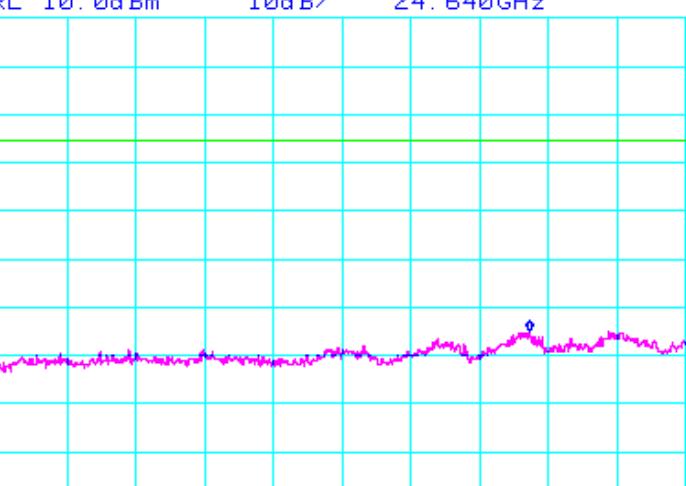
Page 62 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Conducted Out Of Band Emissions (Continued)

### ***802.11b Mode***

Test Date	Data	Test Eng.
11/03/05	2.462 GHz (INTEL-051101-02e11)  *ATTEN 20dB RL 10. 0dBm 10dB/ MKR -59. 83dBm 13. 40GHz	JC
		
	START 10. 00GHz STOP 20. 00GHz *RBW 100kHz *VBW 300kHz SWP 5. 50sec	
Test Date	Data	Test Eng.
11/03/05	2.462 GHz (INTEL-051101-02e12)  *ATTEN 20dB RL 10. 0dBm 10dB/ MKR -54. 83dBm 24. 640GHz	JC
		
	START 20. 000GHz STOP 26. 000GHz *RBW 100kHz *VBW 300kHz SWP 3. 30sec	

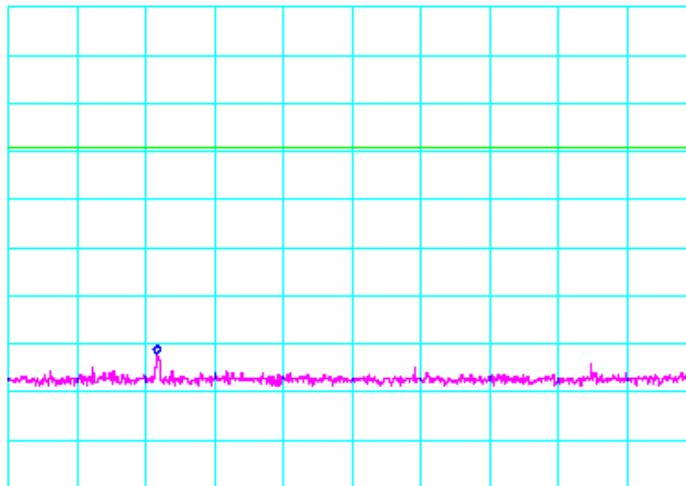
Page 63 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



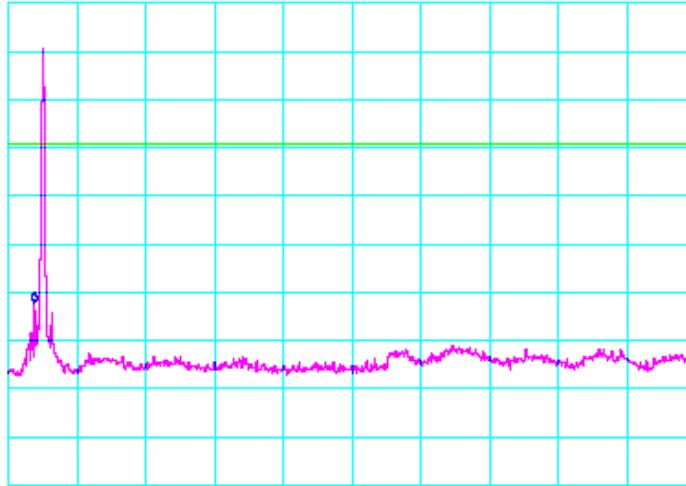
AEGIS LABS INC.

## Conducted Out Of Band Emissions (Continued)

### 802.11g Mode

Test Date	Data	Test Eng.
11/03/05	2.412 GHz (INTEL-051101-03e01)	JC
<p>*ATTEN 20dB RL 10. 0dBm 10dB/</p> <p>MKR -62. 17dBm 457MHz</p>  <p>START 30MHz STOP 2.000GHz *RBW 100kHz *VBW 300kHz SWP 1.10sec</p>		

Test Date	Data	Test Eng.
11/03/05	2.412 GHz (INTEL-051101-03e02)	JC
<p>*ATTEN 20dB RL 10. 0dBm 10dB/</p> <p>MKR -52. 17dBm 2.307GHz</p>  <p>START 2.000GHz STOP 10.000GHz *RBW 100kHz *VBW 300kHz SWP 4.40sec</p>		

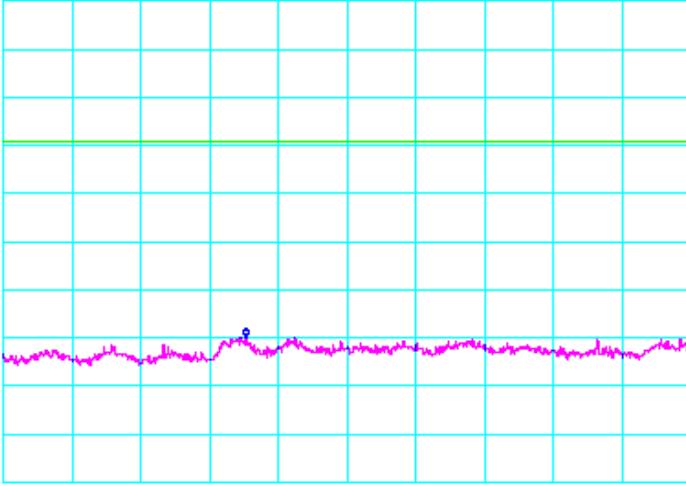
Page 64 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



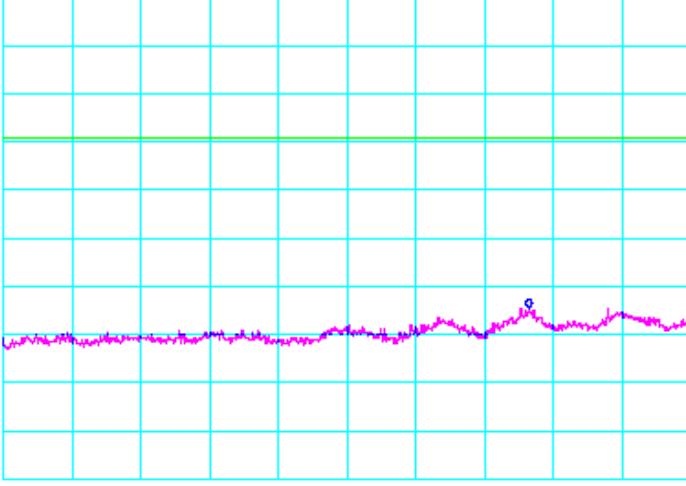
AEGIS LABS INC.

## Conducted Out Of Band Emissions (Continued)

### 802.11g Mode

Test Date	Data	Test Eng.
11/03/05	2.412 GHz (INTEL-051101-03e03)	JC
<p>*ATTEN 20dB RL 10.0dBm 10dB/</p> <p>MKR -59.83dBm 13.53GHz</p>  <p>START 10.00GHz STOP 20.00GHz *RBW 100kHz *VBW 300kHz SWP 5.50sec</p>		

Test Date	Data	Test Eng.
11/03/05	2.412 GHz (INTEL-051101-03e04)	JC
<p>*ATTEN 20dB RL 10.0dBm 10dB/</p> <p>MKR -54.50dBm 24.59GHz</p>  <p>START 20.00GHz STOP 26.00GHz *RBW 100kHz *VBW 300kHz SWP 3.30sec</p>		

Page 65 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Conducted Out Of Band Emissions (Continued)

### 802.11g Mode

Test Date	Data	Test Eng.
11/03/05	2.437 GHz (INTEL-051101-03e05)	JC
<p>*ATTEN 20dB RL 10.0dBm 10dB/</p> <p>MKR -57.67dBm 483MHz</p> <p>START 30MHz STOP 2.000GHz *RBW 100kHz *VBW 300kHz SWP 1.10sec</p>		

Test Date	Data	Test Eng.
11/03/05	2.437 GHz (INTEL-051101-03e06)	JC
<p>*ATTEN 20dB RL 10.0dBm 10dB/</p> <p>MKR -50.83dBm 2.333GHz</p> <p>START 2.000GHz STOP 10.000GHz *RBW 100kHz *VBW 300kHz SWP 4.40sec</p>		

Page 66 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



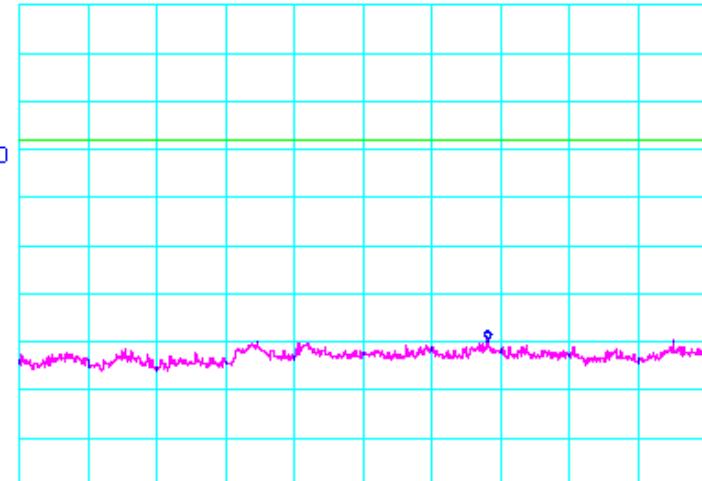
AEGIS LABS INC.

## Conducted Out Of Band Emissions (Continued)

### *802.11g Mode*

<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
11/03/05	2.437 GHz (INTEL-051101-03e07)	JC

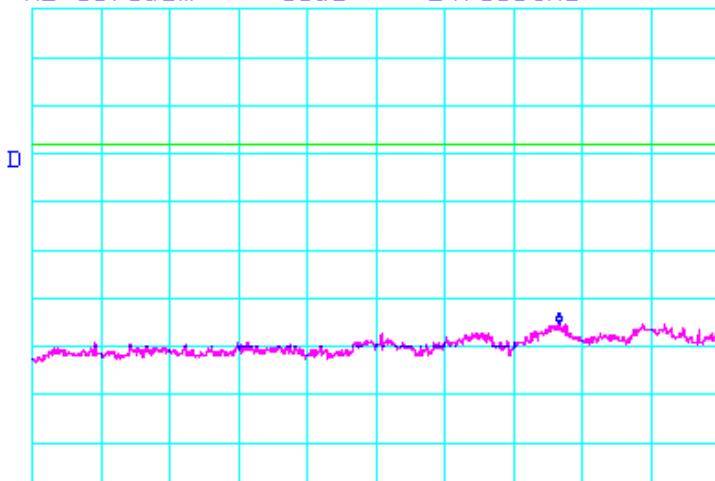
\*ATTEN 20dB MKR -59.50dBm  
RL 10.0dBm 10dB/ 16.82GHz



START 10.00GHz STOP 20.00GHz  
\*RBW 100kHz \*UVBW 300kHz SWP 5.50sec

<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
11/03/05	2.437 GHz (INTEL-051101-03e08)	JC

\*ATTEN 20dB MKR -55, 17dBm  
RL 10.0dBm 10dB/ 24.600GHz



START 20.000GHz STOP 26.000GHz  
\*RBW 100kHz \*VBW 300kHz SWP 3.30sec

Page 67 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Conducted Out Of Band Emissions (Continued)

### 802.11g Mode

Test Date	Data	Test Eng.
11/03/05	2.462 GHz (INTEL-051101-03e09)	JC
<p>*ATTEN 20dB RL 10.0dBm 10dB/</p> <p>MKR -62.83dBm 509MHz</p> <p>START 30MHz STOP 2.000GHz *RBW 100kHz *VBW 300kHz SWP 1.10sec</p>		

Test Date	Data	Test Eng.
11/03/05	2.462 GHz (INTEL-051101-03e10)	JC
<p>*ATTEN 20dB RL 10.0dBm 10dB/</p> <p>MKR -53.17dBm 2.347GHz</p> <p>START 2.000GHz STOP 10.000GHz *RBW 100kHz *VBW 300kHz SWP 4.40sec</p>		

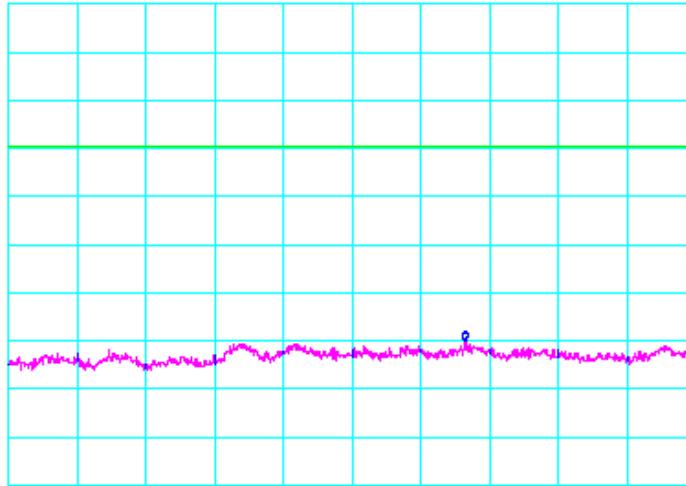
Page 68 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG



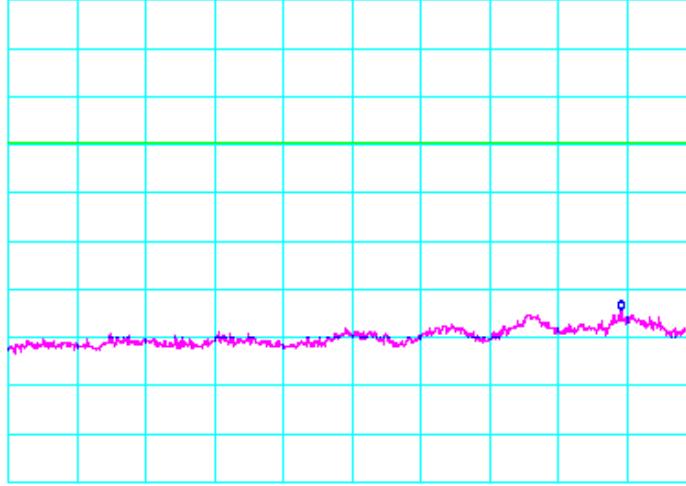
AEGIS LABS INC.

## Conducted Out Of Band Emissions (Continued)

### 802.11g Mode

Test Date	Data	Test Eng.
11/03/05	2.462 GHz (INTEL-051101-03e11)	JC
<p>*ATTEN 20dB RL 10. 0dBm 10dB/</p> <p>MKR -60. 00dBm 16. 65GHz</p>  <p>START 10. 00GHz STOP 20. 00GHz *RBW 100kHz *VBW 300kHz SWP 5.50sec</p>		

Test Date	Data	Test Eng.
11/03/05	2.462 GHz (INTEL-051101-03e12)	JC
<p>*ATTEN 20dB RL 10. 0dBm 10dB/</p> <p>MKR -54. 33dBm 25. 350GHz</p>  <p>START 20. 000GHz STOP 26. 000GHz *RBW 100kHz *VBW 300kHz SWP 3.30sec</p>		

Page 69 of 69 (Appendix A)  
Report Number: INTEL-051101F  
FCC ID: PD9LEN3945ABG