



**AEGIS LABS INC.**

Class II Permissive Change  
Test Report  
And Application for Grant of Equipment Authorization

Pertaining To:

| EUT   | FCC ID:              |
|---|----------------------|
| <b>Intel PRO/Wireless 3945ABG Network Connection,<br/>MN: WM3945ABG</b> | <b>PD9LEN3945ABG</b> |

| Configuration  |
|--|
| <b>802.11a / 802.11b / 802.11g with a set of Hitachi HFT38D4/39D4 dual band antennas</b> |

*MEASUREMENTS PERFORMED IN ACCORDANCE WITH*

| Regulatory Standard(s)   |
|--|
| <b>47 CFR Part 15, Subpart E Section 15.407 (UNII Devices)</b> |

Test Method:  
ANSI C63.4: 2003 American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz



Certificate Number: 1111.01

**APPLICANT:**

Intel Corporation  
2111 NE 25<sup>th</sup> Avenue  
Hillsboro, Oregon 97124

Contact(s): Mr. Robert Paxman

|       | REPORT BODY | APPENDICES | TOTAL PAGES |
|-------|-------------|------------|-------------|
| PAGES | 16          | A<br>15    | 31          |

**PREPARED BY:**

Aegis Labs, Inc.  
22431 Antonio Parkway B160-417  
Rancho S. Margarita, CA 92688

Agent(s): Mr. Steve Kuiper  
Mr. Rick Candelas  
Mr. Johnny Candelas  
Test Report #: INTEL-060113F  
Test Report Revision: None

**The contents of this report shall not be reproduced except in full, without the written approval of Aegis Labs, Inc.**

*Page 1 of 16*  
Report Number: INTEL-060113F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## TABLE OF CONTENTS

| SECTION | TITLE  | PAGE |
|---------|--|------|
|         | COVER SHEET.....                                   | 01   |
|         | TABLE OF CONTENTS.....                             | 02   |
| 1.0     | CERTIFICATION OF TEST DATA.....                    | 03   |
| 2.0     | SUMMARY OF TEST RESULTS.....                       | 04   |
| 3.0     | ADMINISTRATIVE DATA AND TEST DESCRIPTION.....      | 05   |
| 4.0     | DESCRIPTION OF EUT.....                            | 07   |
| 4.1     | EUT Description.....                               | 07   |
| 4.2     | EUT Configuration.....                             | 08   |
| 4.3     | List of EUT Sub-Assemblies and Host Equipment..... | 09   |
| 4.4     | I/O Cabling Diagram and Description.....           | 10   |
| 5.0     | TEST EQUIPMENT AND TEST SETUPS.....                | 11   |
| 5.1     | AC Power Line Conducted Emissions.....             | 11   |
| 5.2     | Spurious Radiated Emissions.....                   | 12   |
| 5.3     | Conducted Emissions At The Antenna Port.....       | 12   |
| 5.4     | Test and Measurement Equipment Used.....           | 13   |
| 6.0     | SAMPLE CALCULATIONS.....                           | 14   |
| 7.0     | MODIFICATIONS AND RECOMMENDATIONS.....             | 16   |

### APPENDICES

A Test Data

Page 2 of 16

Report Number: INTEL-060113F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## 1.0 CERTIFICATION OF TEST DATA

Aegis Labs, Inc. operates as both a Nevada and California Corporation with no organizational or financial relationship with any company, institution, or private individual.

Testing and engineering functions provided by Aegis Labs are furnished through the use of part-time, full-time or consulting engineers with the appropriate qualifications to carry out their duties. The intended purpose of this test report is to describe the measurement procedure and to determine whether the equipment under test "EUT" complies with both the conducted and radiated limits. Limits for emissions testing are described under Subpart E of Part 15 of the FCC rules for Unlicensed National Information Infrastructure (UNII) Devices.

The data, data evaluation and equipment configuration represented herein are a true and accurate representation of the Equipment Under Test (EUT) under the requirements specified in the emissions standard as described below. The test results contained in this report are only representative of the test sample tested as described in Section 3.0 of this report. Certification of the EUT is required as a prerequisite to marketing as defined in Part 2 of the FCC Rules.

### Report Prepared By:

  
\_\_\_\_\_  
**Johnny Candelas**  
Test Technician  
Aegis Labs, Inc.

**01/17/06**  
Date:

### Report Reviewed By:

  
\_\_\_\_\_  
**Rick Candelas**  
Lab Manager  
Aegis Labs, Inc.

**01/17/06**  
Date:

### Report Approved By:

  
\_\_\_\_\_  
**Steve J. Kuiper**  
Quality Assurance Manager  
Aegis Labs, Inc.

**01/17/06**  
Date:



AEGIS LABS INC.

## 2.0 SUMMARY OF TEST RESULTS

The test results provided within this report, indicate that the EUT has been found to be in **COMPLIANCE** with the test specifications based upon the following RF compliance standards:

Pass/Fail determination is based upon the nominal values of the test data.

| EMISSIONS STANDARD                         |  |         |   |
|--|--|---------|---|
| FCC Part 15 Section                        | Description  | Results | Comments  |
| <b>Operation in the 5.15-5.25 GHz Band</b> |  |         |   |
| 15.407(d)                                  | Any UNII device shall use a transmitting antenna that is an integral part of the device.   | PASSED  | The antenna will be integral when installed in a notebook computer                        |
| 15.407(e)                                  | UNII devices will be restricted to indoor operations.  | PASSED  | Refer to "User's Manual" Exhibit  |
| 15.407(a)(1)                               | 26dB emissions bandwidth in MHz.   | N/A     | 5.18 GHz = 23.33 MHz<br><i>Per Original Filing</i>  |
| 15.407(a)(1)                               | Peak transmit power shall not exceed the lesser of 50mW or 4dBm+10logB (where B = 26dB emissions bandwidth).   | PASSED  | 5.18 GHz = 16.16 dBm (41.30 mW)<br>5.24 GHz = 16.59 dBm (45.60 mW)                        |
| 15.407(a)(1)                               | The peak power spectral density shall not exceed 4dBm in any 1MHz band.  | PASSED  | 5.18 GHz = 3.50dBm<br><i>Per Original Filing</i>  |
| 15.407(a)(1)                               | Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.   | N/A     | All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets) |
| 15.407(b)(6) / 15.209                      | Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.   | PASSED  | <i>See Original Filing</i>  |
| 15.407(b)(1)                               | All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.  | PASSED  | See Data Sheets   |
| <b>Operation in the 5.25-5.35 GHz Band</b> |  |         |   |
| 15.407(a)(2)                               | 26dB emissions bandwidth in MHz.   | N/A     | 5.26 GHz = 23.33 MHz<br>5.32 GHz = 25.33 MHz<br><i>Per Original Filing</i>                |
| 15.407(a)(2)                               | Peak transmit power shall not exceed the lesser of 250mW or 11dBm+10logB (where B = 26dB emissions bandwidth).   | PASSED  | 5.26 GHz = 18.35 dBm (68.39 mW)<br>5.32 GHz = 18.14 dBm (65.16 mW)                        |
| 15.407(a)(2)                               | The peak power spectral density shall not exceed 11dBm in any 1MHz band.   | PASSED  | 5.26 GHz = 7.33dBm<br>5.32 GHz = 7.00dBm<br><i>Per Original Filing</i>                    |
| 15.407(a)(2)                               | Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.   | N/A     | All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets) |
| 15.407(b)(6) / 15.209                      | Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.   | PASSED  | <i>See Original Filing</i>  |
| 15.407(b)(2)                               | All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz. Must meet all applicable technical requirements for operating in the 5.15-5.25 GHz band. | PASSED  | See Data Sheets   |



AEGIS LABS INC.

## 2.0 SUMMARY OF TEST RESULTS (Continued)

| EMISSIONS STANDARD                        |  |         |  |
|---|--|---------|--|
| FCC Part 15 Section                       | Description  | Results | Comments   |
| <b>General Requirements For All Bands</b> |  |         |  |
| 15.407(a)(6)                              | The ratio of the peak excursion of the modulation envelope to the peak transmit power shall not exceed 13dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less. | PASSED  | 5.18 GHz = 5.00 dB<br>5.26 GHz = 5.00 dB<br>5.32 GHz = 5.00 dB<br><i>Per Original Filing</i> |
| 15.407(f)                                 | Radio frequency radiation exposure requirement.  | PASSED  | Refer to MPE Calculations  |
| 15.407(b) / 15.207                        | UNII devices using AC power line are required to comply with the conducted limits set forth in Section 15.207.   | PASSED  | <i>See Original Filing</i>   |



AEGIS LABS INC.

### 3.0 ADMINISTRATIVE DATA AND TEST DESCRIPTION

|                                  |   |
|----------------------------------|---|
| <b>DEVICE TESTED:</b>            | ITE Type: Intel PRO/Wireless 3945ABG Network Connection<br>Model Number(s): WM3945ABG<br>Serial Number: 00B11A295CVD26965002<br>FCC ID: PD9LEN3945ABG |
| <b>TEST DATE (S):</b>            | January 12 - 13, 2006   |
| <b>DATE EUT RECEIVED:</b>        | January 12, 2006  |
| <b>ORIGIN OF TEST SAMPLE(S):</b> | Production Unit   |
| <b>RESPONSIBLE PARTY:</b>        | Intel Corporation<br>2111 NE 25 <sup>th</sup> Avenue<br>Hillsboro, Oregon 97124   |
| <b>CLIENT CONTACT:</b>           | Mr. Robert Paxman   |
| <b>MANUFACTURER:</b>             | Intel Corporation   |
| <b>TEST LOCATION:</b>            | Aegis Labs, Inc.<br>32231 Trabuco Creek Road<br>Trabuco Canyon, CA 92678<br>Conducted Site #2<br>Radiated Site #2                                     |
| <b>A2LA CERTIFICATE:</b>         | 1111.01, Valid through February 28, 2006  |
| <b>PURPOSE OF TEST:</b>          | To demonstrate compliance with the relevant standards described in Section 2.0 of this report.  |
| <b>TEST(S) PERFORMED:</b>        | Refer to Table in Section 2.0 of this report.   |

All calibration vendors were responsible for certifying Aegis Labs, Inc. test equipment as per the manufacturer's specifications and that the equipment is calibrated using instruments and standards where the accuracy is traceable to the National Institute of Standards and Technology (NIST). Calibration of all test equipment conforms to ANSI/NCSL Z540-1 and ISO 10012-1 and/or ISO/IEC Guide 17025 compliance (Additionally, other pertinent test equipment will carry MIL-STD-45662A). All calibration documents are on file with Aegis Labs, Inc., with copies provided upon request.



AEGIS LABS INC.

## 4.0 DESCRIPTION OF EUT

### 4.1 EUT Description

| <b>Equipment Under Test (EUT)</b>               |  |
|---|--|
| <b>Trade Name:</b>                              | Intel PRO/Wireless 3945ABG Network Connection  |
| <b>Model Number:</b>                            | WM3945ABG  |
| <b>Frequency Range:</b>                         | 5.15-5.35 GHz  |
| <b>Enclosure:</b>                               | The EUT contains it's own shield made of aluminum approximately 3.5cm wide by 3.5cm deep by 2mm high.                                    |
| <b>Transfer Rate:</b>                           | 6/36/52 Mbps   |
| <b>Antenna Type:</b>                            | Inverted F (Main/Aux)  |
| <b>Antenna Gain (See Note 2):</b>               | 5 GHz = 2.99 (Main), 2.44 (Aux) dBi  |
| <b>Transmit Output Power:</b>                   | 16 dBm (Typical) for 5.15-5.25 GHz<br>18 dBm (Typical) for 5.25-5.35 GHz<br>Please see Appendix A (Data Sheets) for actual output power. |
| <b>Power Supply:</b>                            | 3.3VDC from computer MPCI slot.  |
| <b>Number of External Test Ports Exercised:</b> | 2 Antenna Ports (1 Main & 1 Auxiliary)   |

The Hitachi HFT38D4/39D4 dual band antennas were tested with an Intel PRO/Wireless 3945ABG Network Connection as an embedded 2.4 GHz and 5 GHz Wireless Local Area Network Mini-PCI adapter. It is based on the Mini Card form factor designed to meet the space and size requirements for thin and light notebook PCs. It is capable of a data rate of up to 52 Mbps.

**NOTE 1:** For a more detailed description, please refer to the manufacture's specifications or User's Manual.

**NOTE 2:** Refer to the antenna specifications for a further description of the antennas. Antennas will be professionally installed inside the laptop computer by the laptop vendor.



AEGIS LABS INC.

#### 4.2 EUT Configuration

The EUT was tested with an Intel PRO/Wireless 3945ABG Network Connection installed in its Mini PCI-E slot and was connected to a set of Hitachi HFT38D4/39D4 dual band antennas via its main and auxiliary antenna ports. Data can be found in Appendix A.

The low, middle, and high channels were tested in 802.11a, b, & g modes. Also, the EUT was tested once transmitting from the MAIN antenna port and once transmitting from the AUX antenna port. The EUT was placed in either continuous transmit or continuous receive mode by a program provided by the manufacturer (*GRTT Version 1.1.1*).



AEGIS LABS INC.

#### 4.3 List of EUT, Sub-Assemblies, and Host Equipment

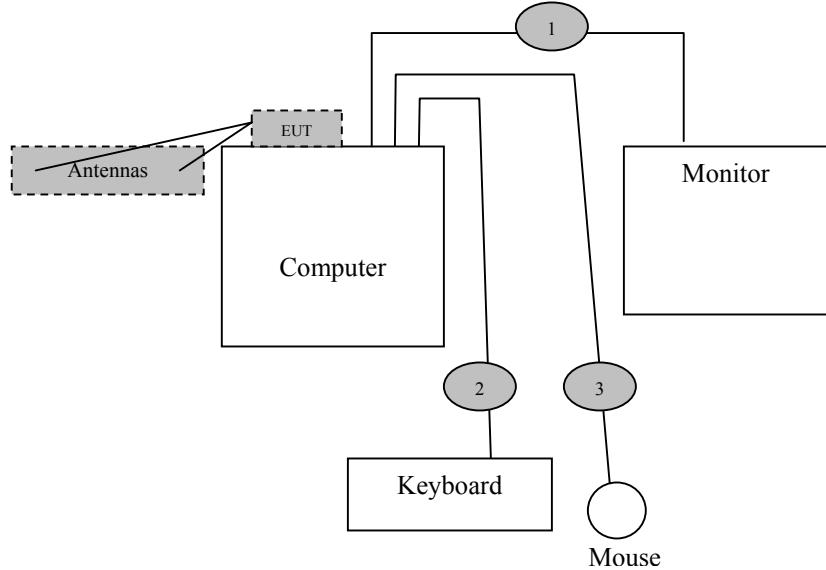
| <b>LIST OF EUT AND SUB-ASSEMBLIES</b>            |                         |                     |                          |
|--|-------------------------|---------------------|--------------------------|
| <b>Equipment Name</b>                            | <b>Manufacturer</b>     | <b>Model Number</b> | <b>Serial Number</b>     |
| Intel PRO/Wireless 3945ABG<br>Network Connection | Intel Corporation       | WM3945ABG           | 00B11A295CV<br>D26965002 |
| <b>EUT Sub-Assemblies</b>                        |                         |                     |                          |
| Main Dual Band Antenna                           | Hitachi Cable Co., Ltd. | HFT38D4             | N/A                      |
| Auxiliary Dual Band Antenna                      | Hitachi Cable Co., Ltd  | HFT39D4             | N/A                      |

| <b>HOST EQUIPMENT LIST</b> |                     |                     |                      |
|----------------------------|---------------------|---------------------|----------------------|
| <b>Equipment Name</b>      | <b>Manufacturer</b> | <b>Model Number</b> | <b>Serial Number</b> |
| Computer                   | Intel               | Generic             | IZTGVV4312035        |
| Monitor                    | Compaq              | 610                 | 712BC060B526         |
| Mouse                      | Logitech            | Y-BF37              | MCTZ5200581          |
| Keyboard                   | Logitech            | M-BJ58              | PMA32715049          |

NOTE: All the power cords of the above support equipment are standard non-shielded, 1.8 meters long.



#### 4.4 I/O Cabling Diagram and Description



Cable 1: This is a 6-foot braid and foil shielded round cable connecting the host computer with the monitor. It has metallic DB-15 type connector at the computer end and is hardwired to the monitor. The cable is bundled to a length of one meter and the shield of the cable is grounded to the chassis of both devices via the connector shells.

Cable 2: This is a 6-foot braid and foil shielded round cable connecting the host computer to the keyboard. It has a metallic 6-pin mini din type connector at the computer end and is hardwired to the keyboard. The shield of the cable is grounded to the chassis of the computer via the connector shell.

Cable 3: This is a 6-foot braid and foil shielded round cable connecting the host computer to the mouse. It has a metallic 6-pin mini din type connector at the computer end and is hardwired to the mouse. The shield of the cable is grounded to the chassis of the computer via the connector shell.



AEGIS LABS INC.

## 5.0 TEST EQUIPMENT AND TEST SETUPS

The test equipment settings and functions are selected using the guidance of ANSI C63.4-2003. All test equipment setups and operations during conducted and radiated emissions testing are in accordance with this reference document.

### 5.1 AC Power Line Conducted Emissions

During conducted emissions measurements, a spectrum analyzer was used as the measuring instrument along with a preselector and quasi-peak detector. A 10 dB attenuation pad was used for the protection of the spectrum analyzer input stage. The conducted emissions from the EUT in the frequency range from 150 kHz to 30 MHz were captured for graphical display through the use of automated LABVIEW EMI measurement software. All graphical readings were measured in the “Peak” mode only to reduce testing time. Upon completion of the graphical scan, the test lab personnel performed the conducted measurement scan manually using the spectrum analyzer front panel keys. All peak measurements coming within 3 dB of the limit line were “Averaged” and/or “Quasi-Peaked” and denoted appropriately in the EXCEL spreadsheet.

The Equipment Under Test (EUT) was configured as a system with peripherals connected, so that at least one interface port of each type is connected to one external peripheral when tested for conducted emissions according to ANSI C63.4: 2003. Excess power cord length was wrapped in a bundle 30 to 40 centimeters in length near the center of the cord. The EUT was tested in a tabletop configuration.

The emission readings for Line 1 and Line 2 are highlighted on the data sheets in Appendix A. The graphical scans only reflects peak readings while the tabulated data sheets reflect peak, average, and/or quasi-peak readings which ever applies.



AEGIS LABS INC.

## 5.2 Spurious Radiated Emissions

A spectrum analyzer was used as the measuring instrumentation along with a preselector and quasi-peak-detector. The pre-amplifiers were used to increase the sensitivity of the instrument. The spectrum analyzer was used in the peak detector mode with the “max-hold” feature activated and in Positive Peak mode. In this mode, the spectrum analyzer records the highest measured reading over all the sweeps. The quasi-peak detector was used only for those readings, which are marked accordingly in the data sheet. The effective measurement bandwidth used for the radiated emissions test was 120 kHz for (30 MHz- 1000 MHz). The spectrum analyzer operated such that the modulation of the signal was filtered out to set the analyzer in linear mode. For testing beyond 1000 MHz a spectrum analyzer capable of taking reading above 1000 MHz was connected to the high frequency amplifier, where these measurement readings were taken with the transducer placed at a 3-meter test distance from the EUT.

The Open Area Test Sites (OATS) was used for radiated emission testing. These test sites are designed according to ANSI C63.4: 2003 and ANSI C63.7: 1992 guidelines. The Measurements were conducted in accordance with ANSI C63.4: 2003 and ANSI C63.7: 1992 requirements.

Broadband biconical, log periodic, and horn antennas were used as transducers during the measurement reading phase. The frequency spans were wide (30 MHz-88 MHz, 88 MHz- 216 MHz, 216 MHz- 300 MHz, and 300 MHz- 1000 MHz). After 1000 MHz the horn antenna was used to measure emissions. The emission readings in both horizontal and vertical polarities are highlighted on the data sheets in Appendix A.

## 5.3 Conducted Emissions at the Antenna Port

A spectrum analyzer or power meter was used as the measuring instrumentation along with an attenuator and/or filter connected to the EUT antenna port. The attenuator and filters are used to ensure that the front end of the measurement instrument is not overloaded by the fundamental transmission. The instruments recorded the measured readings with the bandwidths (video and resolution) set in accordance with the FCC Rules and regulations.

The measured readings are on the data sheets in Appendix A.



AEGIS LABS INC.

## 5.4 Test and Measurement Equipment Used

| TEST EQUIPMENT USED                      |                    |                      |               |                      |                   |
|--|--------------------|----------------------|---------------|----------------------|-------------------|
| Equipment Name                           | Manufacturer       | Model Number         | Serial Number | Calibration Due Date | Calibration Cycle |
| Spectrum Analyzer                        | Agilent            | 8564EC               | 4046A00387    | 08/15/06             | 1 Year            |
| Preamp                                   | Miteq              | JS42-01001800-25-10P | 815980        | 07/21/06             | 1 Year            |
| 2.4 GHz Notch Filter                     | Micro-Tronics      | BRM50702-02          | 003           | 04/21/06             | 1 Year            |
| 5.15-5.35 GHz Notch Filter               | Microwave Circuits | N0452502             | 3173-01       | 06/27/06             | 1 Year            |
| 5.725-5.850 GHz Notch Filter             | Microwave Circuits | N0257881             | 3173-01       | 06/27/06             | 1 Year            |
| Horn Antenna                             | EMCO               | 3115                 | 2230          | 02/06/06             | 1 Year            |
| Antenna - 18-26.5 GHz Pre-amplified Horn | Aegis Labs, Inc.   | H042                 | SLK-35-3W     | 11/04/06             | 1 Year            |
| Antenna - 26.5-40 GHz Pre-amplified Horn | Aegis Labs, Inc.   | H028                 | GM1260-10     | 11/04/06             | 1 Year            |
| Cable                                    | Semflex            | 60637                | S1L29BFS1348  | 04/11/06             | 1 Year            |
| Temperature/Humidity Monitor             | Dickson            | TH550                | 7255185       | N/A                  | N/A               |
| Power Meter                              | Anritsu            | ML2487A              | 6K00001785    | 04/12/06             | 1 Year            |
| Wide Bandwidth Sensor                    | Anritsu            | MA2491A              | 31193         | 04/12/06             | 1 Year            |
| 12dB Attenuator                          | Narda              | 4779-12              | 203           | 08/06/06             | 1 Year            |
| Antenna - Biconical                      | EMCO               | 3110                 | 9108-1421     | 05/17/06             | 1 Year            |
| Antenna - Log Periodic                   | EMCO               | 3148                 | 4947          | 05/11/06             | 1 Year            |
| LISN (EUT)                               | FCC                | FCC-LISN-50-25-2     | 9931          | 02/06/06             | 1 Year            |
| LISN (Access)                            | Com-Power          | LI-200               | 12019         | 07/05/07             | 1 Year            |
| LISN (Access)                            | Com-Power          | LI-200               | 12018         | 07/05/07             | 1 Year            |



AEGIS LABS INC.

## 6.0 SAMPLE CALCULATIONS

If a preamplifier is used during the Radiated Emissions Testing, it is required that the amplifier gain be subtracted from the Spectrum Analyzer (Meter) Reading. In addition, a correction factor for the antenna, cable and a distance factor, if any, must be applied to the Meter Reading before a true field strength reading can be obtained. In the Automatic Mode of A.R.M.S. measurements, these considerations are automatically presented as a part of the printout. In the case of manual measurements and for greater efficiency and convenience, usage of the calibration correction factors in the Appendices is necessary to calculate the Corrected Meter Reading. These correlation factors for each meter reading, shall be modified to reflect these correlation factors at each frequency value so that the meter readings can be compared directly to the modified specification limit. This modified specification limit is referred to as the "Corrected Meter Reading Limit" (CML).

The equation shall be derived in the following manner:

$$\text{Corrected Meter Reading} = \text{Meter Reading} + F + C - G - D$$

Where, F = Antenna Factor

C = Cable Factor

G = Amplifier Gain

D = Distance Factor

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

$$\text{CML} = \text{Specification Limit} - F - C + G + D$$

For the manual mode of measurement, a table of corrected meter reading limits shall be used to permit immediate comparison of the meter reading to determine if the measured emission amplitude exceeded the specification limit at that specific frequency. There shall be two calculation sheets done, one for three meter and one for ten-meter measurement distances, where applicable. The correction factors for the antenna and the amplifier gain are attached in the Appendices.



AEGIS LABS INC.

## 6.0 Sample Calculations (Continued)

Peak Transmit Power Output:

A correction factor for the cable must be applied to the Conducted Power before a true power reading can be obtained. This is referred to as the “Corrected Power” (CP).

The equation shall be derived in the following manner:

Corrected Power Reading = Conducted Power Reading + C

Where, C = Cable Factor

The conducted power is taken in units of dBm. To obtain units of mW the following equation is used:

$$mW = 10^{(dBm/10)}$$



AEGIS LABS INC.

## 7.0 MODIFICATIONS AND RECOMMENDATIONS

No modifications were made to the EUT.

*Page 16 of 16*  
Report Number: INTEL-060113F  
FCC ID: PD9LEN3945ABG



**AEGIS LABS INC.**

## **APPENDIX A**

### ***TEST DATA***

*Page 1 of 15 (Appendix A)*  
*Report Number: INTEL-060113F*  
*FCC ID: PD9LEN3945ABG*



AEGIS LABS INC.

***Hitachi HFT38D4/39D4 dual band antennas  
TEST DATA***

*Page 2 of 15 (Appendix A)  
Report Number: INTEL-060113F  
FCC ID: PD9LEN3945ABG*



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

|                       |  |                        |              |
|-----------------------|--|------------------------|--------------|
| <b>CLIENT:</b>        | Intel Corporation  | <b>DATE:</b>           | 01/12/06     |
| <b>EUT:</b>           | Intel PRO/Wireless 3945ABG Network Connection  | <b>PROJECT NUMBER:</b> | INTEL-060112 |
| <b>MODEL NUMBER:</b>  | WM3945ABG  | <b>TEST ENGINEER:</b>  | BM           |
| <b>SERIAL NUMBER:</b> | 00B11A295CVD26965002   | <b>SITE #:</b>         | 2            |
| <b>CONFIGURATION:</b> | Tested with an Intel PRO/Wireless 3945ABG Network Connection installed in its mini PCI slot in <b>802.11a (5745-5825 MHz)</b> mode with <b>Hitachi HFT38D4/39D4 dual band antennas</b> . | <b>TEMPERATURE:</b>    | 19 C         |
|                       |  | <b>HUMIDITY:</b>       | 37% RH       |
|                       |  | <b>TIME:</b>           | 3:00 PM      |

|                     |  |
|---------------------|--|
| <b>Standard:</b>    | FCC CFR 47, Part 15.407(b)(7)  |
| <b>Description:</b> | The provisions of Sec. 15.205 apply to intentional radiators operating under this section. |
| <b>Results:</b>     | Passes (See Data Sheets)   |

| Unwanted Spurious Emissions Limits |                       |  |  |
|------------------------------------|-----------------------|--|--|
| Frequency (MHz)                    | Field Strength (uV/m) | Field Strength (dBuV/m)<br>(Emissions in the restricted bands) | Field Strength (dBm/MHz)<br>(Emissions outside the restricted bands) |
| Above 960                          | 500                   | 54.00 (Average)<br>74.00 (Peak)                                | EIRP < -27dBm/MHz<br>(68.3dBuV/m)                                    |

Page 3 of 15 (Appendix A)  
Report Number: INTEL-060113F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

**Fundamental Measurements in 802.11a mode (5150-5350 MHz)***Channels 36, 48, 52, & 64***Continuous TX at MAIN Antenna port with Hitachi Antennas**

Aegis Labs, Inc. File #: INTEL-060112-02

**RADIATED EMISSIONS - Horizontal Antenna Polarization**

| Freq.<br>(MHz) | Meter<br>Reading<br>(dBuV) | Antenna<br>Height<br>(cm) | Azimuth<br>(degrees) | Quasi pk or<br>AVG (dBuV) | Preamp<br>Factor<br>(dB) | Cable<br>Factor<br>(dB) | Ant.<br>Factor<br>(dB) | Corrected<br>Reading<br>(dBuV) |  | Note   |
|----------------|----------------------------|---------------------------|----------------------|---------------------------|--------------------------|-------------------------|------------------------|--------------------------------|--|--------|
| 5180.00        | 68.17                      | 100                       | 180                  |                           |                          | 4.51                    | 34.77                  | 107.45                         |  | Ch. 36 |
| 5180.00        |                            |                           |                      | 60.06                     | A                        | 4.51                    | 34.77                  | 99.34                          |  |        |
| 5240.00        | 68.17                      | 150                       | 180                  |                           |                          | 4.53                    | 34.80                  | 107.50                         |  | Ch. 48 |
| 5240.00        |                            |                           |                      | 59.39                     | A                        | 4.53                    | 34.80                  | 98.72                          |  |        |
| 5260.00        | 69.50                      | 150                       | 180                  |                           |                          | 4.54                    | 34.80                  | 108.84                         |  | Ch. 52 |
| 5260.00        |                            |                           |                      | 60.25                     | A                        | 4.54                    | 34.80                  | 99.59                          |  |        |
| 5320.00        | 69.17                      | 100                       | 180                  |                           |                          | 4.56                    | 34.83                  | 108.56                         |  | Ch. 64 |
| 5320.00        |                            |                           |                      | 59.57                     | A                        | 4.56                    | 34.83                  | 98.96                          |  |        |

**RADIATED EMISSIONS - Vertical Antenna Polarization**

| Freq.<br>(MHz) | Meter<br>Reading<br>(dBuV) | Antenna<br>Height<br>(cm) | Azimuth<br>(degrees) | Quasi pk or<br>AVG (dBuV) | Preamp<br>Factor<br>(dB) | Cable<br>Factor<br>(dB) | Ant.<br>Factor<br>(dB) | Corrected<br>Reading<br>(dBuV) |  | Note   |
|----------------|----------------------------|---------------------------|----------------------|---------------------------|--------------------------|-------------------------|------------------------|--------------------------------|--|--------|
| 5180.00        | 63.67                      | 150                       | 180                  |                           |                          | 4.51                    | 34.64                  | 102.81                         |  | Ch. 36 |
| 5180.00        |                            |                           |                      | 54.56                     | A                        | 4.51                    | 34.64                  | 93.70                          |  |        |
| 5240.00        | 63.83                      | 175                       | 180                  |                           |                          | 4.53                    | 34.65                  | 103.01                         |  | Ch. 48 |
| 5240.00        |                            |                           |                      | 53.92                     | A                        | 4.53                    | 34.65                  | 93.10                          |  |        |
| 5260.00        | 64.17                      | 125                       | 270                  |                           |                          | 4.54                    | 34.65                  | 103.36                         |  | Ch. 52 |
| 5260.00        |                            |                           |                      | 55.54                     | A                        | 4.54                    | 34.65                  | 94.73                          |  |        |
| 5320.00        | 63.67                      | 100                       | 270                  |                           |                          | 4.56                    | 34.66                  | 102.90                         |  | Ch. 64 |
| 5320.00        |                            |                           |                      | 53.78                     | A                        | 4.56                    | 34.66                  | 93.01                          |  |        |

NOTE: Fundamental signals measured to calculate the band edge field strengths using the “Marker Delta Method”.

Page 4 of 15 (Appendix A)

Report Number: INTEL-060113F

FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

**Band Edge Field Strength Calculations in 802.11a mode (5150-5350 MHz)**  
**Channels 36 & 64**  
**Continuous TX at MAIN Antenna port with Hitachi Antennas**  
**Aegis Labs, Inc. File #: INTEL-060112-02**

**RADIATED EMISSIONS - Horizontal Antenna Polarization**

| Freq.<br>(MHz) | Meter<br>Reading<br>(dBuV) | Antenna<br>Height<br>(cm) | Azimuth<br>(degrees) | Quasi pk<br>or AVG<br>(dBuV) | Preamp<br>Factor<br>(dB) | Cable<br>Factor<br>(dB) | Ant.<br>Factor<br>(dB) | Corrected<br>Reading<br>(dBuV) | Limits<br>(dBuV) | Diff (dB)<br>+=FAIL | Note   |
|----------------|----------------------------|---------------------------|----------------------|------------------------------|--------------------------|-------------------------|------------------------|--------------------------------|------------------|---------------------|--------|
| 5150.00        |                            |                           |                      |                              |                          |                         |                        | 61.79                          | 74.00            | -12.21              | Ch. 36 |
| 5150.00        |                            |                           |                      |                              | A                        |                         |                        | 48.68                          | 54.00            | -5.32               |        |
| 5350.00        |                            |                           |                      |                              |                          |                         |                        | 64.73                          | 74.00            | -9.27               | Ch. 64 |
| 5350.00        |                            |                           |                      |                              | A                        |                         |                        | 51.80                          | 54.00            | -2.20               |        |
| 5353.00        |                            |                           |                      |                              |                          |                         |                        | 67.73                          | 74.00            | -6.27               |        |
| 5353.00        |                            |                           |                      |                              | A                        |                         |                        | 50.46                          | 54.00            | -3.54               |        |

**RADIATED EMISSIONS - Vertical Antenna Polarization**

| Freq.<br>(MHz) | Meter<br>Reading<br>(dBuV) | Antenna<br>Height<br>(cm) | Azimuth<br>(degrees) | Quasi pk<br>or AVG<br>(dBuV) | Preamp<br>Factor<br>(dB) | Cable<br>Factor<br>(dB) | Ant.<br>Factor<br>(dB) | Corrected<br>Reading<br>(dBuV) | Limits<br>(dBuV) | Diff (dB)<br>+=FAIL | Note   |
|----------------|----------------------------|---------------------------|----------------------|------------------------------|--------------------------|-------------------------|------------------------|--------------------------------|------------------|---------------------|--------|
| 5150.00        |                            |                           |                      |                              |                          |                         |                        | 57.15                          | 74.00            | -16.85              | Ch. 36 |
| 5150.00        |                            |                           |                      |                              | A                        |                         |                        | 43.04                          | 54.00            | -10.96              |        |
| 5350.00        |                            |                           |                      |                              |                          |                         |                        | 59.07                          | 74.00            | -14.93              | Ch. 64 |
| 5350.00        |                            |                           |                      |                              | A                        |                         |                        | 45.85                          | 54.00            | -8.15               |        |
| 5353.00        |                            |                           |                      |                              |                          |                         |                        | 62.07                          | 74.00            | -11.93              |        |
| 5353.00        |                            |                           |                      |                              | A                        |                         |                        | 44.51                          | 54.00            | -9.49               |        |

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

$\Delta m$  = Measured Conducted Band Edge Delta (Peak or Average)

Page 5 of 15 (Appendix A)  
Report Number: INTEL-060113F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

| Test Date | Data  | Test Eng. |
|-----------|---|-----------|
| 07/26/05  | 5.18 GHz band edge <b>PEAK DELTA</b><br>(INTEL-050721-22c01)              | JC        |
|           | *ATTEN 30dB<br>RL 20. 0dBm 10dB/ ΔMKR 45. 66dB<br>29. 2MHz                |           |
|           |   |           |
|           | CENTER 5. 1500GHz SPAN 100. 0MHz<br>*RBW 1. 0MHz *VBW 1. 0MHz SWP 50. 0ms |           |
| Test Date | Data  | Test Eng. |
| 07/26/05  | 5.18 GHz band edge <b>AVERAGE DELTA</b><br>(INTEL-050721-22c02)           | JC        |
|           | *ATTEN 30dB<br>RL 20. 0dBm 10dB/ ΔMKR 50. 66dB<br>28. 7MHz                |           |
|           |   |           |
|           | CENTER 5. 1500GHz SPAN 100. 0MHz<br>*RBW 1. 0MHz *VBW 10Hz SWP 37. 0sec   |           |

Page 6 of 15 (Appendix A)  
Report Number: INTEL-060113F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

| Test Date | Data  | Test Eng.                  |
|-----------|---|----------------------------|
| 07/26/05  | 5.32 GHz band edge <b>PEAK DELTA</b><br>(INTEL-050721-22c03)    | JC                         |
|           | *ATTEN 30dB<br>RL 20. 0dBm 10dB/                                | ΔMKR 40. 83dB<br>-39. 7MHz |
|           |   |                            |
|           |   |                            |
|           | CENTER 5.3500GHz *RBW 1.0MHz                                    | SPAN 100.0MHz SWP 50.0ms   |
| Test Date | Data  | Test Eng.                  |
| 07/26/05  | 5.32 GHz band edge <b>AVERAGE DELTA</b><br>(INTEL-050721-22c04) | JC                         |
|           | *ATTEN 30dB<br>RL 20. 0dBm 10dB/                                | ΔMKR 47. 16dB<br>-31. 7MHz |
|           |   |                            |
|           |   |                            |
|           | CENTER 5.3500GHz *RBW 1.0MHz                                    | SPAN 100.0MHz SWP 37.0sec  |

Page 7 of 15 (Appendix A)  
Report Number: INTEL-060113F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11a mode (5150-5350 MHz)*

*Channels 36, 52, & 64*

**Continuous TX at MAIN Antenna port with Hitachi Antennas**

Aegis Labs, Inc. File #: INTEL-060112-04

### RADIATED EMISSIONS - Horizontal Antenna Polarization

| Freq.<br>(MHz) | Meter<br>Reading<br>(dBuV) | Antenna<br>Height<br>(cm) | Azimuth<br>(degrees) | Quasi pk or<br>AVG (dBuV) | Preamp<br>Factor<br>(dB) | Cable<br>Factor<br>(dB) | Ant.<br>Factor<br>(dB) | Corrected<br>Reading<br>(dBuV) | Limits<br>(dBuV) | Diff (dB)<br>+=FAIL | Note   |
|----------------|----------------------------|---------------------------|----------------------|---------------------------|--------------------------|-------------------------|------------------------|--------------------------------|------------------|---------------------|--------|
| 3453.33        | 54.50                      | 100                       | 135                  |                           | 46.84                    | 3.64                    | 31.50                  | 42.79                          | 68.00            | -25.21              | Ch. 36 |
| 10360.01       | 65.83                      | 100                       | 225                  |                           | 45.00                    | 6.48                    | 38.60                  | 65.91                          | 68.00            | -2.09               |        |
| 15540.00       | 57.17                      | 100                       | 135                  |                           | 44.56                    | 8.00                    | 39.08                  | 59.69                          | 74.00            | -14.31              |        |
| 15540.00       |                            |                           |                      | 43.10                     | A                        | 44.56                   | 8.00                   | 39.08                          | 45.62            | 54.00               | -8.38  |
| 3506.66        | 54.17                      | 100                       | 135                  |                           | 46.85                    | 3.66                    | 31.62                  | 42.60                          | 68.00            | -25.40              | Ch. 52 |
| 10520.00       | 63.50                      | 125                       | 225                  |                           | 45.05                    | 6.55                    | 38.61                  | 63.61                          | 68.00            | -4.39               |        |
| 15780.00       | 58.33                      | 100                       | 135                  |                           | 44.54                    | 8.08                    | 38.93                  | 60.80                          | 74.00            | -13.20              |        |
| 15780.00       |                            |                           |                      | 43.98                     | A                        | 44.54                   | 8.08                   | 38.93                          | 46.45            | 54.00               | -7.55  |
| 3546.66        | 54.17                      | 100                       | 135                  |                           | 46.84                    | 3.69                    | 31.72                  | 42.74                          | 68.00            | -25.26              | Ch. 64 |
| 10639.98       | 63.67                      | 125                       | 225                  |                           | 45.02                    | 6.58                    | 38.68                  | 63.92                          | 74.00            | -10.08              |        |
| 10639.98       |                            |                           |                      | 49.87                     | A                        | 45.02                   | 6.58                   | 38.68                          | 50.12            | 54.00               | -3.88  |
| 15960.00       | 62.67                      | 125                       | 135                  |                           | 44.53                    | 8.14                    | 38.82                  | 65.10                          | 74.00            | -8.90               |        |
| 15960.00       |                            |                           |                      | 49.25                     | A                        | 44.53                   | 8.14                   | 38.82                          | 51.68            | 54.00               | -2.32  |

Page 8 of 15 (Appendix A)  
Report Number: INTEL-060113F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

### RADIATED EMISSIONS – Vertical Antenna Polarization

| Freq.<br>(MHz) | Meter<br>Reading<br>(dBuV) | Antenna<br>Height<br>(cm) | Azimuth<br>(degrees) | Quasi pk or<br>AVG (dBuV) | Preamp<br>Factor<br>(dB) | Cable<br>Factor<br>(dB) | Ant.<br>Factor<br>(dB) | Corrected<br>Reading<br>(dBuV) | Limits<br>(dBuV) | Diff (dB)<br>+=FAIL | Note   |
|----------------|----------------------------|---------------------------|----------------------|---------------------------|--------------------------|-------------------------|------------------------|--------------------------------|------------------|---------------------|--------|
| 3453.33        | 54.33                      | 100                       | 135                  |                           | 46.84                    | 3.64                    | 31.52                  | 42.64                          | 68.00            | -25.36              | Ch. 36 |
| 10360.02       | 59.17                      | 125                       | 270                  |                           | 45.00                    | 6.48                    | 38.80                  | 59.45                          | 68.00            | -8.55               |        |
| 15540.00       | 59.00                      | 125                       | 135                  |                           | 44.56                    | 8.00                    | 39.09                  | 61.54                          | 74.00            | -12.46              |        |
| 15540.00       |                            |                           |                      | 43.35                     | A                        | 44.56                   | 8.00                   | 39.09                          | 45.89            | 54.00               | -8.11  |
| 3506.66        | 54.50                      | 100                       | 180                  |                           | 46.85                    | 3.66                    | 31.62                  | 42.93                          | 68.00            | -25.07              | Ch. 52 |
| 10520.00       | 59.17                      | 150                       | 270                  |                           | 45.05                    | 6.55                    | 38.82                  | 59.49                          | 68.00            | -8.51               |        |
| 15780.00       | 58.50                      | 100                       | 135                  |                           | 44.54                    | 8.08                    | 39.04                  | 61.08                          | 74.00            | -12.92              |        |
| 15780.00       |                            |                           |                      | 44.13                     | A                        | 44.54                   | 8.08                   | 39.04                          | 46.71            | 54.00               | -7.29  |
| 3546.66        | 54.50                      | 100                       | 180                  |                           | 46.84                    | 3.69                    | 31.72                  | 43.07                          | 68.00            | -24.93              | Ch. 64 |
| 10639.98       | 59.67                      | 125                       | 270                  |                           | 45.02                    | 6.58                    | 38.91                  | 60.14                          | 74.00            | -13.86              |        |
| 10639.98       |                            |                           |                      | 47.67                     | A                        | 45.02                   | 6.58                   | 38.91                          | 48.14            | 54.00               | -5.86  |
| 15960.00       | 61.67                      | 100                       | 180                  |                           | 44.53                    | 8.14                    | 39.01                  | 64.28                          | 74.00            | -9.72               |        |
| 15960.00       |                            |                           |                      | 47.63                     | A                        | 44.53                   | 8.14                   | 39.01                          | 50.24            | 54.00               | -3.76  |

Page 9 of 15 (Appendix A)  
Report Number: INTEL-060113F  
FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

**Spurious Emissions Measurements in 802.11a mode (5150-5350 MHz)***Channels 36, 52, & 64***Continuous TX at MAIN Antenna port with Hitachi Antennas**

Aegis Labs, Inc. File #: INTEL-060112-05

**RADIATED EMISSIONS - Horizontal Antenna Polarization**

| Freq. (MHz) | Meter Reading (dBuV) | Antenna Height (cm) | Azimuth (degrees) | Quasi pk or AVG (dBuV) | Cable Factor (dB) | Antenna/Preamp Factor (dB) | Corrected Reading (dBuV/m) | Limits (dBuV/m) | Diff (dB) +=FAIL |
|-------------|----------------------|---------------------|-------------------|------------------------|-------------------|----------------------------|----------------------------|-----------------|------------------|
|-------------|----------------------|---------------------|-------------------|------------------------|-------------------|----------------------------|----------------------------|-----------------|------------------|

**EUT in Continuous Transmit Mode on Channel 36 (5.18 GHz)**

|          |       |     |     |       |      |      |       |       |        |        |
|----------|-------|-----|-----|-------|------|------|-------|-------|--------|--------|
| 20720.00 | 49.67 | 100 | 225 |       | 9.33 | 3.25 | 55.76 | 74.00 | -18.24 |        |
| 20720.00 |       |     |     | 34.19 | A    | 9.33 | 3.25  | 40.28 | 54.00  | -13.72 |

**EUT in Continuous Transmit Mode on Channel 52 (5.26 GHz)**

|          |       |     |     |       |      |      |       |       |        |       |
|----------|-------|-----|-----|-------|------|------|-------|-------|--------|-------|
| 21040.00 | 56.67 | 100 | 225 |       | 9.40 | 3.23 | 62.84 | 74.00 | -11.16 |       |
| 21040.00 |       |     |     | 40.98 | A    | 9.40 | 3.23  | 47.15 | 54.00  | -6.85 |

**EUT in Continuous Transmit Mode on Channel 64 (5.32 GHz)**

|          |       |     |     |       |      |      |       |       |        |       |
|----------|-------|-----|-----|-------|------|------|-------|-------|--------|-------|
| 21280.00 | 56.50 | 100 | 225 |       | 9.46 | 3.39 | 62.57 | 74.00 | -11.43 |       |
| 21280.00 |       |     |     | 42.99 | A    | 9.46 | 3.39  | 49.06 | 54.00  | -4.94 |

**RADIATED EMISSIONS - Vertical Antenna Polarization**

| Freq. (MHz) | Meter Reading (dBuV) | Antenna Height (cm) | Azimuth (degrees) | Quasi pk or AVG (dBuV) | Cable Factor (dB) | Antenna/Preamp Factor (dB) | Corrected Reading (dBuV/m) | Limits (dBuV/m) | Diff (dB) +=FAIL |
|-------------|----------------------|---------------------|-------------------|------------------------|-------------------|----------------------------|----------------------------|-----------------|------------------|
|-------------|----------------------|---------------------|-------------------|------------------------|-------------------|----------------------------|----------------------------|-----------------|------------------|

**EUT in Continuous Transmit Mode on Channel 36 (5.18 GHz)**

|          |       |     |     |       |      |      |       |       |        |       |
|----------|-------|-----|-----|-------|------|------|-------|-------|--------|-------|
| 20720.00 | 53.83 | 100 | 225 |       | 9.33 | 2.95 | 60.22 | 74.00 | -13.78 |       |
| 20720.00 |       |     |     | 39.87 | A    | 9.33 | 2.95  | 46.26 | 54.00  | -7.74 |

**EUT in Continuous Transmit Mode on Channel 52 (5.26 GHz)**

|          |       |     |     |       |      |      |       |       |       |       |
|----------|-------|-----|-----|-------|------|------|-------|-------|-------|-------|
| 21040.00 | 58.33 | 100 | 225 |       | 9.40 | 2.95 | 64.78 | 74.00 | -9.22 |       |
| 21040.00 |       |     |     | 42.73 | A    | 9.40 | 2.95  | 49.18 | 54.00 | -4.82 |

**EUT in Continuous Transmit Mode on Channel 64 (5.32 GHz)**

|          |       |     |     |       |      |      |       |       |        |       |
|----------|-------|-----|-----|-------|------|------|-------|-------|--------|-------|
| 21280.00 | 54.67 | 100 | 225 |       | 9.46 | 3.22 | 60.92 | 74.00 | -13.08 |       |
| 21280.00 |       |     |     | 41.59 | A    | 9.46 | 3.22  | 47.84 | 54.00  | -6.16 |

Page 10 of 15 (Appendix A)

Report Number: INTEL-060113F

FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11a mode (5150-5350 MHz)*

*Channels 36, 52, & 64*

**Continuous RX at MAIN Antenna port with Hitachi Antennas**

*Aegis Labs, Inc. File #: INTEL-060112-04*

### RADIATED EMISSIONS – Horizontal Antenna Polarization

| Freq.<br>(MHz) | Meter<br>Reading<br>(dBuV) | Antenna<br>Height<br>(cm) | Azimuth<br>(degrees) | Quasi pk or<br>AVG (dBuV) | Preamp<br>Factor<br>(dB) | Cable<br>Factor<br>(dB) | Ant.<br>Factor<br>(dB) | Corrected<br>Reading<br>(dBuV) | Limits<br>(dBuV) | Diff (dB)<br>+=FAIL | Note   |
|----------------|----------------------------|---------------------------|----------------------|---------------------------|--------------------------|-------------------------|------------------------|--------------------------------|------------------|---------------------|--------|
| 3453.33        | 55.33                      | 100                       | 135                  |                           | 46.84                    | 3.64                    | 31.50                  | 43.62                          | 74.00            | -30.38              | Ch. 36 |
| 3453.33        |                            |                           |                      | 45.79                     | A                        | 46.84                   | 3.64                   | 31.50                          | 34.08            | 54.00               | -19.92 |
| 3506.66        | 54.67                      | 100                       | 135                  |                           | 46.85                    | 3.66                    | 31.62                  | 43.10                          | 74.00            | -30.90              | Ch. 52 |
| 3506.66        |                            |                           |                      | 45.77                     | A                        | 46.85                   | 3.66                   | 31.62                          | 34.20            | 54.00               | -19.80 |
| 3546.66        | 55.00                      | 100                       | 135                  |                           | 46.84                    | 3.69                    | 31.72                  | 43.57                          | 74.00            | -30.43              | Ch. 64 |
| 3546.66        |                            |                           |                      | 44.58                     | A                        | 46.84                   | 3.69                   | 31.72                          | 33.15            | 54.00               | -20.85 |

### RADIATED EMISSIONS – Vertical Antenna Polarization

| Freq.<br>(MHz) | Meter<br>Reading<br>(dBuV) | Antenna<br>Height<br>(cm) | Azimuth<br>(degrees) | Quasi pk or<br>AVG (dBuV) | Preamp<br>Factor<br>(dB) | Cable<br>Factor<br>(dB) | Ant.<br>Factor<br>(dB) | Corrected<br>Reading<br>(dBuV) | Limits<br>(dBuV) | Diff (dB)<br>+=FAIL | Note   |
|----------------|----------------------------|---------------------------|----------------------|---------------------------|--------------------------|-------------------------|------------------------|--------------------------------|------------------|---------------------|--------|
| 3453.33        | 54.00                      | 100                       | 135                  |                           | 46.84                    | 3.64                    | 31.52                  | 42.31                          | 74.00            | -31.69              | Ch. 36 |
| 3453.33        |                            |                           |                      | 43.56                     | A                        | 46.84                   | 3.64                   | 31.52                          | 31.87            | 54.00               | -22.13 |
| 3506.68        | 54.17                      | 100                       | 180                  |                           | 46.85                    | 3.66                    | 31.62                  | 42.60                          | 74.00            | -31.40              | Ch. 52 |
| 3506.68        |                            |                           |                      | 44.32                     | A                        | 46.85                   | 3.66                   | 31.62                          | 32.75            | 54.00               | -21.25 |
| 3546.66        | 54.83                      | 100                       | 135                  |                           | 46.84                    | 3.69                    | 31.72                  | 43.40                          | 74.00            | -30.60              | Ch. 64 |
| 3546.66        |                            |                           |                      | 44.97                     | A                        | 46.84                   | 3.69                   | 31.72                          | 33.54            | 54.00               | -20.46 |

Page 11 of 15 (Appendix A)

Report Number: INTEL-060113F

FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## PEAK TRANSMIT POWER

|                       |   |                        |              |
|-----------------------|---|------------------------|--------------|
| <b>CLIENT:</b>        | Intel Corporation   | <b>DATE:</b>           | 01/12/06     |
| <b>EUT:</b>           | Intel PRO/Wireless 3945ABG Network Connection   | <b>PROJECT NUMBER:</b> | INTEL-060112 |
| <b>MODEL NUMBER:</b>  | WM3945ABG   | <b>TEST ENGINEER:</b>  | JC           |
| <b>SERIAL NUMBER:</b> | 00B11A295CVD26965002  | <b>SITE #:</b>         | 2            |
| <b>CONFIGURATION:</b> | Tested with an Intel PRO/Wireless 3945ABG Network Connection installed in its mini PCI slot in <b>802.11a (5745-5825 MHz)</b> mode with <b>Hitachi HFT38D4/39D4</b> dual band antennas. | <b>TEMPERATURE:</b>    | 19 C         |
|                       |   | <b>HUMIDITY:</b>       | 37% RH       |
|                       |   | <b>TIME:</b>           | 3:00 PM      |

|                     |  |
|---------------------|--|
| <b>Standard:</b>    | FCC CFR 47, Part 15.407(a)(1) & 15.407(a)(2)   |
| <b>Description:</b> | For the band 5.15-5.25 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 50 mW or 4 dBm + 10logB, where B is the 26-dB emission bandwidth in MHz.<br><br>For the band 5.25-5.35 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10logB, where B is the 26-dB emission bandwidth in MHz. |
| <b>Results:</b>     | See Data Sheet   |

### Peak Transmit Power Limits

| Frequency (MHz) | Output Power (mW) | Output Power (Note 1)  |
|-----------------|-------------------|--|
| 5150-5250       | 50 (17 dBm)       | 4 dBm + 10logB = 17.73 dBm @ 5180 MHz  |
| 5250-5350       | 250 (24 dBm)      | 11 dBm + 10logB = 24.68 dBm @ 5260 MHz<br>11 dBm + 10logB = 24.83 dBm @ 5320 MHz |

Note 1: Calculated using the 26-dB emissions bandwidth measurements.



AEGIS LABS INC.

### Peak Transmit Power (Continued)

| Mode    | Channel | Frequency (MHz) | Rate (Mbps) | Average Power (dBm) | Average Power (mW) | Peak Power (dBm) | Peak Power (mW) |
|---------|---------|-----------------|-------------|---------------------|--------------------|------------------|-----------------|
| 802.11a | 36      | 5180            | 6           | 15.82               | 38.19              | 16.16            | 41.30           |
| 802.11a | 48      | 5240            | 6           | 16.13               | 41.02              | 16.59            | 45.60           |
| 802.11a | 52      | 5260            | 6           | 17.12               | 51.52              | 18.35            | 68.39           |
| 802.11a | 64      | 5320            | 6           | 16.80               | 47.86              | 18.14            | 65.16           |

Note: Power was measured conducted.

*Page 13 of 15 (Appendix A)  
Report Number: INTEL-060113F  
FCC ID: PD9LEN3945ABG*



AEGIS LABS INC.

## CONDUCTED BAND EDGE EMISSIONS TEST RESULTS

|                       |   |                        |              |
|-----------------------|---|------------------------|--------------|
| <b>CLIENT:</b>        | Intel Corporation   | <b>DATE:</b>           | 01/12/06     |
| <b>EUT:</b>           | Intel PRO/Wireless 3945ABG Network Connection   | <b>PROJECT NUMBER:</b> | INTEL-060112 |
| <b>MODEL NUMBER:</b>  | WM3945ABG   | <b>TEST ENGINEER:</b>  | JC           |
| <b>SERIAL NUMBER:</b> | 00B11A295CVD26965002  | <b>SITE #:</b>         | 2            |
| <b>CONFIGURATION:</b> | Tested with an Intel PRO/Wireless 3945ABG Network Connection installed in its mini PCI slot in <b>802.11a (5745-5825 MHz)</b> mode with <b>Hitachi HFT38D4/39D4</b> dual band antennas. | <b>TEMPERATURE:</b>    | 19 C         |
|                       |   | <b>HUMIDITY:</b>       | 37% RH       |
|                       |   | <b>TIME:</b>           | 3:00 PM      |

|                     |  |
|---------------------|--|
| <b>Standard:</b>    | FCC CFR 47, Part 15.407(b)(2)  |
| <b>Description:</b> | For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band. |
| <b>Results:</b>     | Passes (See Data Sheets)   |

## Unwanted Spurious Emissions Limits

| Frequency (MHz) | Field Strength (dBm/MHz)<br>(Emissions outside the restricted bands) |
|-----------------|--|
| 5250-5350       | EIRP < -27dBm/MHz (68.3dBuV/m)                                       |

| Freq.<br>(MHz)                               | Power Spec Den.<br>Reading (dBm/MHz) | Antenna<br>Gain (dBi) | Corrected<br>Reading<br>(dBm/MHz) | Limits<br>(dBm/MHz) | Diff (dB)<br>+=FAIL | Comments      |
|--|--------------------------------------|-----------------------|-----------------------------------|---------------------|---------------------|---------------|
| With Hitachi HFT38D4/39D4 dual band antennas |                                      |                       |                                   |                     |                     |               |
| 5250.00                                      | -54.70                               | 2.99                  | -51.71                            | -27.00              | -24.71              | Tx @ 5240 MHz |
| 5250.00                                      | -54.00                               | 2.99                  | -51.01                            | -27.00              | -24.01              | Tx @ 5260 MHz |

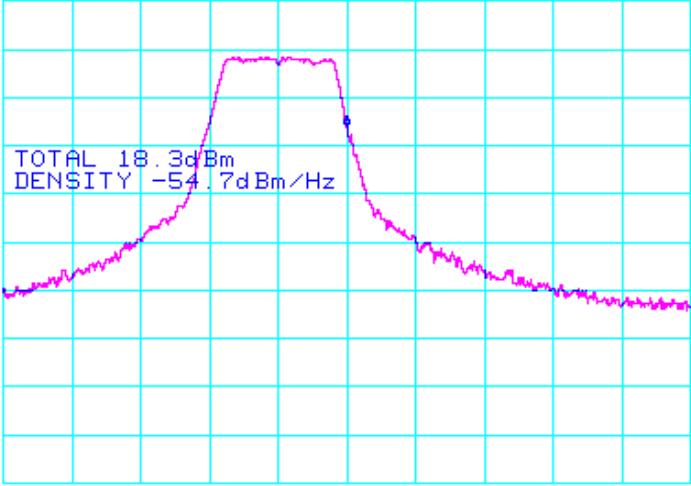
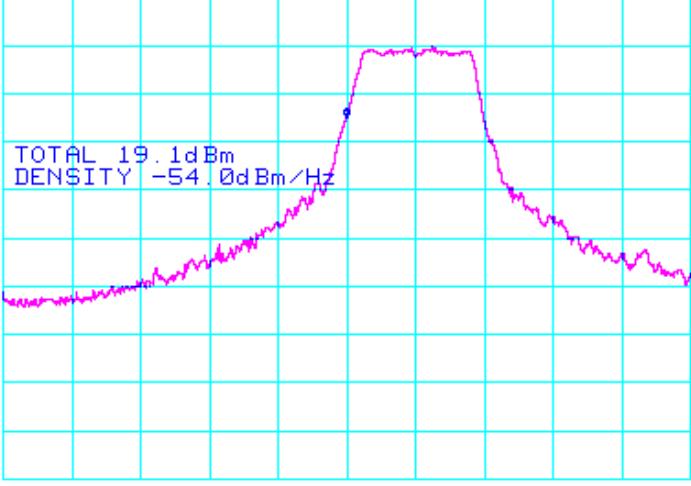
Page 14 of 15 (Appendix A)  
 Report Number: INTEL-060113F  
 FCC ID: PD9LEN3945ABG



AEGIS LABS INC.

## Conducted Band Edge Emissions Test Results (Continued)

Plots Showing Power Spectral Densities

| Test Date | Data  | Test Eng.   |
|-----------|---|---|
| 09/07/05  | 5.24 GHz band edge Power Spectral Density<br>(INTEL-050901-06f1)  | JC  |
|           | <p>*ATTEN 30dB<br/>RL 20.0dBm 10dB/<br/>MKR -6.00dBm<br/>5.2500GHz</p> <p>D TOTAL 18.3dBm<br/>DENSITY -54.7dBm/Hz</p>  <p>CENTER 5.2500GHz SPAN 100.0MHz<br/>*RBW 1.0MHz *VBW 1.0MHz SWP 50.0ms</p>   |    |
|           | <p>*ATTEN 30dB<br/>RL 20.0dBm 10dB/<br/>MKR -5.00dBm<br/>5.2500GHz</p> <p>D TOTAL 19.1dBm<br/>DENSITY -54.0dBm/Hz</p>  <p>CENTER 5.2500GHz SPAN 100.0MHz<br/>*RBW 1.0MHz *VBW 1.0MHz SWP 50.0ms</p> |  |

Page 15 of 15 (Appendix A)  
Report Number: INTEL-060113F  
FCC ID: PD9LEN3945ABG