


*Electromagnetic Emissions Test Report**Application for Grant of Equipment Authorization
Class II Permissive Change
pursuant to**Industry Canada RSS-Gen Issue 2 / RSS 210 Issue 7
FCC Part 15, Subpart E**on the
Intel Corporation
Transmitter
Model: 512AN_MMW (MMC)*UPN: 1000M-L512ANMU
FCC ID: PD9LEN512ANMUGRANTEE: Intel Corporation
2111 N.E. 25th Ave.
Hillsboro, OR 97124-5961TEST SITE: Elliott Laboratories
684 W. Maude Ave
Sunnyvale, CA 94086

REPORT DATE: September 2, 2008

FINAL TEST DATE: August 12, August 13, August 14, August 15,
August 18 and August 25, 2008

AUTHORIZED SIGNATORY:



Mark Briggs
Staff Engineer



Testing Cert #2016-01

Elliott Laboratories is accredited by the A2LA, certificate number 2016-01, to perform the test(s) listed in this report. This report shall not be reproduced, except in its entirety, without the written approval of Elliott Laboratories

REVISION HISTORY

Rev #	Date	Comments	Modified By
1	September 3, 2008	Initial Release	-

TABLE OF CONTENTS

COVER PAGE	1
REVISION HISTORY	2
TABLE OF CONTENTS	3
SCOPE	5
OBJECTIVE	5
STATEMENT OF COMPLIANCE	6
TEST RESULTS SUMMARY	7
UNII / LELAN DEVICES.....	7
GENERAL REQUIREMENTS APPLICABLE TO ALL BANDS	8
MEASUREMENT UNCERTAINTIES	8
EQUIPMENT UNDER TEST (EUT) DETAILS	9
GENERAL.....	9
ANTENNA SYSTEM	9
ENCLOSURE	9
MODIFICATIONS.....	9
SUPPORT EQUIPMENT.....	9
EUT INTERFACE PORTS	10
EUT OPERATION.....	10
PROPOSED MODIFICATION DETAILS	11
GENERAL.....	11
ANTENNA	11
TEST SITE	12
GENERAL INFORMATION.....	12
CONDUCTED EMISSIONS CONSIDERATIONS	12
RADIATED EMISSIONS CONSIDERATIONS	12
MEASUREMENT INSTRUMENTATION	13
RECEIVER SYSTEM	13
INSTRUMENT CONTROL COMPUTER	13
LINE IMPEDANCE STABILIZATION NETWORK (LISN)	13
FILTERS/ATTENUATORS	14
ANTENNAS.....	14
ANTENNA MAST AND EQUIPMENT TURNTABLE.....	14
INSTRUMENT CALIBRATION.....	14

TABLE OF CONTENTS (Continued)

TEST PROCEDURES	15
EUT AND CABLE PLACEMENT	15
CONDUCTED EMISSIONS.....	15
RADIATED EMISSIONS.....	15
RADIATED EMISSIONS.....	16
SPECIFICATION LIMITS AND SAMPLE CALCULATIONS.....	19
GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS.....	20
OUTPUT POWER AND SPURIOUS LIMITS -LE-LAN DEVICES	20
OUTPUT POWER AND SPURIOUS LIMITS -UNII DEVICES	21
SAMPLE CALCULATIONS - CONDUCTED EMISSIONS	21
SAMPLE CALCULATIONS - RADIATED EMISSIONS	22
SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION	23
<i>EXHIBIT 1: Test Equipment Calibration Data.....</i>	<i>1</i>
<i>EXHIBIT 2: Test Measurement Data.....</i>	<i>2</i>
<i>EXHIBIT 3: Photographs of Test Configurations.....</i>	<i>3</i>

SCOPE

An electromagnetic emissions test has been performed on the Intel Corporation model 512AN_MMW (MMC) pursuant to the following rules:

Industry Canada RSS-Gen Issue 2
RSS 210 Issue 7 "Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment"
FCC Part 15, Subpart E requirements for UNII Devices (using FCC DA 02-2138, August 30, 2002)

Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in the following reference standards and as outlined in Elliott Laboratories test procedures:

ANSI C63.4:2003
FCC UNII test procedure 2002-08 DA-02-2138, August 2002

The intentional radiator above has been tested in a simulated typical installation to demonstrate compliance with the relevant Industry Canada performance and procedural standards.

Final system data was gathered in a mode that tended to maximize emissions by varying orientation of EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

The test results recorded herein are based on a single type test of the Intel Corporation model 512AN_MMW (MMC) and therefore apply only to the tested sample. The sample was selected and prepared by Robert Paxman of Intel Corporation

OBJECTIVE

The primary objective of the manufacturer is compliance with the regulations outlined in the previous section.

Prior to marketing in the USA, all unlicensed transmitters and transceivers require certification. Receive-only devices operating between 30 MHz and 960 MHz are subject to either certification or a manufacturer's declaration of conformity, with all other receive-only devices exempt from the technical requirements.

Prior to marketing in Canada, Class I transmitters, receivers and transceivers require certification. Class II devices are required to meet the appropriate technical requirements but are exempt from certification requirements.

Certification is a procedure where the manufacturer submits test data and technical information to a certification body and receives a certificate or grant of equipment authorization upon successful completion of the certification body's review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units, which are subsequently manufactured.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

STATEMENT OF COMPLIANCE

The tested sample of Intel Corporation model 512AN_MMW (MMC) complied with the requirements of the following regulations:

RSS 210 Issue 7 "Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment"
FCC Part 15, Subpart E requirements for UNII Devices

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

TEST RESULTS SUMMARY**UNII / LELAN DEVICES****OPERATION IN THE 5.15 – 5.25 GHz and 5250-5350 GHz BANDS**

FCC Rule Part	RSS Rule Part	Description	Measured Value / Comments	Limit / Requirement	Result
15.407(e)		Indoor operation only	No tests performed, the maximum power, power spectral density remain unchanged from the values originally reported. The proposed addition of antenna does not affect the operation of the device as it relates to these requirements..		
15.407(a) (1)		26dB Bandwidth			
15.407 (a) (1)	A9.2(1)	Output Power			
15.407(a) (2))		Power Spectral Density			
	A9.2(2) / A9.5 (2)	Peak Spectral Density			

GENERAL REQUIREMENTS FOR ALL BANDS

FCC Rule Part	RSS Rule Part	Description	Measured Value / Comments	Limit / Requirement	Result	
	A9.5a	Modulation	Modulation and 99% bandwidth are not affected by the proposed change			
	RSP 100	99% bandwidth				
15.407(b) (5) / 15.209	A9.3	Spurious Emissions below 1GHz	During the original testing spurious emissions below 1GHz were shown to be independent of antenna or transmitter/receiver operating mode. Test was not performed as the proposed changes are only to the antenna			
15.407(b) (2)	A9.3	Spurious Emissions above 1GHz	52.1dB μ V/m @ 11400.1MHz (802.11n 20 MHz)	15.207 in restricted bands, all others <-27dBm eirp	Complies (-1.9dB)	
	A9.5 (3)	Channel Selection	Spurious emissions tested at outermost channels in each band	Device was tested on the top, bottom and center channels in each band	N/A	
15			Measurements on three channels in each band			
15.407(a) (6)	-	Peak Excursion Ratio	The proposed addition of antenna does not affect the operation of the device as it relates to these requirements			
15.407 (c)	A9.5(4)	Operation in the absence of information to transmit				
15.407 (g)	A9.5 (5)	Frequency Stability				
15.407 (h1)	A9.4	Transmit Power Control				
15.407 (h2)	A9.4	Dynamic frequency Selection				
	A9.9g	User Manual information				

GENERAL REQUIREMENTS APPLICABLE TO ALL BANDS

FCC Rule Part	RSS Rule part	Description	Measured Value / Comments	Limit / Requirement	Result (margin)		
15.203	-	RF Connector	The proposed addition of antenna does not affect the antenna connector				
-	RSS GEN 7.2.3 Table 1	Receiver spurious emissions ¹	53.1dB μ V/m @ 3000.3MHz	RSS GEN Table 1	Complies (- 0.9 dB)		
15.207	RSS GEN Table 2	AC Conducted Emissions	The proposed addition of antenna does not affect the AC conducted emissions.				
15.247 (b) (5) 15.407 (f)	RSS 102	RF Exposure Requirements	Refer to MPE calculations in Exhibit 11, RSS 102 declaration. Minimum separation remains at 20cm, as stated in the original User Manual.	Refer to OET 65, FCC Part 1 and RSS 102	Complies		
	RSP 100 RSS GEN 7.1.5	User Manual	The User's Manual that was submitted for the original application remains unchanged.				
	RSP 100 RSS GEN 7.1.5	User Manual					

MEASUREMENT UNCERTAINTIES

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level and were calculated in accordance with UKAS document LAB 34.

Measurement Type	Frequency Range (MHz)	Calculated Uncertainty (dB)
Conducted Emissions	0.15 to 30	± 2.4
Radiated Emissions	0.015 to 30	± 3.0
Radiated Emissions	30 to 1000	± 3.6
Radiated Emissions	1000 to 40000	± 6.0

¹ The original testing determined that the receiver spurious emissions below 1GHz were independent of operating channel and operating mode (transmit versus receive) and dominated by emissions from the test fixture. The highest emission below 1GHz from the combination of EUT and test fixture was measured to be 43.4dB μ V/m @ 108.287MHz. Refer to Elliott report R71537 rev 2.

EQUIPMENT UNDER TEST (EUT) DETAILS**GENERAL**

The Intel Corporation model 512AN_MMW (MMC) is a 2x1 MISO 802.11abgn radio module that is designed to be installed in laptops. The module supports 802.11b, 802.11g and 802.11n protocols in the 2400 - 2483.5 MHz band and 802.11a and 802.11n protocols in the 5150 - 5250 MHz, 5250 - 5350 MHz, 5470 - 5725 MHz and 5725 - 5850 MHz bands. In legacy modes (802.11abg) and n (802.11n) modes one transmit chain is active and either 1 or 2 receive chains can be active. In 802.11n mode it supports both 20-MHz and 40-MHz channels.

For testing purposes, and in accordance with requirements for evaluating a device for modular approvals, the EUT was installed onto an extender card that was connected into a PC. The EUT was outside of the PC's enclosure. The electrical rating of the EUT is 3.3 Volts DC, 0.5 Amps.

The sample was received on August 8, 2008 and tested on August 12, August 13, August 14, August 15, August 18 and August 25, 2008. The EUT consisted of the following component(s):

Manufacturer	Model	Description	Serial Number	FCC ID
Intel	512AN_MW	802.11abgn Module	0016EA01AF0	PD9LEN512ANMU

ANTENNA SYSTEM

Refer to the PROPOSED MODIFICATION DETAILS section of this report.

ENCLOSURE

The EUT does not have an enclosure as it is designed to be installed within the enclosure of a host computer or system.

MODIFICATIONS

The EUT did not require modifications during testing in order to comply with emissions specifications.

SUPPORT EQUIPMENT

The following equipment was used as local support equipment for emissions testing:

Manufacturer	Model	Description	Serial Number	FCC ID
Dell	-	Laptop PC	Prototype	-

No remote support equipment was used during emissions testing.

EUT INTERFACE PORTS

The I/O cabling configuration during emissions testing was as follows:

Port	Connected To	Cable(s)		
		Description	Shielded or Unshielded	Length(m)
DC power port	DC power source	Multi connect	Unshielded	0.3
PCI Extender	Laptop	Multi connect	Unshielded	0.3
Antenna port 1	Antenna	u.FL	Shielded	0.2
Antenna port 2	Antenna	u.FL	Shielded	0.2

EUT OPERATION

During testing the EUT was transmitting at the stated power level at a data rate of 1Mb/s for 802.11b mode and 6Mb/s for 802.11g and n20 modes and 12Mb/s for 802.11n 40MHz mode.

The following modes were selected as the worst case mode(s) for each of the transmitter-related measurements:

- Band Edge, 2.4GHz Band: 802.11g and 802.11n 40MHz modes
- Band Edge, 5150MHz, 5350MHz, 5470MHz: 802.11n 20MHz and 40MHz modes
- Spurious emissions, 2.4GHz Band: 802.11b and 802.11n 20MHz modes
- Spurious emissions, 5150-5250MHz Band: 802.11a mode
- Spurious emissions, 5250-5350MHz Band: 802.11a and 802.11n 40MHz modes
- Spurious emissions, 5470-5725MHz Band: 802.11n 20MHz mode
- Spurious emissions, 5725-5850MHz Band: 802.11a mode

Receiver-related measurements were made with the device operating on each chain alone and on both chains simultaneously.

PROPOSED MODIFICATION DETAILS**GENERAL**

This section details the modifications to the Intel Corporation model 512AN_MMW (MMC) being proposed. All performance and construction deviations from the characteristics originally reported to the FCC are addressed

ANTENNA

The original certification included a Universe PIFA antenna and so covered all PIFA antennas of lower gain. The proposed change is to add a PIFA-based antenna designed for use with the module. Selection of operating modes for each series of tests (band-edge spurious emissions, radiated spurious emissions) is based on previous results with the universe PIFA antenna.

Antenna Name and model	Type	Antenna Gain				Comments
		2.4GH z	5.2GH z	5.5GH z	5.7GH z	
Universe	PIFA	3.24	3.73	4.77	4.97	Original Antenna tested
Amphenol WLAN Main: 14G152168231LV: WLAN Aux: 14G152168131LV:	PIFA Carrier	-0.59 -1.00	1.36 0.01	2.18 2.19	1.64 2.76	Proposed new antenna

TEST SITE**GENERAL INFORMATION**

Final test measurements were taken on August 12, August 13, August 14, August 15, August 18 and August 25, 2008 at the Elliott Laboratories semi anechoic chambers 3, 4 and 5 located at 41039 Boyce Road, Fremont, California. Pursuant to section 2.948 of the FCC's Rules and section 3.3 of RSP-100, construction, calibration, and equipment data has been filed with the Commission.

ANSI C63.4:2003 recommends that ambient noise at the test site be at least 6 dB below the allowable limits. Ambient levels are below this requirement with the exception of predictable local TV, radio, and mobile communications traffic. The test site contains separate areas for radiated and conducted emissions testing. Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent requirements of ANSI C63.4:2003.

CONDUCTED EMISSIONS CONSIDERATIONS

Conducted emissions testing is performed in conformance with ANSI C63.4:2003. Measurements are made with the EUT connected to the public power network through a nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

RADIATED EMISSIONS CONSIDERATIONS

The FCC has determined that radiation measurements made in a shielded enclosure are not suitable for determining levels of radiated emissions. Radiated measurements are performed in an open field environment or in a semi-anechoic chamber. The test sites are maintained free of conductive objects within the CISPR defined elliptical area incorporated in ANSI C63.4:2003 guidelines and meet the Normalized Site Attenuation (NSA) requirements of ANSI C63.4:2003.

MEASUREMENT INSTRUMENTATION

RECEIVER SYSTEM

An EMI receiver as specified in CISPR 16-1 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 2000 MHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements. If the repetition frequency of the signal being measured is below 20Hz, peak measurements are made in lieu of Quasi-Peak measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz, unless the signal is pulsed in which case the average (or video) bandwidth of the measuring instrument is reduced to onset of pulse desensitization and then increased.

INSTRUMENT CONTROL COMPUTER

The receivers utilize either a Rohde & Schwarz EZM Spectrum Monitor/Controller or contain an internal Spectrum Monitor/Controller to view and convert the receiver measurements to the field strength at an antenna or voltage developed at the LISN measurement port, which is then compared directly with the appropriate specification limit. This provides faster, more accurate readings by performing the conversions described under Sample Calculations within the Test Procedures section of this report. Results are printed in a graphic and/or tabular format, as appropriate. A personal computer is used to record all measurements made with the receivers.

The Spectrum Monitor provides a visual display of the signal being measured. In addition, the controller or a personal computer run automated data collection programs which control the receivers. This provides added accuracy since all site correction factors, such as cable loss and antenna factors are added automatically.

LINE IMPEDANCE STABILIZATION NETWORK (LISN)

Line conducted measurements utilize a fifty microhenry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250 uH CISPR adapter. This network provides for calibrated radio frequency noise measurements by the design of the internal low pass and high pass filters on the EUT and measurement ports, respectively.

FILTERS/ATTENUATORS

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high amplitude transient events.

ANTENNAS

A loop antenna is used below 30 MHz. For the measurement range 30 MHz to 1000 MHz either a combination of a biconical antenna and a log periodic or a bi-log antenna is used. Above 1000 MHz, horn antennas are used. The antenna calibration factors to convert the received voltage to an electric field strength are included with appropriate cable loss and amplifier gain factors to determine an overall site factor, which is then programmed into the test receivers or incorporated into the test software.

ANTENNA MAST AND EQUIPMENT TURNTABLE

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height. Measurements below 30 MHz are made with the loop antenna at a fixed height of 1m above the ground plane.

ANSI C63.4:2003 specifies that the test height above ground for table mounted devices shall be 80 centimeters. Floor mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material from 3 to 12 mm if the device is normally used on a non-conductive floor. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

INSTRUMENT CALIBRATION

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An exhibit of this report contains the list of test equipment used and calibration information.


TEST PROCEDURES

EUT AND CABLE PLACEMENT

The regulations require that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.4:2003, and the worst-case orientation is used for final measurements.

CONDUCTED EMISSIONS

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord.

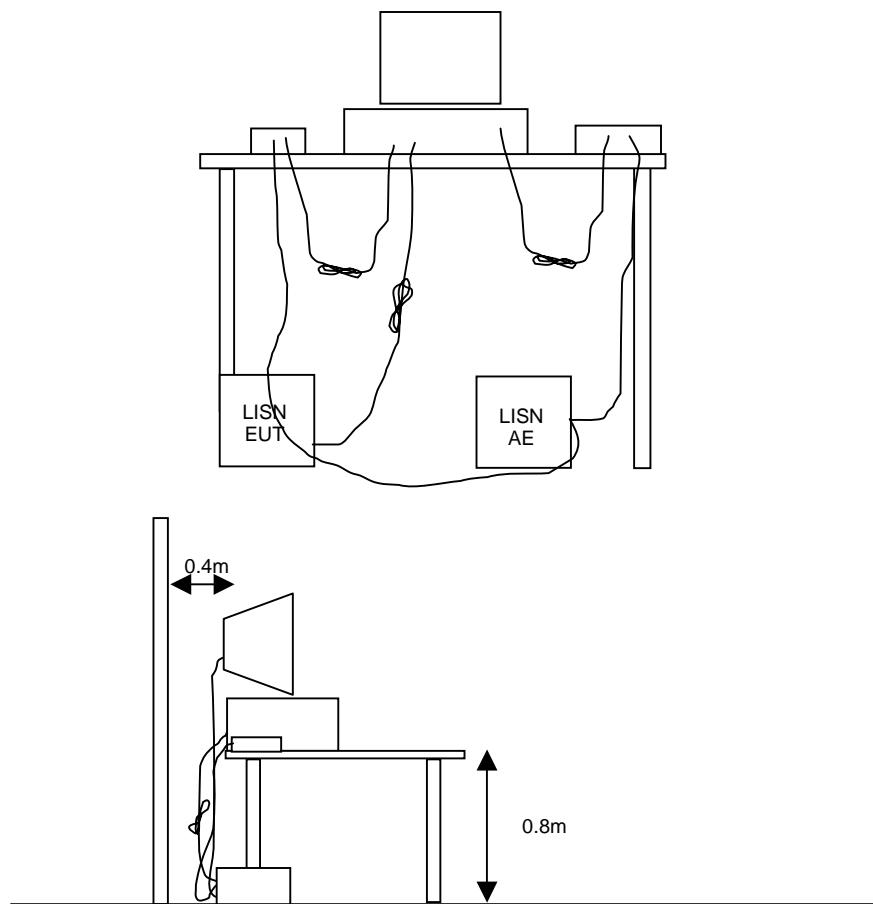


RADIATED EMISSIONS

A preliminary scan of the radiated emissions is performed in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed, one scan for each antenna polarization (horizontal and vertical; loop parallel and perpendicular to the EUT). During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied (for measurements above 30 MHz) and cable positions are varied to determine the highest emission relative to the limit. Preliminary scans may be performed in a fully anechoic chamber for the purposes of identifying the frequencies of the highest emissions from the EUT.


A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions. Other methods used during the preliminary scan for EUT emissions involve scanning with near field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final maximization is a phase in which the highest amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth, which results in the highest emission is then maintained while varying the antenna height from one to four meters (for measurements above 30 MHz, measurements below 30 MHz are made with the loop antenna at a fixed height of 1m). The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain.

When testing above 18 GHz, the receive antenna is located at 1meter from the EUT and the antenna height is restricted to a maximum of 2.5 meters.

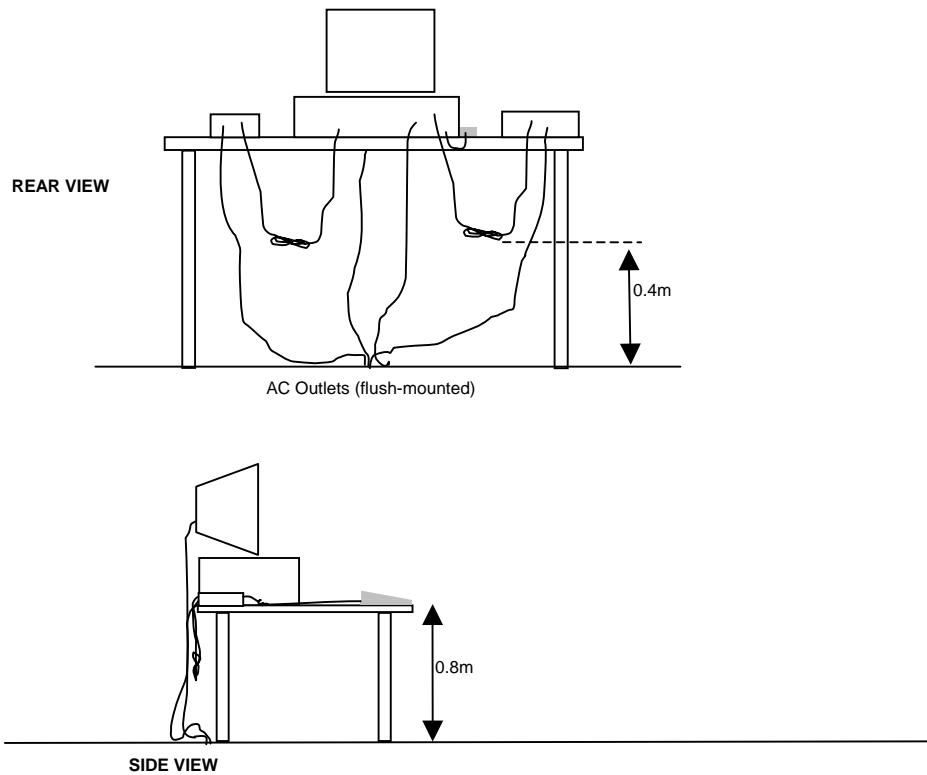


Typical Test Configuration for Radiated Field Strength Measurements

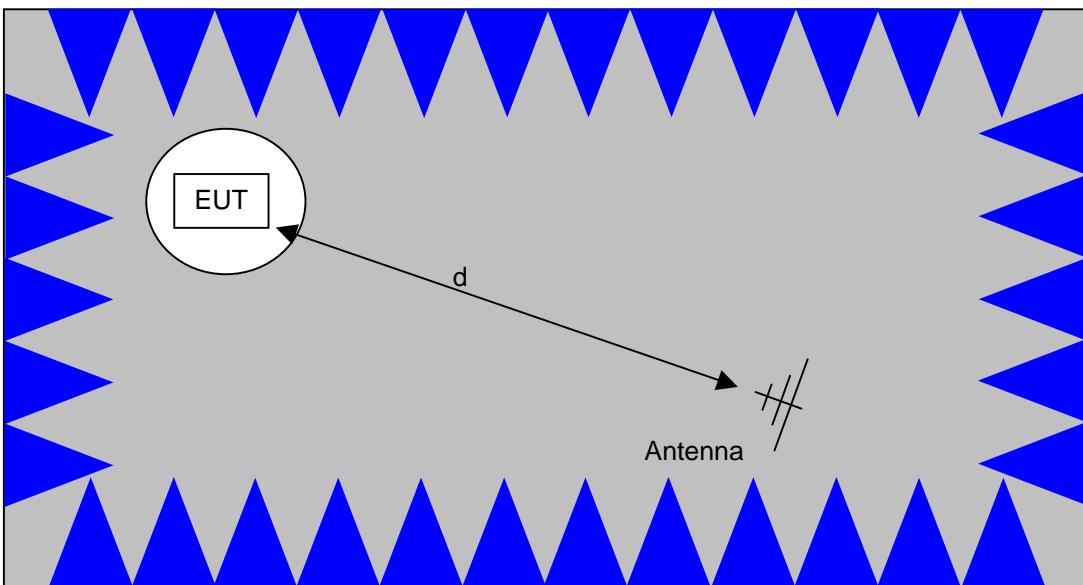

The anechoic materials on the walls and ceiling ensure compliance with the normalized site attenuation requirements of CISPR 16 / CISPR 22 / ANSI C63.4 for an alternate test site at the measurement distances used.

Floor-standing equipment is placed on the floor with insulating supports between the unit and the ground plane.

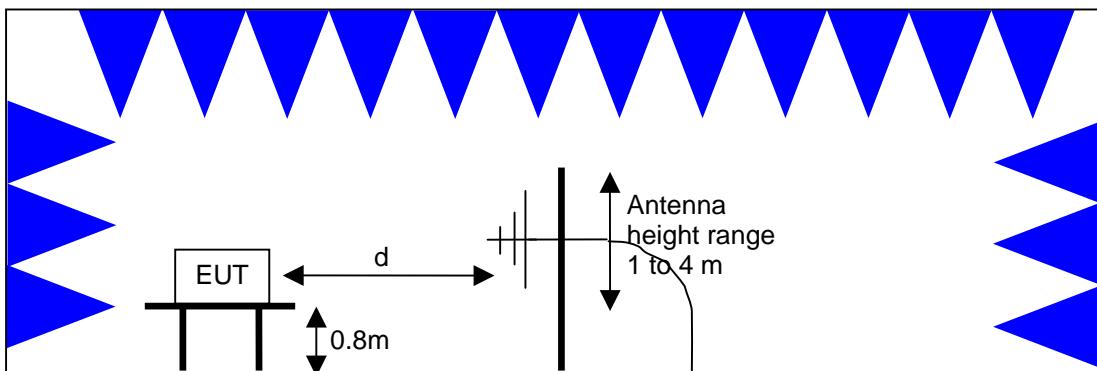

Test Configuration for Radiated Field Strength Measurements
Semi-Anechoic Chamber, Plan and Side Views

SPECIFICATION LIMITS AND SAMPLE CALCULATIONS

The limits for conducted emissions are given in units of microvolts, and the limits for radiated emissions are given in units of microvolts per meter at a specified test distance. Data is measured in the logarithmic form of decibels relative to one microvolt, or dB microvolts (dBuV). For radiated emissions, the measured data is converted to the field strength at the antenna in dB microvolts per meter (dBuV/m). The results are then converted to the linear forms of uV and uV/m for comparison to published specifications.

For reference, converting the specification limits from linear to decibel form is accomplished by taking the base ten logarithm, then multiplying by 20. These limits in both linear and logarithmic form are as follows:

GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS

The table below shows the limits for the spurious emissions from transmitters that fall in restricted bands¹ (with the exception of transmitters operating under FCC Part 15 Subpart D and RSS 210 Annex 9), the limits for all emissions from a low power device operating under the general rules of RSS 310 (tables 3 and 4), RSS 210 (table 2) and FCC Part 15 Subpart C section 15.209.

Frequency Range (MHz)	Limit (uV/m)	Limit (dBuV/m @ 3m)
0.009-0.490	2400/F _{KHz} @ 300m	67.6-20*log ₁₀ (F _{KHz}) @ 300m
0.490-1.705	24000/F _{KHz} @ 30m	87.6-20*log ₁₀ (F _{KHz}) @ 30m
1.705 to 30	30 @ 30m	29.5 @ 30m
30 to 88	100 @ 3m	40 @ 3m
88 to 216	150 @ 3m	43.5 @ 3m
216 to 960	200 @ 3m	46.0 @ 3m
Above 960	500 @ 3m	54.0 @ 3m

OUTPUT POWER AND SPURIOUS LIMITS -LE-LAN DEVICES

The table below shows the limits for output power and output power density defined by RSS 210. Where the signal bandwidth is less than 20 MHz the maximum output power is reduced to the power spectral density limit plus 10 times the log of the bandwidth (in MHz).

Operating Frequency (MHz)	Output Power	Power Spectral Density
5150 - 5250	200mW (23 dBm) eirp	10 dBm/MHz eirp
5250 - 5350	250 mW (24 dBm) ² 1W (30dBm) eirp	11 dBm/MHz
5470 - 5725	250 mW (24 dBm) ³ 1W (30dBm) eirp	11 dBm/MHz
5725 – 5825	1 Watts (30 dBm) 4W eirp	17 dBm/MHz

In addition, the power spectral density limit shall be reduced by 1dB for every dB the highest power spectral density exceeds the “average” power spectral density, determined by dividing the output power by 10log(99% bandwidth), by more than 3dB. Fixed point-to-point applications using the 5725 – 5825 MHz band may use antennas with gains of up to 23dBi without this limitation. If the gain exceeds 23dBi then the output power limit of 1 Watt is reduced by 1dB for every dB the gain exceeds 23dBi.

¹ The restricted bands are detailed in FCC 15.203, RSS 210 Table 1 and RSS 310 Table 2

² If EIRP exceeds 500mW the device must employ TPC

³ If EIRP exceeds 500mW the device must employ TPC

OUTPUT POWER AND SPURIOUS LIMITS -UNII DEVICES

The table below shows the limits for output power and output power density defined by FCC Part 15 Subpart E. Where the signal bandwidth is less than 20 MHz the maximum output power is reduced to the power spectral density limit plus 10 times the log of the bandwidth (in MHz).

Operating Frequency (MHz)	Output Power	Power Spectral Density
5150 - 5250	50mW (17 dBm)	10 dBm/MHz
5250 - 5350	250 mW (24 dBm)	11 dBm/MHz
5470 - 5725	250 mW (24 dBm)	11 dBm/MHz
5725 - 5825	1 Watts (30 dBm)	17 dBm/MHz

The peak excursion envelope is limited to 13dB.

For system using antennas with gains exceeding 6dBi, the output power and power spectral density limits are reduced by 1dB for every dB the antenna gain exceeds 6dBi. Fixed point-to-point applications using the 5725 – 5825 MHz band may use antennas with gains of up to 23dBi without this limitation. If the gain exceeds 23dBi then the output power limit of 1 Watt is reduced by 1dB for every dB the gain exceeds 23dBi.

SAMPLE CALCULATIONS - CONDUCTED EMISSIONS

Receiver readings are compared directly to the conducted emissions specification limit (decibel form) as follows:

$$R_f - S = M$$

where:

R_f = Receiver Reading in dBuV

S = Specification Limit in dBuV

M = Margin to Specification in +/- dB

SAMPLE CALCULATIONS - RADIATED EMISSIONS

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

A distance factor, when used for electric field measurements above 30MHz, is calculated by using the following formula:

$$F_d = 20 * \text{LOG10} (D_m/D_s)$$

where:

F_d = Distance Factor in dB

D_m = Measurement Distance in meters

D_s = Specification Distance in meters

For electric field measurements below 30MHz the extrapolation factor is either determined by making measurements at multiple distances or a theoretical value is calculated using the formula:

$$F_d = 40 * \text{LOG10} (D_m/D_s)$$

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The antenna factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

R_r = Receiver Reading in dBuV/m

F_d = Distance Factor in dB

R_c = Corrected Reading in dBuV/m

L_s = Specification Limit in dBuV/m

M = Margin in dB Relative to Spec

SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION

Where the radiated electric field strength is expressed in terms of the equivalent isotropic radiated power (eirp), or where a field strength measurement of output power is made in lieu of a direct measurement, the following formula is used to convert between eirp and field strength at a distance of 3m from the equipment under test:

$$E = \frac{1000000 \sqrt{30} P}{3} \text{ microvolts per meter}$$

where P is the eirp (Watts)

EXHIBIT 1: Test Equipment Calibration Data

1 Page

Radio Antenna Port (Power and Spurious Emissions), 12-Aug-08**Engineer: jcaizzi**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	SpecAn 9 KHz-26.5 GHz, Non-Program	8563E	284	21-Aug-08
Miteq	Preamplifier, 1-18 GHz	AFS44	1346	13-Nov-08
EMCO	Antenna, Horn, 1-18 GHz (SA40-Purple)	3115	1779	19-Mar-10

Radiated Emissions, 1000 - 18,000 MHz, 13-Aug-08**Engineer: Ben Jing**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	SpecAn 9 KHz-26.5 GHz, Non-Program	8563E	284	21-Aug-08
Miteq	Preamplifier, 1-18 GHz	AFS44	1346	13-Nov-08
Rohde & Schwarz	Power Meter, Single Channel	NRVS	1534	05-Mar-09
Micro-Tronics	Band Reject Filter, 5150-5350 MHz	BRC50703-02	1729	17-Oct-08
EMCO	Antenna, Horn, 1-18 GHz (SA40-Purple)	3115	1779	19-Mar-10
Rohde & Schwarz	Power Sensor, 1 uW-100 mW, DC-18 GHz, 50ohms	NRV-Z51	1797	21-Aug-08

Radiated Emissions, 30 - 40,000 MHz, 13-Aug-08**Engineer: jcaizzi**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	SpecAn 9 KHz-26.5 GHz, Non-Program	8563E	284	21-Aug-08
Miteq	Preamplifier, 1-18 GHz	AFS44	1346	13-Nov-08
Micro-Tronics	Band Reject Filter, 5150-5350 MHz	BRC50703-02	1729	17-Oct-08
EMCO	Antenna, Horn, 1-18 GHz (SA40-Purple)	3115	1779	19-Mar-10

Radiated Emissions, 1000 - 18,000 MHz, 14-Aug-08**Engineer: Ben Jing**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Asset #</u>	<u>Cal Due</u>
EMCO	Antenna, Horn, 1-18 GHz	3115	786	07-Dec-08
Hewlett Packard	SpectAn 9 kHz - 40 GHz, FT (SA40) Blue	8564E (84125C)	1393	15-Jan-09
Miteq	Preamplifier, 1-18 GHz	AFS44	1540	12-Nov-08

Radiated Emissions, 1000 - 18,000 MHz, 16-Aug-08**Engineer: Ben Jing**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	SpecAn 9 KHz-26.5 GHz, Non-Program	8563E	284	21-Aug-08
Miteq	Preamplifier, 1-18 GHz	AFS44	1346	13-Nov-08
Micro-Tronics	Band Reject Filter, 5470-5725 MHz	BRC50704-02	1730	17-Oct-08
EMCO	Antenna, Horn, 1-18 GHz (SA40-Purple)	3115	1779	19-Mar-10
Rohde & Schwarz	Power Meter, Dual Channel	NRVD	1786	07-Jan-09

Radiated Emissions, 1000 - 18000 MHz, 18-Aug-08**Engineer: Suhaila Khushzad**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Asset #</u>	<u>Cal Due</u>
EMCO	Antenna, Horn, 1-18 GHz	3115	786	07-Dec-08
Hewlett Packard	SpectAn 9 kHz - 40 GHz, FT (SA40) Blue	8564E (84125C)	1393	15-Jan-09
Miteq	Preamplifier, 1-18 GHz	AFS44	1540	12-Nov-08

Radiated Emissions, 1000 - 18,000 MHz, 25-Aug-08**Engineer: Joseph Cadigal**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Asset #</u>	<u>Cal Due</u>
EMCO	Antenna, Horn, 1-18 GHz	3115	786	07-Dec-08
Hewlett Packard	SpecAn 30 Hz -40 GHz, SV (SA40) Red	8564E (84125C)	1148	24-Sep-08
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	1780	06-Nov-08

EXHIBIT 2: Test Measurement Data

35 Pages



EMC Test Data

Client:	Intel	Job Number:	J72587
Model:	512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna	T-Log Number:	T72683
Contact:	Robert Paxman	Account Manager:	Briggs / Eriksen
Emissions Standard(s):	RSS 210 / FCC 15.407 UNII (Radiated)	Class:	NII
Immunity Standard(s):	-	Environment:	-

EMC Test Data - NII Radiated Emissions Boxter 13 SL300 Rocky30 Antenna

For The

Intel

Model

512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna

Date of Last Test: 8/25/2008



EMC Test Data

Client:	Intel	Job Number:	J72587
Model:	512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna	T-Log Number:	T72683
Contact:	Robert Paxman	Account Manager:	Briggs / Eriksen
Standard:	RSS 210 / FCC 15.407 UNII (Radiated)	Class:	N/A

RSS 210 and FCC 15.E (U-NII, 5150- 550/5250-5350/5460-5725MHz) Radiated Spurious Emissions - Band Edge 802.11n 20MHz Mode

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 8/12/2008 Config. Used: 1
Test Engineer: John Caizzi Config Change: None
Test Location: Chamber # 5 Host Unit Voltage Powered From Host System (3.3 V DC)

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing. All remote support equipment was located approximately 30 meters from the EUT with all I/O connections running on top of the groundplane.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions: Temperature: 22 °C
Rel. Humidity: 43 %

Summary of Results

Measurements with the universe PIFA antenna indicated that the band edge emissions were higher when the device was operating in 802.11n 20MHz than in 802.11a mode, therefore only emissions in 802.11n mode were evaluated.

Run #	Mode	Channel	Power Setting	Measured Power	Test Performed	Limit	Result / Margin
1a	802.11n20 Chain A	5180MHz	GC = 26	AP = 15.2	Band Edge radiated field strength	FCC Part 15.209	46.7dB μ V/m (216.3 μ V/m) @ 5150.0MHz (-7.3dB)
1b	802.11n20 Chain A	5320MHz	GC = 23.5	AP = 16	Band Edge radiated field strength	FCC Part 15.209	45.2dB μ V/m (182.0 μ V/m) @ 5350.0MHz (-8.8dB)
1c	802.11n20 Chain A	5500MHz	GC = 27	AP = 19.5	Band Edge radiated field strength	FCC Part 15.209	46.6dB μ V/m (213.8 μ V/m) @ 5460.0MHz (-7.4dB)
					Radiated field strength, 5460-5470MHz	FCC Part 15E	51.7dB μ V/m (384.6 μ V/m) @ 5469.9MHz (-16.6dB)

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Client:	Intel	Job Number:	J72587
Model:	512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna	T-Log Number:	T72683
Contact:	Robert Paxman	Account Manager:	Briggs / Eriksen
Standard:	RSS 210 / FCC 15.407 UNII (Radiated)	Class:	N/A

Run #1: Radiated Spurious Emissions, Band Edges. Operating Mode: 802.11n 20MHz - Chain A

Run #1a: Low Channel @ 5180 MHz (band edge at 5150 MHz)


Power Setting: 26.0 Average power: AP = 15.8 (for reference purposes)

Fundamental Signal Field Strength: Peak and average values measured in 1 MHz, for reference only

Frequency	Level	Pol	FCC 15.209		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
5175.400	106.2	V	-	-	PK	343	1.2	
5176.400	98.5	V	-	-	AVG	343	1.2	
5182.200	102.2	H	-	-	PK	281	1.3	
5186.070	94.0	H	-	-	AVG	281	1.3	

Band Edge Signal Field Strength

Frequency	Level	Pol	FCC 15.209		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
5149.970	46.7	H	54.0	-7.3	AVG	355	1.3	
5148.870	60.3	H	74.0	-13.7	PK	355	1.3	

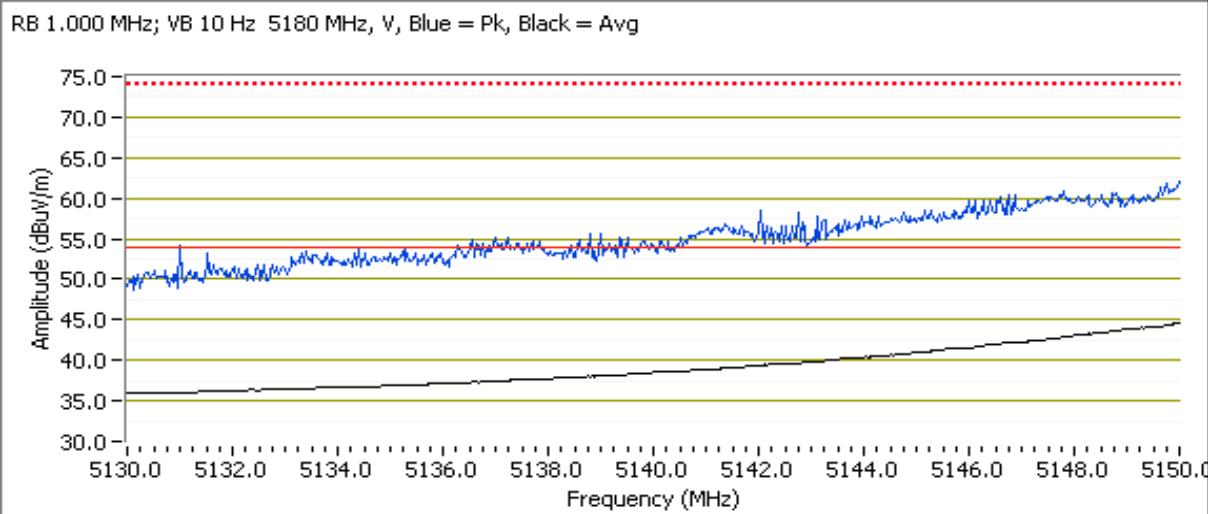

Client:	Intel	Job Number:	J72587
Model:	512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna	T-Log Number:	T72683
Contact:	Robert Paxman	Account Manager:	Briggs / Eriksen
Standard:	RSS 210 / FCC 15.407 UNII (Radiated)	Class:	N/A

Run #1b: High Channel @ 5320 MHz (band edge at 5350 MHz)

Power Setting: 23.5


Average power: AP = 16.1 (for reference purposes)

Fundamental Signal Field Strength: Peak and average values measured in 1 MHz, for reference only

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
5315.930	97.9	V	-	-	AVG	343	1.2	
5315.400	105.8	V	-	-	PK	343	1.2	
5326.400	92.3	H	-	-	AVG	288	1.5	
5315.530	100.1	H	-	-	PK	288	1.5	

Band Edge Signal Field Strength

Frequency	Level	Pol	FCC 15.209		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
5350.000	45.2	V	54.0	-8.8	AVG	356	1.2	
5350.430	60.7	V	74.0	-13.3	PK	356	1.2	

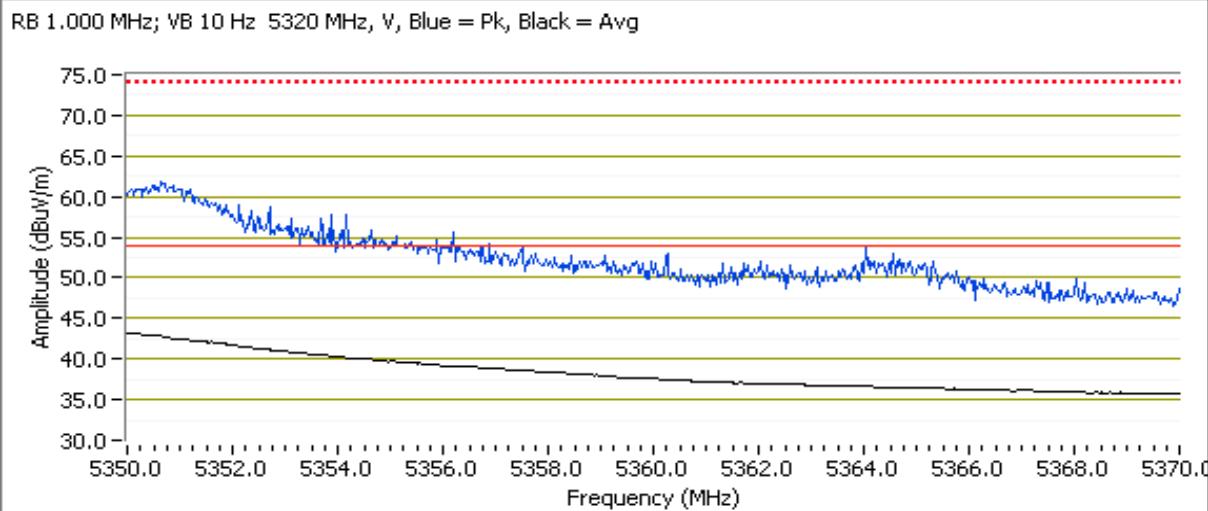

Client:	Intel	Job Number:	J72587
Model:	512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna	T-Log Number:	T72683
Contact:	Robert Paxman	Account Manager:	Briggs / Eriksen
Standard:	RSS 210 / FCC 15.407 UNII (Radiated)	Class:	N/A

Run #1c: Low Channel @ 5500 MHz (restricted band edge at 5460 MHz, allocated band edge at 5470MHz)


Power Setting: 27 Average power: AP = 19.5 (for reference purposes)

Fundamental Signal Field Strength: Peak and average values measured in 1 MHz, for reference only

Frequency	Level	Pol	FCC 15.209		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
5493.470	99.5	V	-	-	AVG	352	1.2	00 MHz; VB: 10 Hz
5494.200	107.5	V	-	-	PK	352	1.2	MHz; VB: 1.000 MHz
5506.800	95.4	H	-	-	AVG	275	1.1	00 MHz; VB: 10 Hz
5507.070	103.1	H	-	-	PK	275	1.1	MHz; VB: 1.000 MHz

Band Edge Signal Field Strength 5460 - 5470 MHz (limit is -27dBm erp, 68.3dB μ V/m average, 88.3dB μ V/m peak)


Frequency	Level	Pol	FCC Part 15 Subpart E	Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
5469.900	51.7	V	68.3	-16.6	AVG	352	1.2
5468.600	65.6	V	88.3	-22.7	PK	352	1.2

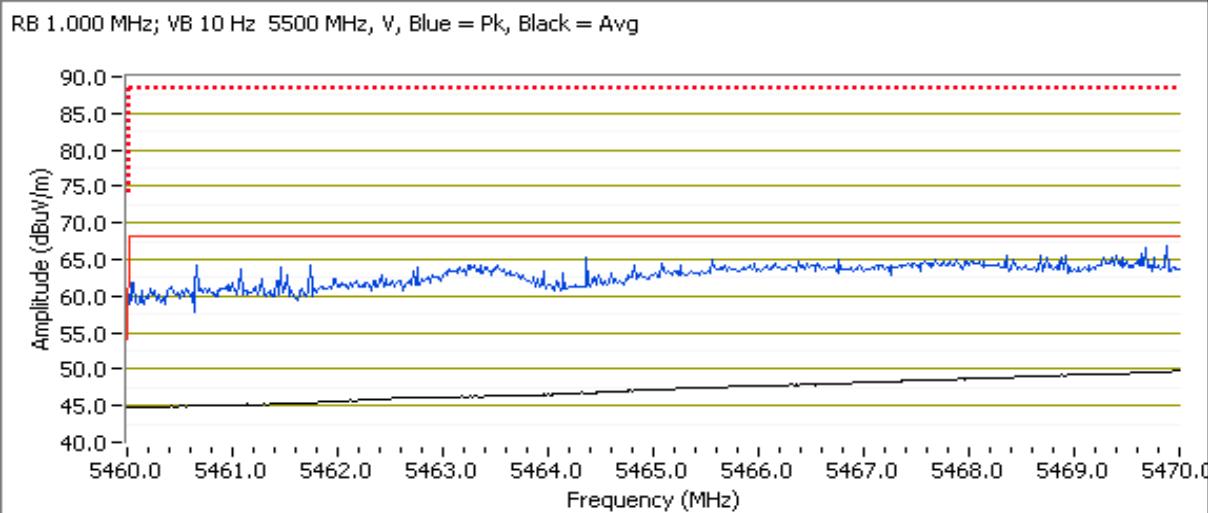

Client:	Intel	Job Number:	J72587
Model:	512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna	T-Log Number:	T72683
Contact:	Robert Paxman	Account Manager:	Briggs / Eriksen
Standard:	RSS 210 / FCC 15.407 UNII (Radiated)	Class:	N/A

Band Edge Signal Field Strength, at and below 5460MHz, limit is 54dB μ V/m average, 74dB μ V/m peak

Frequency	Level	Pol	FCC 15.209		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
5459.970	46.6	V	54.0	-7.4	AVG	352	1.2	
5458.870	61.7	V	74.0	-12.3	PK	352	1.2	

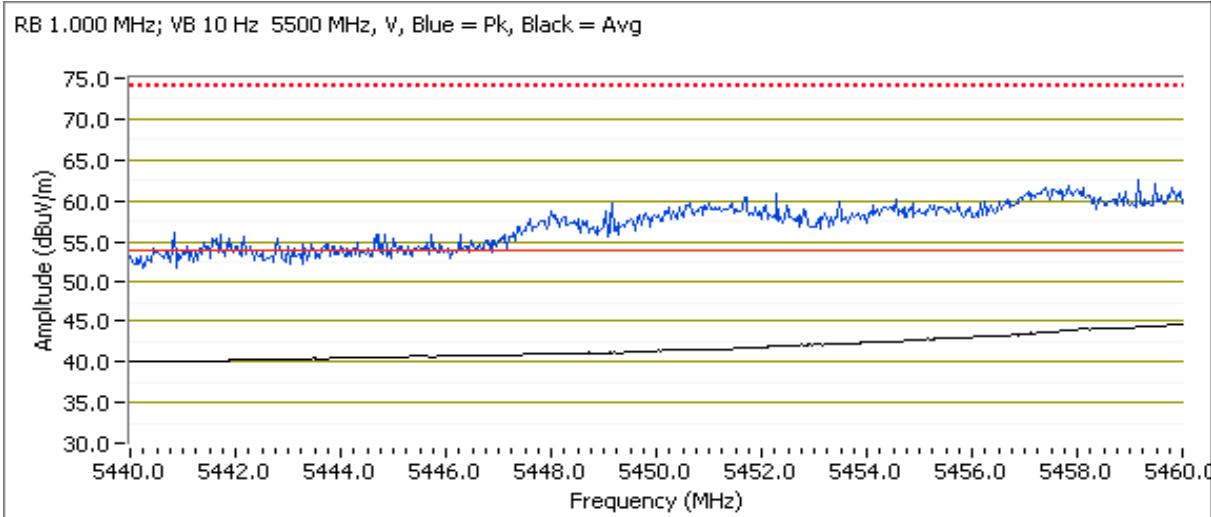



EMC Test Data

Client:	Intel	Job Number:	J72587
Model:	512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna	T-Log Number:	T72683
Contact:	Robert Paxman	Account Manager:	Briggs / Eriksen
Standard:	RSS 210 / FCC 15.407 UNII (Radiated)	Class:	N/A

RSS 210 and FCC 15.E (U-NII, 5150- 550/5250-5350/5460-5725MHz) Radiated Spurious Emissions - 802.11a Mode

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions: Temperature: 22 °C
Rel. Humidity: 43 %

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Summary of Results

Run #	Mode	Channel	Power Setting	Measured Power	Test Performed	Limit	Result / Margin
1a	802.11a Chain A	5180	GC = 27.0	AP = 16.5	Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.407	53.1dB μ V/m @ 10360.1MHz (-15.2dB)
1b	802.11a Chain A	5200	GC = 26.5	AP = 16.6	Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.407	52.4dB μ V/m @ 3000.3MHz (-15.9dB)
1c	802.11a Chain A	5240	GC = 26	AP = 16.8	Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.407	53.6dB μ V/m (478.6 μ V/m) @ 10479.8MHz (-14.7dB)
2a	802.11a Chain A	5260	GC = 26	AP = 16.8	Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.407	58.5dB μ V/m @ 10500.0MHz (-9.8dB)
2b	802.11a Chain A	5280	GC = 25.5	AP = 16.5	Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.407	58.2dB μ V/m @ 10560.0MHz (-10.1dB)
2c	802.11a Chain A	5320	GC = 25.0	AP = 16.6	Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.407	49.4dB μ V/m @ 10638.3MHz (-4.6dB)
3a	802.11a Chain A	5500	GC = 24.5	AP = 16.6	Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.407	802.11n20 mode tested as worst case for this band
3b	802.11a Chain A	5600	GC = 25	AP = 16.6	Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.407	
3c	802.11a Chain A	5700	GC = 26	AP = 16.5	Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.407	

Client:	Intel	Job Number:	J72587
Model:	512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna	T-Log Number:	T72683
Contact:	Robert Paxman	Account Manager:	Briggs / Eriksen
Standard:	RSS 210 / FCC 15.407 UNII (Radiated)	Class:	N/A

Run #1: Radiated Spurious Emissions, 1000 - 40000 MHz. Operating Mode: 802.11a Chain A

Date of Test: 8/12/2008


Test Engineer: Ben Jing

Test Location: FT Chamber #5

Run #1a: Low Channel @ 5180 MHz
Spurious Emissions

Frequency	Level	Pol	15.209 / 15.407	Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
10360.070	53.1	V	68.3	-15.2	AVG	205	1.1
2490.630	36.8	V	54.0	-17.2	AVG	242	1.0
2492.450	52.4	V	74.0	-21.6	PK	242	1.0
10362.100	65.1	V	88.3	-23.2	PK	205	1.1
1000.000	26.5	H	54.0	-27.5	AVG	84	1.7
6906.550	40.2	V	68.3	-28.1	AVG	79	1.9
1000.003	37.4	H	74.0	-36.6	PK	84	1.7
6906.620	48.8	V	88.3	-39.5	PK	79	1.9

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set to -27dBm eirp (68.3dB μ V/m average, 88.3dB μ V/m peak)

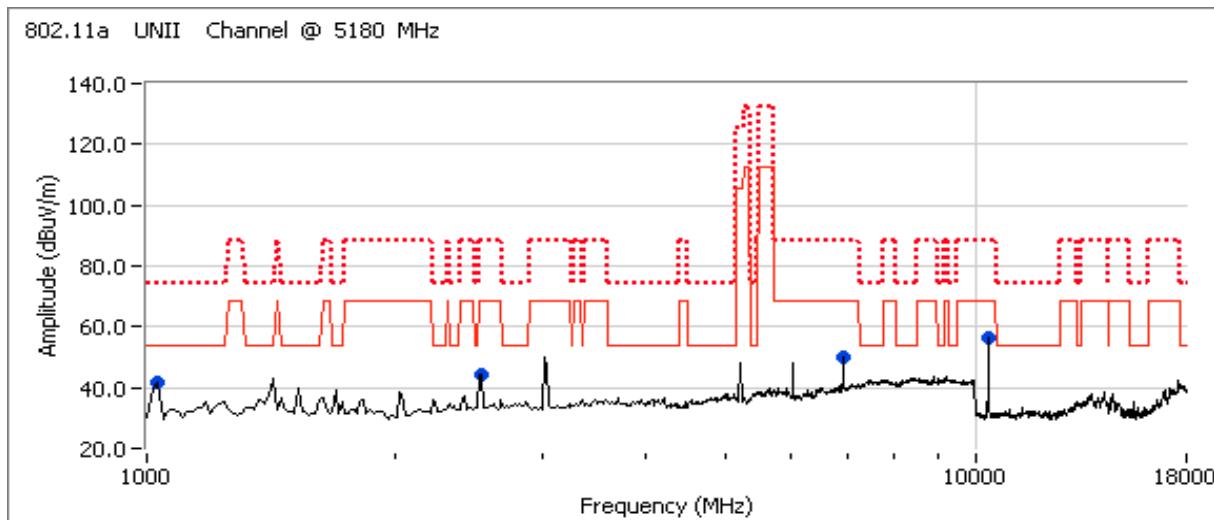


Client:	Intel	Job Number:	J72587
Model:	512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna	T-Log Number:	T72683
Contact:	Robert Paxman	Account Manager:	Briggs / Eriksen
Standard:	RSS 210 / FCC 15.407 UNII (Radiated)	Class:	N/A

Run #1b: Center Channel @ 5200 MHz

Spurious Emissions

Frequency	Level	Pol	15.209 / 15.407		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
3000.330	52.4	V	68.3	-15.9	AVG	167	1.0	
10398.140	51.9	V	68.3	-16.4	AVG	208	1.0	
6933.240	50.2	V	68.3	-18.1	AVG	56	1.0	
10397.720	63.1	V	88.3	-25.2	PK	208	1.0	
3000.340	55.8	V	88.3	-32.5	PK	167	1.0	
6933.250	53.4	V	88.3	-34.9	PK	56	1.0	

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set to -27dBm eirp (68.3dB μ V/m average, 88.3dB μ V/m peak)

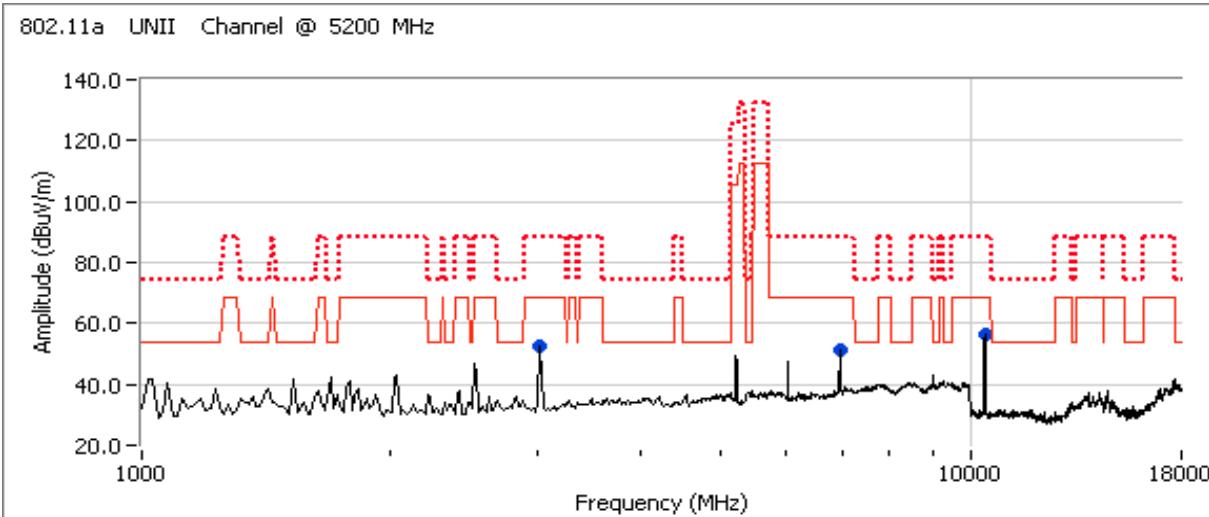

Client:	Intel	Job Number:	J72587
Model:	512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna	T-Log Number:	T72683
Contact:	Robert Paxman	Account Manager:	Briggs / Eriksen
Standard:	RSS 210 / FCC 15.407 UNII (Radiated)	Class:	N/A

Run #1c: High Channel @ 5240 MHz

Date of Test: 8/13/2008


MAC address: 0016EA01AF0

Test Engineer: John Caizzi

Test Location: FT Chamber #3

Spurious Emissions

Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15.407 Limit	Margin	Detector	Azimuth degrees	Height meters	Comments
10479.830	53.6	V	68.3	-14.7	AVG	314	1.1	
3020.000	50.6	V	68.3	-17.7	Peak	191	1.0	Pk readings vs avg limit.
10481.730	65.6	V	88.3	-22.7	PK	314	1.1	
2510.000	44.2	H	68.3	-24.1	Peak	118	1.9	Pk readings vs avg limit.
1047.733	23.3	V	54.0	-30.7	AVG	170	1.0	
1050.067	41.0	V	74.0	-33.0	PK	170	1.0	

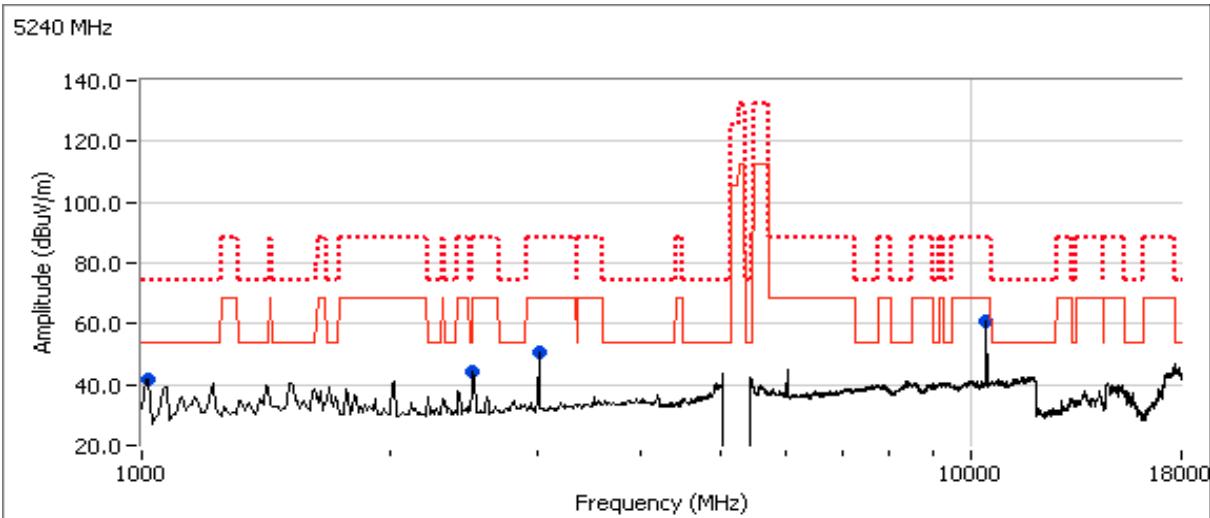 Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set to -27dBm eirp (68.3dB μ V/m average, 88.3dB μ V/m peak)


Client:	Intel	Job Number:	J72587
Model:	512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna	T-Log Number:	T72683
Contact:	Robert Paxman	Account Manager:	Briggs / Eriksen
Standard:	RSS 210 / FCC 15.407 UNII (Radiated)	Class:	N/A

Run #2: Radiated Spurious Emissions, 1000 - 40000 MHz. Operating Mode: 802.11a Chain A

Date of Test: 8/13/2008

MAC address: 0016EA01AF0


Test Engineer: John Caizzi

Test Location: FT Chamber #3

Run #2a: Low Channel @ 5260 MHz
Spurious Emissions

Frequency	Level	Pol	15.209 / 15.407	Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
10500.000	58.5	V	68.3	-9.8	Peak	310	1.0
10700.000	37.9	V	54.0	-16.1	Peak	186	1.0
7000.000	47.4	V	68.3	-20.9	Peak	46	1.0
3020.000	41.3	V	68.3	-27.0	Peak	150	1.0
2520.000	38.6	H	68.3	-29.7	Peak	133	1.0

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set to -27dBm eirp (68.3dB μ V/m average, 88.3dB μ V/m peak)

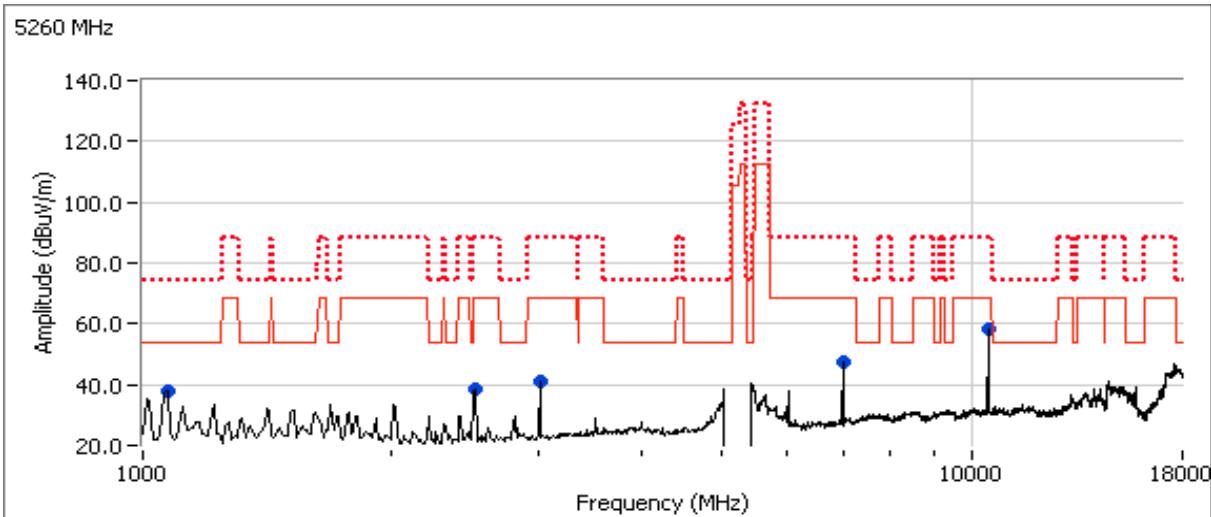

Client:	Intel	Job Number:	J72587
Model:	512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna	T-Log Number:	T72683
Contact:	Robert Paxman	Account Manager:	Briggs / Eriksen
Standard:	RSS 210 / FCC 15.407 UNII (Radiated)	Class:	N/A

Date of Test: 8/14/2008

MAC address: 0016EA01AF0

Test Engineer: Ben Jing


Test Location: FT Chamber # 5

Run #2b: Center Channel @ 5280 MHz

Spurious Emissions

Frequency	Level	Pol	15.209 / 15.407	Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
10559.990	58.2	V	68.3	-10.1	AVG	229	1.1
3000.340	51.0	V	68.3	-17.3	AVG	259	1.3
10561.810	70.1	V	88.3	-18.2	PK	229	1.1
7039.920	46.0	V	68.3	-22.3	AVG	254	1.3
6000.720	44.0	V	68.3	-24.3	AVG	257	1.0
3000.330	54.3	V	88.3	-34.0	PK	259	1.3
7039.930	50.7	V	88.3	-37.6	PK	254	1.3
6000.650	49.0	V	88.3	-39.3	PK	257	1.0

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set to -27dBm eirp (68.3dB μ V/m average, 88.3dB μ V/m peak)

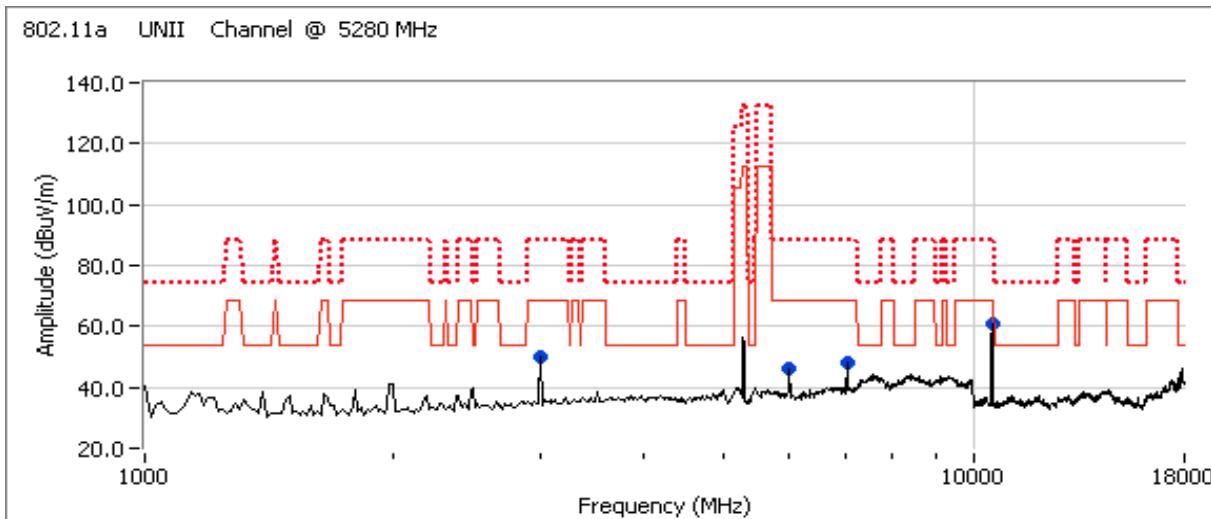


Client:	Intel	Job Number:	J72587
Model:	512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna	T-Log Number:	T72683
Contact:	Robert Paxman	Account Manager:	Briggs / Eriksen
Standard:	RSS 210 / FCC 15.407 UNII (Radiated)	Class:	N/A

Run #2c: High Channel @ 5320 MHz
Spurious Emissions

Frequency	Level	Pol	15.209 / 15.407	Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
10638.300	49.4	V	54.0	-4.6	AVG	235	1.3
10637.480	60.3	V	74.0	-13.7	PK	235	1.3
7105.000	51.9	V	68.3	-16.4	Peak	218	1.6
3010.000	50.2	V	68.3	-18.1	Peak	268	1.3
15963.080	35.5	V	54.0	-18.5	AVG	118	1.2
15964.600	48.3	V	74.0	-25.7	PK	118	1.2

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set to -27dBm eirp (68.3dB μ V/m average, 88.3dB μ V/m peak)

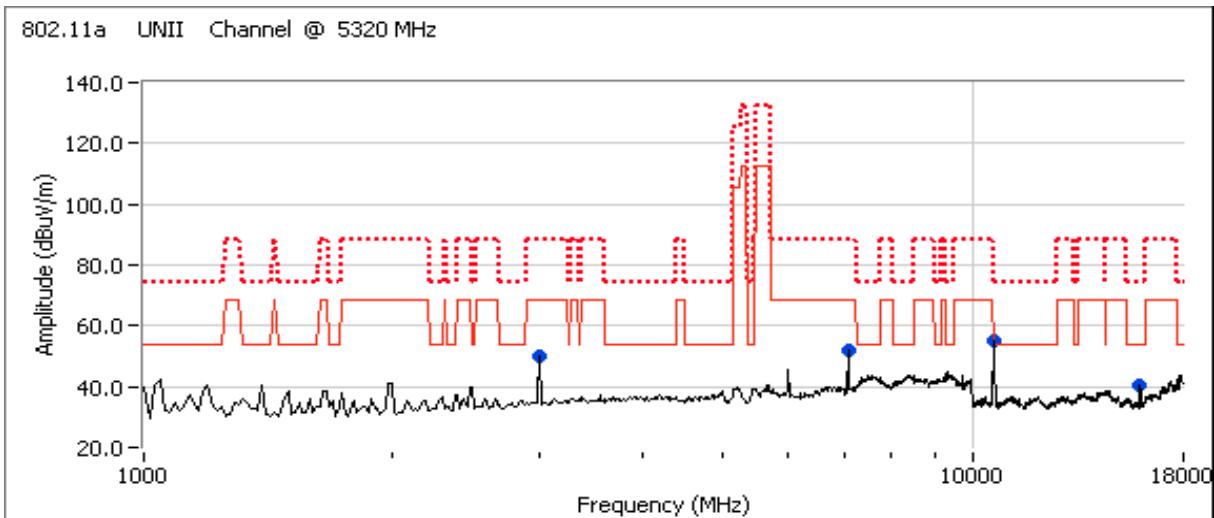



Client:	Intel	Job Number:	J72587
Model:	512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna	T-Log Number:	T72683
Contact:	Robert Paxman	Account Manager:	Briggs / Eriksen
Standard:	RSS 210 / FCC 15.407 UNII (Radiated)	Class:	N/A

**RSS 210 and FCC 15.E (U-NII, 5150- 550/5250-5350/5460-5725MHz)
Radiated Spurious Emissions - Band Edge 802.11n 40MHz Mode****Test Specific Details**

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Config. Used: 1
Config Change: None
Host Unit Voltage Powered From Host System (3.3 V DC)

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing. All remote support equipment was located approximately 30 meters from the EUT with all I/O connections running on top of the groundplane.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions: Temperature: 24 °C
Rel. Humidity: 43 %

Summary of Results

Run #	Mode	Channel	Power Setting	Measured Power	Test Performed	Limit	Result / Margin
1a	802.11n40 Chain A	5190MHz	GC = 21	AP = 10.9	Band Edge radiated field strength	FCC Part 15.209	49.4dB μ V/m @ 5350.0MHz (-4.6dB)
1b	802.11n40 Chain A	5310MHz	GC = 19.0	AP = 11.7	Band Edge radiated field strength	FCC Part 15.209	49.4dB μ V/m @ 5350.0MHz (-4.6dB)
1c	802.11n40 Chain A	5510MHz	GC = 23.5	AP = 16.5	Band Edge radiated field strength, 5460MHz	FCC Part 15.209	50.3dB μ V/m @ 5459.9MHz (-3.7dB)
					Radiated field strength, 5460-5470MHz	FCC Part 15E	52.2dB μ V/m @ 5470.0MHz (-16.1dB)

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Client:	Intel	Job Number:	J72587
Model:	512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna	T-Log Number:	T72683
Contact:	Robert Paxman	Account Manager:	Briggs / Eriksen
Standard:	RSS 210 / FCC 15.407 UNII (Radiated)	Class:	N/A

Run #1: Radiated Spurious Emissions, Band Edges. Operating Mode: 802.11n 40MHz - Chain A

Run #1a: Low Channel @ 5190 MHz (band edge at 5150 MHz)

Date of Test: 8/12/2008

Test Engineer: John Caizzi

Test Location: FT Chamber #5

Power Setting: 21


Average power: 10.9 dBm (for reference purposes)

Fundamental Signal Field Strength: Peak and average values measured in 1 MHz, for reference only

Frequency	Level	Pol	FCC 15.209		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
5204.800	89.0	V	-	-	AVG	342	1.1	
5204.800	97.4	V	-	-	PK	342	1.1	
5199.800	90.6	H	-	-	PK	284	1.0	
5201.200	82.4	H	-	-	AVG	284	1.0	

Band Edge Signal Field Strength

Frequency	Level	Pol	FCC 15.209		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
5149.970	46.5	V	54.0	-7.5	AVG	348	1.1	
5149.830	59.7	V	74.0	-14.3	PK	348	1.1	

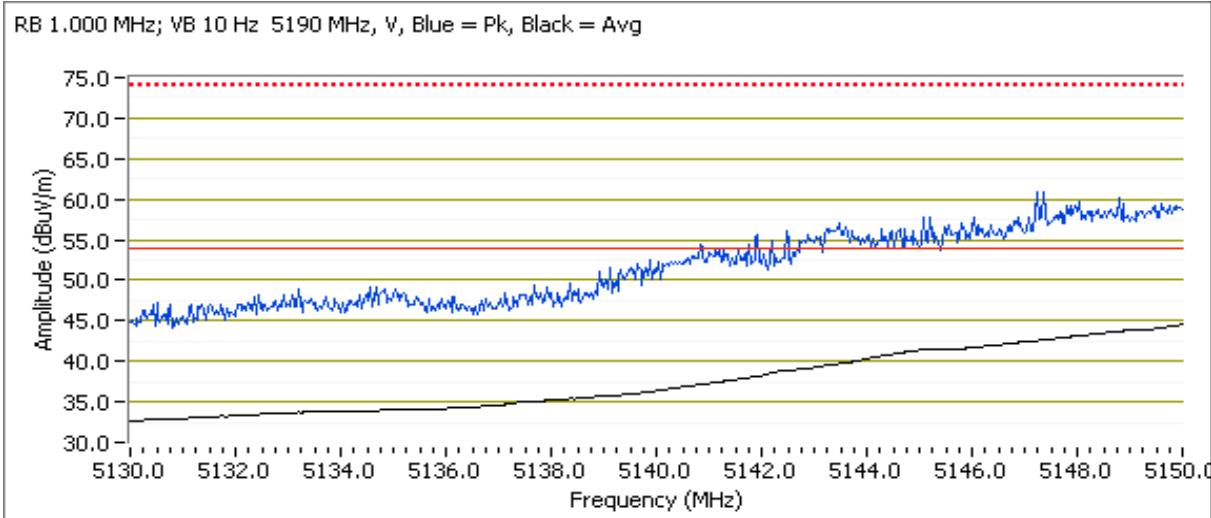

Client:	Intel	Job Number:	J72587
Model:	512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna	T-Log Number:	T72683
Contact:	Robert Paxman	Account Manager:	Briggs / Eriksen
Standard:	RSS 210 / FCC 15.407 UNII (Radiated)	Class:	N/A

Run #1b: High Channel @ 5310 MHz (band edge at 5350 MHz)


Power Setting: 19.0 Average power: 11.7 dBm (for reference purposes)

Fundamental Signal Field Strength: Peak and average values measured in 1 MHz, for reference only

Frequency	Level	Pol	FCC 15.209		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
5321.100	85.3	H	-	-	AVG	349	1.2	
5323.100	93.1	H	-	-	PK	349	1.2	
5320.900	90.5	V	-	-	AVG	0	1.1	
5319.300	99.0	V	-	-	PK	0	1.1	

Band Edge Signal Field Strength

Frequency	Level	Pol	FCC 15.209		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
5350.000	49.4	V	54.0	-4.6	AVG	0	1.1	
5352.030	63.6	V	74.0	-10.4	PK	0	1.1	

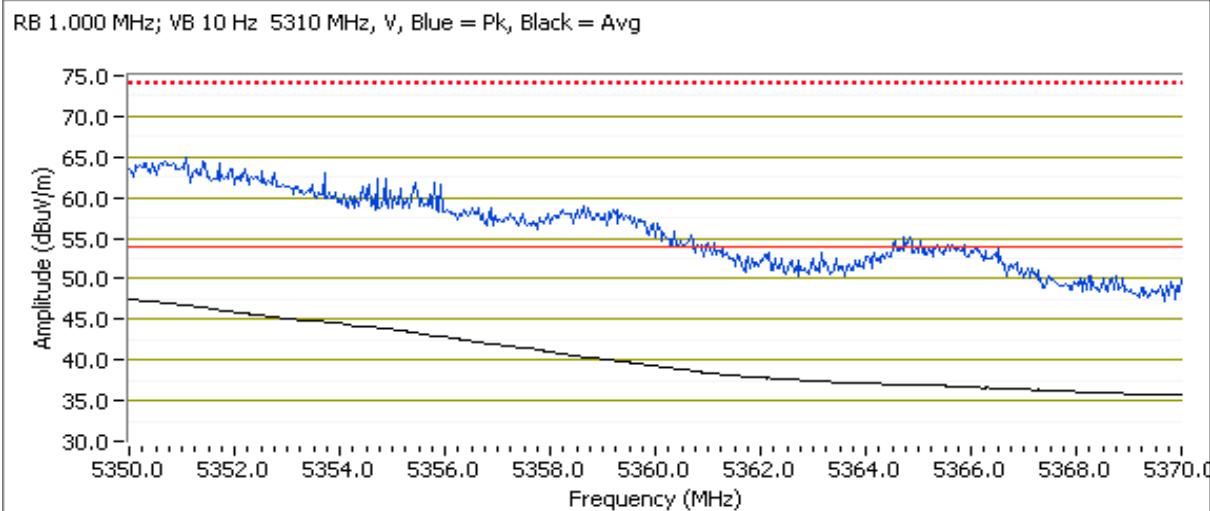



EMC Test Data

Client:	Intel	Job Number:	J72587
Model:	512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna	T-Log Number:	T72683
		Account Manager:	Briggs / Eriksen
Contact:	Robert Paxman		
Standard:	RSS 210 / FCC 15.407 UNII (Radiated)		Class: N/A

Date of Test: 8/12/2008
Test Engineer: Ben Jing
Test Location: FT Chamber #5

Run #1c: Low Channel @ 5510 MHz (restricted band edge at 5460 MHz, allocated band edge at 5470MHz)


Power Setting: 23.5 Average power: 16.5 dBm (for reference purposes)

Fundamental Signal Field Strength: Peak and average values measured in 1 MHz, for reference only

Fundamental Signal Field Strength: Peak and average values measured in dB μ V/m (Reference unit)								
Frequency	Level	Pol	FCC 15.209		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
5511.500	91.7	V	-	-	AVG	342	1.3	
5511.480	99.8	V	-	-	PK	342	1.3	
5508.500	86.7	H	-	-	AVG	59	1.0	
5511.460	94.7	H	-	-	PK	59	1.0	

Band Edge Signal Field Strength 5460 - 5470 MHz (limit is -27dBm erp, 68.3dBuV/m average, 88.3dBuV/m peak)


Frequency	Level	Pol	15 E		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
5469.960	52.2	V	68.3	-16.1	AVG	360	1.4	
5469.570	72.2	V	88.3	-16.1	PK	344	1.3	

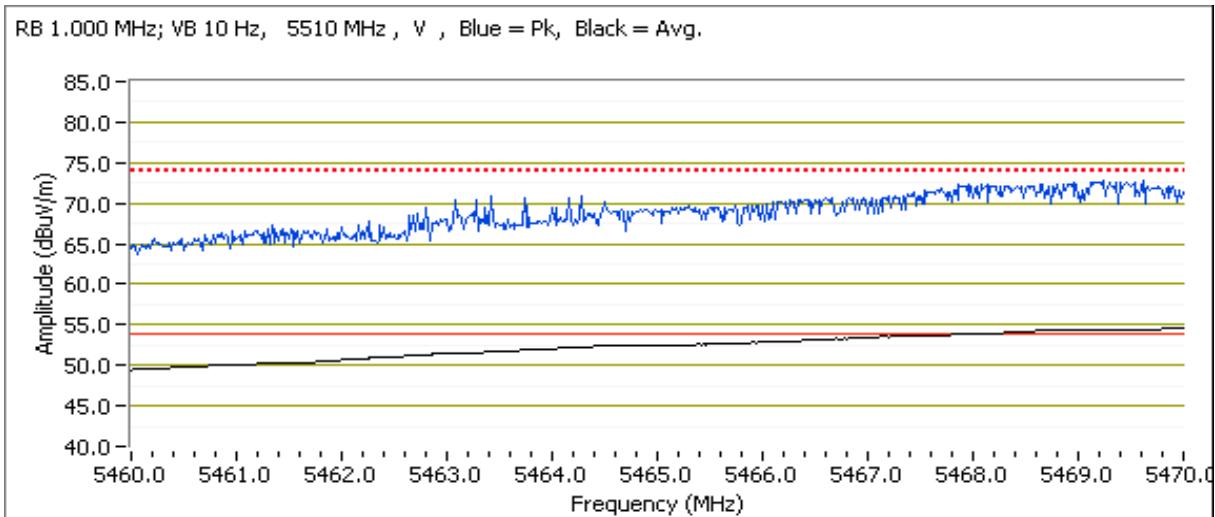

Client:	Intel	Job Number:	J72587
Model:	512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna	T-Log Number:	T72683
Contact:	Robert Paxman	Account Manager:	Briggs / Eriksen
Standard:	RSS 210 / FCC 15.407 UNII (Radiated)	Class:	N/A

Band Edge Signal Field Strength, at and below 5460MHz, limit is 54dBuV/m average, 74dBuV/m peak

Frequency	Level	Pol	FCC 15.209		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
5459.930	50.3	V	54.0	-3.7	AVG	338	1.2	
5459.700	64.9	V	74.0	-9.1	PK	340	1.3	

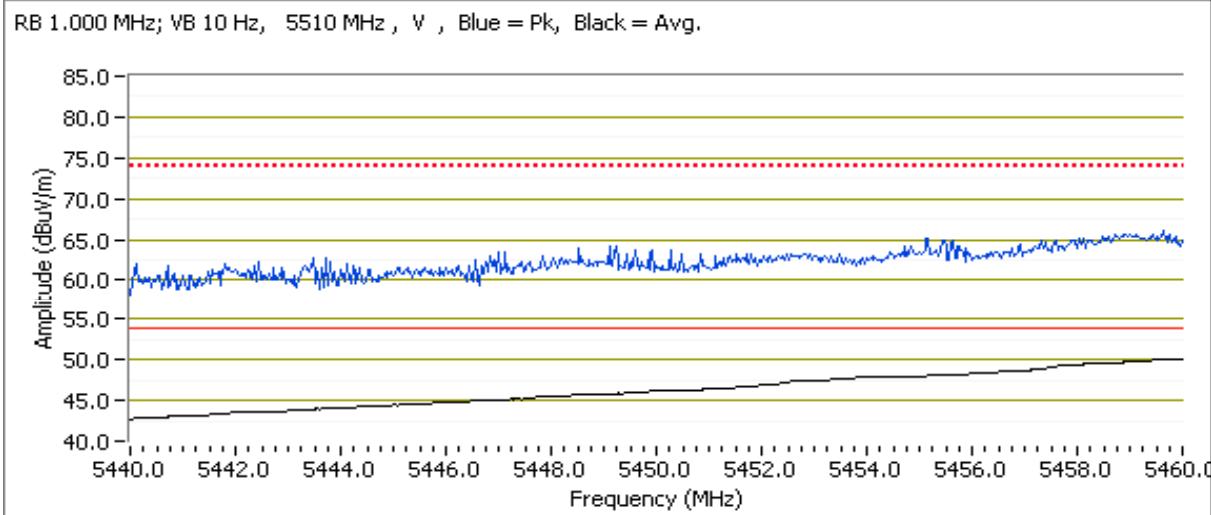



EMC Test Data

Client:	Intel	Job Number:	J72587
Model:	512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna	T-Log Number:	T72683
Contact:	Robert Paxman	Account Manager:	Briggs / Eriksen
Standard:	RSS 210 / FCC 15.407 UNII (Radiated)	Class:	N/A

RSS 210 and FCC 15.E (U-NII, 5150- 5250/5250-5350/5460-5725MHz) Radiated Spurious Emissions 802.11n 20MHz Mode

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing. All remote support equipment was located approximately 30 meters from the EUT with all I/O connections running on top of the groundplane.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions: Temperature: 23 °C
Rel. Humidity: 34 %

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Summary of Results

Run #	Mode	Channel	Power Setting	Measured Power	Test Performed	Limit	Result / Margin
1a	802.11n20 Chain A	5180	27.0	16.5	Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.407	802.11a mode is worst case in this sub-band
1b		5200	26.5	16.5			
1c		5240	25.5	16.5			
2a		5260	25.5	16.7			802.11a and 802.11n 40MHz modes were worst case in this sub- band
2b		5280	24.5	16.5			
2c		5320	24.0	16.5			
3a	802.11n20 Chain A	5500	24.0	16.6	Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.407	50.7dB μ V/m @ 11000.2MHz (-3.3dB)
3b	802.11n20 Chain A	5600	24.5	16.5	Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.407	51.1dB μ V/m @ 11200.3MHz (-2.9dB)
3c	802.11n20 Chain A	5700	26.0	16.6	Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.407	52.1dB μ V/m @ 11400.1MHz (-1.9dB)

Client:	Intel	Job Number:	J72587
Model:	512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna	T-Log Number:	T72683
Contact:	Robert Paxman	Account Manager:	Briggs / Eriksen
Standard:	RSS 210 / FCC 15.407 UNII (Radiated)	Class:	N/A

Run #1: Radiated Spurious Emissions, 1000 - 40000 MHz. Operating Mode: 802.11n 20MHz Chain A

For operation in the 5150-5250 MHz band 802.11a mode has the highest emissions based on testing with the ethertronics antenna.

Run #2: Radiated Spurious Emissions, 1000 - 40000 MHz. Operating Mode: 802.11n20 Chain A

In the 5250-5350 MHz band 802.11a and 802.11n modes had the highest emissions based on testing with the ethertronics antenna.


Run #3: Radiated Spurious Emissions, 1000 - 40000 MHz. Operating Mode: 802.11n20 Chain A

Date of Test: 8/25/2008

Test Engineer: Joseph Cadigal

Test Location: FT Chamber # 4

MAC address : 0016EA01A1F0

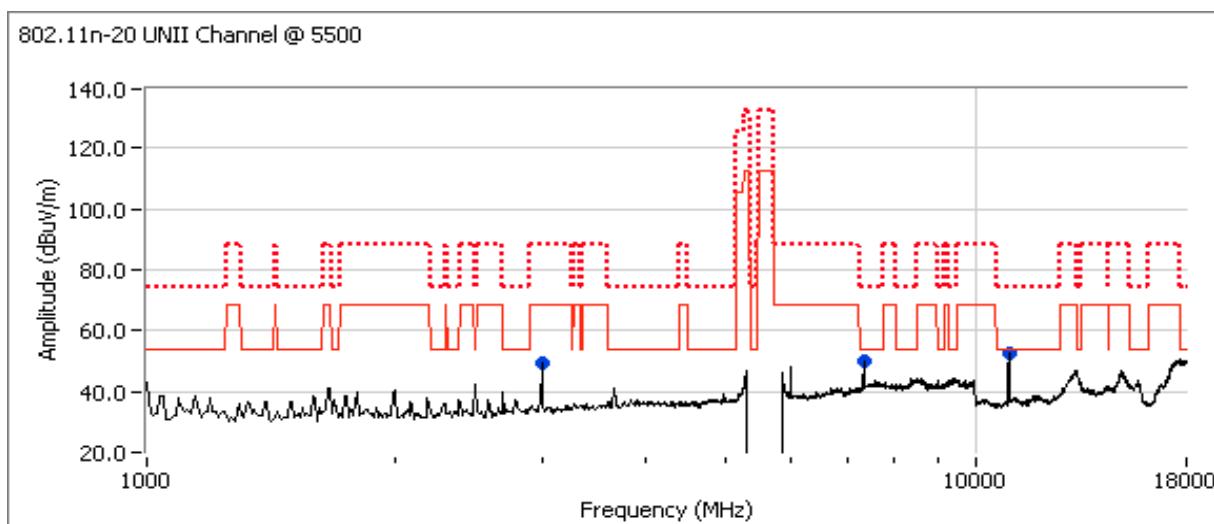Run #3aa: Low Channel @ 5500 MHz
Spurious Emissions


Frequency	Level	Pol	15.209 / 15.407	Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
11000.180	50.7	V	54.0	-3.3	AVG	311	1.7
7333.270	50.1	V	54.0	-3.9	AVG	58	1.7
11002.840	63.6	V	74.0	-10.4	PK	311	1.7
3000.400	49.9	V	68.3	-18.4	AVG	314	1.9
7333.280	54.2	V	74.0	-19.8	PK	58	1.7
3000.310	53.7	V	88.3	-34.6	PK	314	1.9


Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set to -27dBm eirp

Client:	Intel	Job Number:	J72587
Model:	512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna	T-Log Number:	T72683
Contact:	Robert Paxman	Account Manager:	Briggs / Eriksen
Standard:	RSS 210 / FCC 15.407 UNII (Radiated)	Class:	N/A

Run #3b: Center Channel @ 5600 MHz
Spurious Emissions

Frequency	Level	Pol	15.209 / 15.407	Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
11200.280	51.1	V	54.0	-2.9	AVG	121	1.0
7466.520	43.6	V	54.0	-10.4	AVG	121	1.3
11198.030	62.5	V	74.0	-11.5	PK	121	1.0
3025.000	50.6	V	68.3	-17.7	Peak	260	1.3
6025.000	46.4	V	68.3	-21.9	Peak	265	1.0
7466.580	50.3	V	74.0	-23.7	PK	121	1.3

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set to -27dBm eirp

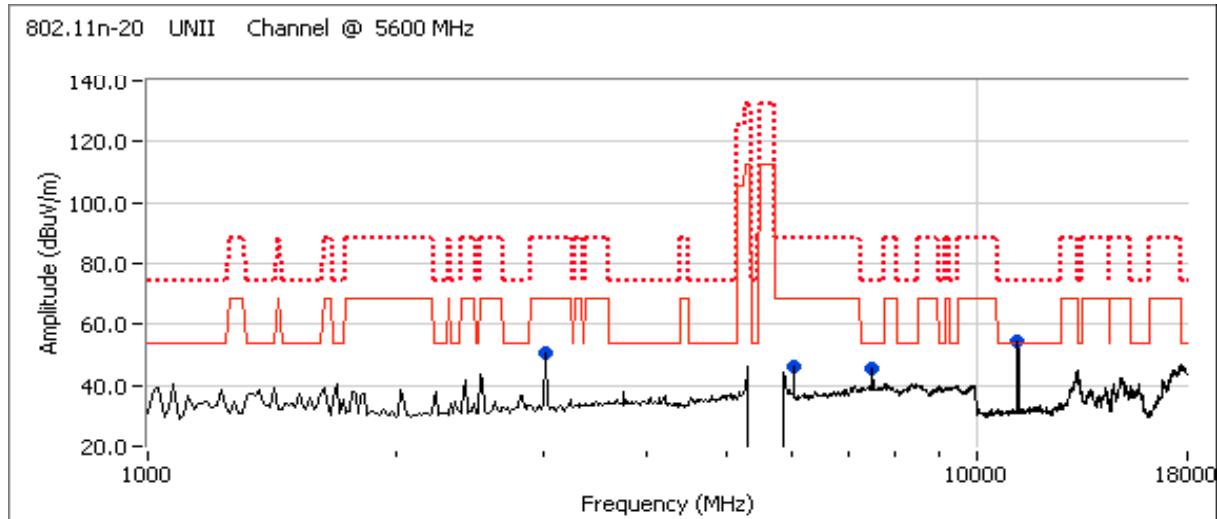


Client:	Intel	Job Number:	J72587
Model:	512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna	T-Log Number:	T72683
Contact:	Robert Paxman	Account Manager:	Briggs / Eriksen
Standard:	RSS 210 / FCC 15.407 UNII (Radiated)	Class:	N/A

Run #3c: High Channel @ 5700 MHz
Spurious Emissions

Frequency	Level	Pol	15.209 / 15.407	Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
11400.140	52.1	V	54.0	-1.9	AVG	119	1.0
11401.120	64.6	V	74.0	-9.4	PK	119	1.0
3025.000	52.9	V	68.3	-15.4	Peak	259	1.3
6025.000	45.4	V	68.3	-22.9	Peak	259	1.3

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set to -27dBm eirp

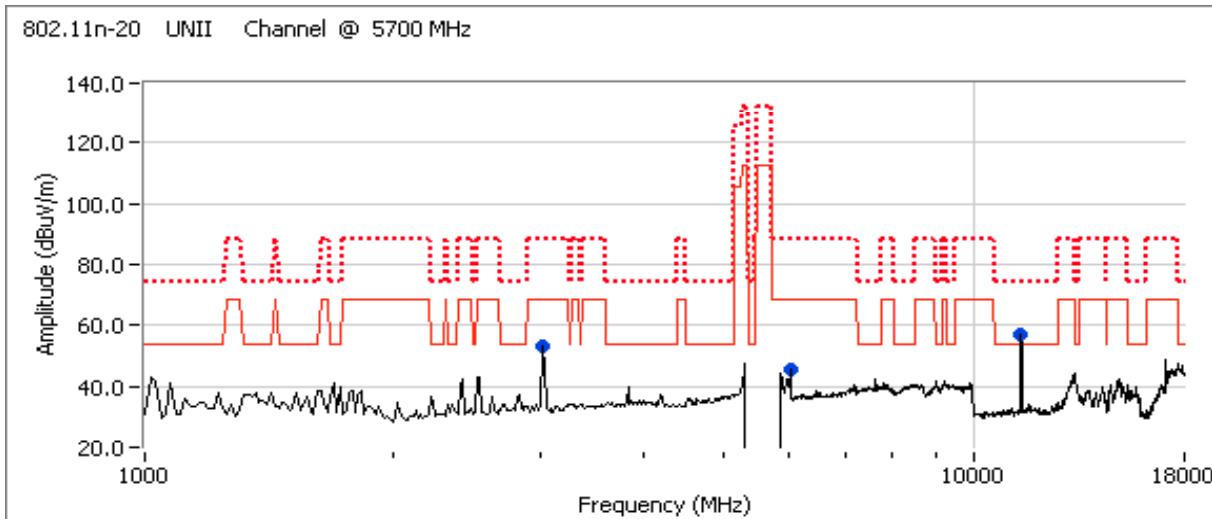



EMC Test Data

Client:	Intel	Job Number:	J72587
Model:	512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna	T-Log Number:	T72683
Contact:	Robert Paxman	Account Manager:	Briggs / Eriksen
Standard:	RSS 210 / FCC 15.407 UNII (Radiated)	Class:	N/A

RSS 210 and FCC 15.E (U-NII, 5150- 550/5250-5350/5460-5725MHz) Radiated Spurious Emissions 802.11n 40MHz Mode

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 8/14/2008 Config. Used: 1
Test Engineer: Ben Jing Config Change: None
Test Location: FT Chamber # 5 Host Unit Voltage 120V/60Hz
MAC address: 0016EA01AF0

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing. All remote support equipment was located approximately 30 meters from the EUT with all I/O connections running on top of the groundplane.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions: Temperature: 15-25 °C
Rel. Humidity: 30-50 %

Run #	Mode	Channel	Power Setting	Measured Power	Test Performed	Limit	Result / Margin
1a	802.11n40 Chain A	5190	26.5	16.5	Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.407	802.11a mode is worst case in this sub-band
1b	802.11n40 Chain A	5230	26.0	16.6	Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.407	
2a	802.11n40 Chain A	5270	25.0	16.7	Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.407	51.1dB μ V/m @ 10539.8MHz (-17.2dB)
2b	802.11n40 Chain A	5310	24.5	16.5	Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.407	51.1dB μ V/m @ 10615.2MHz (-2.9dB)
3a	802.11n40 Chain A	5510	24.5	16.6	Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.407	802.11n20 mode tested as worst case for this band
3b	802.11n40 Chain A	5590	23.0	16.9	Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.407	
3c	802.11n40 Chain A	5670	26.5	16.9	Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.407	

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Client:	Intel	Job Number:	J72587
Model:	512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna	T-Log Number:	T72683
Contact:	Robert Paxman	Account Manager:	Briggs / Eriksen
Standard:	RSS 210 / FCC 15.407 UNII (Radiated)	Class:	N/A

Run #1: Radiated Spurious Emissions, 1000 - 40000 MHz. Operating Mode: 802.11n 40MHz Chain A
 For operation in the 5150-5250 MHz band 802.11a mode has the highest emissions.


Run #2: Radiated Spurious Emissions, 1000 - 40000 MHz. Operating Mode: 802.11n40 Chain A

Run #2a: Low Channel @ 5270 MHz

Spurious Emissions

Frequency	Level	Pol	15.209 / 15.407	Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
10539.820	51.1	V	68.3	-17.2	AVG	259	1.0
3010.000	51.1	V	68.3	-17.2	Peak	265	1.3
5995.000	44.8	V	68.3	-23.5	Peak	266	1.0
10539.870	63.3	V	88.3	-25.0	PK	259	1.0

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set to -27dBm eirp (68.3dB μ V/m average, 88.3dB μ V/m peak)

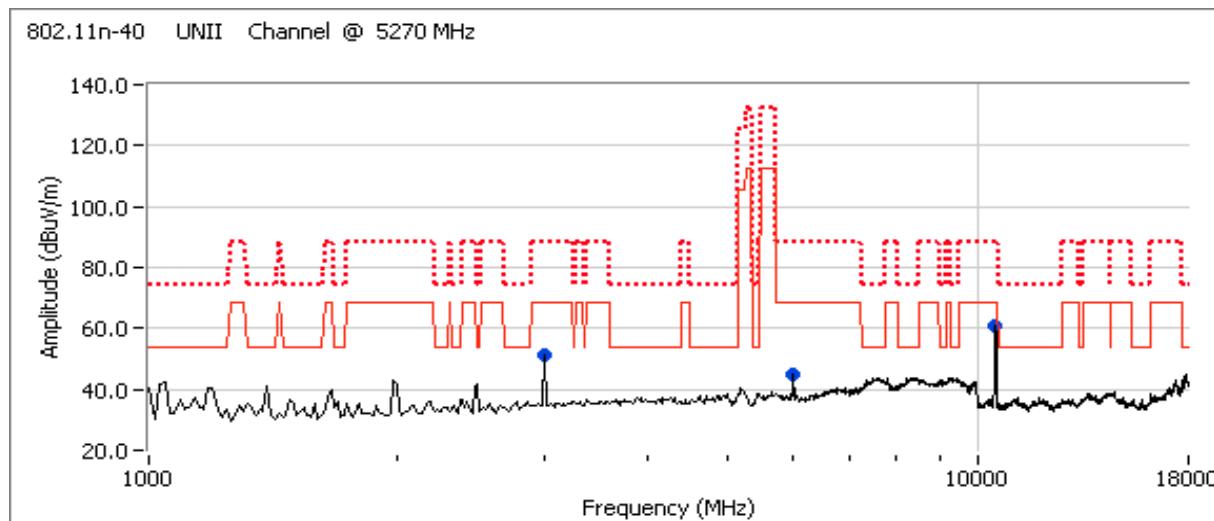


Client:	Intel	Job Number:	J72587
Model:	512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna	T-Log Number:	T72683
Contact:	Robert Paxman	Account Manager:	Briggs / Eriksen
Standard:	RSS 210 / FCC 15.407 UNII (Radiated)	Class:	N/A

Run #2b: High Channel @ 5310 MHz
Spurious Emissions

Frequency	Level	Pol	15.209 / 15.407	Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
10615.200	51.1	V	54.0	-2.9	AVG	241	1.0
10616.520	62.6	V	74.0	-11.4	PK	241	1.0
3010.000	51.7	V	68.3	-16.6	Peak	262	1.3
7090.000	50.6	V	68.3	-17.7	Peak	170	1.0

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set to -27dBm eirp (68.3dB μ V/m average, 88.3dB μ V/m peak)

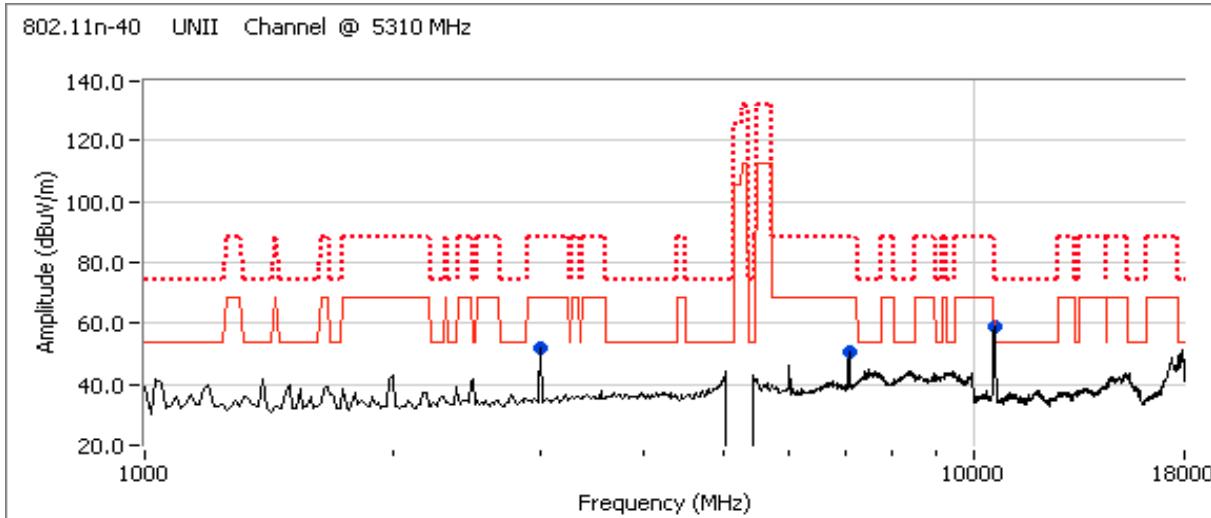



EMC Test Data

Client:	Intel	Job Number:	J72587
Model:	512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna	T-Log Number:	T72683
Contact:	Robert Paxman	Account Manager:	Briggs / Eriksen
Standard:	RSS 210 / FCC 15.407 UNII (Radiated)	Class:	NII

Receiver Radiated Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Config. Used: 1
Config Change: None
Host Unit Voltage 120V/60Hz

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated emissions testing. Remote support equipment was located approximately 30 meters from the test area with all I/O connections running on top of the groundplane.

The test distance and extrapolation factor (if applicable) are detailed under each run description.

Note, **preliminary** testing indicates that the emissions were maximized by orientation of the EUT and elevation of the measurement antenna. **Maximized** testing indicated that the emissions were maximized by orientation of the EUT, elevation of the measurement antenna, and manipulation of the EUT's interface cables.

Ambient Conditions: Temperature: 22 °C
Rel. Humidity: 41 %

Summary of Results

Run #	Test Performed	Limit	Result	Margin
1a - Single Receiver chain - Chain A	RE, 1000 - 18000 MHz, Maximized Emissions	RSS GEN	Pass	52.7dB μ V/m @ 3000.3MHz (-1.3dB)
1b- Single Receiver chain - Chain B	RE, 1000 - 18000 MHz, Maximized Emissions	RSS GEN	Pass	53.1dB μ V/m @ 3000.3MHz (-0.9dB)
2 - All Receiver chains	RE, 1000 - 18000 MHz, Maximized Emissions	RSS GEN	Pass	52.6dB μ V/m @ 3000.3MHz (-1.4dB)

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Client: Intel	Job Number: J72587
Model: 512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna	T-Log Number: T72683
	Account Manager: Briggs / Eriksen
Contact: Robert Paxman	
Standard: RSS 210 / FCC 15.407 UNII (Radiated)	Class: NII

Date of Test: 8/15/2008

Test Engineer: Ben Jing

Test Location: FT Chamber # 4

MAC address : 0016EA01AF0


Run # 1: Maximized readings, 1000 - 18000 MHz, Single Receiver Active

Frequency Range	Test Distance	Limit Distance	Extrapolation Factor
1000 - 10000 MHz	3	3	0.0
10000 - 18000 MHz	1	3	-9.5

Receiver Tuned to 5200 MHz - Chain A

Frequency	Level	Pol	RSS GEN		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
3000.320	50.5	V	54.0	-3.5	AVG	180	1.0	RB 1.000 MHz; VB: 10 Hz
6000.690	46.5	V	54.0	-7.5	AVG	140	1.0	RB 1.000 MHz; VB: 10 Hz
10399.890	37.0	V	54.0	-17.0	AVG	120	1.2	RB 1.000 MHz; VB: 10 Hz
3000.300	54.8	V	74.0	-19.2	PK	180	1.0	RB 1.000 MHz; VB: 1.000 MHz
6000.690	51.4	V	74.0	-22.6	PK	140	1.0	RB 1.000 MHz; VB: 1.000 MHz
10399.960	43.2	V	74.0	-30.8	PK	120	1.2	RB 1.000 MHz; VB: 1.000 MHz

Note 1: Above 1 GHz, the limit is for an average measurement. In addition, the peak value of any emission above 1 GHz, can not exceed the average limit by more than 20 dB.

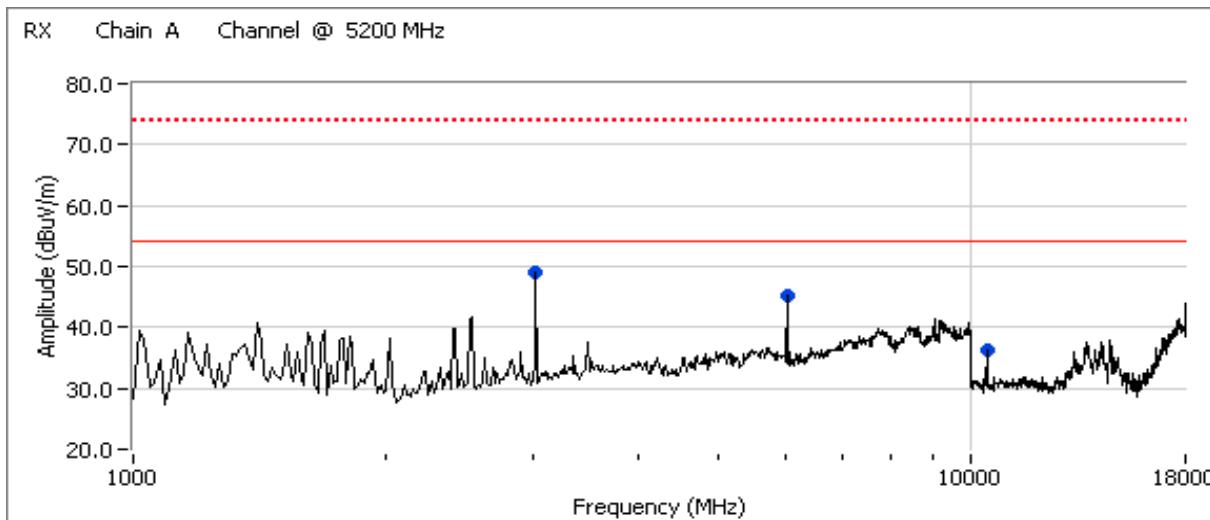


Client:	Intel	Job Number:	J72587
Model:	512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna	T-Log Number:	T72683
Contact:	Robert Paxman	Account Manager:	Briggs / Eriksen
Standard:	RSS 210 / FCC 15.407 UNII (Radiated)	Class:	NII

Receiver Tuned to 5280 MHz - Chain A

Frequency	Level	Pol	RSS GEN		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
3000.320	51.4	V	54.0	-2.6	AVG	261	1.3	RB 1.000 MHz; VB: 10 Hz
6000.690	46.2	V	54.0	-7.8	AVG	263	1.6	RB 1.000 MHz; VB: 10 Hz
10586.670	36.7	V	54.0	-17.3	Peak	104	1.0	Pk readings vs avg limit.
3000.340	54.9	V	74.0	-19.1	PK	261	1.3	RB 1.000 MHz; VB: 1.000 MHz
6000.680	51.3	V	74.0	-22.7	PK	263	1.6	RB 1.000 MHz; VB: 1.000 MHz

Note 1: Above 1 GHz, the limit is for an average measurement. In addition, the peak value of any emission above 1 GHz, can not exceed the average limit by more than 20 dB.

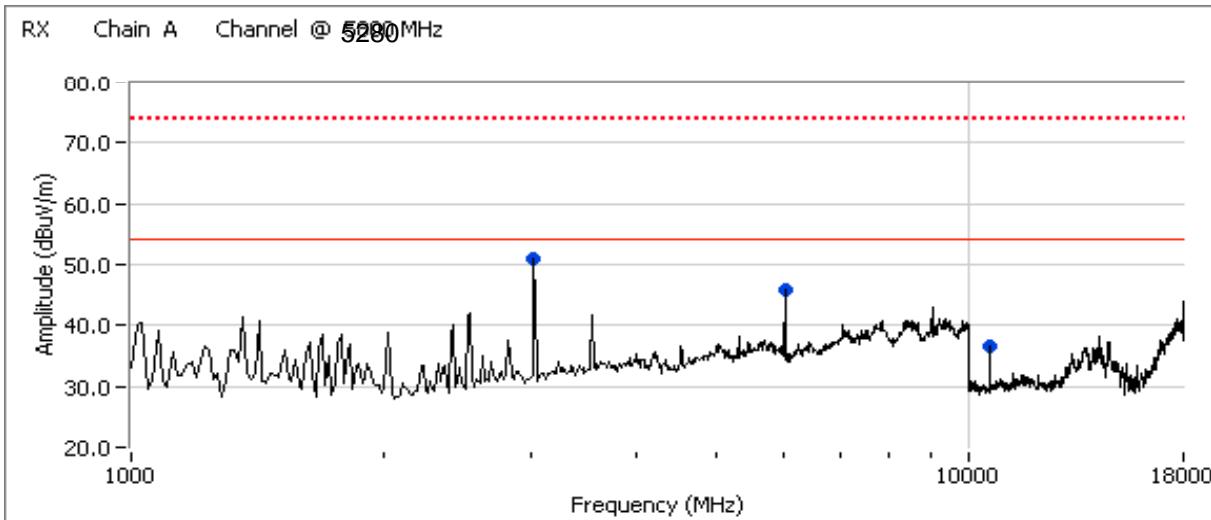


Client:	Intel	Job Number:	J72587
Model:	512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna	T-Log Number:	T72683
Contact:	Robert Paxman	Account Manager:	Briggs / Eriksen
Standard:	RSS 210 / FCC 15.407 UNII (Radiated)	Class:	NII

Receiver Tuned to 5600 MHz - Chain A

Frequency	Level	Pol	RSS GEN		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
3000.330	52.7	V	54.0	-1.3	AVG	263	1.4	RB 1.000 MHz; VB: 10 Hz
6000.660	46.8	V	54.0	-7.2	AVG	265	1.5	RB 1.000 MHz; VB: 10 Hz
7466.580	44.7	V	54.0	-9.3	AVG	210	1.9	RB 1.000 MHz; VB: 10 Hz
3000.250	55.8	V	74.0	-18.2	PK	263	1.4	RB 1.000 MHz; VB: 1.000 MHz
6000.680	52.4	V	74.0	-21.6	PK	265	1.5	RB 1.000 MHz; VB: 1.000 MHz
7466.630	50.3	V	74.0	-23.7	PK	210	1.9	RB 1.000 MHz; VB: 1.000 MHz

Note 1: Above 1 GHz, the limit is for an average measurement. In addition, the peak value of any emission above 1 GHz, can not exceed the average limit by more than 20 dB.

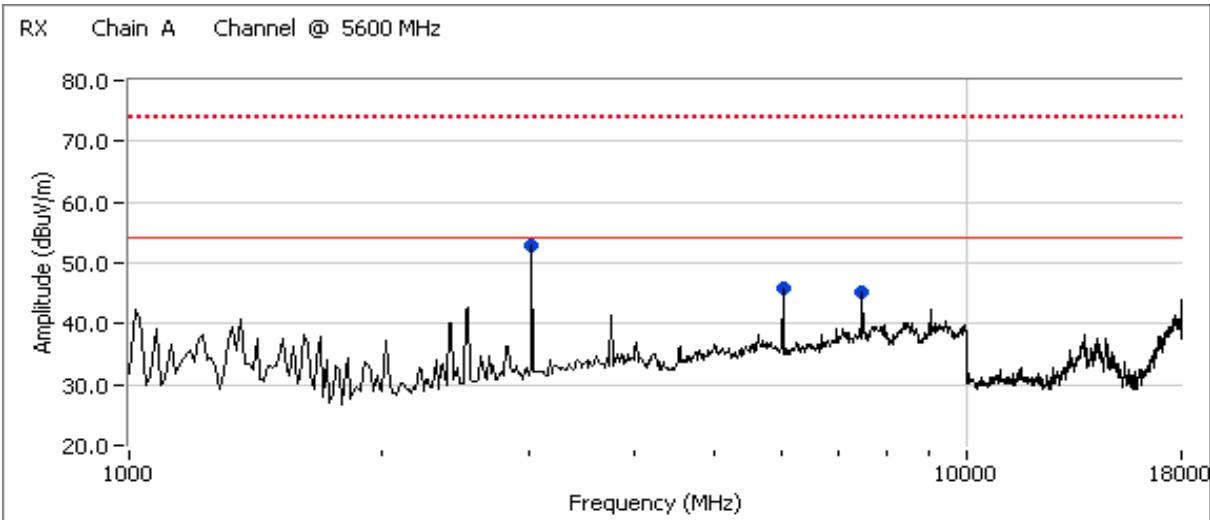


Client:	Intel	Job Number:	J72587
Model:	512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna	T-Log Number:	T72683
Contact:	Robert Paxman	Account Manager:	Briggs / Eriksen
Standard:	RSS 210 / FCC 15.407 UNII (Radiated)	Class:	NII

Receiver Tuned to 5200 MHz - Chain B

Frequency	Level	Pol	RSS GEN		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
3000.310	48.8	V	54.0	-5.2	AVG	268	1.4	RB 1.000 MHz; VB: 10 Hz
6000.680	46.7	V	54.0	-7.3	AVG	262	1.2	RB 1.000 MHz; VB: 10 Hz
6933.270	41.3	V	54.0	-12.7	AVG	190	1.2	RB 1.000 MHz; VB: 10 Hz
3000.320	53.1	V	74.0	-20.9	PK	268	1.4	RB 1.000 MHz; VB: 1.000 MHz
6000.880	51.9	V	74.0	-22.1	PK	262	1.2	RB 1.000 MHz; VB: 1.000 MHz
6933.280	48.7	V	74.0	-25.3	PK	190	1.2	RB 1.000 MHz; VB: 1.000 MHz

Note 1: Above 1 GHz, the limit is for an average measurement. In addition, the peak value of any emission above 1 GHz, can not exceed the average limit by more than 20 dB.

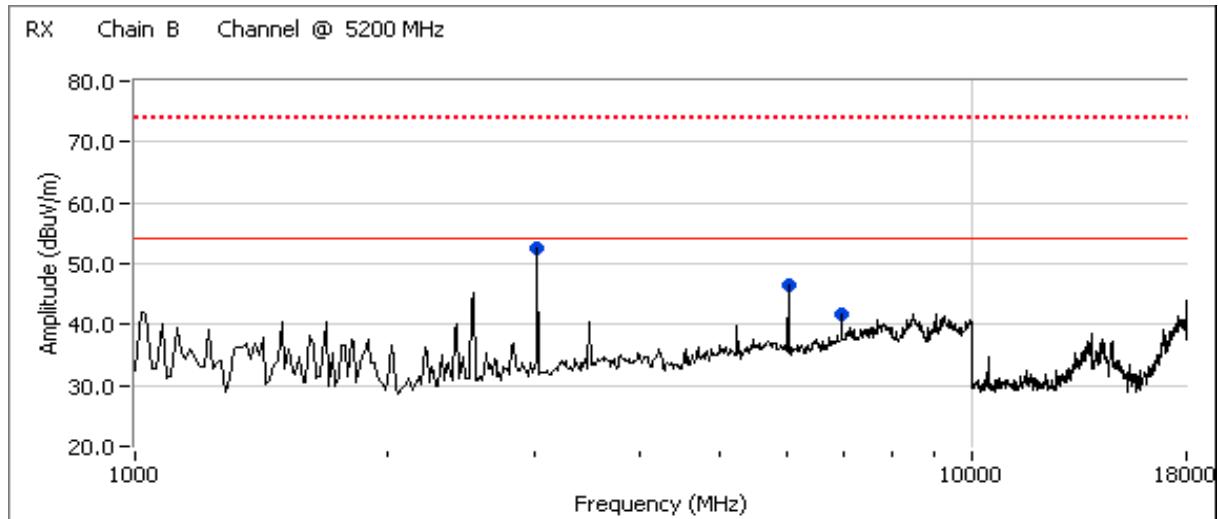


Client:	Intel	Job Number:	J72587
Model:	512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna	T-Log Number:	T72683
Contact:	Robert Paxman	Account Manager:	Briggs / Eriksen
Standard:	RSS 210 / FCC 15.407 UNII (Radiated)	Class:	NII

Receiver Tuned to 5280 MHz - Chain B

Frequency	Level	Pol	RSS GEN		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
3000.300	53.1	V	54.0	-0.9	AVG	261	1.3	RB 1.000 MHz; VB: 10 Hz
6000.720	46.9	V	54.0	-7.1	AVG	264	1.5	RB 1.000 MHz; VB: 10 Hz
3000.310	56.5	V	74.0	-17.5	PK	261	1.3	RB 1.000 MHz; VB: 1.000 MHz
6000.690	51.8	V	74.0	-22.2	PK	264	1.5	RB 1.000 MHz; VB: 1.000 MHz

Note 1: Above 1 GHz, the limit is for an average measurement. In addition, the peak value of any emission above 1 GHz, can not exceed the average limit by more than 20 dB.

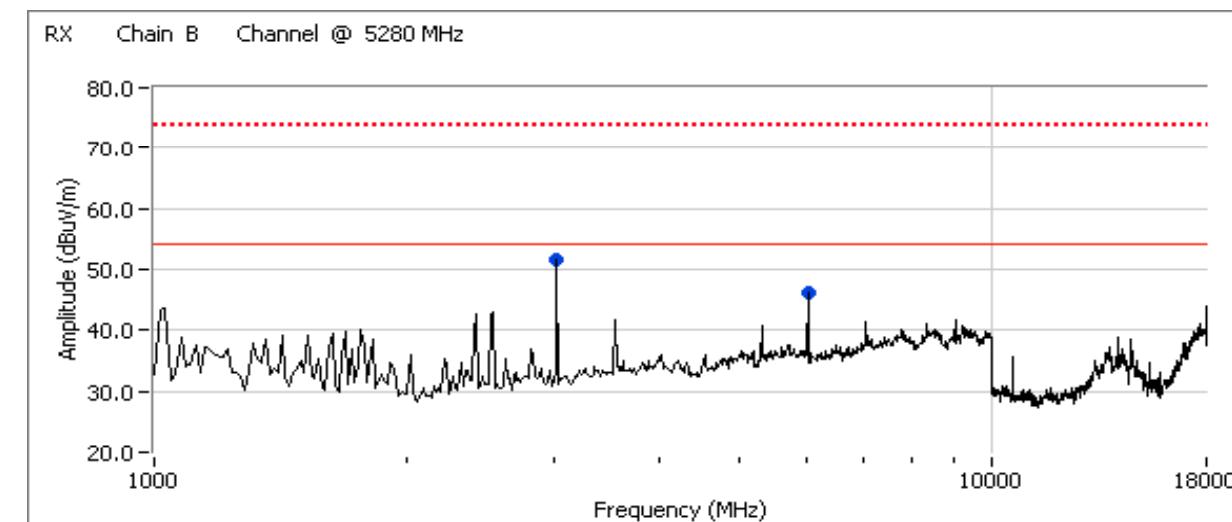


Client:	Intel	Job Number:	J72587
Model:	512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna	T-Log Number:	T72683
Contact:	Robert Paxman	Account Manager:	Briggs / Eriksen
Standard:	RSS 210 / FCC 15.407 UNII (Radiated)	Class:	NII

Receiver Tuned to 5600 MHz - Chain B

Frequency	Level	Pol	RSS GEN		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
3000.310	52.6	V	54.0	-1.4	AVG	264	1.4	RB 1.000 MHz; VB: 10 Hz
6000.690	46.5	V	54.0	-7.5	AVG	264	1.3	RB 1.000 MHz; VB: 10 Hz
3000.330	56.0	V	74.0	-18.0	PK	264	1.4	RB 1.000 MHz; VB: 1.000 MHz
2490.230	35.6	V	54.0	-18.4	AVG	188	1.3	RB 1.000 MHz; VB: 10 Hz
6000.730	51.7	V	74.0	-22.3	PK	264	1.3	RB 1.000 MHz; VB: 1.000 MHz
2488.450	51.1	V	74.0	-22.9	PK	188	1.3	RB 1.000 MHz; VB: 1.000 MHz

Note 1: Above 1 GHz, the limit is for an average measurement. In addition, the peak value of any emission above 1 GHz, can not exceed the average limit by more than 20 dB.

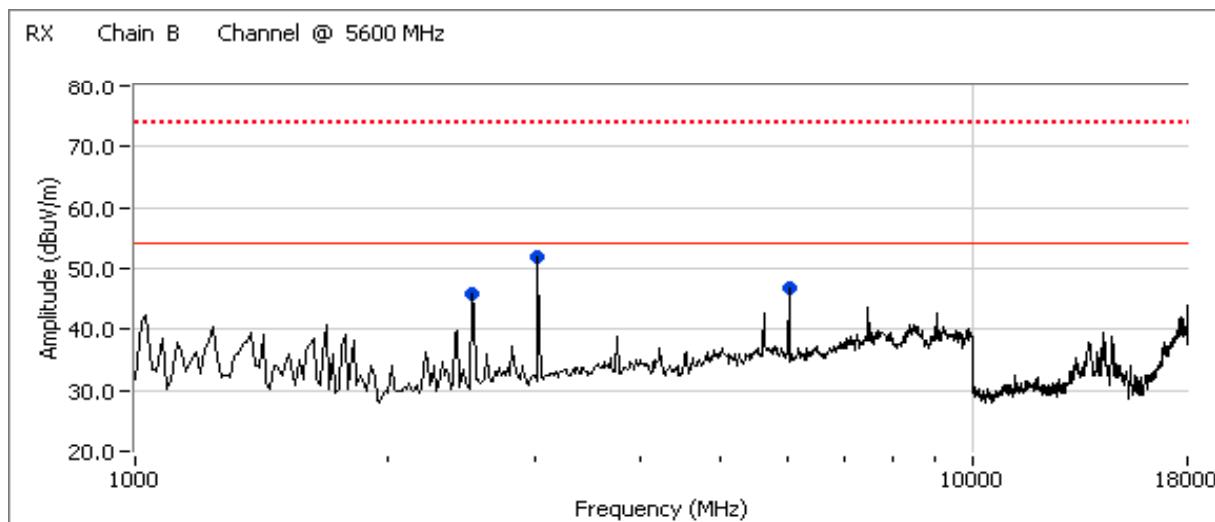

Client:	Intel	Job Number:	J72587
Model:	512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna	T-Log Number:	T72683
Contact:	Robert Paxman	Account Manager:	Briggs / Eriksen
Standard:	RSS 210 / FCC 15.407 UNII (Radiated)	Class:	NII

Run # 2a: Maximized readings, 1000 - 18000 MHz, All Receivers Active


Date of Test: 8/18/2008

Test Engineer: Suhaila Khushzad

Test Location: FT Chamber # 5

MAC address : 0016EA01AF0

Frequency Range	Test Distance	Limit Distance	Extrapolation Factor
1000 - 10000 MHz	3	3	0.0
10000 - 18000 MHz	1	3	-9.5

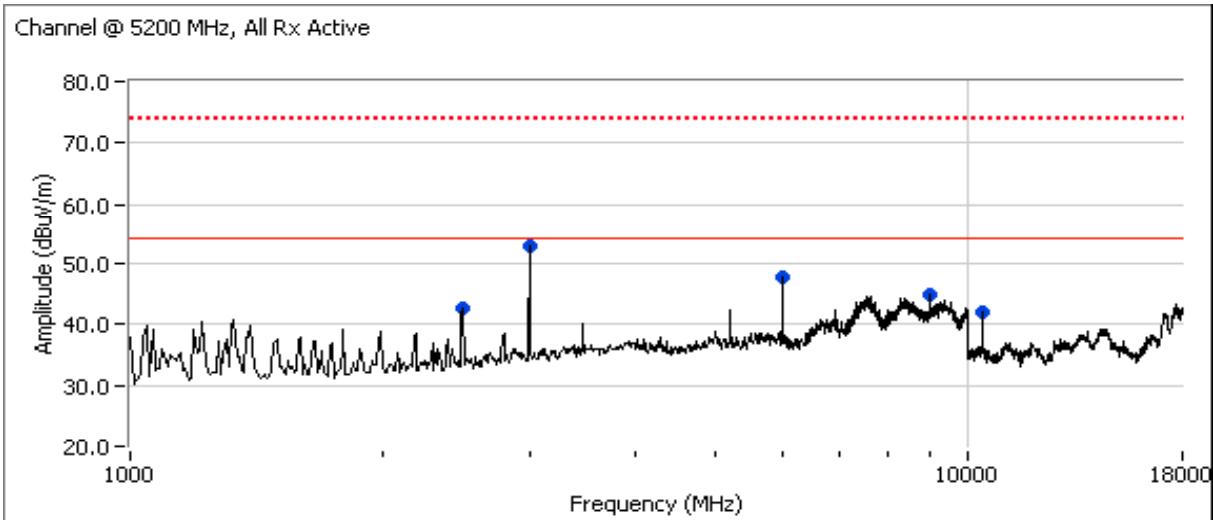

Receiver Tuned to 5200 MHz - All chains active


Frequency	Level	Pol	RSS GEN		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
3000.330	52.2	V	54.0	-1.8	AVG	261	1.0	RB 1.000 MHz; VB: 10 Hz
3000.210	55.3	V	74.0	-18.7	PK	261	1.0	RB 1.000 MHz; VB: 1.000 MHz
2497.420	31.5	V	54.0	-22.5	AVG	53	1.3	RB 1.000 MHz; VB: 10 Hz
2500.180	47.0	V	74.0	-27.0	PK	53	1.3	RB 1.000 MHz; VB: 1.000 MHz
6000.810	47.7	V	54.0	-6.3	AVG	257	1.2	RB 1.000 MHz; VB: 10 Hz
6000.890	51.3	V	74.0	-22.7	PK	257	1.2	RB 1.000 MHz; VB: 1.000 MHz
9001.130	41.4	V	54.0	-12.6	AVG	184	1.0	RB 1.000 MHz; VB: 10 Hz
9001.100	48.4	V	74.0	-25.6	PK	184	1.0	RB 1.000 MHz; VB: 1.000 MHz
10400.010	39.4	V	54.0	-14.6	AVG	79	1.0	RB 1.000 MHz; VB: 10 Hz
10400.010	44.4	V	74.0	-29.6	PK	79	1.0	RB 1.000 MHz; VB: 1.000 MHz

Note 1: Above 1 GHz, the limit is for an average measurement. In addition, the peak value of any emission above 1 GHz, can not exceed the average limit by more than 20 dB.

Client:	Intel	Job Number:	J72587
Model:	512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna	T-Log Number:	T72683
Contact:	Robert Paxman	Account Manager:	Briggs / Eriksen
Standard:	RSS 210 / FCC 15.407 UNII (Radiated)	Class:	NII

Run # 2b: Maximized readings, 1000 - 18000 MHz, All Receivers Active

Frequency Range	Test Distance	Limit Distance	Extrapolation Factor
1000 - 10000 MHz	3	3	0.0
10000 - 18000 MHz	1	3	-9.5

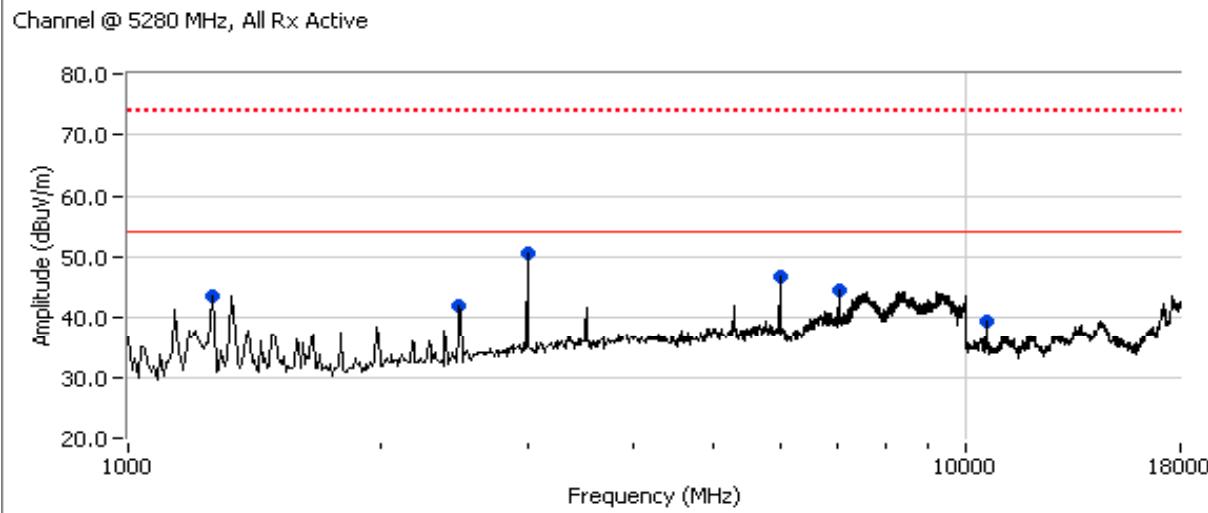

Receiver Tuned to 5280 MHz - All chains active

Frequency	Level	Pol	RSS GEN		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
3000.340	52.1	V	54.0	-1.9	AVG	261	1.0	RB 1.000 MHz; VB: 10 Hz
3000.260	55.1	V	74.0	-18.9	PK	261	1.0	RB 1.000 MHz; VB: 1.000 MHz
6000.860	47.4	V	54.0	-6.6	AVG	91	1.0	RB 1.000 MHz; VB: 10 Hz
6000.600	50.5	V	74.0	-23.5	PK	91	1.0	RB 1.000 MHz; VB: 1.000 MHz
10559.990	39.0	V	54.0	-15.0	AVG	78	1.0	RB 1.000 MHz; VB: 10 Hz
10559.960	43.6	V	74.0	-30.4	PK	78	1.0	RB 1.000 MHz; VB: 1.000 MHz
7040.030	43.6	V	54.0	-10.4	AVG	189	1.4	RB 1.000 MHz; VB: 10 Hz
7040.030	48.9	V	74.0	-25.1	PK	189	1.4	RB 1.000 MHz; VB: 1.000 MHz
2497.200	31.2	V	54.0	-22.8	AVG	83	1.0	RB 1.000 MHz; VB: 10 Hz
2493.620	46.8	V	74.0	-27.2	PK	83	1.0	RB 1.000 MHz; VB: 1.000 MHz
1215.010	27.3	V	54.0	-26.7	AVG	89	1.4	RB 1.000 MHz; VB: 10 Hz
1221.450	45.0	V	74.0	-29.0	PK	89	1.4	RB 1.000 MHz; VB: 1.000 MHz


Note 1: Above 1 GHz, the limit is for an average measurement. In addition, the peak value of any emission above 1 GHz, can not exceed the average limit by more than 20 dB.

Client:	Intel	Job Number:	J72587
Model:	512AN_MW with Lenovo Boxter 13 SL300 Rocky30 Antenna	T-Log Number:	T72683
Contact:	Robert Paxman	Account Manager:	Briggs / Eriksen
Standard:	RSS 210 / FCC 15.407 UNII (Radiated)	Class:	NII

Run # 2c: Maximized readings, 1000 - 18000 MHz, All Receivers Active

Frequency Range	Test Distance	Limit Distance	Extrapolation Factor
1000 - 10000 MHz	3	3	0.0
10000 - 18000 MHz	1	3	-9.5

Channel @ 5600 MHz, All Rx Active

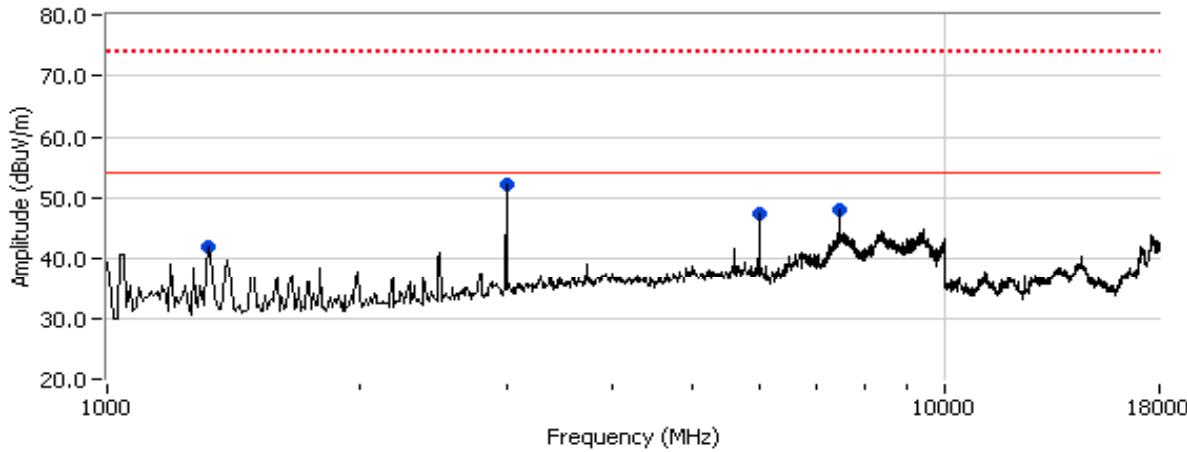

Receiver Tuned to 5600 MHz - All chains active

Frequency	Level	Pol	RSS GEN		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
3000.330	52.6	V	54.0	-1.4	AVG	267	1.3	RB 1.000 MHz; VB: 10 Hz
3000.140	55.6	V	74.0	-18.4	PK	267	1.3	RB 1.000 MHz; VB: 1.000 MHz
6000.830	47.3	V	54.0	-6.7	AVG	101	1.0	RB 1.000 MHz; VB: 10 Hz
6000.800	51.0	V	74.0	-23.0	PK	101	1.0	RB 1.000 MHz; VB: 1.000 MHz
1315.150	28.2	V	54.0	-25.8	AVG	93	1.9	RB 1.000 MHz; VB: 10 Hz
1311.620	41.2	V	74.0	-32.8	PK	93	1.9	RB 1.000 MHz; VB: 1.000 MHz
7466.780	47.4	V	54.0	-6.6	AVG	201	1.4	RB 1.000 MHz; VB: 10 Hz
7466.700	52.4	V	74.0	-21.6	PK	201	1.4	RB 1.000 MHz; VB: 1.000 MHz

Note 1: Above 1 GHz, the limit is for an average measurement. In addition, the peak value of any emission above 1 GHz, can not exceed the average limit by more than 20 dB.

EXHIBIT 3: Photographs of Test Configurations