

3.3. EUT ARRANGEMENT

The EUT is a [GMRS Transceiver](#), and the separation distance to the user is:

1. When operate in front of a person's face.


A separation distance of **25** mm between the front of the EUT and flat phantom as defined in FCC supplement C was used to evaluate the SAR.

2. When in body worn configuration

EUT was tested with supplied belt-clip accessory. For body Worn configuration, the back of belt-clip was directly contacted to the flat phantom. By considering the thickness of Flat phantom which is **2** mm. A separation distance of 2 mm was used to evaluate the Body Worn SAR.

SETUP PHOTO:

Face held configuration (25mm separation)

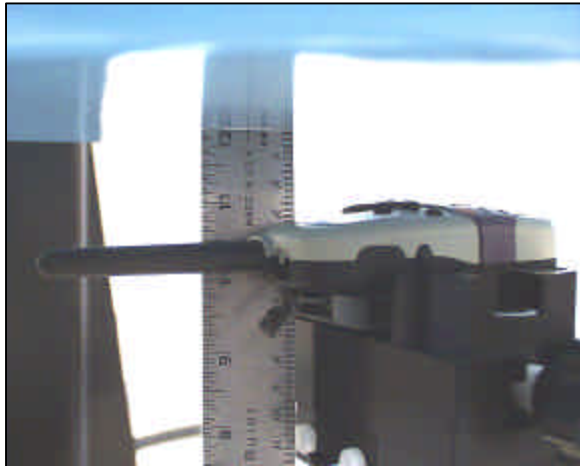

Body-worn Configuration (2 mm Separation phantom thickness)

