

Bluetooth test report for RM-1

Report Date: August 16, 2004

Signatures:

Tested by:



Antti Teronen

Testing Engineer

Contents approved:



Tomi Nyberg

Laboratory Manager

Test results are valid for the tested unit only.

This report shall not be reproduced except in full

CONTENTS

1	LABORATORY INFORMATION	4
2	CUSTOMER INFORMATION	4
3	SUMMARY OF TEST RESULTS.....	5
4	EUT INFORMATION	6
4.1	EUT description	6
5	EUT TEST SETUPS	7
6	APPLICABLE STANDARDS	7
7	CARRIER FREQUENCY SEPARATION	8
7.1	Test setup and testing method	8
7.2	EUT operation mode	8
7.3	Results	9
7.4	Screen shots	9
8	NUMBER OF HOPPING FREQUENCIES	10
8.1	Test setup	10
8.2	EUT operation mode	10
8.3	Results	11
8.4	Screen shots	11
9	TIME OF OCCUPANCY	12
9.1	Test setup and testing method	12
9.2	Page mode	13
9.2.1	EUT operation mode	13
9.2.2	Results	13
9.2.3	Screen shots	13
9.3	Inquiry mode	15
9.3.1	EUT operation mode	15
9.3.2	Results	15
9.3.3	Screen shots	15
9.4	Connection mode	17
9.4.1	EUT operation mode	17
9.4.2	Results	17
9.4.3	Screen shots	17
10	20 dB BANDWIDTH	19
10.1	Test setup and measurement method	19
10.2	EUT operation mode	19
10.3	Results	20
10.4	Screen shots	20
11	PEAK OUTPUT POWER	22
11.1	Test setup and measurement method	22
11.2	EUT operation mode	22
11.3	Results	23
11.4	Screen shots	23
12	BAND-EDGE COMPLIANCE OF RF CONDUCTED EMISSIONS	25
12.1	Test setup and measurement method	25

Test results are valid for the tested unit only.

This report shall not be reproduced except in full

12.2	Hopping enabled	26
12.2.1	EUT operation mode	26
12.2.2	Results	26
12.2.3	Screen shots	26
12.3	Hopping disabled	27
12.3.1	EUT operation mode	27
12.3.2	Results	27
12.3.3	Screen shots	28
13	AC POWERLINE CONDUCTED EMISSIONS	29
13.1	Test setup and measurement method	29
13.2	EUT operation mode	29
13.3	Limits	29
13.4	Results	29
14	SPURIOUS RF CONDUCTED EMISSIONS	32
14.1	Test setup and measurement method	32
14.2	EUT operation mode	32
14.3	Limit	33
14.4	Results	33
15	RADIATED SPURIOUS EMISSIONS	35
15.1	Test setup	35
15.2	Test method	36
15.3	EUT operation mode	36
15.4	Limit	36
15.5	Results	37
15.5.1	Emission levels	38
16	TEST EQUIPMENT	40
16.1	Conducted measurements	40
16.2	Radiated measurements	40
17	TEST SETUP PHOTOGRAPHS	41

1 LABORATORY INFORMATION

Test Laboratory	NATLABS Oy EMC Laboratory Koneenkatu 12 / K17 05830 Hyvinkää FINLAND Tel: +358 20 475 2600 Fax: +358 20 475 2719 e-mail: firstname.surname@ette.com
FCC registration number: IC file number:	910391 (January 27, 2003) IC 4616 (May 14, 2003)

2 CUSTOMER INFORMATION

Client	Nokia Corporation Keilalahdentie 2-4 FIN-02150 Espoo P.O. Box 226 00045 NOKIA GROUP Tel: 07180 08000
Contact person:	Tero Huhtala Nokia Oyj / Nokia Mobile Phones P.O. Box 1000 (Visiokatu 3) FIN -33721 TAMPERE FINLAND Tel: +358 7180 08000 E-mail: tero.huhtala@nokia.com
Receipt of EUT:	August 9, 2004
Testing date:	August 13 – 14, 2004
Report date:	August 16, 2004

The tests listed in this report have been done to demonstrate compliance to the FCC rules section §15.247, §15.207 and IC standard RSS-210.

3 SUMMARY OF TEST RESULTS

Section in CFR 47	Section in RSS-210	Test	Result
15.247, a1	6.2.2 (o), a1	Carrier frequency separation	PASS
15.247, a1ii	6.2.2 (o), a3	Number of hopping frequencies	PASS
15.247, a 1 iii	6.2.2 (o), a3	Time of occupancy	PASS
15.247, a	6.2.2 (o), a1	20dB bandwidth	PASS
15.247, b1	6.2.2 (o), a3	Peak output power	PASS
15.247, c	6.2.2 (o), e1	Band-edge compliance of RF emissions	PASS
15.207	6.6	AC power line conducted emissions	PASS
15.247, c	6.2.2 (o), e1	Spurious RF conducted emissions	PASS
15.247, c	6.2.2 (o), e1	Spurious radiated emissions	PASS

PASS Pass

FAIL Fail

X Measured, but there is no applicable performance criteria

- Not done

Test results are valid for the tested unit only.

This report shall not be reproduced except in full

4 EUT INFORMATION

The EUT and accessories used in the tests are listed below. Later in this report only EUT numbers are used as reference.

	Device	Type	S/N	EUT number
EUT	GSM 1900 Mobile phone	RM-1	004400271746149	07401
	GSM 1900 Mobile phone	RM-1	004400271747956	07402
Accessories	Battery,	BL-5C	067040063563401721	07403
	Battery	BL-5C	0670400363807L021 B23154597	07404
	Charger	ACP-12U	394349K4011210209 26	07405

Notes: EUT 07402 equipped with antenna connector for conducted measurements

4.1 EUT description

EUT is a triple band (GSM 900 / GSM 1800 / GSM 1900) mobile phone with Bluetooth functionality.

The EUT was not modified during the tests.

5 EUT TEST SETUPS

For each test the EUT was exercised to find out the worst case of operation modes and device configuration.

Two different test set-ups were used: one for conducted measurements, another for radiated measurements. One EUT was equipped with an external antenna connector for conductive measurements.

The test set-up photographs are in the document referenced in section 17.

6 APPLICABLE STANDARDS

The tests were performed in guidance of CFR 47 Part 15.247 and 15.207, Part 2, FCC public notice DA 00-705 (March 30, 2000), ANSI C63.4 (2003), RSS-210 (Issue 5, November 2001) and CISPR-22.

Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method" for each test case.


7 CARRIER FREQUENCY SEPARATION

EUT	07402		
Accessories	07404		
Temp, Humidity, Air Pressure	21 °C	58 RH%	1002 hPa
Date of measurement	August 13, 2004		
FCC rule part	§15.247 (a) (1)		
RSS-210 section	6.2.2 (o), a1		
Measured by	Antti Teronen		

7.1 Test set-up and testing method

The Bluetooth simulator was used to:

- set the EUT channel (0 – 78)
- set the number of EUT TX slots (1, 3, 5)
- set the EUT to TX, RX and TX/RX mode
- enable/disable frequency hopping
- select between several different test modulation patterns

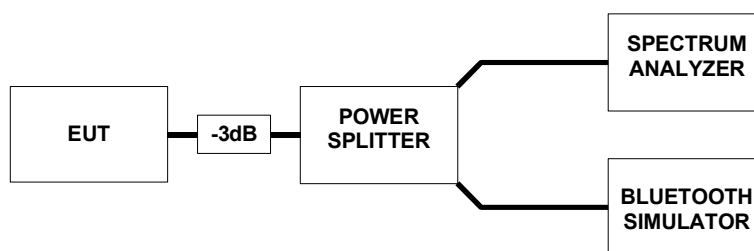

Picture 1: Test set-up for carrier frequency separation measurement

Spectrum analyser was set to sweep the Bluetooth operating band 2.40 – 2.4835 GHz.

100 kHz resolution bandwidth and maximum hold function was used to measure the EUT transmission over sufficient time. Carrier frequency separation was read from the screen.

7.2 EUT operation mode


EUT operation mode	Connection, DM5, PRBS
EUT channel	Hopping
EUT TX power level	0 dBm

7.3 Results


Table 1: Carrier frequency separation measurement results

Limit	Result
≥ 0.025 or 20dB BW	1.00 MHz

7.4 Screen shots

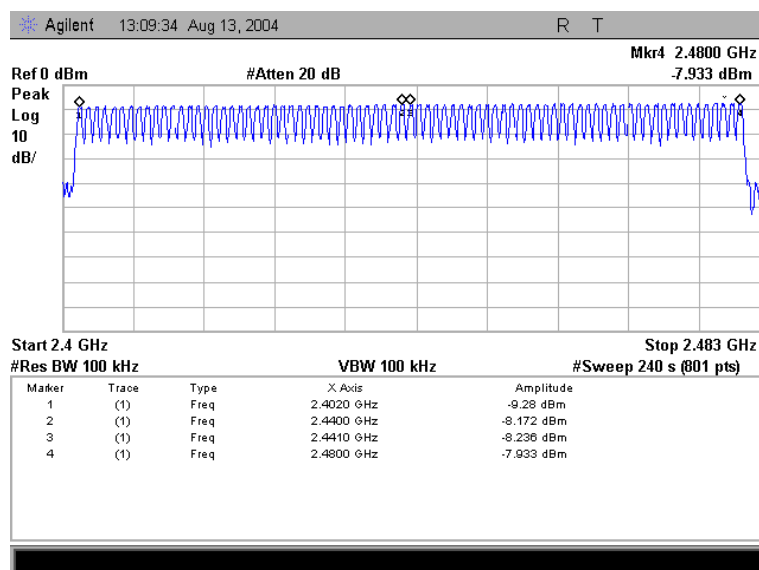

Picture 2: Carrier frequency separation, General overview of the spectrum

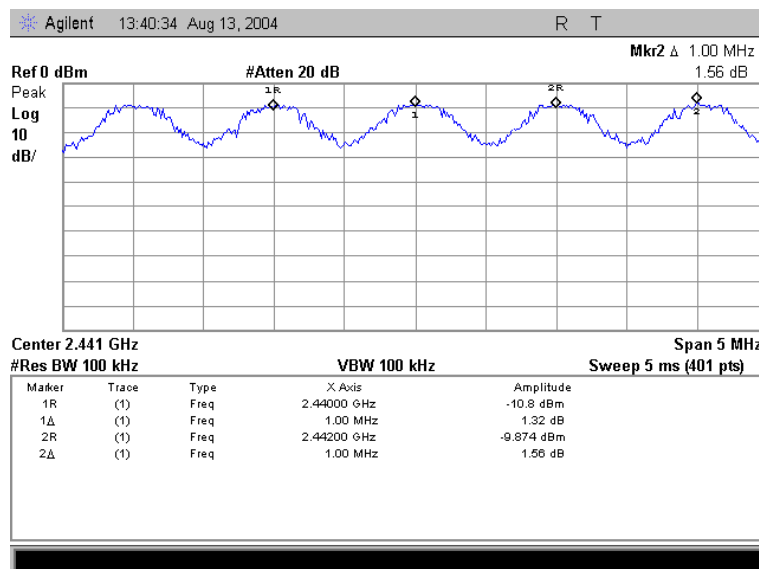

Picture 3: Carrier frequency separation, Channels 38 and 39


8 NUMBER OF HOPPING FREQUENCIES

EUT	07402		
Accessories	07404		
Temp, Humidity, Air Pressure	21 °C	58 RH%	1002 hPa
Date of measurement	August 13 , 2004		
FCC rule part	§15.247(a) (2)		
RSS-210 section	6.2.2 (o), a3		
Measured by	Antti Teronen		

8.1 Test set-up

The Bluetooth simulator was used to:

- set the EUT channel (0 – 78)
- set the number of EUT TX slots (1, 3, 5)
- set the EUT to TX, RX and TX/RX mode
- enable/disable frequency hopping
- select between several different test modulation patterns

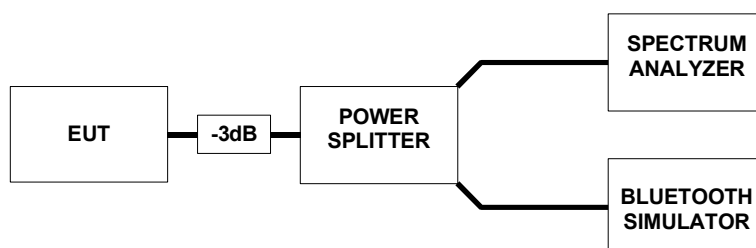

Picture 4: Test set-up for measurement of number of hopping frequencies

Spectrum analyser was set to sweep the Bluetooth operating band 2.40 – 2.4835 GHz.

100 kHz resolution bandwidth and maximum hold function was used to measure the EUT transmission over sufficient time. Number of hopping frequencies was calculated from the screen.

8.2 EUT operation mode


EUT operation mode	Connection, DM5, PRBS
EUT channel	Hopping
EUT TX power level	0 dBm

8.3 Results

Table 2: Number of hopping frequencies measurement results

Limit	Result
≥ 75	79

8.4 Screen shots

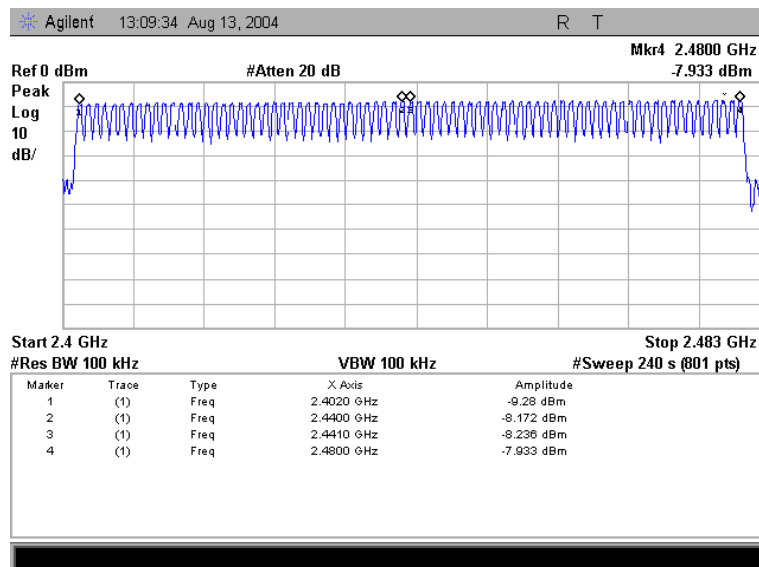

Picture 5: Number of hopping frequencies measurement


9 TIME OF OCCUPANCY

EUT	07402		
Accessories	07404		
Temp, Humidity, Air Pressure	21 °C	58 RH%	1002 hPa
Date of measurement	August 13 , 2004		
FCC rule part	§15.247 (a) (1) iii		
RSS-210 section	6.2.2 (o), a3		
Measured by	Antti Teronen		

9.1 Test set-up and testing method

The Bluetooth simulator was used to:

- set the EUT channel (0 – 78)
- set the number of EUT TX slots (1, 3, 5)
- set the EUT to TX, RX and TX/RX mode
- enable/disable frequency hopping
- select between several different test modulation patterns

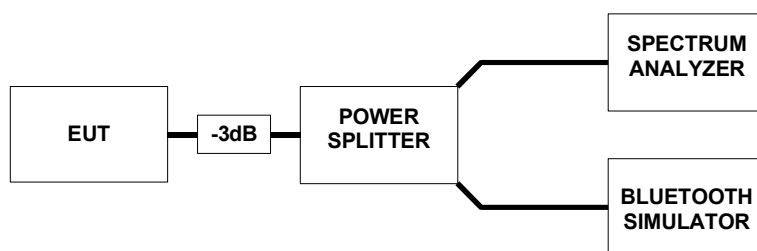

Picture 6: Test set-up for conducted RF output power measurement

Spectrum analyser with single sweep and 0 Hz span was used to monitor the transmitter operation over time.

In the measurement results, the adjacent channel leakage can be seen as power levels approximately 30 dB below the measured peak levels. The adjacent channel leakage in the measurements has been ignored and only the time of occupancy of the channel under study has been measured.

9.2 Page mode

9.2.1 EUT operation mode

EUT operation mode	Page
EUT channel	Hopping
EUT TX power level	0 dBm

9.2.2 Results

Table 3: Time of occupancy during paging mode measurement results

Limit	Result
≤ 0.4 s over 12.8 s period	0.085 s

Limit:

In the paging mode Bluetooth uses a reduced hopping pattern (32 channels). As defined in §15.247 (a) (1) iii, the limit for time of occupancy is 0.4s over time of number of channels multiplied with 0.4s ($32 * 0.4s = 12.8 s$).


Results:

The complete paging cycle took $1.254 + 1.267 + 1.267 + 1.267 = 5.055 s$, during which the transmitter operated at every 10.0 ms.


The duration of one transmission was 170 μs .

Based on these measurements, one channel was occupied
 $(5.055 s / 10.0 ms) * 170 \mu s = 0.085 s$ during the 12.8 s period


9.2.3 Screen shots

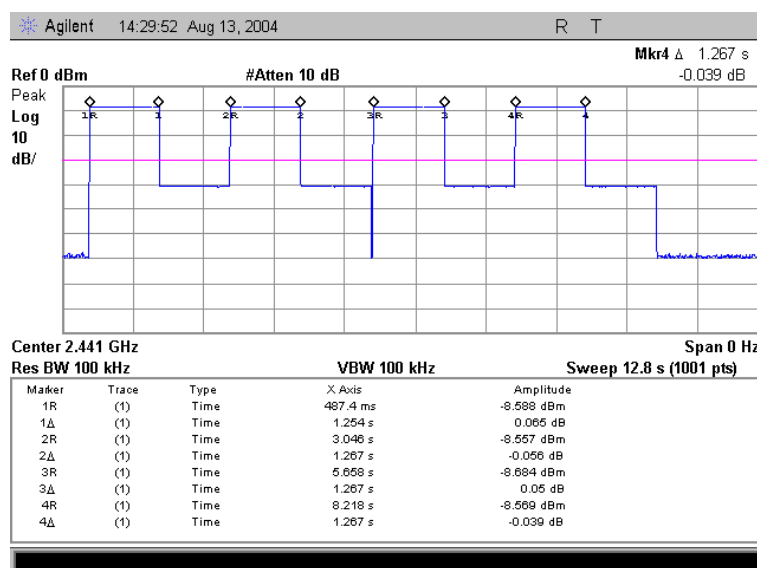

Picture 7: Complete paging cycle, channel 39

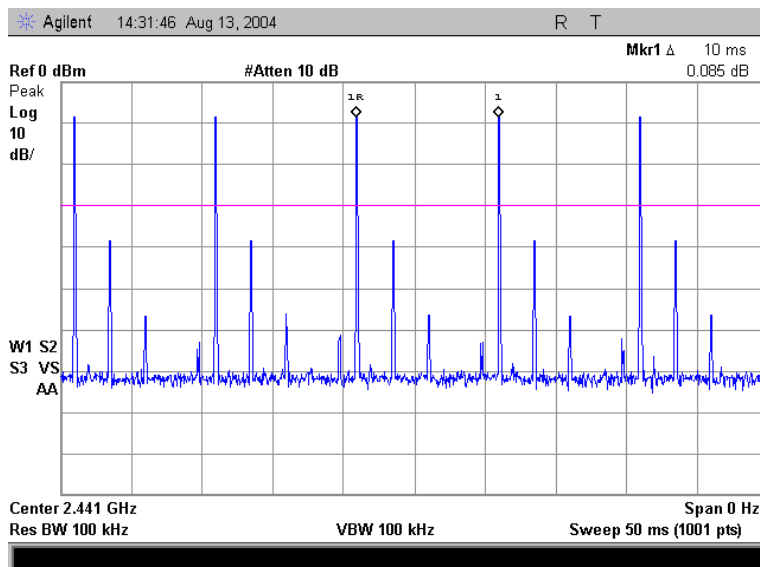

Picture 8: Transmission interval during paging cycle, channel 39

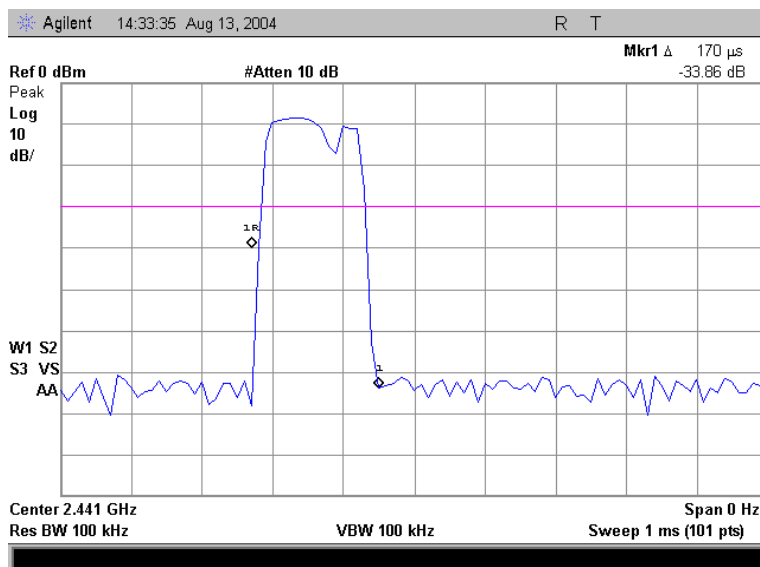

Picture 9: Duration of one transmission during paging cycle, channel 39

9.3 Inquiry mode

9.3.1 EUT operation mode

EUT operation mode	Inquiry
EUT channel	Hopping
EUT TX power level	0 dBm

9.3.2 Results

Table 4: Time of occupancy during inquiring mode measurement results

Limit	Result
≤ 0.4 s over 12.8 s period	0.0915 s

Limit:

In the inquiry mode Bluetooth uses a reduced hopping pattern (32 channels). As defined in §15.247 (a) (1) iii, the limit for time of occupancy is 0.4s over time of number of channels multiplied with 0.4s ($32 * 0.4s = 12.8$ s).


Results:

The complete inquiry cycle took $2.547 + 2.56 + 2.01 = 7.117$ s , during which the transmitter operated at every 10.05 ms.


The duration of one transmission was 170 μ s.

Based on these measurements, one channel was occupied $(7.117 \text{ s} / 10.05 \text{ ms}) * 170 \mu\text{s} = 0.120$ s during the 12.8 s period.


9.3.3 Screen shots

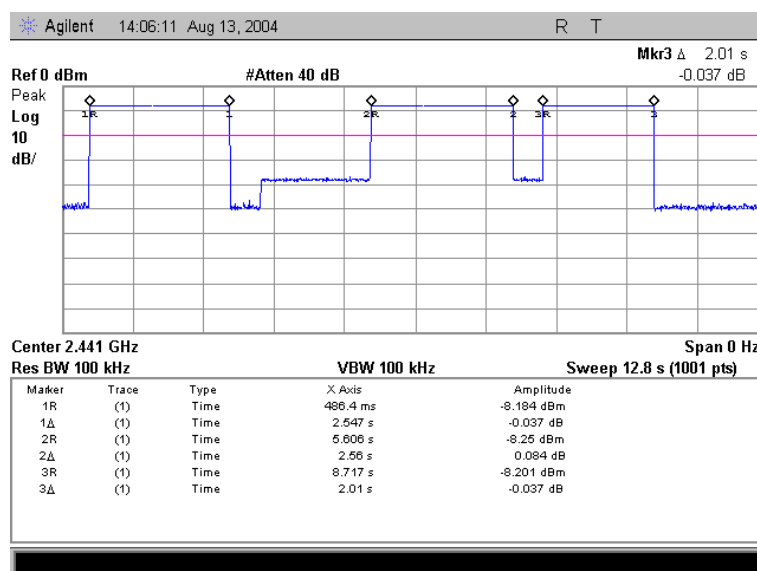

Picture 10: Complete inquiry cycle, channel 39

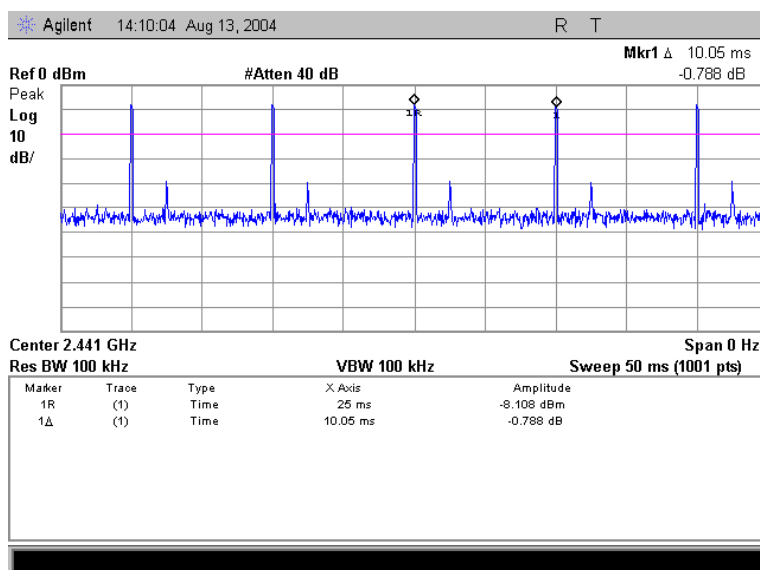

Picture 11: Transmission interval during inquiry cycle, channel 39

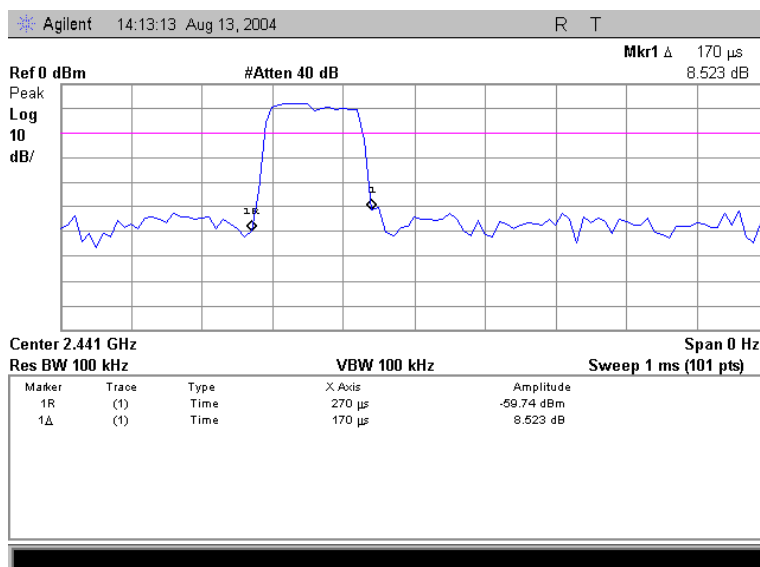

Picture 12: Duration of one transmission during inquiry, channel 39

9.4 Connection mode

9.4.1 EUT operation mode

EUT operation mode	Connection, DH5, PRBS
EUT channel	Hopping
EUT TX power level	0 dBm

9.4.2 Results

Table 5: Time of occupancy during connection mode measurement results

Limit	Result
≤ 0.4 s over 31.6 s period	0.174 s


Limit:

In the connection mode Bluetooth uses 79 channels. As defined in §15.247 (a) (1) iii, the limit for time of occupancy is 0.4s over time of number of channels multiplied with 0.4s ($79 * 0.4s = 31.6$ s).


Results:

In measurement time of 31.6 s, total of 59 transmissions occurred. The duration of one transmission was 2.95ms. Based on these measurements the transmitter operated $59 * 2.95$ ms = 0.174 s during the 31.6 s period

9.4.3 Screen shots

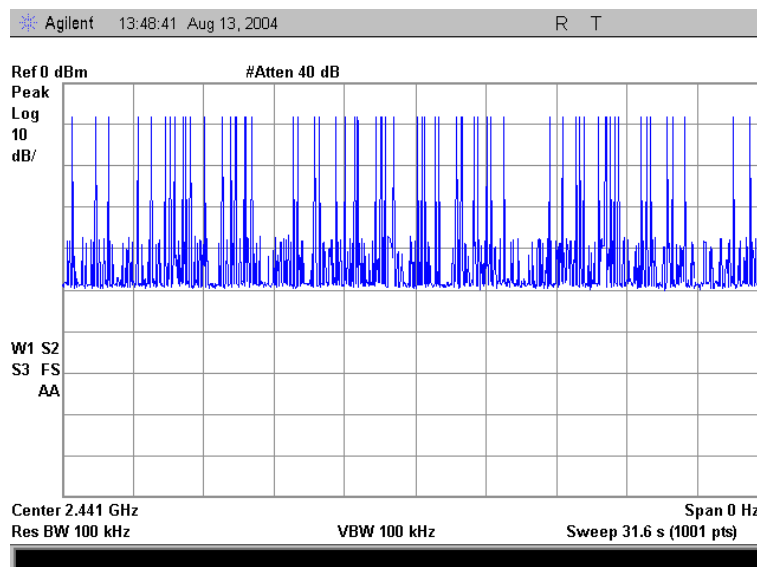

Picture 13: Number of transmissions on connection state, channel 39

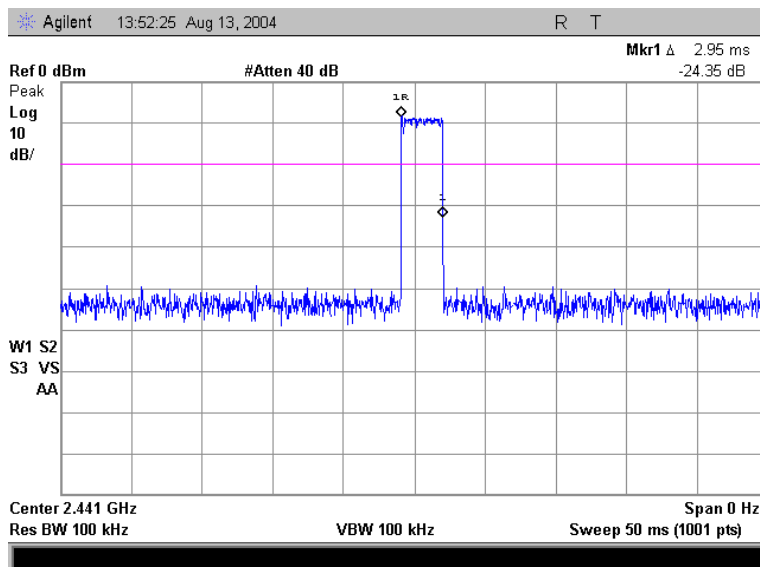

Picture 14: Duration of one transmission on connection state, channel 39

Test results are valid for the tested unit only.

This report shall not be reproduced except in full

NATLABS Oy
P.O. Box 677
FIN-05801 Hyvinkää

Business ID-code
FI 18714394

Tel: +358 20 475 2600
Fax: +358 20 475 2719

Koneenkatu 12 K17, FIN-05830 Hyvinkää
www.etteplan.com

e-mail: firstname.lastname@ette.com
www.natlabs.fi


10 20 dB BANDWIDTH

EUT	07402		
Accessories	07404		
Temp, Humidity, Air Pressure	21 °C	58 RH%	1002 hPa
Date of measurement	August 13 , 2004		
FCC rule part	§15.247 (a) (1)		
RSS-210 section	6.2.2 (o), a1		
Measured by	Antti Teronen		

10.1 Test set-up and measurement method

The Bluetooth simulator was used to:

- set the EUT channel (0 – 78)
- set the number of EUT TX slots (1, 3, 5)
- set the EUT to TX, RX and TX/RX mode
- enable/disable frequency hopping
- select between several different test modulation patterns

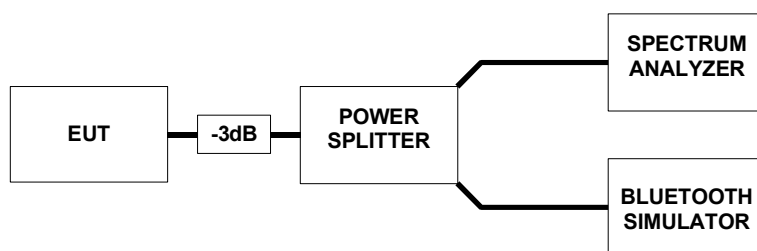

Picture 15: Test set-up for conducted RF output power measurement

The 20dB bandwidth was measured using 10 kHz resolution bandwidth and maximum hold function of the spectrum analyser. 20dB bandwidth was defined by measuring the maximum level on the measured channel and by placing display line 20 dB below this value and by reading the bandwidth from the intersection of the measured trace and display line.

10.2 EUT operation mode


EUT operation mode	Connection, DM5, PRBS
EUT channel	0, 39 and 78
EUT TX power level	0 dBm

10.3 Results


Table 6: 20dB bandwidth measurement results

EUT Channel	Limit (MHz)	Measured value (MHz)
0	≤ 1.0	0.890
39		0.890
78		0.890

10.4 Screen shots

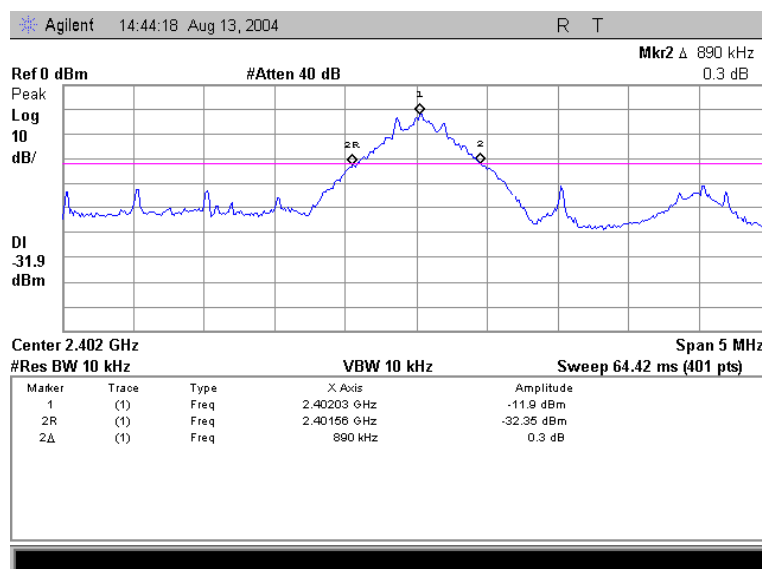


Picture 16: 20dB Bandwidth measurement result, Channel 0

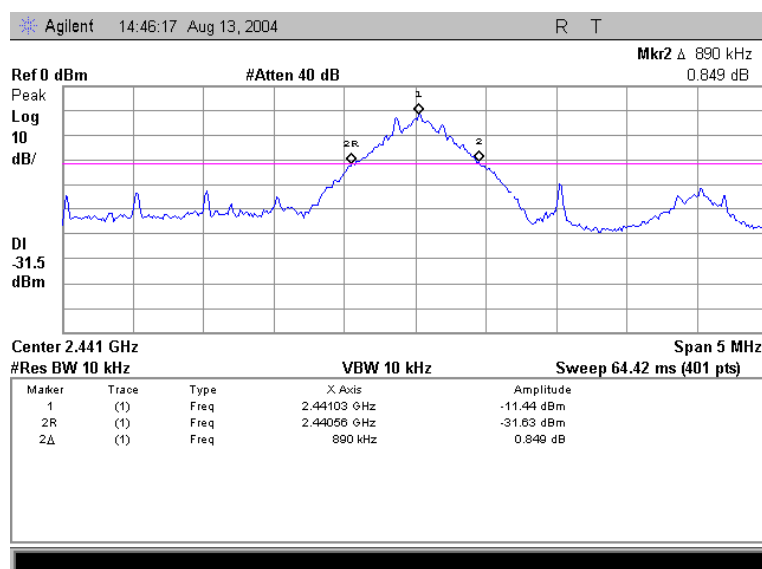

Picture 17: 20dB Bandwidth measurement result, Channel 39

Test results are valid for the tested unit only.

This report shall not be reproduced except in full

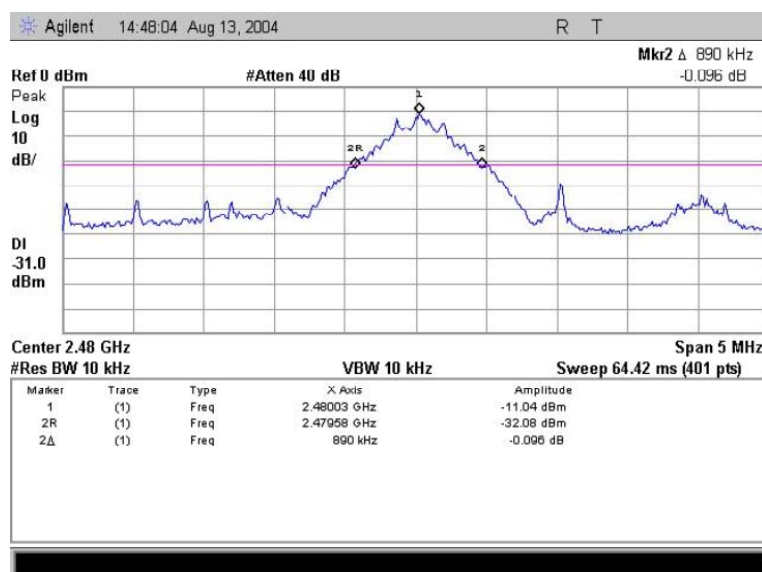

Picture 18: 20dB Bandwidth measurement result, Channel 78

Test results are valid for the tested unit only.

This report shall not be reproduced except in full

NATLABS Oy
P.O. Box 677
FIN-05801 Hyvinkää

Business ID-code
FI 18714394

Tel: +358 20 475 2600
Fax: +358 20 475 2719

Koneenkatu 12 K17, FIN-05830 Hyvinkää
www.etteplan.com

e-mail: firstname.lastname@ette.com
www.natlabs.fi


11 PEAK OUTPUT POWER

EUT	07402		
Accessories	07404		
Temp, Humidity, Air Pressure	21 °C	58 RH%	1002 hPa
Date of measurement	August 13 , 2004		
FCC rule part	§15.247 (b) (1)		
RSS-210 section	6.2.2 (o), a3		
Measured by	Antti Teronen		

11.1 Test set-up and measurement method

The Bluetooth simulator was used to:

- set the EUT channel (0 – 78)
- set the number of EUT TX slots (1, 3, 5)
- set the EUT to TX, RX and TX/RX mode
- enable/disable frequency hopping
- select between several different test modulation patterns

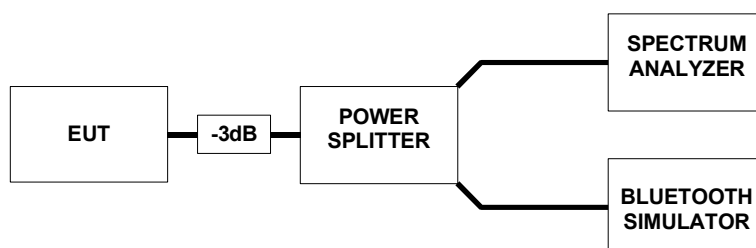

Picture 19: Test set-up for conducted RF output power measurement

In the peak output power measurement the power splitter, attenuator and cable attenuations were measured prior to the power measurement and set as parameter for external preamplifier gain in the spectrum analyser to correct the reading of the peak output power. Spectrum analyser subtracts the set PG value shown in the screenshots from the measured reading.

The measurement was made using 1 MHz resolution bandwidth and 1 MHz video bandwidth and maximum hold function to record the maximum peak output power.

11.2 EUT operation mode


EUT operation mode	Connection, DM5, PRBS
EUT channel	0, 39 and 78
EUT TX power level	0 dBm

11.3 Results


Table 7: Peak output power measurement results

EUT Channel	Limit (W)	Test result (W)	Limit (dBm)	Test result (dBm)
0	≤ 1	0.00070	≤ 30	-1.538
39		0.00087		-0.62
78		0.00097		-0.132


11.4 Screen shots

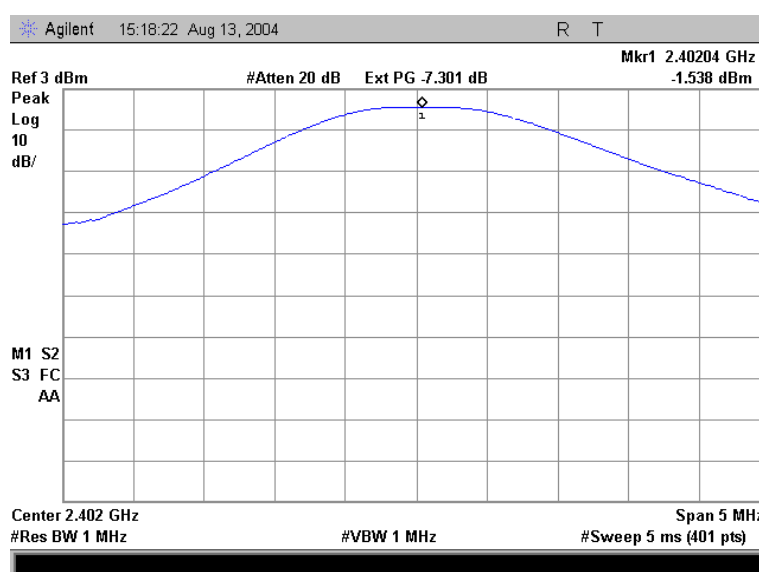

Picture 20: Peak output power, channel 0

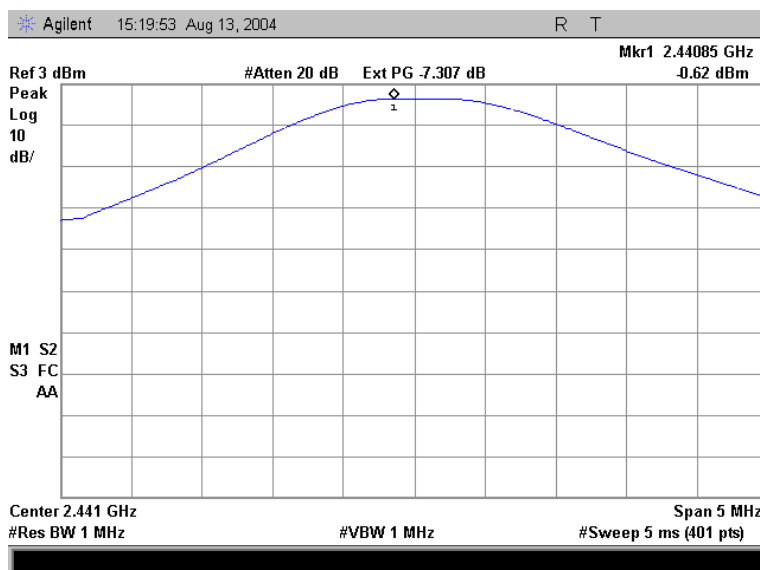

Picture 21: Peak output power, channel 39

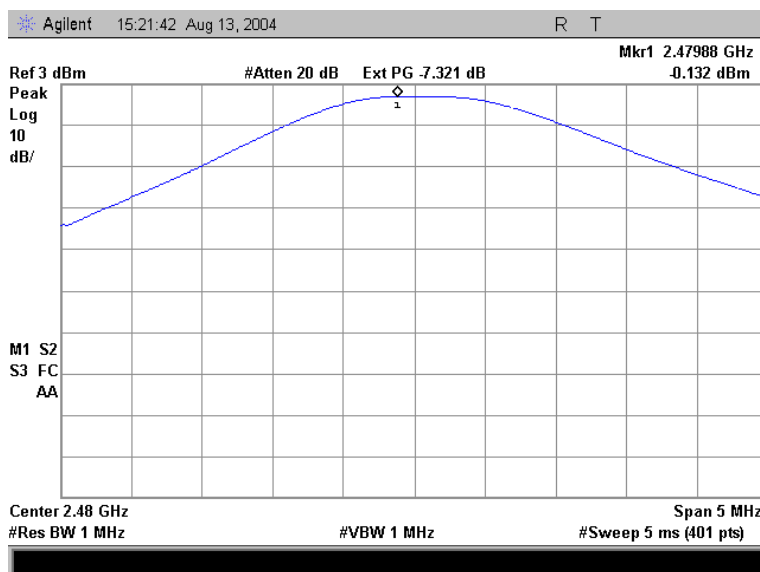

Picture 22: Peak output power, channel 78

Test results are valid for the tested unit only.

This report shall not be reproduced except in full


12 BAND-EDGE COMPLIANCE OF RF CONDUCTED EMISSIONS

EUT	07402		
Accessories	07404		
Temp, Humidity, Air Pressure	21 °C	58 RH%	1002 hPa
Date of measurement	August 13 , 2004		
FCC rule part	§15.247 (c) (1)		
RSS-210 section	6.2.2 (o), e1		
Measured by	Antti Teronen		

12.1 Test set-up and measurement method

The Bluetooth simulator was used to:

- set the EUT channel (0 – 78)
- set the number of EUT TX slots (1, 3, 5)
- set the EUT to TX, RX and TX/RX mode
- enable/disable frequency hopping
- select between several different test modulation patterns

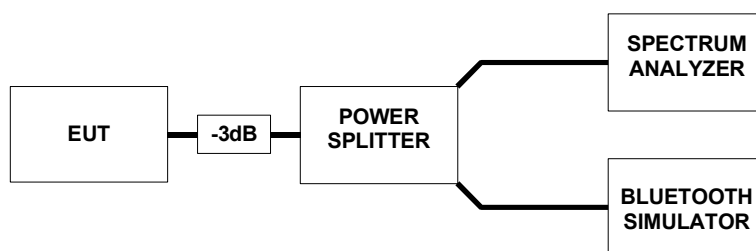

Picture 23: Test set-up for band edge compliance measurement

Band edge compliance of RF-conducted emissions was measured by setting the band edge as centre frequency in the spectrum analyser and measuring the power on the transmission on channels 0 and 79. The measured power and power on the band edge was then compared.

12.2 Hopping enabled

12.2.1 EUT operation mode


EUT operation mode	Connection, DH5, PRBS
EUT channel	Hopping
EUT TX power level	0 dBm

12.2.2 Results


Table 8: Results on the band edge compliance of RF-conducted emission measurement, hopping enabled

EUT Channel	Limit (dBc)	Test result (dBc)
0	≤ -20	-29.7
78		-44.8

12.2.3 Screen shots

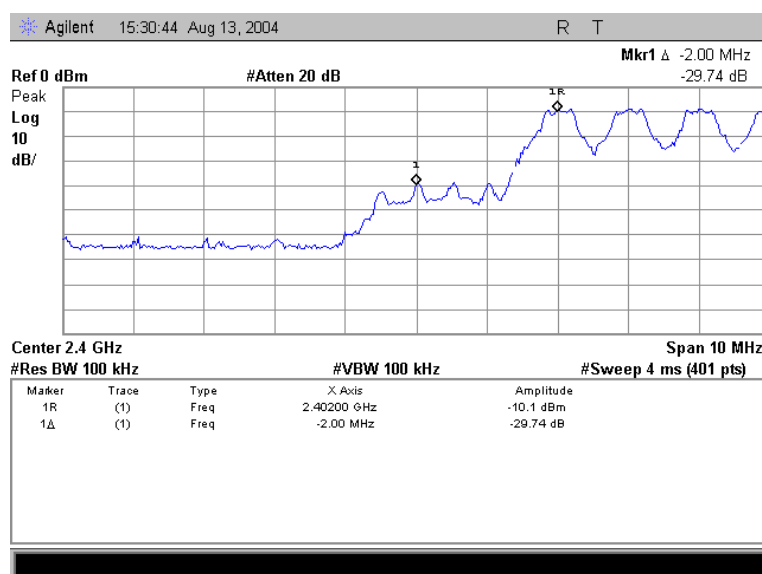

Picture 24: Band edge compliance, channel 0, hopping enabled

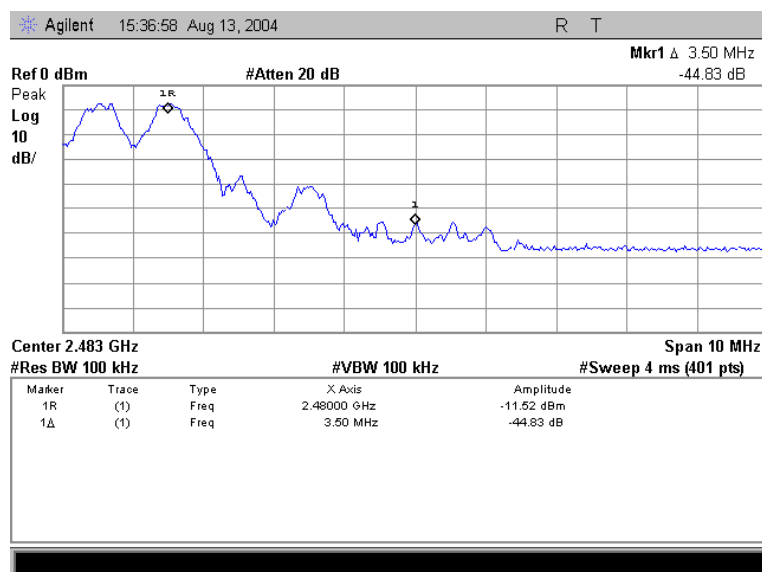

Picture 25: Band edge compliance, channel 78, hopping enabled

12.3 Hopping disabled

12.3.1 EUT operation mode


EUT operation mode	Connection, DM5, PRBS
EUT channel	0 (2402 MHz), 78 (2480 MHz)
EUT TX power level	0 dBm

12.3.2 Results


Table 9: Results on the band edge compliance of RF-conducted emission measurement, hopping disabled

EUT Channel	Limit (dBc)	Test result (dBc)
0	≤ -20	-30.3
79		-49.4

12.3.3 Screen shots

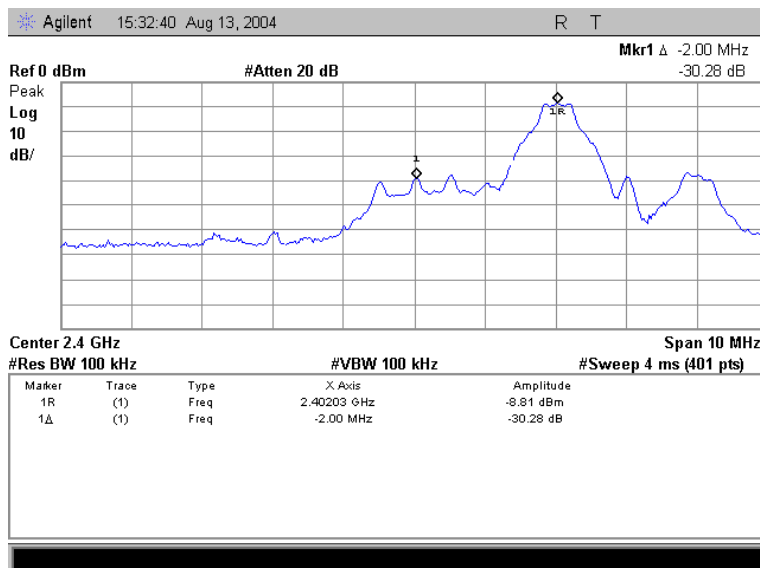

Picture 26: Band edge compliance, channel 0, hopping disabled

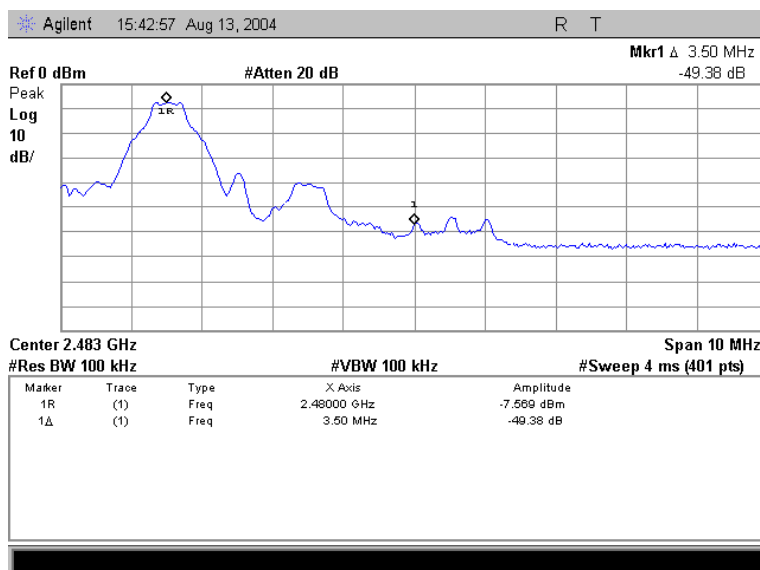

Picture 27: Band edge compliance, channel 78, hopping disabled

13 AC POWERLINE CONDUCTED EMISSIONS

EUT	07401		
Accessories	07403, 07405		
Temp, Humidity, Air Pressure	22 °C	59 RH%	1001 hPa
Date of measurement	August 14, 2004		
FCC rule part	§15.207		
RSS-210 section	6.6		
Measured by	Antti Teronen		

13.1 Test set-up and measurement method

The EUT was set according to ANSI C63.4-1992, figure 9a

13.2 EUT operation mode

EUT operation mode	Connection, DH5, PRBS
EUT channel	Hopping
EUT TX power level	0 dBm
EUT operation voltage	110 VAC / 60 Hz

13.3 Limits

Table 10: AC power line conducted emission measurement results


Frequency band (MHz)	Quasi-peak limit (dBμV)	Average limit (dBμV)
0.15 – 0.5	66 – 56*	56 – 46*
0.5 – 5	56	46
5 – 30	60	50

* The limit decreases linearly with the logarithm of the frequency


13.4 Results

The measurement results were adjusted with the attenuation of the cable between the LISN and receiver by the computer controlling the test system

Peaks closer than 10 dB to the quasi peak limit were measured using quasi peak detector. These values have been listed in Table 11 and Table 14.

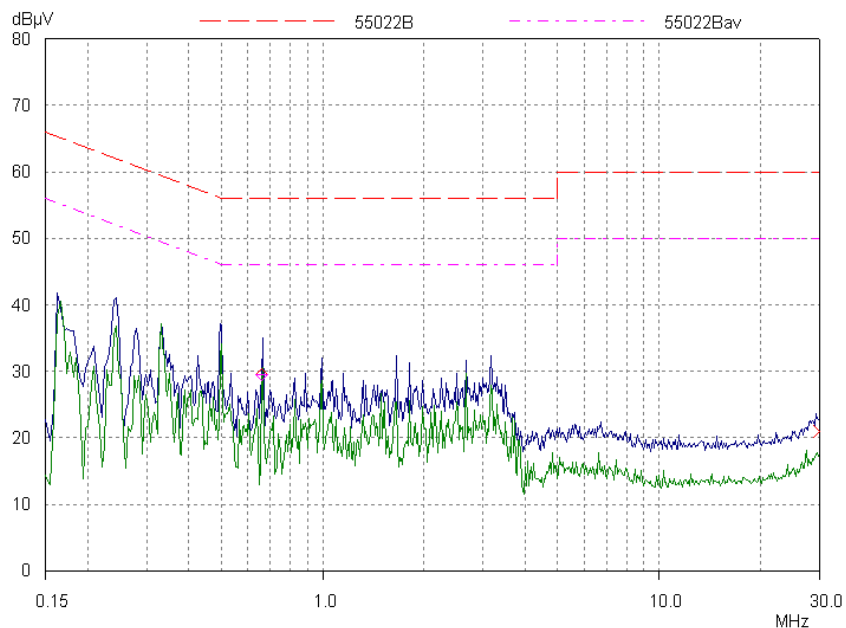

Picture 28: AC power line emissions, line L

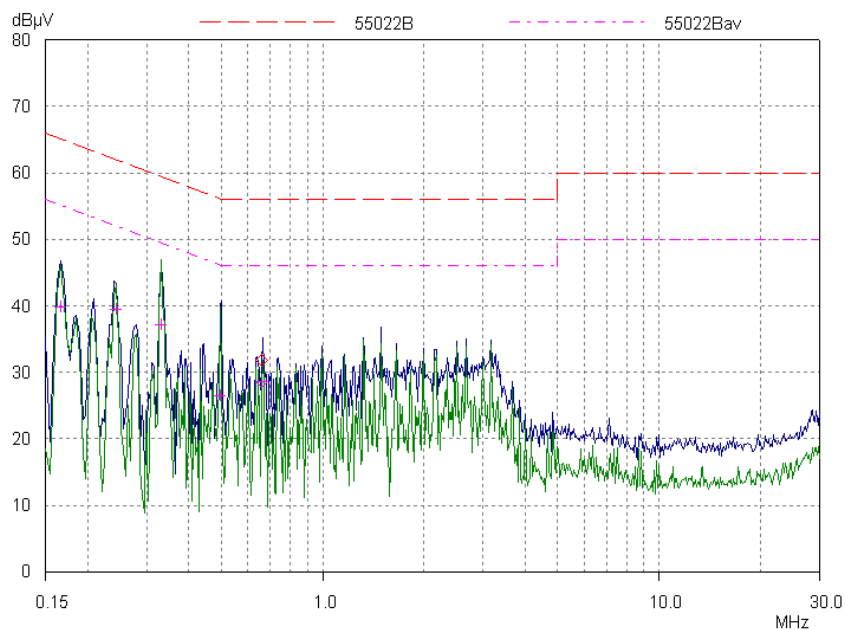

Picture 29: AC power line emissions, line N

Test results are valid for the tested unit only.

This report shall not be reproduced except in full

NATLABS Oy
P.O. Box 677
FIN-05801 Hyvinkää

Business ID-code
FI 18714394

Tel: +358 20 475 2600
Fax: +358 20 475 2719

Koneenkatu 12 K17, FIN-05830 Hyvinkää
www.etteplan.com

e-mail: firstname.lastname@ette.com
www.natlabs.fi

Table 11: Highest emissions, line L, QP

Frequency (MHz)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)
Note			

Note: No peaks found closer than 6 dB to the QP limit

Table 12: Highest emissions, line N, QP

Frequency (MHz)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)
Note			

Note: No peaks found closer than 6 dB to the QP limit

Table 13: Highest emissions, line L, AVG

Frequency (MHz)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)
Note			

Note: No peaks found closer than 10 dB to the AVG limit

Table 14: Highest emissions, line N, AVG

Frequency (MHz)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)
0.16562	39.91	55.18	15.27
0.24375	39.50	51.97	12.47
0.32968	37.18	49.46	12.28
0.49375	26.39	46.10	19.71


14 SPURIOUS RF CONDUCTED EMISSIONS

EUT	07402		
Accessories	07404		
Temp, Humidity, Air Pressure	22 °C	59 RH%	1001 hPa
Date of measurement	August 14, 2004		
FCC rule part	§15.247 (c) (2)		
RSS-210 section	6.2.2 (o), e1		
Measured by	Antti Teronen		

14.1 Test set-up and measurement method

The Bluetooth simulator was used to:

- set the EUT channel (0 – 78)
- set the number of EUT TX slots (1, 3, 5)
- set the EUT to TX, RX and TX/RX mode
- enable/disable frequency hopping
- select between several different test modulation patterns

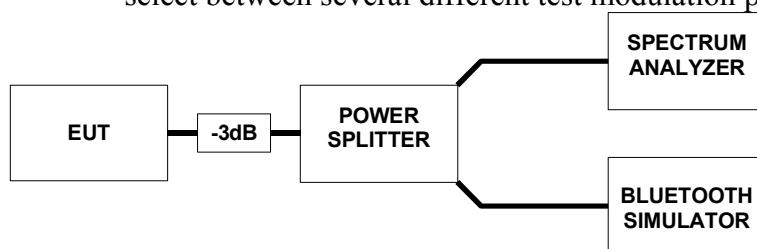

Picture 30: Test set-up for band edge compliance measurement

Spectrum analyser and automated software were used to record conducted spurious emissions on frequency range 30 MHz – 25 GHz. Frequency range was scanned using 100 kHz resolution bandwidth and 50 kHz steps. Spurious emissions levels relative to the carrier level were read from the measured results.

14.2 EUT operation mode


EUT operation mode	Connection, DM5, PRBS
EUT channel	0, 39 and 78
EUT TX power level	0 dBm

14.3 Limit


EUT Channel	Limit (dBc)
0	≤ -20
39	
78	

14.4 Results


All spurious emissions measured were least 40 dB below the carrier level.

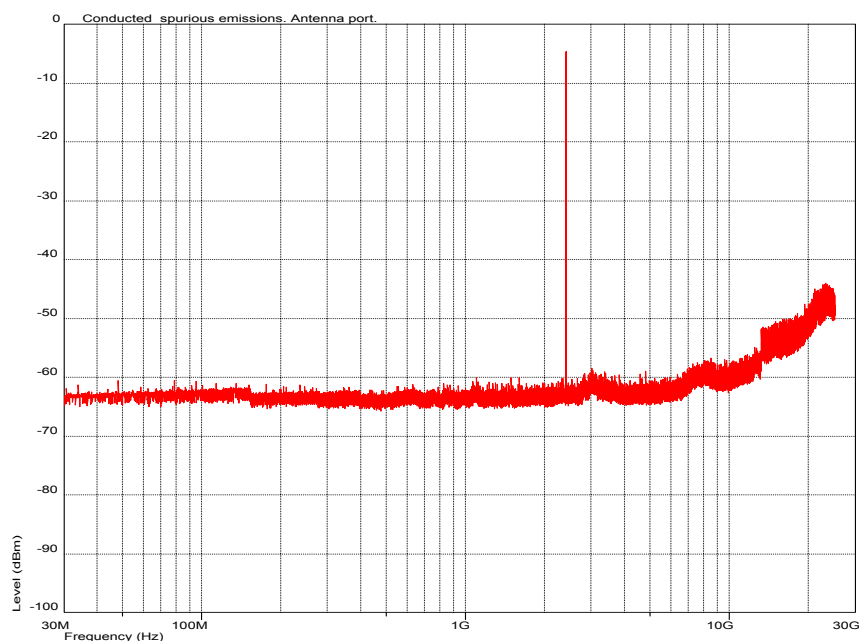

Picture 31: Conducted spurious emissions on antenna port, Channel 0

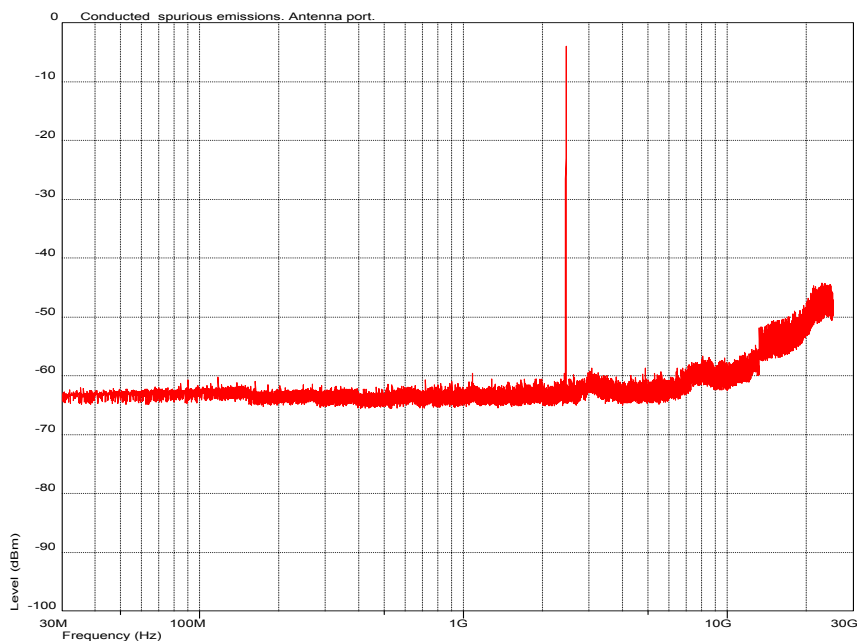

Picture 32: Conducted spurious emissions on antenna port, Channel 39

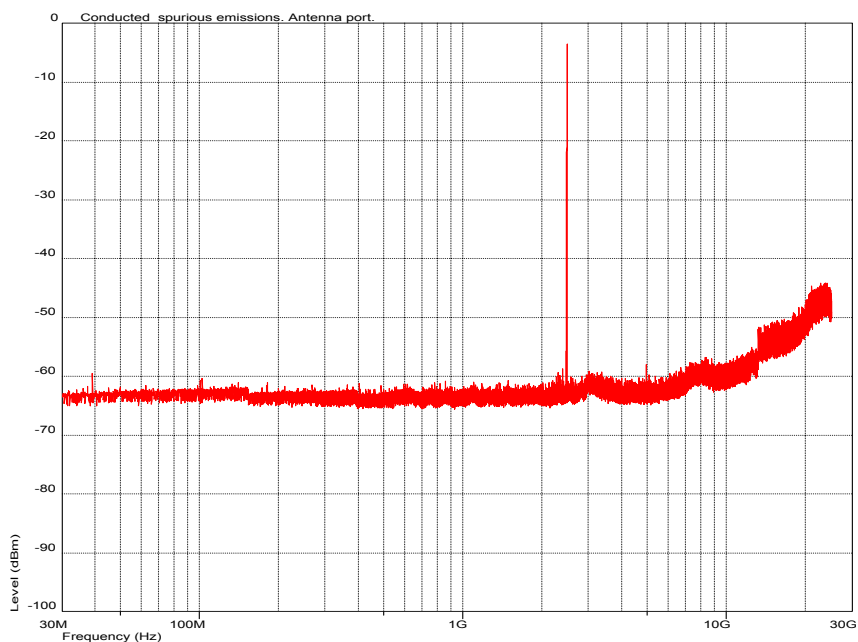

Picture 33: Conducted spurious emissions on antenna port, Channel 78

Test results are valid for the tested unit only.

This report shall not be reproduced except in full

NATLABS Oy
P.O. Box 677
FIN-05801 Hyvinkää

Business ID-code
FI 18714394

Tel: +358 20 475 2600
Fax: +358 20 475 2719

Koneenkatu 12 K17, FIN-05830 Hyvinkää
www.etteplan.com

e-mail: firstname.lastname@ette.com
www.natlabs.fi

15 RADIATED SPURIOUS EMISSIONS

EUT	07401		
Accessories	07403		
Temp, Humidity, Air Pressure	22 °C	59 RH%	1001 hPa
Date of measurement	August 13-14, 2004		
FCC rule part	§15.247 (c) (1)		
RSS-210 section	6.2.2 (o), e1		
Measured by	Antti Teronen		


15.1 Test set-up

The Blue tooth simulator was used to:


- set the EUT channel (0 – 78)
- set the number of EUT TX slots (1, 3, 5)
- set the EUT to TX, RX and TX/RX mode
- enable/disable frequency hopping

select between several different test modulation patterns

The test was done using an automated test system, where a computer controlled the measurement equipment.

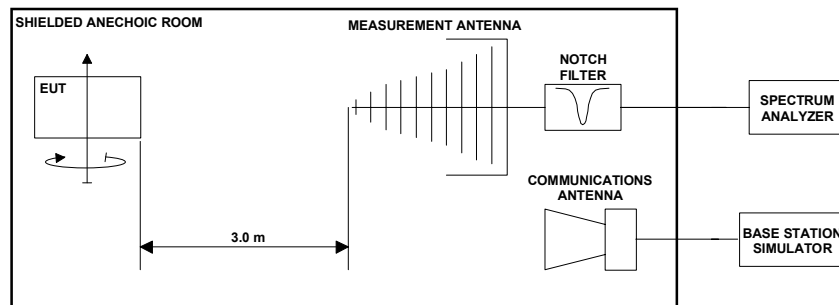

Picture 34: Test set-up for radiated spurious emissions measurement on below 3 GHz frequencies

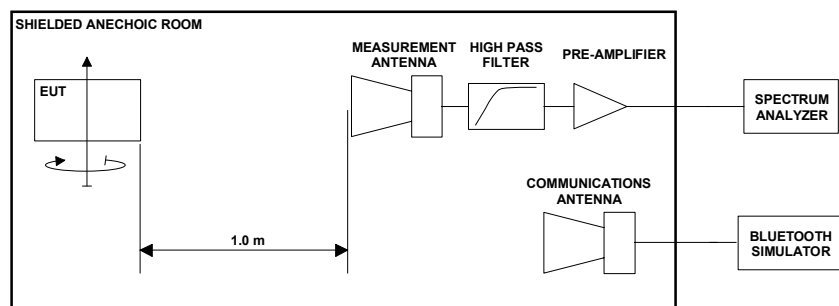

Picture 35: Test set-up for radiated spurious emissions measurement on 3 GHz and above frequencies

Test results are valid for the tested unit only.

This report shall not be reproduced except in full

15.2 Test method

1. The emissions were searched and maximized by moving the turntable, changing the measuring antenna polarization and height and manipulating the EUT.
2. Levels of suspicious signals and levels of EUT transmitter harmonics were recorded.
3. The recorded levels were corrected in the automated test system with the measurement antenna factor, cable attenuations and filter attenuation.
4. The corrected values, giving the EUT radiated spurious emission levels as dB μ V/m, are reported. Below 3 GHz 3m measuring distance was used and above 3 GHz 1m measuring distance was used.
5. Test was made both with the EUT flip open and closed

15.3 EUT operation mode

EUT operation mode	Connection mode, DM5, PRBS
EUT channel	0 (2402 MHz) , 39 (2441 MHz) and 78 (2480 MHz)
EUT TX power level	0 dBm

15.4 Limit

Frequency band (MHz)	3m Limit (μV/m)	3m Limit (dBμV/m)	Detector
30 – 88	100	40	QP
88 -216	150	43.5	QP
216 - 960	200	46	QP
960 - 1000	500	54.0	QP
1000 - 25000	500	54.0	AVERAGE
1000 - 25000	5000	74.0	PEAK
Frequency band (MHz)	1m Limit (μV/m)	1m Limit (dBμV/m)	Detector
1000 - 25000	1500	63.5	AVERAGE
1000 - 25000	15000	83.5	PEAK

As default, all emissions were compared against the general limits. If any emission exceeded that limit, it was further checked, if it was outside the restricted band thus complying with the -20dBc requirement.

15.5 Results

The formula below was used to calculate the filed strength of spurious emissions

$$\begin{aligned} Result[\text{dB}\mu\text{V/m}] &= Measured\ value[\text{dB}\mu\text{V}] + AF[\text{dB/m}] - G_{PreAmp}[\text{dB}] + CableLoss[\text{dB}] \\ &= Measured\ value[\text{dB}\mu\text{V/m}] + CF[\text{dB/m}] \end{aligned}$$

where the variable are as follows:

<i>Result</i> [dB μ V/m]	Spurious emission field strength
<i>Measured value</i> [dB μ V]	Spectrum analyser reading
<i>AF</i> [dB/m]	Measuring antenna factor
<i>G_{PreAmp}</i> [dB]	Preamplifier Gain
<i>CableLoss</i> [dB]	Connecting cable and filter losses
<i>CF</i> [dB/m]	Correction factor used in the automated test system

Measurement system noise level was least 15 dB below the spurious emission limit. Only levels of suspicious signals and transmitter harmonic frequencies, which were above the measurement system noise, are reported.

In the tables below, the abbreviated column titles are:

<i>f</i> [MHz]	Measured frequency
EUT H/H2/V	EUT Orientation, Horizontal / Horizontal 2 / Vertical
Pol H/V	Measuring antenna polarization, Horizontal / Vertical
Height [m]	Measuring antenna height from reference ground in meters
TT [deg]	Turn table angle in degrees

15.5.1 Emission levels

Table 15: Emission levels, channel 0, PEAK detector

f [MHz]	Measured value [dB μ V]	CF [dB/m]	1m Result [dB μ V/m]	1m Limit [dB μ V/m]	EUT H / H2 / V	Pol H/V	Height [m]	TT [deg]
4804	50.84	-8.47	42.37	83.5	V	H	1.1	146
7206	43.46	1.57	45.03	83.5	V	H	1.65	7
9608	47.22	2.06	49.28	83.5	V	V	1	162
12010	41.43	6.47	47.9	83.5	V	H	1.05	99

Table 16: Emission levels, channel 0, AVERAGE detector

f [MHz]	Measured value [dB μ V]	CF [dB/m]	1m Result [dB μ V/m]	1m Limit [dB μ V/m]	EUT H / H2 / V	Pol H/V	Height [m]	TT [deg]
4804	38.36	-8.47	29.89	63.5	V	H	1.1	146
7206	30.45	1.57	32.02	63.5	V	H	1.65	7
9608	33.22	2.06	35.28	63.5	V	V	1	162
12010	28.31	6.47	34.78	63.5	V	H	1.05	99

Table 17: Emission levels, channel 39, PEAK detector

f [MHz]	Measured value [dB μ V]	CF [dB/m]	1m Result [dB μ V/m]	1m Limit [dB μ V/m]	EUT H / H2 / V	Pol H/V	Height [m]	TT [deg]
4882	49.38	-7.82	41.56	83.5	H2	V	1.05	335
7323	44.48	2.11	46.59	83.5	H	V	2	162
9764	47.48	2.21	49.69	83.5	V	H	1.1	150
12205	42.29	7.64	49.93	83.5	H	H	1.35	245

Table 18: Emission levels, channel 39, AVERAGE detector

f [MHz]	Measured value [dB μ V]	CF [dB/m]	1m Result [dB μ V/m]	1m Limit [dB μ V/m]	EUT H / H2 / V	Pol H/V	Height [m]	TT [deg]
4882	36.4	-7.82	28.58	63.5	V	H	1.15	113
7323	30.84	2.11	32.95	63.5	H2	H	1.25	152
9764	33.53	2.21	35.74	63.5	V	H	1.1	150
12205	29.04	7.64	36.68	63.5	H	H	1.35	245

Test results are valid for the tested unit only.

This report shall not be reproduced except in full

Table 19: Emission levels, channel 78, PEAK detector

f [MHz]	Measured value [dB μ V]	CF [dB/m]	1m Result [dB μ V/m]	1m Limit [dB μ V/m]	EUT H / H2 / V	Pol H/V	Height [m]	TT [deg]
4960	47.25	-7.36	39.89	83.5	V	H	1	227
7440	43.41	2.29	45.7	83.5	V	V	1.25	95
9920	47.83	2.19	50.02	83.5	V	V	1.1	98
12400	43.11	5.56	48.67	83.5	V	V	1.6	148

Table 20: Emission levels, channel 78, AVERAGE detector

f [MHz]	Measured value [dB μ V]	CF [dB/m]	1m Result [dB μ V/m]	1m Limit [dB μ V/m]	EUT H / H2 / V	Pol H/V	Height [m]	TT [deg]
4960	33.96	-7.36	26.6	63.5	V	H	1	227
7440	30.09	2.29	32.38	63.5	V	V	1.25	95
9920	33.74	2.19	35.93	63.5	V	V	1.1	98
12400	29.63	5.56	35.19	63.5	V	V	1.6	148

Test results are valid for the tested unit only.

This report shall not be reproduced except in full

16 TEST EQUIPMENT

All testing and measurement equipment has been calibrated once a year, except the antennas, which are calibrated every two years.

16.1 Conducted measurements

Equipment	Manufacturer	Model
Spectrum Analyser	Agilent	E7405A
Measurement receiver	Rohde & Schwarz	ESCS 30
Attenuator 3 dB	Narda	779-3
Power splitter	Mini Circuits	ZFSC-2-4
Power splitter	Narda	4426-2
Bluetooth Tester	Anritsu	MT 8852A
Transient limiter / 10 dB attenuator	Chase	CFL 9206
Line Impedance Stabilization Network (LISN)	Rohde & Schwarz	ESH 3-Z5

16.2 Radiated measurements

Equipment	Manufacturer	Model
Spectrum Analyser	Agilent	E7405A
Antenna	Chase	CBL 6140
Antenna	Schwarzbeck	BBHA 9120D
High pass filter	Wainwright Instruments	WHK3.0/18GST
Band Reject filter	Wainwright instruments	WRCT 2400/2483 -45/10EE
Pre-amplifier	JCA	118-400
Turn table / antenna mast controller	EMCO	2090
Antenna mast	EMCO	2075-2
Bluetooth Tester	Anritsu	MT 8852A

Test results are valid for the tested unit only.

This report shall not be reproduced except in full

17 TEST SETUP PHOTOGRAPHS

Test set-up photograph can be found in a separate document

T03-074A-EMC_PHOTOS.doc