

## SAR Compliance Test Report

|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                         |                                                                                                                                            |
|--------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Test report no.:                                 | FCC_RM-1018_01                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Date of report:         | 2014-05-27                                                                                                                                 |
| Template version:                                | 19.7                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Number of pages:        | 129                                                                                                                                        |
| Testing laboratory:                              | TCC Microsoft Salo Laboratory<br>P.O.Box 86<br>Joensuunkatu 7H / Kiila 1B<br>FIN-24101 SALO, FINLAND<br>Tel. +358 (0) 7180 08000<br>Fax. +358 (0) 7180 45220                                                                                                                                                                                                                                                                                                                                                                                         | Client:                 | Microsoft Corporation<br>P.O. Box 68<br>Sinitaival 5<br>FIN-33721 TAMPERE, FINLAND<br>Tel. +358 (0) 7180 08000<br>Fax. +358 (0) 7180 46880 |
| Responsible test engineer:                       | Jose Gomez                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Product contact person: | Tero Huhtala                                                                                                                               |
| Measurements made by:                            | Nina Koskinen, Teuvo Miettinen,<br>Juha-Matti Varjonen, Sami Savela, Marko Laaksonsens                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                         |                                                                                                                                            |
| Tested device:                                   | RM-1018                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                         |                                                                                                                                            |
| FCC ID:                                          | PDNRM-1018                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | IC:                     | 661R-RM1018                                                                                                                                |
| Supplement reports:                              | SAR_Photo_RM-1018_04                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                         |                                                                                                                                            |
| Testing has been carried out in accordance with: | <b>47CFR §2.1093</b><br>Radiofrequency Radiation Exposure Evaluation: Portable Devices<br><b>FCC published RF exposure KDB procedures</b><br><b>RSS-102, Issue 4</b><br>Evaluation Procedure for Mobile and Portable Radio Transmitters with Respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields<br><b>IEEE 1528 - 2013</b><br>IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Technique |                         |                                                                                                                                            |
| Documentation:                                   | The documentation of the testing performed on the tested devices is archived for 15 years at TCC Microsoft.                                                                                                                                                                                                                                                                                                                                                                                                                                          |                         |                                                                                                                                            |
| Test results:                                    | <b>The tested device complies with the requirements in respect of all parameters subject to the test.</b> The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.                                                                                                                                                                                                                                                                       |                         |                                                                                                                                            |
| Date and signatures:                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                         |                                                                                                                                            |
| For the contents:                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                         |                                                                                                                                            |

## CONTENTS

|                                                                                 |           |
|---------------------------------------------------------------------------------|-----------|
| <b>1. SUMMARY OF SAR TEST REPORT .....</b>                                      | <b>4</b>  |
| 1.1 TEST DETAILS .....                                                          | 4         |
| 1.2 MAXIMUM RESULTS.....                                                        | 4         |
| 1.2.1 Head Configuration.....                                                   | 4         |
| 1.2.2 Body Worn Configuration.....                                              | 5         |
| 1.2.3 Wireless Router Configuration.....                                        | 6         |
| 1.2.4 Summary SAR data.....                                                     | 7         |
| 1.2.5 Maximum Drift .....                                                       | 7         |
| 1.2.6 Measurement Uncertainty.....                                              | 8         |
| <b>2. DESCRIPTION OF THE DEVICE UNDER TEST .....</b>                            | <b>8</b>  |
| 2.1 POWER REDUCTIONS IN WIRELESS ROUTER CONFIGURATIONS .....                    | 10        |
| 2.2 DESCRIPTION OF THE ANTENNA.....                                             | 11        |
| <b>3. TEST CONDITIONS .....</b>                                                 | <b>11</b> |
| 3.1 TEMPERATURE AND HUMIDITY.....                                               | 11        |
| 3.2 TEST SIGNAL, FREQUENCIES AND OUTPUT POWER.....                              | 12        |
| <b>4. DESCRIPTION OF THE TEST EQUIPMENT.....</b>                                | <b>13</b> |
| 4.1 MEASUREMENT SYSTEM AND COMPONENTS .....                                     | 13        |
| 4.1.1 Isotropic E-field Probe Type ES3DV3 .....                                 | 15        |
| 4.1.2 Isotropic E-field Probe Type EX3DV4 .....                                 | 15        |
| 4.2 PHANTOMS .....                                                              | 16        |
| 4.3 TISSUE SIMULANTS .....                                                      | 16        |
| 4.3.1 Tissue Simulant Recipes.....                                              | 16        |
| 4.4 SYSTEM VALIDATION AND SYSTEM CHECKING.....                                  | 17        |
| 4.4.1 System validation status.....                                             | 17        |
| 4.4.2 System checking .....                                                     | 17        |
| 4.5 TISSUE SIMULANTS USED IN THE MEASUREMENTS.....                              | 20        |
| <b>5. DESCRIPTION OF THE TEST PROCEDURE.....</b>                                | <b>22</b> |
| 5.1 DEVICE HOLDER.....                                                          | 22        |
| 5.2 TEST POSITIONS.....                                                         | 22        |
| 5.2.1 Against Phantom Head.....                                                 | 22        |
| 5.2.2 Body Worn Configuration.....                                              | 22        |
| 5.2.3 Wireless Router Configuration.....                                        | 23        |
| 5.3 SCAN PROCEDURES.....                                                        | 23        |
| 5.4 SAR AVERAGING METHODS.....                                                  | 23        |
| <b>6. MEASUREMENT UNCERTAINTY.....</b>                                          | <b>24</b> |
| <b>7. RESULTS.....</b>                                                          | <b>26</b> |
| 7.1 THE MEASURED HEAD SAR VALUES FOR THE TEST DEVICE ARE TABULATED BELOW: ..... | 26        |
| 7.1.1 Combined Head SAR data .....                                              | 32        |
| 7.2 THE MEASURED BODY SAR VALUES FOR THE TEST DEVICE ARE TABULATED BELOW: ..... | 33        |
| 7.2.1 Combined Body SAR data.....                                               | 39        |

|       |                                                                                |    |
|-------|--------------------------------------------------------------------------------|----|
| 7.3   | BODY SAR ASSESSMENT OF WIRELESS ROUTER MODE AT 10.0MM SEPARATION DISTANCE..... | 40 |
| 7.3.1 | <i>Combined Body SAR data</i> .....                                            | 46 |

**APPENDIX A: SYSTEM CHECK SCANS**

**APPENDIX B: MEASUREMENT SCANS**

**APPENDIX C: DIELECTRIC PARAMETERS OF THE TISSUE SIMULANTS**

**APPENDIX D: CONDUCTED AVERAGE POWER MEASUREMENTS FOR WCDMA AND HSUPA**

**APPENDIX E: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S)**

**APPENDIX F: RELEVANT PAGES FROM DIPOLE VALIDATION REPORT(S)**

**APPENDIX G: CONDUCTED POWER MEASUREMENTS FOR SUPPORTED GSM/GPRS/EGPRS TRANSMISSION MODES**

**APPENDIX H: CONDUCTED POWER MEASUREMENTS FOR SUPPORTED WCDMA TRANSMISSION MODES**

**APPENDIX I: CONDUCTED POWER MEASUREMENTS FOR SUPPORTED WLAN TRANSMISSION MODES**

## 1. SUMMARY OF SAR TEST REPORT

### 1.1 Test Details

|                                        |                                                                                                                                                                                                                                                                                                                                                                                               |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Period of test                         | 2014-05-13 to 2014-04-20                                                                                                                                                                                                                                                                                                                                                                      |
| SN, HW and SW numbers of tested device | SN: 004402/47/827374/5, HW: 1500, SW: 01068.00004.14182.20000, DUT: 18322<br>SN: 004402/47/827370/3, HW: 1500, SW: 01068.00004.14182.20000, DUT: 18323<br>SN: 004402/47/827381/0, HW: 1500, SW: 01068.00004.14182.20000, DUT: 18325<br>SN: 004402/47/827366/1, HW: 1500, SW: 01068.00004.14182.20000, DUT: 18326<br>SN: 004402/47/827363/8, HW: 1500, SW: 01068.00004.14182.20000, DUT: 18327 |
| Batteries used in testing              | BL-5J, DUT: 18328, 18329, 18330, 18331, 18332, 18333, 18337, 18338, 18339, 18344, 18345, 18346, 18347, 18353, 18354, 18355, 18356, 18357                                                                                                                                                                                                                                                      |
| Headsets used in testing               | WH-108, DUT: 17570, 17110, 17109, 17108                                                                                                                                                                                                                                                                                                                                                       |
| Other accessories used in testing      | -                                                                                                                                                                                                                                                                                                                                                                                             |
| State of sample                        | Prototype unit                                                                                                                                                                                                                                                                                                                                                                                |
| Notes                                  | -                                                                                                                                                                                                                                                                                                                                                                                             |

### 1.2 Maximum Results

The maximum measured SAR values for Head configuration, Body Worn configuration and Wireless Router configuration are given in section 1.2.1, 1.2.2 and 1.2.3 respectively. The device conforms to the requirements of the standard(s) when the maximum measured SAR value is less than or equal to the limit.

#### 1.2.1 Head Configuration

| Mode               | Ch / f (MHz) | Conducted power | Position     | Measured SAR value (1g avg) | Reported* SAR value (1g avg) | SAR limit (1g avg) | Result        | Plot # |
|--------------------|--------------|-----------------|--------------|-----------------------------|------------------------------|--------------------|---------------|--------|
| 2-slot GPRS850     | 251/848.8    | 29.7 dBm        | Left, Cheek  | 0.631 W/kg                  | <b>0.74 W/kg</b>             | 1.6 W/kg           | <b>PASSED</b> | 1      |
| WCDMA850 (Band 5)  | 4233/846.6   | 23.3 dBm        | Right, Cheek | 0.590 W/kg                  | <b>0.68 W/kg</b>             | 1.6 W/kg           | <b>PASSED</b> | 2      |
| 3-slot GPRS1900    | 512/1850.2   | 25.6 dBm        | Left, Cheek  | 0.404 W/kg                  | <b>0.45 W/kg</b>             | 1.6 W/kg           | <b>PASSED</b> | 3      |
| WCDMA1900 (Band 2) | 9262/1852.4  | 21.8 dBm        | Left, Cheek  | 0.625 W/kg                  | <b>0.72 W/kg</b>             | 1.6 W/kg           | <b>PASSED</b> | 4      |
| WLAN 2450          | 1/2412.0     | 17.2 dBm        | Left, Cheek  | 0.259 W/kg                  | <b>0.35 W/kg</b>             | 1.6 W/kg           | <b>PASSED</b> | 5      |

(Table continues)

(Table continues)

|                                     |   |   |                 |            |                  |          |               |   |
|-------------------------------------|---|---|-----------------|------------|------------------|----------|---------------|---|
| 2-slot<br>GPRS850<br>+ WLAN2450     | - | - | Left,<br>Cheek  | 0.635 W/kg | <b>0.75 W/kg</b> | 1.6 W/kg | <b>PASSED</b> | - |
| WCDMA850<br>(Band 5)<br>+ WLAN2450  | - | - | Right,<br>Cheek | 0.590 W/kg | <b>0.68 W/kg</b> | 1.6 W/kg | <b>PASSED</b> | - |
| 3-slot<br>GPRS1900<br>+ WLAN24500   | - | - | Left,<br>Cheek  | 0.404 W/kg | <b>0.45 W/kg</b> | 1.6 W/kg | <b>PASSED</b> | - |
| WCDMA1900<br>(Band 2)<br>+ WLAN2450 | - | - | Left,<br>Cheek  | 0.625 W/kg | <b>0.72 W/kg</b> | 1.6 W/kg | <b>PASSED</b> | - |

### 1.2.2 Body Worn Configuration

| Mode                                | Ch / f<br>(MHz) | Conducted<br>power | Separation<br>distance | Measured<br>SAR value<br>(1g avg) | Reported*<br>SAR value<br>(1g avg) | SAR limit<br>(1g avg) | Result        | Plot<br># |
|-------------------------------------|-----------------|--------------------|------------------------|-----------------------------------|------------------------------------|-----------------------|---------------|-----------|
| 2-slot<br>GPRS850                   | 251/<br>848.8   | 29.7 dBm           | 1.5 cm                 | 0.780 W/kg                        | <b>0.92 W/kg</b>                   | 1.6 W/kg              | <b>PASSED</b> | 6         |
| WCDMA850<br>(Band 5)                | 4233/<br>846.6  | 23.3 dBm           | 1.5 cm                 | 0.739 W/kg                        | <b>0.85 W/kg</b>                   | 1.6 W/kg              | <b>PASSED</b> | 7         |
| 3-slot<br>GPRS1900                  | 810/<br>1909.8  | 25.5 dBm           | 1.5 cm                 | 0.668 W/kg                        | <b>0.77 W/kg</b>                   | 1.6 W/kg              | <b>PASSED</b> | 8         |
| WCDMA1900<br>(Band 2)               | 9538/<br>1907.6 | 21.9 dBm           | 1.5 cm                 | 0.917 W/kg                        | <b>1.03 W/kg</b>                   | 1.6 W/kg              | <b>PASSED</b> | 9         |
| WLAN2450                            | 11/<br>2462.0   | 17.8 dBm           | 1.5 cm                 | 0.108 W/kg                        | <b>0.13 W/kg</b>                   | 1.6 W/kg              | <b>PASSED</b> | 10        |
| 2-slot<br>GPRS850<br>+ WLAN2450     | -               | -                  | 1.5 cm                 | 0.861 W/kg                        | <b>1.01 W/kg</b>                   | 1.6 W/kg              | <b>PASSED</b> | -         |
| WCDMA850<br>(Band 5)<br>+ WLAN2450  | -               | -                  | 1.5 cm                 | 0.824 W/kg                        | <b>0.95 W/kg</b>                   | 1.6 W/kg              | <b>PASSED</b> | -         |
| 3-slot<br>GPRS1900<br>+ WLAN24500   | -               | -                  | 1.5 cm                 | 0.668 W/kg                        | <b>0.77 W/kg</b>                   | 1.6 W/kg              | <b>PASSED</b> | -         |
| WCDMA1900<br>(Band 2)<br>+ WLAN2450 | -               | -                  | 1.5 cm                 | 0.917 W/kg                        | <b>1.03 W/kg</b>                   | 1.6 W/kg              | <b>PASSED</b> | -         |

### 1.2.3 Wireless Router Configuration

#### Summary of Maximum Results for Wireless Router mode at 10.0mm

| Mode                                | Ch / f<br>(MHz) | Conducted<br>power | Separation<br>distance | Measured<br>SAR value<br>(1g avg) | Reported*<br>SAR value<br>(1g avg) | SAR limit<br>(1g avg) | Result        | Plot<br># |
|-------------------------------------|-----------------|--------------------|------------------------|-----------------------------------|------------------------------------|-----------------------|---------------|-----------|
| 4-slot<br>GPRS850                   | 251/<br>848.8   | 26.3 dBm           | 10.0 mm                | 1.00 W/kg                         | <b>1.15 W/kg</b>                   | 1.6 W/kg              | <b>PASSED</b> | 11        |
| WCDMA850<br>(Band 5)                | 4233/<br>846.6  | 23.1 dBm           | 10.0 mm                | 0.99 W/kg                         | <b>1.19 W/kg</b>                   | 1.6 W/kg              | <b>PASSED</b> | 12        |
| 2-slot<br>GPRS1900                  | 810/<br>1909.8  | 23.5 dBm           | 10.0 mm                | 0.760 W/kg                        | <b>0.83 W/kg</b>                   | 1.6 W/kg              | <b>PASSED</b> | 13        |
| WCDMA1900<br>(Band 2)               | 9538/<br>1907.6 | 17.7 dBm           | 10.0 mm                | 0.857 W/kg                        | <b>0.90W/kg</b>                    | 1.6 W/kg              | <b>PASSED</b> | 14        |
| WLAN2450                            | 1/<br>2412.0    | 17.2 dBm           | 10.0 mm                | 0.166 W/kg                        | <b>0.22 W/kg</b>                   | 1.6 W/kg              | <b>PASSED</b> | 15        |
| 4-slot<br>GPRS850<br>+ WLAN2450     | -               | -                  | 10.0 mm                | 1.12 W/kg                         | <b>1.31 W/kg</b>                   | 1.6 W/kg              | <b>PASSED</b> | -         |
| WCDMA850<br>(Band 5)<br>+ WLAN2450  | -               | -                  | 10.0 mm                | 1.10 W/kg                         | <b>1.33 W/kg</b>                   | 1.6 W/kg              | <b>PASSED</b> | -         |
| 2-slot<br>GPRS1900<br>+ WLAN24500   | -               | -                  | 10.0 mm                | 0.792 W/kg                        | <b>0.87 W/kg</b>                   | 1.6 W/kg              | <b>PASSED</b> | -         |
| WCDMA1900<br>(Band 2)<br>+ WLAN2450 | -               | -                  | 10.0 mm                | 0.877 W/kg                        | <b>0.92 W/kg</b>                   | 1.6 W/kg              | <b>PASSED</b> | -         |

\* Reported SAR values are scaled to, or measured at, upper limit of power tuning tolerance.

#### 1.2.4 Summary SAR data

|                                                                                                   | FCC-defined SAR values for the Grants of Equipment Authorization |            |     |
|---------------------------------------------------------------------------------------------------|------------------------------------------------------------------|------------|-----|
|                                                                                                   | PCE                                                              | DTS        | NII |
| <b>Maximum Head SAR values</b>                                                                    | 0.741 W/kg                                                       | 0.349 W/kg | -   |
| {Max + Max} Simultaneous Head SAR value                                                           | 1.09 W/kg                                                        |            |     |
| <b>Maximum Body SAR values</b>                                                                    | 1.03 W/kg                                                        | 0.127 W/kg | -   |
| {Max + Max} Simultaneous Body SAR value                                                           | 1.14 W/kg                                                        |            |     |
| <b>Maximum Product Specific (Wireless Router) SAR values</b>                                      | 1.19 W/kg                                                        | 0.224 W/kg | -   |
| {Max + Max} Simultaneous Product Specific SAR value                                               | 1.37 W/kg                                                        |            |     |
| <b>Maximum Simultaneous SAR value</b><br><b>Wireless Router SAR: WCDMA850 (Band 5) + WLAN2450</b> | 1.37 W/kg                                                        |            |     |

**Note:**

PCE contains the highest results between all cellular modes (cellular, AWS and PCS bands)

DTS contains the highest results between WLAN 2.4GHz + RLAN 5725-5850MHz

NII contains the highest results between RLAN 5150-5250, 5250-5350 and 5470-5725

#### 1.2.5 Maximum Drift

|                                                             |                                   |
|-------------------------------------------------------------|-----------------------------------|
| Maximum drift covered by<br>5% scaling up of the SAR values | Maximum drift during measurements |
| 0.2dB                                                       | 0.18dB                            |

## 1.2.6 Measurement Uncertainty

|                                |         |
|--------------------------------|---------|
| Expanded Uncertainty (k=2) 95% | ± 29.8% |
|--------------------------------|---------|

## 2. DESCRIPTION OF THE DEVICE UNDER TEST

|                      |                                   |
|----------------------|-----------------------------------|
| Device category      | Portable                          |
| Exposure environment | General population / uncontrolled |

| Modes of Operation | Bands          | Modulation Mode | Duty Cycle | Transmitter Frequency Range (MHz) | Power Tuning Target (dBm)  |         |        |        | Upper Limit of Power Tuning Tolerance (dBm) |         |        |        |
|--------------------|----------------|-----------------|------------|-----------------------------------|----------------------------|---------|--------|--------|---------------------------------------------|---------|--------|--------|
|                    |                |                 |            |                                   | 1-slot                     | 2-slot  | 3-slot | 4-slot | 1-slot                                      | 2-slot  | 3-slot | 4-slot |
| GSM / GPRS         | 850            | GMSK            | 1/8 to 4/8 | 824 – 849                         | 32.5                       | 30.0    | 28.2   | 27.0   | 32.9                                        | 30.4    | 28.6   | 27.4   |
|                    | 1900           |                 |            | 1850 – 1910                       | 29.5                       | 27.5    | 25.7   | 24.5   | 29.9                                        | 27.9    | 26.1   | 24.9   |
| EGPRS              | 850            | GMSK            | 1/8 to 4/8 | 824 – 849                         | 26.5                       | 26.5    | 25.7   | 24.5   | 26.9                                        | 26.9    | 26.1   | 24.9   |
|                    | 1900           |                 |            | 1850 – 1910                       | 25.5                       | 25.5    | 25.0   | 24.0   | 25.9                                        | 25.9    | 25.4   | 24.4   |
| WCDMA              | 850 (Band V)   |                 | 1          | 826 – 847                         | 23.5                       |         |        |        | 23.9                                        |         |        |        |
| WCDMA              | 1900 (Band II) |                 | 1          | 1852 – 1908                       | 22.0                       |         |        |        | 22.4                                        |         |        |        |
| HSUPA              | 850 (Band V)   |                 | 1          | 826 – 847                         | See Appendix D for details |         |        |        |                                             |         |        |        |
| HSUPA              | 1900 (Band II) |                 | 1          | 1852 – 1908                       | See Appendix D for details |         |        |        |                                             |         |        |        |
| BT                 | 2450           | GFSK            | 1          | 2402 – 2480                       | 10.5                       |         |        |        | 12.0                                        |         |        |        |
|                    |                |                 |            |                                   | Ch 1                       | Ch 2-10 |        | Ch 11  | Ch 1                                        | Ch 2-10 |        | Ch 11  |
| WLAN b-mode        | 2450           | BPSK            | 1          | 2412 – 2472                       | 17.0                       | 17.0    | 17.0   | 18.5   | 18.5                                        | 18.5    |        |        |
| WLAN g-mode        | 2450           | OFDM            | 1          | 2412 – 2472                       | 12.0                       | 16.5    | 12.0   | 13.5   | 18.0                                        | 13.5    |        |        |
| WLAN n-mode        | 2450           | OFDM            | 1          | 2412 – 2462<br>2412 – 2472        | 12.0                       | 16.5    | 12.0   | 13.5   | 18.0                                        | 13.5    |        |        |

Outside of USA and Canada, the transmitter of the device is capable of operating also in GSM/GPRS/EGPRS900, WCDMA/HSUPA900, GSM/GPRS/EGPRS1800 and WCDMA/HSUPA2100 bands which are not part of this filing.

This device has Voice-over-IP/Dual Transfer Mode capability for use at the ear. Therefore, SAR for multi slot GPRS mode was evaluated against the head profile of the phantom. Dual Transfer Mode is a feature that utilises the multi-slot GPRS capability in this device; it allows



simultaneous transmission of voice and data during the same call, using the same transmitter and antenna.

This device has also HSUPA capabilities in all WCDMA bands listed above. HSUPA target powers are always lower than or equal to the corresponding WCDMA target power listed above, details of the HSUPA MPR scheme, power targets and power results can be found in Appendix D. This is a WCDMA HSUPA device, but SAR tests for HSUPA mode have not been performed as no HSUPA Sub-test mode has an average power > 0.25dB above the basic WCDMA 12.2kbps RMC mode. Appendix C of this report gives a summary of the measured WCDMA and HSUPA average powers; a detailed report of these WCDMA and HSUPA conducted power tests is submitted separately.

This is a BT Class 1 device and its power tuning target upper limit is 11.5dBm. WLAN2450 power tuning target upper limit is 17.5dBm. Since WLAN2450 and BT use same frequency and antenna, WLAN2450 power is 6.0dB higher, and they cannot transmit simultaneously, the WLAN2450 standalone SAR is conservative estimation of BT SAR. As WLAN2450 SAR result is below limit, also BT SAR can be deemed to comply without further analysis or standalone measurements. Also WLAN2450+cellular bands combined SAR results can be regarded as conservative estimation of BT+cellular combined SARs. As WLAN2450+cellular combined SAR result are below limit, also BT+cellular combined SAR can be deemed to comply without further analysis and estimations required in KDB 447498 for simultaneous transmission exclusion.

This device has Wireless Router "Hotspot" mode capability.

Simultaneous transmission of any singular cellular and PCS band is possible with WLAN in Head, Body-worn and Wireless router use according to the table below.

| Simultaneous transmission capabilities in Head, Body-worn and Wireless Router use |          |
|-----------------------------------------------------------------------------------|----------|
|                                                                                   | WLAN2450 |
| GSM/GPRS/EGPRS850                                                                 | ✓        |
| GSM/GPRS/EGPRS1900                                                                | ✓        |
| WCDMA850 (Band 5)                                                                 | ✓        |
| WCDMA1900 (Band 2)                                                                | ✓        |


## 2.1 Power reductions in Wireless Router configurations

The following table details the power reductions active in Wireless Router mode:

| Band                                       | Power reduction in WR mode                                   | Target tuning power in WR mode                                                               |                                                                                                  |                |
|--------------------------------------------|--------------------------------------------------------------|----------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|----------------|
| GPRS/EGPRS850                              | 0.5 dB/0.0dB                                                 | 1-slot GPRS: 32.0dBm<br>2-slot GPRS: 29.5dBm<br>3-slot GPRS: 27.7dBm<br>4-slot GPRS: 26.5dBm | 1-slot EGPRS: 26.5dBm<br>2-slot EGPRS: 26.5dBm<br>3-slot EGPRS: 25.7dBm<br>4-slot EGPRS: 24.5dBm |                |
| WCDMA850                                   | 0 dB                                                         | 23.5dBm                                                                                      |                                                                                                  |                |
| GPRS/EGPRS1900                             | 3.0 dB/0.0dB<br>4.0 dB/3.0dB<br>4.0 dB/3.8dB<br>4.0 dB/4.5dB | 1-slot GPRS: 26.5dBm<br>2-slot GPRS: 23.5dBm<br>3-slot GPRS: 21.7dBm<br>4-slot GPRS: 20.5dBm | 1-slot EGPRS: 25.5dBm<br>2-slot EGPRS: 22.5dBm<br>3-slot EGPRS: 21.2dBm<br>4-slot EGPRS: 19.5dBm |                |
| WCDMA1900                                  | 4.5 dB                                                       | 17.5dBm                                                                                      |                                                                                                  |                |
| WLAN2450 b-mode<br>(DSSS 1 Mbps)           | 0 dB                                                         | Ch 1: 17.0dBm                                                                                | Ch 2-10: 17.0dBm                                                                                 | Ch 11: 17.0dBm |
| WLAN2450 g-mode<br>(OFDM 6 Mbps)           | 0 dB                                                         | Ch 1: 12.0dBm                                                                                | Ch 2-10: 16.5dBm                                                                                 | Ch 11: 12.0dBm |
| WLAN2450 n-mode<br>(MCS 0 – OFDM 6.5 Mbps) | 0 dB                                                         | Ch 1: 12.0dBm                                                                                | Ch 2-10: 16.5dBm                                                                                 | Ch 11: 12.0dBm |

## 2.2 Description of the Antenna

The device has internal antennas for both cellular and WLAN use. The cellular antenna is located at the near bottom underneath the back cover. The WLAN antenna is located at the top underneath the back cover.

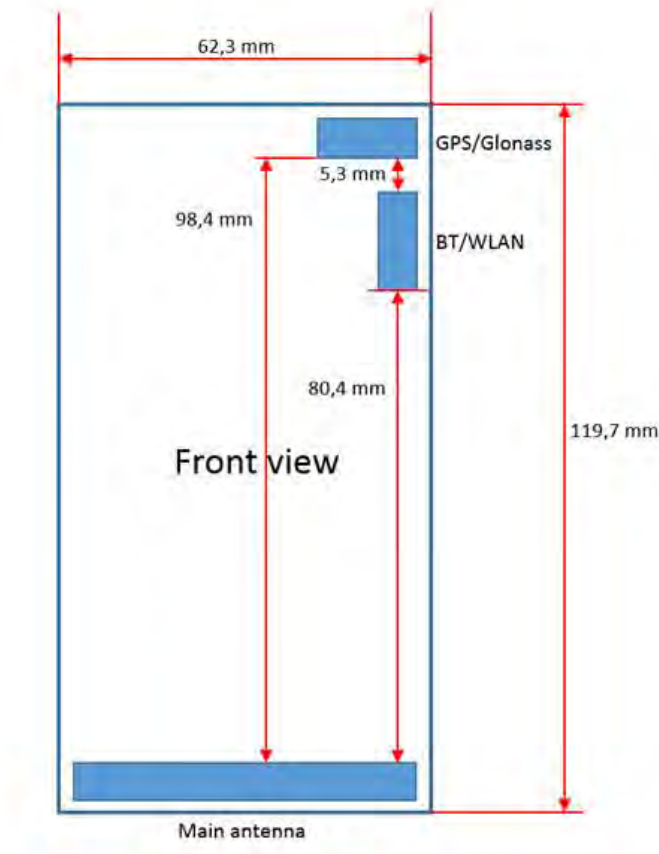

## 3. TEST CONDITIONS

### 3.1 Temperature and Humidity

|                           |             |
|---------------------------|-------------|
| Ambient temperature (°C): | 20.5 – 22.5 |
| Ambient humidity (RH %):  | 35 - 55     |

---

### 3.2 Test Signal, Frequencies and Output Power

The device was put into operation by using a call tester except for testing WLAN2450 where control software was used. Communication between the device and the call tester was established by air link.

The conducted output power of the device was measured by a separate test laboratory on the same unit(s) as used for SAR testing. The results are given in the appendixes G-I of this report.

The device output power was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

In all operating bands the measurements were performed on lowest, middle and highest channels, and/or on all required test channels as defined in Published FCC KDB Procedures.

The number of Tx slots in all GSM/GPRS mode tests was based on tuning target/conducted power data, see Appendix H. The number of slots with highest or equal highest time-average power was tested.

The transmission mode of the device in all WCDMA tests was configured to 12.2kbps RMC with all TPC bits set as "1". All WCDMA testing has been carried out in accordance with FCC KDB 941225: SAR Measurement Procedures for 3G Devices.

The transmission mode of the device in all WLAN b-mode tests was BPSK 1Mbps. This mode has the highest time-averaged output power of all the WLAN a, b, g and n modulation modes in this device as illustrated in table in Appendix I. All WLAN testing has been carried out in accordance with FCC KDB 248227: SAR Measurement Procedures for 802.11 a/b/g Transmitters.

Here is a summary list of the KDB documents used in the reported testing:

KDB 941225 D01 SAR Measurement Procedures for 3G Devices  
KDB 248227: SAR Measurement Procedures for 802.11 a/b/g Transmitters  
KDB 648474 D04 SAR Handsets Multi Xmitter and Ant v01  
KDB 941225 D06 v01 Hot Spot SAR  
KDB 447498 D01 General RF Exposure Guidance v05  
KDB 690783 D01 SAR Listings on Grants  
KDB 865664 D01 SAR Measurements 100MHz to 6GHz v01  
KDB 865664 D02 SAR Reporting v01

#### 4. DESCRIPTION OF THE TEST EQUIPMENT

##### 4.1 Measurement System and Components

The measurements were performed using an automated DASY near-field scanning system manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland. The SAR extrapolation algorithm used in all measurements was the 'advanced extrapolation' algorithm.

The following table lists calibration dates of SPEAG components:

| Test Equipment                 | Serial Number | Calibration date | Calibration expiry |
|--------------------------------|---------------|------------------|--------------------|
| DAE4                           | 793           | 2013-06          | 2014-06            |
| DAE4                           | 538           | 2013-11          | 2014-11            |
| DAE4                           | 1302          | 2013-11          | 2014-11            |
| E-field Probe ES3DV3           | 3194          | 2013-11          | 2014-11            |
| E-field Probe ES3DV3           | 3131          | 2013-06          | 2014-06            |
| E-field Probe EX3DV4           | 3960          | 2013-12          | 2014-12            |
| Dipole Validation Kit, D835V2  | 480           | 2012-12          | 2014-12            |
| Dipole Validation Kit, D1900V2 | 5d013         | 2012-12          | 2014-12            |
| Dipole Validation Kit, D2450V2 | 749           | 2012-12          | 2014-12            |
| DASY5 software                 | Version 52.8  | -                | -                  |

Additional test equipment used in testing:

| Test Equipment       | Model      | Serial Number | Calibration date | Calibration expiry |
|----------------------|------------|---------------|------------------|--------------------|
| Signal Generator     | E4438C     | MY42080610    | 2013-08          | 2014-08            |
| Signal Generator     | SML03      | 101264        | 2013-08          | 2014-08            |
| Signal Generator     | E4436B     | US39260114    | 2013-08          | 2014-08            |
| Amplifier            | 5S1G4M3    | 302338        | -                | -                  |
| Amplifier            | ZHL-42-SMA | N072095-5     | -                | -                  |
| Amplifier            | 5S1G4      | 25583         | -                | -                  |
| Power Meter          | NRVS       | 838624/032    | 2013-08          | 2014-08            |
| Power Meter          | NRVD       | 840023/028    | 2013-08          | 2014-08            |
| Power Meter          | NRVZ       | 849305/029    | 2013-08          | 2014-08            |
| Power Sensor         | NRV-Z32    | 100067        | 2013-08          | 2014-08            |
| Power Sensor         | NRV-Z32    | 849745/018    | 2013-08          | 2014-08            |
| Power Sensor         | NRV-Z32    | 825600/002    | 2013-08          | 2014-08            |
| Call Tester          | CMU 200    | 103293        | -                | -                  |
| Call Tester          | CMU 200    | 104983        | -                | -                  |
| Call Tester          | CMU 200    | 103294        | -                | -                  |
| Network Analyzer     | ENA E5071C | MY46213166    | 2013-08          | 2014-08            |
| Dielectric Probe Kit | DAK-3.5    | 1042          | -                | -                  |

#### 4.1.1 Isotropic E-field Probe Type ES3DV3

|                      |                                                                                                                                                                                              |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Construction</b>  | Symmetrical design with triangular core<br>Interleaved sensors<br>Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, e.g., butyl diglycol) |
| <b>Calibration</b>   | Calibration certificate in Appendix E                                                                                                                                                        |
| <b>Frequency</b>     | 10 MHz to 4 GHz (dosimetry); Linearity: $\pm 0.2$ dB (30 MHz to 4 GHz)                                                                                                                       |
| <b>Directivity</b>   | $\pm 0.2$ dB in HSL (rotation around probe axis)<br>$\pm 0.3$ dB in HSL (rotation normal to probe axis)                                                                                      |
| <b>Dynamic Range</b> | 5 $\mu\text{W/g}$ to $> 100$ mW/g; Linearity: $\pm 0.2$ dB                                                                                                                                   |
| <b>Dimensions</b>    | Overall length: 330 mm<br>Tip length: 20 mm<br>Body diameter: 12 mm<br>Tip diameter: 3.9 mm                                                                                                  |
| <b>Application</b>   | Distance from probe tip to dipole centers: 2.0 mm<br>General dosimetry up to 4 GHz<br>Compliance tests of mobile phones<br>Fast automatic scanning in arbitrary phantoms                     |

#### 4.1.2 Isotropic E-field Probe Type EX3DV4

|                      |                                                                                                                                                                          |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Construction</b>  | Symmetrical design with triangular core<br>Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, e.g., DGBE)              |
| <b>Calibration</b>   | Calibration certificate in Appendix E                                                                                                                                    |
| <b>Frequency</b>     | 10 MHz to $> 6$ GHz (dosimetry); Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)                                                                                               |
| <b>Directivity</b>   | $\pm 0.3$ dB in HSL (rotation around probe axis)<br>$\pm 0.5$ dB in tissue material (rotation normal to probe axis)                                                      |
| <b>Dynamic Range</b> | 10 $\mu\text{W/g}$ to $> 100$ mW/g; Linearity: $\pm 0.2$ dB                                                                                                              |
| <b>Dimensions</b>    | Overall length: 330 mm<br>Tip length: 10 mm<br>Body diameter: 12 mm<br>Tip diameter: 2.5 mm                                                                              |
| <b>Application</b>   | Distance from probe tip to dipole centers: 1.0 mm<br>General dosimetry up to 6 GHz<br>Compliance tests of mobile phones<br>Fast automatic scanning in arbitrary phantoms |

## 4.2 Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The phantom conforms to the requirements of IEEE 1528.

The SPEAG device holder (see Section 5.1) was used to position the device in all tests whilst a tripod was used to position the validation dipoles against the flat section of phantom.

## 4.3 Tissue Simulants

Recommended values for the dielectric parameters of the tissue simulants are given in IEEE 1528 and FCC published RF Exposure KDB Procedures. All tests were carried out using simulants whose dielectric parameters were within  $\pm 5\%$  of the recommended values. All tests were carried out within 24 hours of measuring the dielectric parameters.

The depth of the tissue simulant was at least 15.0 cm measured from the ear reference point during system checking and device measurements.

### 4.3.1 Tissue Simulant Recipes

The following recipe(s) were used for Head and Body tissue simulant(s):

#### 800MHz band

| Ingredient      | Head<br>(% by weight) | Body<br>(% by weight) |
|-----------------|-----------------------|-----------------------|
| Deionised Water | 51.50                 | 69.25                 |
| Tween 20        | 47.35                 | 30.00                 |
| Salt            | 1.15                  | 0.75                  |

#### 1900MHz band

| Ingredient      | Head<br>(% by weight) | Body<br>(% by weight) |
|-----------------|-----------------------|-----------------------|
| Deionised Water | 54.50                 | 70.25                 |
| Tween 20        | 45.23                 | 29.41                 |
| Salt            | 0.27                  | 0.34                  |

#### 2450MHz band

| Ingredient      | Head<br>(% by weight) | Body<br>(% by weight) |
|-----------------|-----------------------|-----------------------|
| Deionised Water | 56.0                  | 70.20                 |
| Tween 20        | 44.0                  | 29.62                 |
| Salt            | -                     | 0.18                  |



## 4.4 System validation and System checking

### 4.4.1 System validation status

| Probe Calibration Point f / MHz | Test System      | DASY SW | Dipole Type / SN | Probe Type / SN | Calibrated signal type(s) | DAE unit Type / SN | Validation done      |                      |
|---------------------------------|------------------|---------|------------------|-----------------|---------------------------|--------------------|----------------------|----------------------|
|                                 |                  |         |                  |                 |                           |                    | Head tissue simulant | Body tissue simulant |
| 835                             | TCC Salo / SAR-2 | V52.8   | D835V2 / 480     | ES3DV3 / 3194   | CW                        | DAE4 / 538         | 2014-02              | 2013-12              |
| 1900                            | TCC Salo / SAR-1 | V52.8   | D1900V2 / 5d013  | ES3DV3 / 3131   | CW                        | DAE4 / 793         | 2013-07              | 2013-07              |
| 2450                            | TCC Salo / SAR-4 | V52.8   | D2450V2 / 749    | EX3DV4 / 3960   | CW                        | DAE4 / 1302        | 2014-01              | 2014-01              |

### 4.4.2 System checking

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyser. A system check measurement was made following the determination of the dielectric parameters of the simulant, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom for head system checking, and under the flat phantom for body system checking. The system checking results (dielectric parameters and SAR values) are given in the table below.

### System checking, head tissue simulant

| f<br>[MHz] | Description               | SAR 1g<br>[W/kg] | Estimated<br>SAR 1g<br>[W/kg] | Estimated<br>SAR 1g<br>Deviation | Scaled<br>1W SAR<br>1g<br>[W/kg] | Dielectric<br>Parameters* |            | SAR 1g<br>Deviation<br>from<br>target            | Dielectric<br>Parameters<br>Deviation from<br>target |                     | Temp<br><br>[°C] | Plot<br># |
|------------|---------------------------|------------------|-------------------------------|----------------------------------|----------------------------------|---------------------------|------------|--------------------------------------------------|------------------------------------------------------|---------------------|------------------|-----------|
|            |                           |                  |                               | dSAR [%]                         |                                  | ε <sub>r</sub>            | σ<br>[S/m] |                                                  | dSAR [%]                                             | dε <sub>r</sub> [%] |                  |           |
|            | Tolerances                |                  |                               | ±3%                              |                                  |                           |            | ±10 %                                            | ±5 %                                                 | ±5 %                |                  |           |
| 835        | Target result<br>SN:480   | -                | -                             | -                                | 9.40                             | 41.5                      | 0.90       | TCC Salo/SAR-2<br>ES3DV3 SN:3194<br>Head 835MHz  |                                                      |                     |                  |           |
|            | 2014-05-13                | 2.36             | 2.40                          | 1.69                             | 9.44                             | 40.5                      | 0.92       | 0.43                                             | -2.41                                                | 2.22                | 22.2             | -         |
|            | 2014-05-14                | 2.33             | 2.38                          | 2.15                             | 9.32                             | 40.2                      | 0.91       | -0.85                                            | -3.13                                                | 1.11                | 22.0             | 1         |
| 1900       | Target result<br>SN:5d013 | -                | -                             | -                                | 40.60                            | 40.0                      | 1.40       | TCC Salo/SAR-1<br>ES3DV3 SN:3131<br>Head 1900MHz |                                                      |                     |                  |           |
|            | 2014-05-13                | 9.47             | 9.60                          | 1.37                             | 37.88                            | 38.7                      | 1.39       | -6.70                                            | -3.25                                                | -0.71               | 21.4             | 2         |
| 2450       | Target result<br>SN:749   | -                | -                             | -                                | 53.90                            | 39.2                      | 1.80       | TCC Salo/SAR-4<br>EX3DV4 SN:3960<br>Head 2450MHz |                                                      |                     |                  |           |
|            | 2014-05-14                | 13.70            | 13.70                         | 0.00                             | 54.80                            | 39.3                      | 1.81       | 1.67                                             | 0.26                                                 | 0.56                | 21.2             | 3         |

\* Dielectric parameter reference data taken from IEEE1528/IEC62209

### System checking, body tissue simulant

| $f$<br>[MHz] | Description               | SAR 1g<br>[W/kg] | Estimated<br>SAR 1g<br>[W/kg] | Estimated<br>SAR 1g<br>Deviation | Scaled 1W<br>SAR 1g<br>[W/kg] | Dielectric<br>Parameters* |                   | SAR 1g<br>Deviation<br>from<br>target            | Dielectric<br>Parameters<br>Deviation from<br>target |                   | Tem<br>p | Plot<br># |
|--------------|---------------------------|------------------|-------------------------------|----------------------------------|-------------------------------|---------------------------|-------------------|--------------------------------------------------|------------------------------------------------------|-------------------|----------|-----------|
|              |                           |                  |                               | dSAR [%]                         |                               | $\epsilon_r$              | $\sigma$<br>[S/m] | dSAR [%]                                         | d $\epsilon_r$ [%]                                   | d $\sigma$<br>[%] | [°C]     |           |
|              | Tolerances                |                  |                               | ±3%                              |                               |                           |                   | ±10 %                                            | ±5 %                                                 | ±5 %              |          |           |
| 835          | Target result<br>SN:480   | -                | -                             | -                                | 9.51                          | 55.2                      | 0.97              | TCC Salo/SAR-2<br>ES3DV3 SN:3194<br>Body 835MHz  |                                                      |                   |          |           |
|              | 2014-05-19                | 2.36             | 2.40                          | 1.69                             | 9.44                          | 54.2                      | 0.96              | -0.74                                            | -1.81                                                | -1.03             | 21.4     |           |
|              | 2014-05-20                | 2.30             | 2.32                          | 0.87                             | 9.20                          | 54.2                      | 0.97              | -3.26                                            | -1.81                                                | 0.00              | 21.7     | 4         |
| 1900         | Target result<br>SN:5d013 | -                | -                             | -                                | 41.0                          | 53.3                      | 1.52              | TCC Salo/SAR-1<br>ES3DV3 SN:3131<br>Body 1900MHz |                                                      |                   |          |           |
|              | 2014-05-16                | 9.94             | 9.89                          | -0.50                            | 39.76                         | 52.2                      | 1.53              | -3.02                                            | -2.06                                                | 0.66              | 20.5     | 5         |
| 2450         | Target result<br>SN:749   | -                | -                             | -                                | 51.5                          | 52.7                      | 1.95              | TCC Salo/SAR-4<br>EX3DV4 SN:3960<br>Body 2450MHz |                                                      |                   |          |           |
|              | 2014-05-15                | 12.50            | 12.40                         | -0.80                            | 50.00                         | 52.5                      | 1.93              | -2.91                                            | -0.38                                                | -1.03             | 21.3     | -         |
|              | 2014-05-16                | 12.40            | 12.30                         | -0.81                            | 49.60                         | 52.3                      | 1.94              | -3.69                                            | -0.76                                                | -0.51             | 21.2     | 6         |

\* Dielectric parameter reference data taken from FCC Published RF Exposure KDB Procedures

Plots of the system checking scans are given in Appendix A.

#### 4.5 Tissue Simulants used in the Measurements

##### Head tissue simulant measurements

| f<br>[MHz] | Description       | Dielectric Parameters |                | Dielectric Parameters<br>Deviation from<br>recommended value |               | Temp<br>[°C] |
|------------|-------------------|-----------------------|----------------|--------------------------------------------------------------|---------------|--------------|
|            |                   | $\epsilon_r$          | $\sigma$ [S/m] | $d\epsilon_r$ [%]                                            | $d\sigma$ [%] |              |
|            | Tolerances        |                       |                | ±5 %                                                         | ±5 %          |              |
| 835        | Recommended value | 41.5                  | 0.90           |                                                              |               |              |
|            | 2014-05-13        | 40.5                  | 0.92           | -2.41                                                        | 2.22          | 22.2         |
|            | 2014-05-14        | 40.2                  | 0.91           | -3.13                                                        | 1.11          | 22.0         |
| 836        | Recommended value | 41.5                  | 0.90           |                                                              |               |              |
|            | 2014-05-13        | 40.5                  | 0.92           | -2.41                                                        | 2.22          | 22.2         |
|            | 2014-05-14        | 40.2                  | 0.91           | -3.13                                                        | 1.11          | 22.0         |
| 1880       | Recommended value | 40.0                  | 1.40           |                                                              |               |              |
|            | 2014-05-13        | 38.8                  | 1.37           | -3.00                                                        | -2.14         | 21.4         |
| 2437       | Recommended value | 39.2                  | 1.79           |                                                              |               |              |
|            | 2014-05-14        | 39.4                  | 1.80           | 0.51                                                         | 0.56          | 21.2         |

### Body tissue simulant measurements

| f<br>[MHz] | Description       | Dielectric Parameters |                | Dielectric Parameters<br>Deviation from<br>Recommended value |               | Temp<br>[°C] |
|------------|-------------------|-----------------------|----------------|--------------------------------------------------------------|---------------|--------------|
|            |                   | $\epsilon_r$          | $\sigma$ [S/m] | $d\epsilon_r$ [%]                                            | $d\sigma$ [%] |              |
|            | Tolerances        |                       |                | $\pm 5$ %                                                    | $\pm 5$ %     |              |
| 835        | Recommended value | 55.2                  | 0.97           |                                                              |               |              |
|            | 2014-05-19        | 54.2                  | 0.97           | -1.81                                                        | -1.03         | 21.4         |
|            | 2014-05-20        | 54.2                  | 0.97           | -1.81                                                        | 0.00          | 21.7         |
| 836        | Recommended value | 55.2                  | 0.97           |                                                              |               |              |
|            | 2014-05-19        | 54.2                  | 0.97           | -1.81                                                        | 0.00          | 21.4         |
|            | 2014-05-20        | 54.2                  | 0.97           | -1.81                                                        | 0.00          | 21.7         |
| 1880       | Recommended value | 53.3                  | 1.52           |                                                              |               |              |
|            | 2014-05-16        | 52.2                  | 1.50           | -2.06                                                        | -1.32         | 20.5         |
| 2437       | Recommended value | 52.7                  | 1.94           |                                                              |               |              |
|            | 2014-05-15        | 52.5                  | 1.91           | -0.38                                                        | -1.55         | 21.3         |
|            | 2014-05-16        | 52.3                  | 1.92           | -0.76                                                        | -1.03         | 21.2         |

Dielectric parameter data for the band edges is given in Appendix C.

## 5. DESCRIPTION OF THE TEST PROCEDURE

### 5.1 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the Dasy system.



Device holder supplied by SPEAG

A Microsoft designed spacer (illustrated below) was used to position the device within the SPEAG holder. The spacer positions the device so that the holder has minimal effect on the test results but still holds the device securely. The spacer was removed before the tests.



Microsoft spacer

### 5.2 Test Positions

#### 5.2.1 Against Phantom Head

Measurements were made in “cheek” and “tilt” positions on both the left hand and right hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

#### 5.2.2 Body Worn Configuration

The device was placed in the SPEAG holder using the Microsoft spacer and placed below the flat phantom. The distance between the device and the phantom was kept at the separation distance indicated in Section 1.2.2 using a separate flat spacer that was removed before the

---

start of the measurements. The device was oriented with both sides facing the phantom to find the highest results.

### 5.2.3 Wireless Router Configuration

The device was placed in the SPEAG holder and, in sequence, the back, display and each of the 4 edges was positioned 10.0mm away from the flat phantom. The spacer was removed before the start of the measurements.

## 5.3 Scan Procedures

First, area scans were used for determination of the field distribution. Next, a zoom scan, a minimum of 5x5x7 points covering a volume of at least 30x30x30mm, was performed around the highest E-field value to determine the averaged SAR value. Drift was determined by measuring the same point at the start of the area scan and again at the end of the zoom scan. Fast SAR is measured according to the KDB 447498 D01 General RF Exposure Guidance v05r01.

## 5.4 SAR Averaging Methods

The maximum SAR value was averaged over a cube of tissue using interpolation and extrapolation.

The interpolation, extrapolation and maximum search routines within Dasy4 are all based on the modified Quadratic Shepard's method (Robert J. Renka, "Multivariate Interpolation Of Large Sets Of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148).

The interpolation scheme combines a least-square fitted function method with a weighted average method. A trivariate 3-D / bivariate 2-D quadratic function is computed for each measurement point and fitted to neighbouring points by a least-square method. For the zoom scan, inverse distance weighting is incorporated to fit distant points more accurately. The interpolating function is finally calculated as a weighted average of the quadratics.

In the zoom scan, the interpolation function is used to extrapolate the Peak SAR from the deepest measurement points to the inner surface of the phantom.

## 6. MEASUREMENT UNCERTAINTY

Table 6.1 – Measurement uncertainty evaluation for 1g Full SAR in 0.3-6GHz range

| Uncertainty Component                                                           | Section in IEEE 1528 | Tol. (%) | Prob Dist | Div        | $G_i$           | $G_i \cdot U_i$ (%) | $V_i$ |
|---------------------------------------------------------------------------------|----------------------|----------|-----------|------------|-----------------|---------------------|-------|
| <b>Measurement System</b>                                                       |                      |          |           |            |                 |                     |       |
| Probe Calibration                                                               | E2.1                 | ±6.6     | N         | 1          | 1               | ±6.6                | ∞     |
| Axial Isotropy                                                                  | E2.2                 | ±4.7     | R         | $\sqrt{3}$ | $(1-c_p)^{1/2}$ | ±1.9                | ∞     |
| Hemispherical Isotropy                                                          | E2.2                 | ±9.6     | R         | $\sqrt{3}$ | $(c_p)^{1/2}$   | ±3.9                | ∞     |
| Boundary Effect                                                                 | E2.3                 | ±2.0     | R         | $\sqrt{3}$ | 1               | ±1.2                | ∞     |
| Linearity                                                                       | E2.4                 | ±4.7     | R         | $\sqrt{3}$ | 1               | ±2.7                | ∞     |
| System Detection Limits                                                         | E2.5                 | ±1.0     | R         | $\sqrt{3}$ | 1               | ±0.6                | ∞     |
| Modulation response                                                             | E2.5                 | ±2.4     | R         | $\sqrt{3}$ | 1               | ±1.4                |       |
| Readout Electronics                                                             | E2.6                 | ±0.3     | N         | 1          | 1               | ±0.3                | ∞     |
| Response Time                                                                   | E2.7                 | ±0.8     | R         | $\sqrt{3}$ | 1               | ±0.5                | ∞     |
| Integration Time                                                                | E2.8                 | ±2.6     | R         | $\sqrt{3}$ | 1               | ±1.5                | ∞     |
| RF Ambient Conditions - Noise                                                   | E6.1                 | ±3.0     | R         | $\sqrt{3}$ | 1               | ±1.7                | ∞     |
| RF Ambient Conditions - Reflections                                             | E6.1                 | ±3.0     | R         | $\sqrt{3}$ | 1               | ±1.7                | ∞     |
| Probe Positioner Mechanical Tolerance                                           | E6.2                 | ±0.8     | R         | $\sqrt{3}$ | 1               | ±0.5                | ∞     |
| Probe Positioning with respect to Phantom Shell                                 | E6.3                 | ±6.7     | R         | $\sqrt{3}$ | 1               | ±3.9                | ∞     |
| Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation | E5                   | ±4.0     | R         | $\sqrt{3}$ | 1               | ±2.3                | ∞     |
| <b>Test sample Related</b>                                                      |                      |          |           |            |                 |                     |       |
| Test Sample Positioning                                                         | E4.2                 | ±6.0     | N         | 1          | 1               | ±6.0                | 11    |
| Device Holder Uncertainty                                                       | E4.1                 | ±3.6     | N         | 1          | 1               | ±3.6                | 5     |
| Output Power Variation - SAR drift measurement                                  | E2.9                 | ±5.0     | R         | $\sqrt{3}$ | 1               | ±2.9                | ∞     |
| <b>Phantom and Tissue Parameters</b>                                            |                      |          |           |            |                 |                     |       |
| Phantom Uncertainty (shape and thickness tolerances)                            | E3.1                 | ±6.6     | R         | $\sqrt{3}$ | 1               | ±3.8                | ∞     |
| SAR correction                                                                  | E3.2                 | ±1.9     | R         | $\sqrt{3}$ | 1               | ±1.1                | ∞     |
| Conductivity Target - tolerance                                                 | E3.4                 | ±5.0     | R         | $\sqrt{3}$ | 0.6             | ±1.8                | ∞     |
| Conductivity - measurement uncertainty                                          | E3.3                 | ±5.5     | N         | 1          | 0.6             | ±3.5                | 5     |
| Permittivity Target - tolerance                                                 | E3.4                 | ±5.0     | R         | $\sqrt{3}$ | 0.6             | ±1.7                | ∞     |
| Permittivity - measurement uncertainty                                          | E3.3                 | ±2.9     | N         | 1          | 0.6             | ±1.7                | 5     |
| <b>Combined Standard Uncertainty</b>                                            |                      |          | RSS       |            |                 | ±14.0               | 198   |
| <b>Coverage Factor for 95%</b>                                                  |                      |          | k=2       |            |                 |                     |       |
| <b>Expanded Uncertainty</b>                                                     |                      |          |           |            |                 | ±28.2               |       |



Table 6.2 – Measurement uncertainty evaluation for 1g Fast SAR in 0.3-6GHz range

| Relative DASYS Uncertainty Budget for Fast SAR Tests<br>According to IEEE 1528/2011 and IEC 62209-1/2011<br>(0.3-6 GHz range) |             |               |            |                 |                        |          |
|-------------------------------------------------------------------------------------------------------------------------------|-------------|---------------|------------|-----------------|------------------------|----------|
| Uncertainty Component                                                                                                         | Tol.<br>(%) | Prob<br>Dist. | Div.       | $C_i$           | $C_i \cdot U_i$<br>(%) | $V_i$    |
| <b>Measurement System</b>                                                                                                     |             |               |            |                 |                        |          |
| Probe Calibration                                                                                                             | ±6.6        | N             | 1          | 0               |                        |          |
| Axial Isotropy                                                                                                                | ±4.7        | R             | $\sqrt{3}$ | $(1-C_p)^{1/2}$ | ±1.9                   | $\infty$ |
| Hemispherical Isotropy                                                                                                        | ±9.6        | R             | $\sqrt{3}$ | $(C_p)^{1/2}$   | ±3.9                   | $\infty$ |
| Boundary Effect                                                                                                               | ±2.0        | R             | $\sqrt{3}$ | 1               | ±1.2                   | $\infty$ |
| Linearity                                                                                                                     | ±4.7        | R             | $\sqrt{3}$ | 1               | ±2.7                   | $\infty$ |
| System Detection Limits                                                                                                       | ±1.0        | R             | $\sqrt{3}$ | 1               | ±0.6                   | $\infty$ |
| Modulation Response                                                                                                           | ±2.4        | R             | $\sqrt{3}$ | 1               | ±1.4                   | $\infty$ |
| Readout Electronics                                                                                                           | ±0.3        | N             | 1          | 0               |                        |          |
| Response Time                                                                                                                 | ±0.8        | R             | $\sqrt{3}$ | 0               |                        |          |
| Integration Time                                                                                                              | ±2.6        | R             | $\sqrt{3}$ | 1               | ±1.5                   | $\infty$ |
| RF Ambient Conditions - Noise                                                                                                 | ±3.0        | R             | $\sqrt{3}$ | 1               | ±1.7                   | $\infty$ |
| RF Ambient Conditions - Reflections                                                                                           | ±3.0        | R             | $\sqrt{3}$ | 0               |                        |          |
| Probe Positioner Mechanical Tolerance                                                                                         | ±0.8        | R             | $\sqrt{3}$ | 1               | ±0.5                   | $\infty$ |
| Probe Positioning with respect to Phantom Shell                                                                               | ±6.7        | R             | $\sqrt{3}$ | 1               | ±3.9                   | $\infty$ |
| Spatial x-y Resolution                                                                                                        | ±10.0       | R             | $\sqrt{3}$ | 1               | ±5.8                   | $\infty$ |
| Fast SAR z Approximation                                                                                                      | ±14.0       | R             | $\sqrt{3}$ | 1               | ±8.1                   | $\infty$ |
| <b>Test sample Related</b>                                                                                                    |             |               |            |                 |                        |          |
| Test Sample Positioning                                                                                                       | ±6.0        | N             | 1          | 1               | ±6.0                   | 12       |
| Device Holder Uncertainty                                                                                                     | ±3.6        | N             | 1          | 1               | ±3.6                   | 5        |
| Output Power Variation - SAR drift measurement                                                                                | ±5.0        | R             | $\sqrt{3}$ | 1               | ±2.9                   | $\infty$ |
| Power Scaling                                                                                                                 | ±0          | R             | $\sqrt{3}$ | 0               |                        |          |
| <b>Phantom and Setup</b>                                                                                                      |             |               |            |                 |                        |          |
| Phantom Uncertainty (shape and thickness tolerances)                                                                          | ±6.6        | R             | $\sqrt{3}$ | 1               | ±3.8                   | $\infty$ |
| SAR correction                                                                                                                | ±1.9        | R             | $\sqrt{3}$ | 0               |                        |          |
| Conductivity Target - tolerance                                                                                               | ±1.9        | R             | $\sqrt{3}$ | 0               |                        |          |
| Conductivity - measurement uncertainty                                                                                        | ±5.0        | R             | $\sqrt{3}$ | 0               |                        |          |
| Permittivity Target - tolerance                                                                                               | ±5.5        | N             | 1          | 0               |                        |          |
| Permittivity - measurement uncertainty                                                                                        | ±5.0        | R             | $\sqrt{3}$ | 0               |                        |          |
| <b>Combined Standard Uncertainty</b>                                                                                          |             | RSS           |            |                 | ±14.9                  | 748      |
| <b>Coverage Factor for 95%</b>                                                                                                |             | k=2           |            |                 |                        |          |
| <b>Expanded Uncertainty</b>                                                                                                   |             |               |            |                 | ±29.8                  |          |

## 7. RESULTS

7.1 The measured Head SAR values for the test device are tabulated below:

**GSM/GPRS/EGPRS/WCDMA850MHz Head SAR results**

| Mode                               | Device orientation                 | SAR measurement                                  | Measured 1g SAR [W/kg]                           |                     |                     | Reported* 1g SAR [W/kg] |                     |                     | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|------------------------------------|------------------------------------|--------------------------------------------------|--------------------------------------------------|---------------------|---------------------|-------------------------|---------------------|---------------------|-------------------------------------------------|--------|
|                                    |                                    |                                                  | Ch 128<br>824.2 MHz                              | Ch 190<br>836.6 MHz | Ch 251<br>848.8 MHz | Ch 128<br>824.2 MHz     | Ch 190<br>836.6 MHz | Ch 251<br>848.8 MHz |                                                 |        |
| 1-slot GPRS                        | Tuning Target + Tolerance [dBm]    |                                                  | 32.9                                             |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|                                    | Conducted Slot Average Power [dBm] |                                                  | 32.7                                             | 32.7                | 32.6                | 0.2                     | 0.2                 | 0.3                 | dB                                              |        |
|                                    | Time-averaged power [dBm]          |                                                  | 23.7                                             | 23.7                | 23.6                | 1.05                    | 1.05                | 1.07                | Lin                                             |        |
|                                    |                                    |                                                  | No testing required for this slot configuration. |                     |                     |                         |                     |                     |                                                 |        |
| 2-slot GPRS                        | Tuning Target + Tolerance [dBm]    |                                                  | 30.4                                             |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|                                    | Conducted Slot Average Power [dBm] |                                                  | 29.9                                             | 29.8                | 29.7                | 0.5                     | 0.6                 | 0.7                 | dB                                              |        |
|                                    | Time-averaged power [dBm]          |                                                  | 23.9                                             | 23.8                | 23.7                | 1.12                    | 1.15                | 1.17                | Lin                                             |        |
|                                    | Left Cheek                         | Estimated SAR                                    | 0.569                                            | 0.602               | 0.617               | 0.638                   | 0.691               | 0.725               | 0.01                                            | 1      |
|                                    |                                    | Full SAR                                         | -                                                | -                   | 0.631               | -                       | -                   | 0.741               |                                                 |        |
|                                    | Left Tilt                          | Estimated SAR                                    | -                                                | 0.353               | -                   | -                       | 0.405               | -                   | -                                               | -      |
|                                    |                                    | Full SAR                                         | -                                                | -                   | -                   | -                       | -                   | -                   |                                                 |        |
|                                    | Right Cheek                        | Estimated SAR                                    | -                                                | 0.597               | -                   | -                       | 0.685               | -                   | -                                               | -      |
|                                    |                                    | Full SAR                                         | -                                                | -                   | -                   | -                       | -                   | -                   |                                                 |        |
|                                    | Right Tilt                         | Estimated SAR                                    | -                                                | 0.377               | -                   | -                       | 0.433               | -                   | -                                               | -      |
|                                    |                                    | Full SAR                                         | -                                                | -                   | -                   | -                       | -                   | -                   |                                                 |        |
|                                    | 3-slot GPRS                        | Tuning Target + Tolerance [dBm]                  |                                                  | 28.6                |                     |                         | Scaling factor*     |                     |                                                 |        |
| Conducted Slot Average Power [dBm] |                                    | 27.9                                             | 28.0                                             | 27.9                | 0.7                 | 0.6                     | 0.7                 | dB                  |                                                 |        |
| Time-averaged power [dBm]          |                                    | 23.6                                             | 23.7                                             | 23.6                | 1.17                | 1.15                    | 1.17                | Lin                 |                                                 |        |
|                                    |                                    | No testing required for this slot configuration. |                                                  |                     |                     |                         |                     |                     |                                                 |        |
| 4-slot GPRS                        | Tuning Target + Tolerance [dBm]    |                                                  | 27.4                                             |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|                                    | Conducted Slot Average Power [dBm] |                                                  | 26.7                                             | 26.7                | 26.7                | 0.7                     | 0.7                 | 0.7                 | dB                                              |        |
|                                    | Time-averaged power [dBm]          |                                                  | 23.7                                             | 23.7                | 23.7                | 1.17                    | 1.17                | 1.17                | Lin                                             |        |
|                                    |                                    |                                                  | No testing required for this slot configuration. |                     |                     |                         |                     |                     |                                                 |        |
| 1-slot 8PSK EGPRS                  | Tuning Target + Tolerance [dBm]    |                                                  | 26.9                                             |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|                                    | Conducted Slot Average Power [dBm] |                                                  | 26.8                                             | 26.8                | 26.7                | 0.1                     | 0.1                 | 0.2                 | dB                                              |        |
|                                    | Time-averaged power [dBm]          |                                                  | 17.8                                             | 17.8                | 17.7                | 1.02                    | 1.02                | 1.05                | Lin                                             |        |
|                                    |                                    |                                                  | No testing required for this slot configuration. |                     |                     |                         |                     |                     |                                                 |        |

(GSM/GPRS/EGPRS/WCDMA850MHz Head SAR / Table continues)

(GSM/GPRS/EGPRS/WCDMA850MHz Head SAR / Table continues)

| Mode                    | Device orientation                 | SAR measurement | Measured 1g SAR [W/kg]                           |                      |                      | Reported* 1g SAR [W/kg] |                      |                      | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|-------------------------|------------------------------------|-----------------|--------------------------------------------------|----------------------|----------------------|-------------------------|----------------------|----------------------|-------------------------------------------------|--------|
|                         |                                    |                 | Ch 128<br>824.2 MHz                              | Ch 190<br>836.6 MHz  | Ch 251<br>848.8 MHz  | Ch 128<br>824.2 MHz     | Ch 190<br>836.6 MHz  | Ch 251<br>848.8 MHz  |                                                 |        |
| 2-slot<br>8PSK<br>EGPRS | Tuning Target + Tolerance [dBm]    |                 | 26.9                                             |                      |                      | Scaling factor*         |                      |                      |                                                 |        |
|                         | Conducted Slot Average Power [dBm] |                 | 26.7                                             | 26.7                 | 26.6                 | 0.2                     | 0.2                  | 0.3                  | dB                                              |        |
|                         | Time-averaged power [dBm]          |                 | 20.7                                             | 20.7                 | 20.6                 | 1.05                    | 1.05                 | 1.07                 | Lin                                             |        |
|                         |                                    |                 | No testing required for this slot configuration. |                      |                      |                         |                      |                      |                                                 |        |
| 3-slot<br>8PSK<br>EGPRS | Tuning Target + Tolerance [dBm]    |                 | 26.1                                             |                      |                      | Scaling factor*         |                      |                      |                                                 |        |
|                         | Conducted Slot Average Power [dBm] |                 | 25.9                                             | 26.0                 | 25.8                 | 0.2                     | 0.1                  | 0.3                  | dB                                              |        |
|                         | Time-averaged power [dBm]          |                 | 21.6                                             | 21.7                 | 21.5                 | 1.05                    | 1.02                 | 1.07                 | Lin                                             |        |
|                         |                                    |                 | No testing required for this slot configuration. |                      |                      |                         |                      |                      |                                                 |        |
| 4-slot<br>8PSK<br>EGPRS | Tuning Target + Tolerance [dBm]    |                 | 24.9                                             |                      |                      | Scaling factor*         |                      |                      |                                                 |        |
|                         | Conducted Slot Average Power [dBm] |                 | 24.6                                             | 24.7                 | 24.6                 | 0.3                     | 0.2                  | 0.3                  | dB                                              |        |
|                         | Time-averaged power [dBm]          |                 | 21.6                                             | 21.7                 | 21.6                 | 1.07                    | 1.05                 | 1.07                 | Lin                                             |        |
|                         | Left Cheek                         | Estimated SAR   | -                                                | -                    | 0.429                | -                       | -                    | 0.460                | 0.02                                            | -      |
|                         |                                    | Full SAR        | -                                                | -                    | 0.405                | -                       | -                    | 0.434                |                                                 |        |
| Mode                    | Device orientation                 | SAR measurement | Measured 1g SAR [W/kg]                           |                      |                      | Reported* 1g SAR [W/kg] |                      |                      | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|                         |                                    |                 | Ch 4132<br>826.4 MHz                             | Ch 4175<br>835.0 MHz | Ch 4233<br>846.6 MHz | Ch 4132<br>826.4 MHz    | Ch 4175<br>835.0 MHz | Ch 4233<br>846.6 MHz |                                                 |        |
| WCDMA                   | Tuning Target + Tolerance [dBm]    |                 | 23.9                                             |                      |                      | Scaling factor*         |                      |                      |                                                 |        |
|                         | Conducted Power [dBm]              |                 | 23.1                                             | 23.1                 | 23.3                 | 0.8                     | 0.8                  | 0.6                  | dB                                              |        |
|                         | Time-averaged power [dBm]          |                 | 23.1                                             | 23.1                 | 23.3                 | 1.20                    | 1.20                 | 1.15                 | Lin                                             |        |
|                         | Left Cheek                         | Estimated SAR   | -                                                | 0.412                | -                    | -                       | 0.495                | -                    | 0.00                                            | -      |
|                         |                                    | Full SAR        | -                                                | -                    | -                    | -                       | -                    | -                    |                                                 |        |
|                         | Left Tilt                          | Estimated SAR   | -                                                | 0.254                | -                    | -                       | 0.305                | -                    | -                                               | -      |
|                         |                                    | Full SAR        | -                                                | -                    | -                    | -                       | -                    | -                    |                                                 |        |
|                         | Right Cheek                        | Estimated SAR   | 0.476                                            | 0.431                | 0.583                | 0.572                   | 0.518                | 0.669                | -                                               | 2      |
|                         |                                    | Full SAR        | -                                                | -                    | 0.590                | -                       | -                    | 0.677                |                                                 |        |
|                         | Right Tilt                         | Estimated SAR   | -                                                | 0.273                | -                    | -                       | 0.328                | -                    | -                                               | -      |
|                         |                                    | Full SAR        | -                                                | -                    | -                    | -                       | -                    | -                    |                                                 |        |

### GSM/GPRS/EGPRS/WCDMA1900MHz Head SAR results

| Mode              | Device orientation                 | SAR measurement | Measured 1g SAR [W/kg]                           |                      |                      | Reported* 1g SAR [W/kg] |                      |                      | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|-------------------|------------------------------------|-----------------|--------------------------------------------------|----------------------|----------------------|-------------------------|----------------------|----------------------|-------------------------------------------------|--------|
|                   |                                    |                 | Ch 512<br>1850.2 MHz                             | Ch 661<br>1880.0 MHz | Ch 810<br>1909.8 MHz | Ch 512<br>1850.2 MHz    | Ch 661<br>1880.0 MHz | Ch 810<br>1909.8 MHz |                                                 |        |
| 1-slot GPRS       | Tuning Target + Tolerance [dBm]    |                 | 29.9                                             |                      |                      | Scaling factor*         |                      |                      |                                                 |        |
|                   | Conducted Slot Average Power [dBm] |                 | 29.3                                             | 29.4                 | 29.3                 | 0.6                     | 0.5                  | 0.6                  | dB                                              |        |
|                   | Time-averaged power [dBm]          |                 | 20.3                                             | 20.4                 | 20.3                 | 1.15                    | 1.12                 | 1.15                 | Lin                                             |        |
|                   |                                    |                 | No testing required for this slot configuration. |                      |                      |                         |                      |                      |                                                 |        |
| 2-slot GPRS       | Tuning Target + Tolerance [dBm]    |                 | 27.9                                             |                      |                      | Scaling factor*         |                      |                      |                                                 |        |
|                   | Conducted Slot Average Power [dBm] |                 | 27.3                                             | 27.4                 | 27.2                 | 0.6                     | 0.5                  | 0.7                  | dB                                              |        |
|                   | Time-averaged power [dBm]          |                 | 21.3                                             | 21.4                 | 21.2                 | 1.15                    | 1.12                 | 1.17                 | Lin                                             |        |
|                   |                                    |                 | No testing required for this slot configuration. |                      |                      |                         |                      |                      |                                                 |        |
| 3-slot GPRS       | Tuning Target + Tolerance [dBm]    |                 | 26.1                                             |                      |                      | Scaling factor*         |                      |                      |                                                 |        |
|                   | Conducted Slot Average Power [dBm] |                 | 25.6                                             | 25.7                 | 25.5                 | 0.5                     | 0.4                  | 0.6                  | dB                                              |        |
|                   | Time-averaged power [dBm]          |                 | 21.3                                             | 21.4                 | 21.2                 | 1.12                    | 1.10                 | 1.15                 | Lin                                             |        |
|                   | Left Cheek                         | Estimated SAR   | 0.379                                            | 0.369                | 0.237                | 0.425                   | 0.405                | 0.272                | 0.03                                            | 3      |
|                   |                                    | Full SAR        | 0.404                                            | -                    | -                    | 0.453                   | -                    | -                    |                                                 |        |
|                   | Left Tilt                          | Estimated SAR   | -                                                | 0.222                | -                    | -                       | 0.243                | -                    | -                                               | -      |
|                   |                                    | Full SAR        | -                                                | -                    | -                    | -                       | -                    | -                    |                                                 |        |
|                   | Right Cheek                        | Estimated SAR   | -                                                | 0.303                | -                    | -                       | 0.332                | -                    | -                                               | -      |
|                   |                                    | Full SAR        | -                                                | -                    | -                    | -                       | -                    | -                    |                                                 |        |
|                   | Right Tilt                         | Estimated SAR   | -                                                | 0.263                | -                    | -                       | 0.288                | -                    | -                                               | -      |
|                   |                                    | Full SAR        | -                                                | -                    | -                    | -                       | -                    | -                    |                                                 |        |
| 4-slot GPRS       | Tuning Target + Tolerance [dBm]    |                 | 24.9                                             |                      |                      | Scaling factor*         |                      |                      |                                                 |        |
|                   | Conducted Slot Average Power [dBm] |                 | 24.2                                             | 24.3                 | 24.2                 | 0.7                     | 0.6                  | 0.7                  | dB                                              |        |
|                   | Time-averaged power [dBm]          |                 | 21.2                                             | 21.3                 | 21.2                 | 1.17                    | 1.15                 | 1.17                 | Lin                                             |        |
|                   |                                    |                 | No testing required for this slot configuration. |                      |                      |                         |                      |                      |                                                 |        |
| 1-slot 8PSK EGPRS | Tuning Target + Tolerance [dBm]    |                 | 25.9                                             |                      |                      | Scaling factor*         |                      |                      |                                                 |        |
|                   | Conducted Slot Average Power [dBm] |                 | 25.4                                             | 25.3                 | 25.3                 | 0.5                     | 0.6                  | 0.6                  | dB                                              |        |
|                   | Time-averaged power [dBm]          |                 | 16.4                                             | 16.3                 | 16.3                 | 1.12                    | 1.15                 | 1.15                 | Lin                                             |        |
|                   |                                    |                 | No testing required for this slot configuration. |                      |                      |                         |                      |                      |                                                 |        |
| 2-slot 8PSK EGPRS | Tuning Target + Tolerance [dBm]    |                 | 25.9                                             |                      |                      | Scaling factor*         |                      |                      |                                                 |        |
|                   | Conducted Slot Average Power [dBm] |                 | 25.4                                             | 25.2                 | 25.1                 | 0.5                     | 0.7                  | 0.8                  | dB                                              |        |
|                   | Time-averaged power [dBm]          |                 | 19.4                                             | 19.2                 | 19.1                 | 1.12                    | 1.17                 | 1.20                 | Lin                                             |        |
|                   |                                    |                 | No testing required for this slot configuration. |                      |                      |                         |                      |                      |                                                 |        |

(GSM/GPRS/EGPRS/WCDMA1900MHz Head SAR / Table continues)

(GSM/GPRS/EGPRS/WCDMA1900MHz Head SAR / Table continues)

| Mode                    | Device orientation                 | SAR measurement | Measured 1g SAR [W/kg]                           |                       |                       | Reported* 1g SAR [W/kg] |                       |                       | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|-------------------------|------------------------------------|-----------------|--------------------------------------------------|-----------------------|-----------------------|-------------------------|-----------------------|-----------------------|-------------------------------------------------|--------|
|                         |                                    |                 | Ch 512<br>1850.2 MHz                             | Ch 661<br>1880.0 MHz  | Ch 810<br>1909.8 MHz  | Ch 512<br>1850.2 MHz    | Ch 661<br>1880.0 MHz  | Ch 810<br>1909.8 MHz  |                                                 |        |
| 3-slot<br>8PSK<br>EGPRS | Tuning Target + Tolerance [dBm]    |                 | 25.4                                             |                       |                       | Scaling factor*         |                       |                       |                                                 |        |
|                         | Conducted Slot Average Power [dBm] |                 | 24.9                                             | 24.9                  | 24.7                  | 0.5                     | 0.5                   | 0.7                   | dB                                              |        |
|                         | Time-averaged power [dBm]          |                 | 20.6                                             | 20.6                  | 20.4                  | 1.12                    | 1.12                  | 1.17                  | Lin                                             |        |
|                         |                                    |                 | No testing required for this slot configuration. |                       |                       |                         |                       |                       |                                                 |        |
| 4-slot<br>8PSK<br>EGPRS | Tuning Target + Tolerance [dBm]    |                 | 24.4                                             |                       |                       | Scaling factor*         |                       |                       |                                                 |        |
|                         | Conducted Slot Average Power [dBm] |                 | 23.7                                             | 23.7                  | 23.6                  | 0.7                     | 0.7                   | 0.8                   | dB                                              |        |
|                         | Time-averaged power [dBm]          |                 | 20.7                                             | 20.7                  | 20.6                  | 1.17                    | 1.17                  | 1.20                  | Lin                                             |        |
|                         | Left Cheek                         | Estimated SAR   | 0.299                                            | -                     | -                     | 0.351                   | -                     | -                     | -                                               | -      |
|                         |                                    | Full SAR        | -                                                | -                     | -                     | -                       | -                     | -                     |                                                 |        |
| Mode                    | Device orientation                 | SAR measurement | Measured 1g SAR [W/kg]                           |                       |                       | Reported* 1g SAR [W/kg] |                       |                       | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|                         |                                    |                 | Ch 9262<br>1852.4 MHz                            | Ch 9400<br>1880.0 MHz | Ch 9538<br>1907.6 MHz | Ch 9262<br>1852.4 MHz   | Ch 9400<br>1880.0 MHz | Ch 9538<br>1907.6 MHz |                                                 |        |
| WCDMA                   | Tuning Target + Tolerance [dBm]    |                 | 22.4                                             |                       |                       | Scaling factor*         |                       |                       |                                                 |        |
|                         | Conducted Power [dBm]              |                 | 21.8                                             | 22.0                  | 21.9                  | 0.6                     | 0.4                   | 0.5                   | dB                                              |        |
|                         | Time-averaged power [dBm]          |                 | 21.8                                             | 22.0                  | 21.9                  | 1.15                    | 1.10                  | 1.12                  | Lin                                             |        |
|                         | Left Cheek                         | Estimated SAR   | 0.570                                            | 0.518                 | 0.363                 | 0.654                   | 0.568                 | 0.407                 | 0.06                                            | 4      |
|                         |                                    | Full SAR        | 0.625                                            | -                     | -                     | 0.718                   | -                     | -                     |                                                 |        |
|                         | Left Tilt                          | Estimated SAR   | -                                                | 0.300                 | -                     | -                       | 0.329                 | -                     | -                                               | -      |
|                         |                                    | Full SAR        | -                                                | -                     | -                     | -                       | -                     | -                     |                                                 |        |
|                         | Right Cheek                        | Estimated SAR   | -                                                | 0.425                 | -                     | -                       | 0.466                 | -                     | -                                               | -      |
|                         |                                    | Full SAR        | -                                                | -                     | -                     | -                       | -                     | -                     |                                                 |        |
|                         | Right Tilt                         | Estimated SAR   | -                                                | 0.396                 | -                     | -                       | 0.434                 | -                     | -                                               | -      |
| Full SAR                |                                    | -               | -                                                | -                     | -                     | -                       | -                     |                       |                                                 |        |

### 2450MHz Head SAR results

| Mode                            | Device orientation              | SAR measurement | Measured 1g SAR [W/kg] |                    |                     | Reported* 1g SAR [W/kg] |                    |                     | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|---------------------------------|---------------------------------|-----------------|------------------------|--------------------|---------------------|-------------------------|--------------------|---------------------|-------------------------------------------------|--------|
|                                 |                                 |                 | Ch 1<br>2412.0 MHz     | Ch 6<br>2437.0 MHz | Ch 11<br>2462.0 MHz | Ch 1<br>2412.0 MHz      | Ch 6<br>2437.0 MHz | Ch 11<br>2462.0 MHz |                                                 |        |
| WLAN<br>b-mode<br>BPSK<br>1Mbps | Tuning Target + Tolerance [dBm] |                 | 18.5                   |                    |                     | Scaling factor*         |                    |                     |                                                 |        |
|                                 | Conducted Power [dBm]           |                 | 17.2                   | 17.5               | 17.8                | 1.3                     | 1.0                | 0.7                 | dB                                              |        |
|                                 | Time-averaged power [dBm]       |                 | 17.2                   | 17.5               | 17.8                | 1.35                    | 1.26               | 1.17                | Lin                                             |        |
|                                 | Left Cheek                      | Estimated SAR   | 0.246                  | 0.215              | 0.187               | 0.332                   | 0.271              | 0.220               | 0.01                                            | 5      |
|                                 |                                 | Full SAR        | 0.259                  | -                  | -                   | 0.349                   | -                  | -                   |                                                 |        |
|                                 | Left Tilt                       | Estimated SAR   | -                      | 0.112              | -                   | -                       | 0.141              | -                   | -                                               | -      |
|                                 |                                 | Full SAR        | -                      | -                  | -                   | -                       | -                  | -                   |                                                 |        |
|                                 | Right Cheek                     | Estimated SAR   | -                      | 0.104              | -                   | -                       | 0.131              | -                   | -                                               | -      |
|                                 |                                 | Full SAR        | -                      | -                  | -                   | -                       | -                  | -                   |                                                 |        |
|                                 | Right Tilt                      | Estimated SAR   | -                      | 0.074              | -                   | -                       | 0.093              | -                   | -                                               | -      |
|                                 |                                 | Full SAR        | -                      | -                  | -                   | -                       | -                  | -                   |                                                 |        |

**Simultaneous transmissions: Combined head SAR results –  
Individual band Max results**

| Test configuration | Max. Reported* 1g SAR results |                 |                   |                  |                    |
|--------------------|-------------------------------|-----------------|-------------------|------------------|--------------------|
|                    | WLAN 2450                     | 2-slot GPRS 850 | WCDMA850 (Band 5) | 3-slot GPRS 1900 | WCDMA1900 (Band 2) |
| Head: Left, Cheek  | 0.349                         | 0.741           | 0.495             | 0.453            | 0.718              |
| Head: Left, Tilt   | 0.141                         | 0.405           | 0.305             | 0.243            | 0.329              |
| Head: Right, Cheek | 0.131                         | 0.685           | 0.677             | 0.332            | 0.466              |
| Head: Right, Tilt  | 0.093                         | 0.433           | 0.328             | 0.288            | 0.434              |

**Simultaneous transmissions: Combined head SAR results –  
Max + Max combined results**

| Test configuration | Max. Reported* 1g SAR results |                              |                            |                               |
|--------------------|-------------------------------|------------------------------|----------------------------|-------------------------------|
|                    | 2-slot GPRS850 + WLAN2450     | WCDMA850 (Band 5) + WLAN2450 | 3-slot GPRS1900 + WLAN2450 | WCDMA1900 (Band 2) + WLAN2450 |
| Head: Left, Cheek  | 1.09                          | 0.844                        | 0.802                      | 1.07                          |
| Head: Left, Tilt   | 0.546                         | 0.446                        | 0.384                      | 0.470                         |
| Head: Right, Cheek | 0.816                         | 0.808                        | 0.463                      | 0.597                         |
| Head: Right, Tilt  | 0.526                         | 0.421                        | 0.381                      | 0.527                         |

Note: Simultaneous Transmission Procedures as described in KDB648474 are not required for this product.



### 7.1.1 Combined Head SAR data

The Combined SAR data given in the tables below has been voluntarily calculated and should be ignored for FCC certification.

The following table gives a more accurate assessment of the SAR values for simultaneous transmission. These values have been calculated using the SPEAG Combined Multiband algorithm, which is based on area scans. It a) converts the 2D area scans into 3D volume scans by assuming frequency-dependent decay characteristics for the E-field, b) sums the SAR values for WLAN2450 and the cellular bands point-by-point and c) calculates the combined average SAR values.

**Simultaneous transmissions: Combined head SAR results –  
SPEAG Combined Multiband algorithm results**

| Test configuration | Max. Reported* 1g SAR results   |                                    |                                  |                                     |
|--------------------|---------------------------------|------------------------------------|----------------------------------|-------------------------------------|
|                    | 2-slot<br>GPRS850 +<br>WLAN2450 | WCDMA850<br>(Band 5) +<br>WLAN2450 | 3-slot<br>GPRS1900 +<br>WLAN2450 | WCDMA1900<br>(Band 2) +<br>WLAN2450 |
| Head: Left, Cheek  | 0.746                           | 0.519                              | 0.436                            | 0.668                               |
| Head: Left, Tilt   | -                               | -                                  | -                                | -                                   |
| Head: Right, Cheek | -                               | -                                  | -                                | -                                   |
| Head: Right, Tilt  | -                               | -                                  | -                                | -                                   |

Some of the Combined SAR values in the above table are less than the maximum SAR values for the contributing cellular band. This is due to a) minimal overlap of the SAR distributions of the cellular band with WLAN2450 and b) uncertainties associated with the different methods of calculation. In these cases, the maximum SAR values given for the combined Modes in the Summary table in Section 1.2 are those for the individual cellular band.



7.2 The measured Body SAR values for the test device are tabulated below:

GSM/GPRS/EGPRS/WCDMA850MHz Body SAR results

| Mode        | Device orientation                 |                 | SAR measurement | Measured 1g SAR [W/kg]                           |           |           | Reported* 1g SAR [W/kg] |           |           | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|-------------|------------------------------------|-----------------|-----------------|--------------------------------------------------|-----------|-----------|-------------------------|-----------|-----------|-------------------------------------------------|--------|
|             |                                    |                 |                 | Ch 128                                           | Ch 190    | Ch 251    | Ch 128                  | Ch 190    | Ch 251    |                                                 |        |
|             |                                    |                 |                 | 824.2 MHz                                        | 836.6 MHz | 848.8 MHz | 824.2 MHz               | 836.6 MHz | 848.8 MHz |                                                 |        |
| 1-slot GPRS | Tuning Target + Tolerance [dBm]    |                 |                 | 32.9                                             |           |           | Scaling factor*         |           |           |                                                 |        |
|             | Conducted Slot Average Power [dBm] |                 |                 | 32.7                                             | 32.7      | 32.6      | 0.2                     | 0.2       | 0.3       | dB                                              |        |
|             | Time-averaged power [dBm]          |                 |                 | 23.7                                             | 23.7      | 23.6      | 1.05                    | 1.05      | 1.07      | Lin                                             |        |
|             |                                    |                 |                 | No testing required for this slot configuration. |           |           |                         |           |           |                                                 |        |
| 2-slot GPRS | Tuning Target + Tolerance [dBm]    |                 |                 | 30.4                                             |           |           | Scaling factor*         |           |           |                                                 |        |
|             | Conducted Slot Average Power [dBm] |                 |                 | 29.9                                             | 29.8      | 29.7      | 0.5                     | 0.6       | 0.7       | dB                                              |        |
|             | Time-averaged power [dBm]          |                 |                 | 23.9                                             | 23.8      | 23.7      | 1.12                    | 1.15      | 1.17      | Lin                                             |        |
|             | Back facing phantom                | Without headset | Estimated SAR   | 0.656                                            | 0.705     | 0.769     | 0.736                   | 0.809     | 0.903     | 0.01                                            | 7      |
|             |                                    |                 | Full SAR        | -                                                | -         | 0.780     | -                       | -         | 0.916     |                                                 |        |
|             |                                    | Headset WH-108  | Estimated SAR   | -                                                | 0.491     | -         | -                       | 0.564     | -         | -                                               | -      |
|             |                                    |                 | Full SAR        | -                                                | -         | -         | -                       | -         | -         |                                                 |        |
|             | Display facing phantom             | Without headset | Estimated SAR   | -                                                | 0.577     | -         | -                       | 0.662     | -         | -                                               | -      |
|             |                                    |                 | Full SAR        | -                                                | -         | -         | -                       | -         | -         |                                                 |        |
|             |                                    | Headset WH-108  | Estimated SAR   | -                                                | 0.442     | -         | -                       | 0.507     | -         | -                                               | -      |
|             |                                    |                 | Full SAR        | -                                                | -         | -         | -                       | -         | -         |                                                 |        |
| 3-slot GPRS | Tuning Target + Tolerance [dBm]    |                 |                 | 28.6                                             |           |           | Scaling factor*         |           |           |                                                 |        |
|             | Conducted Slot Average Power [dBm] |                 |                 | 27.9                                             | 28.0      | 27.9      | 0.7                     | 0.6       | 0.7       | dB                                              |        |
|             | Time-averaged power [dBm]          |                 |                 | 23.6                                             | 23.7      | 23.6      | 1.17                    | 1.15      | 1.17      | Lin                                             |        |
|             |                                    |                 |                 | No testing required for this slot configuration. |           |           |                         |           |           |                                                 |        |
| 4-slot GPRS | Tuning Target + Tolerance [dBm]    |                 |                 | 27.4                                             |           |           | Scaling factor*         |           |           |                                                 |        |
|             | Conducted Slot Average Power [dBm] |                 |                 | 26.7                                             | 26.7      | 26.7      | 0.7                     | 0.7       | 0.7       | dB                                              |        |
|             | Time-averaged power [dBm]          |                 |                 | 23.7                                             | 23.7      | 23.7      | 1.17                    | 1.17      | 1.17      | Lin                                             |        |
|             |                                    |                 |                 | No testing required for this slot configuration. |           |           |                         |           |           |                                                 |        |

(GSM/GPRS/EGPRS/WCDMA850 Body SAR / Table continues)

(GSM/GPRS/EGPRS/WCDMA850 Body SAR / Table continues)

| Mode  | Device orientation                 |                 | SAR measurement | Measured 1g SAR [W/kg] |                      |                      | Reported* 1g SAR [W/kg] |                      |                      | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|-------|------------------------------------|-----------------|-----------------|------------------------|----------------------|----------------------|-------------------------|----------------------|----------------------|-------------------------------------------------|--------|
|       |                                    |                 |                 | Ch 4132<br>826.4 MHz   | Ch 4175<br>835.0 MHz | Ch 4233<br>846.6 MHz | Ch 4132<br>826.4 MHz    | Ch 4175<br>835.0 MHz | Ch 4233<br>846.6 MHz |                                                 |        |
| WCDMA | Tuning Target + Tolerance [dBm]    |                 |                 | 23.9                   |                      |                      | Scaling factor*         |                      |                      |                                                 |        |
|       | Conducted Slot Average Power [dBm] |                 |                 | 23.1                   | 23.1                 | 23.3                 | 0.8                     | 0.8                  | 0.6                  | dB                                              |        |
|       | Time-averaged power [dBm]          |                 |                 | 23.1                   | 23.1                 | 23.3                 | 1.20                    | 1.20                 | 1.15                 | Lin                                             |        |
|       | Back facing phantom                | Without headset | Estimated SAR   | 0.597                  | 0.575                | 0.729                | 0.718                   | 0.691                | 0.837                | 0.01                                            | 8      |
|       |                                    |                 | Full SAR        | -                      | -                    | 0.739                | -                       | -                    | 0.848                |                                                 |        |
|       |                                    | Headset WH-108  | Estimated SAR   | -                      | 0.397                | -                    | -                       | 0.477                | -                    | -                                               | -      |
|       |                                    |                 | Full SAR        | -                      | -                    | -                    | -                       | -                    | -                    |                                                 |        |
|       | Display facing phantom             | Without headset | Estimated SAR   | -                      | 0.410                | -                    | -                       | 0.493                | -                    | -                                               | -      |
|       |                                    |                 | Full SAR        | -                      | -                    | -                    | -                       | -                    | -                    |                                                 |        |
|       |                                    | Headset WH-108  | Estimated SAR   | -                      | 0.276                | -                    | -                       | 0.332                | -                    | -                                               | -      |
|       |                                    |                 | Full SAR        | -                      | -                    | -                    | -                       | -                    | -                    |                                                 |        |

### 1900MHz Band Body SAR results

| Mode        | Device orientation                 |                 | SAR measurement | Measured 1g SAR [W/kg]                           |                      |                      | Reported* 1g SAR [W/kg] |                      |                      | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|-------------|------------------------------------|-----------------|-----------------|--------------------------------------------------|----------------------|----------------------|-------------------------|----------------------|----------------------|-------------------------------------------------|--------|
|             |                                    |                 |                 | Ch 512<br>1850.2 MHz                             | Ch 661<br>1880.0 MHz | Ch 810<br>1909.8 MHz | Ch 512<br>1850.2 MHz    | Ch 661<br>1880.0 MHz | Ch 810<br>1909.8 MHz |                                                 |        |
| 1-slot GPRS | Tuning Target + Tolerance [dBm]    |                 |                 | 29.9                                             |                      |                      | Scaling factor*         |                      |                      |                                                 |        |
|             | Conducted Slot Average Power [dBm] |                 |                 | 29.3                                             | 29.4                 | 29.3                 | 0.6                     | 0.5                  | 0.6                  | dB                                              |        |
|             | Time-averaged power [dBm]          |                 |                 | 20.3                                             | 20.4                 | 20.3                 | 1.15                    | 1.12                 | 1.15                 | Lin                                             |        |
|             |                                    |                 |                 | No testing required for this slot configuration. |                      |                      |                         |                      |                      |                                                 |        |
| 2-slot GPRS | Tuning Target + Tolerance [dBm]    |                 |                 | 27.9                                             |                      |                      | Scaling factor*         |                      |                      |                                                 |        |
|             | Conducted Slot Average Power [dBm] |                 |                 | 27.3                                             | 27.4                 | 27.2                 | 0.6                     | 0.5                  | 0.7                  | dB                                              |        |
|             | Time-averaged power [dBm]          |                 |                 | 21.3                                             | 21.4                 | 21.2                 | 1.15                    | 1.12                 | 1.17                 | Lin                                             |        |
|             |                                    |                 |                 | No testing required for this slot configuration. |                      |                      |                         |                      |                      |                                                 |        |
| 3-slot GPRS | Tuning Target + Tolerance [dBm]    |                 |                 | 26.1                                             |                      |                      | Scaling factor*         |                      |                      |                                                 |        |
|             | Conducted Slot Average Power [dBm] |                 |                 | 25.6                                             | 25.7                 | 25.5                 | 0.5                     | 0.4                  | 0.6                  | dB                                              |        |
|             | Time-averaged power [dBm]          |                 |                 | 21.3                                             | 21.4                 | 21.2                 | 1.12                    | 1.10                 | 1.15                 | Lin                                             |        |
|             | Back facing phantom                | Without headset | Estimated SAR   | -                                                | 0.458                | -                    | -                       | 0.502                | -                    | -                                               | -      |
|             |                                    |                 | Full SAR        | -                                                | -                    | -                    | -                       | -                    | -                    | -                                               | -      |
|             |                                    | Headset WH-108  | Estimated SAR   | 0.405                                            | 0.488                | 0.642                | 0.454                   | 0.535                | 0.737                | 0.03                                            | 9      |
|             |                                    |                 | Full SAR        | -                                                | -                    | 0.668                | -                       | -                    | 0.767                | -                                               | -      |
|             | Display facing phantom             | Without headset | Estimated SAR   | -                                                | 0.299                | -                    | -                       | 0.328                | -                    | -                                               | -      |
|             |                                    |                 | Full SAR        | -                                                | -                    | -                    | -                       | -                    | -                    | -                                               | -      |
|             |                                    | Headset WH-108  | Estimated SAR   | -                                                | 0.325                | -                    | -                       | 0.356                | -                    | -                                               | -      |
|             |                                    |                 | Full SAR        | -                                                | -                    | -                    | -                       | -                    | -                    | -                                               | -      |
| 4-slot GPRS | Tuning Target + Tolerance [dBm]    |                 |                 | 27.6                                             |                      |                      | Scaling factor*         |                      |                      |                                                 |        |
|             | Conducted Slot Average Power [dBm] |                 |                 | 24.2                                             | 24.3                 | 24.2                 | 0.7                     | 0.6                  | 0.7                  | dB                                              |        |
|             | Time-averaged power [dBm]          |                 |                 | 21.2                                             | 21.3                 | 21.2                 | 1.17                    | 1.15                 | 1.17                 | Lin                                             |        |
|             |                                    |                 |                 | No testing required for this slot configuration. |                      |                      |                         |                      |                      |                                                 |        |

(1900MHz Band Body SAR results / Table continues)

(1900MHz Band Body SAR results / Table continues)

| Mode  | Device orientation                 |                 | SAR measurement | Measured 1g SAR [W/kg] |                    |                    | Reported* 1g SAR [W/kg] |                    |                    | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |    |
|-------|------------------------------------|-----------------|-----------------|------------------------|--------------------|--------------------|-------------------------|--------------------|--------------------|-------------------------------------------------|--------|----|
|       |                                    |                 |                 | Ch 9262 1852.4 MHz     | Ch 9400 1880.0 MHz | Ch 9538 1907.6 MHz | Ch 9262 1852.4 MHz      | Ch 9400 1880.0 MHz | Ch 9538 1907.6 MHz |                                                 |        |    |
| WCDMA | Tuning Target + Tolerance [dBm]    |                 |                 | 22.4                   |                    |                    | Scaling factor*         |                    |                    |                                                 |        |    |
|       | Conducted Power [dBm]              |                 |                 | 21.8                   | 22.0               | 21.9               | 0.6                     | 0.4                | 0.5                | dB                                              |        |    |
|       | Time-averaged power [dBm]          |                 |                 | 21.8                   | 22.0               | 21.9               | 1.15                    | 1.10               | 1.12               | Lin                                             |        |    |
|       | Back facing phantom                | Without headset | Estimated SAR   | -                      | 0.629              | -                  | -                       | 0.690              | -                  | 0.07                                            | -      |    |
|       |                                    |                 | Full SAR        | -                      | 0.700              | -                  | -                       | 0.768              | -                  |                                                 |        |    |
|       |                                    | Headset WH-108  | Estimated SAR   | 0.474                  | 0.675              | 0.854              | 0.544                   | 0.740              | 0.958              | 0.03                                            | -      |    |
|       |                                    |                 | Full SAR        | -                      | -                  | 0.885              | -                       | -                  | 0.993              |                                                 |        |    |
|       | Display facing phantom             | Without headset | Estimated SAR   | -                      | 0.418              | -                  | -                       | 0.458              | -                  | 0.02                                            | -      |    |
|       |                                    |                 | Full SAR        | -                      | -                  | -                  | -                       | -                  | -                  |                                                 |        |    |
|       |                                    | Headset WH-108  | Estimated SAR   | -                      | 0.444              | -                  | -                       | 0.487              | -                  | -                                               | -      |    |
|       |                                    |                 | Full SAR        | -                      | -                  | -                  | -                       | -                  | -                  |                                                 |        |    |
|       | Back facing phantom Headset WH-108 |                 |                 | Estimated SAR          | -                  | -                  | 0.876                   | -                  | -                  | 0.983                                           | 0.04   | 10 |
|       |                                    |                 |                 | Full SAR               | -                  | -                  | 0.917                   | -                  | -                  | 1.03                                            |        |    |

### 2450MHz Body SAR results

| Mode                             | Device orientation              |                 | SAR measurement | Measured 1g SAR [W/kg] |                    |                     | Reported* 1g SAR [W/kg] |                    |                     | Max Deviation<br>(Estimated SAR - Full SAR)<br>[W/kg] | Plot # |
|----------------------------------|---------------------------------|-----------------|-----------------|------------------------|--------------------|---------------------|-------------------------|--------------------|---------------------|-------------------------------------------------------|--------|
|                                  |                                 |                 |                 | Ch 1<br>2412.0 MHz     | Ch 6<br>2437.0 MHz | Ch 11<br>2462.0 MHz | Ch 1<br>2412.0 MHz      | Ch 6<br>2437.0 MHz | Ch 11<br>2462.0 MHz |                                                       |        |
| WLAN<br>b-mode<br>BPSK<br>1 Mbps | Tuning Target + Tolerance [dBm] |                 |                 | 18.5                   |                    |                     | Scaling factor*         |                    |                     |                                                       |        |
|                                  | Conducted Power [dBm]           |                 |                 | 17.2                   | 17.5               | 17.8                | 1.3                     | 1.0                | 0.7                 | dB                                                    |        |
|                                  | Time-averaged power [dBm]       |                 |                 | 17.2                   | 17.5               | 17.8                | 1.35                    | 1.26               | 1.17                | Lin                                                   |        |
|                                  | Back facing phantom             | Without headset | Estimated SAR   | 0.078                  | 0.089              | 0.104               | 0.105                   | 0.112              | 0.122               | 0.00                                                  | 11     |
|                                  |                                 | Headset WH-108  | Full SAR        | -                      | -                  | 0.108               | -                       | -                  | 0.127               |                                                       |        |
|                                  |                                 | Without headset | Estimated SAR   | -                      | 0.084              | -                   | -                       | 0.106              | -                   | -                                                     | -      |
|                                  |                                 | Headset WH-108  | Full SAR        | -                      | -                  | -                   | -                       | -                  | -                   |                                                       |        |
|                                  | Display facing phantom          | Without headset | Estimated SAR   | -                      | 0.026              | -                   | -                       | 0.033              | -                   | -                                                     | -      |
|                                  |                                 | Headset WH-108  | Full SAR        | -                      | -                  | -                   | -                       | -                  | -                   |                                                       |        |
|                                  |                                 | Without headset | Estimated SAR   | -                      | 0.024              | -                   | -                       | 0.030              | -                   | -                                                     | -      |
|                                  |                                 | Headset WH-108  | Full SAR        | -                      | -                  | -                   | -                       | -                  | -                   |                                                       |        |

**Simultaneous transmissions: Combined body SAR results –  
Individual band Max results**

| Test configuration                            | Max. Reported*1g SAR results |                |                   |                 |                    |
|-----------------------------------------------|------------------------------|----------------|-------------------|-----------------|--------------------|
|                                               | WLAN 2450                    | 2-slot GPRS850 | WCDMA850 (Band 5) | 3-slot GPRS1900 | WCDMA1900 (Band 2) |
| Body: Back facing phantom, Without Headset    | 0.127                        | 0.916          | 0.848             | 0.502           | 0.768              |
| Body: Back facing phantom, Headset WH-108     | 0.106                        | 0.564          | 0.477             | 0.767           | 1.03               |
| Body: Display facing phantom, Without Headset | 0.033                        | 0.662          | 0.493             | 0.328           | 0.458              |
| Body: Display facing phantom, Headset WH-108  | 0.030                        | 0.507          | 0.332             | 0.356           | 0.487              |

**Simultaneous transmissions: Combined body SAR results –  
Max + Max combined results**

| Test configuration                            | Max. Reported*1g SAR results |                              |                            |                               |
|-----------------------------------------------|------------------------------|------------------------------|----------------------------|-------------------------------|
|                                               | 2-slot GPRS850 + WLAN2450    | WCDMA850 (Band 5) + WLAN2450 | 3-slot GPRS1900 + WLAN2450 | WCDMA1900 (Band 2) + WLAN2450 |
| Body: Back facing phantom, Without Headset    | <b>1.04</b>                  | <b>0.975</b>                 | 0.629                      | 0.895                         |
| Body: Back facing phantom, Headset WH-108     | 0.670                        | 0.583                        | <b>0.873</b>               | <b>1.14</b>                   |
| Body: Display facing phantom, Without Headset | 0.695                        | 0.526                        | 0.361                      | 0.491                         |
| Body: Display facing phantom, Headset WH-108  | 0.537                        | 0.362                        | 0.386                      | 0.517                         |

Note: Simultaneous Transmission Procedures as described in KDB648474 are not required for this product.

## 7.2.1 Combined Body SAR data

The Combined SAR data given in the tables below has been voluntarily calculated and should be ignored for FCC certification.

The following table gives a more accurate assessment of the SAR values for simultaneous transmission. These values have been calculated using the SPEAG Combined Multiband algorithm, which is based on area scans. It a) converts the 2D area scans into 3D volume scans by assuming frequency-dependent decay characteristics for the E-field, b) sums the SAR values for WLAN2450 and the cellular bands point-by-point and c) calculates the combined average SAR values.

**Simultaneous transmissions: Combined body SAR results –  
SPEAG Combined Multiband algorithm results**

| Test configuration                               | Max. Reported*1g SAR results    |                                    |                                  |                                     |
|--------------------------------------------------|---------------------------------|------------------------------------|----------------------------------|-------------------------------------|
|                                                  | 2-slot<br>GPRS850 +<br>WLAN2450 | WCDMA850<br>(Band 5) +<br>WLAN2450 | 3-slot<br>GPRS1900 +<br>WLAN2450 | WCDMA1900<br>(Band 2) +<br>WLAN2450 |
| Body: Back facing phantom,<br>Without Headset    | 1.01                            | 0.950                              | -                                | -                                   |
| Body: Back facing phantom,<br>Headset WH-108     | -                               | -                                  | 0.763                            | 1.01                                |
| Body: Display facing phantom,<br>Without Headset | -                               | -                                  | -                                | -                                   |
| Body: Display facing phantom,<br>Headset WH-108  | -                               | -                                  | -                                | -                                   |

Some of the Combined SAR values in the above table are less than the maximum SAR values for the contributing cellular band. This is due to a) minimal overlap of the SAR distributions of the cellular band with WLAN2450 and b) uncertainties associated with the different methods of calculation. In these cases, the maximum SAR values given for the combined Modes in the Summary table in Section 1.2 are those for the individual cellular band.

### 7.3 Body SAR assessment of Wireless Router mode at 10.0mm separation distance

#### GSM/GPRS/EGPRS/WCDMA 850MHz Wireless Router SAR results

| Mode        | Device orientation                 | SAR measurement | Measured 1g SAR [W/kg]                           |                     |                     | Reported* 1g SAR [W/kg] |                     |                     | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|-------------|------------------------------------|-----------------|--------------------------------------------------|---------------------|---------------------|-------------------------|---------------------|---------------------|-------------------------------------------------|--------|
|             |                                    |                 | Ch 128<br>824.2 MHz                              | Ch 190<br>836.6 MHz | Ch 251<br>848.8 MHz | Ch 128<br>824.2 MHz     | Ch 190<br>836.6 MHz | Ch 251<br>848.8 MHz |                                                 |        |
| 1-slot GPRS | Tuning Target + Tolerance [dBm]    |                 | 32.4                                             |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|             | Conducted Slot Average Power [dBm] |                 | 32.0                                             | 32.0                | 31.9                | 0.4                     | 0.4                 | 0.5                 | dB                                              |        |
|             | Time-averaged power [dBm]          |                 | 23.0                                             | 23.0                | 22.9                | 1.10                    | 1.10                | 1.12                | Lin                                             |        |
|             |                                    |                 | No testing required for this slot configuration. |                     |                     |                         |                     |                     |                                                 |        |
| 2-slot GPRS | Tuning Target + Tolerance [dBm]    |                 | 29.9                                             |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|             | Conducted Slot Average Power [dBm] |                 | 29.4                                             | 29.4                | 29.2                | 0.5                     | 0.5                 | 0.7                 | dB                                              |        |
|             | Time-averaged power [dBm]          |                 | 23.4                                             | 23.4                | 23.2                | 1.12                    | 1.12                | 1.17                | Lin                                             |        |
|             |                                    |                 | No testing required for this slot configuration. |                     |                     |                         |                     |                     |                                                 |        |
| 3-slot GPRS | Tuning Target + Tolerance [dBm]    |                 | 28.1                                             |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|             | Conducted Slot Average Power [dBm] |                 | 27.7                                             | 27.7                | 27.6                | 0.4                     | 0.4                 | 0.5                 | dB                                              |        |
|             | Time-averaged power [dBm]          |                 | 23.4                                             | 23.4                | 23.3                | 1.10                    | 1.10                | 1.12                | Lin                                             |        |
|             |                                    |                 | No testing required for this slot configuration. |                     |                     |                         |                     |                     |                                                 |        |
| 4-slot GPRS | Tuning Target + Tolerance [dBm]    |                 | 26.9                                             |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|             | Conducted Slot Average Power [dBm] |                 | 26.4                                             | 26.4                | 26.3                | 0.5                     | 0.5                 | 0.6                 | dB                                              |        |
|             | Time-averaged power [dBm]          |                 | 23.4                                             | 23.4                | 23.3                | 1.12                    | 1.12                | 1.15                | Lin                                             |        |
|             | Back facing phantom                | Estimated SAR   | 0.917                                            | 0.914               | 0.993               | 1.03                    | 1.03                | 1.140               | 0.01                                            | 14     |
|             |                                    | Full SAR        | -                                                | -                   | 1.00                | -                       | -                   | 1.15                |                                                 |        |
|             | Display facing phantom             | Estimated SAR   | -                                                | 0.636               | -                   | -                       | 0.714               | -                   | 0.02                                            | -      |
|             |                                    | Full SAR        | -                                                | 0.659               | -                   | -                       | 0.739               | -                   |                                                 |        |
|             | Top edge facing phantom            | Estimated SAR   | -                                                | 0.020               | -                   | -                       | 0.022               | -                   | -                                               | -      |
|             |                                    | Full SAR        | -                                                | -                   | -                   | -                       | -                   | -                   |                                                 |        |
|             | Bottom edge facing phantom         | Estimated SAR   | -                                                | 0.040               | -                   | -                       | 0.044               | -                   | -                                               | -      |
|             |                                    | Full SAR        | -                                                | -                   | -                   | -                       | -                   | -                   |                                                 |        |
|             | Left edge facing phantom           | Estimated SAR   | -                                                | 0.415               | -                   | -                       | 0.466               | -                   | -                                               | -      |
|             |                                    | Full SAR        | -                                                | -                   | -                   | -                       | -                   | -                   |                                                 |        |
|             | Right edge facing phantom          | Estimated SAR   | -                                                | 0.450               | -                   | -                       | 0.505               | -                   | -                                               | -      |
|             |                                    | Full SAR        | -                                                | -                   | -                   | -                       | -                   | -                   |                                                 |        |
|             | Repeated SAR Back facing phantom   |                 | -                                                | -                   | 0.962               | -                       | -                   | 1.11                | 0.01                                            | -      |
|             |                                    | -               | -                                                | 0.970               | -                   | -                       | 1.11                |                     |                                                 |        |

(GSM/GPRS/EGPRS/WCDMA 850MHz WR SAR / Table continues)



(GSM/GPRS/EGPRS/WCDMA 850MHz WR SAR / Table continues)

| Mode  | Device orientation               | SAR measurement | Measured 1g SAR [W/kg] |                      |                      | Reported* 1g SAR [W/kg] |                      |                      | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|-------|----------------------------------|-----------------|------------------------|----------------------|----------------------|-------------------------|----------------------|----------------------|-------------------------------------------------|--------|
|       |                                  |                 | Ch 4132<br>826.4 MHz   | Ch 4175<br>835.0 MHz | Ch 4233<br>846.6 MHz | Ch 4132<br>826.4 MHz    | Ch 4175<br>835.0 MHz | Ch 4233<br>846.6 MHz |                                                 |        |
| WCDMA | Tuning Target + Tolerance [dBm]  |                 | 23.9                   |                      |                      | Scaling factor*         |                      |                      |                                                 |        |
|       | Conducted Power [dBm]            |                 | 23.0                   | 23.1                 | 23.1                 | 0.9                     | 0.8                  | 0.8                  | dB                                              |        |
|       | Time-averaged power [dBm]        |                 | 23.0                   | 23.1                 | 23.1                 | 1.23                    | 1.20                 | 1.20                 | Lin                                             |        |
|       | Back facing phantom              | Estimated SAR   | 0.833                  | 0.804                | 0.970                | 1.03                    | 0.967                | 1.17                 | 0.02                                            | 15     |
|       |                                  | Full SAR        | -                      | -                    | 0.993                | -                       | -                    | 1.19                 |                                                 |        |
|       | Display facing phantom           | Estimated SAR   | -                      | 0.516                | -                    | -                       | 0.620                | -                    | 0.02                                            | -      |
|       |                                  | Full SAR        | -                      | 0.539                | -                    | -                       | 0.648                | -                    |                                                 |        |
|       | Top edge facing phantom          | Estimated SAR   | -                      | 0.016                | -                    | -                       | 0.019                | -                    | -                                               | -      |
|       |                                  | Full SAR        | -                      | -                    | -                    | -                       | -                    | -                    |                                                 |        |
|       | Bottom edge facing phantom       | Estimated SAR   | -                      | 0.030                | -                    | -                       | 0.036                | -                    | -                                               | -      |
|       |                                  | Full SAR        | -                      | -                    | -                    | -                       | -                    | -                    |                                                 |        |
|       | Left edge facing phantom         | Estimated SAR   | -                      | 0.359                | -                    | -                       | 0.432                | -                    | -                                               | -      |
|       |                                  | Full SAR        | -                      | -                    | -                    | -                       | -                    | -                    |                                                 |        |
|       | Right edge facing phantom        | Estimated SAR   | -                      | 0.397                | -                    | -                       | 0.477                | -                    | -                                               | -      |
|       |                                  | Full SAR        | -                      | -                    | -                    | -                       | -                    | -                    |                                                 |        |
|       | Repeated SAR Back facing phantom | Estimated SAR   | -                      | -                    | 0.961                | -                       | -                    | 1.16                 | 0.02                                            | -      |
|       |                                  | Full SAR        | -                      | -                    | 0.979                | -                       | -                    | 1.18                 |                                                 |        |

### GSM/GPRS/EGPRS/WCDMA1900 Wireless Router SAR results

| Mode        | Device orientation                 | SAR measurement | Measured 1g SAR [W/kg]                           |            |            | Reported* 1g SAR [W/kg] |            |            | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|-------------|------------------------------------|-----------------|--------------------------------------------------|------------|------------|-------------------------|------------|------------|-------------------------------------------------|--------|
|             |                                    |                 | Ch 512                                           | Ch 661     | Ch 810     | Ch 512                  | Ch 661     | Ch 810     |                                                 |        |
|             |                                    |                 | 1850.2 MHz                                       | 1880.0 MHz | 1909.8 MHz | 1850.2 MHz              | 1880.0 MHz | 1909.8 MHz |                                                 |        |
| 1-slot GPRS | Tuning Target + Tolerance [dBm]    |                 | 26.9                                             |            |            | Scaling factor*         |            |            |                                                 |        |
|             | Conducted Slot Average Power [dBm] |                 | 26.5                                             | 26.6       | 26.5       | 0.4                     | 0.3        | 0.4        | dB                                              |        |
|             | Time-averaged power [dBm]          |                 | 17.5                                             | 17.6       | 17.5       | 1.10                    | 1.07       | 1.10       | Lin                                             |        |
|             |                                    |                 |                                                  |            |            |                         |            |            |                                                 |        |
| 2-slot GPRS | Tuning Target + Tolerance [dBm]    |                 | 23.9                                             |            |            | Scaling factor*         |            |            |                                                 |        |
|             | Conducted Slot Average Power [dBm] |                 | 23.6                                             | 23.6       | 23.5       | 0.3                     | 0.3        | 0.4        | dB                                              |        |
|             | Time-averaged power [dBm]          |                 | 17.6                                             | 17.6       | 17.5       | 1.07                    | 1.07       | 1.10       | Lin                                             |        |
|             | Back facing phantom                | Estimated SAR   | -                                                | 0.368      | -          | -                       | 0.394      | -          | -                                               | -      |
|             |                                    | Full SAR        | -                                                | -          | -          | -                       | -          | -          |                                                 |        |
|             | Display facing phantom             | Estimated SAR   | -                                                | 0.228      | -          | -                       | 0.244      | -          | -                                               | -      |
|             |                                    | Full SAR        | -                                                | -          | -          | -                       | -          | -          |                                                 |        |
|             | Top edge facing phantom            | Estimated SAR   | -                                                | 0.041      | -          | -                       | 0.044      | -          | -                                               | -      |
|             |                                    | Full SAR        | -                                                | -          | -          | -                       | -          | -          |                                                 |        |
|             | Bottom edge facing phantom         | Estimated SAR   | 0.386                                            | 0.561      | 0.788      | 0.414                   | 0.601      | 0.864      | 0.03                                            | 16     |
|             |                                    | Full SAR        | -                                                | -          | 0.760      | -                       | -          | 0.833      |                                                 |        |
|             | Left edge facing phantom           | Estimated SAR   | -                                                | 0.070      | -          | -                       | 0.075      | -          | -                                               | -      |
|             |                                    | Full SAR        | -                                                | -          | -          | -                       | -          | -          |                                                 |        |
|             | Right edge facing phantom          | Estimated SAR   | -                                                | 0.042      | -          | -                       | 0.045      | -          | -                                               | -      |
| Full SAR    |                                    | -               | -                                                | -          | -          | -                       | -          |            |                                                 |        |
| 3-slot GPRS | Tuning Target + Tolerance [dBm]    |                 | 22.1                                             |            |            | Scaling factor*         |            |            |                                                 |        |
|             | Conducted Slot Average Power [dBm] |                 | 21.6                                             | 21.6       | 21.5       | 0.5                     | 0.5        | 0.6        | dB                                              |        |
|             | Time-averaged power [dBm]          |                 | 17.3                                             | 17.3       | 17.2       | 1.12                    | 1.12       | 1.15       | Lin                                             |        |
|             |                                    |                 | No testing required for this slot configuration. |            |            |                         |            |            |                                                 |        |
| 4-slot GPRS | Tuning Target + Tolerance [dBm]    |                 | 20.9                                             |            |            | Scaling factor*         |            |            |                                                 |        |
|             | Conducted Slot Average Power [dBm] |                 | 20.5                                             | 20.5       | 20.3       | 0.4                     | 0.4        | 0.6        | dB                                              |        |
|             | Time-averaged power [dBm]          |                 | 17.5                                             | 17.5       | 17.3       | 1.10                    | 1.10       | 1.15       | Lin                                             |        |
|             |                                    |                 | No testing required for this slot configuration. |            |            |                         |            |            |                                                 |        |

(GSM/GPRS/EGPRS/WCDMA1900 WR SAR / Table continues)

(GSM/GPRS/EGPRS/WCDMA1900 WR SAR / Table continues)

| Mode  | Device orientation                  | SAR measurement | Measured 1g SAR [W/kg] |                       |                       | Reported* 1g SAR [W/kg] |                       |                       | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|-------|-------------------------------------|-----------------|------------------------|-----------------------|-----------------------|-------------------------|-----------------------|-----------------------|-------------------------------------------------|--------|
|       |                                     |                 | Ch 9262<br>1852.4 MHz  | Ch 9400<br>1880.0 MHz | Ch 9538<br>1907.6 MHz | Ch 9262<br>1852.4 MHz   | Ch 9400<br>1880.0 MHz | Ch 9538<br>1907.6 MHz |                                                 |        |
| WCDMA | Tuning Target + Tolerance [dBm]     |                 | 17.9                   |                       |                       | Scaling factor*         |                       |                       |                                                 |        |
|       | Conducted Power [dBm]               |                 | 17.5                   | 17.8                  | 17.7                  | 0.4                     | 0.1                   | 0.2                   | dB                                              |        |
|       | Time-averaged power [dBm]           |                 | 17.5                   | 17.8                  | 17.7                  | 1.10                    | 1.02                  | 1.05                  | Lin                                             |        |
|       | Back facing phantom                 | Estimated SAR   | -                      | 0.441                 | -                     | -                       | 0.451                 | -                     | 0.07                                            | -      |
|       |                                     | Full SAR        | -                      | 0.507                 | -                     | -                       | 0.519                 | -                     |                                                 |        |
|       | Display facing phantom              | Estimated SAR   | -                      | 0.295                 | -                     | -                       | 0.302                 | -                     | -                                               | -      |
|       |                                     | Full SAR        | -                      | -                     | -                     | -                       | -                     | -                     |                                                 |        |
|       | Top edge facing phantom             | Estimated SAR   | -                      | 0.038                 | -                     | -                       | 0.039                 | -                     | -                                               | -      |
|       |                                     | Full SAR        | -                      | -                     | -                     | -                       | -                     | -                     |                                                 |        |
|       | Bottom edge facing phantom          | Estimated SAR   | 0.385                  | 0.638                 | 0.872                 | 0.422                   | 0.653                 | 0.913                 | 0.02                                            | -      |
|       |                                     | Full SAR        | -                      | -                     | 0.854                 | -                       | -                     | 0.894                 |                                                 |        |
|       | Left edge facing phantom            | Estimated SAR   | -                      | 0.081                 | -                     | -                       | 0.082                 | -                     | -                                               | -      |
|       |                                     | Full SAR        | -                      | -                     | -                     | -                       | -                     | -                     |                                                 |        |
|       | Right edge facing phantom           | Estimated SAR   | -                      | 0.052                 | -                     | -                       | 0.053                 | -                     | -                                               | -      |
|       |                                     | Full SAR        | -                      | -                     | -                     | -                       | -                     | -                     |                                                 |        |
|       | Repeated SAR Display facing phantom | Estimated SAR   | -                      | -                     | 0.865                 |                         |                       | 0.906                 | 0.01                                            | 17     |
|       |                                     | Full SAR        | -                      | -                     | 0.857                 | -                       | -                     | 0.897                 |                                                 |        |

### 2450MHz Wireless Router SAR results

| Mode                             | Test configuration              | SAR measurement | Measured 1g SAR [W/kg] |                    |                     | Reported* 1g SAR [W/kg] |                    |                     | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|----------------------------------|---------------------------------|-----------------|------------------------|--------------------|---------------------|-------------------------|--------------------|---------------------|-------------------------------------------------|--------|
|                                  |                                 |                 | Ch 1<br>2412.0 MHz     | Ch 6<br>2437.0 MHz | Ch 11<br>2462.0 MHz | Ch 1<br>2412.0 MHz      | Ch 6<br>2437.0 MHz | Ch 11<br>2462.0 MHz |                                                 |        |
| WLAN<br>b-mode<br>BPSK<br>1 Mbps | Tuning Target + Tolerance [dBm] |                 | 18.5                   |                    |                     | Scaling factor*         |                    |                     |                                                 |        |
|                                  | Conducted Power [dBm]           |                 | 17.2                   | 17.5               | 17.8                | 1.3                     | 1.0                | 0.7                 | dB                                              |        |
|                                  | Time-averaged power [dBm]       |                 | 17.2                   | 17.5               | 17.8                | 1.35                    | 1.26               | 1.17                | Lin                                             |        |
|                                  | Back facing phantom             | Estimated SAR   | -                      | 0.145              | -                   | -                       | 0.183              | -                   | -                                               | -      |
|                                  |                                 | Full SAR        | -                      | -                  | -                   | -                       | -                  | -                   |                                                 |        |
|                                  | Display facing phantom          | Estimated SAR   | -                      | 0.039              | -                   | -                       | 0.049              | -                   | -                                               | -      |
|                                  |                                 | Full SAR        | -                      | -                  | -                   | -                       | -                  | -                   |                                                 |        |
|                                  | Top edge facing phantom         | Estimated SAR   | -                      | 0.034              | -                   | -                       | 0.043              | -                   | -                                               | -      |
|                                  |                                 | Full SAR        | -                      | -                  | -                   | -                       | -                  | -                   |                                                 |        |
|                                  | Bottom edge facing phantom      | Estimated SAR   | -                      | 0.008              | -                   | -                       | 0.009              | -                   | -                                               | -      |
|                                  |                                 | Full SAR        | -                      | -                  | -                   | -                       | -                  | -                   |                                                 |        |
|                                  | Left edge facing phantom        | Estimated SAR   | -                      | 0.014              | -                   | -                       | 0.018              | -                   | -                                               | -      |
|                                  |                                 | Full SAR        | -                      | -                  | -                   | -                       | -                  | -                   |                                                 |        |
|                                  | Right edge facing phantom       | Estimated SAR   | 0.165                  | 0.153              | 0.146               | 0.223                   | 0.193              | 0.172               | 0.00                                            | 18     |
|                                  |                                 | Full SAR        | 0.166                  | -                  | -                   | 0.224                   | -                  | -                   |                                                 |        |

**Simultaneous transmissions: Combined SAR results –  
Individual band Max results**

| Test configuration         | Max. Reported* 1g SAR results |                |                   |                 |                     |
|----------------------------|-------------------------------|----------------|-------------------|-----------------|---------------------|
|                            | WLAN 2450                     | 4-slot GPRS850 | WCDMA850 (Band 5) | 2-slot GPRS1900 | WCDMA 1900 (Band 2) |
| Back facing phantom        | 0.183                         | 1.15           | 1.19              | 0.394           | 0.519               |
| Display facing phantom     | 0.049                         | 0.739          | 0.648             | 0.244           | 0.302               |
| Top edge facing phantom    | 0.043                         | 0.022          | 0.019             | 0.044           | 0.039               |
| Bottom edge facing phantom | 0.009                         | 0.044          | 0.036             | 0.833           | 0.897               |
| Left edge facing phantom   | 0.018                         | 0.466          | 0.432             | 0.075           | 0.082               |
| Right edge facing phantom  | 0.224                         | 0.505          | 0.477             | 0.045           | 0.053               |

**Simultaneous transmissions: Combined SAR results –  
Max + Max combined results**

| Test configuration         | Max. Reported* 1g SAR results |                              |                            |                               |
|----------------------------|-------------------------------|------------------------------|----------------------------|-------------------------------|
|                            | 4-slot GPRS850 + WLAN2450     | WCDMA850 (Band 5) + WLAN2450 | 2-slot GPRS1900 + WLAN2450 | WCDMA1900 (Band 2) + WLAN2450 |
| Back facing phantom        | <b>1.33</b>                   | <b>1.37</b>                  | 0.577                      | 0.702                         |
| Display facing phantom     | 0.788                         | 0.697                        | 0.293                      | 0.351                         |
| Top edge facing phantom    | 0.065                         | 0.062                        | 0.087                      | 0.082                         |
| Bottom edge facing phantom | 0.053                         | 0.045                        | <b>0.842</b>               | <b>0.906</b>                  |
| Left edge facing phantom   | 0.484                         | 0.450                        | 0.093                      | 0.100                         |
| Right edge facing phantom  | 0.729                         | 0.701                        | 0.269                      | 0.277                         |

Note: Simultaneous Transmission Procedures as described in KDB648474 are not required for this product.

### 7.3.1 Combined Body SAR data

The Combined SAR data given in the tables below has been voluntarily calculated and should be ignored for FCC certification.

The following table gives a more accurate assessment of the SAR values for simultaneous transmission. These values have been calculated using the SPEAG Combined Multiband algorithm, which is based on area scans. It a) converts the 2D area scans into 3D volume scans by assuming frequency-dependent decay characteristics for the E-field, b) sums the SAR values for WLAN2450 and the cellular bands point-by-point and c) calculates the combined average SAR values. It is these values that appear in the Summary table Section 1.2.3.

**Simultaneous transmissions: Combined SAR results –  
SPEAG Combined Multiband algorithm results**

| Test configuration         | Max. Reported* 1g SAR results   |                                    |                                  |                                     |
|----------------------------|---------------------------------|------------------------------------|----------------------------------|-------------------------------------|
|                            | 4-slot<br>GPRS850 +<br>WLAN2450 | WCDMA850<br>(Band 5)<br>+ WLAN2450 | 2-slot<br>GPRS1900<br>+ WLAN2450 | WCDMA1900<br>(Band 2) +<br>WLAN2450 |
| Back facing phantom        | 1.31                            | 1.33                               | -                                | -                                   |
| Display facing phantom     | -                               | -                                  | -                                | -                                   |
| Top edge facing phantom    | -                               | -                                  | -                                | -                                   |
| Bottom edge facing phantom | -                               | -                                  | 0.873                            | 0.922                               |
| Left edge facing phantom   | -                               | -                                  | -                                | -                                   |
| Right edge facing phantom  | -                               | -                                  | -                                | -                                   |

Plots of the Measurement scans are given in Appendix B.

## APPENDIX A: SYSTEM CHECK SCANS

### Plot1:

Date/Time: 2014-05-14 8:40:23 AM

Test Laboratory: TCC Nokia

Type: D835V2; Serial: D835V2 - SN:480

### Communication System: CW835

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium Notes: t= 22.0 C

Medium parameters used: f = 835 MHz;  $\sigma = 0.908 \text{ S/m}$ ;  $\epsilon_r = 40.18$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

#### DASY Configuration:

- Probe: ES3DV3 - SN3194
- ConvF(6.12, 6.12, 6.12); Calibrated: 2013-11-14;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2013-11-19
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.10 (7164)

**d=15mm, Pin=250mW/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.73 W/kg

**d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 53.468 V/m


Peak SAR (extrapolated) = 3.44 W/kg

**SAR(1 g) = 2.33 W/kg**

**SAR(10 g) = 1.53 W/kg**

**Power Drift = -0.02 dB**

Maximum value of SAR (measured) = 2.74 W/kg

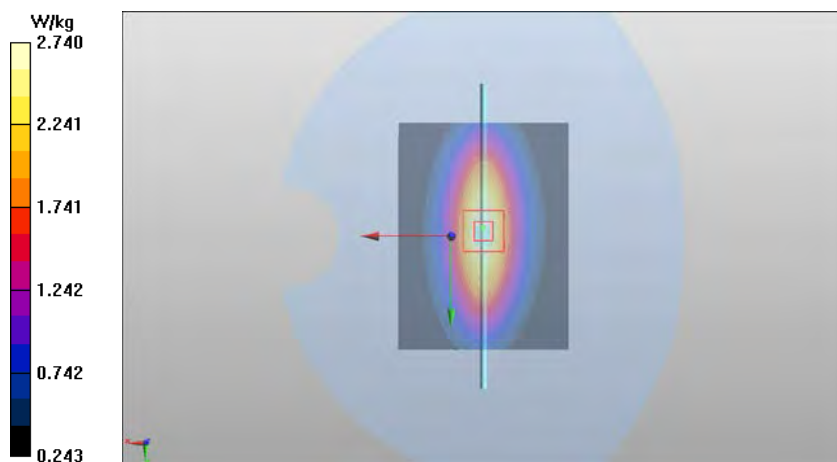

## Plot2:

Date/Time: 2014-05-13 11:39:16 AM

Test Laboratory: TCC Nokia

Type: D1900V2; Serial: D1900V2 - SN:5d013

### Communication System: CW1900

Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium Notes:  $t = 21.4$  C

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.39$  S/m;  $\epsilon_r = 38.745$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### DASY Configuration:

- Probe: ES3DV3 - SN3131
- ConvF(4.98, 4.98, 4.98); Calibrated: 2013-06-18;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2013-06-10
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.10 (7164)

**d=10mm, Pin=250mW/Area Scan (81x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 12.1 W/kg

**d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 87.294 V/m


Peak SAR (extrapolated) = 17.1 W/kg

**SAR(1 g) = 9.47 W/kg**

**SAR(10 g) = 4.94 W/kg**

**Power Drift = -0.01 dB**

Maximum value of SAR (measured) = 11.9 W/kg

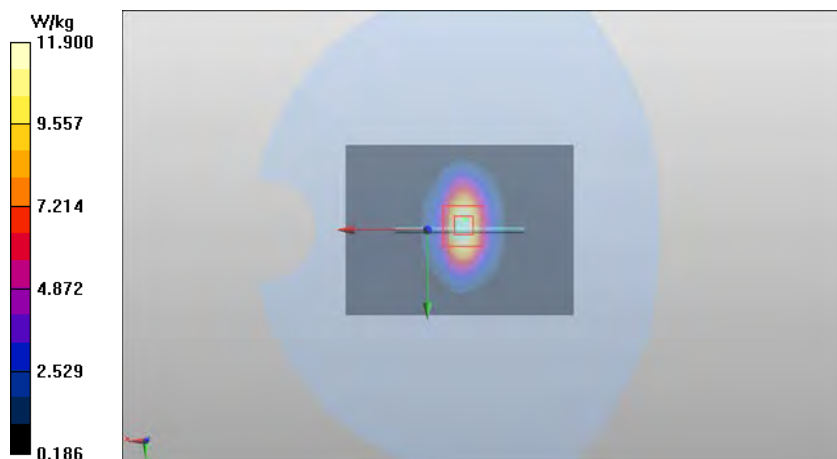



### Plot3:

Date/Time: 2014-05-14 7:46:51 AM

Test Laboratory: TCC Nokia

Type: D2450V2; Serial: D2450V2 - SN:749

### Communication System: CW2450

Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL2450; Medium Notes:  $t = 21.2$  C

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.811$  S/m;  $\epsilon_r = 39.297$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

### DASY Configuration:

- Probe: EX3DV4 - SN3960
- ConvF(7.39, 7.39, 7.39); Calibrated: 2013-12-10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1302; Calibrated: 2013-11-08
- Phantom: #4 SAM, SAR4 ; Type: QD000P40CD; Serial: TP-1691
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.10 (7164)

**d=10mm, Pin=250mW/Area Scan (61x81x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 18.3 W/kg

**d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.029 V/m


Peak SAR (extrapolated) = 28.4 W/kg

**SAR(1 g) = 13.7 W/kg**

**SAR(10 g) = 6.33 W/kg**

**Power Drift = -0.01 dB**

Maximum value of SAR (measured) = 18.2 W/kg

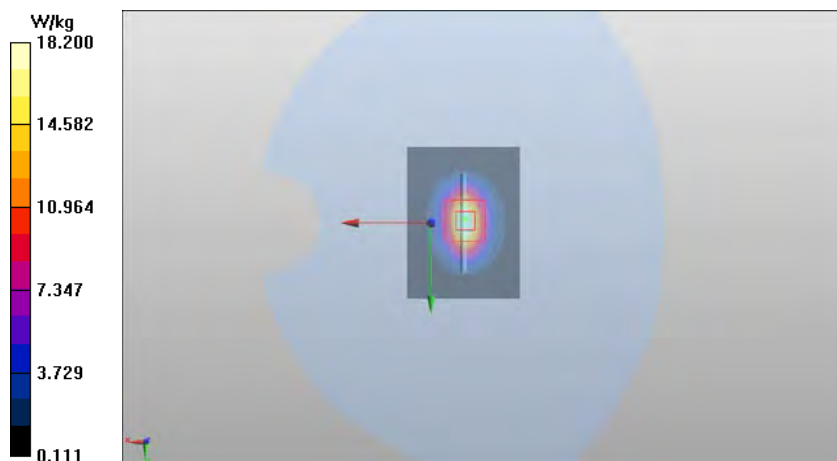

#### Plot4:

Date/Time: 2014-05-20 7:47:18 AM

Test Laboratory: TCC Nokia

Type: D835V2; Serial: D835V2 - SN:480

#### Communication System: CW835

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: BSL850; Medium Notes:  $t = 21.7$  C

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.972$  S/m;  $\epsilon_r = 54.231$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

#### DASY Configuration:

- Probe: ES3DV3 - SN3194
- ConvF(6.05, 6.05, 6.05); Calibrated: 2013-11-14;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2013-11-19
- Phantom: SAM 3 Triple Phantom 5.1C; Type: QD 000 P51 CA; Serial: TP-1123/3
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.10 (7164)

**d=15mm, Pin=250mW/Area Scan (81x61x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 2.68 W/kg

**d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm

Reference Value = 51.398 V/m


Peak SAR (extrapolated) = 3.32 W/kg

**SAR(1 g) = 2.3 W/kg**

**SAR(10 g) = 1.52 W/kg**

**Power Drift = -0.06 dB**

Maximum value of SAR (measured) = 2.67 W/kg

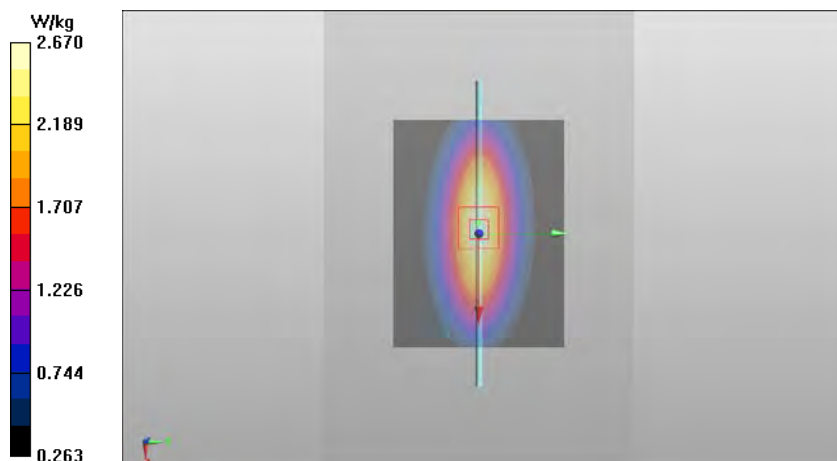

**Plot5:**

Date/Time: 2014-05-16 7:46:03 AM

Test Laboratory: TCC Nokia

Type: D1900V2; Serial: D1900V2 - SN:5d013

**Communication System: CW1900**

Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: BSL1900; Medium Notes:  $t = 20.5$  C

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.528$  S/m;  $\epsilon_r = 52.176$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

**DASY Configuration:**

- Probe: ES3DV3 - SN3131
- ConvF(4.62, 4.62, 4.62); Calibrated: 2013-06-18;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2013-06-10
- Phantom: SAM 3 Triple Phantom 5.1C; Type: QD 000 P51 CA; Serial: TP-1123/2
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.10 (7164)

**d=10mm, Pin=250mW/Area Scan (81x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 13.2 W/kg

**d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 87.322 V/m


Peak SAR (extrapolated) = 17.0 W/kg

**SAR(1 g) = 9.94 W/kg**

**SAR(10 g) = 5.26 W/kg**

**Power Drift = -0.00 dB**

Maximum value of SAR (measured) = 12.4 W/kg

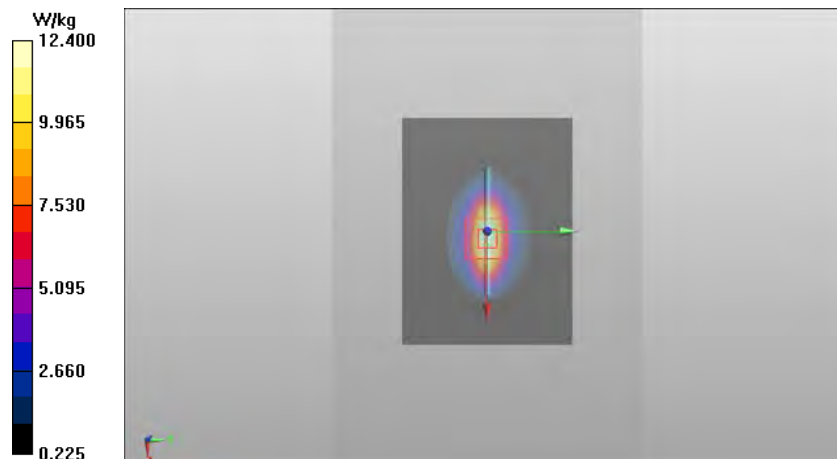

**Plot6:**

Date/Time: 2014-05-16 7:38:43 AM

Test Laboratory: TCC Nokia

Type: D2450V2; Serial: D2450V2 - SN:749

**Communication System: CW2450**

Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: BSL2450; Medium Notes:  $t = 21.2$  C

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.938$  S/m;  $\epsilon_r = 52.288$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

**DASY Configuration:**

- Probe: EX3DV4 - SN3960
- ConvF(7.44, 7.44, 7.44); Calibrated: 2013-12-10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1302; Calibrated: 2013-11-08
- Phantom: #2 Triple, SAR4; Type: QD 000 P51 CA; Serial: TP-1124/1
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.10 (7164)

**d=10mm, Pin=250mW/Area Scan (81x61x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 16.5 W/kg

**d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 85.782 V/m


Peak SAR (extrapolated) = 25.3 W/kg

**SAR(1 g) = 12.4 W/kg**

**SAR(10 g) = 5.82 W/kg**

**Power Drift = 0.00 dB**

Maximum value of SAR (measured) = 16.3 W/kg

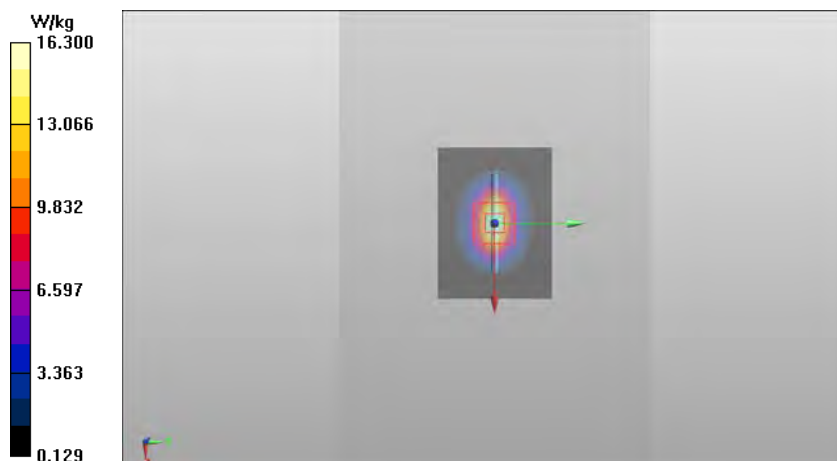

## APPENDIX B: MEASUREMENT SCANS

### Plot1:

Date/Time: 2014-05-13 2:40:08 PM

Test Laboratory: TCC Nokia

Type: RM-1018; Serial: 004402/47/827374/5

### Communication System: 2-slot GPRS850

Frequency: 848.8 MHz; Duty Cycle: 1:4.19952

Medium: HSL835; Medium Notes: t= 22.2 C

Medium parameters used: f = 849 MHz;  $\sigma = 0.927$  S/m;  $\epsilon_r = 40.437$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

#### DASY Configuration:

- Probe: ES3DV3 - SN3194
- ConvF(6.12, 6.12, 6.12); Calibrated: 2013-11-14;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2013-11-19
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.10 (7164)

### 2-slot GPRS850 - Left/Cheek - High/Area Scan (81x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.702 W/kg

### 2-slot GPRS850 - Left/Cheek - High/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 27.747 V/m


Peak SAR (extrapolated) = 0.799 W/kg

**SAR(1 g) = 0.631 W/kg**

**SAR(10 g) = 0.467 W/kg**

**Power Drift = 0.18 dB**

Maximum value of SAR (measured) = 0.694 W/kg

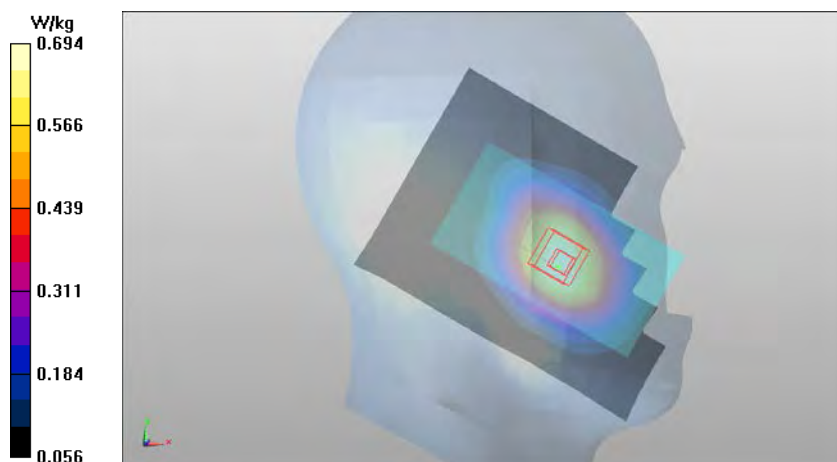

**Plot2:**

Date/Time: 2014-05-14 10:50:53 AM

Test Laboratory: TCC Nokia

Type: RM-1018; Serial: 004402/47/827374/5

**Communication System: WCDMA850 (Band 5)**

Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium Notes: t= 22.0 C

Medium parameters used: f = 847 MHz;  $\sigma = 0.916$  S/m;  $\epsilon_r = 40.101$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

**DASY Configuration:**

- Probe: ES3DV3 - SN3194
- ConvF(6.12, 6.12, 6.12); Calibrated: 2013-11-14;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2013-11-19
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.10 (7164)

**WCDMA850 (Band 5) - Right/Cheek - High/Area Scan (81x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.659 W/kg

**WCDMA850 (Band 5) - Right/Cheek - High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 27.216 V/m


Peak SAR (extrapolated) = 0.732 W/kg

**SAR(1 g) = 0.590 W/kg**

**SAR(10 g) = 0.442 W/kg**

**Power Drift = -0.04 dB**

Maximum value of SAR (measured) = 0.650 W/kg

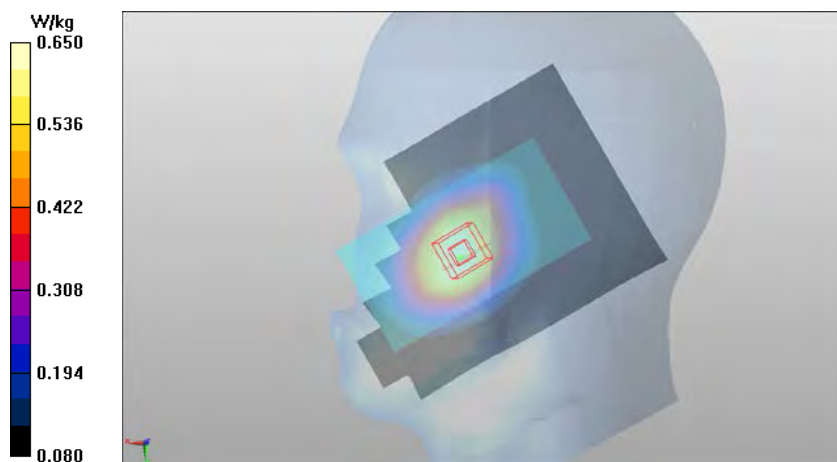

**Plot3:**

Date/Time: 2014-05-13 2:03:07 PM

Test Laboratory: TCC Nokia

Type: RM-1018; Serial: 004402/47/827370/3

**Communication System: 3-slot GPRS1900**

Frequency: 1850.2 MHz; Duty Cycle: 1:2.80027

Medium: HSL1900; Medium Notes: t= 21.4 C

Medium parameters used (interpolated): f = 1850.2 MHz;  $\sigma = 1.343$  S/m;  $\epsilon_r = 38.911$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

**DASY Configuration:**

- Probe: ES3DV3 - SN3131
- ConvF(4.98, 4.98, 4.98); Calibrated: 2013-06-18;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2013-06-10
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.10 (7164)

**3-slot GPRS1900 - Left/Cheek - Low/Area Scan (81x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.458 W/kg

**3-slot GPRS1900 - Left/Cheek - Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 18.712 V/m


Peak SAR (extrapolated) = 0.600 W/kg

**SAR(1 g) = 0.404 W/kg**

**SAR(10 g) = 0.255 W/kg**

**Power Drift = 0.03 dB**

Maximum value of SAR (measured) = 0.454 W/kg

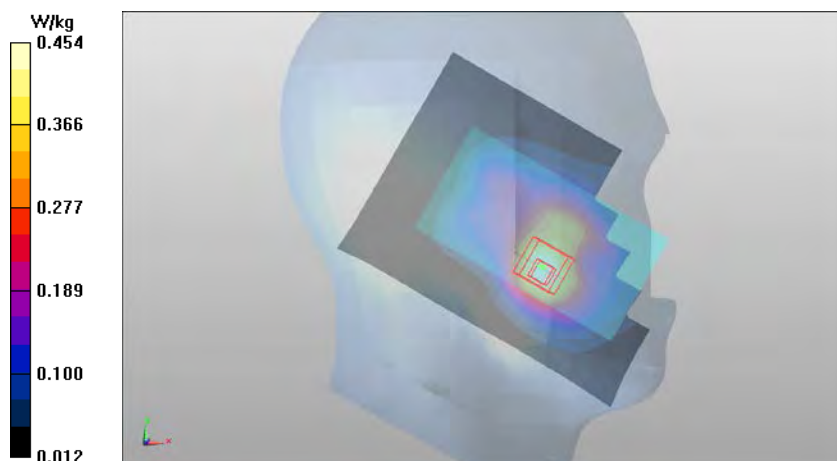



**Plot4:**

Date/Time: 2014-05-13 4:30:17 PM

Test Laboratory: TCC Nokia

Type: RM-1018; Serial: 004402/47/827370/3

**Communication System: WCDMA1900 (Band 2)**

Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium Notes: t= 21.4 C

Medium parameters used (interpolated): f = 1852.4 MHz;  $\sigma = 1.345$  S/m;  $\epsilon_r = 38.906$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

**DASY Configuration:**

- Probe: ES3DV3 - SN3131
- ConvF{4.98, 4.98, 4.98}; Calibrated: 2013-06-18;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2013-06-10
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.10 (7164)

**WCDMA1900 (Band 2) - Left/Cheek - Low/Area Scan (81x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.691 W/kg

**WCDMA1900 (Band 2) - Left/Cheek - Low/Zoom Scan (6x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 22.685 V/m


Peak SAR (extrapolated) = 0.936 W/kg

**SAR(1 g) = 0.625 W/kg**

**SAR(10 g) = 0.387 W/kg**

**Power Drift = 0.04 dB**

Maximum value of SAR (measured) = 0.686 W/kg

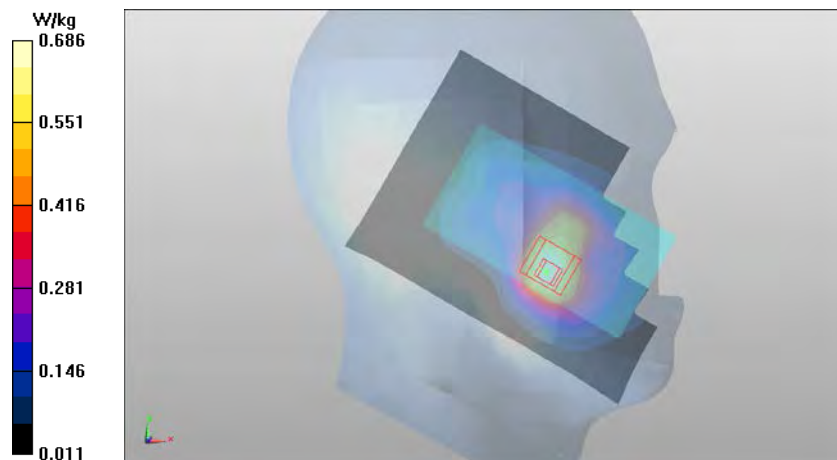



**Plot5:**

Date/Time: 2014-05-14 8:19:27 AM

Test Laboratory: TCC Nokia

Type: RM-1018; Serial: 004402/47/827381/0

**Communication System: WLAN2450**

Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: HSL 2450; Medium Notes:  $t = 21,4$  C

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.763$  S/m;  $\epsilon_r = 39.999$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

**DASY Configuration:**

- Probe: EX3DV4 - SN3960
- ConvF(7.39, 7.39, 7.39); Calibrated: 2013-12-10;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1302; Calibrated: 2013-11-08
- Phantom: #4 SAM, SAR4 ; Type: QD000P40CD; Serial: #4SAM SAR4
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.10 (7164)

**WLAN2450 b-mode - Left/Cheek - Channel 1 - BPSK 1 Mbps/Area Scan (121x181x1): Interpolated grid:**

$dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 0.341 W/kg

**WLAN2450 b-mode - Left/Cheek - Channel 1 - BPSK 1 Mbps/Zoom Scan (7x7x7)/Cube 0: Measurement grid:**

$dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 13.740 V/m


Peak SAR (extrapolated) = 0.530 W/kg

**SAR(1 g) = 0.259 W/kg**

**SAR(10 g) = 0.127 W/kg**

**Power Drift = 0.03 dB**

Maximum value of SAR (measured) = 0.339 W/kg

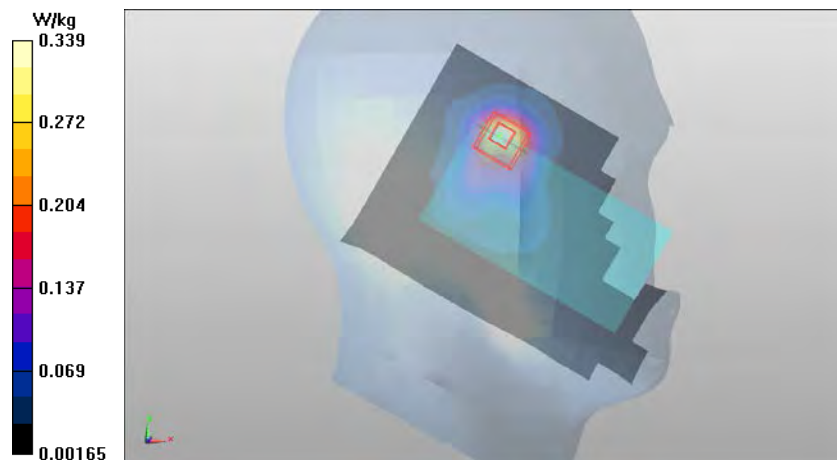

## Plot6:

Date/Time: 2014-05-19 10:30:40 AM

Test Laboratory: TCC Nokia

Type: RM-1018; Serial: 004402/47/827374/5

### Communication System: 2-slot GPRS850

Frequency: 848.8 MHz; Duty Cycle: 1:4.19952

Medium: BSL850; Medium Notes: t= 21.4 C

Medium parameters used: f = 849 MHz;  $\sigma = 0.975$  S/m;  $\epsilon_r = 54.113$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

#### DASY Configuration:

- Probe: ES3DV3 - SN3194
- ConvF(6.05, 6.05, 6.05); Calibrated: 2013-11-14;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2013-11-19
- Phantom: SAM 3 Triple Phantom 5.1C; Type: QD 000 P51 CA; Serial: TP-1123/3
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.10 (7164)

### 2-slot GPRS850/Body - High - Spacer 15mm - No headset - Back Facing Phantom/Area Scan (81x121x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.870 W/kg

### 2-slot GPRS850/Body - High - Spacer 15mm - No headset - Back Facing Phantom/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 30.646 V/m


Peak SAR (extrapolated) = 1.01 W/kg

**SAR(1 g) = 0.780 W/kg**

**SAR(10 g) = 0.575 W/kg**

**Power Drift = -0.02 dB**

Maximum value of SAR (measured) = 0.872 W/kg

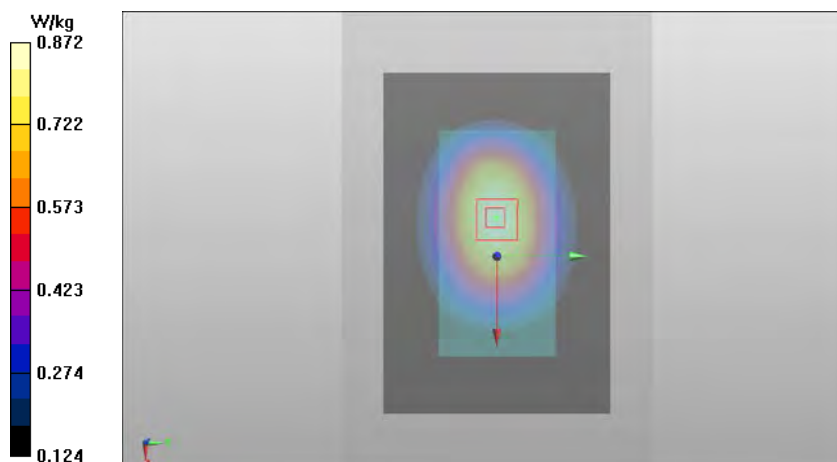

SAR Report

FCC\_RM-1018\_01

Applicant: Microsoft Mobile

Type: RM-1018

Copyright © 2014 TCC Microsoft

## Plot7:

Date/Time: 2014-05-19 1:25:17 PM

Test Laboratory: TCC Nokia

Type: RM-1018; Serial: 004402/47/827374/5

### Communication System: WCDMA850 (Band 5)

Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: BSL850; Medium Notes: t= 21.4 C

Medium parameters used: f = 847 MHz;  $\sigma = 0.973$  S/m;  $\epsilon_r = 54.121$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

#### DASY Configuration:

- Probe: ES3DV3 - SN3194
- ConvF(6.05, 6.05, 6.05); Calibrated: 2013-11-14;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2013-11-19
- Phantom: SAM 3 Triple Phantom 5.1C; Type: QD 000 P51 CA; Serial: TP-1123/3
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.10 (7164)

### WCDMA850 (Band 5)/Body - High - Spacer 15mm - No headset - Back Facing Phantom/Area Scan (81x121x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.823 W/kg

### WCDMA850 (Band 5)/Body - High - Spacer 15mm - No headset - Back Facing Phantom/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 30.143 V/m

Peak SAR (extrapolated) = 0.936 W/kg

**SAR(1 g) = 0.739 W/kg**

**SAR(10 g) = 0.547 W/kg**

**Power Drift = -0.05 dB**

Maximum value of SAR (measured) = 0.780 W/kg



## Plot8:

Date/Time: 2014-05-16 9:31:00 AM

Test Laboratory: TCC Nokia

Type: RM-1018; Serial: 004402/47/827370/3

### Communication System: 3-slot GPRS1900

Frequency: 1909.8 MHz; Duty Cycle: 1:2.80027

Medium: BSL1900; Medium Notes: t= 20.5 C

Medium parameters used: f = 1910 MHz;  $\sigma$  = 1.539 S/m;  $\epsilon_r$  = 52.145;  $\rho$  = 1000 kg/m<sup>3</sup>

Phantom section: Center Section

#### DASY Configuration:

- Probe: ES3DV3 - SN3131
- ConvF{4.62, 4.62, 4.62}; Calibrated: 2013-06-18;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2013-06-10
- Phantom: SAM 3 Triple Phantom 5.1C; Type: QD 000 P51 CA; Serial: TP-1123/2
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.10 (7164)

### 3-slot GPRS1900/Body - High - Spacer 15mm - WH-108 - Back Facing Phantom/Area Scan (81x121x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.842 W/kg

### 3-slot GPRS1900/Body - High - Spacer 15mm - WH-108 - Back Facing Phantom/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 21.858 V/m

Peak SAR (extrapolated) = 1.05 W/kg

**SAR(1 g) = 0.668 W/kg**

**SAR(10 g) = 0.377 W/kg**

**Power Drift = 0.14 dB**

Maximum value of SAR (measured) = 0.809 W/kg



SAR Report

FCC\_RM-1018\_01

Applicant: Microsoft Mobile

Type: RM-1018

Copyright © 2014 TCC Microsoft

**Plot9:**

Date/Time: 2014-05-16 11:24:01 AM

Test Laboratory: TCC Nokia

Type: RM-1018; Serial: 004402/47/827370/3

**Communication System: WCDMA1900 (Band 2)**

Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: BSL1900; Medium Notes: t= 20.5 C

Medium parameters used: f = 1908 MHz;  $\sigma = 1.537$  S/m;  $\epsilon_r = 52.151$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

**DASY Configuration:**

- Probe: ES3DV3 - SN3131
- ConvF{4.62, 4.62, 4.62}; Calibrated: 2013-06-18;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2013-06-10
- Phantom: SAM 3 Triple Phantom 5.1C; Type: QD 000 P51 CA; Serial: TP-1123/2
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.10 (7164)

**WCDMA1900 (Band 2)/Body - High - Spacer 15mm - WH-108 - Back Facing Phantom - Repeated/Area Scan (81x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.14 W/kg

**WCDMA1900 (Band 2)/Body - High - Spacer 15mm - WH-108 - Back Facing Phantom - Repeated/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 25.497 V/m


Peak SAR (extrapolated) = 1.45 W/kg

**SAR(1 g) = 0.917 W/kg**

**SAR(10 g) = 0.517 W/kg**

**Power Drift = 0.04 dB**

Maximum value of SAR (measured) = 1.03 W/kg

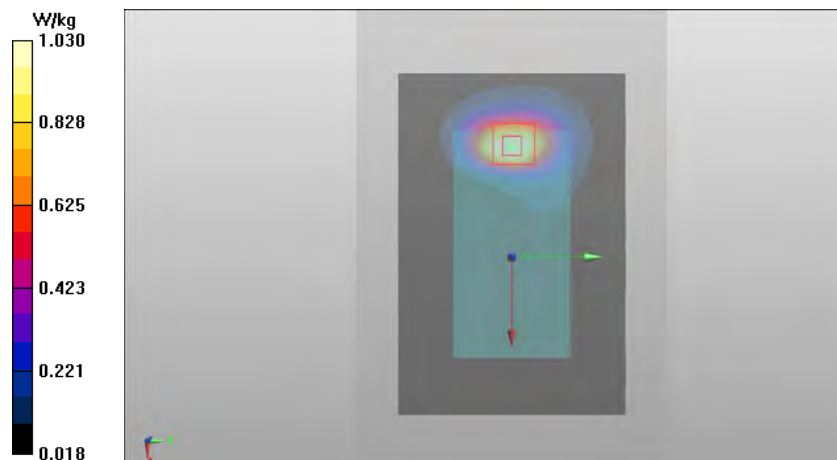

**Plot10:**

Date/Time: 2014-05-15 3:17:11 PM

Test Laboratory: TCC Nokia

Type: RM-1018; Serial: 004402/47/827381/0

**Communication System: WLAN2450**

Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: BSL2450; Medium Notes:  $t = 21.3$  C

Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.947$  S/m;  $\epsilon_r = 52.426$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

**DASY Configuration:**

- Probe: EX3DV4 - SN3960
- ConvF(7.44, 7.44, 7.44); Calibrated: 2013-12-10;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1302; Calibrated: 2013-11-08
- Phantom: #2 Triple, SAR4; Type: QD 000 P51 CA; Serial: TP-1124/1
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.10 (7164)

**WLAN2450 b-mode/Body - Channel 11 - BPSK 1 Mbps - Spacer 15mm - No Headset - Back Facing**

**Phantom/Area Scan (121x181x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 0.130 W/kg

**WLAN2450 b-mode/Body - Channel 11 - BPSK 1 Mbps - Spacer 15mm - No Headset - Back Facing**

**Phantom/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 7.935 V/m

Peak SAR (extrapolated) = 0.188 W/kg

**SAR(1 g) = 0.108 W/kg**

**SAR(10 g) = 0.063 W/kg**

**Power Drift = 0.06 dB**

Maximum value of SAR (measured) = 0.131 W/kg



**Plot11:**

Date/Time: 2014-05-19 2:32:19 PM

Test Laboratory: TCC Nokia

Type: RM-1018; Serial: 004402/47/827366/1

**Communication System: 4-slot GPRS850**

Frequency: 848.8 MHz; Duty Cycle: 1:2.09991

Medium: BSL850; Medium Notes: t= 21.4 C

Medium parameters used: f = 849 MHz;  $\sigma$  = 0.975 S/m;  $\epsilon_r$  = 54.113;  $\rho$  = 1000 kg/m<sup>3</sup>

Phantom section: Center Section

**DASY Configuration:**

- Probe: ES3DV3 - SN3194
- ConvF(6.05, 6.05, 6.05); Calibrated: 2013-11-14;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2013-11-19
- Phantom: SAM 3 Triple Phantom 5.1C; Type: QD 000 P51 CA; Serial: TP-1123/3
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.10 (7164)

**4-slot GPRS850/Body - Low - Spacer 10mm - No Headset - Back Facing Phantom/Area Scan (81x121x1):**

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.12 W/kg

**4-slot GPRS850/Body - Low - Spacer 10mm - No Headset - Back Facing Phantom/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 35.066 V/m


Peak SAR (extrapolated) = 1.28 W/kg

**SAR(1 g) = 1 W/kg**

**SAR(10 g) = 0.740 W/kg**

**Power Drift = -0.03 dB**

Maximum value of SAR (measured) = 1.11 W/kg

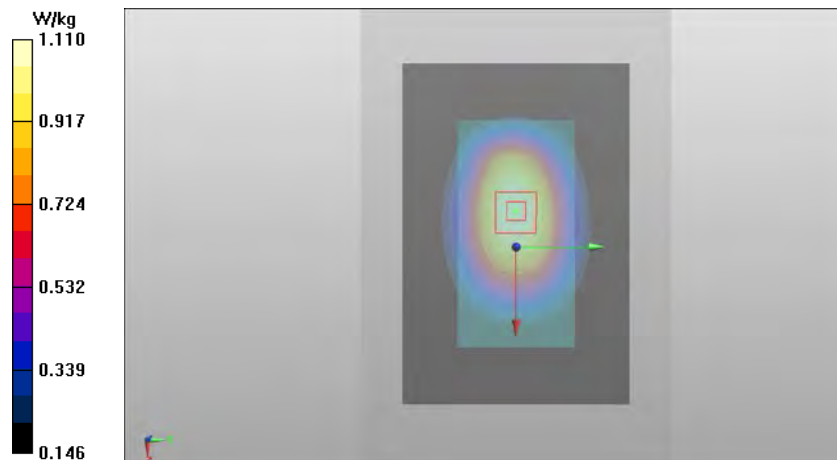



## Plot12:

Date/Time: 2014-05-20 10:17:45 AM

Test Laboratory: TCC Nokia

Type: RM-1018; Serial: 004402/47/827374/5

### Communication System: WCDMA850 (Band 5)

Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: BSL850; Medium Notes: t= 21.7 C

Medium parameters used: f = 847 MHz;  $\sigma = 0.979$  S/m;  $\epsilon_r = 54.183$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

#### DASY Configuration:

- Probe: ES3DV3 - SN3194
- ConvF(6.05, 6.05, 6.05); Calibrated: 2013-11-14;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2013-11-19
- Phantom: SAM 3 Triple Phantom 5.1C; Type: QD 000 P51 CA; Serial: TP-1123/3
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.10 (7164)

### WCDMA850 (Band 5)/Body - High - Spacer 10mm - No Headset - Back Facing Phantom/Area Scan (81x121x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.10 W/kg

### WCDMA850 (Band 5)/Body - High - Spacer 10mm - No Headset - Back Facing Phantom/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 34.694 V/m


Peak SAR (extrapolated) = 1.25 W/kg

**SAR(1 g) = 0.993 W/kg**

**SAR(10 g) = 0.731 W/kg**

**Power Drift = -0.01 dB**

Maximum value of SAR (measured) = 1.10 W/kg

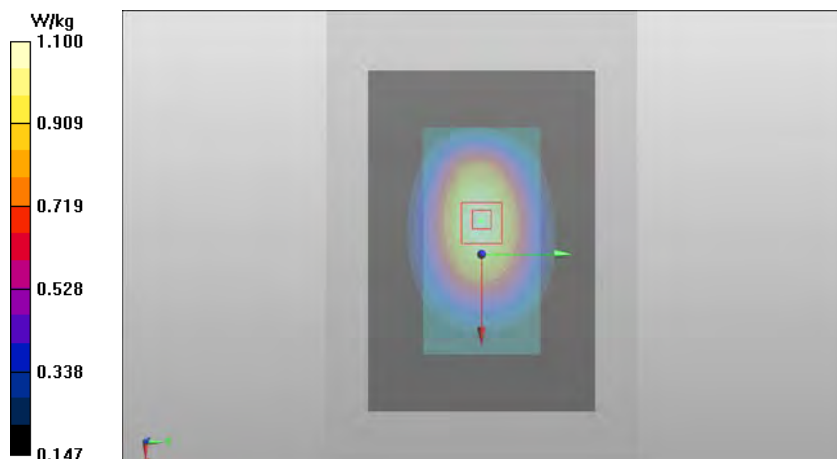

SAR Report

FCC\_RM-1018\_01

Applicant: Microsoft Mobile

Type: RM-1018

Copyright © 2014 TCC Microsoft



**Plot13:**

Date/Time: 2014-05-16 3:52:22 PM

Test Laboratory: TCC Nokia

Type: RM-1018; Serial: 004402/47/827363/8

**Communication System: 2-slot GPRS1900**

Frequency: 1909.8 MHz; Duty Cycle: 1:4.19952

Medium: BSL1900; Medium Notes: t= 20.5 C

Medium parameters used: f = 1910 MHz;  $\sigma = 1.539$  S/m;  $\epsilon_r = 52.145$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

**DASY Configuration:**

- Probe: ES3DV3 - SN3131
- ConvF{4.62, 4.62, 4.62}; Calibrated: 2013-06-18;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2013-06-10
- Phantom: SAM 3 Triple Phantom 5.1C; Type: QD 000 P51 CA; Serial: TP-1123/2
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.10 (7164)

**2-slot GPRS1900 /Body - High - Spacer 10mm - No Headset - Bottom Edge Facing Phantom/Area Scan**

**(41x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.05 W/kg

**2-slot GPRS1900 /Body - High - Spacer 10mm - No Headset - Bottom Edge Facing Phantom/Zoom Scan**

**(5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 23.954 V/m


Peak SAR (extrapolated) = 1.24 W/kg

**SAR(1 g) = 0.760 W/kg**

**SAR(10 g) = 0.405 W/kg**

**Power Drift = 0.01 dB**

Maximum value of SAR (measured) = 0.851 W/kg

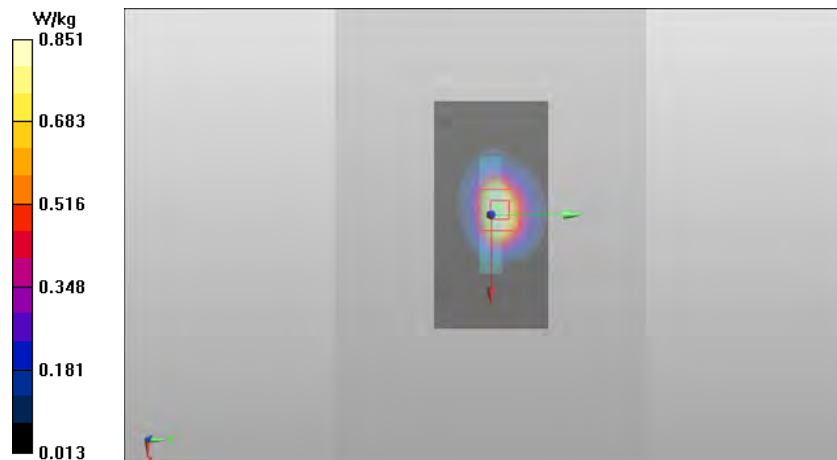

**Plot14:**

Date/Time: 2014-05-16 2:08:17 PM

Test Laboratory: TCC Nokia

Type: RM-1018; Serial: 004402/47/827363/8

**Communication System: WCDMA1900 (Band 2)**

Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: BSL1900; Medium Notes: t= 20.5 C

Medium parameters used: f = 1908 MHz;  $\sigma = 1.537$  S/m;  $\epsilon_r = 52.151$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

**DASY Configuration:**

- Probe: ES3DV3 - SN3131
- ConvF(4.62, 4.62, 4.62); Calibrated: 2013-06-18;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2013-06-10
- Phantom: SAM 3 Triple Phantom 5.1C; Type: QD 000 P51 CA; Serial: TP-1123/2
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.10 (7164)

**WCDMA1900 (Band 2) /Body - High - Spacer 10mm - No Headset - Bottom Edge Facing Phantom - Repeated/Area Scan (41x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.14 W/kg

**WCDMA1900 (Band 2) /Body - High - Spacer 10mm - No Headset - Bottom Edge Facing Phantom - Repeated/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 26.020 V/m


Peak SAR (extrapolated) = 1.38 W/kg

**SAR(1 g) = 0.857 W/kg**

**SAR(10 g) = 0.462 W/kg**

**Power Drift = -0.01 dB**

Maximum value of SAR (measured) = 1.05 W/kg

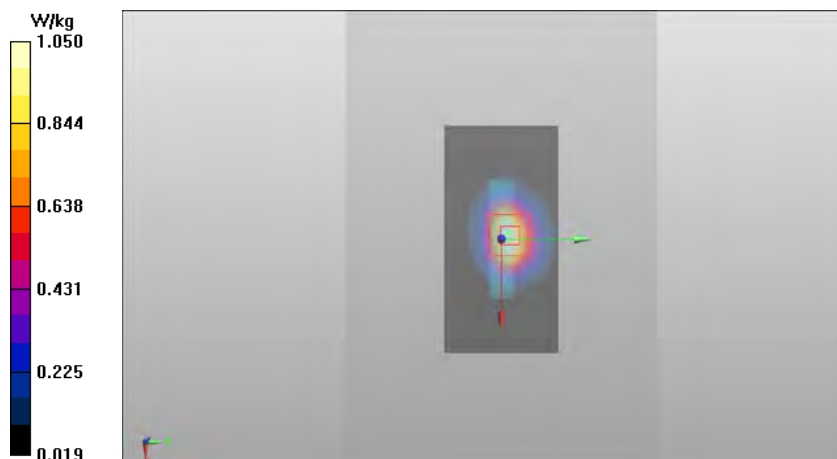

**Plot15:**

Date/Time: 2014-05-16 10:20:42 AM

Test Laboratory: TCC Nokia

Type: RM-1018; Serial: 004402/47/827381/0

**Communication System: WLAN2450**

Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: BSL2450; Medium Notes: t= 21.2 C

Medium parameters used: f = 2412 MHz;  $\sigma = 1.896$  S/m;  $\epsilon_r = 52.412$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

**DASY Configuration:**

- Probe: EX3DV4 - SN3960

- ConvF(7.44, 7.44, 7.44); Calibrated: 2013-12-10;

- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1302; Calibrated: 2013-11-08

- Phantom: #2 Triple, SAR4; Type: QD 000 P51 CA; Serial: TP-1124/1

- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.10 (7164)

**WLAN2450 b-mode /Body - Channel 1 - BPSK 1 Mbps - Spacer 10mm - No Headset - Right Edge Facing**

**Phantom/Area Scan (61x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.216 W/kg

**WLAN2450 b-mode /Body - Channel 1 - BPSK 1 Mbps - Spacer 10mm - No Headset - Right Edge Facing**

**Phantom/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.041 V/m


Peak SAR (extrapolated) = 0.302 W/kg

**SAR(1 g) = 0.166 W/kg**

**SAR(10 g) = 0.087 W/kg**

**Power Drift = 0.02 dB**

Maximum value of SAR (measured) = 0.209 W/kg

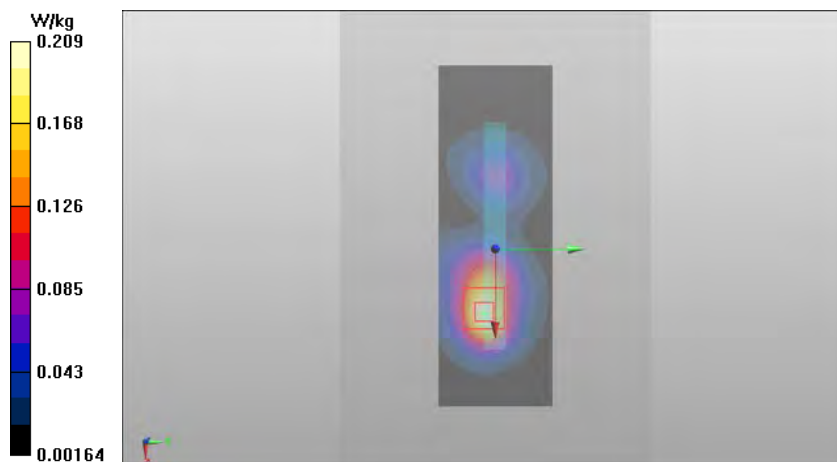

## APPENDIX C: DIELECTRIC PARAMETERS OF THE TISSUE SIMULANTS

Head tissue simulant dielectric parameters used in the measurements:

| f<br>(MHz)             | Date       | Dielectric Parameters |                |                       |                |                       |                |
|------------------------|------------|-----------------------|----------------|-----------------------|----------------|-----------------------|----------------|
|                        |            | Ch 128<br>824.2 MHz   |                | Ch 190<br>836.6 MHz   |                | Ch 251<br>848.8 MHz   |                |
|                        |            | $\epsilon_r$          | $\sigma$ [S/m] | $\epsilon_r$          | $\sigma$ [S/m] | $\epsilon_r$          | $\sigma$ [S/m] |
| GSM/GPRS/<br>EGPRS850  | 2014-05-13 | 40.6                  | 0.91           | 40.5                  | 0.92           | 40.4                  | 0.93           |
| f<br>(MHz)             | Date       | Dielectric Parameters |                |                       |                |                       |                |
|                        |            | Ch 4132<br>826.4 MHz  |                | Ch 4175<br>835.0 MHz  |                | Ch 4233<br>846.6 MHz  |                |
|                        |            | $\epsilon_r$          | $\sigma$ [S/m] | $\epsilon_r$          | $\sigma$ [S/m] | $\epsilon_r$          | $\sigma$ [S/m] |
| WCDMA850               | 2014-05-14 | 40.2                  | 0.90           | 40.2                  | 0.91           | 40.1                  | 0.92           |
| f<br>(MHz)             | Date       | Dielectric Parameters |                |                       |                |                       |                |
|                        |            | Ch 512<br>1850.2 MHz  |                | Ch 661<br>1880.0 MHz  |                | Ch 810<br>1909.8 MHz  |                |
|                        |            | $\epsilon_r$          | $\sigma$ [S/m] | $\epsilon_r$          | $\sigma$ [S/m] | $\epsilon_r$          | $\sigma$ [S/m] |
| GSM/GPRS/<br>EGPRS1900 | 2014-05-13 | 38.9                  | 1.34           | 38.8                  | 1.37           | 38.7                  | 1.40           |
| f<br>(MHz)             | Date       | Dielectric Parameters |                |                       |                |                       |                |
|                        |            | Ch 9262<br>1852.4 MHz |                | Ch 9400<br>1880.0 MHz |                | Ch 9538<br>1907.6 MHz |                |
|                        |            | $\epsilon_r$          | $\sigma$ [S/m] | $\epsilon_r$          | $\sigma$ [S/m] | $\epsilon_r$          | $\sigma$ [S/m] |
| WCDMA1900              | 2014-05-13 | 38.9                  | 1.35           | 38.8                  | 1.37           | 38.7                  | 1.40           |
| f<br>(MHz)             | Date       | Ch 1<br>2412.0 MHz    |                | Ch 6<br>2437.0 MHz    |                | Ch 11<br>2462.0 MHz   |                |
|                        |            | $\epsilon_r$          | $\sigma$ [S/m] | $\epsilon_r$          | $\sigma$ [S/m] | $\epsilon_r$          | $\sigma$ [S/m] |
|                        |            | $\epsilon_r$          | $\sigma$ [S/m] | $\epsilon_r$          | $\sigma$ [S/m] | $\epsilon_r$          | $\sigma$ [S/m] |
| WLAN2450               | 2014-05-14 | 40.0                  | 1.76           | 39.9                  | 1.79           | 39.8                  | 1.82           |

**Body tissue simulant dielectric parameters used in the measurements:**

| f<br>(MHz)             | Date       | Dielectric Parameters |                |                       |                |                       |                |
|------------------------|------------|-----------------------|----------------|-----------------------|----------------|-----------------------|----------------|
|                        |            | Ch 128<br>824.2 MHz   |                | Ch 190<br>836.6 MHz   |                | Ch 251<br>848.8 MHz   |                |
|                        |            | $\epsilon_r$          | $\sigma$ [S/m] | $\epsilon_r$          | $\sigma$ [S/m] | $\epsilon_r$          | $\sigma$ [S/m] |
| GSM/GPRS/<br>EGPRS850  | 2014-05-19 | 54.2                  | 0.96           | 54.2                  | 0.97           | 54.1                  | 0.98           |
|                        | 2014-05-20 | 54.3                  | 0.97           | 54.2                  | 0.97           | 54.2                  | 0.98           |
| f<br>(MHz)             | Date       | Dielectric Parameters |                |                       |                |                       |                |
|                        |            | Ch 4132<br>826.4 MHz  |                | Ch 4175<br>835.0 MHz  |                | Ch 4233<br>846.6 MHz  |                |
|                        |            | $\epsilon_r$          | $\sigma$ [S/m] | $\epsilon_r$          | $\sigma$ [S/m] | $\epsilon_r$          | $\sigma$ [S/m] |
| WCDMA850               | 2014-05-19 | 54.2                  | 0.96           | 54.2                  | 0.97           | 54.1                  | 0.97           |
|                        | 2014-05-20 | 54.3                  | 0.97           | 54.2                  | 0.97           | 54.2                  | 0.98           |
| f<br>(MHz)             | Date       | Dielectric Parameters |                |                       |                |                       |                |
|                        |            | Ch 512<br>1850.2 MHz  |                | Ch 661<br>1880.0 MHz  |                | Ch 810<br>1909.8 MHz  |                |
|                        |            | $\epsilon_r$          | $\sigma$ [S/m] | $\epsilon_r$          | $\sigma$ [S/m] | $\epsilon_r$          | $\sigma$ [S/m] |
| GSM/GPRS/<br>EGPRS1900 | 2014-05-16 | 52.3                  | 1.48           | 52.2                  | 1.51           | 52.1                  | 1.54           |
| f<br>(MHz)             | Date       | Dielectric Parameters |                |                       |                |                       |                |
|                        |            | Ch 9262<br>1852.4 MHz |                | Ch 9400<br>1880.0 MHz |                | Ch 9538<br>1907.6 MHz |                |
|                        |            | $\epsilon_r$          | $\sigma$ [S/m] | $\epsilon_r$          | $\sigma$ [S/m] | $\epsilon_r$          | $\sigma$ [S/m] |
| WCDMA1900              | 2014-05-16 | 52.3                  | 1.48           | 52.2                  | 1.51           | 52.2                  | 1.54           |
| f<br>(MHz)             | Date       | Ch 1<br>2412.0 MHz    |                | Ch 6<br>2437.0 MHz    |                | Ch 11<br>2462.0 MHz   |                |
|                        |            | $\epsilon_r$          | $\sigma$ [S/m] | $\epsilon_r$          | $\sigma$ [S/m] | $\epsilon_r$          | $\sigma$ [S/m] |
|                        |            |                       |                |                       |                |                       |                |
| WLAN2450               | 2014-05-15 | 52.6                  | 1.89           | 52.5                  | 1.92           | 52.4                  | 1.95           |
|                        | 2014-05-16 | 52.4                  | 1.90           | 52.3                  | 1.92           | 52.3                  | 1.95           |

## APPENDIX D: CONDUCTED AVERAGE POWER MEASUREMENTS FOR WCDMA AND HSUPA

Type: RM-1018; Serial: 004402/47/827374/5, HW: 1500, SW: 01068.00004.14182.20000

### D.1. WCDMA850 (Band 5) Test results

#### Average power

| Ch / f(MHz)  | P [dBm] |
|--------------|---------|
| 4132 / 826.4 | 23.1    |
| 4175 / 835.0 | 23.1    |
| 4233 / 846.6 | 23.3    |

### D.2. HSUPA850 Test results

#### Average power

| Ch / f(MHz) | P [dBm]        |                |                |                |                |
|-------------|----------------|----------------|----------------|----------------|----------------|
|             | Subtest mode 1 | Subtest mode 2 | Subtest mode 3 | Subtest mode 4 | Subtest mode 5 |
| 4132        | 22.2           | 20.9           | 20.9           | 21.6           | 22.1           |
| 4175        | 21.7           | 21.2           | 20.7           | 21.5           | 22.2           |
| 4233        | 21.7           | 21.3           | 20.9           | 21.9           | 22.3           |

Note: In HSUPA operation, the output power is reduced relative to the tuning target power for WCDMA. This device runs a single HSUPA power control routine: MPR, and additional 1dB reduction to ensure PA linearity. As a result, the MPR for each of the Subtest modes is as follows:

| Maximum Power Reduction (MPR) |                |                |                |                |
|-------------------------------|----------------|----------------|----------------|----------------|
| Subtest mode 1                | Subtest mode 2 | Subtest mode 3 | Subtest mode 4 | Subtest mode 5 |
| 0.0dB                         | 2.0dB          | 1.0dB          | 2.0dB          | 0.0dB          |

Type: RM-1018; Serial: 004402/47/827370/3, HW: 1500, SW: 01068.00004.14182.20000

#### D.5. WCDMA1900 (Band 2) Test results

##### Average power

| Ch / f(MHz)   | P [dBm] |
|---------------|---------|
| 9262 / 1852.4 | 21.8    |
| 9400 / 1880.0 | 22.0    |
| 9538 / 1907.6 | 21.9    |

#### D.6. HSUPA1900 Test results

##### Average power

| Ch / f(MHz)   | P [dBm]        |                |                |                |                |
|---------------|----------------|----------------|----------------|----------------|----------------|
|               | Subtest mode 1 | Subtest mode 2 | Subtest mode 3 | Subtest mode 4 | Subtest mode 5 |
| 9262 / 1852.4 | 20.9           | 19.9           | 19.3           | 20.3           | 20.8           |
| 9400 / 1880.0 | 20.2           | 19.6           | 19.3           | 20.5           | 21.0           |
| 9538 / 1907.6 | 20.4           | 19.9           | 19.5           | 20.5           | 20.9           |

Note: In HSUPA operation, the output power is reduced relative to the tuning target power for WCDMA. This device runs a single HSUPA power control routine: MPR, and additional 1dB reduction to ensure PA linearity. As a result, the MPR for each of the Subtest modes is as follows:

| Maximum Power Reduction (MPR) |                |                |                |                |
|-------------------------------|----------------|----------------|----------------|----------------|
| Subtest mode 1                | Subtest mode 2 | Subtest mode 3 | Subtest mode 4 | Subtest mode 5 |
| 0.0dB                         | 2.0dB          | 1.0dB          | 2.0dB          | 0.0dB          |

---

## APPENDIX E: RELEVANT PAGES FROM PROBE CALIBRATION REPORTS





Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Client **Nokia Salo TCC**

Certificate No: **ES3-3131\_Jun13**

## CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3131**

Calibration procedure(s) **QA CAL-01.v8, QA CAL-23.v4, QA CAL-25.v4**  
**Calibration procedure for dosimetric E-field probes**

Calibration date: **June 18, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^{\circ}\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID              | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B         | GB41293874      | 04-Apr-13 (No. 217-01733)         | Apr-14                 |
| Power sensor E4412A        | MY41498087      | 04-Apr-13 (No. 217-01733)         | Apr-14                 |
| Reference 3 dB Attenuator  | SN: S5054 (3c)  | 04-Apr-13 (No. 217-01737)         | Apr-14                 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 04-Apr-13 (No. 217-01735)         | Apr-14                 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 04-Apr-13 (No. 217-01738)         | Apr-14                 |
| Reference Probe ES3DV2     | SN: 3013        | 28-Dec-12 (No. ES3-3013_Dec12)    | Dec-13                 |
| DAE4                       | SN: 660         | 31-Jan-13 (No. DAE4-660_Jan13)    | Jan-14                 |
|                            |                 |                                   |                        |
| Secondary Standards        | ID              | Check Date (in house)             | Scheduled Check        |
| RF generator HP 8648C      | US3642U01700    | 4-Aug-99 (in house check Apr-13)  | In house check: Apr-15 |
| Network Analyzer HP 8753E  | US37390585      | 18-Oct-01 (in house check Oct-12) | In house check: Oct-13 |

|                |                               |                                          |               |
|----------------|-------------------------------|------------------------------------------|---------------|
| Calibrated by: | Name<br><b>Israe El-Naouq</b> | Function<br><b>Laboratory Technician</b> | Signature<br> |
| Approved by:   | Name<br><b>Katja Pokovic</b>  | Function<br><b>Technical Manager</b>     | Signature<br> |

Issued: June 18, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

### Glossary:

|                          |                                                                                                                                                         |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                      | tissue simulating liquid                                                                                                                                |
| NORM <sub>x,y,z</sub>    | sensitivity in free space                                                                                                                               |
| ConvF                    | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                              |
| DCP                      | diode compression point                                                                                                                                 |
| CF                       | crest factor (1/duty_cycle) of the RF signal                                                                                                            |
| A, B, C, D               | modulation dependent linearization parameters                                                                                                           |
| Polarization $\varphi$   | $\varphi$ rotation around probe axis                                                                                                                    |
| Polarization $\vartheta$ | $\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center),<br>i.e., $\vartheta = 0$ is normal to probe axis |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the  $E^2$ -field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

# Probe ES3DV3

## SN:3131

Manufactured: February 6, 2007  
Calibrated: June 18, 2013

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3131

### Basic Calibration Parameters

|                                                           | Sensor X | Sensor Y | Sensor Z | Unc (k=2)     |
|-----------------------------------------------------------|----------|----------|----------|---------------|
| Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup> | 1.32     | 1.31     | 1.26     | $\pm 10.1 \%$ |
| DCP (mV) <sup>B</sup>                                     | 101.0    | 101.8    | 102.6    |               |

### Modulation Calibration Parameters

| UID | Communication System Name |   | A<br>dB | B<br>dB $\sqrt{\mu\text{V}}$ | C   | D<br>dB | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|-----|---------------------------|---|---------|------------------------------|-----|---------|----------|---------------------------|
| 0   | CW                        | X | 0.0     | 0.0                          | 1.0 | 0.00    | 167.0    | $\pm 2.7 \%$              |
|     |                           | Y | 0.0     | 0.0                          | 1.0 |         | 164.9    |                           |
|     |                           | Z | 0.0     | 0.0                          | 1.0 |         | 163.7    |                           |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3131

### Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha | Depth (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|-------|------------|-------------|
| 750                  | 41.9                               | 0.89                            | 6.23    | 6.23    | 6.23    | 0.31  | 1.83       | ± 12.0 %    |
| 835                  | 41.5                               | 0.90                            | 5.96    | 5.96    | 5.96    | 0.26  | 1.99       | ± 12.0 %    |
| 1750                 | 40.1                               | 1.37                            | 5.17    | 5.17    | 5.17    | 0.49  | 1.47       | ± 12.0 %    |
| 1900                 | 40.0                               | 1.40                            | 4.98    | 4.98    | 4.98    | 0.67  | 1.27       | ± 12.0 %    |
| 2450                 | 39.2                               | 1.80                            | 4.33    | 4.33    | 4.33    | 0.80  | 1.14       | ± 12.0 %    |
| 2600                 | 39.0                               | 1.96                            | 4.21    | 4.21    | 4.21    | 0.80  | 1.09       | ± 12.0 %    |

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3131

### Calibration Parameter Determined in Body Tissue Simulating Media


| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha | Depth (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|-------|------------|-------------|
| 750                  | 55.5                               | 0.96                            | 6.10    | 6.10    | 6.10    | 0.30  | 1.90       | ± 12.0 %    |
| 835                  | 55.2                               | 0.97                            | 6.03    | 6.03    | 6.03    | 0.39  | 1.68       | ± 12.0 %    |
| 1750                 | 53.4                               | 1.49                            | 4.87    | 4.87    | 4.87    | 0.31  | 2.53       | ± 12.0 %    |
| 1900                 | 53.3                               | 1.52                            | 4.62    | 4.62    | 4.62    | 0.28  | 2.70       | ± 12.0 %    |
| 2450                 | 52.7                               | 1.95                            | 4.27    | 4.27    | 4.27    | 0.68  | 1.20       | ± 12.0 %    |
| 2600                 | 52.5                               | 2.16                            | 4.17    | 4.17    | 4.17    | 0.50  | 1.10       | ± 12.0 %    |

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

## Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

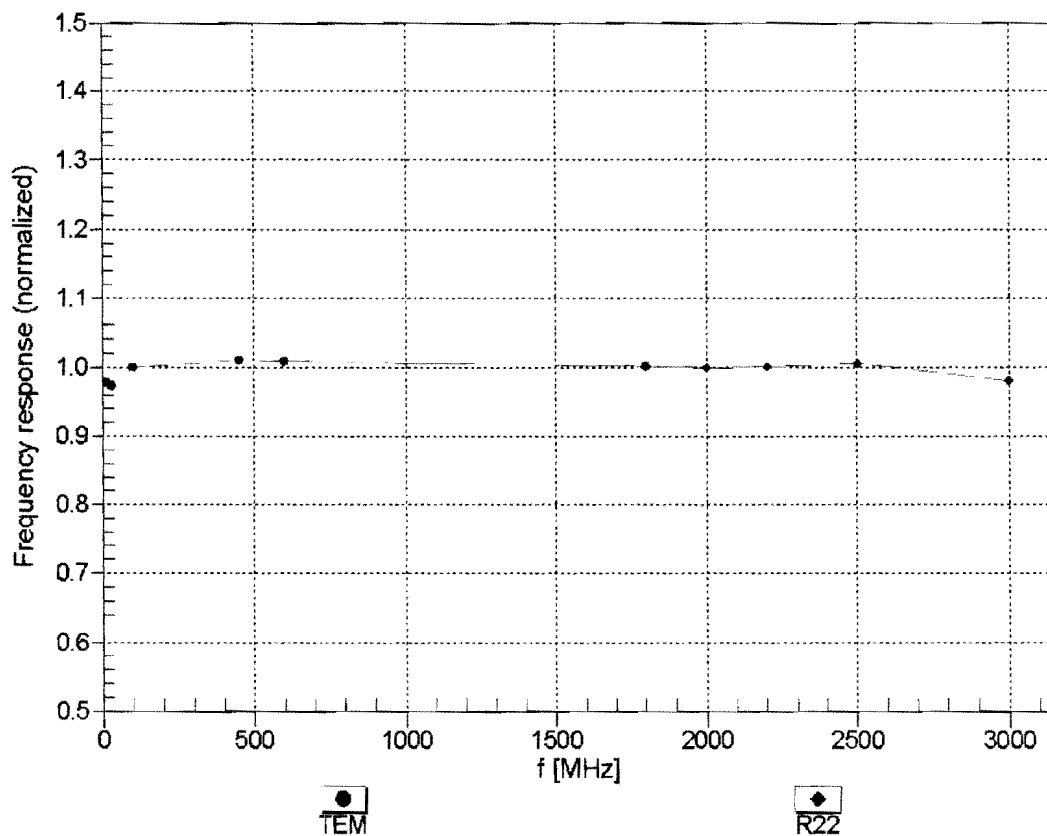



Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

## Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

f=600 MHz, TEM

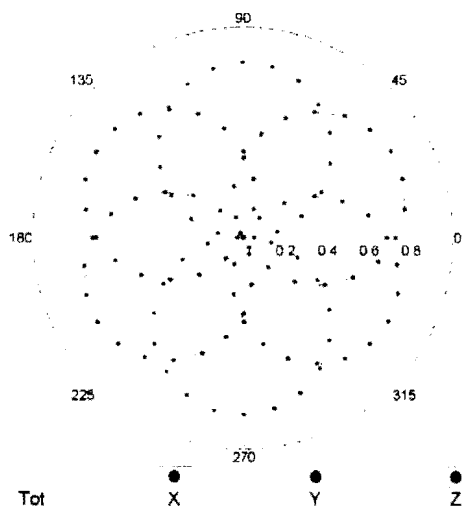



f=1800 MHz, R22

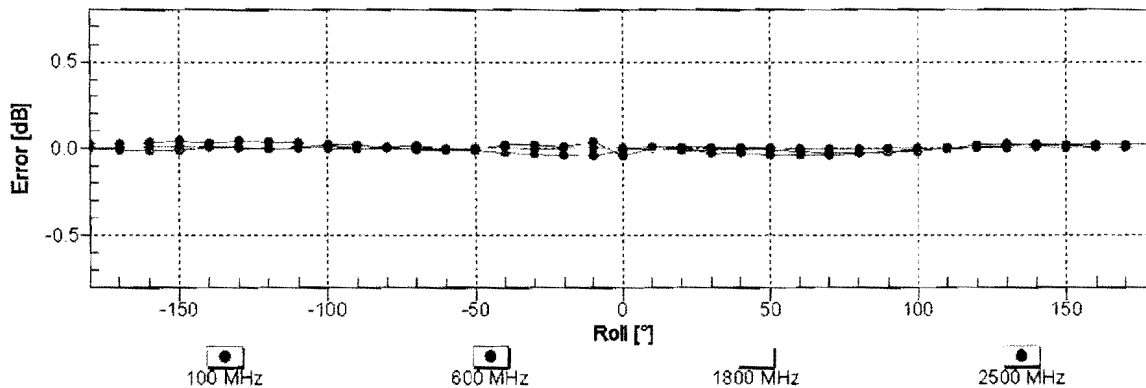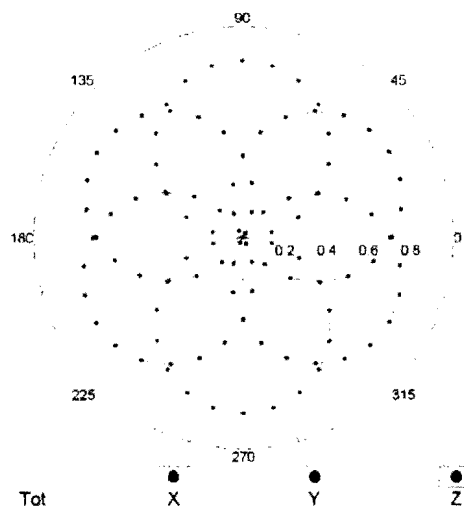

Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )




# Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f = 900 \text{ MHz}$ )

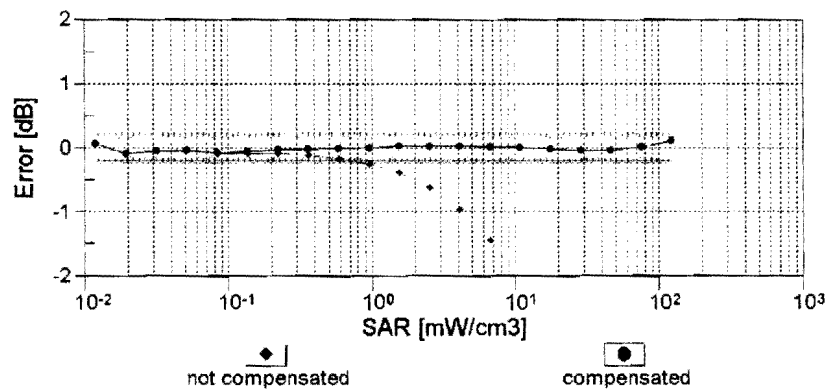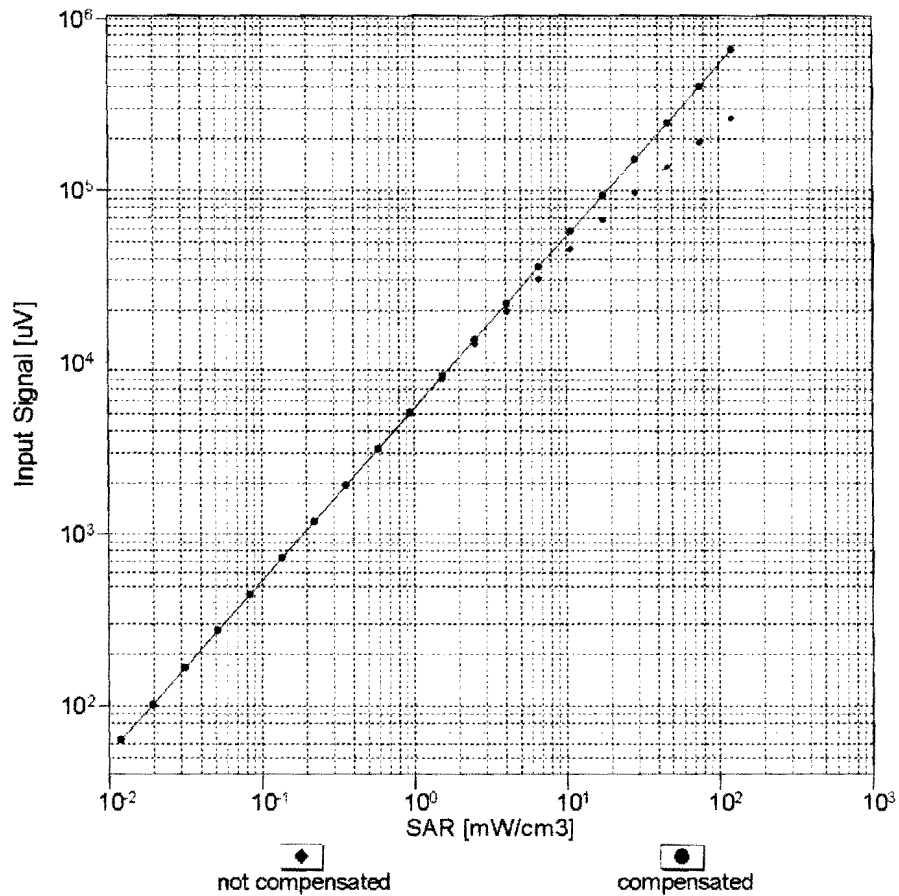



Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

## Conversion Factor Assessment

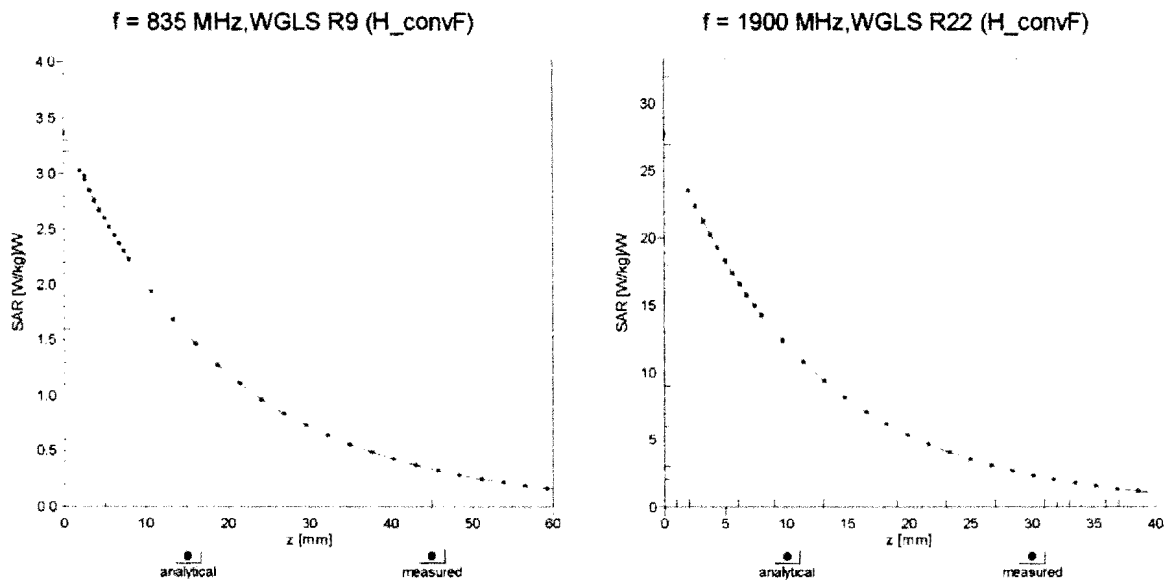

## Deviation from Isotropy in Liquid

Error ( $\phi, \theta$ ),  $f = 900 \text{ MHz}$

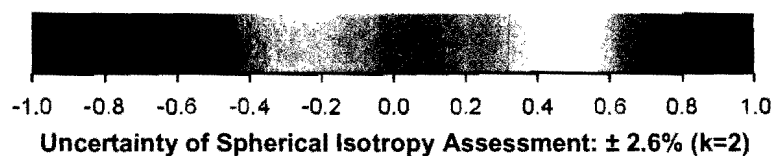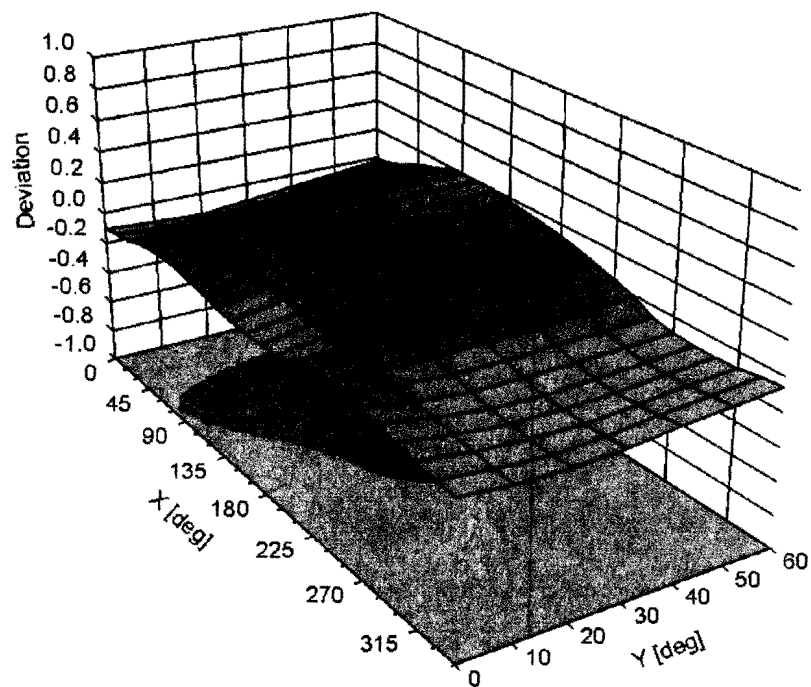

**DASY/EASY - Parameters of Probe: ES3DV3 - SN:3131****Other Probe Parameters**

|                                               |            |
|-----------------------------------------------|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | -39.9      |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disabled   |
| Probe Overall Length                          | 337 mm     |
| Probe Body Diameter                           | 10 mm      |
| Tip Length                                    | 10 mm      |
| Tip Diameter                                  | 4 mm       |
| Probe Tip to Sensor X Calibration Point       | 2 mm       |
| Probe Tip to Sensor Y Calibration Point       | 2 mm       |
| Probe Tip to Sensor Z Calibration Point       | 2 mm       |
| Recommended Measurement Distance from Surface | 3 mm       |



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Client **Nokia Salo TCC**

Certificate No: **ES3-3194\_Nov13**

## CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3194**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6**  
 Calibration procedure for dosimetric E-field probes

Calibration date: **November 14, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^{\circ}\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID              | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B         | GB41293874      | 04-Apr-13 (No. 217-01733)         | Apr-14                 |
| Power sensor E4412A        | MY41498087      | 04-Apr-13 (No. 217-01733)         | Apr-14                 |
| Reference 3 dB Attenuator  | SN: S5054 (3c)  | 04-Apr-13 (No. 217-01737)         | Apr-14                 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 04-Apr-13 (No. 217-01735)         | Apr-14                 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 04-Apr-13 (No. 217-01738)         | Apr-14                 |
| Reference Probe ES3DV2     | SN: 3013        | 28-Dec-12 (No. ES3-3013_Dec12)    | Dec-13                 |
| DAE4                       | SN: 660         | 4-Sep-13 (No. DAE4-660_Sep13)     | Sep-14                 |
| Secondary Standards        | ID              | Check Date (in house)             | Scheduled Check        |
| RF generator HP 8648C      | US3642U01700    | 4-Aug-99 (in house check Apr-13)  | In house check: Apr-15 |
| Network Analyzer HP 8753E  | US37390585      | 18-Oct-01 (in house check Oct-13) | In house check: Oct-14 |

|                                                                                                                 | Name           | Function              | Signature |
|-----------------------------------------------------------------------------------------------------------------|----------------|-----------------------|-----------|
| Calibrated by:                                                                                                  | Israe El-Naouq | Laboratory Technician |           |
| Approved by:                                                                                                    | Katja Pokovic  | Technical Manager     |           |
| Issued: November 15, 2013                                                                                       |                |                       |           |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory. |                |                       |           |

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3194

### Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>E</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 835                  | 41.5                               | 0.90                            | 6.12    | 6.12    | 6.12    | 0.28               | 2.07                    | ± 12.0 %    |

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2); else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3194

### Calibration Parameter Determined in Body Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 835                  | 55.2                               | 0.97                            | 6.05    | 6.05    | 6.05    | 0.69               | 1.30                    | ± 12.0 %    |

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Client **Nokia Salo TCC**

Certificate No: **EX3-3960\_Dec13**

## CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3960**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6  
Calibration procedure for dosimetric E-field probes**

Calibration date: **December 10, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^{\circ}\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID              | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B         | GB41293874      | 04-Apr-13 (No. 217-01733)         | Apr-14                 |
| Power sensor E4412A        | MY41498087      | 04-Apr-13 (No. 217-01733)         | Apr-14                 |
| Reference 3 dB Attenuator  | SN: S5054 (3c)  | 04-Apr-13 (No. 217-01737)         | Apr-14                 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 04-Apr-13 (No. 217-01735)         | Apr-14                 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 04-Apr-13 (No. 217-01738)         | Apr-14                 |
| Reference Probe ES3DV2     | SN: 3013        | 28-Dec-12 (No. ES3-3013_Dec12)    | Dec-13                 |
| DAE4                       | SN: 660         | 4-Sep-13 (No. DAE4-660_Sep13)     | Sep-14                 |
| Secondary Standards        | ID              | Check Date (in house)             | Scheduled Check        |
| RF generator HP 8648C      | US3642U01700    | 4-Aug-99 (in house check Apr-13)  | In house check: Apr-15 |
| Network Analyzer HP 8753E  | US37390585      | 18-Oct-01 (in house check Oct-13) | In house check: Oct-14 |

Calibrated by: **Claudio Leubler**      Name: **Claudio Leubler**      Function: **Laboratory Technician**

Approved by: **Katja Pokovic**      Name: **Katja Pokovic**      Function: **Technical Manager**

Signature

Issued: December 11, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3960

### Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 41.9                               | 0.89                            | 10.78   | 10.78   | 10.78   | 0.47               | 0.86                    | ± 12.0 %    |
| 835                  | 41.5                               | 0.90                            | 10.45   | 10.45   | 10.45   | 0.41               | 0.86                    | ± 12.0 %    |
| 1750                 | 40.1                               | 1.37                            | 8.49    | 8.49    | 8.49    | 0.57               | 0.67                    | ± 12.0 %    |
| 1900                 | 40.0                               | 1.40                            | 8.23    | 8.23    | 8.23    | 0.62               | 0.64                    | ± 12.0 %    |
| 2450                 | 39.2                               | 1.80                            | 7.39    | 7.39    | 7.39    | 0.38               | 0.83                    | ± 12.0 %    |
| 2600                 | 39.0                               | 1.96                            | 7.33    | 7.33    | 7.33    | 0.39               | 0.84                    | ± 12.0 %    |
| 5200                 | 36.0                               | 4.66                            | 5.27    | 5.27    | 5.27    | 0.35               | 1.80                    | ± 13.1 %    |
| 5300                 | 35.9                               | 4.76                            | 5.07    | 5.07    | 5.07    | 0.35               | 1.80                    | ± 13.1 %    |
| 5500                 | 35.6                               | 4.96                            | 4.99    | 4.99    | 4.99    | 0.35               | 1.80                    | ± 13.1 %    |
| 5600                 | 35.5                               | 5.07                            | 4.80    | 4.80    | 4.80    | 0.35               | 1.80                    | ± 13.1 %    |
| 5800                 | 35.3                               | 5.27                            | 4.80    | 4.80    | 4.80    | 0.40               | 1.80                    | ± 13.1 %    |

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3960

### Calibration Parameter Determined in Body Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 55.5                               | 0.96                            | 10.24   | 10.24   | 10.24   | 0.43               | 0.86                    | ± 12.0 %    |
| 835                  | 55.2                               | 0.97                            | 10.08   | 10.08   | 10.08   | 0.34               | 1.00                    | ± 12.0 %    |
| 1750                 | 53.4                               | 1.49                            | 8.33    | 8.33    | 8.33    | 0.52               | 0.72                    | ± 12.0 %    |
| 1900                 | 53.3                               | 1.52                            | 7.88    | 7.88    | 7.88    | 0.62               | 0.64                    | ± 12.0 %    |
| 2450                 | 52.7                               | 1.95                            | 7.44    | 7.44    | 7.44    | 0.62               | 0.50                    | ± 12.0 %    |
| 2600                 | 52.5                               | 2.16                            | 7.14    | 7.14    | 7.14    | 0.59               | 0.50                    | ± 12.0 %    |
| 5200                 | 49.0                               | 5.30                            | 4.60    | 4.60    | 4.60    | 0.45               | 1.90                    | ± 13.1 %    |
| 5300                 | 48.9                               | 5.42                            | 4.33    | 4.33    | 4.33    | 0.50               | 1.90                    | ± 13.1 %    |
| 5500                 | 48.6                               | 5.65                            | 4.12    | 4.12    | 4.12    | 0.50               | 1.90                    | ± 13.1 %    |
| 5600                 | 48.5                               | 5.77                            | 3.97    | 3.97    | 3.97    | 0.50               | 1.90                    | ± 13.1 %    |
| 5800                 | 48.2                               | 6.00                            | 4.14    | 4.14    | 4.14    | 0.55               | 1.90                    | ± 13.1 %    |

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

---

**APPENDIX F: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORTS**



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Client **Nokia Salo TCC**

Certificate No: **D835V2-480\_Dec12**

## CALIBRATION CERTIFICATE

Object **D835V2 - SN: 480**

Calibration procedure(s) **QA CAL-05.v8  
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **December 03, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.


All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A        | GB37480704         | 01-Nov-12 (No. 217-01640)         | Oct-13                 |
| Power sensor HP 8481A       | US37292783         | 01-Nov-12 (No. 217-01640)         | Oct-13                 |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 27-Mar-12 (No. 217-01530)         | Apr-13                 |
| Type-N mismatch combination | SN: 5047.3 / 06327 | 27-Mar-12 (No. 217-01533)         | Apr-13                 |
| Reference Probe ES3DV3      | SN: 3205           | 30-Dec-11 (No. ES3-3205_Dec11)    | Dec-12                 |
| DAE4                        | SN: 601            | 27-Jun-12 (No. DAE4-601_Jun12)    | Jun-13                 |
| Secondary Standards         | ID #               | Check Date (in house)             | Scheduled Check        |
| Power sensor HP 8481A       | MY41092317         | 18-Oct-02 (in house check Oct-11) | In house check: Oct-13 |
| RF generator R&S SMT-06     | 100005             | 04-Aug-99 (in house check Oct-11) | In house check: Oct-13 |
| Network Analyzer HP 8753E   | US37390585 S4206   | 18-Oct-01 (in house check Oct-12) | In house check: Oct-13 |

Calibrated by: **Israe El-Naouq**      Name: **Israe El-Naouq**      Function: **Laboratory Technician**

Approved by: **Katja Pokovic**      Name: **Katja Pokovic**      Function: **Technical Manager**

Signature  
  


Issued: December 3, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

### Glossary:

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.



## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                        |             |
|------------------------------|------------------------|-------------|
| DASY Version                 | DASY5                  | V52.8.3     |
| Extrapolation                | Advanced Extrapolation |             |
| Phantom                      | Modular Flat Phantom   |             |
| Distance Dipole Center - TSL | 15 mm                  | with Spacer |
| Zoom Scan Resolution         | dx, dy, dz = 5 mm      |             |
| Frequency                    | 835 MHz $\pm$ 1 MHz    |             |

## Head TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Head TSL parameters             | 22.0 °C             | 41.5           | 0.90 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 41.4 $\pm$ 6 % | 0.92 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 2.39 W/kg                    |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 9.40 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 1.56 W/kg                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 6.16 W/kg $\pm$ 16.5 % (k=2) |

## Body TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Body TSL parameters             | 22.0 °C             | 55.2           | 0.97 mho/m           |
| Measured Body TSL parameters            | (22.0 $\pm$ 0.2) °C | 54.5 $\pm$ 6 % | 0.99 mho/m $\pm$ 6 % |
| Body TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Body TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 2.42 W/kg                    |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 9.51 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 1.59 W/kg                    |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 6.27 W/kg $\pm$ 16.5 % (k=2) |

## Appendix

### Antenna Parameters with Head TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 50.8 $\Omega$ - 3.3 j $\Omega$ |
| Return Loss                          | - 29.4 dB                      |

### Antenna Parameters with Body TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 46.7 $\Omega$ - 4.9 j $\Omega$ |
| Return Loss                          | - 24.3 dB                      |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.391 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |                  |
|-----------------|------------------|
| Manufactured by | SPEAG            |
| Manufactured on | January 28, 2003 |

## DASY5 Validation Report for Head TSL

Date: 03.12.2012

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 480**

Communication System: CW; Frequency: 835 MHz

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.92$  mho/m;  $\epsilon_r = 41.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.07, 6.07, 6.07); Calibrated: 30.12.2011;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

### Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.814 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 3.60 W/kg

**SAR(1 g) = 2.39 W/kg; SAR(10 g) = 1.56 W/kg**

Maximum value of SAR (measured) = 2.80 W/kg

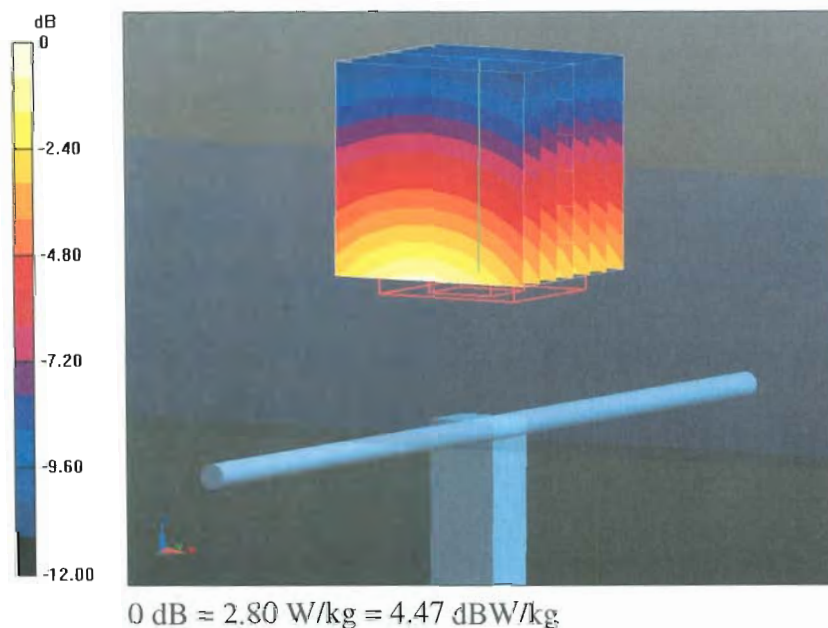

## Impedance Measurement Plot for Head TSL

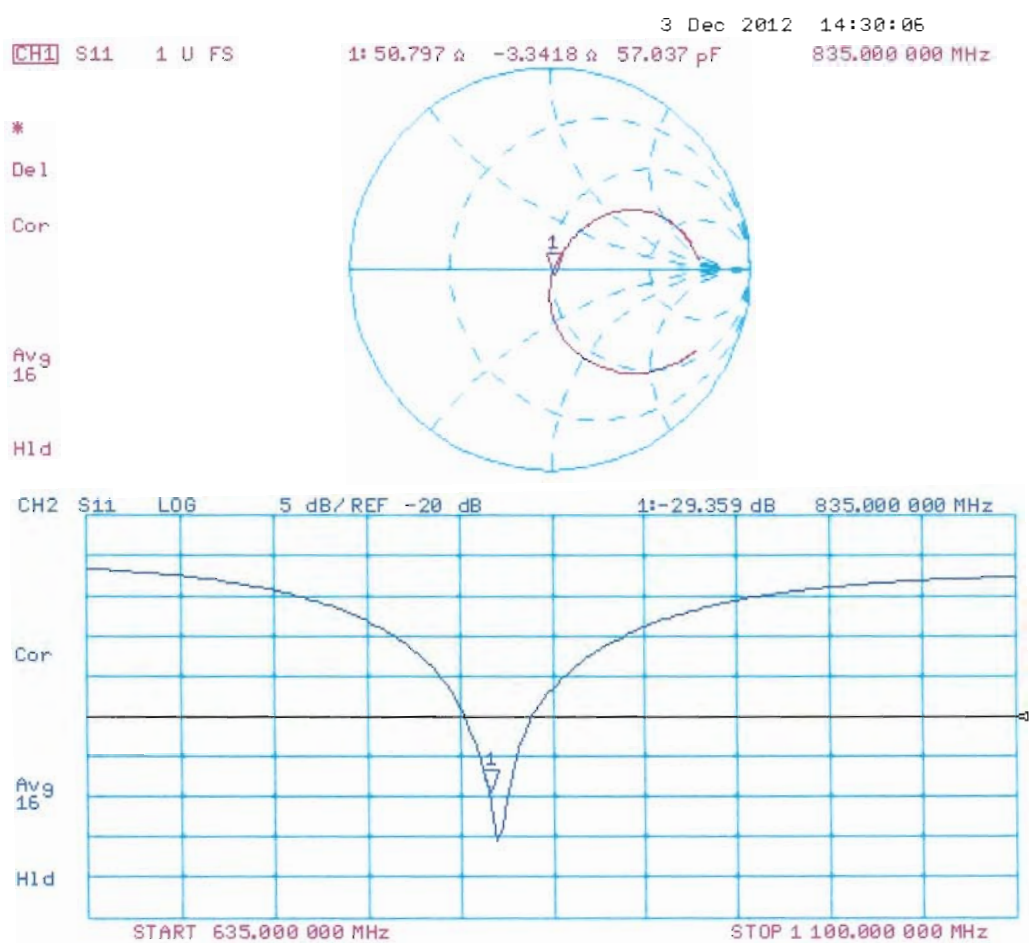



## DASY5 Validation Report for Body TSL

Date: 03.12.2012

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 480**

Communication System: CW; Frequency: 835 MHz

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.99$  mho/m;  $\epsilon_r = 54.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.02, 6.02, 6.02); Calibrated: 30.12.2011;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.301 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 3.53 W/kg

**SAR(1 g) = 2.42 W/kg; SAR(10 g) = 1.59 W/kg**

Maximum value of SAR (measured) = 2.80 W/kg

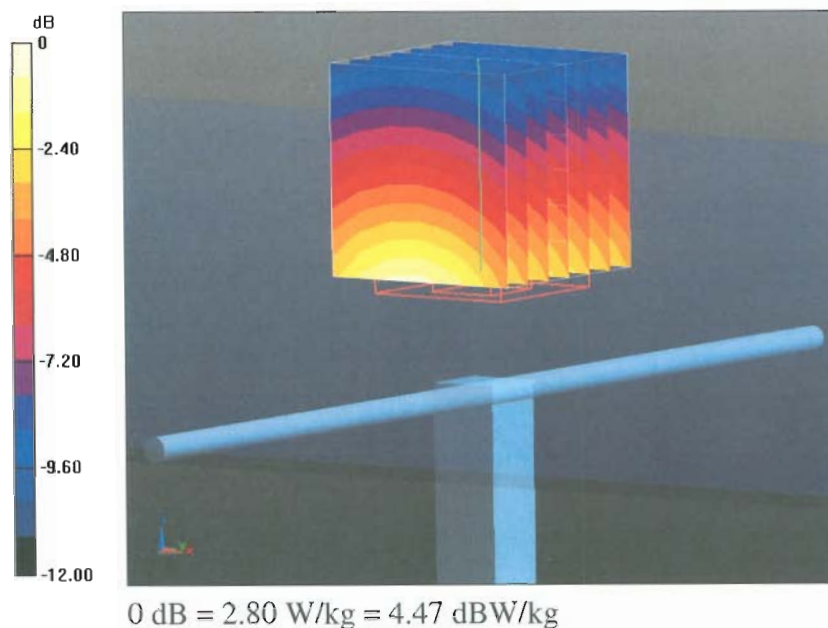

## Impedance Measurement Plot for Body TSL

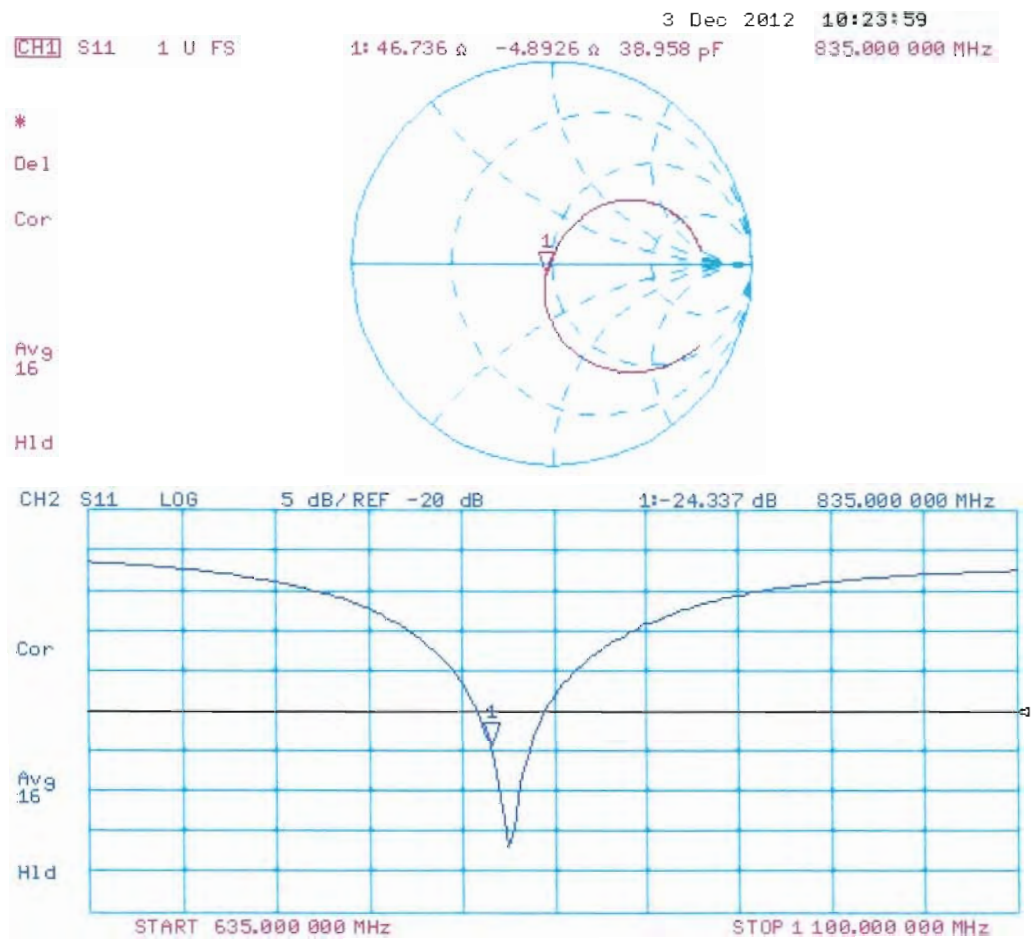

## Dipole D835V2 – SN: 480 Antenna Parameters measured: 2014-01-31.


### Antenna Parameters with Head TSL

|                                      | Calibration<br>certificate     | Annual<br>measurement         |
|--------------------------------------|--------------------------------|-------------------------------|
| Impedance, transformed to feed point | 50.8 $\Omega$ - 3.3 j $\Omega$ | 50.8 $\Omega$ -3.9 j $\Omega$ |
| Return loss                          | -29.4 dB                       | -28.1 dB                      |


### Antenna Parameters with Body TSL

|                                      | Calibration<br>certificate     | Annual<br>measurement         |
|--------------------------------------|--------------------------------|-------------------------------|
| Impedance, transformed to feed point | 47.4 $\Omega$ - 3.8 j $\Omega$ | 46.7 $\Omega$ -5.8 j $\Omega$ |
| Return loss                          | -26.5 dB                       | -23.2 dB                      |

## Impedance Measurement Plot for Head TSL 83

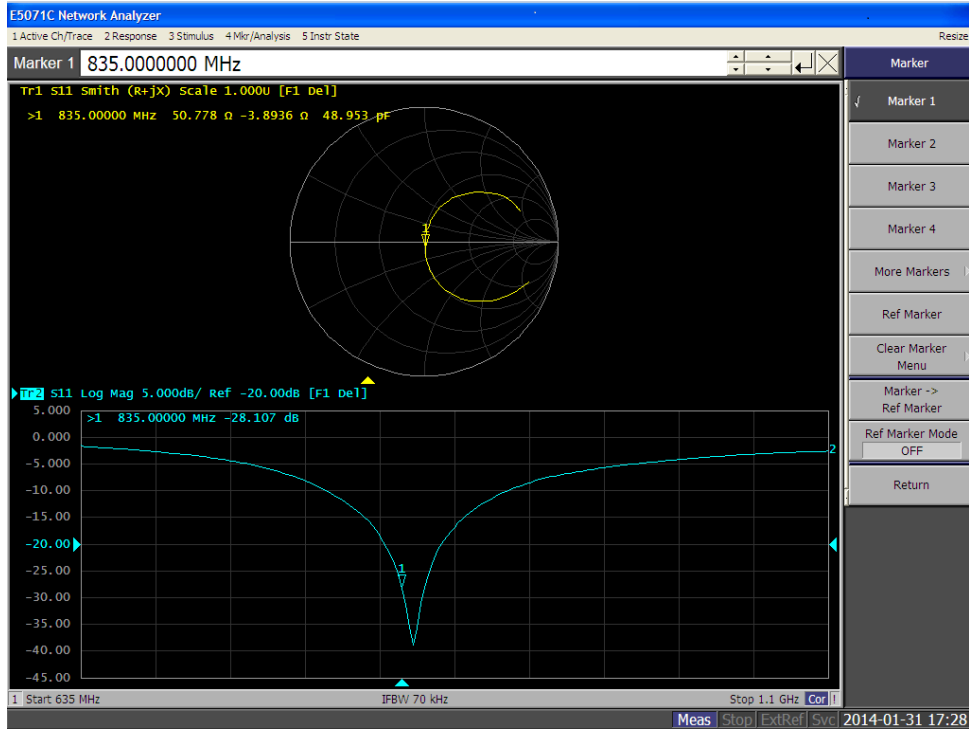

## Impedance Measurement Plot for Body TSL 835

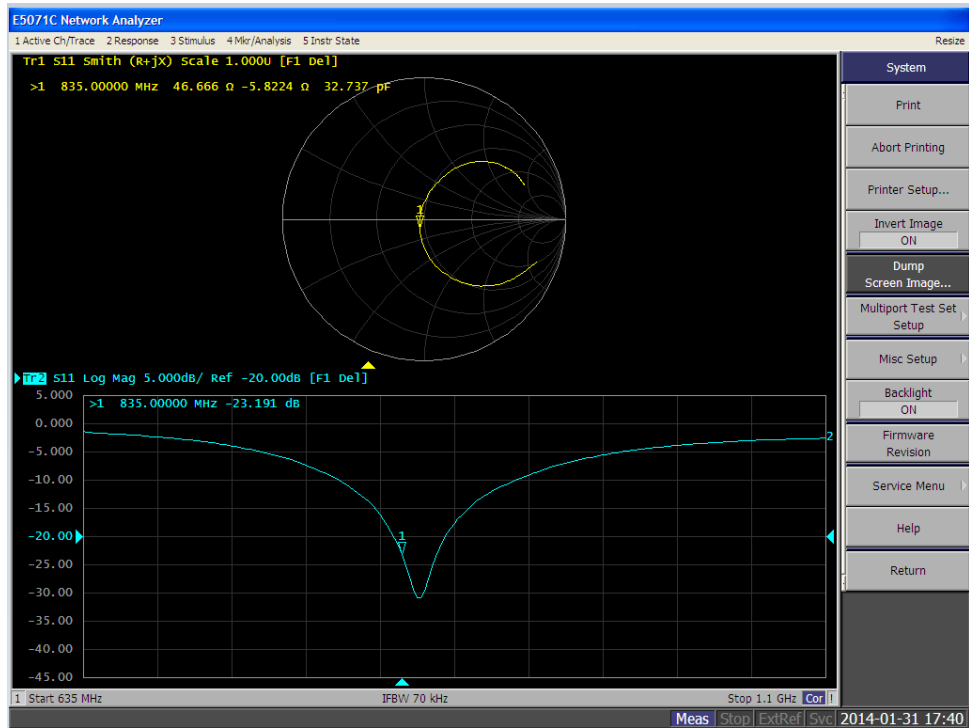



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Client **Nokia Salo TCC**

Certificate No: **D1900V2-5d013\_Dec12**

## CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 5d013**

Calibration procedure(s) **QA CAL-05.v8**  
 Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **December 06, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A        | GB37480704         | 01-Nov-12 (No. 217-01640)         | Oct-13                 |
| Power sensor HP 8481A       | US37292783         | 01-Nov-12 (No. 217-01640)         | Oct-13                 |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 27-Mar-12 (No. 217-01530)         | Apr-13                 |
| Type-N mismatch combination | SN: 5047.3 / 06327 | 27-Mar-12 (No. 217-01533)         | Apr-13                 |
| Reference Probe ES3DV3      | SN: 3205           | 30-Dec-11 (No. ES3-3205_Dec11)    | Dec-12                 |
| DAE4                        | SN: 601            | 27-Jun-12 (No. DAE4-601_Jun12)    | Jun-13                 |
| Secondary Standards         | ID #               | Check Date (in house)             | Scheduled Check        |
| Power sensor HP 8481A       | MY41092317         | 18-Oct-02 (in house check Oct-11) | In house check: Oct-13 |
| RF generator R&S SMT-06     | 100005             | 04-Aug-99 (in house check Oct-11) | In house check: Oct-13 |
| Network Analyzer HP 8753E   | US37390585 S4206   | 18-Oct-01 (in house check Oct-12) | In house check: Oct-13 |

|                |                |                       |           |
|----------------|----------------|-----------------------|-----------|
|                | Name           | Function              | Signature |
| Calibrated by: | Israe El-Naouq | Laboratory Technician |           |
| Approved by:   | Katja Pokovic  | Technical Manager     |           |

Issued: December 6, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.





Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

### Glossary:

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                        |             |
|------------------------------|------------------------|-------------|
| DASY Version                 | DASY5                  | V52.8.3     |
| Extrapolation                | Advanced Extrapolation |             |
| Phantom                      | Modular Flat Phantom   |             |
| Distance Dipole Center - TSL | 10 mm                  | with Spacer |
| Zoom Scan Resolution         | dx, dy, dz = 5 mm      |             |
| Frequency                    | 1900 MHz $\pm$ 1 MHz   |             |

## Head TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Head TSL parameters             | 22.0 °C             | 40.0           | 1.40 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 39.5 $\pm$ 6 % | 1.38 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 10.1 W/kg                    |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 40.6 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 5.28 W/kg                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 21.2 W/kg $\pm$ 16.5 % (k=2) |

## Body TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Body TSL parameters             | 22.0 °C             | 53.3           | 1.52 mho/m           |
| Measured Body TSL parameters            | (22.0 $\pm$ 0.2) °C | 52.2 $\pm$ 6 % | 1.52 mho/m $\pm$ 6 % |
| Body TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Body TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 10.3 W/kg                    |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 41.0 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 5.41 W/kg                    |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 21.6 W/kg $\pm$ 16.5 % (k=2) |

## Appendix

### Antenna Parameters with Head TSL

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $52.3 \Omega + 6.2 j\Omega$ |
| Return Loss                          | - 23.8 dB                   |

### Antenna Parameters with Body TSL

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $48.4 \Omega + 5.9 j\Omega$ |
| Return Loss                          | - 24.1 dB                   |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.194 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |                |
|-----------------|----------------|
| Manufactured by | SPEAG          |
| Manufactured on | April 30, 2002 |



## DASY5 Validation Report for Head TSL

Date: 06.12.2012

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d013**

Communication System: CW; Frequency: 1900 MHz

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 39.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.01, 5.01, 5.01); Calibrated: 30.12.2011;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

**Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 97.748 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 18.0 W/kg

**SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.28 W/kg**

Maximum value of SAR (measured) = 12.4 W/kg

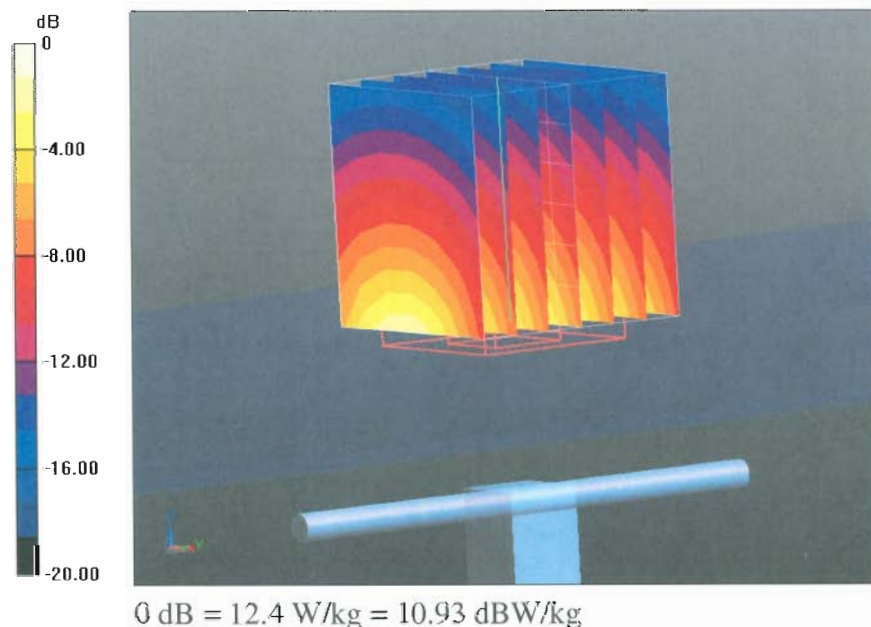

Impedance Measurement Plot for Head TSL

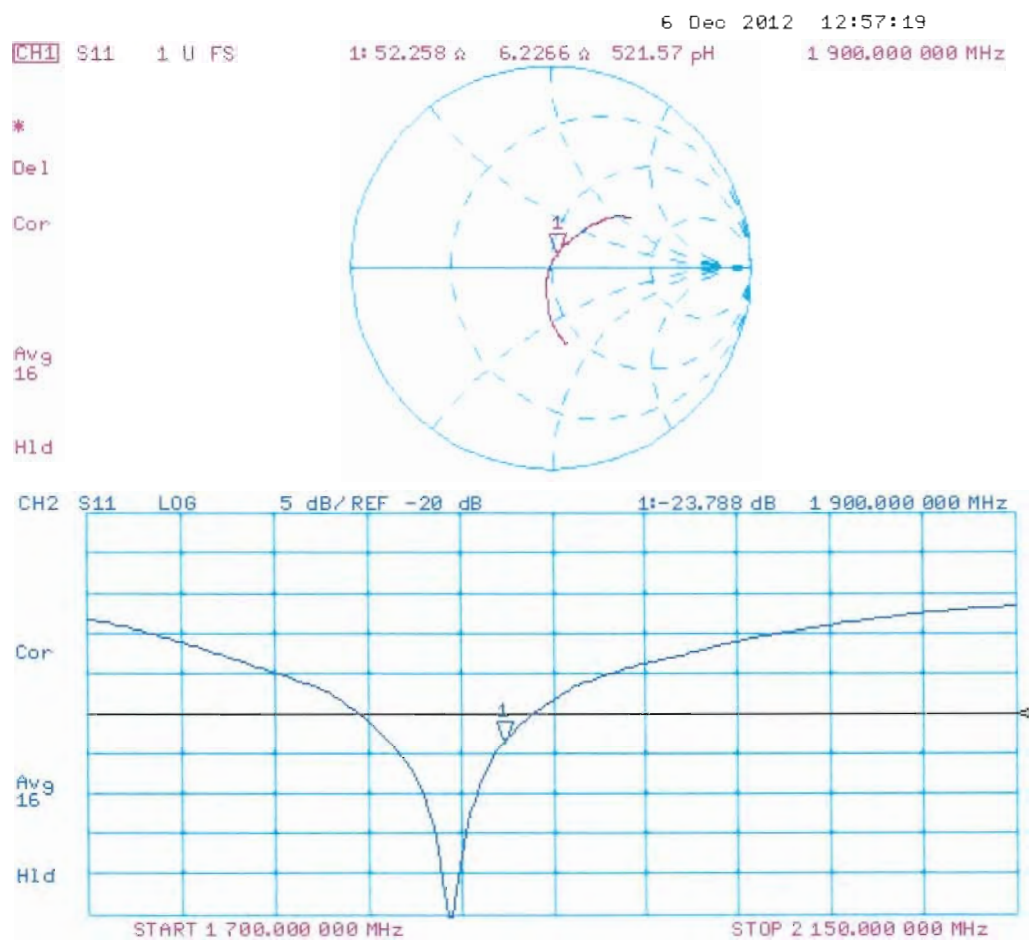

## DASY5 Validation Report for Body TSL

Date: 06.12.2012

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d013**

Communication System: CW; Frequency: 1900 MHz

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 52.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.62, 4.62, 4.62); Calibrated: 30.12.2011;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.039 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 18.0 W/kg

**SAR(1 g) = 10.3 W/kg; SAR(10 g) = 5.41 W/kg**

Maximum value of SAR (measured) = 12.9 W/kg

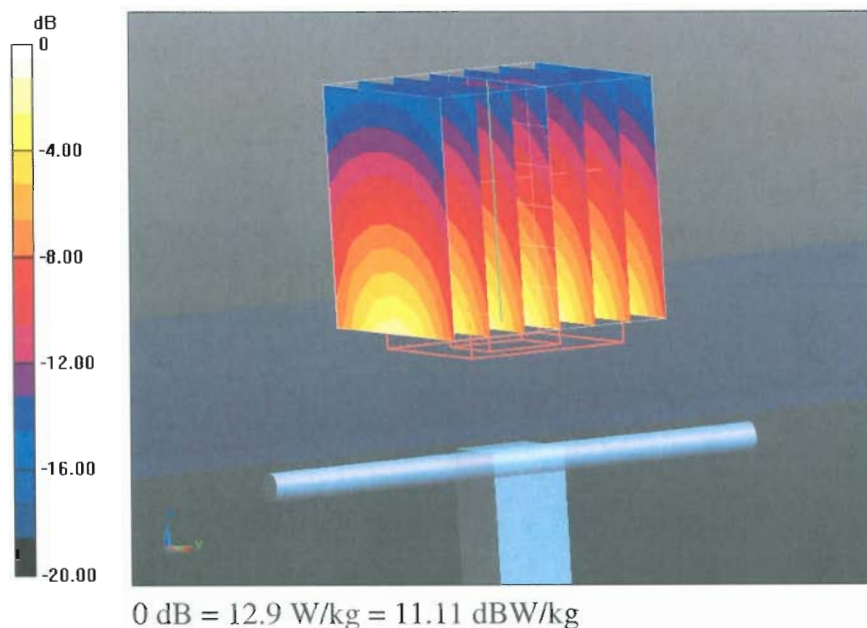

## Impedance Measurement Plot for Body TSL

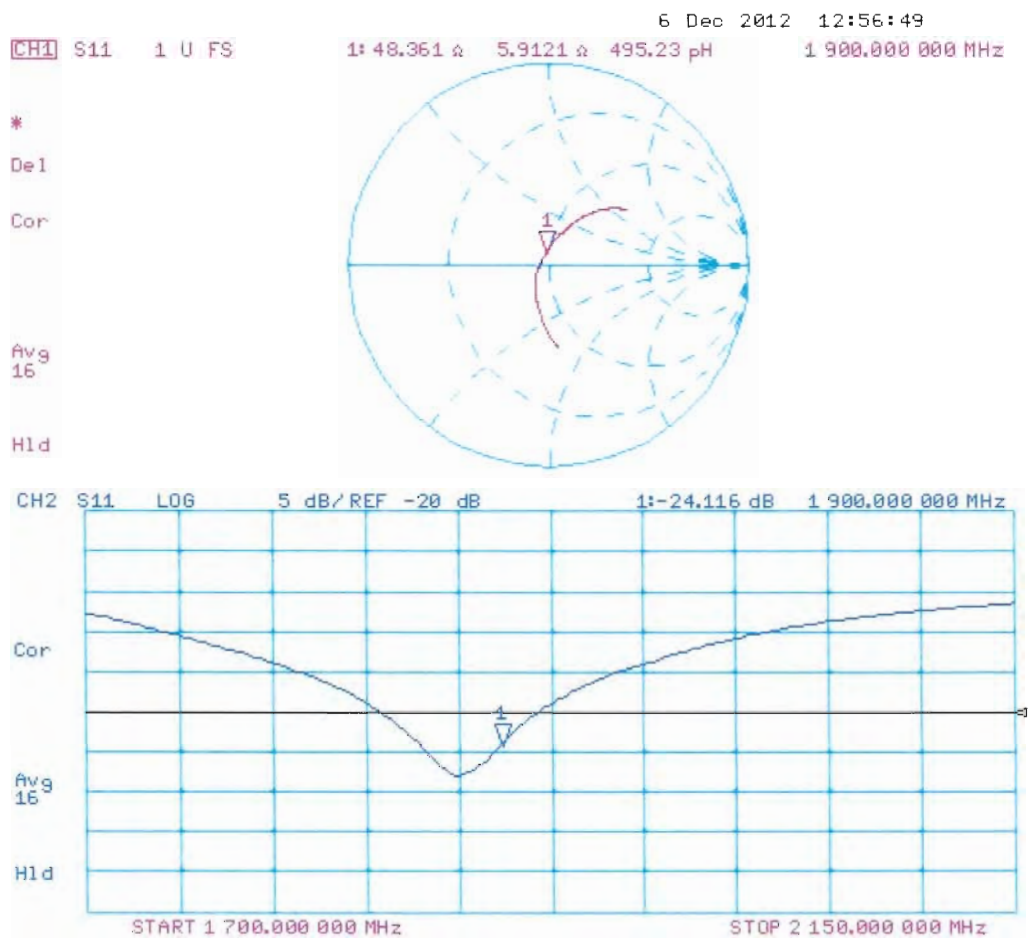

## Dipole D1900V2 - SN5d013 Antenna Parameters measured: 2014-01-31.


### Antenna Parameters with Head TSL

|                                      | Calibration<br>certificate   | Annual<br>measurement        |
|--------------------------------------|------------------------------|------------------------------|
| Impedance, transformed to feed point | 52.3 $\Omega$ 6.2 j $\Omega$ | 50.7 $\Omega$ 4.8 j $\Omega$ |
| Return loss                          | -23.8 dB                     | -26.4 dB                     |


### Antenna Parameters with Body TSL

|                                      | Calibration<br>certificate   | Annual<br>measurement        |
|--------------------------------------|------------------------------|------------------------------|
| Impedance, transformed to feed point | 48.4 $\Omega$ 5.9 j $\Omega$ | 47.9 $\Omega$ 6.6 j $\Omega$ |
| Return loss                          | -24.1 dB                     | -23.0 dB                     |

## Impedance Measurement Plot for Head TSL 1900

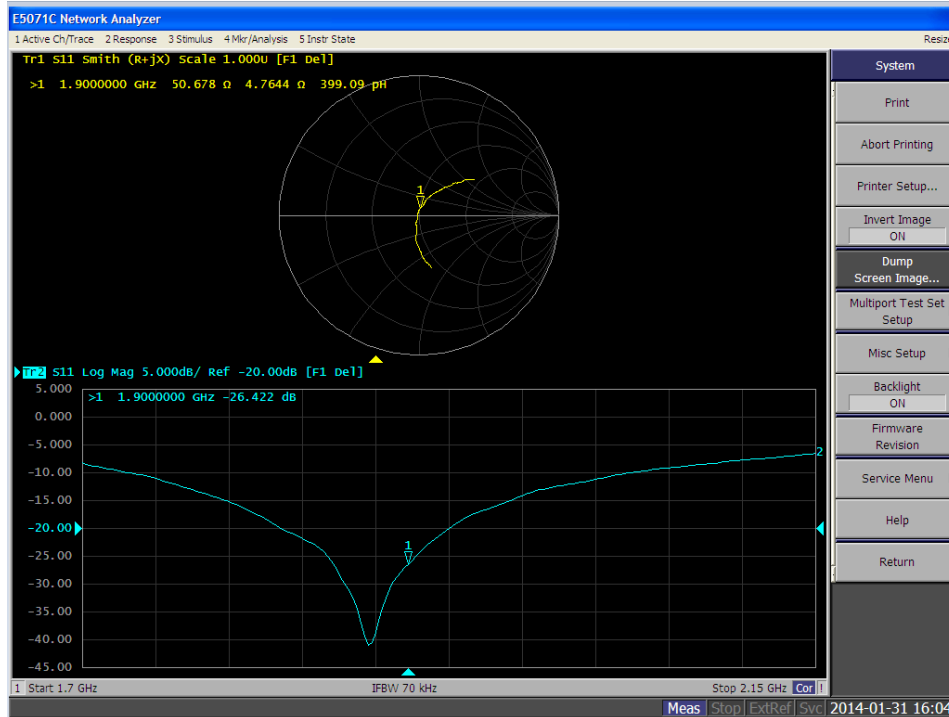

## Impedance Measurement Plot for Body TSL 1900

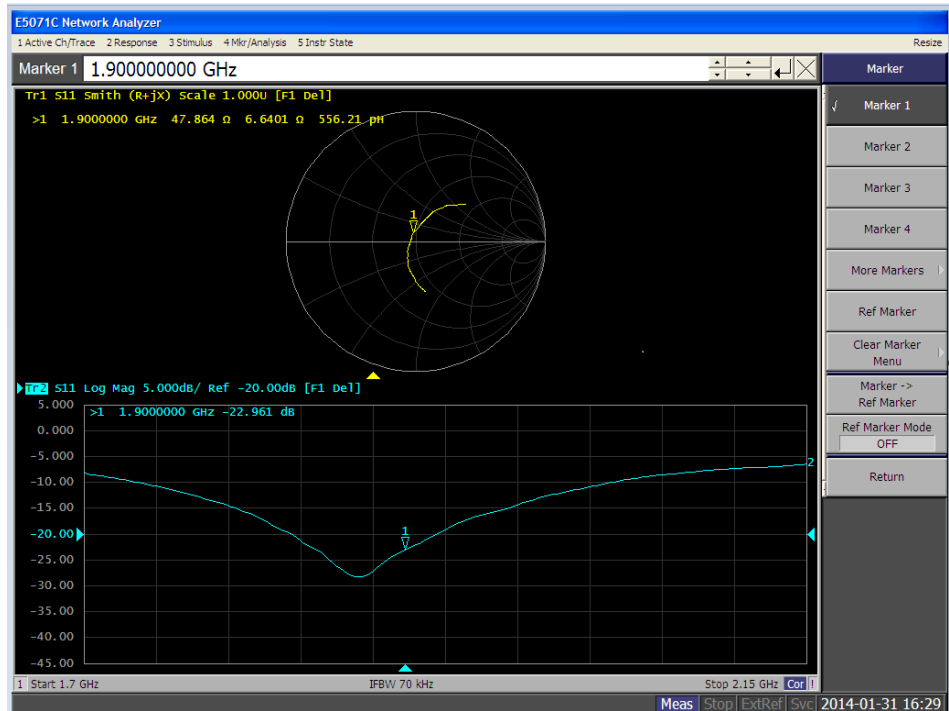





Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Client **Nokia Salo TCC**

Certificate No: **D2450V2-749\_Dec12**

## CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 749**

Calibration procedure(s) **QA CAL-05.v8**  
**Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **December 07, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A        | GB37480704         | 01-Nov-12 (No. 217-01640)         | Oct-13                 |
| Power sensor HP 8481A       | US37292783         | 01-Nov-12 (No. 217-01640)         | Oct-13                 |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 27-Mar-12 (No. 217-01530)         | Apr-13                 |
| Type-N mismatch combination | SN: 5047.3 / 06327 | 27-Mar-12 (No. 217-01533)         | Apr-13                 |
| Reference Probe ES3DV3      | SN: 3205           | 30-Dec-11 (No. ES3-3205_Dec11)    | Dec-12                 |
| DAE4                        | SN: 601            | 27-Jun-12 (No. DAE4-601_Jun12)    | Jun-13                 |
| Secondary Standards         | ID #               | Check Date (in house)             | Scheduled Check        |
| Power sensor HP 8481A       | MY41092317         | 18-Oct-02 (in house check Oct-11) | In house check: Oct-13 |
| RF generator R&S SMT-06     | 100005             | 04-Aug-99 (in house check Oct-11) | In house check: Oct-13 |
| Network Analyzer HP 8753E   | US37390585 S4206   | 18-Oct-01 (in house check Oct-12) | In house check: Oct-13 |

|                |               |                       |           |
|----------------|---------------|-----------------------|-----------|
| Calibrated by: | Name          | Function              | Signature |
|                | Leif Klysner  | Laboratory Technician |           |
| Approved by:   | Katja Pokovic | Technical Manager     |           |

Issued: December 7, 2012

Calibration certificate shall not be reproduced except in full without written approval of the laboratory.





Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                        |             |
|------------------------------|------------------------|-------------|
| DASY Version                 | DASY5                  | V52.8.3     |
| Extrapolation                | Advanced Extrapolation |             |
| Phantom                      | Modular Flat Phantom   |             |
| Distance Dipole Center - TSL | 10 mm                  | with Spacer |
| Zoom Scan Resolution         | dx, dy, dz = 5 mm      |             |
| Frequency                    | 2450 MHz $\pm$ 1 MHz   |             |

## Head TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Head TSL parameters             | 22.0 °C             | 39.2           | 1.80 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 38.2 $\pm$ 6 % | 1.84 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR measured                                          | 250 mW input power | 13.7 W/kg                    |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 53.9 W/kg $\pm$ 17.0 % (k=2) |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR measured                                            | 250 mW input power | 6.35 W/kg                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 25.2 W/kg $\pm$ 16.5 % (k=2) |

## Body TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Body TSL parameters             | 22.0 °C             | 52.7           | 1.95 mho/m           |
| Measured Body TSL parameters            | (22.0 $\pm$ 0.2) °C | 50.7 $\pm$ 6 % | 2.02 mho/m $\pm$ 6 % |
| Body TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Body TSL

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR measured                                          | 250 mW input power | 13.2 W/kg                    |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 51.5 W/kg $\pm$ 17.0 % (k=2) |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR measured                                            | 250 mW input power | 6.08 W/kg                    |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 24.0 W/kg $\pm$ 16.5 % (k=2) |

## Appendix

### Antenna Parameters with Head TSL

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $52.6 \Omega + 3.4 j\Omega$ |
| Return Loss                          | - 27.7 dB                   |

### Antenna Parameters with Body TSL

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $49.5 \Omega + 4.3 j\Omega$ |
| Return Loss                          | - 27.3 dB                   |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.163 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |                   |
|-----------------|-------------------|
| Manufactured by | SPEAG             |
| Manufactured on | December 01, 2003 |

## DASY5 Validation Report for Head TSL

Date: 07.12.2012

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 749**

Communication System: CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.84$  mho/m;  $\epsilon_r = 38.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.45, 4.45, 4.45); Calibrated: 30.12.2011;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

### Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.608 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 28.2 W/kg


**SAR(1 g) = 13.7 W/kg; SAR(10 g) = 6.35 W/kg**

Maximum value of SAR (measured) = 17.3 W/kg

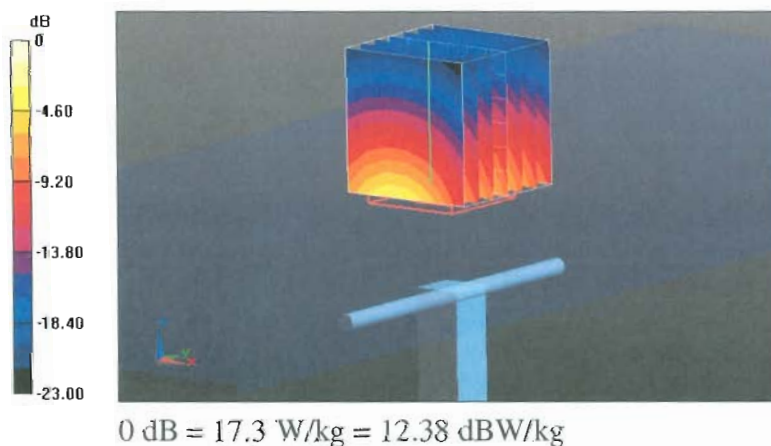



Impedance Measurement Plot for Head TSL

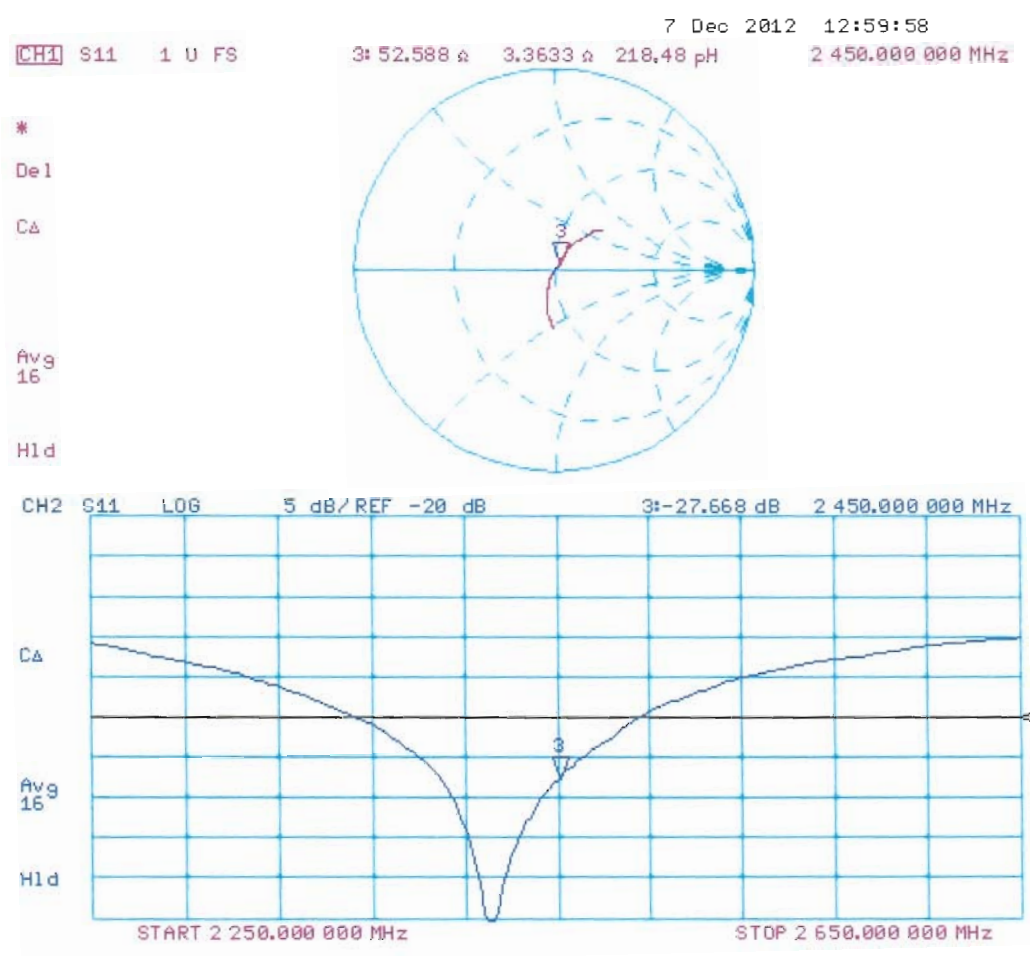

## DASY5 Validation Report for Body TSL

Date: 07.12.2012

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 749**

Communication System: CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2.02$  mho/m;  $\epsilon_r = 50.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.26, 4.26, 4.26); Calibrated: 30.12.2011;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm 2/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.139 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 27.4 W/kg

**SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.08 W/kg**

Maximum value of SAR (measured) = 17.4 W/kg

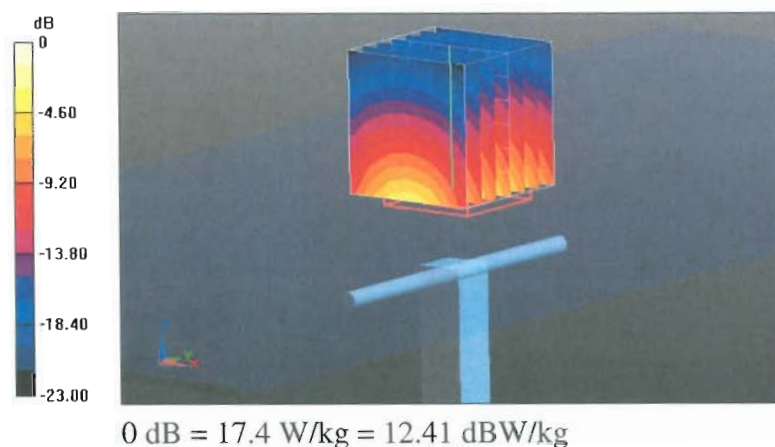

## Impedance Measurement Plot for Body TSL

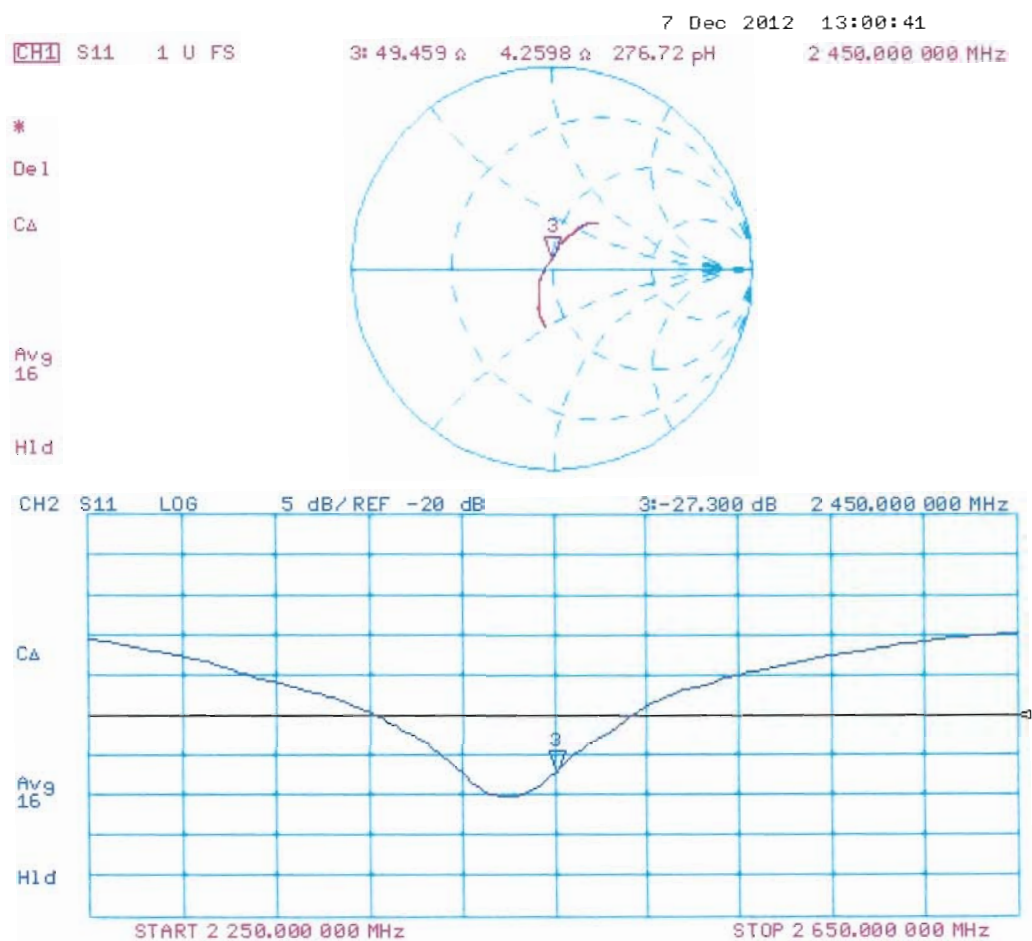



**Dipole D2450V2 – SN:749 Antenna Parameters measured: 2014-01-14.**


**Antenna Parameters with Head TSL**

|                                      | Calibration<br>certificate     | Annual<br>measurement          |
|--------------------------------------|--------------------------------|--------------------------------|
| Impedance, transformed to feed point | 52.6 $\Omega$ - 3.4 j $\Omega$ | 50.8 $\Omega$ - 3.0 j $\Omega$ |
| Return loss                          | -27.7 dB                       | -30.4 dB                       |


**Antenna Parameters with Body TSL**

|                                      | Calibration<br>certificate     | Annual<br>measurement          |
|--------------------------------------|--------------------------------|--------------------------------|
| Impedance, transformed to feed point | 49.5 $\Omega$ - 4.3 j $\Omega$ | 48.9 $\Omega$ - 3.6 j $\Omega$ |
| Return loss                          | -27.3 dB                       | -28.4 dB                       |

## Impedance Measurement Plot for Head TSL 2450

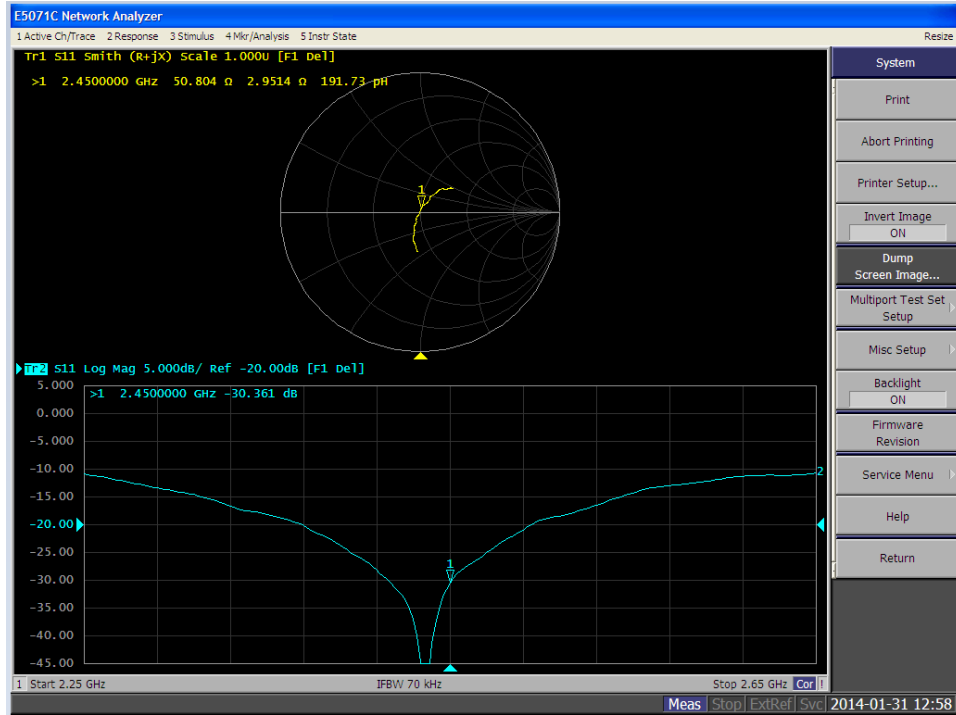

## Impedance Measurement Plot for Body TSL 2450

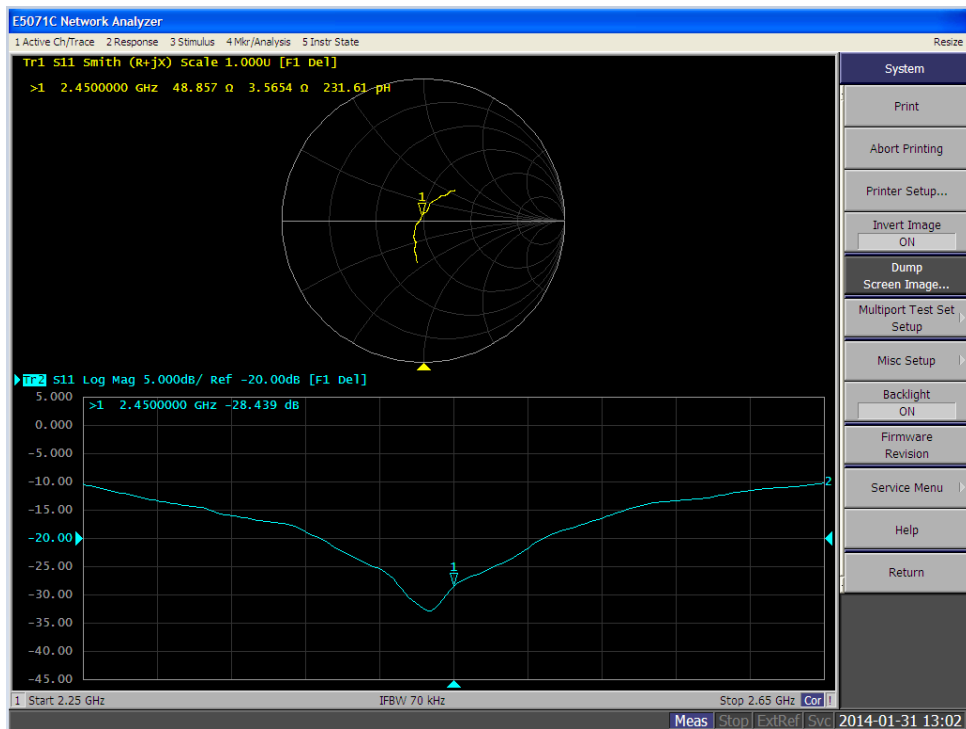

## APPENDIX G: CONDUCTED POWER MEASUREMENTS FOR SUPPORTED GSM/GPRS/EGPRS TRANSMISSION MODES

Type: RM-1018, Serial number 004402/47/827374/5 HW:1500 SW: 01068.00004.14182.20000 used for GSM/GPRS/EGPRS850 SAR Head and Body-worn measurements.

| GSM/GPRS/EGPRS850 / Tuning target (dBm)<br>Head and Body-worn   |                     |                     |                     |
|-----------------------------------------------------------------|---------------------|---------------------|---------------------|
| Slot configuration                                              | Ch 128<br>824.2 MHz | Ch 190<br>836.6 MHz | Ch 251<br>848.8 MHz |
| GSM 1-slot                                                      | 32.5                | 32.5                | 32.5                |
| GPRS 2-slot                                                     | 30.0                | 30.0                | 30.0                |
| GPRS 3-slot                                                     | 28.2                | 28.2                | 28.2                |
| GPRS 4-slot                                                     | 27.0                | 27.0                | 27.0                |
| EGPRS 1-slot                                                    | 26.5                | 26.5                | 26.5                |
| EGPRS 2-slot                                                    | 26.5                | 26.5                | 26.5                |
| EGPRS 3-slot                                                    | 25.7                | 25.7                | 25.7                |
| EGPRS 4-slot                                                    | 24.5                | 24.5                | 24.5                |
| GSM/GPRS/EGPRS850 / Conducted power (dBm)<br>Head and Body-worn |                     |                     |                     |
| Slot configuration                                              | Ch 128<br>824.2 MHz | Ch 190<br>836.6 MHz | Ch 251<br>848.8 MHz |
| GSM 1-slot                                                      | 32.7                | 32.7                | 32.6                |
| GPRS 2-slot                                                     | 29.9                | 29.8                | 29.7                |
| GPRS 3-slot                                                     | 27.9                | 28.0                | 27.9                |
| GPRS 4-slot                                                     | 26.7                | 26.7                | 26.7                |
| EGPRS 1-slot                                                    | 26.8                | 26.8                | 26.7                |
| EGPRS 2-slot                                                    | 26.7                | 26.7                | 26.6                |
| EGPRS 3-slot                                                    | 25.9                | 26.0                | 25.8                |
| EGPRS 4-slot                                                    | 24.6                | 24.7                | 24.6                |

Type: RM-1018, Serial number 004402/47/827370/3 HW:1500 SW: 01068.00004.14182.20000 used for GSM/GPRS/EGPRS1900 SAR Head and Body-worn measurements.

| GSM/GPRS/EGPRS1900 / Tuning target (dBm)<br>Head and Body-worn   |                      |                      |                      |
|------------------------------------------------------------------|----------------------|----------------------|----------------------|
| Slot configuration                                               | CH 512<br>1850.2 MHz | CH 661<br>1880.0 MHz | CH 810<br>1909.8 MHz |
| GSM 1-slot                                                       | 29.5                 | 29.5                 | 29.5                 |
| GPRS 2-slot                                                      | 27.5                 | 27.5                 | 27.5                 |
| GPRS 3-slot                                                      | 25.7                 | 25.7                 | 25.7                 |
| GPRS 4-slot                                                      | 24.5                 | 24.5                 | 24.5                 |
| EGPRS 1-slot                                                     | 25.5                 | 25.5                 | 25.5                 |
| EGPRS 2-slot                                                     | 25.5                 | 25.5                 | 25.5                 |
| EGPRS 3-slot                                                     | 25.0                 | 25.0                 | 25.0                 |
| EGPRS 4-slot                                                     | 24.0                 | 24.0                 | 24.0                 |
| GSM/GPRS/EGPRS1900 / Conducted power (dBm)<br>Head and Body-worn |                      |                      |                      |
| Slot configuration                                               | CH 512<br>1850.2 MHz | CH 661<br>1880.0 MHz | CH 810<br>1909.8 MHz |
| GSM 1-slot                                                       | 29.3                 | 29.4                 | 29.3                 |
| GPRS 2-slot                                                      | 27.3                 | 27.4                 | 27.2                 |
| GPRS 3-slot                                                      | 25.6                 | 25.7                 | 25.5                 |
| GPRS 4-slot                                                      | 24.2                 | 24.3                 | 24.2                 |
| EGPRS 1-slot                                                     | 25.4                 | 25.3                 | 25.3                 |
| EGPRS 2-slot                                                     | 25.4                 | 25.2                 | 25.1                 |
| EGPRS 3-slot                                                     | 24.9                 | 24.9                 | 24.7                 |
| EGPRS 4-slot                                                     | 23.7                 | 23.7                 | 23.6                 |

Type: RM-1018, Serial number 004402/47/827366/1 HW:1500 SW: 01068.00004.14182.20000 used for GSM/GPRS/EGPRS850 SAR Wireless Router measurements.

| GSM/GPRS/EGPRS850 / Tuning target (dBm)<br>Wireless Router   |                     |                     |                     |
|--------------------------------------------------------------|---------------------|---------------------|---------------------|
| Slot configuration                                           | Ch 128<br>824.2 MHz | Ch 190<br>836.6 MHz | Ch 251<br>848.8 MHz |
| GSM 1-slot                                                   | 32.0                | 32.0                | 32.0                |
| GPRS 2-slot                                                  | 29.5                | 29.5                | 29.5                |
| GPRS 3-slot                                                  | 27.7                | 27.7                | 27.7                |
| GPRS 4-slot                                                  | 26.5                | 26.5                | 26.5                |
| EGPRS 1-slot                                                 | 26.5                | 26.5                | 26.5                |
| EGPRS 2-slot                                                 | 26.5                | 26.5                | 26.5                |
| EGPRS 3-slot                                                 | 25.7                | 25.7                | 25.7                |
| EGPRS 4-slot                                                 | 24.5                | 24.5                | 24.5                |
| GSM/GPRS/EGPRS850 / Conducted power (dBm)<br>Wireless Router |                     |                     |                     |
| Slot configuration                                           | Ch 128<br>824.2 MHz | Ch 190<br>836.6 MHz | Ch 251<br>848.8 MHz |
| GSM 1-slot                                                   | 32.0                | 32.0                | 31.9                |
| GPRS 2-slot                                                  | 29.4                | 29.4                | 29.2                |
| GPRS 3-slot                                                  | 27.7                | 27.7                | 27.6                |
| GPRS 4-slot                                                  | 26.4                | 26.4                | 26.3                |
| EGPRS 1-slot                                                 | 26.7                | 26.5                | 26.4                |
| EGPRS 2-slot                                                 | 26.6                | 26.5                | 26.3                |
| EGPRS 3-slot                                                 | 25.8                | 25.6                | 25.6                |
| EGPRS 4-slot                                                 | 24.4                | 24.3                | 24.2                |

Type: RM-1018, Serial number 004402/47/827363/8 HW:1500 SW: 01068.00004.14182.20000 used for GSM/GPRS/EGPRS1900 SAR Wireless Router measurements.

| GSM/GPRS/EGPRS1900 / Tuning target (dBm)<br>Wireless Router   |                      |                      |                      |
|---------------------------------------------------------------|----------------------|----------------------|----------------------|
| Slot configuration                                            | CH 512<br>1850.2 MHz | CH 661<br>1880.0 MHz | CH 810<br>1909.8 MHz |
| GSM 1-slot                                                    | 26.5                 | 26.5                 | 26.5                 |
| GPRS 2-slot                                                   | 23.5                 | 23.5                 | 23.5                 |
| GPRS 3-slot                                                   | 21.7                 | 21.7                 | 21.7                 |
| GPRS 4-slot                                                   | 20.5                 | 20.5                 | 20.5                 |
| EGPRS 1-slot                                                  | 25.5                 | 25.5                 | 25.5                 |
| EGPRS 2-slot                                                  | 22.5                 | 22.5                 | 22.5                 |
| EGPRS 3-slot                                                  | 21.2                 | 21.2                 | 21.2                 |
| EGPRS 4-slot                                                  | 19.5                 | 19.5                 | 19.5                 |
| GSM/GPRS/EGPRS1900 / Conducted power (dBm)<br>Wireless Router |                      |                      |                      |
| Slot configuration                                            | CH 512<br>1850.2 MHz | CH 661<br>1880.0 MHz | CH 810<br>1909.8 MHz |
| GSM 1-slot                                                    | 26.5                 | 26.6                 | 26.5                 |
| GPRS 2-slot                                                   | 23.6                 | 23.6                 | 23.5                 |
| GPRS 3-slot                                                   | 21.6                 | 21.6                 | 21.5                 |
| GPRS 4-slot                                                   | 20.5                 | 20.5                 | 20.3                 |
| EGPRS 1-slot                                                  | 25.6                 | 25.4                 | 25.3                 |
| EGPRS 2-slot                                                  | 22.6                 | 22.5                 | 22.5                 |
| EGPRS 3-slot                                                  | 21.2                 | 21.2                 | 21.2                 |
| EGPRS 4-slot                                                  | 19.4                 | 19.4                 | 19.4                 |

---

**APPENDIX H: CONDUCTED POWER MEASUREMENTS FOR SUPPORTED WCDMA TRANSMISSION MODES**

Type: RM-1018; SN: 004402/47/827374/5, HW:1500, SW: 01061.00014.14182.20000 used for WCDMA850 (Band 5) Head, Body-worn and Wireless router SAR measurements

| <b>WCDMA 850 (Band 5) / Tuning target (dBm)<br/>Head, Body-worn and Wireless Router</b>   |             |             |              |
|-------------------------------------------------------------------------------------------|-------------|-------------|--------------|
| Mode                                                                                      | Low channel | Mid channel | High channel |
| WCDMA                                                                                     | 23.5        | 23.5        | 23.5         |
| <b>WCDMA 850 (Band 5) / Conducted power (dBm)<br/>Head, Body-worn and Wireless Router</b> |             |             |              |
| Mode                                                                                      | Low channel | Mid channel | High channel |
| WCDMA                                                                                     | 23.1        | 23.1        | 23.3         |

WCDMA and HSUPA Subtest mode conducted powers, measured from a separate, fully representative sample are presented in Appendix D.



Type: RM-1018; SN: 004402/47/827370/3 HW:1500 SW: 01068.00004.14182.20000 used for WCDMA1900 (Band 2) Head and Body-worn SAR measurements

| WCDMA 1900 (Band 2) / Tuning target (dBm)<br>Head and Body-worn   |             |             |              |
|-------------------------------------------------------------------|-------------|-------------|--------------|
| Mode                                                              | Low channel | Mid channel | High channel |
| WCDMA                                                             | 22.0        | 22.0        | 22.0         |
| WCDMA 1900 (Band 2) / Conducted power (dBm)<br>Head and Body-worn |             |             |              |
| Mode                                                              | Low channel | Mid channel | High channel |
| WCDMA                                                             | 21.8        | 22.0        | 21.9         |

WCDMA and HSUPA Subtest mode conducted powers, measured from a separate, fully representative sample are presented in Appendix D.

Type: RM-1018; SN: Serial number 004402/47/827363/8 HW:1500 SW: 01068.00004.14182.20000  
used for WCDMA1900 (Band 2) Wireless router SAR measurements

| WCDMA 1900 (Band 2) / Tuning target (dBm)<br>Wireless Router   |                |                |                 |
|----------------------------------------------------------------|----------------|----------------|-----------------|
| Mode                                                           | Low<br>channel | Mid<br>channel | High<br>channel |
| WCDMA                                                          | 17.5           | 17.5           | 17.5            |
| WCDMA 1900 (Band 2) / Conducted power (dBm)<br>Wireless Router |                |                |                 |
| Mode                                                           | Low<br>channel | Mid<br>channel | High<br>channel |
| WCDMA                                                          | 17.5           | 17.8           | 17.7            |

WCDMA and HSUPA Subtest mode conducted powers, measured from a separate, fully representative sample are presented in Appendix D.

## APPENDIX I: CONDUCTED POWER RESULTS FOR WLAN2450

### I.1 Power Tuning Targets

| WLAN 2.4 GHz: 20 MHz channel bandwidth |            |                   |      |      |      |      |       |       |
|----------------------------------------|------------|-------------------|------|------|------|------|-------|-------|
| Standard                               | Modulation | Data speed [Mbps] | CH 1 | CH 2 | CH 6 | CH 7 | CH 10 | CH 11 |
| 802.11b                                | BPSK       | 1                 | 17.0 | 17.0 | 17.0 | 17.0 | 17.0  | 17.0  |
| 802.11b                                | QPSK       | 2                 | 17.0 | 17.0 | 17.0 | 17.0 | 17.0  | 17.0  |
| 802.11b                                | QPSK       | 5,5               | 17.0 | 17.0 | 17.0 | 17.0 | 17.0  | 17.0  |
| 802.11b                                | QPSK       | 11                | 17.0 | 17.0 | 17.0 | 17.0 | 17.0  | 17.0  |
| 802.11g                                | BPSK       | 6                 | 12.0 | 16.5 | 16.5 | 16.5 | 16.5  | 16.5  |
| 802.11g                                | BPSK       | 9                 | 12.0 | 16.5 | 16.5 | 16.5 | 16.5  | 16.5  |
| 802.11g                                | QPSK       | 12                | 12.0 | 16.5 | 16.5 | 16.5 | 16.5  | 16.5  |
| 802.11g                                | QPSK       | 18                | 12.0 | 16.5 | 16.5 | 16.5 | 16.5  | 16.5  |
| 802.11g                                | 16QAM      | 24                | 12.0 | 16.5 | 16.5 | 16.5 | 16.5  | 16.5  |
| 802.11g                                | 16QAM      | 36                | 12.0 | 16.0 | 16.0 | 16.0 | 16.0  | 16.0  |
| 802.11g                                | 64QAM      | 48                | 12.0 | 14.0 | 14.0 | 14.0 | 14.0  | 14.0  |
| 802.11g                                | 64QAM      | 54                | 12.0 | 13.0 | 13.0 | 13.0 | 13.0  | 13.0  |
| 802.11n                                | BPSK       | 6.5 / 7.25        | 12.0 | 16.5 | 16.5 | 16.5 | 16.5  | 16.5  |
| 802.11n                                | QPSK       | 13.0 / 14.4       | 12.0 | 16.5 | 16.5 | 16.5 | 16.5  | 16.5  |
| 802.11n                                | QPSK       | 19.5 / 21.7       | 12.0 | 16.5 | 16.5 | 16.5 | 16.5  | 16.5  |
| 802.11n                                | 16QAM      | 26.0 / 28.9       | 12.0 | 16.5 | 16.5 | 16.5 | 16.5  | 16.5  |
| 802.11n                                | 16QAM      | 39.0 / 43.3       | 12.0 | 15.0 | 15.0 | 15.0 | 15.0  | 15.0  |
| 802.11n                                | 64QAM      | 52.0 / 57.8       | 12.0 | 13.5 | 13.5 | 13.5 | 13.5  | 13.5  |
| 802.11n                                | 64QAM      | 58.5 / 65.0       | 12.0 | 12.0 | 12.0 | 12.0 | 12.0  | 12.0  |
| 802.11n                                | 64QAM      | 65.0 / 72.2       | 11.0 | 11.0 | 11.0 | 11.0 | 11.0  | 11.0  |

## I.2 Conducted Power from the Samples used in the Testing

Type: RM-1018; SN: 004402/47/827381/0; HW:1500; SW: 01068.00004.14182.04000 used for WLAN2450 for SAR Head, Body-worn and Wireless Router measurements.

| WLAN 2.4 GHz: 20 MHz channel bandwidth |            |                   |      |      |      |      |       |       |
|----------------------------------------|------------|-------------------|------|------|------|------|-------|-------|
| Standard                               | Modulation | Data speed [Mbps] | CH 1 | CH 2 | CH 6 | CH 7 | CH 10 | CH 11 |
| 802.11b                                | BPSK       | 1                 | 17.2 | 17.2 | 17.5 | 17.8 | 17.7  | 17.8  |
| 802.11b                                | QPSK       | 2                 | 17.1 | 17.2 | 17.5 | 17.7 | 17.5  | 17.8  |
| 802.11b                                | QPSK       | 5,5               | 17.3 | 17.3 | 17.6 | 17.6 | 17.7  | 17.7  |
| 802.11b                                | QPSK       | 11                | 17.2 | 17.3 | 17.6 | 17.6 | 17.6  | 17.6  |
| 802.11g                                | BPSK       | 6                 | 12.4 | 17.1 | 17.4 | 17.4 | 17.3  | 12.5  |
| 802.11g                                | BPSK       | 9                 | 12.5 | 17.1 | 17.4 | 17.4 | 17.4  | 12.5  |
| 802.11g                                | QPSK       | 12                | 12.2 | 17.1 | 17.5 | 17.7 | 17.4  | 12.5  |
| 802.11g                                | QPSK       | 18                | 12.2 | 17.1 | 17.4 | 17.4 | 17.4  | 12.5  |
| 802.11g                                | 16QAM      | 24                | 12.4 | 17.3 | 17.4 | 17.3 | 17.4  | 12.4  |
| 802.11g                                | 16QAM      | 36                | 12.4 | 16.2 | 16.5 | 16.5 | 16.5  | 12.4  |
| 802.11g                                | 64QAM      | 48                | 12.3 | 14.3 | 14.5 | 14.7 | 14.5  | 12.4  |
| 802.11g                                | 64QAM      | 54                | 12.3 | 13.2 | 13.5 | 13.5 | 13.5  | 12.5  |
| 802.11n                                | BPSK       | 6.5 / 7.25        | 12.3 | 17.2 | 17.6 | 17.5 | 17.5  | 12.6  |
| 802.11n                                | QPSK       | 13.0 / 14.4       | 12.4 | 17.2 | 17.5 | 17.5 | 17.5  | 12.6  |
| 802.11n                                | QPSK       | 19.5 / 21.7       | 12.4 | 17.2 | 17.5 | 17.5 | 17.5  | 12.6  |
| 802.11n                                | 16QAM      | 26.0 / 28.9       | 12.3 | 17.2 | 17.4 | 17.4 | 17.4  | 12.6  |
| 802.11n                                | 16QAM      | 39.0 / 43.3       | 12.3 | 15.3 | 15.6 | 15.6 | 15.6  | 12.6  |
| 802.11n                                | 64QAM      | 52.0 / 57.8       | 12.3 | 14.4 | 14.6 | 14.6 | 14.6  | 12.6  |
| 802.11n                                | 64QAM      | 58.5 / 65.0       | 12.3 | 12.3 | 12.6 | 12.5 | 12.5  | 12.6  |
| 802.11n                                | 64QAM      | 65.0 / 72.2       | 11.3 | 11.3 | 11.6 | 11.6 | 11.5  | 11.5  |