

FCC Part 22/24 Compliance Test Report

Test Report no.:	Bej_FCC_0701_05.doc	Date of Report:	2007-01-15
Number of pages:	19	Customer's Contact person:	Janne Ilkka
Testing laboratory:	TCC Nokia Beijing Laboratory Nokia Tower Pacific Century Place 2A Gong Ti Bei Lu Chaoyang District 100027 BEIJING, PRC Tel. +86 10 65392828 Fax. +86 10 65393838	Customer:	Nokia Corporation P.O. Box 68 Sinitaival 5 FIN-33721 TAMPERE, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 46880
FCC listing no.:	884453		
IC recognition no.:	4917		
Tested devices/ accessories:	Phone RM-245, Battery BL-5F, AC-charger AC-5, Headset HS-45, Audio adapter AD-43		
FCC ID:	PDNRM-245	IC:	661R-RM245
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Parts 22 and 24, TIA-603-B-2002 and IC standards RSS-GEN, RSS-132 and RSS-133. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Yin Hongpeng, Engineer

1. Summary for FCC Part 22/24 Compliance Test Report

Date of receipt	2006-12-31
Testing completed	2007-01-15
The customer's contact person	Janne Ilkka
Test Plan referred to	T:\Projects\RM-245\TestPlan_RS\RS_Testplan_RM-245.xls
Notes	-
Document name	T:\Projects\RM-245\EMC\Results\FCC\Bej_FCC_0701_05.doc

1.1. EUT and Accessory Information

The EUT is a 4-band (GSM850/900/1800/1900) mobile phone with GPRS, EGPRS and Bluetooth. The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-245	004400/99/179558/2	5110	-	V 1. 1.010	50448
Battery	BL-5F	3635636434310501544;0670498	-	-	-	50451
AC-charger	AC-5	3943496443040500009;0675546	1.9	1.9	-	50520
Headset	HS-45	06946446433B1900475	-	-	-	50523
Audio adapter	AD-43	736	0.90	0.9	-	50524

1.2. Summary of Test Results

GSM 850:

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.6, 4.4	Conducted RF output power	-
§22.913(a)	4.6, 4.4	Radiated RF output power	PASSED
§2.1049(h)	4.4.1	99 % occupied bandwidth	-
§22.917(a)	4.7, 4.5	Band edge compliance	PASSED
§22.917(a), §2.1051	4.7, 4.5	Spurious emissions at antenna terminals	-
§22.917(a), §2.1053	4.7, 4.5	Spurious radiated emissions	-
§2.1055(a)	4.5, 4.3	Frequency stability, temperature variation	-
§2.1055(d)	4.5, 4.3	Frequency stability, voltage variation	-

GSM 1900:

Section in CFR 47	Section in RSS-133	Name of the test	Result
§2.1046(a)	6.2	Conducted RF output power	-
§24.232(b)	6.2	Radiated RF output power	PASSED
§2.1049(h)	5.6	99 % occupied bandwidth	-
§24.238(a)	6.3	Band edge compliance	PASSED
§24.238(a), §2.1051	6.3	Spurious emissions at antenna terminals	-
§24.238(a), §2.1053	6.3	Spurious radiated emissions	-
§2.1055(a)	7	Frequency stability, temperature variation	-
§2.1055(d)	7	Frequency stability, voltage variation	-

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Beijing Laboratory.

CONTENTS


1. Summary for FCC Part 22/24 Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Radiated RF output power (FCC §22.913(a), §24.232(b), RSS-GEN 4.6, RSS-132 4.4, RSS-133 6.2)	4
2.1. Test setup	4
2.2. Test method and limit	4
2.3. GSM 850 Test results	5
2.4. GSM 1900 Test results	6
3. Band edge compliance (FCC §22.917(a), 24.238(a), RSS-GEN 4.7, RSS-132 4.5, RSS-133 6.3)	8
3.1. Test setup	8
3.2. Test method and limit	8
3.3. GSM 850 Test results	9
3.4. GSM 1900 Test results	14
4. Test Equipment	19
4.1. Radiated measurements	19

2. Radiated RF output power

(FCC §22.913(a), §24.232(b), RSS-GEN 4.6, RSS-132 4.4, RSS-133 6.2)

EUT with DUT number	RM-245 (50448)
Accessories with DUT numbers	BL-5F (50451), AC-5 (50520), HS-45(50523), AD-43 (50524)
Operation Voltage [V] / [Hz]	220 / 50
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [mBar]	18 / 47 / 1019
Date of measurements	2007-01-12
Measured by	Yin Hongpeng

2.1. Test setup

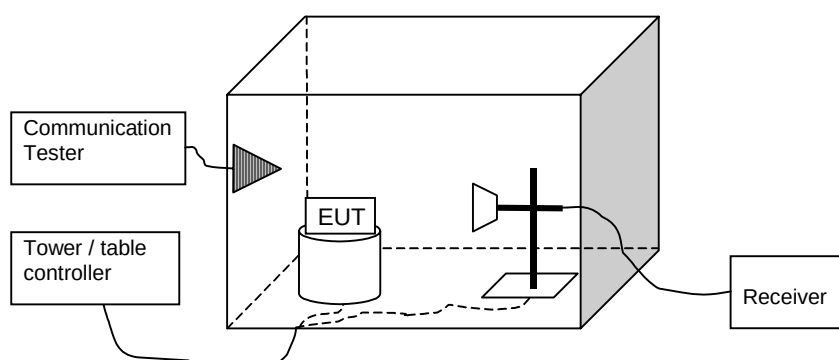

2.2. Test method and limit

The measurement is made according to TIA-603-B-2002 as follows:

The measurement is performed in the Anechoic Chamber with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system. The turntable is rotated 360 degrees and this is repeated for both horizontal and vertical receive antenna polarizations.

The EUT is placed on a nonconductive plate at 170 cm height.

The substitution method is used. Substitution values at each frequencies are measured beforehand and saved to the test software.

The substitution corrections are obtained as described below:

$$A_{SUBST} = P_{SUBST_TX} - P_{SUBST_RX} - L_{SUBST_CABLES} + G_{SUBST_TX_ANT}$$

Where A_{SUBST} is the final substitution correction including receive antenna gain. P_{SUBST_TX} is signal generator level, P_{SUBST_RX} is receiver level, L_{SUBST_CABLES} is cable losses including both TX and RX cables and $G_{SUBST_TX_ANT}$ is substitution antenna gain.

The measurement results are obtained as described below:

$$P [dBm] = P_{MEAS} + A_{TOT}$$

Where P_{MEAS} is receiver reading in dBm and A_{TOT} is total correction factor including cable loss and substitution correction ($A_{TOT} = L_{CABLES} + A_{SUBST}$).

Limits for radiated RF output power measurements

Frequency range [MHz]	Limit [W]	Limit [dBm]
824 - 849	7	38.5
1710 - 1755	2	33
1850 - 1910	2	33

2.3. GSM 850 Test results

2.3.1 Phone slide up

GSM mode

Channel / f_c [MHz]	ERP [dBm]	ERP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Result
128 / 824.2	18.80	0.076	-16.70	35.50	VERTICAL	PASSED
190 / 836.6	20.30	0.107	-14.90	35.20	VERTICAL	PASSED
251 / 848.8	21.20	0.132	-13.40	34.60	VERTICAL	PASSED

GPRS mode, 2 TX Slots

Channel / f_c [MHz]	ERP [dBm]	ERP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Result
128 / 824.2	17.30	0.054	-18.20	35.50	VERTICAL	PASSED
190 / 836.6	18.10	0.065	-17.10	35.20	VERTICAL	PASSED
251 / 848.8	18.00	0.063	-16.60	34.60	VERTICAL	PASSED

EGPRS mode, 2 TX Slot

Channel / f_c [MHz]	ERP [dBm]	ERP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Result
128 / 824.2	15.90	0.039	-19.60	35.50	VERTICAL	PASSED
190 / 836.6	18.50	0.071	-17.40	35.90	HORIZONTAL	PASSED
251 / 848.8	14.90	0.031	-21.10	36.00	HORIZONTAL	PASSED

2.3.2 Phone slide middle

GSM mode

Channel / f _c [MHz]	ERP [dBm]	ERP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
128 / 824.2	20.20	0.105	-15.30	35.50	VERTICAL	PASSED
190 / 836.6	21.20	0.132	-14.00	35.20	VERTICAL	PASSED
251 / 848.8	22.60	0.182	-12.00	34.60	VERTICAL	PASSED

GPRS mode, 2 TX Slots

Channel / f _c [MHz]	ERP [dBm]	ERP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
128 / 824.2	18.40	0.069	-17.10	35.50	VERTICAL	PASSED
190 / 836.6	19.20	0.083	-16.00	35.20	VERTICAL	PASSED
251 / 848.8	19.90	0.098	-14.70	34.60	VERTICAL	PASSED

EGPRS mode, 2 TX Slot

Channel / f _c [MHz]	ERP [dBm]	ERP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
128 / 824.2	14.50	0.028	-21.00	35.50	VERTICAL	PASSED
190 / 836.6	21.50	0.141	-14.40	35.90	HORIZONTAL	PASSED
251 / 848.8	16.80	0.048	-17.80	34.60	VERTICAL	PASSED

2.3.3 Phone slide down

GSM mode

Channel / f _c [MHz]	ERP [dBm]	ERP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
128 / 824.2	21.00	0.126	-14.50	35.50	VERTICAL	PASSED
190 / 836.6	22.00	0.158	-13.20	35.20	VERTICAL	PASSED
251 / 848.8	22.80	0.191	-11.80	34.60	VERTICAL	

GPRS mode, 2 TX Slots

Channel / f _c [MHz]	ERP [dBm]	ERP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
128 / 824.2	18.80	0.076	-16.70	35.50	VERTICAL	PASSED
190 / 836.6	20.20	0.105	-15.00	35.20	VERTICAL	PASSED
251 / 848.8	20.80	0.120	-13.80	34.60	VERTICAL	PASSED

EGPRS mode, 2 TX Slot

Channel / f _c [MHz]	ERP [dBm]	ERP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
128 / 824.2	16.40	0.044	-19.10	35.50	VERTICAL	PASSED
190 / 836.6	17.60	0.058	-17.60	35.20	VERTICAL	PASSED
251 / 848.8	15.40	0.035	-19.20	34.60	VERTICAL	PASSED

2.4. GSM 1900 Test results

2.4.1 Phone slide up

GSM mode

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
512 / 1850.2	30.20	1.047	-18.70	48.90	HORIZONTAL	PASSED
661 / 1880.0	28.90	0.776	-18.60	47.50	HORIZONTAL	PASSED
810 / 1909.8	29.30	0.851	-19.00	48.30	VERTICAL	PASSED

GPRS mode, 2 TX Slots

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
512 / 1850.2	29.10	0.813	-19.80	48.90	HORIZONTAL	PASSED
661 / 1880.0	27.40	0.550	-20.10	47.50	HORIZONTAL	PASSED
810 / 1909.8	28.10	0.646	-20.20	48.30	HORIZONTAL	PASSED

EGPRS mode, 2 TX Slots

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
512 / 1850.2	25.00	0.316	-23.90	48.90	HORIZONTAL	PASSED
661 / 1880.0	22.90	0.195	-24.60	47.50	HORIZONTAL	PASSED
810 / 1909.8	24.30	0.269	-24.00	48.30	HORIZONTAL	PASSED

2.4.2 Phone slide middle

GSM mode

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
512 / 1850.2	30.80	1.202	-17.50	48.30	VERTICAL	PASSED
661 / 1880.0	32.20	1.660	-17.20	49.40	VERTICAL	PASSED
810 / 1909.8	31.00	1.259	-17.30	48.30	VERTICAL	PASSED

GPRS mode, 2 TX Slots

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
512 / 1850.2	28.30	0.676	-20.60	48.90	HORIZONTAL	PASSED
661 / 1880.0	29.60	0.912	-19.80	49.40	VERTICAL	PASSED
810 / 1909.8	29.10	0.813	-19.20	48.30	HORIZONTAL	PASSED

EGPRS mode, 2 TX Slot

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
512 / 1850.2	23.80	0.240	-24.50	48.30	VERTICAL	PASSED
661 / 1880.0	26.40	0.437	-21.10	47.50	HORIZONTAL	PASSED
810 / 1909.8	27.70	0.589	-20.60	48.30	VERTICAL	PASSED

2.4.3 Phone slide down

GSM mode

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
512 / 1850.2	31.40	1.380	-17.50	48.90	HORIZONTAL	PASSED
661 / 1880.0	32.10	1.622	-17.30	49.40	VERTICAL	PASSED
810 / 1909.8	30.50	1.122	-17.80	48.30	VERTICAL	PASSED

GPRS mode, 2 TX Slots

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
512 / 1850.2	28.50	0.708	-20.40	48.90	HORIZONTAL	PASSED
661 / 1880.0	30.10	1.023	-19.30	49.40	VERTICAL	PASSED
810 / 1909.8	28.70	0.741	-19.60	48.30	VERTICAL	PASSED

EGPRS mode, 2 TX Slot


Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
512 / 1850.2	24.10	0.257	-24.80	48.90	HORIZONTAL	PASSED
661 / 1880.0	25.70	0.372	-21.80	47.50	HORIZONTAL	PASSED
810 / 1909.8	25.20	0.331	-23.10	48.30	VERTICAL	PASSED

3. Band edge compliance

(FCC §22.917(a), 24.238(a), RSS-GEN 4.7, RSS-132 4.5, RSS-133 6.3)

EUT with DUT number	RM-245 (50448)
Accessories with DUT numbers	BL-5F (50451), AC-5 (50520), HS-45(50523), AD-43 (50524)
Operation Voltage [V] / [Hz]	220 / 50
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [mBar]	18 / 59 / 1019
Date of measurements	2007-01-05
Measured by	Yin Hongpeng

3.1. Test setup

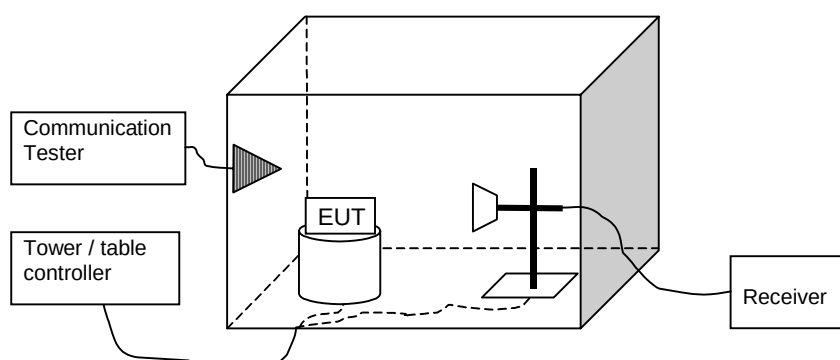

3.2. Test method and limit

The measurement is made according to FCC rules part 22 and 24 and IC standards RSS-GEN, RSS-132 and RSS-133.

Limits for band edge compliance measurements


Operation band	Frequency range [MHz]	Limit [dBm]
GSM 850 / WCDMA 850	Below 824 and above 849	-13
WCDMA 1700	Below 1710 and above 1755	-13
GSM 1900 / WCDMA 1900	Below 1850 and above 1910	-13

3.3. GSM 850 Test results


3.3.1 Phone slide up

Operation mode (TX on)	Channel / f_c [MHz]	Level [dBm]
GSM	128 / 824.2	-26.73
GSM	251 / 848.8	-24.47
EGPRS	128 / 824.2	-31.26
EGPRS	251 / 848.8	-34.83


GSM mode, channel 128 / 824.2 MHz (Peak detector, RBW: 3 kHz)

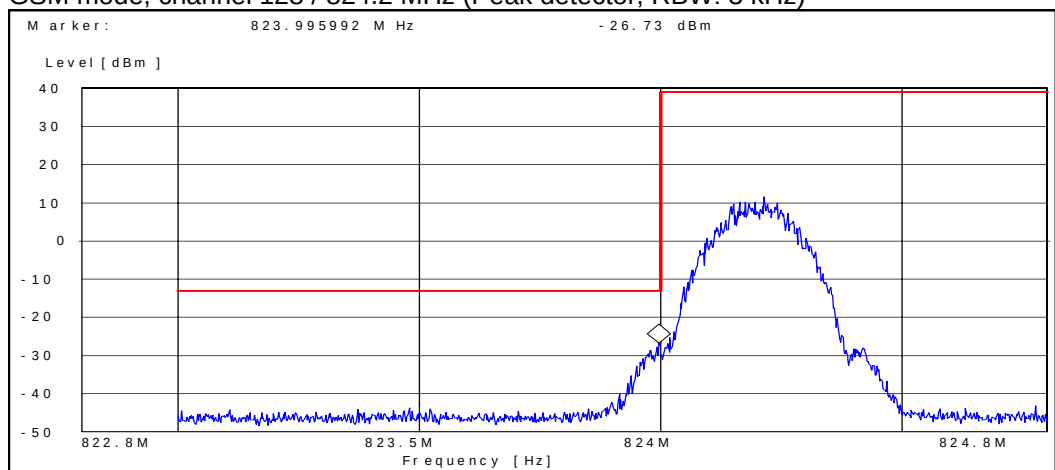


GSM mode, channel 251 / 848.8 MHz (Peak detector, RBW: 3 kHz)

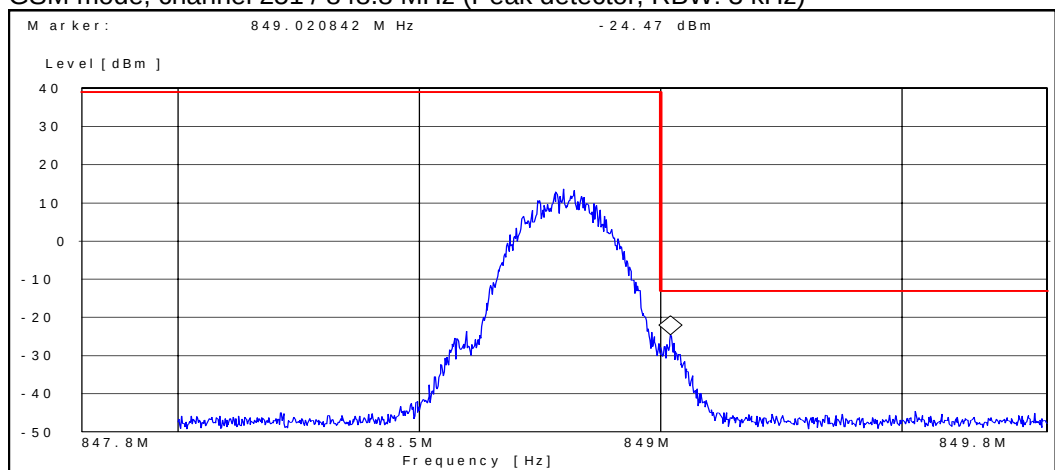

EGPRS mode, channel 128 / 824.2 MHz (Peak detector, RBW: 3 kHz)

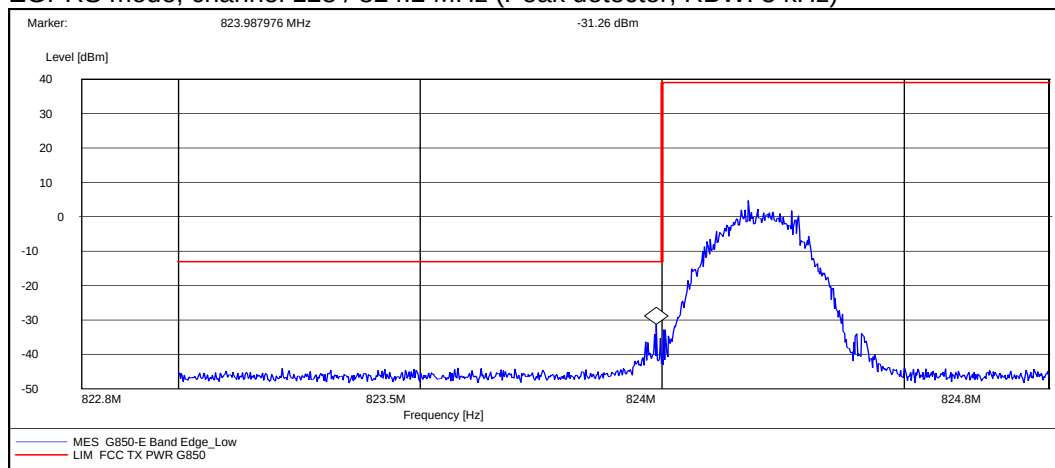


EGPRS mode, channel 251 / 848.8 MHz (Peak detector, RBW: 3 kHz)

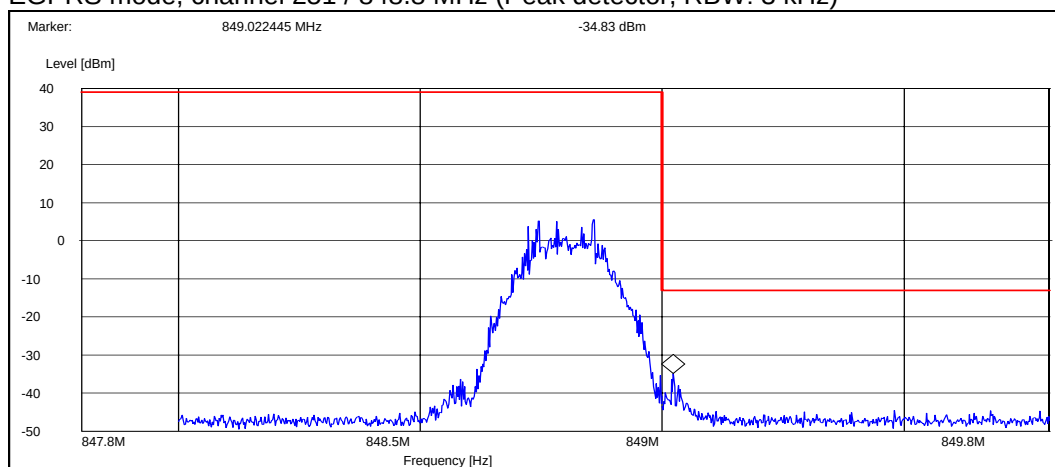


3.3.2 Phone slide middle

Operation mode (TX on)	Channel / f_c [MHz]	Level [dBm]
GSM	128 / 824.2	-24.93
GSM	251 / 848.8	-24.49
EGPRS	128 / 824.2	-30.52
EGPRS	251 / 848.8	-33.49


GSM mode, channel 128 / 824.2 MHz (Peak detector, RBW: 3 kHz)

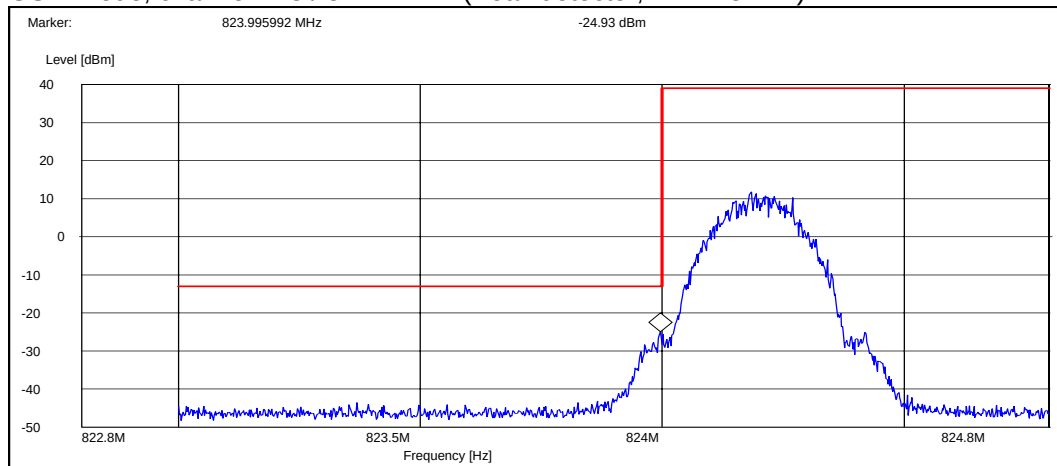


GSM mode, channel 251 / 848.8 MHz (Peak detector, RBW: 3 kHz)

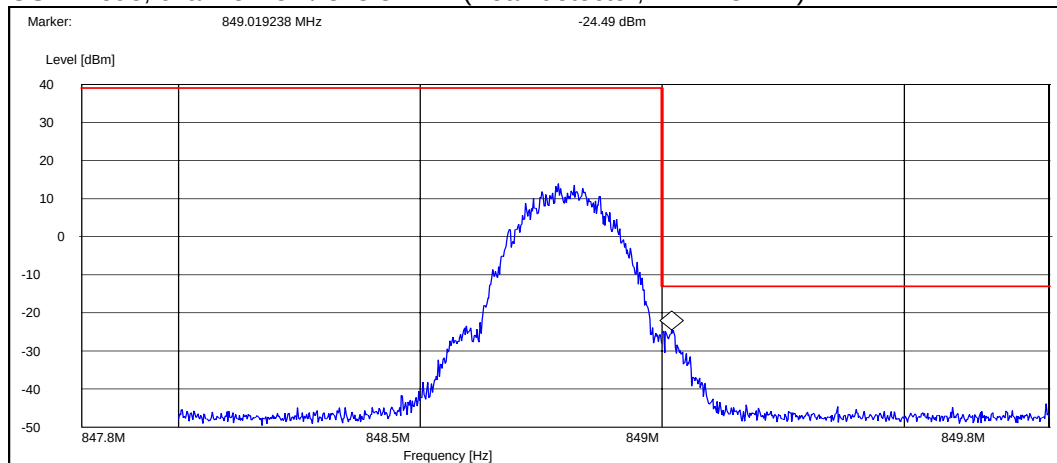

EGPRS mode, channel 128 / 824.2 MHz (Peak detector, RBW: 3 kHz)

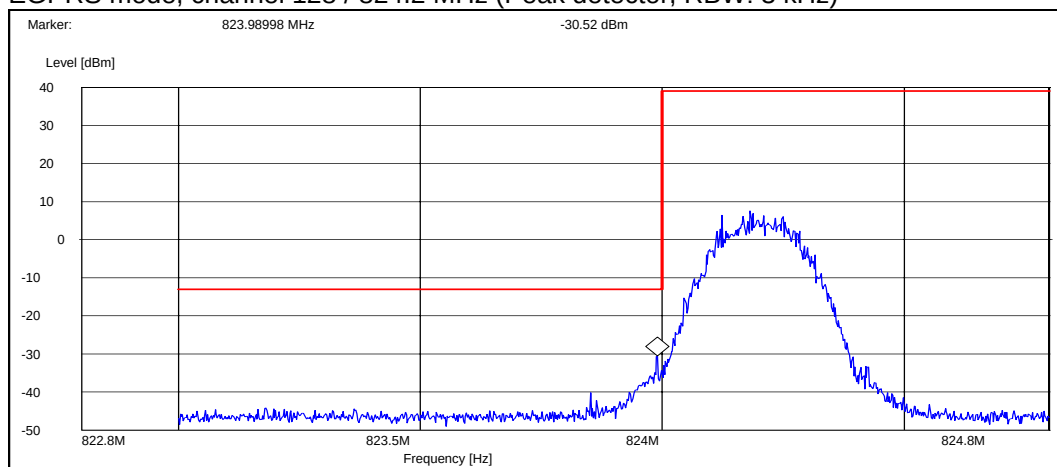


EGPRS mode, channel 251 / 848.8 MHz (Peak detector, RBW: 3 kHz)

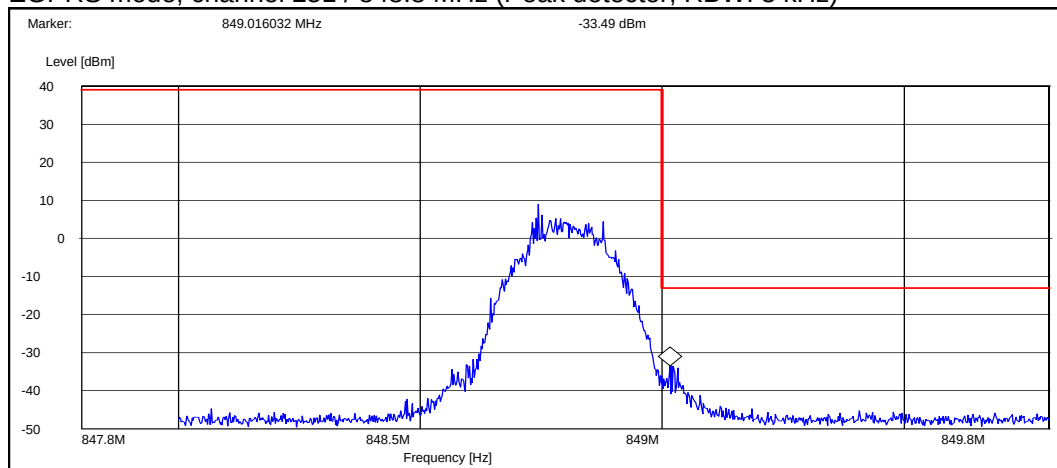


3.3.3 Phone slide down

Operation mode (TX on)	Channel / f_c [MHz]	Level [dBm]
GSM	128 / 824.2	-22.21
GSM	251 / 848.8	-24.09
EGPRS	128 / 824.2	-30.26
EGPRS	251 / 848.8	-30.48


GSM mode, channel 128 / 824.2 MHz (Peak detector, RBW: 3 kHz)

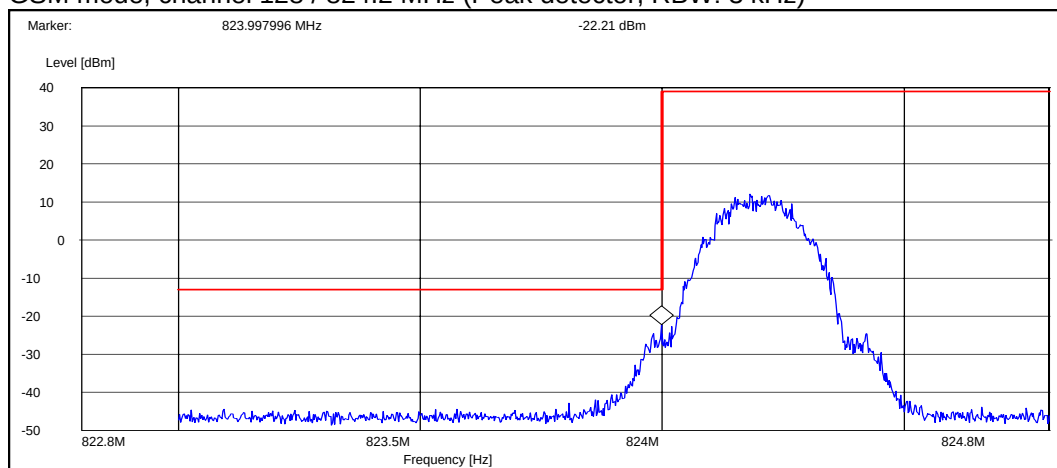


GSM mode, channel 251 / 848.8 MHz (Peak detector, RBW: 3 kHz)

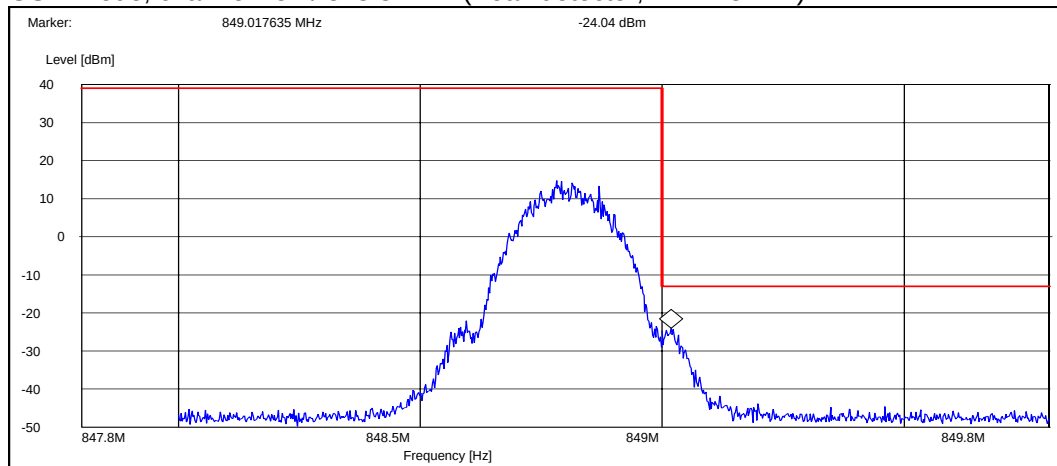

EGPRS mode, channel 128 / 824.2 MHz (Peak detector, RBW: 3 kHz)

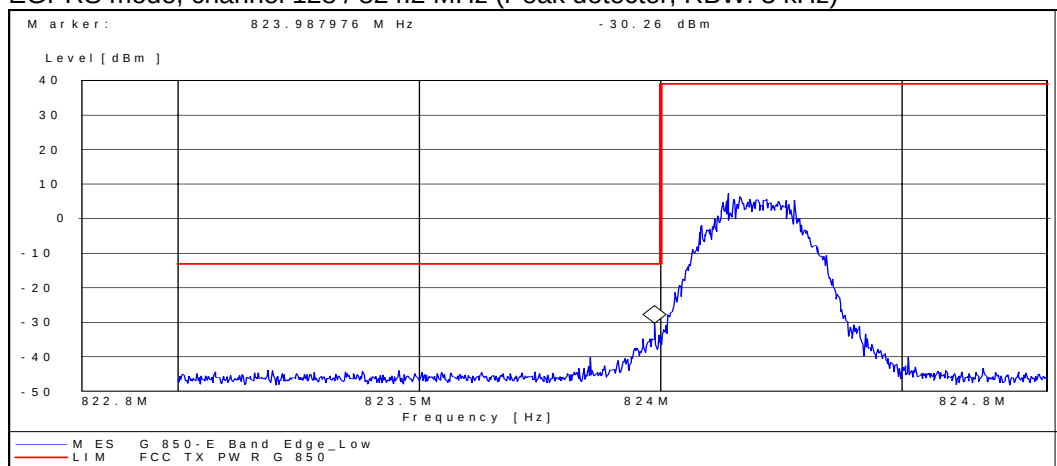

EGPRS mode, channel 251 / 848.8 MHz (Peak detector, RBW: 3 kHz)

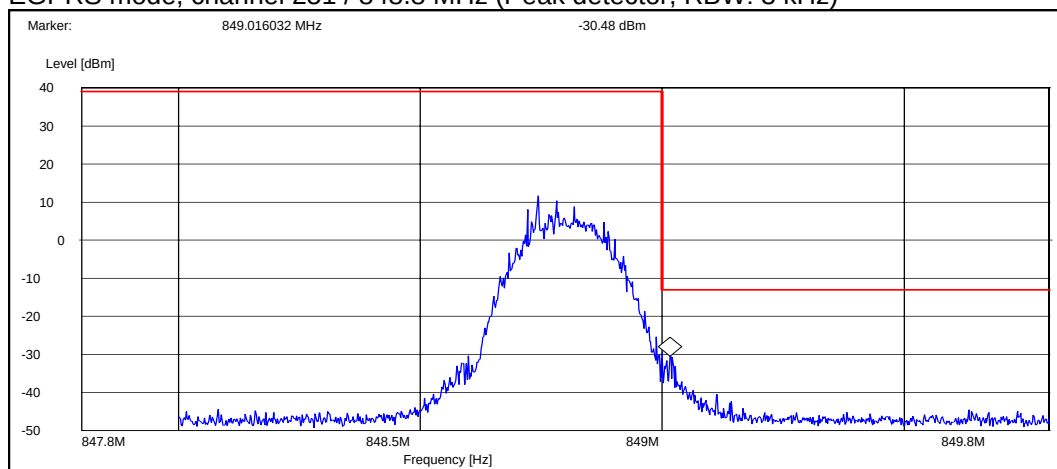


3.4. GSM 1900 Test results


3.4.1 Phone slide up

Operation mode (TX on)	Channel / f_c [MHz]	Level [dBm]
GSM	512 / 1850.2	-14.40
GSM	810 / 1909.8	-14.26
EGPRS	512 / 1850.2	-23.24
EGPRS	810 / 1909.8	-27.07


GSM mode, channel 512 / 1850.2 MHz (Peak detector, RBW: 3 kHz)

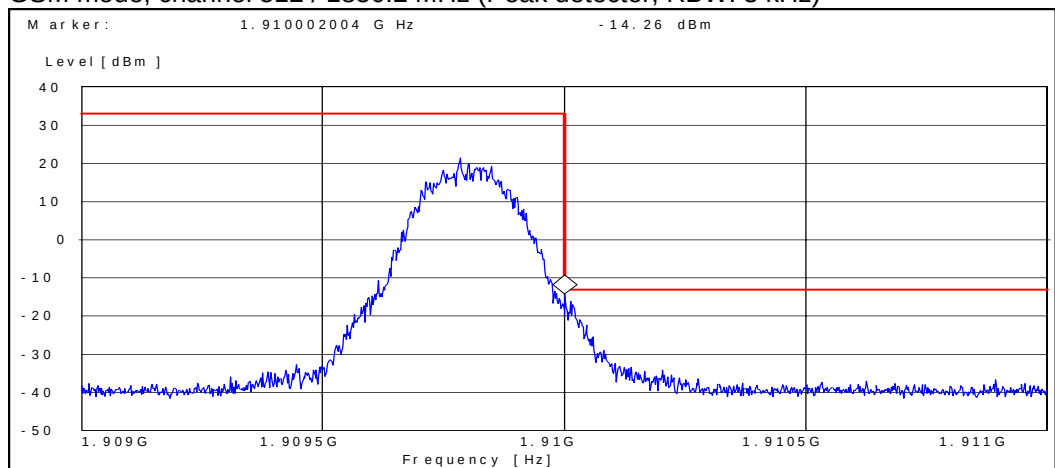


GSM mode, channel 810 / 1909.8 MHz (Peak detector, RBW: 3 kHz)

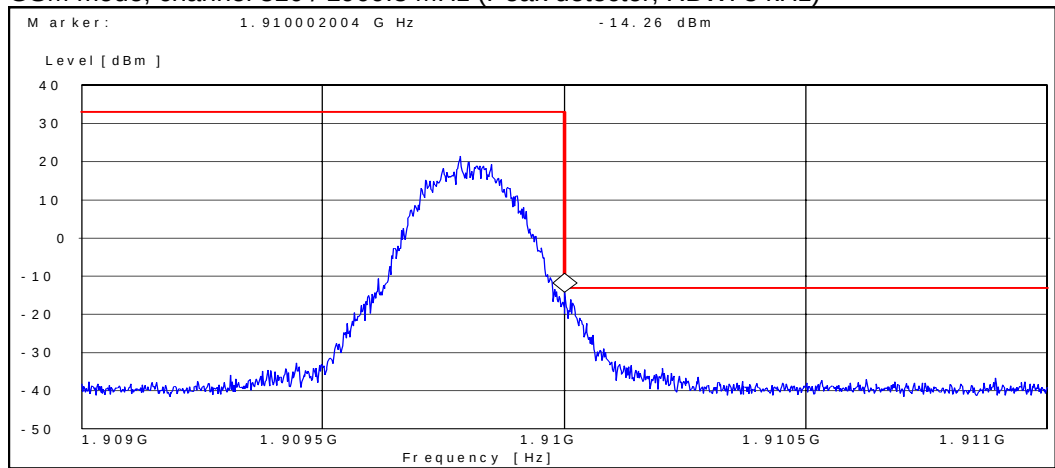

EGPRS mode, channel 512 / 1850.2 MHz (Peak detector, RBW: 3 kHz)

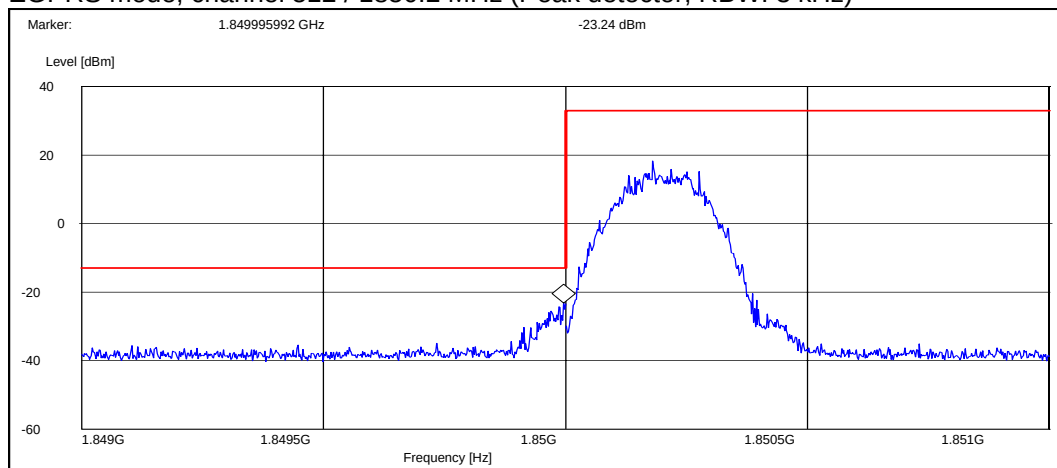


EGPRS mode, channel 810 / 1909.8 MHz (Peak detector, RBW: 3 kHz)

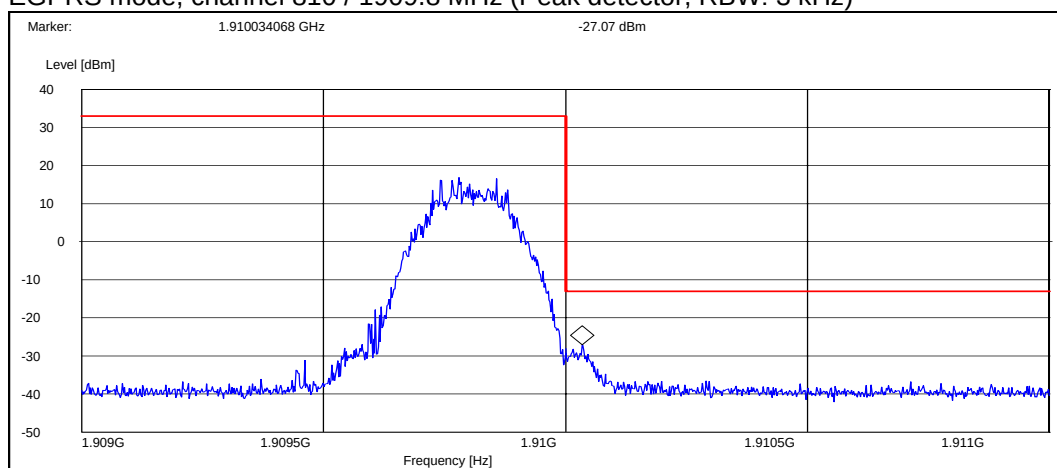


3.4.2 Phone slide middle

Operation mode (TX on)	Channel / f_c [MHz]	Level [dBm]
GSM	512 / 1850.2	-15.53
GSM	810 / 1909.8	-14.02
EGPRS	512 / 1850.2	-20.92
EGPRS	810 / 1909.8	-19.57


GSM mode, channel 512 / 1850.2 MHz (Peak detector, RBW: 3 kHz)

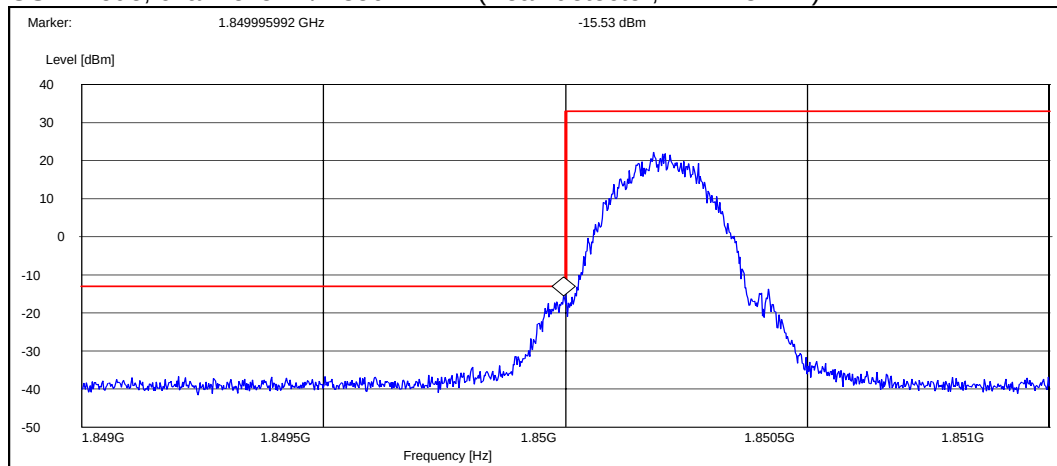


GSM mode, channel 810 / 1909.8 MHz (Peak detector, RBW: 3 kHz)

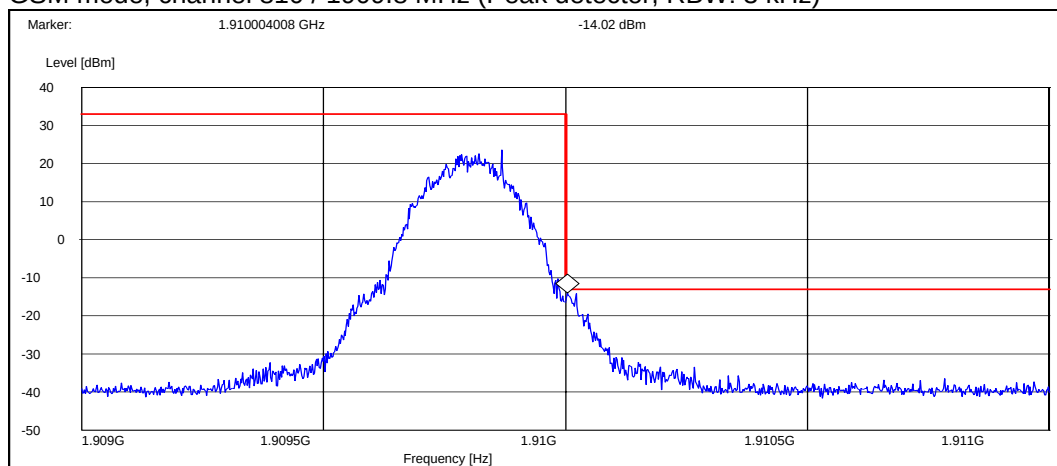

EGPRS mode, channel 512 / 1850.2 MHz (Peak detector, RBW: 3 kHz)

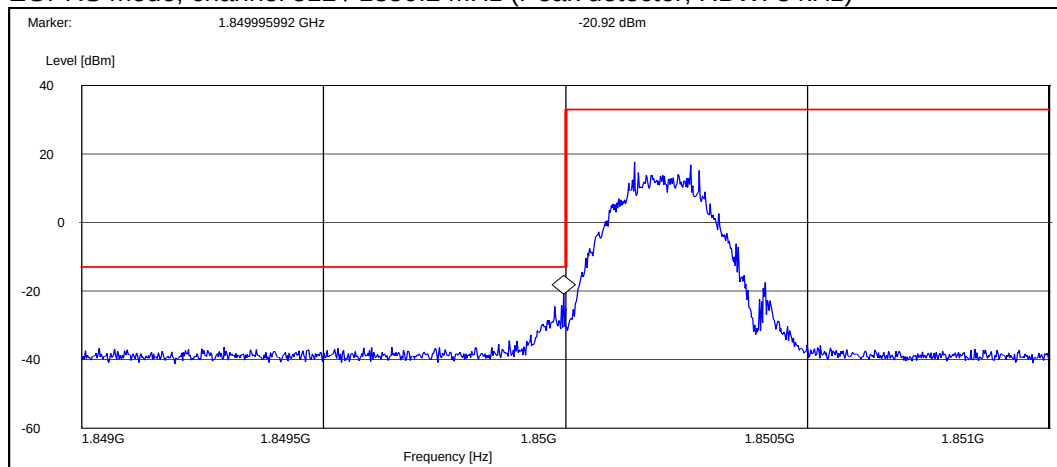


EGPRS mode, channel 810 / 1909.8 MHz (Peak detector, RBW: 3 kHz)

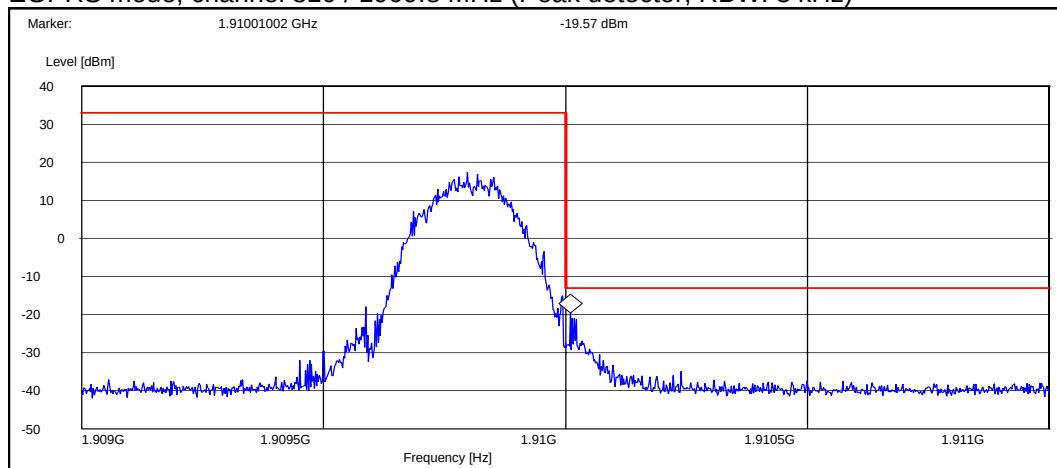


3.4.3 Phone slide down

Operation mode (TX on)	Channel / f_c [MHz]	Level [dBm]
GSM	512 / 1850.2	-15.17
GSM	810 / 1909.8	-15.35
EGPRS	512 / 1850.2	-21.12
EGPRS	810 / 1909.8	-18.20


GSM mode, channel 512 / 1850.2 MHz (Peak detector, RBW: 3 kHz)

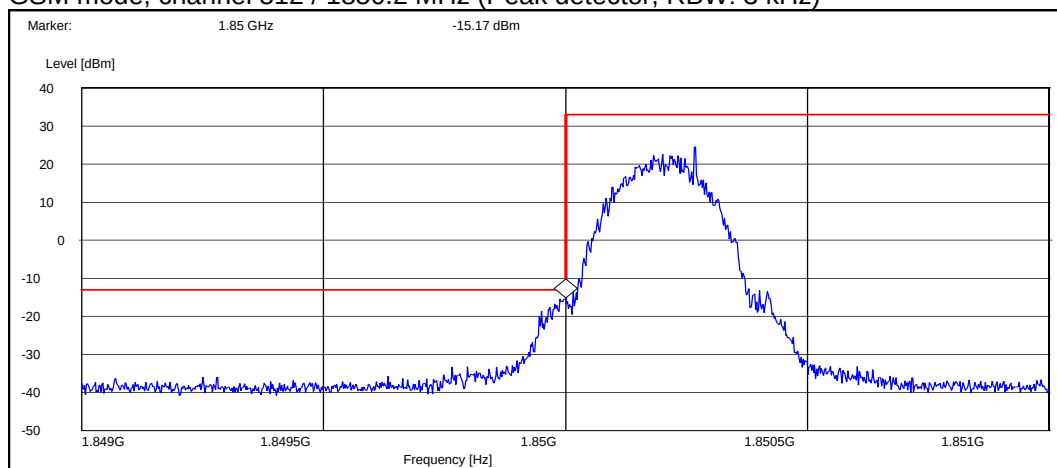


GSM mode, channel 810 / 1909.8 MHz (Peak detector, RBW: 3 kHz)

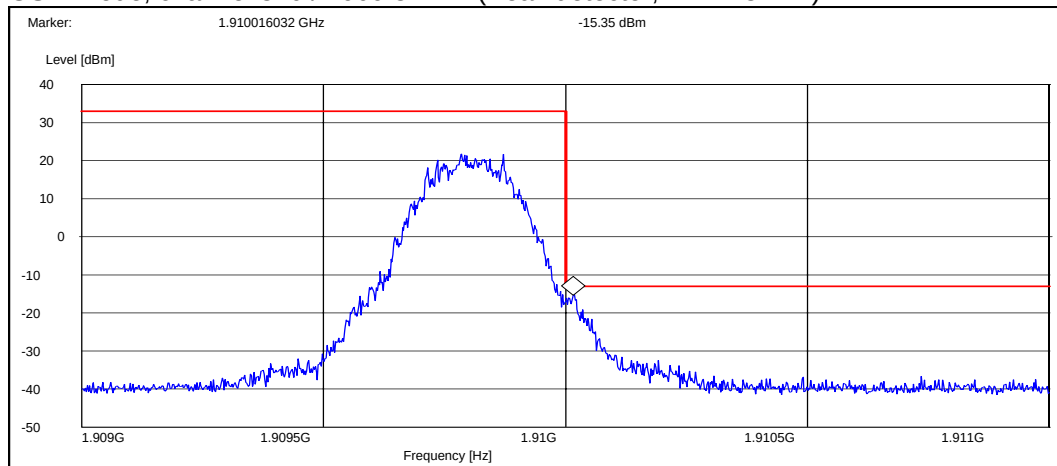

EGPRS mode, channel 512 / 1850.2 MHz (Peak detector, RBW: 3 kHz)

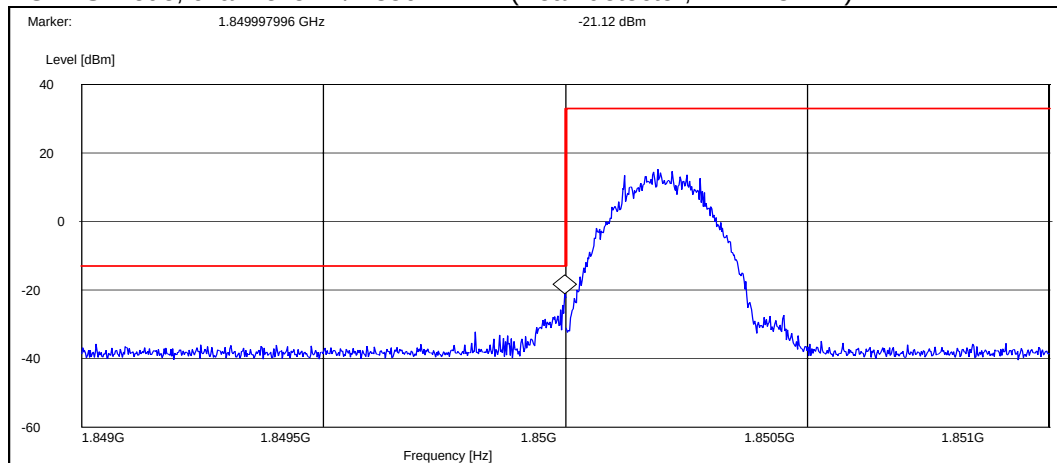

EGPRS mode, channel 810 / 1909.8 MHz (Peak detector, RBW: 3 kHz)

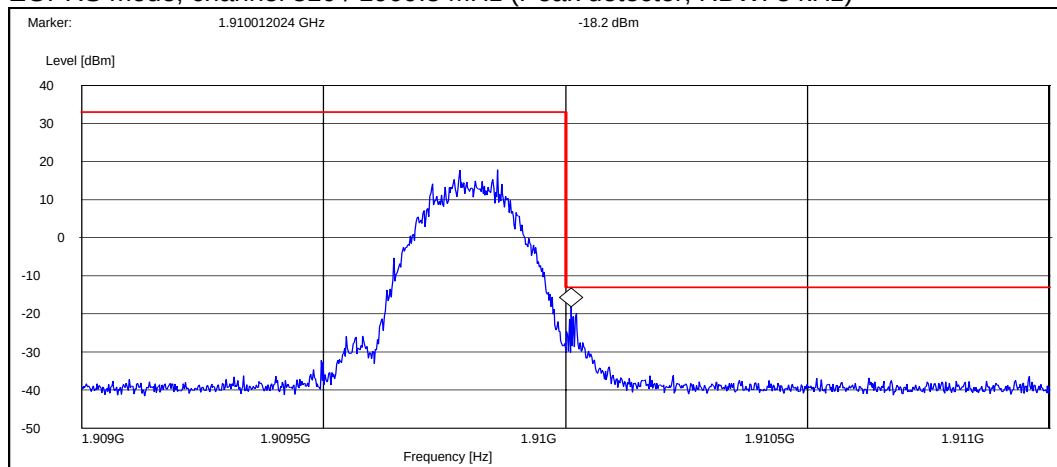

4. Test Equipment

4.1. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
BJPCPT0129	Relay Unit	TS-RSP	Rohde&Schwarz	22/24
BJPCPT0130	Relay Unit	TS-RSP	Rohde&Schwarz	22/24
BJPCPT0080	Device Controller	EMCO2090	ETS-EMCO	22/24
BJPCTC0048	RF Preamplifier 10MHz-3GHz (Metal chassis)	AFS4-00100300-10-10P-4	MITEQ	22/24
BJPCTC0007	Ultra Broadband Antenna 30MHz-3000MHz	HL562	Rohde&Schwarz	22/24
BJPCPT0162	Horn Antenna 1GHz-18GHz	HF906	Rohde&Schwarz	22/24
BJPCTC0029	Horn Antenna 1GHz-18GHz	HF906	Rohde&Schwarz	22/24
BJPCTC0049	RF preamplifier 3GHz-18GHz	BLMA-0118-1A-BT	Rohde&Schwarz	22/24
BJPCTC0046	Shielding Enclosure	3M Test Site	ETS-Lindgren	22/24
BJPCTC0047	Turntable	Model 2088-1.23	ETS-EMCO	22/24
BJPCPT0072	EMI Test Receiver 20Hz-26.5GHz	ESIB26	Rohde&Schwarz	22/24
BJPCPT0150	High Pass filter	WHKS 1200-10SS	Wainwright instruments	22/24
BJPCTC0034	Notch Filter	WRCT800/880-0.2/40- 5SSK	Wainwright instruments	22/24
BJPCPT0151	Notch Filter	WRCD1800/2000-0.2/40- 5SSK	Wainwright instruments	22/24
BJPCTC0017	Radio Communication Tester	CMU200	Rohde&Schwarz	22/24