

FCC Part 15C

Measurement And Test Report For

SK Mtek microelectronics (shenzhen) limited.

12/F, Microprofit B.D. South 6 Road, High-Tech Industrial Park, Nanshan District,
Shenzhen, China

FCC ID: PDT-SK3732-T720

September 17, 2012

This Report Concerns: ☒ Original Report	Equipment Type: Tablet PC
Report Number:	MTI120910002RF-2
Test Engineer:	Bill Chen
Reviewed By:	Jason zheng
Approved & Authorized By:	Hebe Lee
Test Date:	September 10- September 16,2012
Prepared By:	MTI Technology Laboratory Ltd. 10F, Yinxing Business Hotel, Xixiang Road, Bao'an District, Shenzhen, P,R.China. Tel: +86-755-8885 0135 Fax: +86-755-8885 0136



Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior written consent of MTI Technology Laboratory Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 RELATED SUBMITTAL(S) / GRANT (S).....	4
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
2. SYSTEM TEST CONFIGURATION	6
2.1 EUT CONFIGURATION	6
2.2 EUT EXERCISE.....	6
2.3 GENERAL TEST PROCEDURES	6
2.4 LIST OF MEASURING EQUIPMENTS USED	7
2.5 TEST CONDUCTION	8
2.6 TEST PERIPHERAL INFORMATION	8
3. SUMMARY OF TEST RESULTS	9
4. ANTENNA REQUIREMENT	10
4.1 STANDARD APPLICABLE	10
4.2 ANTENNA CONNECTED CONSTRUCTION.....	10
5. CONDUCTED DISTURBANCES.....	11
5.1. MEASUREMENT UNCERTAINTY	11
5.2. LIMIT OF CONDUCTED DISTURBANCES (CLASS B).....	11
5.3. EUT SETUP	11
5.4. INSTRUMENT SETUP	11
5.5. TEST PROCEDURE	12
5.6. SUMMARY OF TEST RESULTS	12
5.7. TEST RESULT	12
6. NUMBER OF HOPPING CHANNELS AND CHANNEL SPACING	15
6.1 STANDARD APPLICABLE	15
6.2 EUT SETUP	15
6.3 TEST EQUIPMENT LIST AND DETAILS	15
6.4 TEST PROCEDURE	15
6.5 TEST RESULT	15
7. DWELL TIME OF A HOPPING CHANNEL	19
7.1 LIMITS OF DWELL TIME MEASUREMENT	19
7.2 EUT SETUP	19
7.3 TEST EQUIPMENT LIST AND DETAILS	19
7.4 TEST PROCEDURE	19
7.5 TEST RESULT /PLOTS	19
8. 20-DB BANDWIDTH	30
8.1 LIMITS OF 20-DB BANDWIDTH MEASUREMENT	30
8.2 EUT SETUP	30
8.3 TEST EQUIPMENT LIST AND DETAILS	30
8.4 TEST PROCEDURE	30
8.5 TEST RESULT /PLOTS	30
9. PEAK POWER	34
9.1 LIMITS OF POWER MEASUREMENT	34
9.2 TEST EQUIPMENT LIST AND DETAILS	34
9.3 TEST PROCEDURE	34
9.4 TEST RESULT OF PEAK POWER	34
10. FIELD STRENGTH OF SPURIOUS EMISSIONS	35
10.1 LIMITS OF RADIATED EMISSION MEASUREMENT	35
10.2 EUT SETUP	35
10.3 TEST EQUIPMENT LIST AND DETAILS	36
10.4 TEST PROCEDURE	36

10.5 TEST RESULT	36
11. BAND EDGES MEASUREMENT	43
11.1 LIMITS OF BAND EDGES MEASUREMENT	43
11.2 TEST EQUIPMENT LIST AND DETAILS	43
11.3 TEST PROCEDURE	43
11.4 TEST RESULT	43

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Applicant:	SK Mtek microeletronics (shenzhen) limited
Address of applicant:	12/F, Microprofit B.D. South 6 Road, High Industrial Park, Nanshan District, Shenzhen, China
Manufacturer:	SK Mtek microeletronics (shenzhen) limited
Address of manufacturer:	12/F, Microprofit B.D. South 6 Road, High Industrial Park, Nanshan D
Equipment Under Test:	Tablet PC
Trade Name:	Clear
Tested Model No.:	T720
Radio Technology:	Bluetooth 2.1+EDR
Type of Modulation:	GFSK, $\pi/4$ DQPSK, 8-DPSK
Frequency Band:	2402 MHz ~ 2480MHz
Number of Channels:	79
Channel Separation:	1MHz
Max. output power:	-6~4 dBm
Type of Antenna:	Integral Antenna, Max Gain 0dBi
Power Supply:	DC 5V Form adapter with 120V/60Hz
Adapter:	Manufacturer: GENESIS Model: KSAS0100500200HU

Remark: * The test data gathered are from the production sample provided by the manufacturer.

1.2 Related Submittal(s) / Grant (s)

This submittal(s) is a test report based on the Electromagnetic Interference (EMI) tests performed on the EUT. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4 - 2003.

The tests were performed in order to determine compliance with FCC Part 15:2010, Subpart C, and section 15.203, 15.207, and 15.247 rules.

1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 - 2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Test Facility

All measurement required was performed at laboratory of NTEK Testing Technology Co., Ltd., at 1/F, Building E, Fenda Science Park Sanwei Community, Xixiang Street, Baoan District , Shenzhen,Guangdong

The test facility is recognized, certified, or accredited by the following organizations:

FCC – Registration No.: 238937

NTEK Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 238937.

2. SYSTEM TEST CONFIGURATION

The tests documented in this report were performed in accordance with ANSI C63.4-2003 and FCC CFR 47 Part 15 Subpart C.

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 3 or 10 meters from the leading edge of the turntable.

2.3 General Test Procedures

Conducted Emissions The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 7.1 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak detector mode.


Radiated Emissions The EUT is placed on a turntable, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4-2003.

2.4 List of Measuring Equipments Used


Items	Equipment	Manufacturer	Model No.	Serial No.	Last Cal	Calibration Period
1	EMI Test Receiver	ROHDE & SCHWARZ	ESI 26	100079	2011/11/08	1 year
2	Horn Antenna	R/S	CH14-H052	1091698	2011/11/08	1 year
3	3m Semi-Anechoic Chamber	ETS	N/A	N/A	2011/11/08	1 year
4	LISN	ROHDE&SCHWARZ	ESH3-Z5	100305	2011/11/08	1 year
5	Pulse Limiter	ROHDE&SCHWARZ	ESH3-Z2	100305	2011/11/08	1 year
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCS30	100038	2011/11/08	1 year
2	EMI Test Receiver	ROHDE & SCHWARZ	ESI 26	100009	2011/11/08	1 year
3	Receiver/ Spectrum Analyzer	ROHDE & SCHWARZ	ESCI	100106	2011/11/08	1 year
4	Spectrum Analyzer	Agilent	E7405A	US41160415	2011/11/08	1 year
5	Artificial Mains	ROHDE & SCHWARZ	ESH2-Z5	100028	2011/11/08	1 year
6	Pulse Limiter	ROHDE & SCHWARZ	ESHSZ2	100044	2011/11/08	1 year
7	LISN	COM Power	LI-200	12212	2011/11/08	1 year
8	LISN	COM Power	LI-200	12019	2011/11/08	1 year
9	3m/5m Semi-Anechoic Chamber	ETS	N/A	N/A	2011/11/08	1 year
10	Ultra-Broadband Antenna	R/S	HL562	100015	2011/11/08	1 year
11	Horn Antenna	R/S	HF906	100039	2011/11/08	1 year
12	Loop Antenna	R&S	FMZB1516	1516131	2011/11/08	1Year
13	Bilog Antenna	Sunol	JB3	A121206	2011/11/08	1Year
14	RF Test Panel	R/S	TS / RSP	335015/0017	N/A	N/A
15	Turntable	ETS	2088	2149	N/A	N/A
16	Antenna Mast	ETS	2075	2346	N/A	N/A

2.5 Test conduction

For TX mode:



For copy data:



2.6 Test Peripheral Information

Items	Equipment	Manufacturer	Model No.
1	Notebook	Acer	4552G

3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
15.203/15.247(b)/(c)	Antenna Requirement	Pass
15.207	Conduction Emission	Pass
15.247(a)(1)(iii)	Quantity of Hopping Channel	Pass
15.247(a)(1)	Channel Separation	Pass
15.247(a)(1)(iii)	Time of Occupancy (Dwell time)	Pass
15.247(a)	20dB Bandwidth	Pass
15.247(b)(1)	Power Output	Pass
15.209(a)(f)	Radiated Emission	Pass
15.247(c)	Band edge	Pass

4. ANTENNA REQUIREMENT

4.1 Standard Applicable

Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Section 15.247(b)/(c):

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

If the intentional radiator is used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

4.2 Antenna Connected Construction

This product has a integral antenna, The maximum Gain of the antenna is 0dBi.
fulfill the requirement of this section.

5. CONDUCTED DISTURBANCES

5.1. Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is +2.4 dB.

5.2. Limit of Conducted Disturbances (Class B)

Frequency Range (MHz)	Limits (dBuV)	
	Quasi-Peak	Average
0.150~0.500	66~56	56~46
0.500~5.000	56	46
5.000~30.00	60	50

Note: (1) The tighter limit shall apply at the edge between two frequency bands.

5.3. EUT Setup

The setup of EUT is according with CISPR 16-1: 2002, CISPR16-2: 2002 measurement procedure.

The EUT was placed center and the back edge of the test table.

The cables were draped along the test table and bundled to 30-40cm in the middle.

The spacing between the peripherals was 10 cm.

Maximum emission emitted from EUT was determined by manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation and the levels in the final result of the test were recorded with the EUT running in the operating mode that maximum emission was emitted.

5.4. Instrument Setup

The test receiver was set with the following configurations:

Test Receiver Setting:

Frequency Range.....150 KHz to 30 MHz

Detector.....Peak & Quasi-Peak & Average

Sweep Speed.....Auto

IF Band Width.....9 KHz

5.5. Test Procedure

During the conducted emission test, the EUT power cord was connected to the auxiliary outlet of the first Artificial Mains.

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance using all installation combination.

All data was recorded in the peak detection mode. Quasi-peak and Average readings were only performed when an emission was found to be marginal (within -10 dB μ V of specification limits). Quasi-peak readings are distinguished with a "**QP**". Average readings are distinguished with a "**AV**".

5.6. Summary of Test Results

According to the data in section 3.6, the worst margin reading of:

EUT Configuration on Test

Tablet PC

Model Number : T720

Serial Number : N/A

Applicant : SK Mtek microeletronics (shenzhen) limited.

5.7. Test Result

Detailed information, Please refer to the following pages.

According to the data in section 3.8, the EUT complied with the FCC 15B Conducted margin for a Class B device, with the worst margin reading of:

-10.95 dB μ V at 2.5 MHz in the Line mode, Peak detector, 0.15-30MHz

Plot of Conducted Emissions Test Data

Conducted Disturbance


EUT: Tablet PC

M/N: T720

Operating Condition: Charge

Test Specification: L

Comment: AC 120V/60Hz connect to Adapter

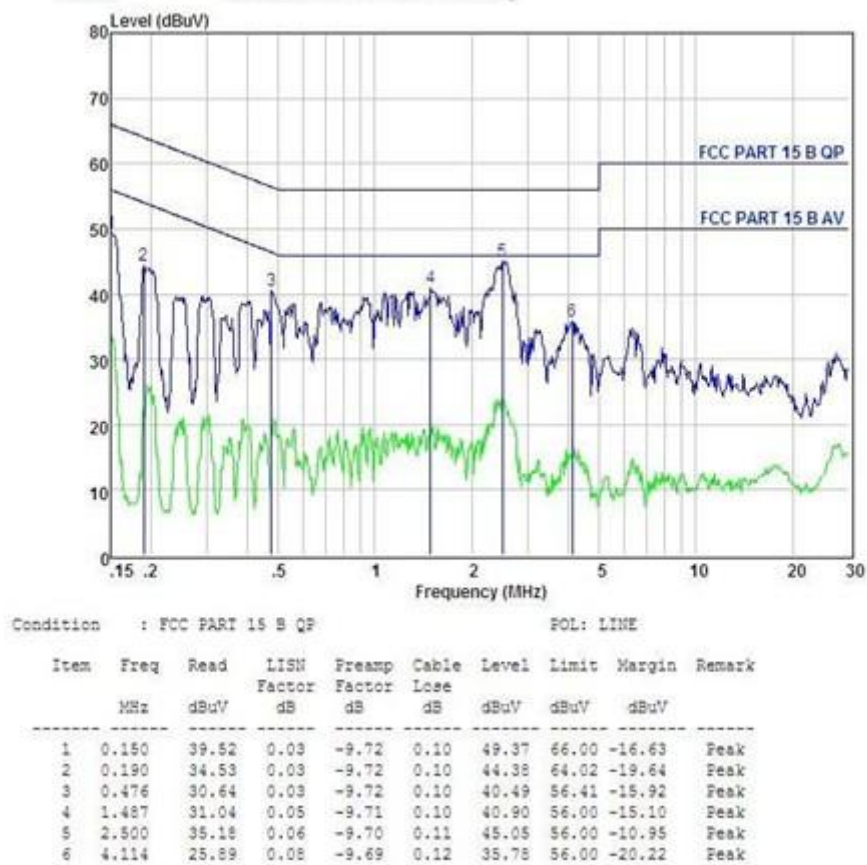

Plot of Conducted Emissions Test Data

Conducted Disturbance


EUT: Tablet PC

M/N: T720

Operating Condition: Charge

Test Specification: N

Comment: AC 120V/60Hz connect to Adapter

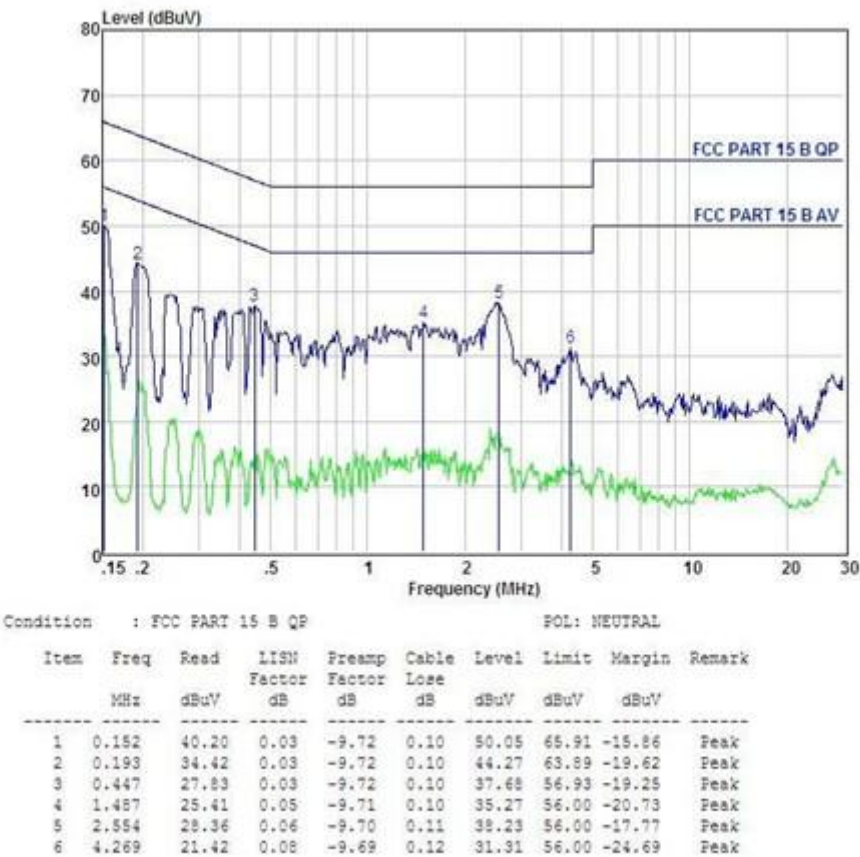


6. NUMBER OF HOPPING CHANNELS AND CHANNEL SPACING

6.1 Standard Applicable

According to FCC 15.247(a)(1), frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, and frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

6.2 EUT Setup

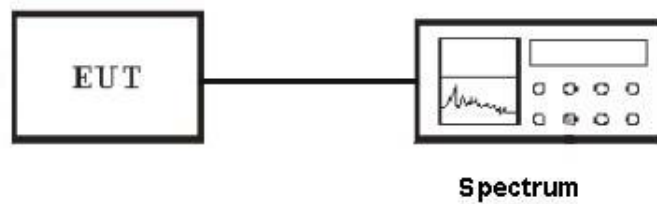

6.3 Test Equipment List and Details

See section 2.4.

6.4 Test Procedure



Set the Lowest channel to the Highest Channel, observed the band of 2400MHz to 2438.5MHz, than count it out the number of channels for comparing with the FCC rules. Adjust channel spacing can be read by adjusting the Analyzer SPAN.

6.5 Test Result


PASS

Detailed information, Please refer to the following pages.

For GFSK:
No. of Channel=79

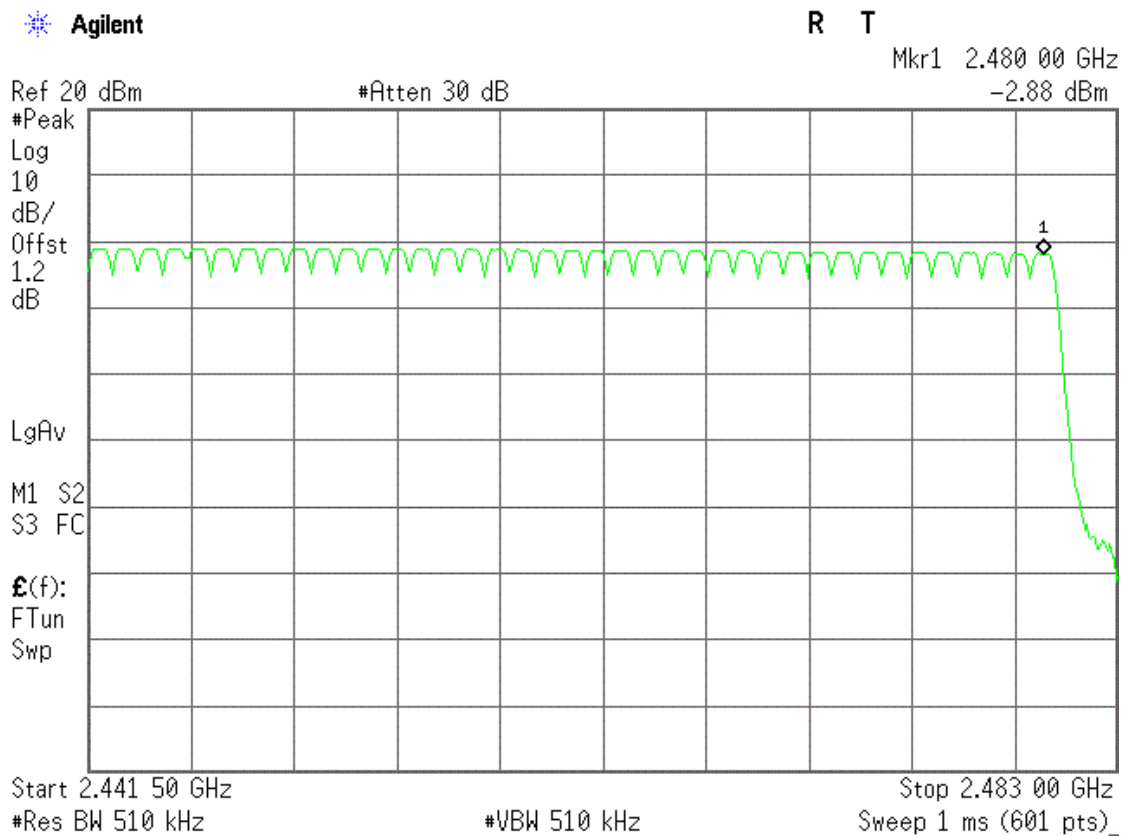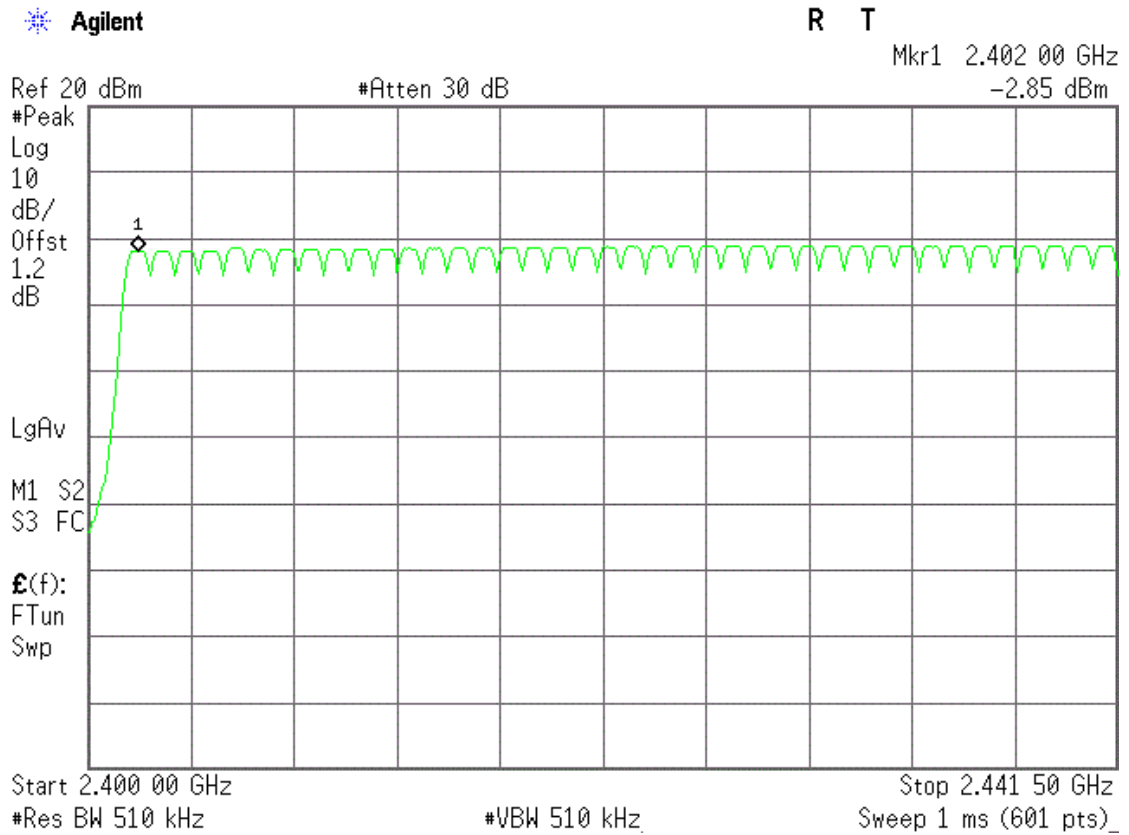



Channel Spacing (1MHz)

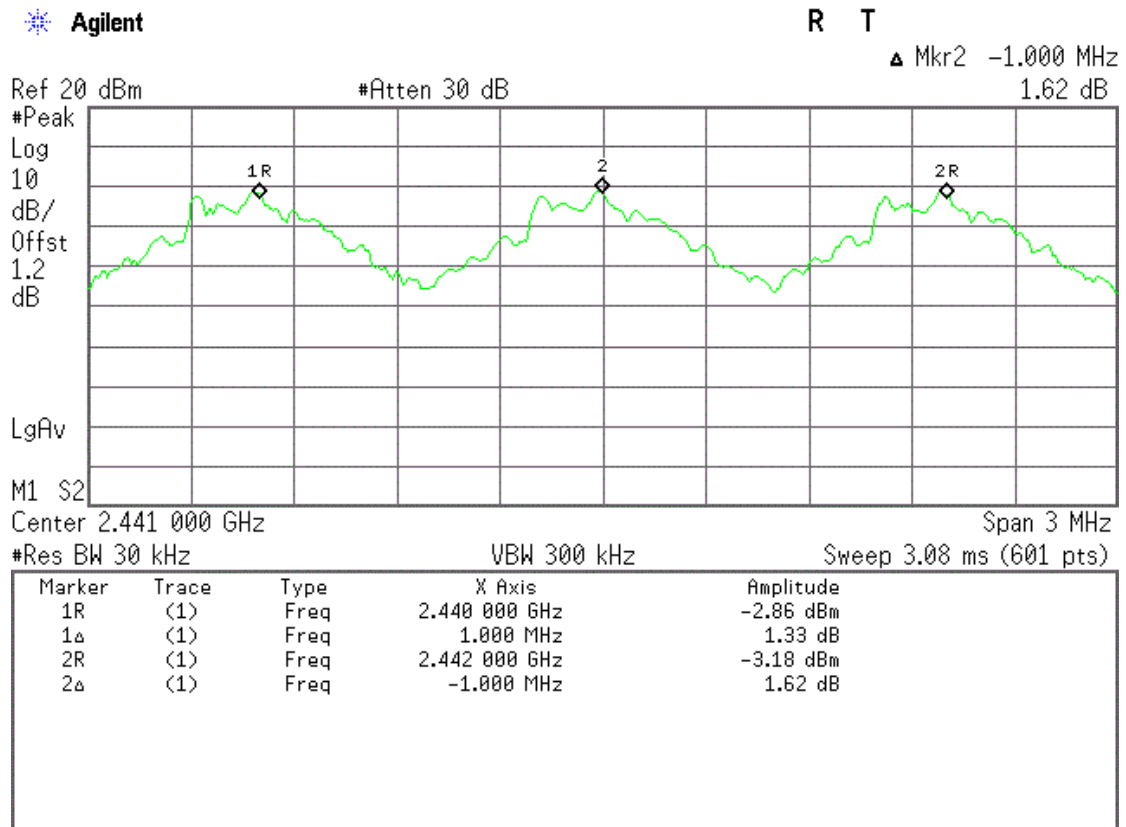


For 8-DPSK:

No. of Channel=79

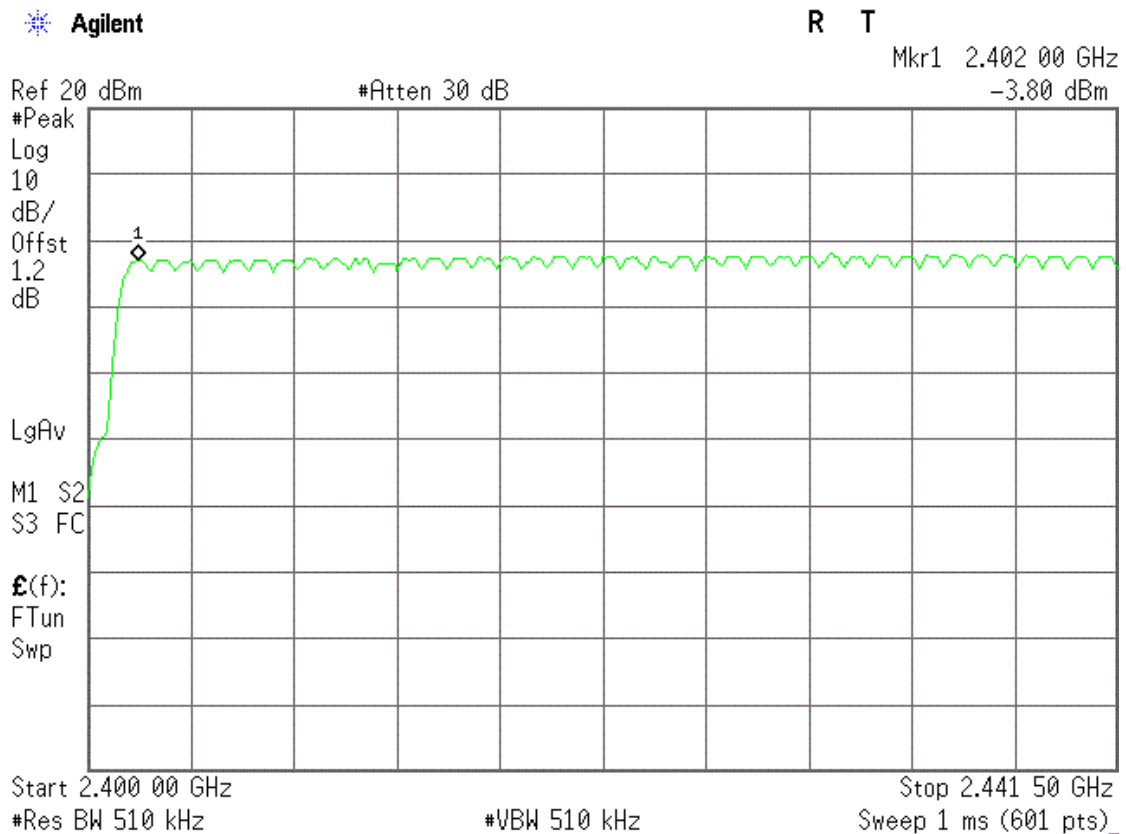

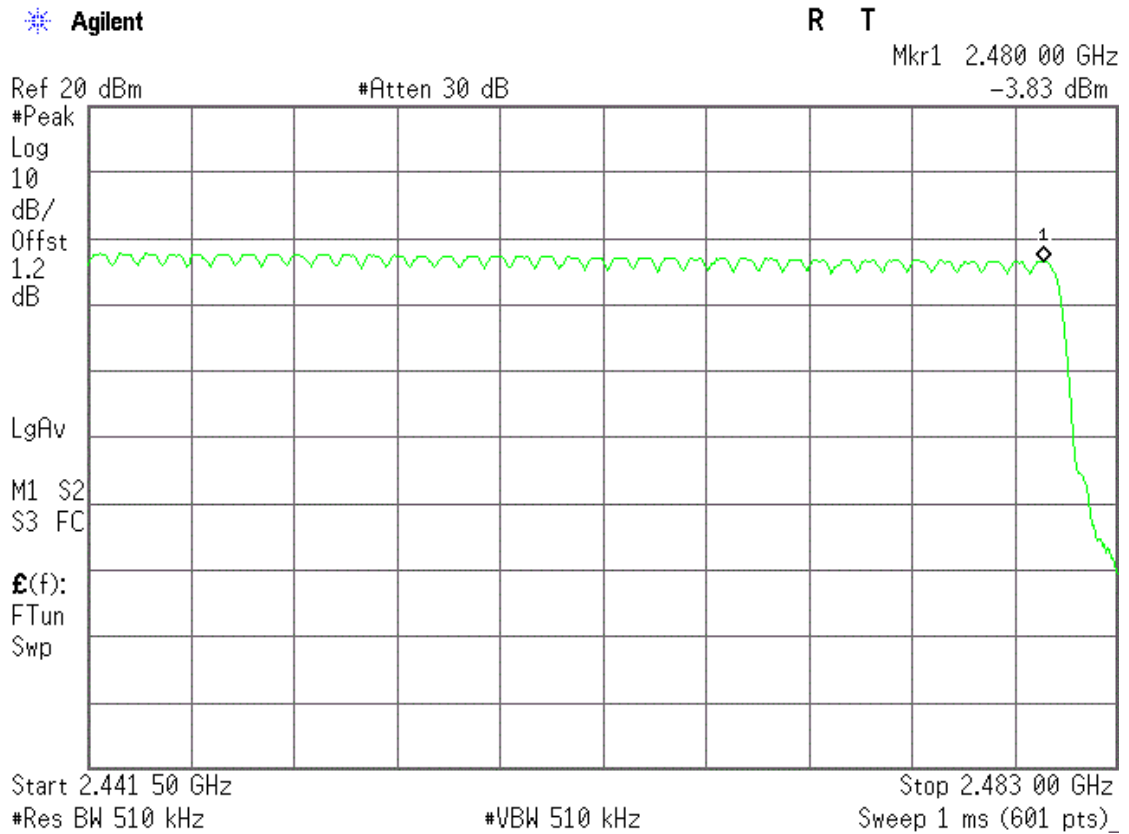

Channel Spacing (1MHz)

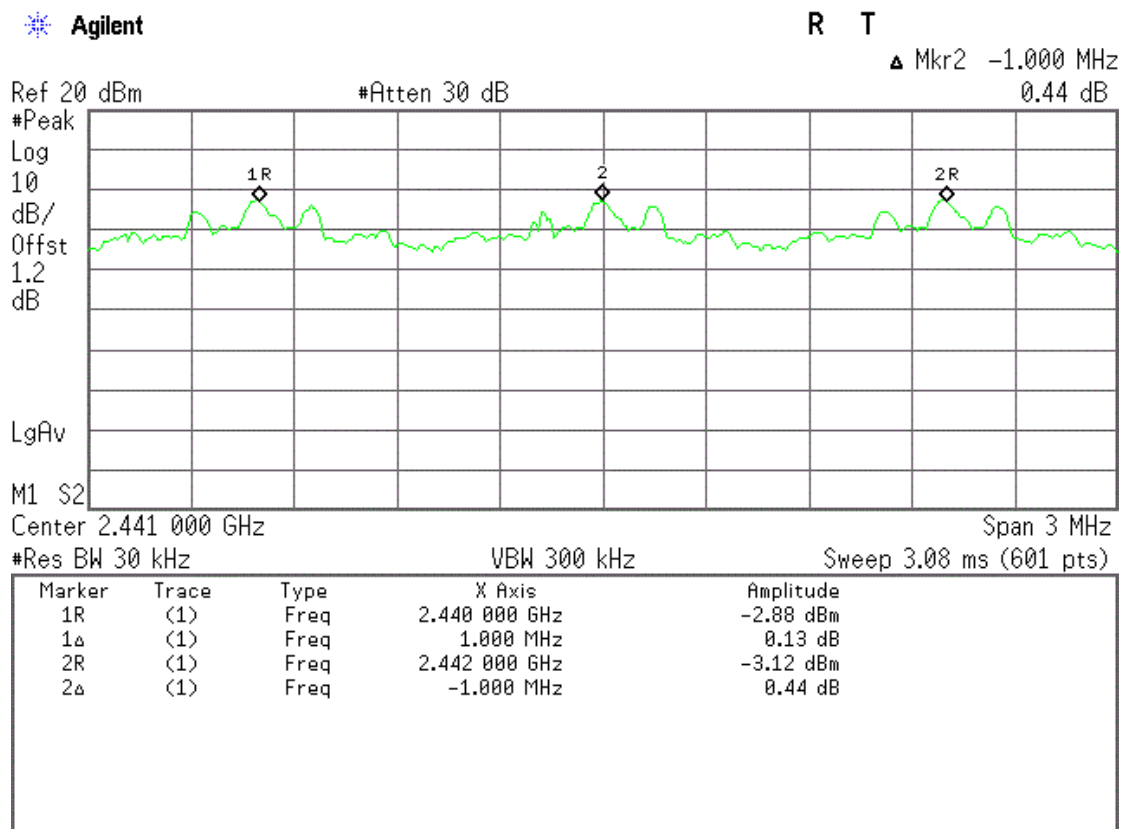


7. DWELL TIME OF A HOPPING CHANNEL

7.1 Limits of Dwell Time Measurement

According to 15.247(a)(1)(iii), Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

7.2 EUT Setup

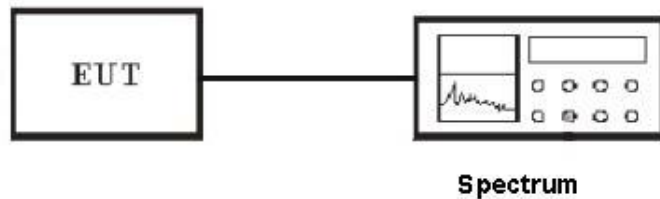

7.3 Test Equipment List and Details

See section 2.4.

7.4 Test Procedure

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW, VBW=1000 kHz, Span = 0Hz.
4. Repeat above procedures until all frequency measured was complete.

7.5 Test Result /Plots

PASS

Detailed information please see the following page.


A period time = $0.4 \text{ (s)} * 79 = 31.6 \text{ (s)}$

CH Low: DH1 time slot = $0.405 \text{ (ms)} * (1600 / (1 * 79)) * 31.6 = 259.2 \text{ (ms)}$
DH3 time slot = $1.668 \text{ (ms)} * (1600 / (3 * 79)) * 31.6 = 355.8 \text{ (ms)}$
DH5 time slot = $2.899 \text{ (ms)} * (1600 / (5 * 79)) * 31.6 = 371.1 \text{ (ms)}$
3-DH1 time slot = $0.399 \text{ (ms)} * (1600 / (1 * 79)) * 31.6 = 255.4 \text{ (ms)}$
3-DH3 time slot = $1.663 \text{ (ms)} * (1600 / (3 * 79)) * 31.6 = 354.8 \text{ (ms)}$
3-DH5 time slot = $2.893 \text{ (ms)} * (1600 / (5 * 79)) * 31.6 = 370.3 \text{ (ms)}$


CH Mid: DH1 time slot = $0.405 \text{ (ms)} * (1600 / (1 * 79)) * 31.6 = 259.2 \text{ (ms)}$
DH3 time slot = $1.664 \text{ (ms)} * (1600 / (3 * 79)) * 31.6 = 355.0 \text{ (ms)}$
DH5 time slot = $2.899 \text{ (ms)} * (1600 / (5 * 79)) * 31.6 = 371.1 \text{ (ms)}$
3-DH1 time slot = $0.405 \text{ (ms)} * (1600 / (1 * 79)) * 31.6 = 259.2 \text{ (ms)}$
3-DH3 time slot = $1.659 \text{ (ms)} * (1600 / (3 * 79)) * 31.6 = 353.9 \text{ (ms)}$
3-DH5 time slot = $2.918 \text{ (ms)} * (1600 / (5 * 79)) * 31.6 = 373.5 \text{ (ms)}$

CH High: DH1 time slot = $0.405 \text{ (ms)} * (1600 / (1 * 79)) * 31.6 = 259.2 \text{ (ms)}$
DH3 time slot = $1.665 \text{ (ms)} * (1600 / (3 * 79)) * 31.6 = 355.2 \text{ (ms)}$
DH5 time slot = $2.896 \text{ (ms)} * (1600 / (5 * 79)) * 31.6 = 370.7 \text{ (ms)}$
3-DH1 time slot = $0.405 \text{ (ms)} * (1600 / (1 * 79)) * 31.6 = 259.2 \text{ (ms)}$
3-DH3 time slot = $1.665 \text{ (ms)} * (1600 / (3 * 79)) * 31.6 = 355.2 \text{ (ms)}$
3-DH5 time slot = $2.899 \text{ (ms)} * (1600 / (5 * 79)) * 31.6 = 371.1 \text{ (ms)}$


DH1: CH Low

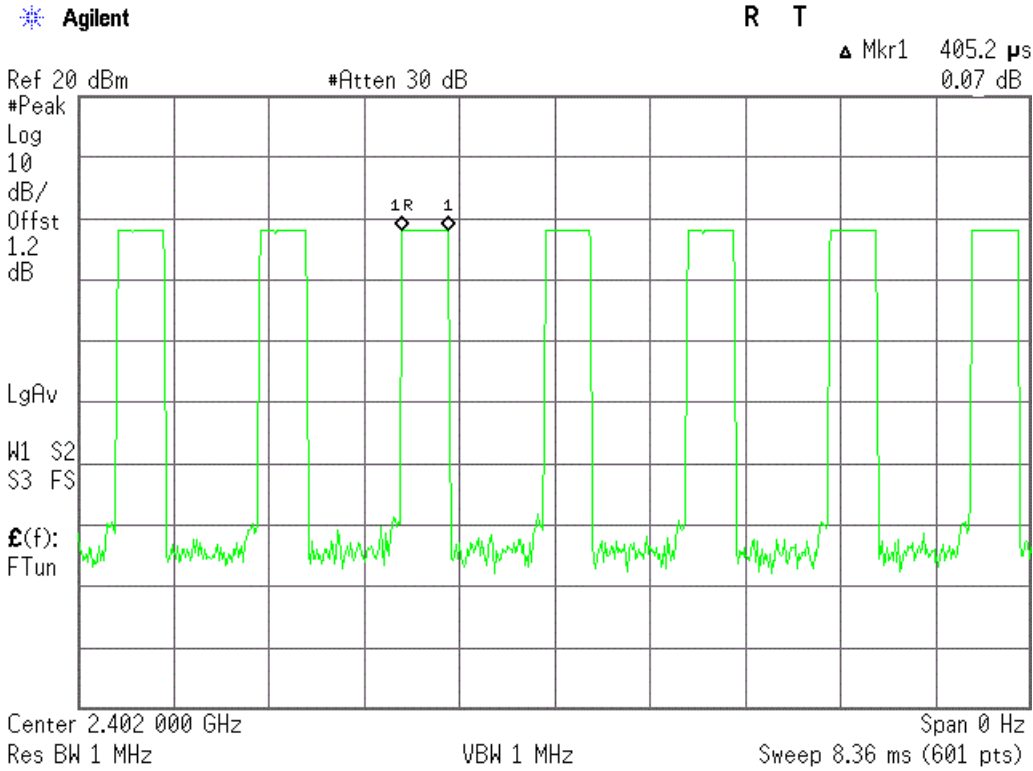


DH1: CH Mid

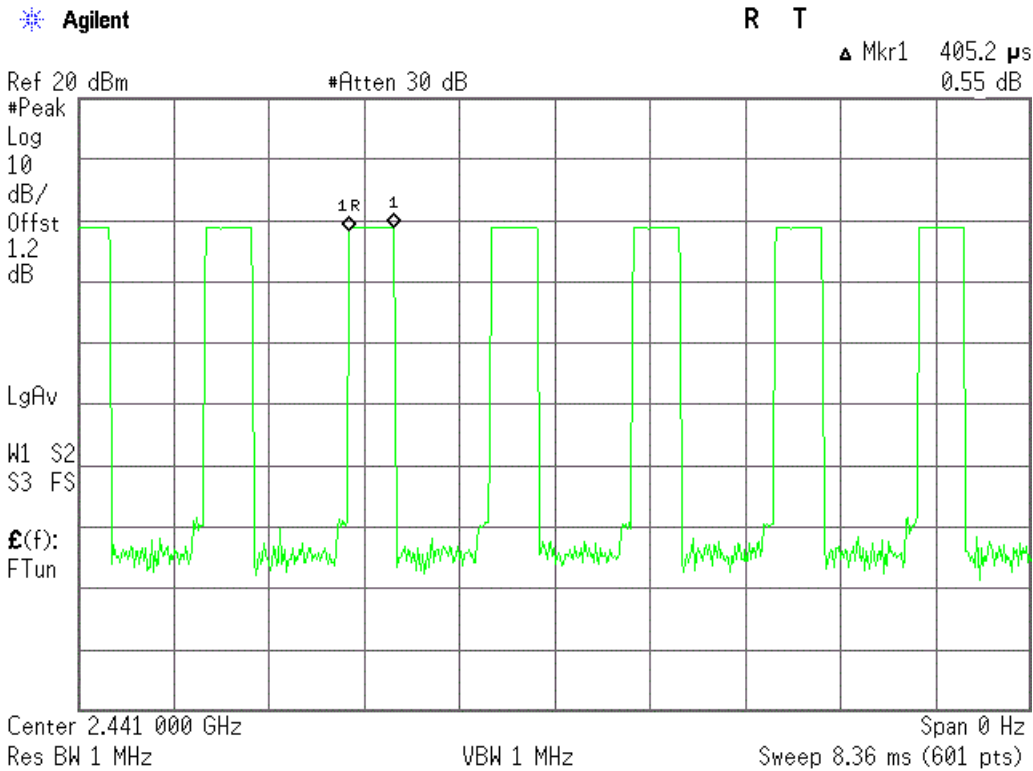


DH1: CH High

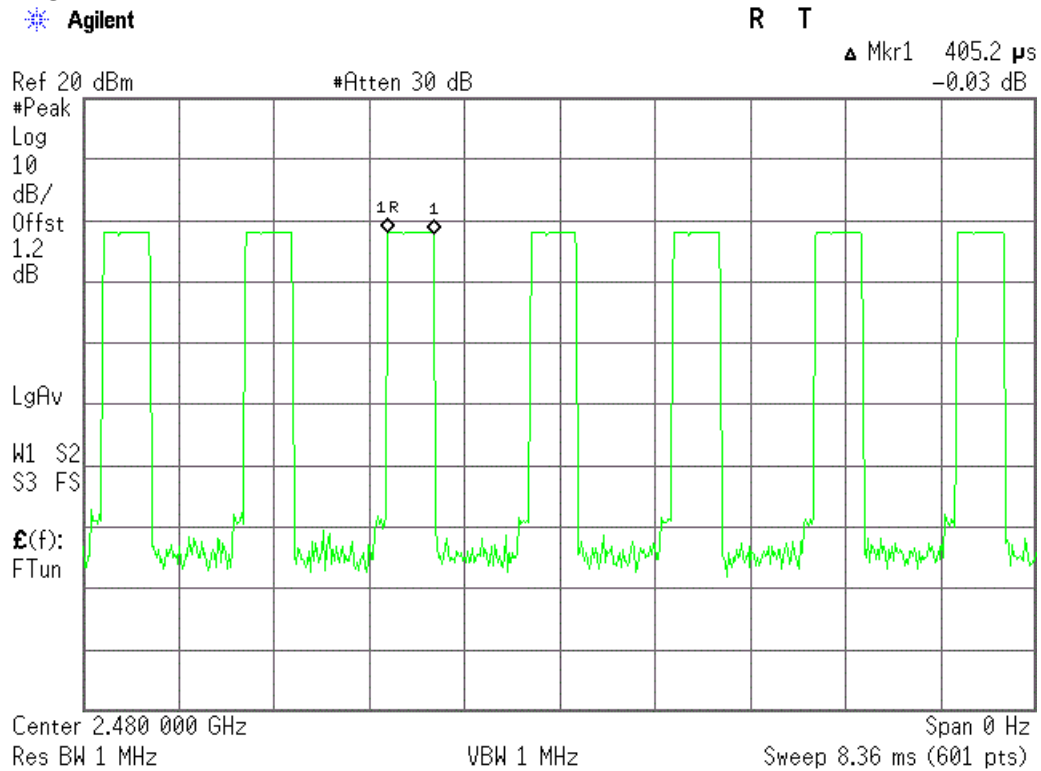


DH3: CH Low:

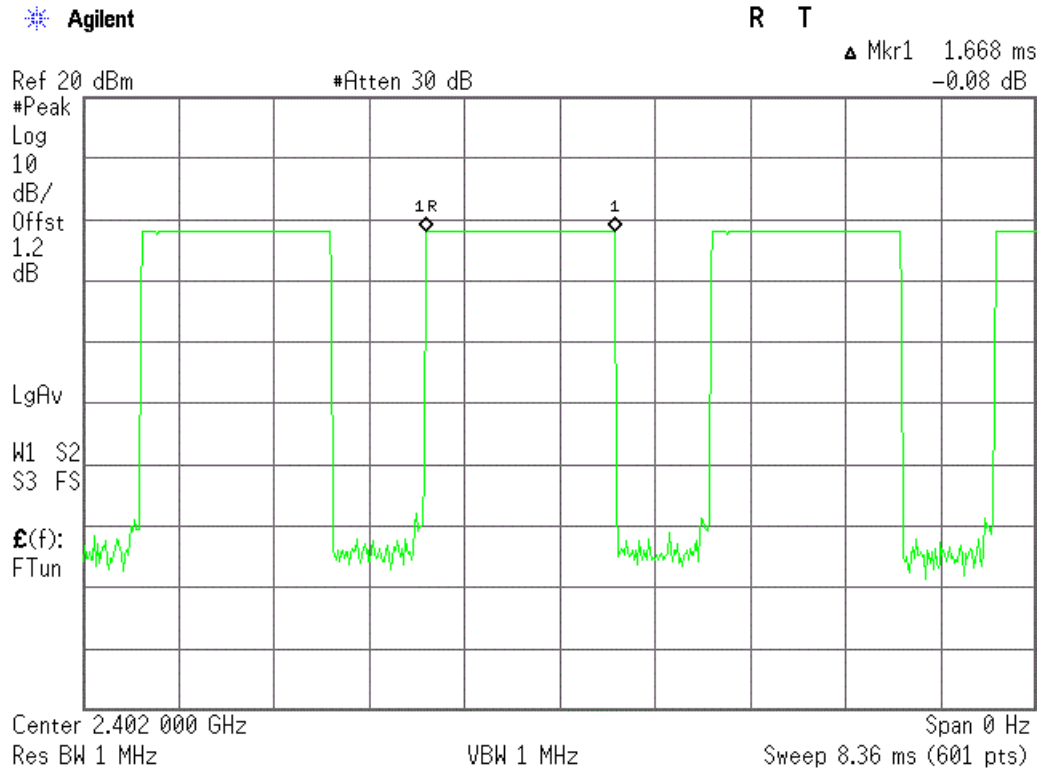


DH3: CH Mid

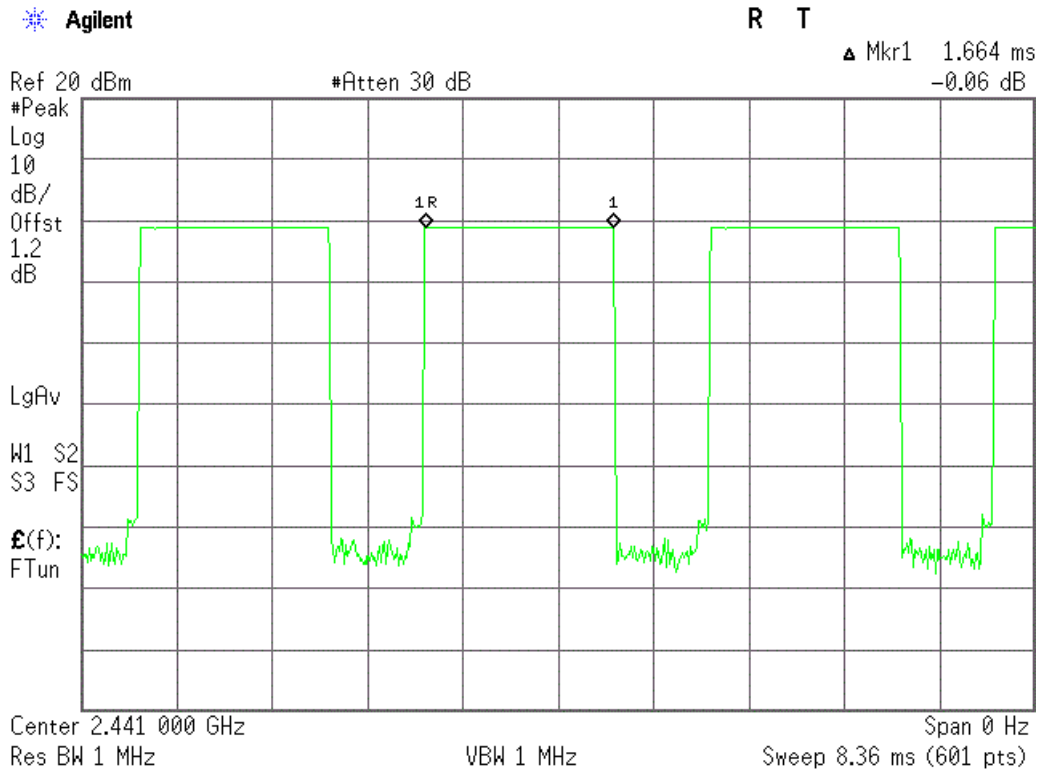


DH3 CH High

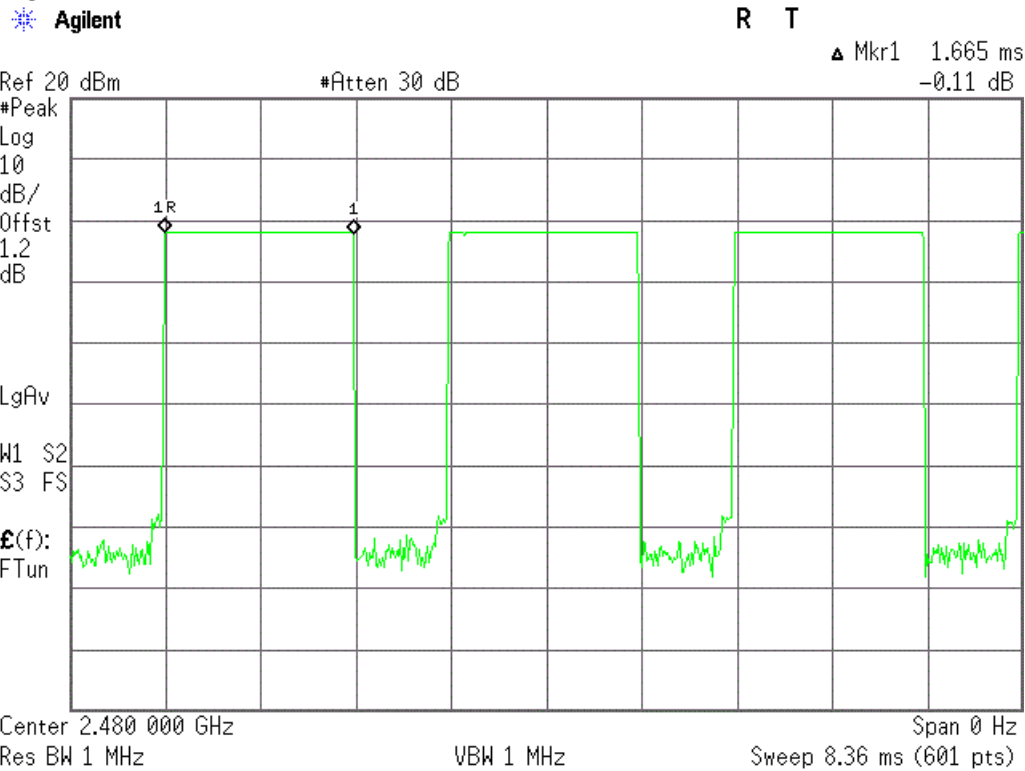

DH5 CH Low

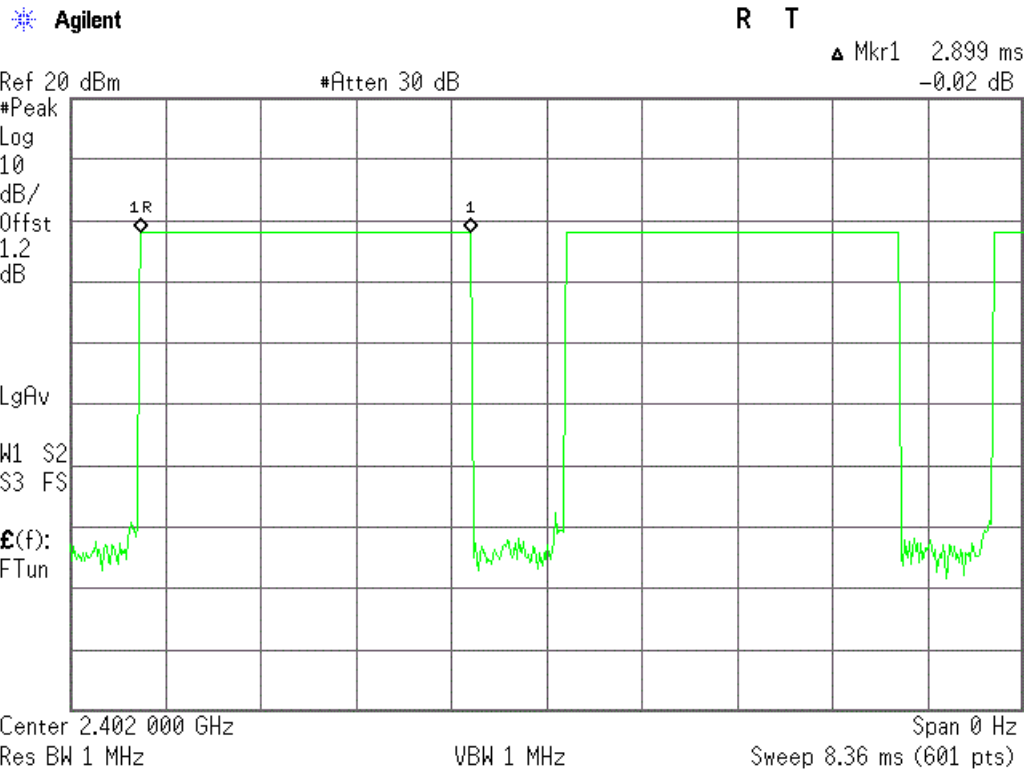

DH5 CH Mid

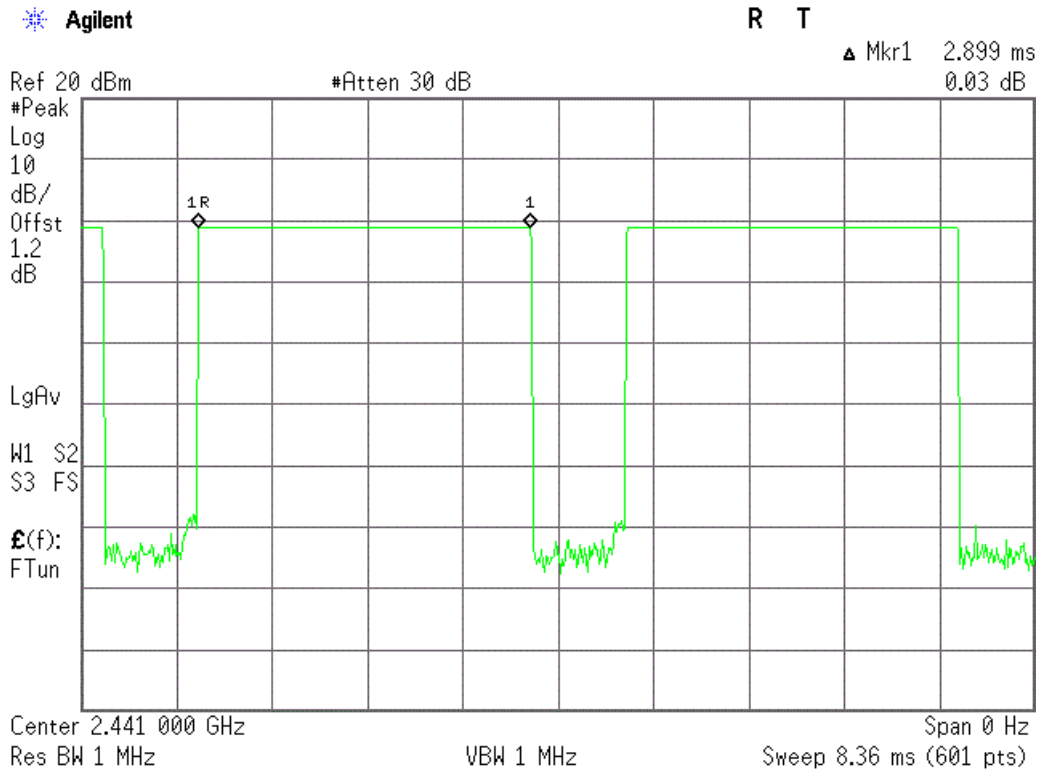


DH5 CH High

Agilent

R T

Mkr1 2.896 ms
0.02 dB

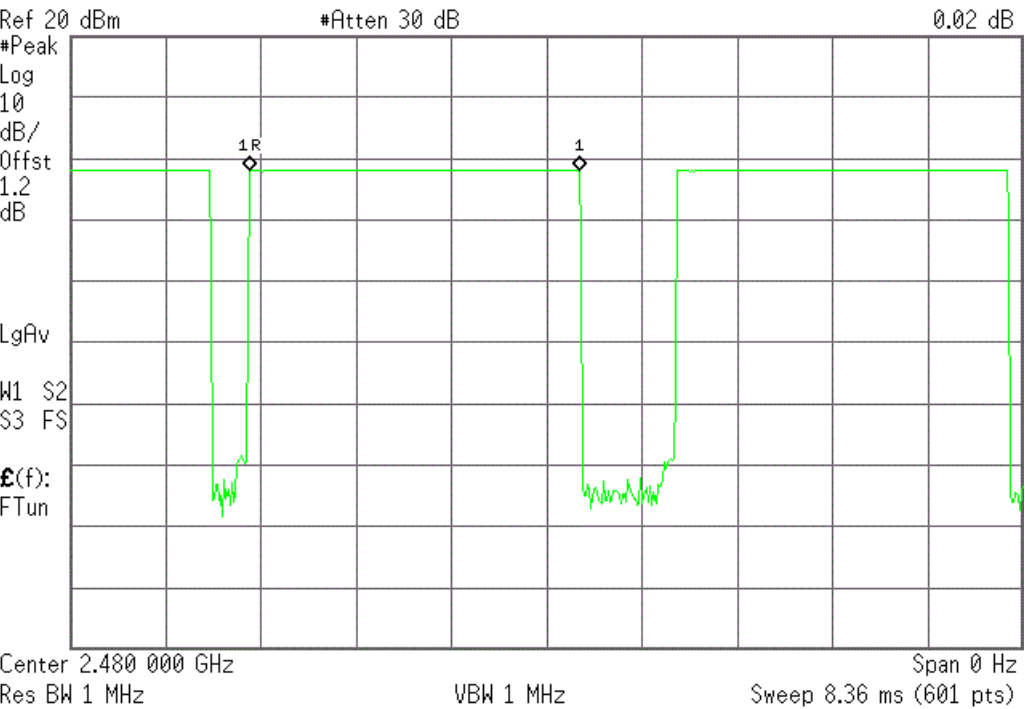


3-DH1: CH Low


Agilent

R T


Mkr1 399.1 μ s
-0.03 dB

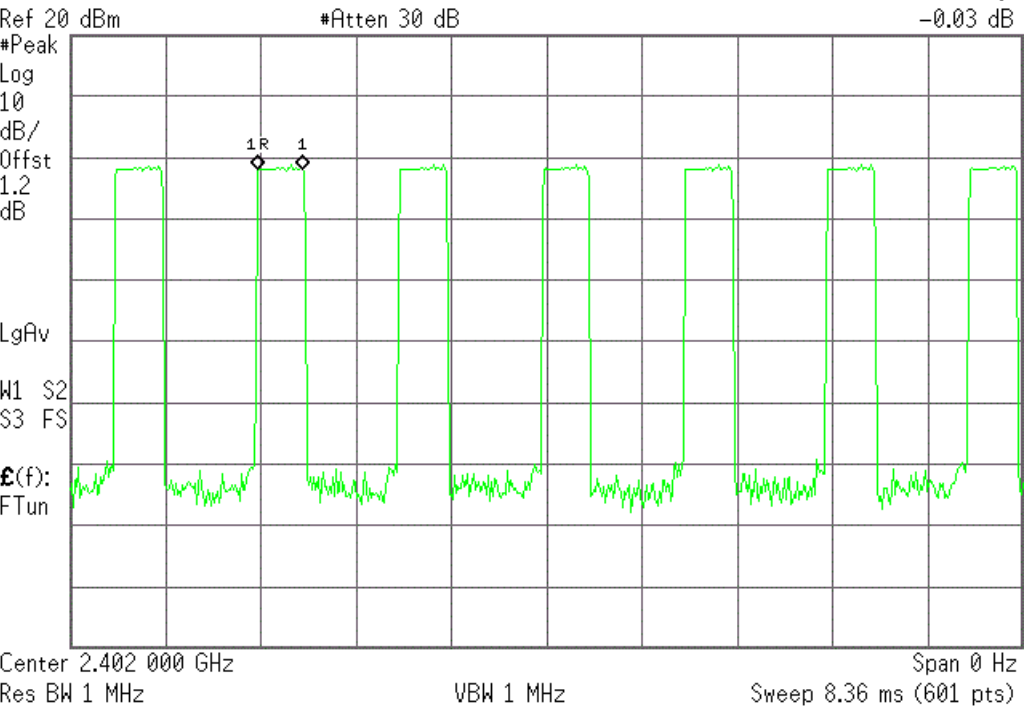


3-DH1: CH Mid

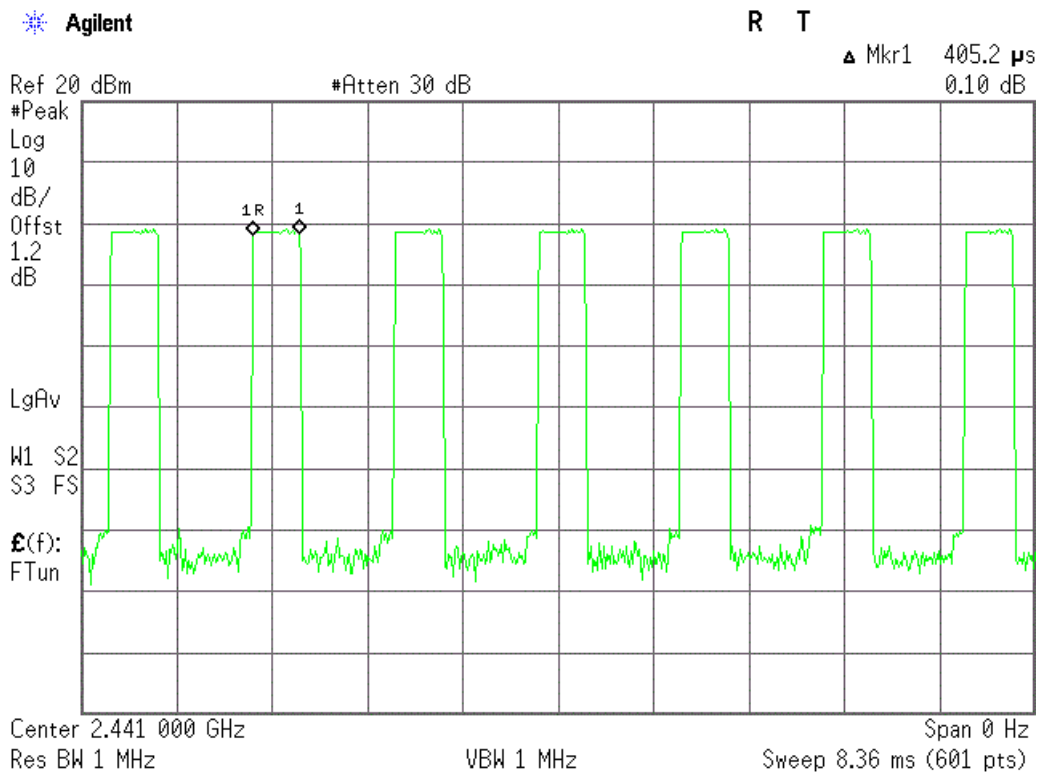


3-DH1: CH High

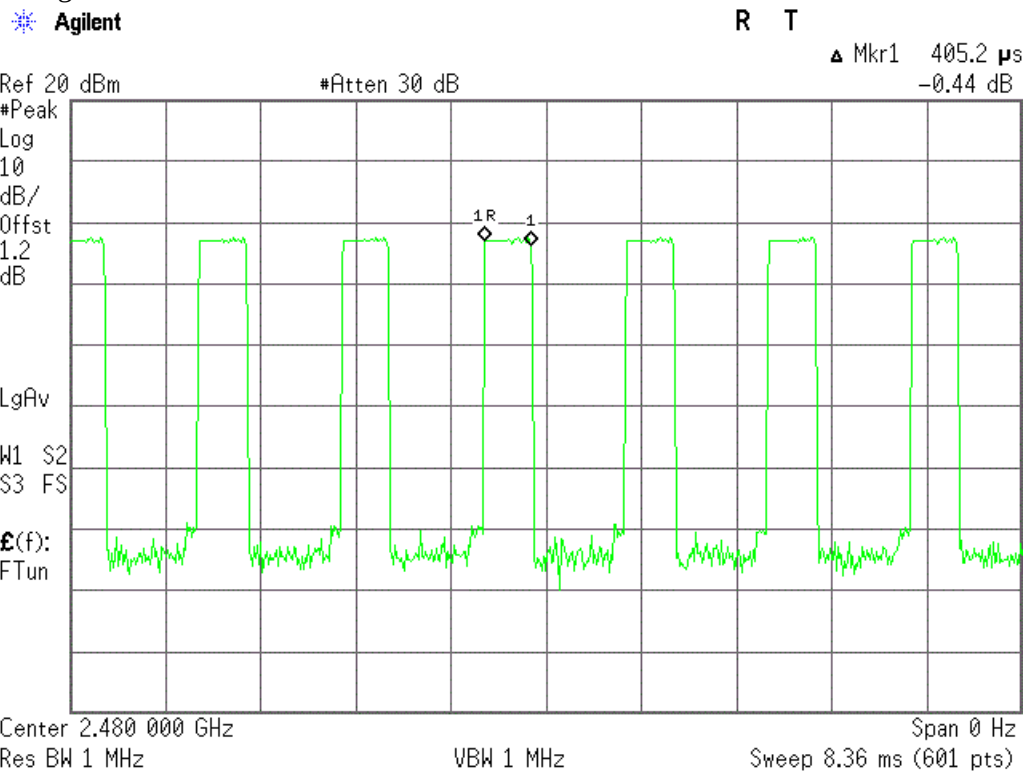


3-DH3: CH Low

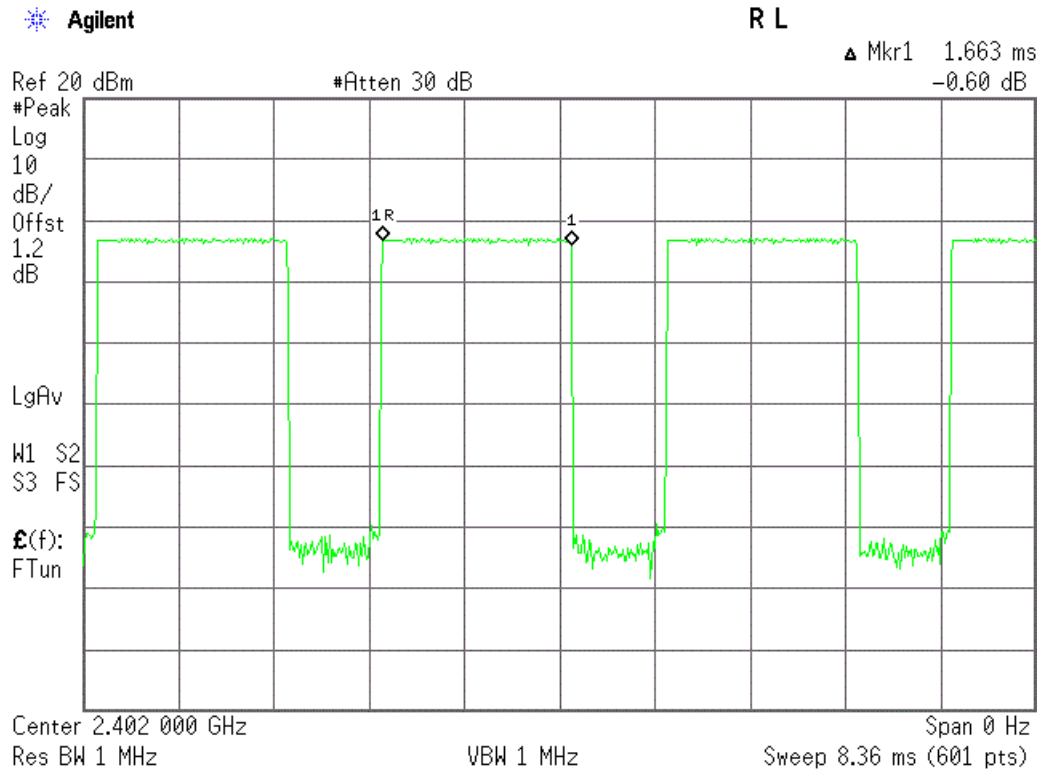


3-DH3: CH Mid

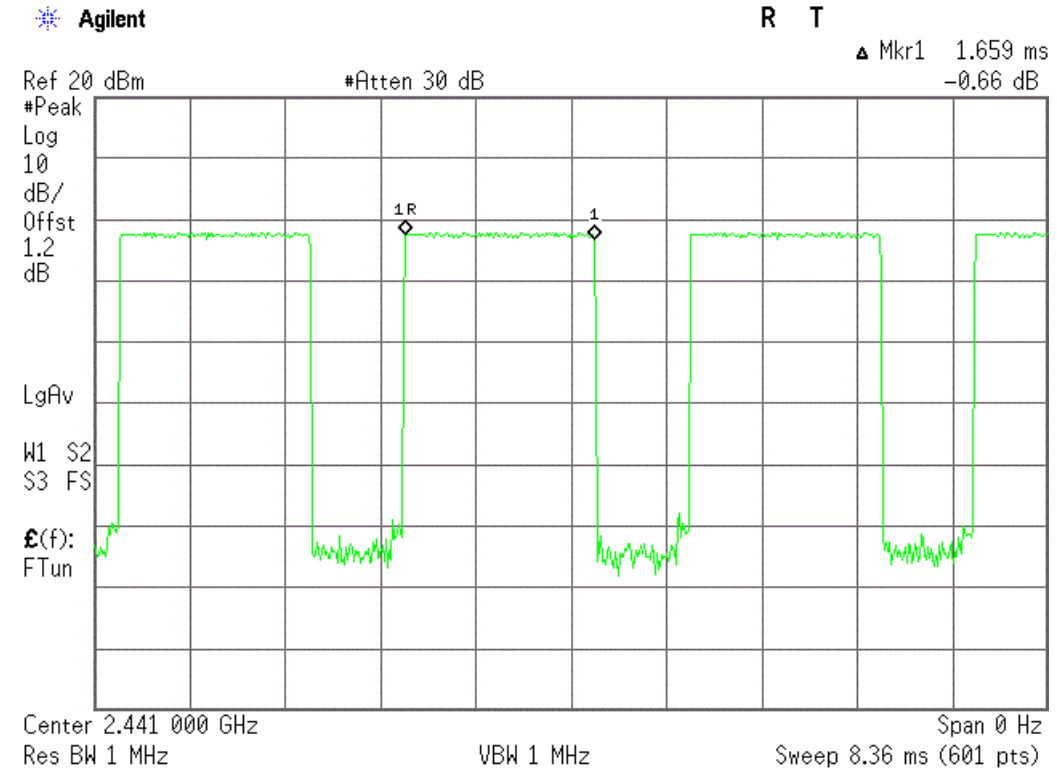


3-DH3: CH High

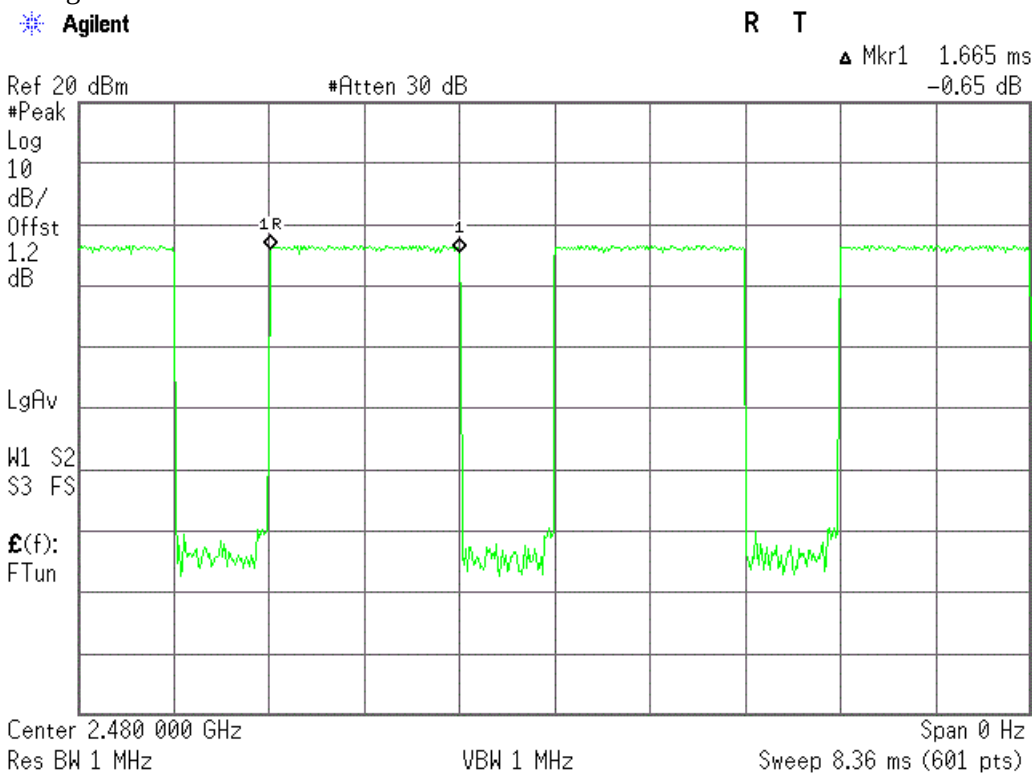


3-DH5: CH Low

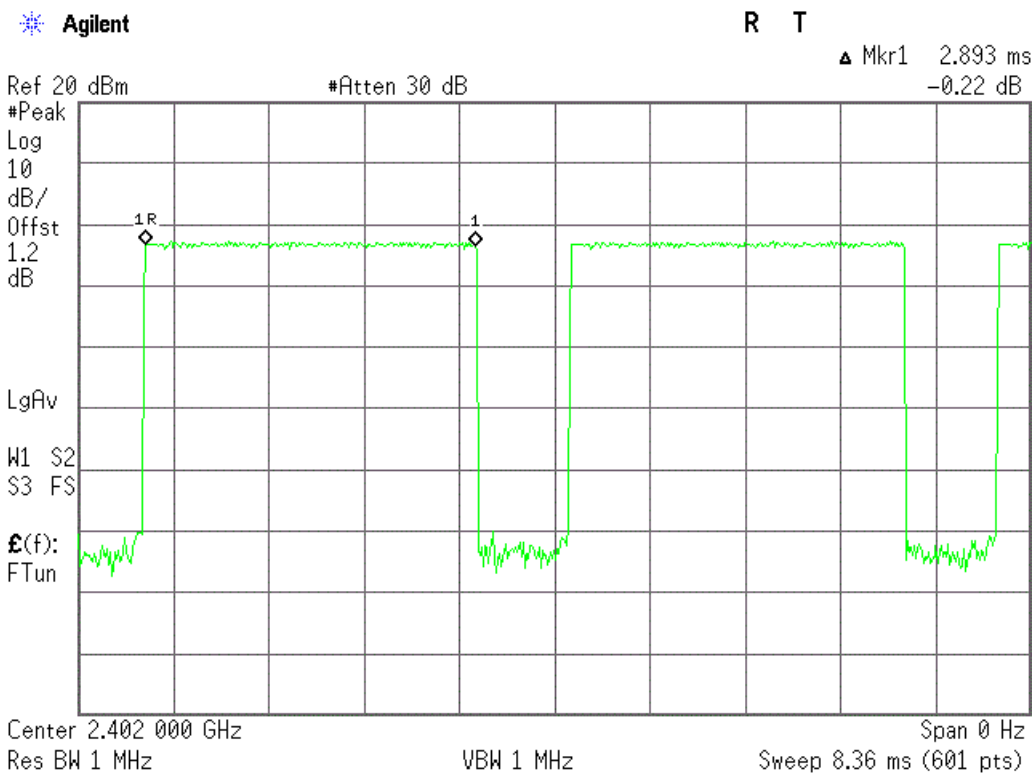

3-DH5: CH Mid

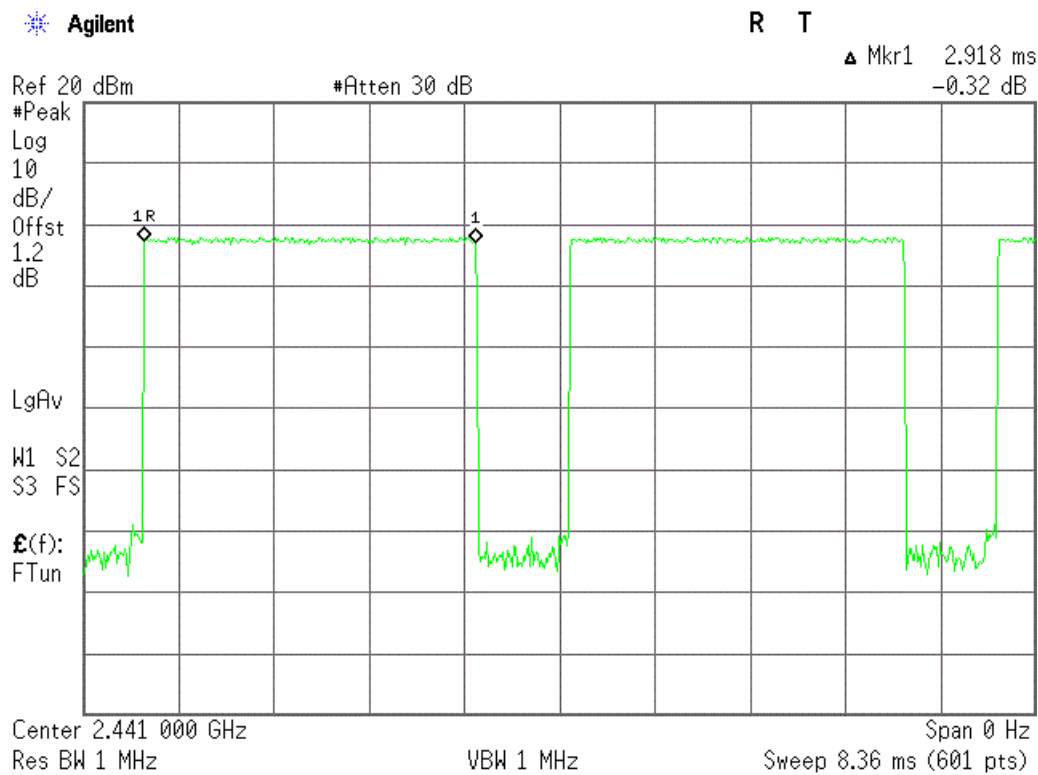

3-DH5: CH High

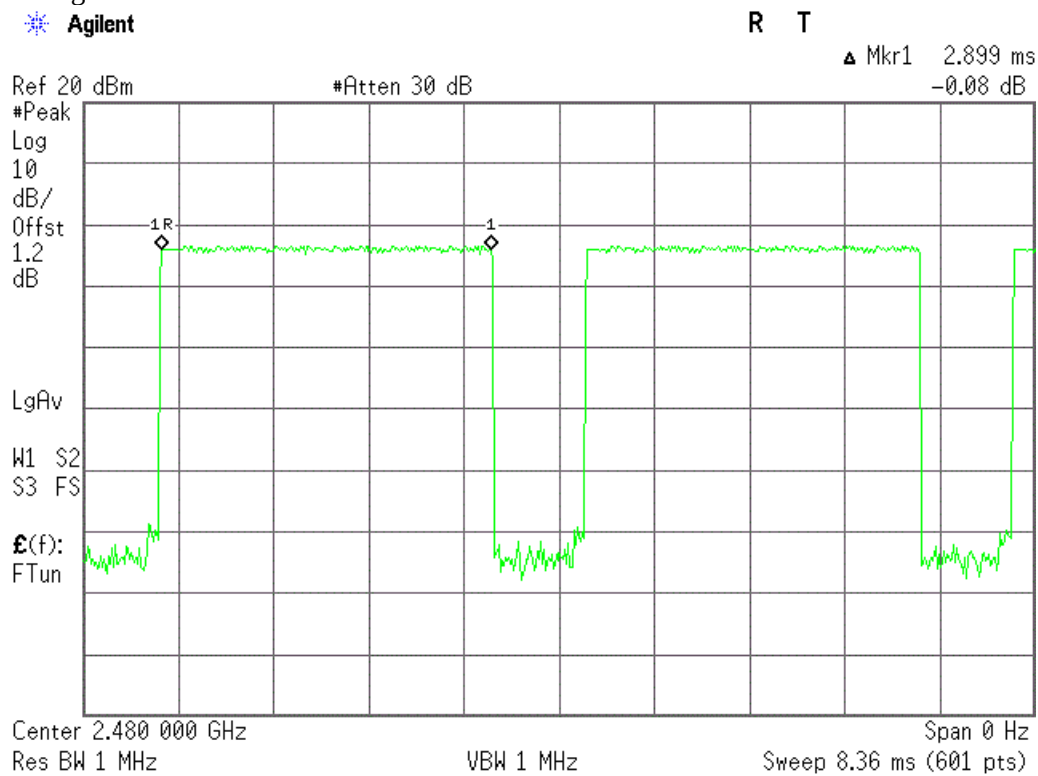


8. 20-dB BANDWIDTH

8.1 Limits of 20-dB Bandwidth Measurement

According to 15.247(a)(1)(iii). For frequency hopping systems operating in the 2400MHz-2483.5 MHz no limit for 20dB bandwidth.

8.2 EUT Setup

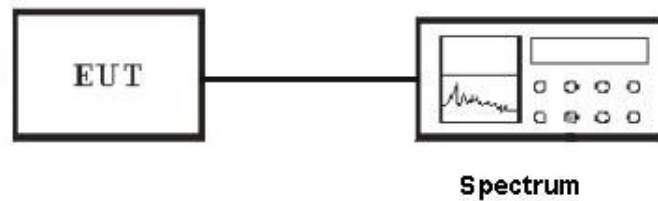

8.3 Test Equipment List and Details

See section 2.4.

8.4 Test Procedure

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set center frequency of spectrum analyzer = operating frequency.
3. The spectrum analyzer as RBW=30 kHz (1 % of Bandwidth.), Sweep=auto
4. Mark the peak frequency and –20dB (upper and lower) frequency.

8.5 Test Result /Plots

For GFSK:

Frequency MHz	20 dB Bandwidth kHz	Limit dB
2402	0.843	/
2441	0.858	/
2480	0.847	/

For 8-DPSK:


Frequency MHz	20 dB Bandwidth kHz	Limit dB
2402	1.265	/
2441	1.266	/
2480	1.267	/

GFSK CH Low:

Agilent

R T

▲ Mkr1 843 kHz
-0.08 dB

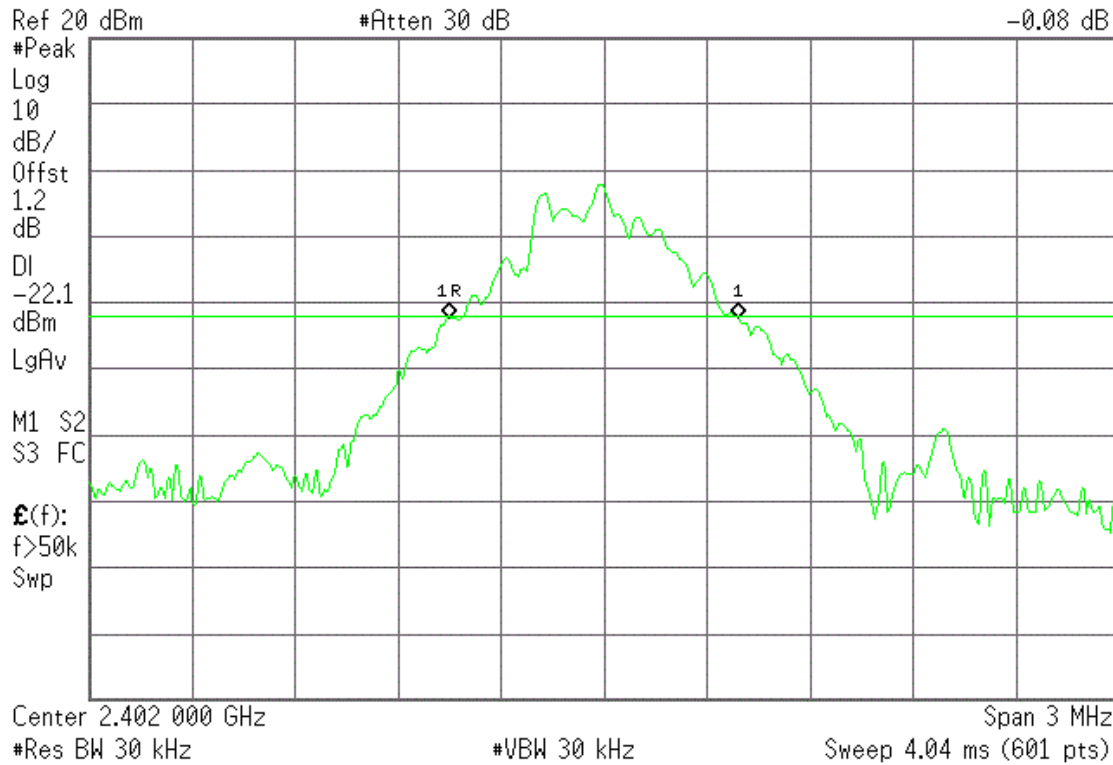


GFSK CH Mid:

Agilent

R L

▲ Mkr1 858 kHz
-0.15 dB

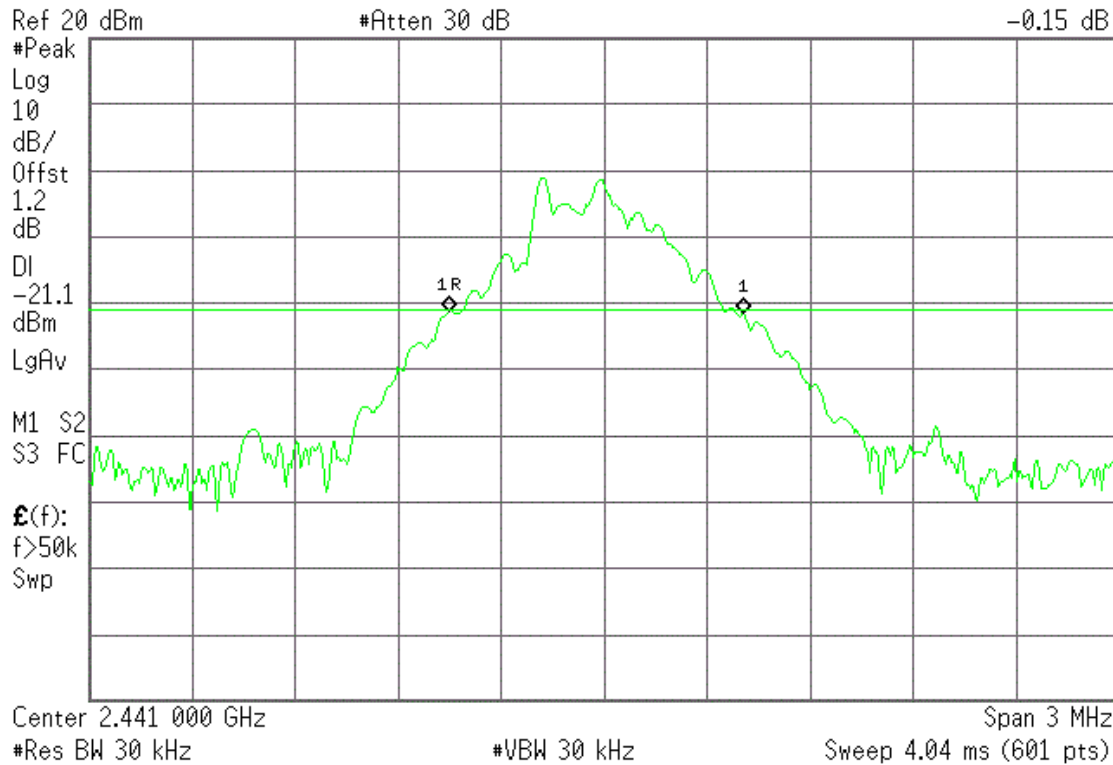


GFSK CH High:

 Agilent

R T

▲ Mkr1 847 kHz
0.48 dB

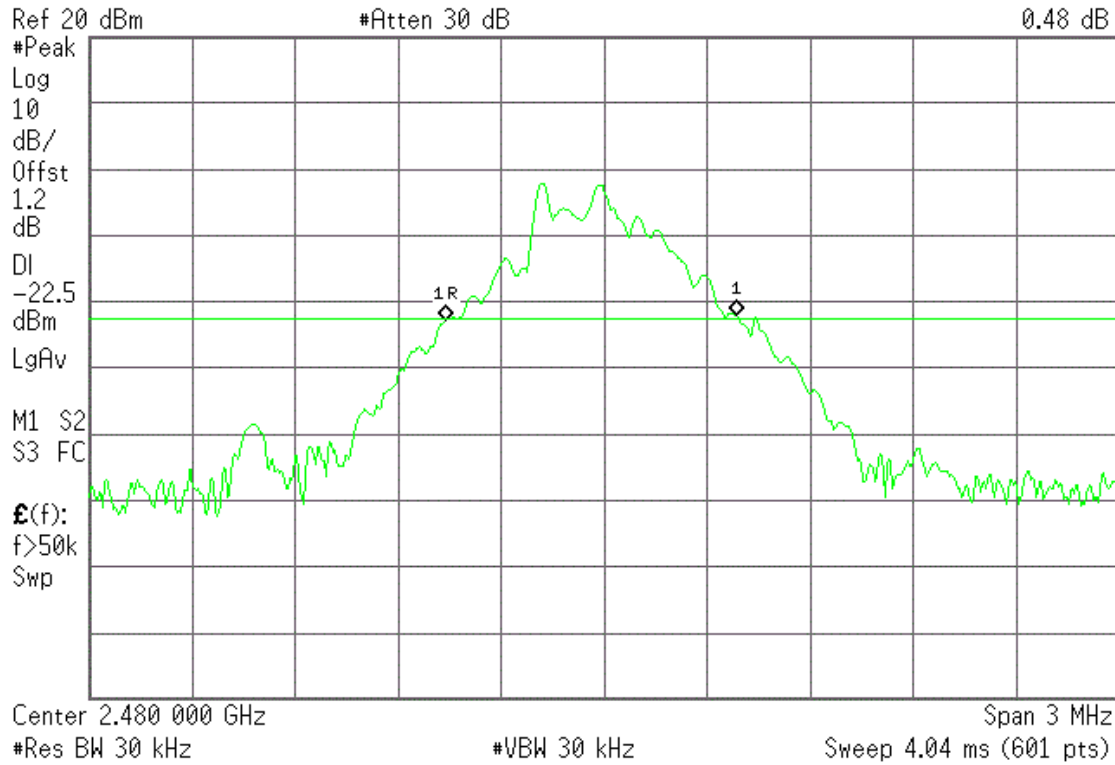


8-DPSK CH Low:

 Agilent

R L

▲ Mkr1 1.265 MHz
0.55 dB

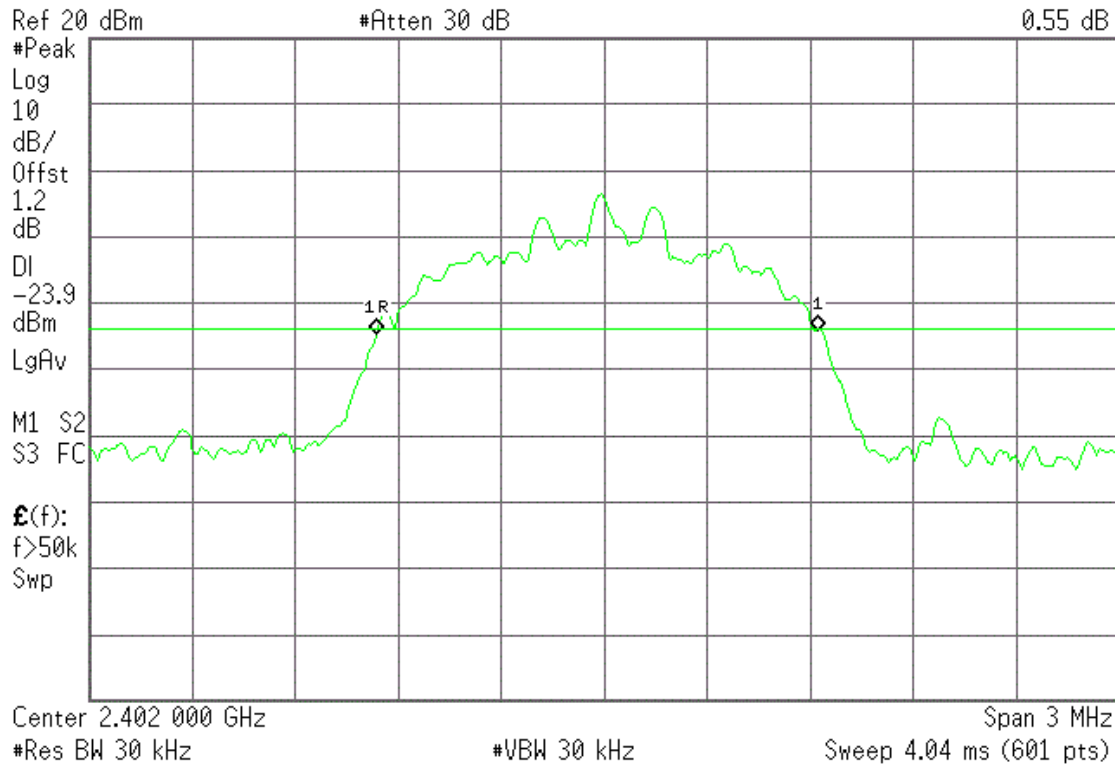


8-DPSK CH Mid:

Agilent

R T

▲ Mkr1 1.266 MHz
0.46 dB

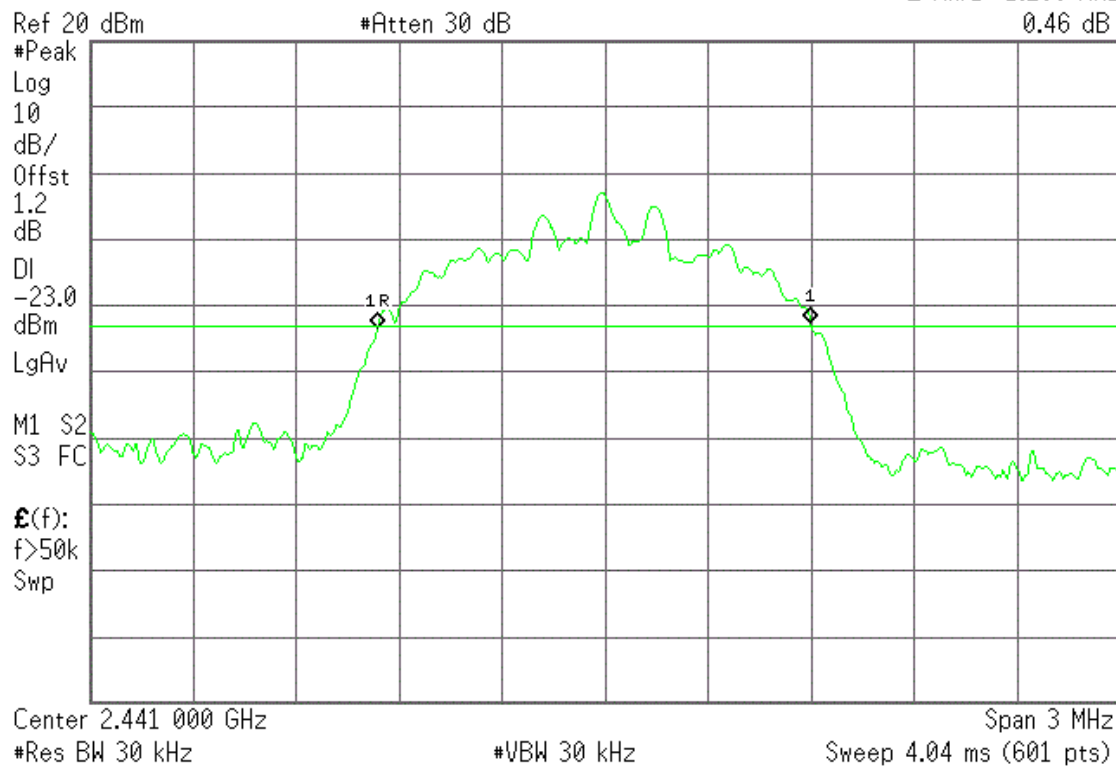


8-DPSK CH High:

Agilent

R T

▲ Mkr1 1.267 MHz
0.42 dB

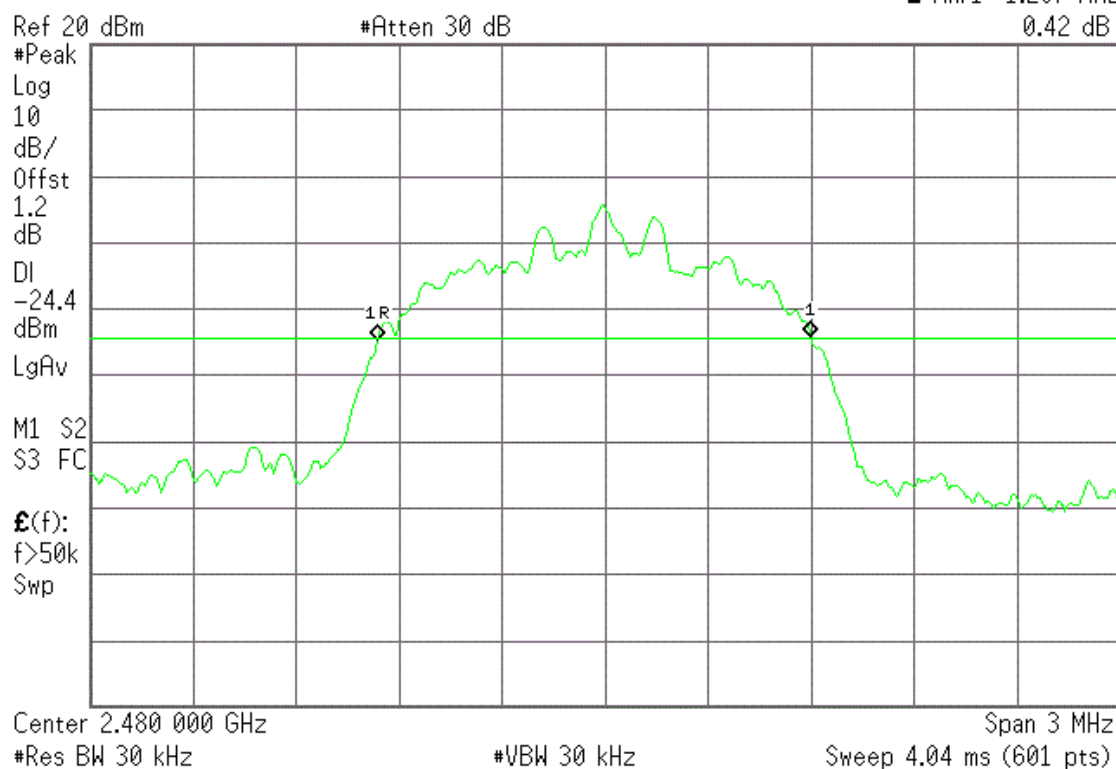

9. PEAK POWER

9.1 Limits of Power Measurement

According to 15.247(b)(1). For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

9.2 Test Equipment List and Details

See section 2.4.

9.3 Test Procedure

The device under test has an integral antenna and the power was measured on a radiated basis.

9.4 Test Result of Peak Power

For GFSK:

2402 MHz 0.6372 mW

2441 MHz 0.6482 mW

2480 MHz 0.6257 Mw

For 8-DPSK:

2402 MHz 0.5844 mW

2441 MHz 0.5923 mW

2480 MHz 0.5871 Mw

Note: The Antenna Gain is under considering.

10. FIELD STRENGTH OF SPURIOUS EMISSIONS

10.1 Limits of Radiated Emission Measurement

According to §15.247(c), 15.205 15.209(b) &15.35 (b), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Section 15.209:

0.009-0.490MHz 67.6 dBuV/m /F (KHz) @300M

0.490-1.705MHz 87.6 dBuV/m /F (KHz) @30M

1.705-30MHz 29.5 dBuV/m @30M

30 - 88 MHz 40 dBuV/m @3M

88 -216 MHz 43.5 dBuV/m @3M

216 -960 MHz 46 dBuV/m @3M

Above 960 MHz 54dBuV/m @3M

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.


Emissions Radiated Outside Of The Specified Frequency Bands, Except For Harmonics, Shall Be Attenuated By At Least 20 Db Below The Level Of The Fundamental Or To The General Radiated Emission Limits In 15.209, Whichever Is The Lesser Attenuation.

Emissions that fall in the restricted bands (15.205) must be less than 54dBuV/m otherwise the spurious and harmonics must be attenuated by at least 20dB.

Note: 30m to 3m correction factor calculation:
 $40 * \log(30m/3m) = 40$

10.2 EUT Setup

Radiated Measurement Setup

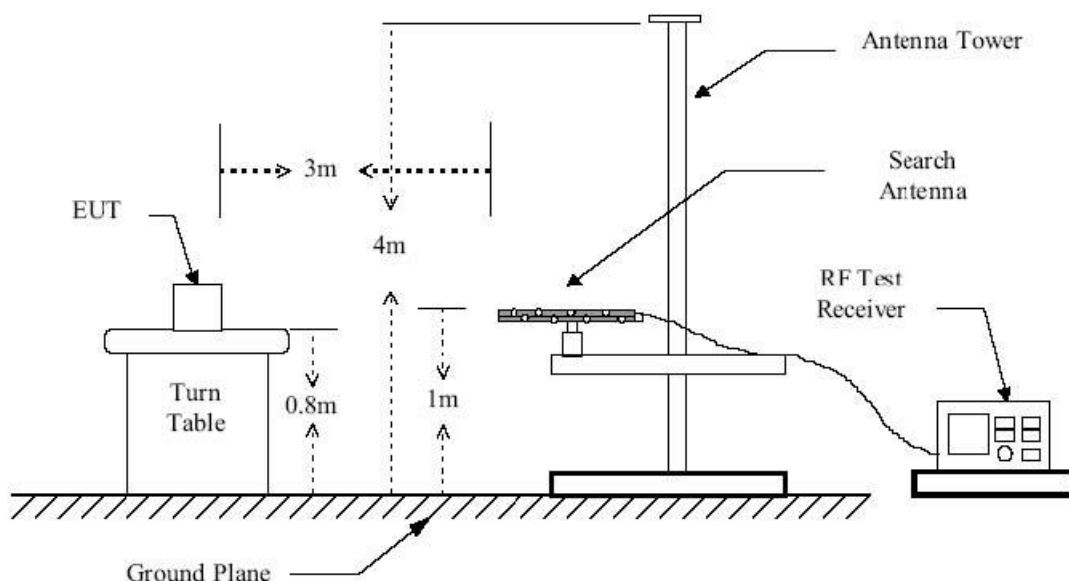

10.3 Test Equipment List and Details

See section 2.4.

10.4 Test Procedure

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.

10.5 Test Result

According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst margin of:

-6.2 dB μ V at 4882.0 MHz in the **Horizontal polarization for Middle Channel, 30 MHz to 25 GHz, 3 Meters, Transmitting mode**


-6.50 dB μ V at 625.07 MHz in the **Vertical polarization for Middle Channel, 30 MHz to 1 GHz, 3 Meters, copy data mode**

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

From 9KHz to 30MHz: Conclusion: PASS


Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

From 30 MHz to 1 GHz
Test Mode: Normal
Vertical

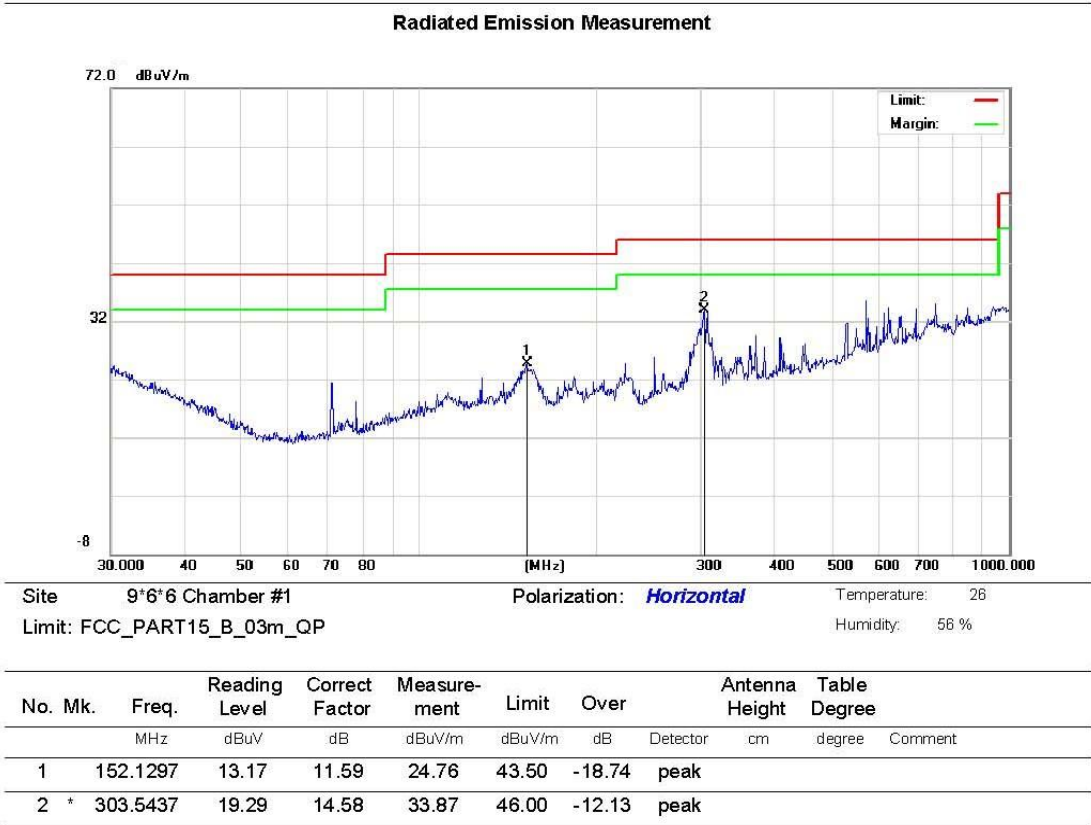

*:Maximum data x:Over limit !:over margin < Reference Only

Horizontal

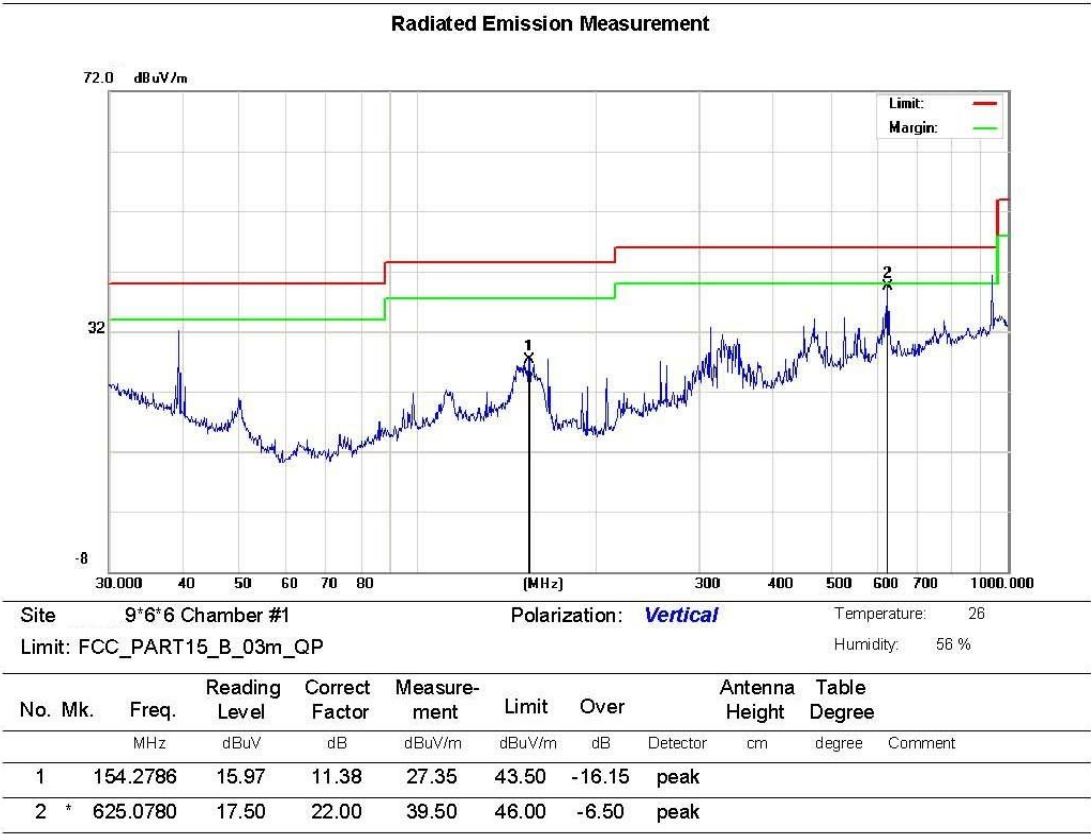

*:Maximum data x:Over limit !:over margin (Reference Only)

Spurious emission above 1G For GFSK:

Frequency MHz	Detector	Meter Reading dBuV	Direction Degree	Polar H / V	Antenna Loss dB	Cable loss dB	Amplifier dB	Correction Amplitude dBuV/m	Limit dBuV/m	Margin dB
Low Channel (1G to 25GHz)										
4804.0	AV	40.3	48	H	34.1	5.2	33.0	46.6	54	-7.4
4804.0	AV	37.2	29	V	34.1	5.2	33.0	43.5	54	-10.5
7206.0	AV	35.8	236	H	37.4	6.1	33.5	45.8	54	-8.2
7206.0	AV	31.2	158	V	37.4	6.1	33.5	41.2	54	-12.8
2402.0	AV	94.4	104	H	29.1	3.7	34.0	93.2		(Fund.)
2402.0	AV	95.7	217	V	29.1	3.7	34.0	94.5		(Fund.)
4804.0	PK	47.3	69	H	34.1	5.2	33.0	53.6	74	-20.4
4804.0	PK	45.8	43	V	34.1	5.2	33.0	52.1	74	-21.9
7206.0	PK	40.2	218	H	37.4	6.1	33.5	50.2	74	-23.8
7206.0	PK	38.8	124	V	37.4	6.1	33.5	48.8	74	-25.2
2402.0	PK	102	121	H	29.1	3.7	34.0	100.8		(Fund.)
2402.0	PK	100.7	286	V	29.1	3.7	34.0	99.5		(Fund.)
Middle Channel (1G to 25GHz)										
4882.0	AV	41.5	135	H	34.1	5.2	33.0	47.8	54	-6.2
4882.0	AV	38	128	V	34.1	5.2	33.0	44.3	54	-9.7
7323.0	AV	33.7	214	H	37.4	6.1	33.5	43.7	54	-10.3
7323.0	AV	31.6	86	V	37.4	6.1	33.5	41.6	54	-12.4
2441.0	AV	95.3	73	H	29.1	3.7	34.0	94.1		(Fund.)
2441.0	AV	95.0	69	V	29.1	3.7	34.0	93.8		(Fund.)
4882.0	PK	46.9	47	H	34.1	5.2	33.0	53.2	74	-20.8
4882.0	PK	44.2	147	V	34.1	5.2	33.0	50.5	74	-23.5
7323.0	PK	41.6	252	H	37.4	6.1	33.5	51.6	74	-22.4
7323.0	PK	38.9	135	V	37.4	6.1	33.5	48.9	74	-25.1
2441.0	PK	100.8	49	H	29.1	3.7	34.0	99.6		(Fund.)
2441.0	PK	99.7	63	V	29.1	3.7	34.0	98.5		(Fund.)

High Channel (1G to 25GHz)										
4960.0	AV	40.8	28	H	34.1	5.2	33.0	47.1	54	-6.9
4960.0	AV	40.2	84	V	34.1	5.2	33.0	46.5	54	-7.5
7440.0	AV	33.5	252	H	37.4	6.1	33.5	43.5	54	-10.5
7440.0	AV	32.8	136	V	37.4	6.1	33.5	42.8	54	-11.2
2480.0	AV	95.7	174	H	29.1	3.7	34.0	94.5		(Fund.)
2480.0	AV	94.4	87	V	29.1	3.7	34.0	93.2		(Fund.)
4960.0	PK	49.4	346	H	34.1	5.2	33.0	55.7	74	-18.3
4960.0	PK	48.0	129	V	34.1	5.2	33.0	54.3	74	-19.7
7440.0	PK	43.5	252	H	37.4	6.1	33.5	53.5	74	-20.5
7440.0	PK	41.6	85	V	37.4	6.1	33.5	51.6	74	-22.4
2480.0	PK	100.7	107	H	29.1	3.7	34.0	99.5		(Fund.)
2480.0	PK	99.4	164	V	29.1	3.7	34.0	98.2		(Fund.)

Note: Testing is carried out with frequency rang 30MHz to the tenth harmonics, which above 4th Harmonics is close to the noise base even antenna close up to 1meter distance according the measurement of ANSI C63.4.

Spurious emission above 1G For 8-DPSK:

Frequency MHz	Detector	Meter Reading dBuV	Direction Degree	Polar H / V	Antenna Loss dB	Cable loss dB	Amplifier dB	Correction Amplitude dBuV/m	Limit dBuV/m	Margin dB
Low Channel (1G to 25GHz)										
4804.0	AV	40.3	48	H	34.1	5.2	33.0	46.6	54	-7.4
4804.0	AV	39.4	29	V	34.1	5.2	33.0	45.7	54	-8.3
7206.0	AV	35.8	236	H	37.4	6.1	33.5	45.8	54	-8.2
7206.0	AV	33.8	158	V	37.4	6.1	33.5	43.8	54	-10.2
2402.0	AV	95.7	104	H	29.1	3.7	34.0	94.5		(Fund.)
2402.0	AV	98.8	217	V	29.1	3.7	34.0	97.6		(Fund.)
4804.0	PK	47	69	H	34.1	5.2	33.0	53.3	74	-20.7
4804.0	PK	46.3	43	V	34.1	5.2	33.0	52.6	74	-21.4
7206.0	PK	41.1	218	H	37.4	6.1	33.5	51.1	74	-22.9
7206.0	PK	40.5	124	V	37.4	6.1	33.5	50.5	74	-23.5
2402.0	PK	99.4	121	H	29.1	3.7	34.0	98.2		(Fund.)
2402.0	PK	98.6	286	V	29.1	3.7	34.0	97.4		(Fund.)
Middle Channel (1G to 25GHz)										
4882.0	AV	40.4	135	H	34.1	5.2	33.0	46.7	54	-7.3
4882.0	AV	38.3	128	V	34.1	5.2	33.0	44.6	54	-9.4
7323.0	AV	35.5	214	H	37.4	6.1	33.5	45.5	54	-8.5
7323.0	AV	31.9	86	V	37.4	6.1	33.5	41.9	54	-12.1
2441.0	AV	96.4	73	H	29.1	3.7	34.0	95.2		(Fund.)
2441.0	AV	94.6	69	V	29.1	3.7	34.0	93.4		(Fund.)
4882.0	PK	47.5	47	H	34.1	5.2	33.0	53.8	74	-20.2
4882.0	PK	45.1	147	V	34.1	5.2	33.0	51.4	74	-22.6
7323.0	PK	42.5	252	H	37.4	6.1	33.5	52.5	74	-21.5
7323.0	PK	40.2	135	V	37.4	6.1	33.5	50.2	74	-23.8
2441.0	PK	99.4	49	H	29.1	3.7	34.0	98.2		(Fund.)
2441.0	PK	102.0	63	V	29.1	3.7	34.0	100.8		(Fund.)

High Channel (1G to 25GHz)										
4960.0	AV	40.5	28	H	34.1	5.2	33.0	46.8	54	-8.3
4960.0	AV	39.3	84	V	34.1	5.2	33.0	45.6	54	-9.2
7440.0	AV	37.5	252	H	37.4	6.1	33.5	47.5	54	-10.7
7440.0	AV	32.6	136	V	37.4	6.1	33.5	42.6	54	-12.5
2480.0	AV	95.3	174	H	29.1	3.7	34.0	94.1		(Fund.)
2480.0	AV	96.4	87	V	29.1	3.7	34.0	95.2		(Fund.)
4960.0	PK	50.9	346	H	34.1	5.2	33.0	57.2	74	-18.4
4960.0	PK	49.4	129	V	34.1	5.2	33.0	55.7	74	-20.6
7440.0	PK	42.8	252	H	37.4	6.1	33.5	52.8	74	-20.9
7440.0	PK	40.2	85	V	37.4	6.1	33.5	50.2	74	-22.3
2480.0	PK	102	107	H	29.1	3.7	34.0	100.8		(Fund.)
2480.0	PK	100.3	164	V	29.1	3.7	34.0	99.1		(Fund.)

Note: Testing is carried out with frequency rang 30MHz to the tenth harmonics, which above 4th Harmonics is close to the noise base even antenna close up to 1meter distance according the measurement of ANSI C63.4.

11. Band Edges Measurement

11.1 Limits of Band Edges Measurement

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak radiated power limits.

11.2 Test Equipment List and Details

See section 2.4.

11.3 Test Procedure



Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded. The spectrum plots (Peak RBW=VBW=100 kHz; Average RBW=1 MHz, VBW=10 Hz) are attached on the following pages.

11.4 Test Result



Test mode	Frequency MHz	Limit dBuV /dB	Result
Lowest	2390.00	<54dBuv	PASS
	2400.00	>20dB	PASS
Highest	2483.50	<54DBUV	PASS

The edge emissions are below the FCC 15.209 Limits. Please refer to the test plots below.



Lowest Bandedge-Horizontal

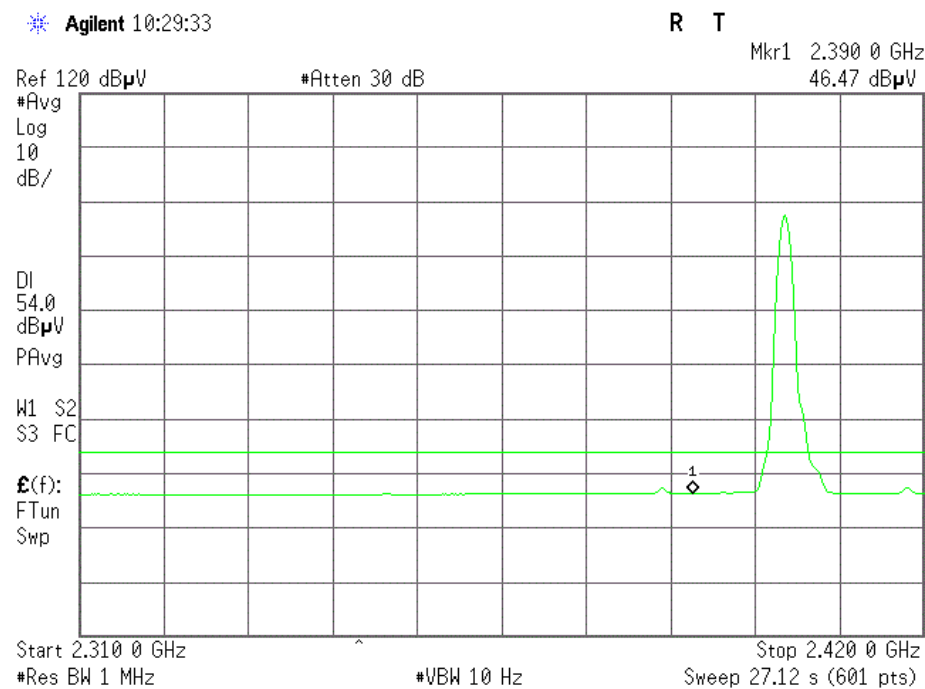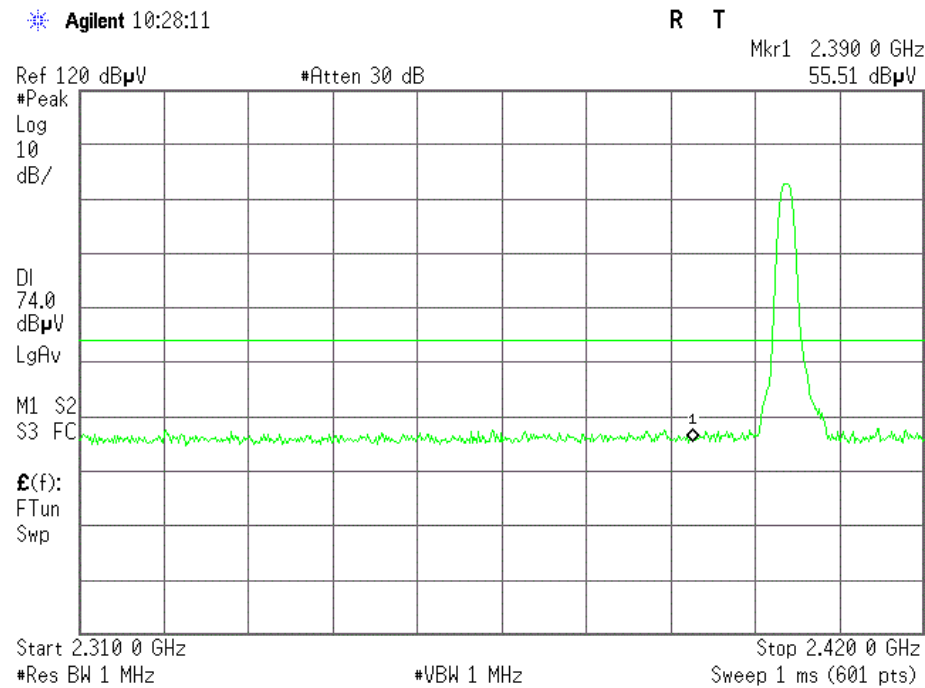

Lowest Bandedge- Vertical

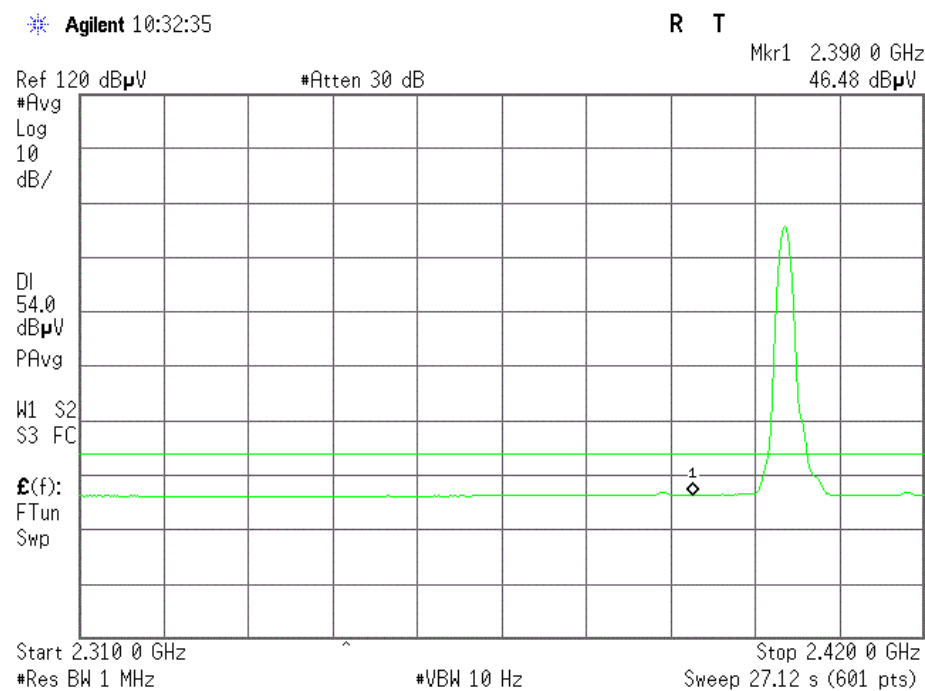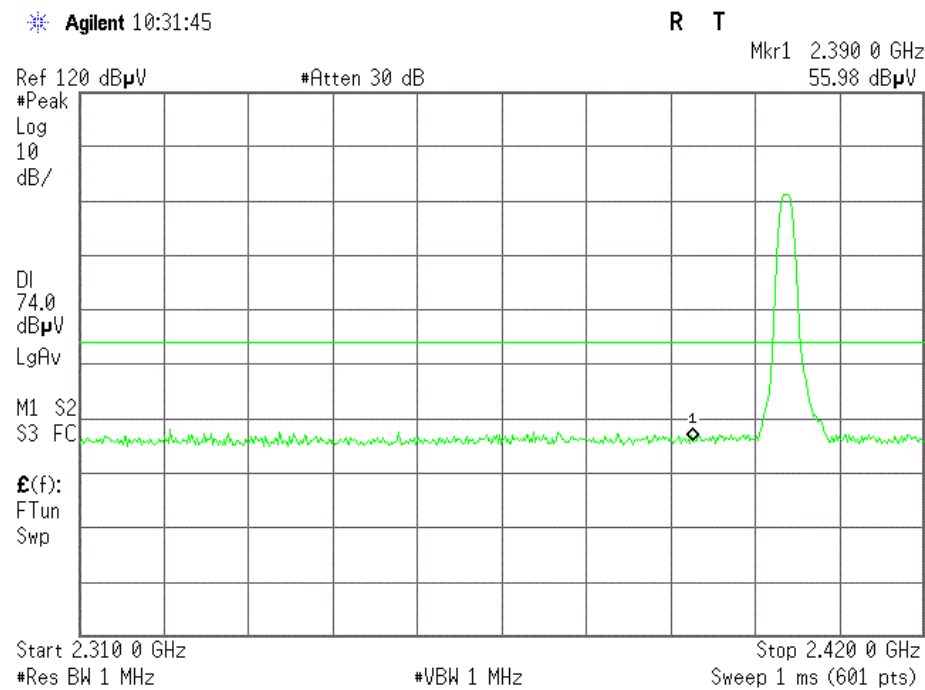

High Bandedge-Horizontal

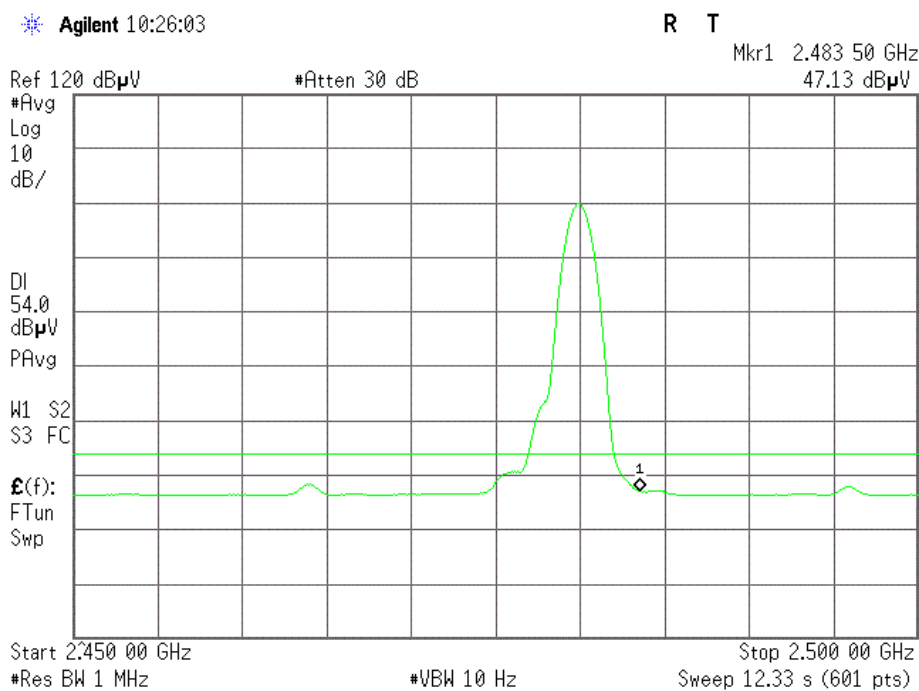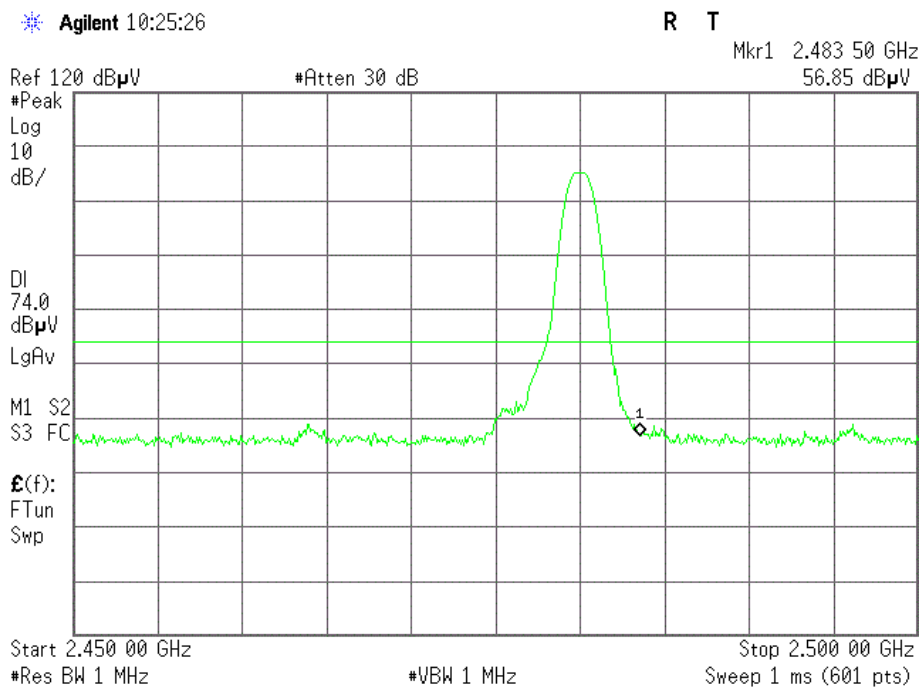

High Bandedge-Vertical

