

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092 F820318835169 email thrukang@kornet.net

Test Report

Product Name: Wireless PEN MOUSE Receiver

FCC ID: PE3DOYAK-R

Applicant:

ISV Co., Ltd.

**102-705 Bucheon Techno park 364
Samjung-Dong, O-jung-Gu,
Bucheon, korea**

Date Receipt: 09/17/2007

Date Tested: 09/17/2007

**APPLICANT: ISV Co., Ltd.
FCC ID: PE3DOYAK-R
REPORT :THRU-710002**

COVER SHEET

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092 F820318835169 email thrukang@kornet.net

TABLE OF CONTENTS

APPLICANT: ISV Co., Ltd.

FCC ID: PE3DOYAK-R

TEST REPORT CONTAINING:

PAGE 1.....TEST EQUIPMENT LIST
PAGE 2.....TEST PROCEDURE CONTD.
PAGE 3-5.....RADIATION INTERFERENCE TEST DATA
PAGE 6.....POWERLINE CONDUCTED
PAGE 7-8.....POWERLINE CONDUCTED PLOTS

EXHIBIT ATTACHMENTS:

EXHIBIT 1.....FCC ID LABEL SAMPLE
EXHIBIT 2.....SKETCH OF FCC ID LABEL LOCATION
EXHIBIT 3.....BLOCK DIAGRAM
EXHIBIT 4.....SCHEMATIC
EXHIBIT 5.....INSTRUCTION MANUAL
EXHIBIT 6.....FRONT VIEW EXTERNAL PHOTO
EXHIBIT 7.....REAR VIEW EXTERNAL PHOTO
EXHIBIT 8.....COMPONENT SIDE INTERNAL PHOTOS
EXHIBIT 9.....COPPER SIDE INTERNAL PHOTOS

APPLICANT: ISV CO., LTD..

FCC ID: PE3DOYAK-R

REPORT :THRU-710002

COVER SHEET

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092 F820318835169 email thrukang@kornet.net

TEST EQUIPMENT LIST

No	Description	Manufacturer	Model No.	Serial No.	Due Cal.	Used
1	Test Receiver	Rohde & Schwarz	ESHS 10	862970/018	2008.05.01	☐
2	Test Receiver	Rohde & Schwarz	ESVS 10	826008/014	2008.06.12	☐
3	Spectrum Analyzer	Hewlett Packard	8566B	2311A02394	2008.06.13	☒
4	Spectrum Display	Hewlett Packard	85662A	2542A12429	2008.06.13	☒
5	Quasi-peak Adapter	Hewlett Packard	85650A	2521A00887	2008.06.13	☐
6	RF Preselector	Hewlett Packard	85685A	2648A00504	2008.06.13	☐
7	Preamplifier	Hewlett Packard	8447F	2805A02570	2008.05.28	☐
8	Preamplifier	A.H. Systems	PAM-0118	164	2008.05.08	☐
9	Biconical Antenna	Eaton Corp.	94455-1	0977	2008.04.01	☐
10	Biconical Antenna	EMCO	3104C	9111-2468	2008.06.07	☒
11	Log Periodic Antenna	EMCO	3146	2051	2008.05.11	☒
12	Horn Antenna	A.H. Systems	SAS-571	414	2008.03.17	☒
13	Loop Antenna	Rohde & Schwarz	HFH2-Z2.335.4711.52	826532/006	2009.01.31	☐
14	Dipole Antenna	Rohde & Schwarz	VHAP	574	2007.12.12	☐
15	Dipole Antenna	Rohde & Schwarz	VHAP	575	2007.12.12	☐
16	Dipole Antenna	Rohde & Schwarz	UHAP	546	2007.12.12	☐
17	Dipole Antenna	Rohde & Schwarz	UHAP	547	2007.12.12	☐
18	Signal Generator	Hewlett Packard	8673D	2708A00448	2008.06.12	☒
19	Spectrum Analyzer	Advantest Corp.	R3261C	61720208	2008.06.12	☐
20	LISN	EMCO	3825/2	9111-1912	2008.12.12	☐
21	LISN	Kyoritsu	KNW-242	8-923-2	2009.05.23	☒
22	Modulation Analyzer	Hewlett Packard	8901B	3438A05094	2008.05.25	☒
23	Waveform Generator	Hewlett Packard	33120A	US34001190	2008.05.21	☐
24	Audio analyzer	Hewlett Packard	8903B	3011A12915	2008.05.21	☐
25	Digital Oscilloscope	Tektronix	TDS 340A	B012287	2008.06.13	☐

APPLICANT: ISV CO., LTD..

FCC ID: PE3DOYAK-R

REPORT :THRU-710002

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092 F820318835169 email thrukang@kornet.net

TEST PROCEDURE

GENERAL: This report shall NOT be reproduced except in full without the written approval of Thru Lab & Engineering. The UUT was transmitting a test signal during the testing.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.4-2003 using a HEWLETT PACKARD spectrum analyzer with a preselector. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100KHz and the video bandwidth was 300KHz up to 1.0GHz and 1.0MHz with a video BW of 3.0MHz above 1.0GHz. The ambient temperature of the UUT was 24°C with a humidity of 82%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Preselector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz) METER READING + ACF = FS

33 20 dBuV + 10.36 dB = 30.36 dBuV/m @ 3m

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.4-2003 using a 50uH LISN. Both lines were observed. The bandwidth of the spectrum analyzer was 10kHz with an appropriate sweep speed. The ambient temperature of the UUT was 23°C with a humidity of 68%.

ANSI STANDARD C63.4-2003 10.1.7 MEASUREMENT PROCEDURES: The UUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The UUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

The situation was similar for the conducted measurement except that the table did not rotate. The EUT was setup as described in ANSIC63.4-2003 with the EUT 40 cm from the vertical ground wall.

APPLICANT: ISV CO., LTD..

FCC ID: PE3DOYAK-R

REPORT :THRU-710002

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092 F820318835169 email thrukang@kornet.net

APPLICANT: ISV Co., Ltd.

FCC ID: PE3DOYAK-R

NAME OF TEST: RADIATION INTERFERENCE

RULES PART NUMBER: 15.249, 15.205, 15.209

REQUIREMENTS:

FIELD STRENGTH of Fundamental: @3M	FIELD STRENGTH of Harmonics	§ 15.209 30 - 88 MHz 40 dBuV/m
902-928 MHz		88 - 216 MHz 43.5
2.4-2.4835 GHz		216 - 960 MHz 46
94 dBuV/m @3m	54 dBuV/m @3m	ABOVE 960 MHz 54dBuV/m

EMISSIONS RADIATED OUTSIDE OF THE SPECIFIED FREQUENCY BANDS, EXCEPT FOR HARMONICS, SHALL BE ATTENUATED BY AT LEAST 50 dB BELOW THE LEVEL OF THE FUNDAMENTAL OR TO THE GENERAL RADIATED EMISSION LIMITS IN 15.209, WHICHEVER IS THE LESSER ATTENUATION.

TEST DATA: Horizontal

1ch

No	Emission Frequency (MHz)	Meter Reading dBuV	Ant. Polarity	Correction Factor dB	Cable Loss dB	Field Strength (dBuV/m)	Margin (dBuV)	Limit (dBuV/m)
1	2403.00	43.9	H	27.8	3.3	75.0	-19.0	94.0
2	4806.00	Not Detectable						54.0
3	7209.00							54.0
4	9612.00							54.0
5	12015.00							54.0
6	14414.80							54.0
7	16821.00							54.0

38ch

No	Emission Frequency (MHz)	Meter Reading dBuV	Ant. Polarity	Correction Factor dB	Cable Loss dB	Field Strength (dBuV/m)	Margin (dBuV)	Limit (dBuV/m)
1	2440.00	46.0	H	27.9	3.3	77.2	-16.8	94.0
2	4880.00	Not Detectable						54.0
3	7320.00							54.0
4	9760.00							54.0
5	12200.00							54.0
6	14640.00							54.0
7	17080.00							54.0

APPLICANT: ISV CO., LTD..

FCC ID: PE3DOYAK-R

REPORT :THRU-710002

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092 F820318835169 email thrukang@kornet.net

78ch

No	Emission Frequency (MHz)	Meter Reading dBuV	Ant. Polarity	Correction Factor dB	Cable Loss dB	Field Strength (dBuV/m)	Margin (dBuV)	Limit (dBuV/m)
1	2480.00	48.0	H	27.9	3.3	79.2	-14.8	94.0
2	4960.00	Not Detectable						54.0
3	7440.00							54.0
4	9920.00							54.0
5	12400.00							54.0
6	14880.00							54.0
7	17360.00							54.0

TEST DATA: Vertical

1ch

No	Emission Frequency (MHz)	Meter Reading dBuV	Ant. Polarity	Correction Factor dB	Cable Loss dB	Field Strength (dBuV/m)	Margin (dBuV)	Limit (dBuV/m)
1	2403.00	50.3	V	27.8	3.3	81.4	-12.6	94.0
2	4806.00	Not Detectable						54.0
3	7209.00							54.0
4	9612.00							54.0
5	12015.00							54.0
6	14414.80							54.0
7	16821.00							54.0

38ch

No	Emission Frequency (MHz)	Meter Reading dBuV	Ant. Polarity	Correction Factor dB	Cable Loss dB	Field Strength (dBuV/m)	Margin (dBuV)	Limit (dBuV/m)
1	2440.00	49.5	V	27.9	3.3	80.7	-13.3	94.0
2	4880.00	Not Detectable						54.0
3	7320.00							54.0
4	9760.00							54.0
5	12200.00							54.0
6	14640.00							54.0
7	17080.00							54.0

78ch

No	Emission Frequency (MHz)	Meter Reading dBuV	Ant. Polarity	Correction Factor dB	Cable Loss dB	Field Strength (dBuV/m)	Margin (dBuV)	Limit (dBuV/m)
1	2480.00	50.3	V	27.9	3.3	81.5	-12.5	94.0
2	4960.00	Not Detectable						54.0
3	7440.00							54.0
4	9920.00							54.0
5	12400.00							54.0
6	14880.00							54.0
7	17360.00							54.0

APPLICANT: ISV CO., LTD..

FCC ID: PE3DOYAK-R

REPORT :THRU-710002

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092 F820318835169 email thrukang@kornet.net

APPLICANT: ISV Co., Ltd.

FCC ID: PE3DOYAK-R

NAME OF TEST: RADIATION INTERFERENCE

RULES PART NUMBER: 15.209

REQUIREMENTS: § 15.209
30 - 88 MHz 40 dBuV/m @3M
88 - 216 MHz 43.5 dBuV/m
216 - 960 MHz 46 dBuV/m
ABOVE 960 MHz 54 dBuV/m

EMISSIONS RADIATED OUTSIDE OF THE SPECIFIED FREQUENCY BANDS, EXCEPT FOR HARMONICS, SHALL BE ATTENUATED BY AT LEAST 50 dB BELOW THE LEVEL OF THE FUNDAMENTAL OR TO THE GENERAL RADIATED EMISSION LIMITS IN 15.209, WHICHEVER IS THE LESSER ATTENUATION.

No	Emission Frequency (MHz)	Meter Reading dBuV	Ant. Polarity	Correction Factor dB	Cable Loss dB	Field Strength (dBuV/m)	Margin (dBuV)	Limit (dBuV/m)
1	63.45	15.3	H	6.7	1.2	23.1	-16.9	40.0
2	83.57	13.6	H	8.9	1.4	23.9	-16.1	40.0
3	131.90	10.2	V	13.1	1.9	25.2	-18.4	43.6
4	194.00	7.6	V	14.6	2.5	24.7	-18.9	43.6
5	207.20	10.2	H	10.8	2.6	23.6	-22.4	46.0
6	328.00	10.3	V	16.5	3.6	30.4	-15.6	46.0
7	447.20	8.0	V	16.3	4.5	28.8	-17.2	46.0
8	470.40	6.5	H	20.1	4.7	31.4	-14.6	46.0
9	578.40	8.0	H	18.6	5.4	31.9	-14.1	46.0
10	632.00	8.8	V	20.6	5.8	35.2	-10.8	46.0
11	856.80	6.9	H	23.2	7.1	37.2	-8.8	46.0

TEST PROCEDURE: ANSI STANDARD C63.4-2003. The spectrum was scanned from 30 to 1000 MHz. The unit was measured at ThruLab & Engineering 477-6, Hager-Ri, Yoju-Up, Yoju-GunKyunggi-Do, 469-803, Korea

TEST RESULTS: This unit DOES meet the FCC requirements.

PERFORMED BY: K.M.CHOI

DATE: 9/17/2007

APPLICANT: ISV CO., LTD..

FCC ID: PE3DOYAK-R

REPORT :THRU-710002

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092 F820318835169 email thrukang@kornet.net

APPLICANT: ISV Co., Ltd.

FCC ID: PE3DOYAK-R

NAME OF TEST: POWER LINE CONDUCTED INTERFERENCE

RULES PART NO.: 15.107

REQUIREMENTS:

	QUASI - PEAK	AVERAGE
.15 - 0.5 MHz	66-56 dBuV	56-46 dBuV
0.5 - 5.0	56	46
5.0 - 30.	60	50

TEST PROCEDURE: ANSI STANDARD C63.4-2003. The spectrum was scanned from .15 to 30 MHz.

THE HIGHEST EMISSION READ FOR LINE 1 WAS 40.0 dBuV @ 0.174MHz

THE HIGHEST EMISSION READ FOR LINE 2 WAS 39.8 dBuV @ 0.172MHz

THE PLOTS ON THE NEXT PAGE REPRESENT THE EMISSIONS READ FOR POWERLINE CONDUCTED FOR THIS DEVICE.

TEST RESULTS: Both lines were observed. The measurements indicate that the unit DOES appear to meet the FCC requirements for this class of equipment.

PERFORMED BY: K.M.CHOI

DATE: 9/17/2007

APPLICANT: ISV CO., LTD..

FCC ID: PE3DOYAK-R

REPORT :THRU-710002


THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092 F820318835169 email thrukang@kornet.net

LINE 1(H)

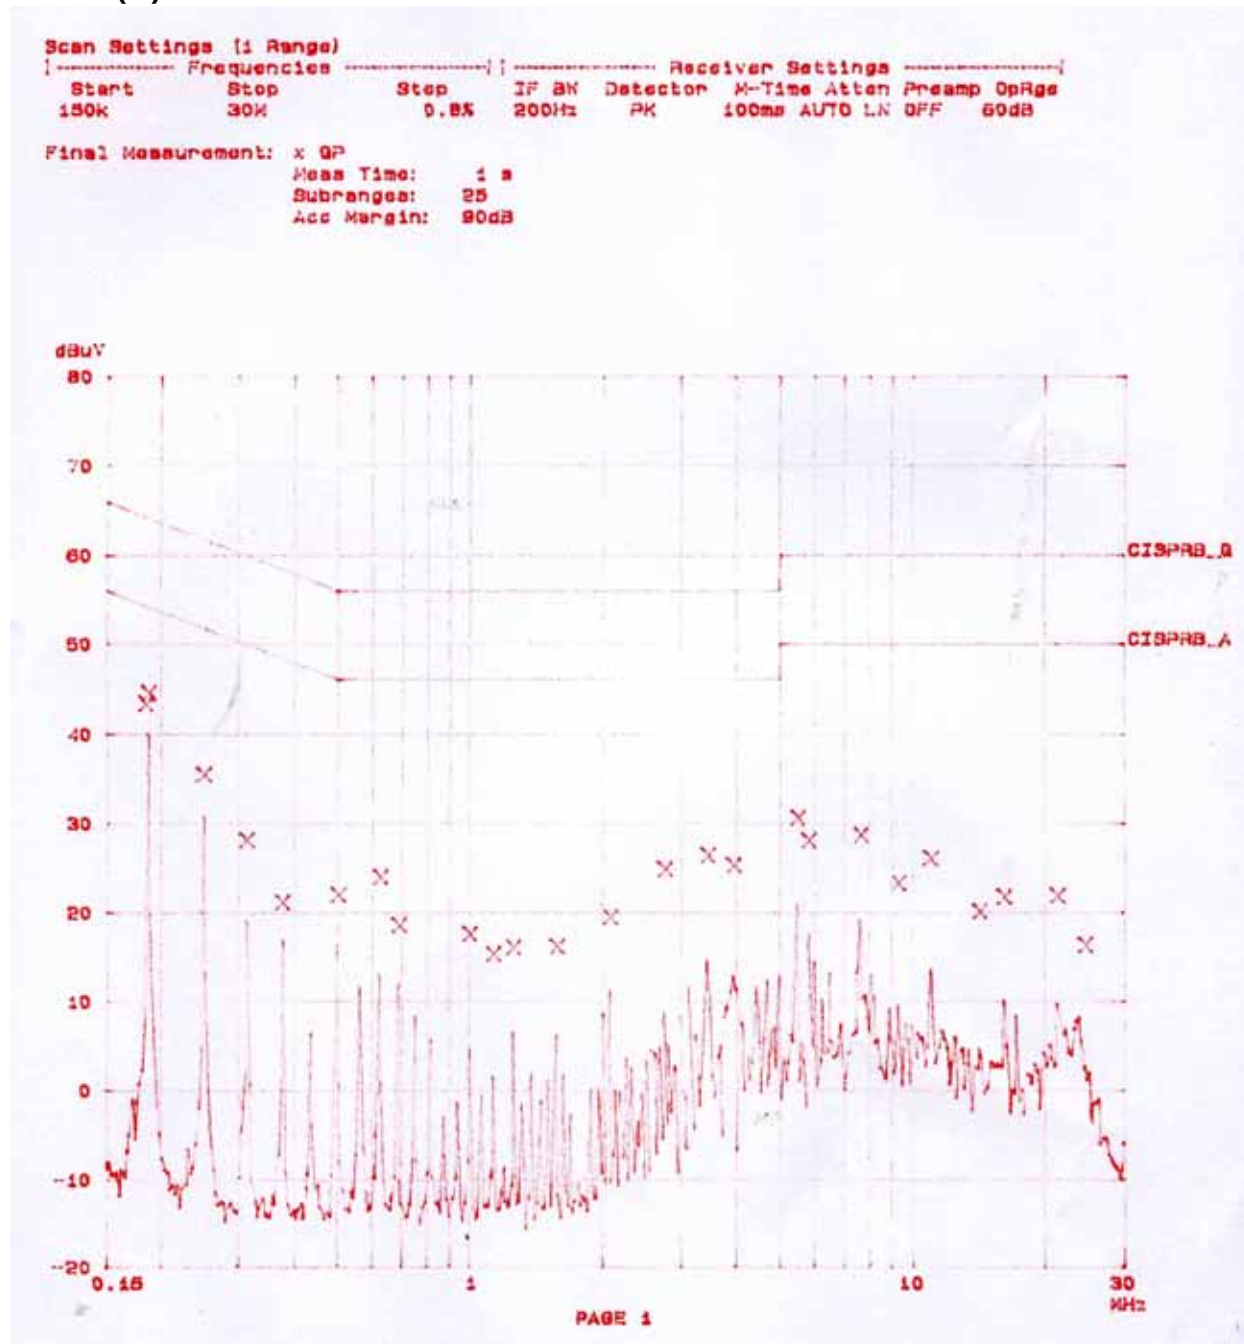

APPLICANT: ISV CO., LTD..

FCC ID: PE3DOYAK-R

REPORT :THRU-710002


THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092 F820318835169 email thrukang@kornet.net

LINE 2(N)

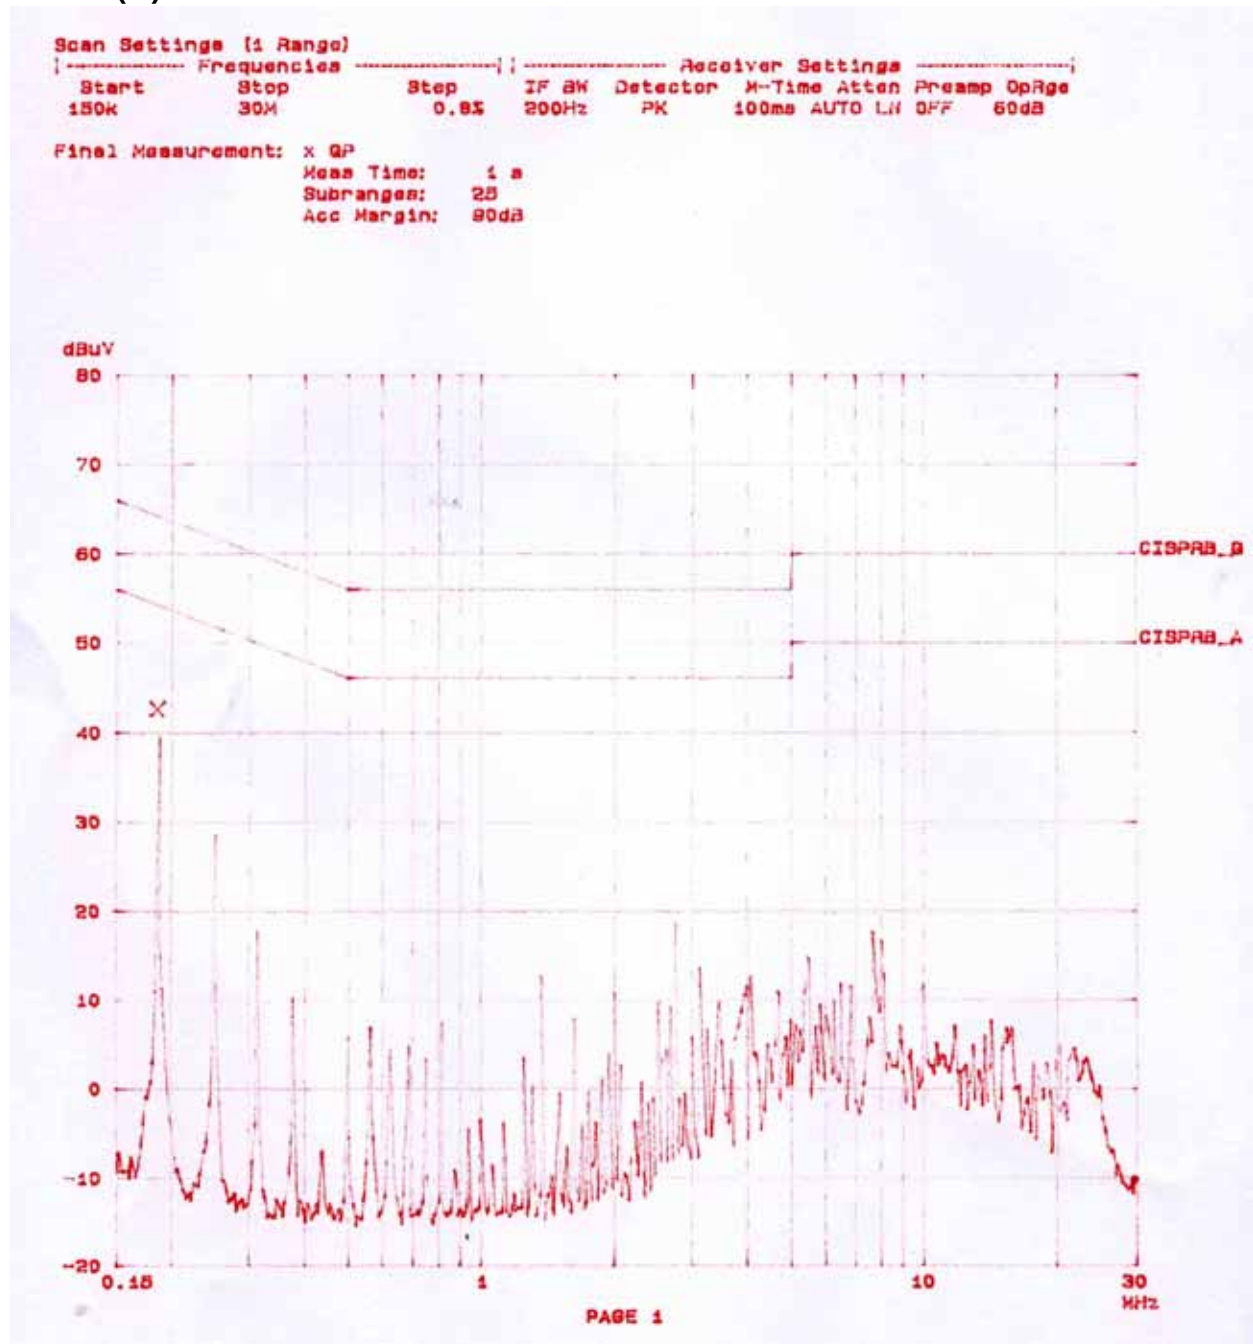

APPLICANT: ISV CO., LTD..

FCC ID: PE3DOYAK-R

REPORT :THRU-710002