

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092F820318835169 email thrukang@kornet.net

Test Report

Product Name: Digital Transmission System

FCC ID: PE3KT-24NT

**Applicant:
ISV Co., Ltd.**

**102-705 Bucheon Techno park 364
Samjung-Dong, O-jung-Gu,
Bucheon, Korea**

Date Receipt: 03/13/2008

Date Tested: 03/13/2008

APPLICANT: ISV CO., LTD.

FCC ID: PE3KT-24NT

REPORT #: THRU-803002

TABLE OF CONTENTS

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092F820318835169 email thrukang@kornet.net

APPLICANT: ISV Co., Ltd..

FCC ID: PE3KT-24NT

TABLE OF CONTENTS

TEST REPORT CONTAINING:

PAGE 1.....	TEST PROCEDURE
PAGE 2-4.....	RADIATION INTERFERENCE(Below 1G)
PAGE 5-7.....	RADIATION INTERFERENCE(Receiver)
PAGE 8.....	NUMBER OF HOPPING CHANNELS
PAGE 9-10.....	DWELL TIME OF A HOPPING CHANNEL
PAGE 11-13.....	OCCUPIED BANDWIDTH
PAGE 14.....	CARRIER FREQUENCY SEPARATION
PAGE 15-17.....	CONDUCTED POWER OUTPUT
PAGE 18.....	SPURIOUS EMISSIONS AT ANTENNA TERMINALS
PAGE 19-20.....	FIELD STRENGTH OF SPURIOUS EMISSIONS
PAGE 21-23.....	RADIATED SPURIOUS EMISSIONS INTO ADJACENT RESTRICTED BAND
PAGE 24.....	POWER LINE CONDUCTED INTERFERENCE
PAGE 25.....	EQUIPMENT LIST
PAGE 26-27.....	RF EXPOSURE REQUIREMENT

EXHIBITS INCLUDING:

REQUEST FOR CONFIDENTIALITY LETTER
BLOCK DIAGRAM
SCHEMATIC
USERS MANUAL
LABEL SAMPLE
LABEL LOCATION
EXTERNAL PHOTOGRAPHS
INTERNAL PHOTOGRAPHS
OPERATIONAL DESCRIPTION
TEST SET UP PHOTOGRAPH

APPLICANT: ISV CO., LTD.

FCC ID: PE3KT-24NT

REPORT #: THRU-803002

TABLE OF CONTENTS

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092F820318835169 email thrukang@kornet.net

TEST PROCEDURE

BANDWIDTH 20 dB: The measurements were made with the spectrum analyzer's resolution bandwidth and the span set as shown on plot.

POWER OUTPUT: The RF power output was measured conducted.

ANTENNA CONDUCTED EMISSIONS: The RBW = 100 kHz, VBW = 300 kHz and the span set to 10MHz and the spectrum was scanned from 30 MHz to the 10th Harmonic of the fundamental. Above 1GHz the resolution bandwidth was 1 MHz and the VBW = 3 MHz and the span to 50 MHz.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.4-2003 using an Agilent spectrum receiver with pre-selector. The bandwidth (RBW) of the spectrum receiver was 100kHz up to 1 GHz and 1 MHz above 1 GHz with an appropriate sweep speed. The VBW above 1 GHz was 3 MHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

REPORT #: THRU-803002

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092F820318835169 email thrukang@kornet.net

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

NAME OF TEST: RADIATION INTERFERENCE(Below 1G)

Rules Part No.: 15.209

REQUIREMENTS: 30 to 88 MHz: 40.0 dBuV/M @ 3 METERS
88 to 216 MHz: 43.5 dBuV/M
216 to 960 MHz: 46.0 dBuV/M
ABOVE 960 MHz: 54.0 dBuV/M

TEST RESULTS: A search was made of the spectrum from 30 to 1000 MHz and the measurements indicate that the unit DOES meet the FCC requirements.

TEST DATA:

* Tuning Frequency : 2401.056MHz

No	Emission Frequency (MHz)	Meter Reading dBuV/m	Ant. Polaritry	Correction Factor dB	Cable Loss dB	Field Strength (dBuV/m)	Margin (dBuV)	Limit (dBuV/m)
1	69.03	11.4	V	5.7	1.2	18.3	-21.7	40.0
2	83.48	12.5	H	8.9	1.4	22.8	-17.2	40.0
3	131.83	10.0	V	13.1	1.9	25.1	-18.4	43.5
4	246.20	9.5	H	11.7	3.1	24.2	-21.8	46.0
5	289.40	9.5	V	17.7	3.3	30.6	-15.4	46.0
6	470.00	6.3	V	20.2	4.7	31.2	-14.8	46.0
7	506.00	8.2	H	18.0	5.0	31.2	-14.8	46.0
8	573.50	6.5	V	18.5	5.4	30.4	-15.6	46.0
9	627.50	7.3	H	20.6	5.7	33.6	-12.4	46.0
10	877.00	5.2	V	23.6	7.2	36.0	-10.0	46.0
11	962.00	4.9	H	23.5	7.4	35.8	-10.2	46.0

SAMPLE CALCULATION: $FSdBuV/m = MR(dBuV) + ACFdB$.

TEST PROCEDURE: ANSI STANDARD C63.4-2003 using a Hewlett Packard Model 8566B spectrum analyzer, a Hewlett Packard Model 85685A Pre-selector, a Hewlett Packard Model 85650A Quasi-Peak adapter, and an appropriate antenna - see the test equipment list. The bandwidth of spectrum analyzer was 100 kHz with an appropriate sweep speed. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported.

PERFORMED BY: Kyoung Moon Choi

DATE: 03/13/08

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

REPORT #: THRU-803002

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092F820318835169 email thrukang@kornet.net

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

NAME OF TEST: RADIATION INTERFERENCE(Below 1G)

Rules Part No.: 15.209

REQUIREMENTS: 30 to 88 MHz: 40.0 dBuV/M @ 3 METERS
88 to 216 MHz: 43.5 dBuV/M
216 to 960 MHz: 46.0 dBuV/M
ABOVE 960 MHz: 54.0 dBuV/M

TEST RESULTS: A search was made of the spectrum from 30 to 1000 MHz and the measurements indicate that the unit DOES meet the FCC requirements.

TEST DATA:

* Tuning Frequency : 2441.664MHz

No	Emission Frequency (MHz)	Meter Reading dBuV/m	Ant. Polaritry	Correction Factor dB	Cable Loss dB	Field Strength (dBuV/m)	Margin (dBuV)	Limit (dBuV/m)
1	65.50	14.9	H	6.3	1.2	22.4	-17.6	40.0
2	81.85	13.9	V	8.5	1.4	23.8	-16.2	40.0
3	124.38	15.0	V	11.6	1.9	28.5	-15.0	43.5
4	148.85	7.6	V	16.5	2.1	26.3	-17.2	43.5
5	188.59	10.1	V	13.7	2.4	26.2	-17.3	43.5
6	195.22	8.3	H	14.9	2.5	25.6	-17.9	43.5
7	212.80	10.9	H	10.8	2.7	24.3	-19.3	43.6
8	470.40	7.2	H	20.1	4.7	32.1	-13.9	46.0
9	512.00	7.2	V	17.9	5.0	30.1	-15.9	46.0
10	629.60	9.5	H	20.7	5.7	35.9	-10.1	46.0
11	633.00	8.9	V	20.6	5.8	35.3	-10.7	46.0
12	873.60	5.6	V	23.6	7.2	36.3	-9.7	46.0

SAMPLE CALCULATION: $FSdBuV/m = MR(dBuV) + ACFdB$.

TEST PROCEDURE: ANSI STANDARD C63.4-2003 using a Hewlett Packard Model 8566B spectrum analyzer, a Hewlett Packard Model 85685A Pre-selector, a Hewlett Packard Model 85650A Quasi-Peak adapter, and an appropriate antenna - see the test equipment list. The bandwidth of spectrum analyzer was 100 kHz with an appropriate sweep speed. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported.

PERFORMED BY: Kyoung Moon Choi

DATE: 03/13/08

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

REPORT #: THRU-803002

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092F820318835169 email thrukang@kornet.net

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

NAME OF TEST: RADIATION INTERFERENCE(Below 1G)

Rules Part No.: 15.209

REQUIREMENTS: 30 to 88 MHz: 40.0 dBuV/M @ 3 METERS
88 to 216 MHz: 43.5 dBuV/M
216 to 960 MHz: 46.0 dBuV/M
ABOVE 960 MHz: 54.0 dBuV/M

TEST RESULTS: A search was made of the spectrum from 30 to 1000 MHz and the measurements indicate that the unit DOES meet the FCC requirements.

TEST DATA:

* Tuning Frequency : 2482.272MHz

No	Emission Frequency (MHz)	Meter Reading dBuV/m	Ant. Polaritry	Correction Factor dB	Cable Loss dB	Field Strength (dBuV/m)	Margin (dBuV)	Limit (dBuV/m)
1	44.96	10.2	H	11.9	0.9	23.0	-17.0	40.0
2	81.85	9.8	V	8.5	1.4	19.7	-20.3	40.0
3	122.81	10.0	H	11.3	1.9	23.2	-20.3	43.5
4	164.58	7.8	V	16.7	2.2	26.7	-16.8	43.5
5	182.15	6.9	H	14.4	2.4	23.7	-19.8	43.5
6	388.00	8.3	V	15.2	4.1	27.6	-18.4	46.0
7	473.80	10.9	H	19.8	4.7	35.4	-10.6	46.0
8	632.80	7.8	H	20.6	5.8	34.1	-11.9	46.0
9	752.00	5.5	H	21.0	6.5	32.9	-13.1	46.0
10	872.00	5.2	V	23.6	7.2	35.9	-10.1	46.0
11	886.40	4.9	H	23.6	7.2	35.7	-10.3	46.0
12	966.40	7.0	V	23.7	7.4	38.0	-8.0	46.0

SAMPLE CALCULATION: $FSdBuV/m = MR(dBuV) + ACFdB$.

TEST PROCEDURE: ANSI STANDARD C63.4-2003 using a Hewlett Packard Model 8566B spectrum analyzer, a Hewlett Packard Model 85685A Pre-selector, a Hewlett Packard Model 85650A Quasi-Peak adapter, and an appropriate antenna - see the test equipment list. The bandwidth of spectrum analyzer was 100 kHz with an appropriate sweep speed. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported.

PERFORMED BY: Kyoung Moon Choi

DATE: 03/13/08

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

REPORT #: THRU-803002

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092F820318835169 email thrukang@kornet.net

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

NAME OF TEST: RADIATION INTERFERENCE(Receiver)

Rules Part No.: 15.109

REQUIREMENTS: 30 to 88 MHz: 40.0 dBuV/M @ 3 METERS
88 to 216 MHz: 43.5 dBuV/M
216 to 960 MHz: 46.0 dBuV/M
ABOVE 960 MHz: 54.0 dBuV/M

TEST RESULTS: A search was made of the spectrum from 30 to 1000 MHz and the measurements indicate that the unit DOES meet the FCC requirements.

TEST DATA:

* Tuning Frequency : 2401.056MHz

No	Emission Frequency (MHz)	Meter Reading dBuV/m	Ant. Polaritry	Correction Factor dB	Cable Loss dB	Field Strength (dBuV/m)	Margin (dBuV)	Limit (dBuV/m)
1	49.55	15.5	H	11.0	1.0	27.5	-12.5	40.0
2	67.76	10.3	H	5.9	1.2	17.4	-22.6	40.0
3	79.59	10.2	V	8.0	1.3	19.4	-20.6	40.0
4	130.54	10.6	H	12.8	1.9	25.3	-18.2	43.5
5	171.02	7.2	V	16.0	2.3	25.5	-18.0	43.5
6	211.20	8.2	H	10.8	2.7	21.7	-21.8	43.5
7	456.00	6.7	V	17.4	4.6	28.7	-17.3	46.0
8	525.60	7.6	H	17.8	5.1	30.4	-15.6	46.0
9	750.40	5.7	H	21.0	6.5	33.1	-12.9	46.0
10	771.20	6.3	V	21.0	6.6	33.8	-12.2	46.0
11	873.60	6.3	H	23.6	7.2	37.0	-9.0	46.0
12	889.60	5.9	V	23.5	7.2	36.7	-9.3	46.0

SAMPLE CALCULATION: $FSdBuV/m = MR(dBuV) + ACFdB$.

TEST PROCEDURE: ANSI STANDARD C63.4-2003 using a Hewlett Packard Model 8566B spectrum analyzer, a Hewlett Packard Model 85685A Pre-selector, a Hewlett Packard Model 85650A Quasi-Peak adapter, and an appropriate antenna - see the test equipment list. The bandwidth of spectrum analyzer was 100 kHz with an appropriate sweep speed. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported.

PERFORMED BY: Kyoung Moon Choi

DATE: 03/13/08

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

REPORT #: THRU-803002

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092F820318835169 email thrukang@kornet.net

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

NAME OF TEST: RADIATION INTERFERENCE(Receiver)

Rules Part No.: 15.109

REQUIREMENTS: 30 to 88 MHz: 40.0 dBuV/M @ 3 METERS
 88 to 216 MHz: 43.5 dBuV/M
 216 to 960 MHz: 46.0 dBuV/M
 ABOVE 960 MHz: 54.0 dBuV/M

TEST RESULTS: A search was made of the spectrum from 30 to 1000 MHz and the measurements indicate that the unit DOES meet the FCC requirements.

TEST DATA:

* Tuning Frequency : 2441.664MHz

No	Emission Frequency (MHz)	Meter Reading dBuV/m	Ant. Polaritry	Correction Factor dB	Cable Loss dB	Field Strength (dBuV/m)	Margin (dBuV)	Limit (dBuV/m)
1	37.71	14.4	V	12.9	0.8	28.0	-12.0	40.0
2	70.37	10.8	H	5.6	1.2	17.6	-22.4	40.0
3	77.39	10.2	V	7.4	1.3	18.9	-21.1	40.0
4	150.96	10.6	V	16.8	2.1	29.5	-14.0	43.5
5	194.11	10.6	H	14.6	2.5	27.7	-15.8	43.5
6	211.60	11.2	H	10.8	2.7	24.6	-18.9	43.5
7	433.60	7.5	H	16.0	4.5	28.0	-18.0	46.0
8	469.60	6.2	V	20.1	4.7	31.0	-15.0	46.0
9	572.80	7.0	V	18.5	5.4	30.9	-15.1	46.0
10	722.40	5.0	V	21.3	6.3	32.6	-13.4	46.0
11	828.80	6.2	H	22.4	6.9	35.6	-10.4	46.0
12	886.40	6.1	V	23.6	7.2	36.9	-9.1	46.0

SAMPLE CALCULATION: $FSdBuV/m = MR(dBuV) + ACFdB$.

TEST PROCEDURE: ANSI STANDARD C63.4-2003 using a Hewlett Packard Model 8566B spectrum analyzer, a Hewlett Packard Model 85685A Pre-selector, a Hewlett Packard Model 85650A Quasi-Peak adapter, and an appropriate antenna - see the test equipment list. The bandwidth of spectrum analyzer was 100 kHz with an appropriate sweep speed. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported.

PERFORMED BY: Kyoung Moon Choi

DATE: 03/13/08

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

REPORT #: THRU-803002

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092F820318835169 email thrukang@kornet.net

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

NAME OF TEST: RADIATION INTERFERENCE(Receiver)

Rules Part No.: 15.109

REQUIREMENTS: 30 to 88 MHz: 40.0 dBuV/M @ 3 METERS
88 to 216 MHz: 43.5 dBuV/M
216 to 960 MHz: 46.0 dBuV/M
ABOVE 960 MHz: 54.0 dBuV/M

TEST RESULTS: A search was made of the spectrum from 30 to 1000 MHz and the measurements indicate that the unit DOES meet the FCC requirements.

TEST DATA:

* Tuning Frequency : 2482.272MHz

No	Emission Frequency (MHz)	Meter Reading dBuV/m	Ant. Polaritry	Correction Factor dB	Cable Loss dB	Field Strength (dBuV/m)	Margin (dBuV)	Limit (dBuV/m)
1	46.24	15.2	V	11.6	1.0	27.8	-12.2	40.0
2	114.72	11.5	H	10.9	1.8	24.2	-19.3	43.5
3	117.66	11.5	V	10.9	1.8	24.1	-19.4	43.5
4	189.42	8.3	V	13.6	2.4	24.3	-19.2	43.5
5	267.20	10.1	H	13.8	3.2	27.1	-18.9	46.0
6	340.80	7.5	H	15.7	3.7	26.9	-19.1	46.0
7	474.40	7.9	H	19.7	4.7	32.4	-13.6	46.0
8	500.80	7.9	V	18.1	4.9	31.0	-15.0	46.0
9	629.60	8.1	V	20.7	5.7	34.5	-11.5	46.0
10	771.20	5.5	H	21.0	6.6	33.0	-13.0	46.0
11	878.40	6.8	H	23.6	7.2	37.6	-8.4	46.0
12	936.80	5.6	V	23.1	7.4	36.1	-9.9	46.0

SAMPLE CALCULATION: $FSdBuV/m = MR(dBuV) + ACFdB$.

TEST PROCEDURE: ANSI STANDARD C63.4-2003 using a Hewlett Packard Model 8566B spectrum analyzer, a Hewlett Packard Model 85685A Pre-selector, a Hewlett Packard Model 85650A Quasi-Peak adapter, and an appropriate antenna - see the test equipment list. The bandwidth of spectrum analyzer was 100 kHz with an appropriate sweep speed. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported.

PERFORMED BY: Kyoung Moon Choi

DATE: 03/13/08

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

REPORT #: THRU-803002

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092F820318835169 email thrukang@kornet.net

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT


NAME OF TEST: NUMBER OF HOPPING CHANNELS

Rules Part No.: 15.247(a)(1)

Requirements:

902-928 MHz	If the 20 dB bandwidth is less than 250 kHz, the system shall use at least 50 hopping frequencies.
	If the 20 dB bandwidth is 250 kHz or greater, the system shall use at least 25 hopping frequencies.
2400-2483.5 MHz	At least 15 channels
5725-5850 MHz	At least 75 channels

Test Data: The number of hops(94)

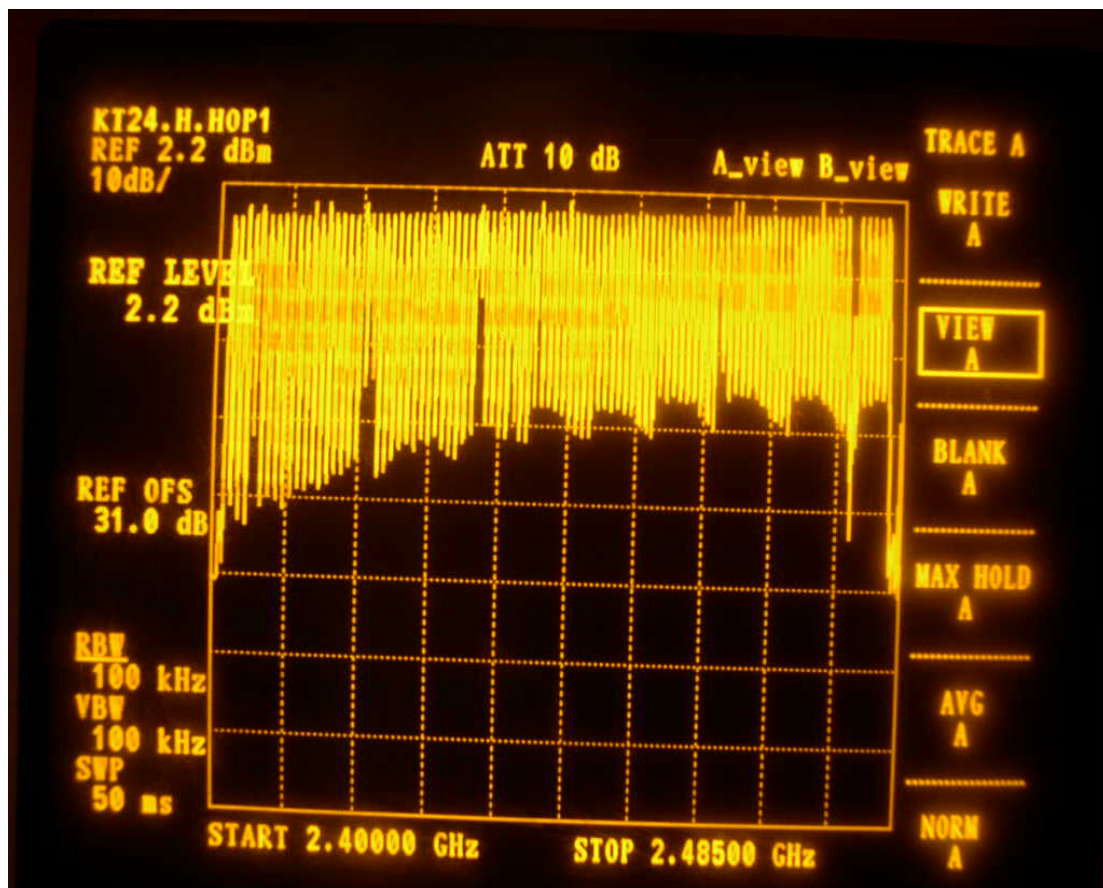

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

REPORT #: THRU-803002

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092F820318835169 email thrukang@kornet.net

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

NAME OF TEST: DWELL TIME OF A HOPPING CHANNEL

Rules Part No.: 15.247(a)(1)(i)

Requirements:

902-928 MHz	If 20 dB bandwidth is less than 250 kHz, Dwell time < = 0.4 seconds in a 20 second period.
	If 20 dB bandwidth is 250 kHz or greater, Dwell time < = 0.4 seconds in a 10 second period.
2400-2483.5 MHz	< = 0.4 seconds in a 0.4 seconds multiplied the number of hopping channels employed.
5725-5850 MHz	< = 0.4 seconds in a 30 second period.

Test Data:

OCCUPANCY Time of Frequency Hopping System


Test time Period : $0.4 \times 94 = 37.6\text{sec}$,

Hopping Time which in 1sec : $11 / 10\text{sec} = 1.1/\text{sec}$

=> The Maximum OCCUPANCY Time within 37.6Sec :

$(920\mu\text{s} \times 1100) / (94 \times 37.6) = 286.328\text{msec}$

Test Result : The Average Occupancy Time is Less Than 0.4sec.

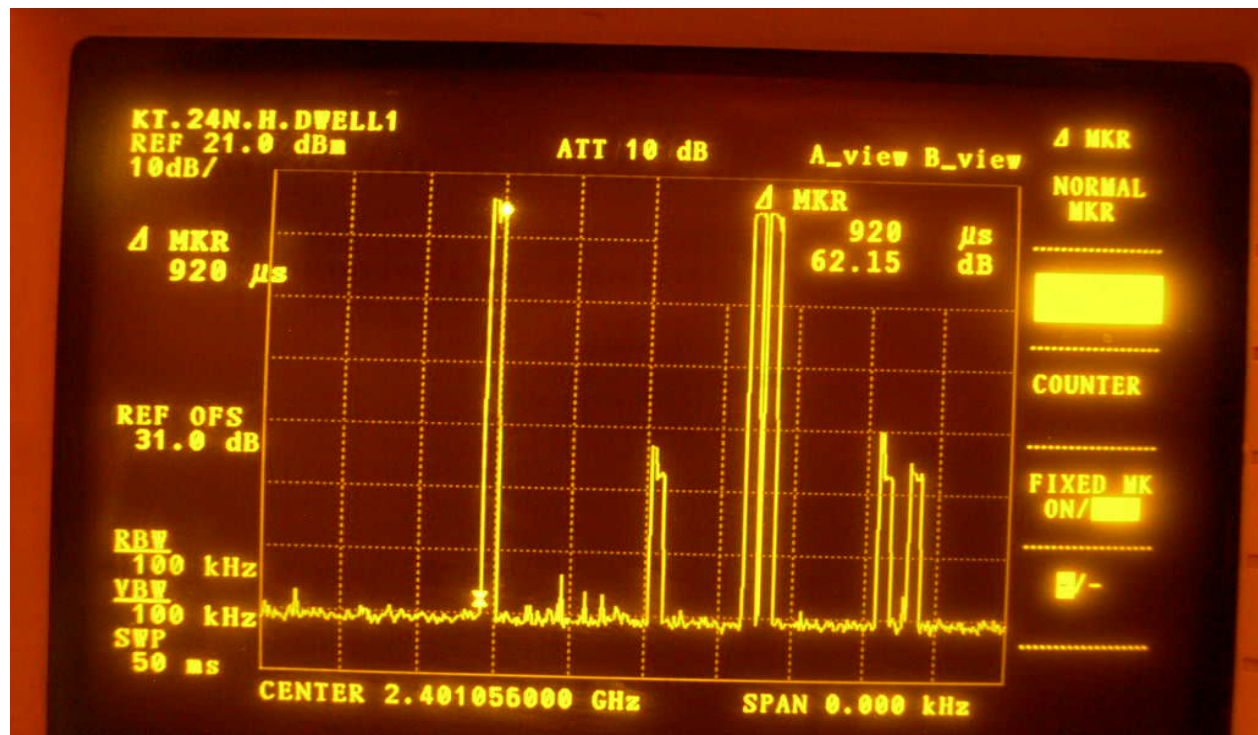

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

REPORT #: THRU-803002


THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092F820318835169 email thrukang@kornet.net

The Dwell time(2)

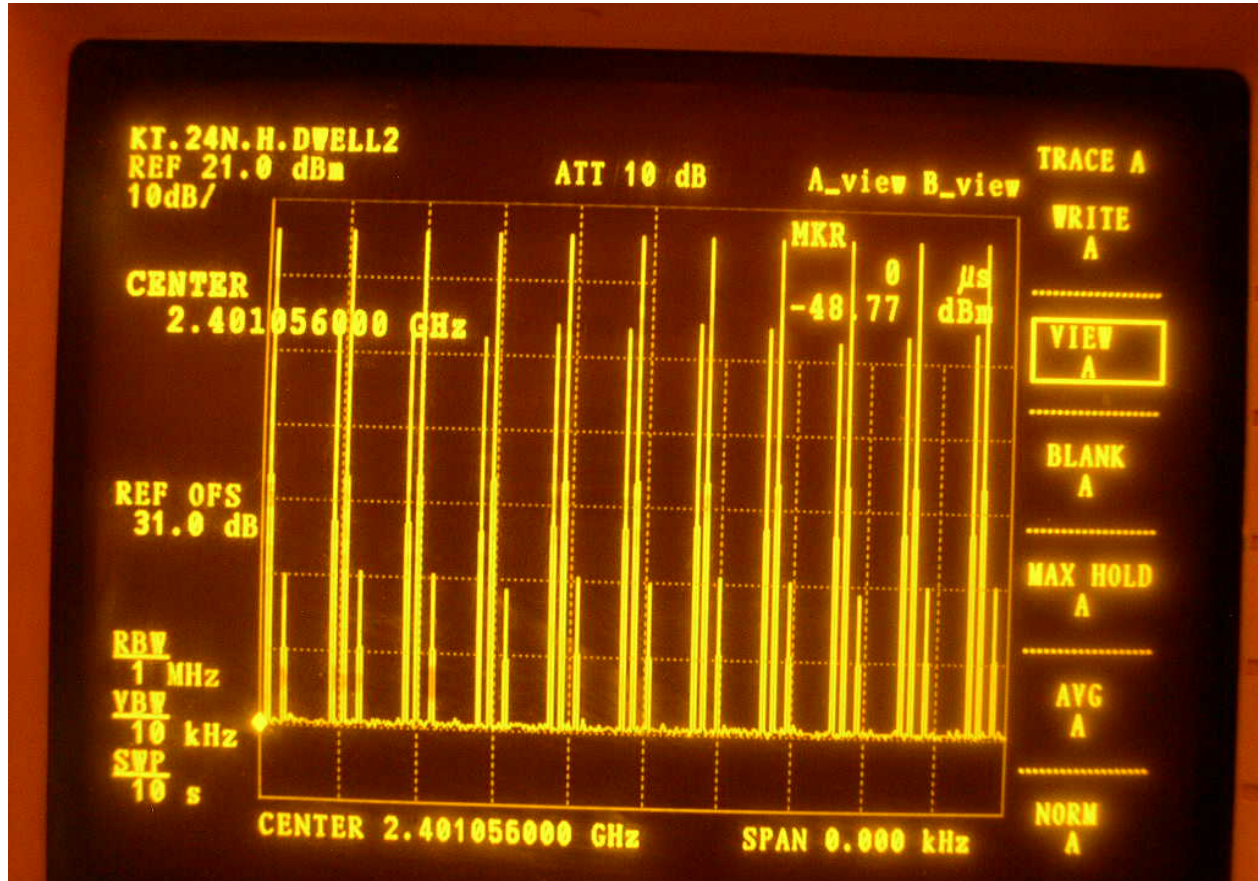

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

REPORT #: THRU-803002

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092F820318835169 email thrukang@kornet.net

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

NAME OF TEST: OCCUPIED BANDWIDTH

Rules Part No.: 15.247(a)(2)

Requirements: 20 dB bandwidth

Test Data: See the following plot

Channel	Frequency(MHz)	Measurement Level(kHz)	Required Limit(kHz)	Result
00	2401.056	563	>500	Pass
47	2441.664	648	>500	Pass
94	2482.272	583	>500	Pass

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

REPORT #: THRU-803002


THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun


Kyunggi-Do, 469-803, Korea

T820318835092F820318835169 email thrukang@kornet.net

Low channel

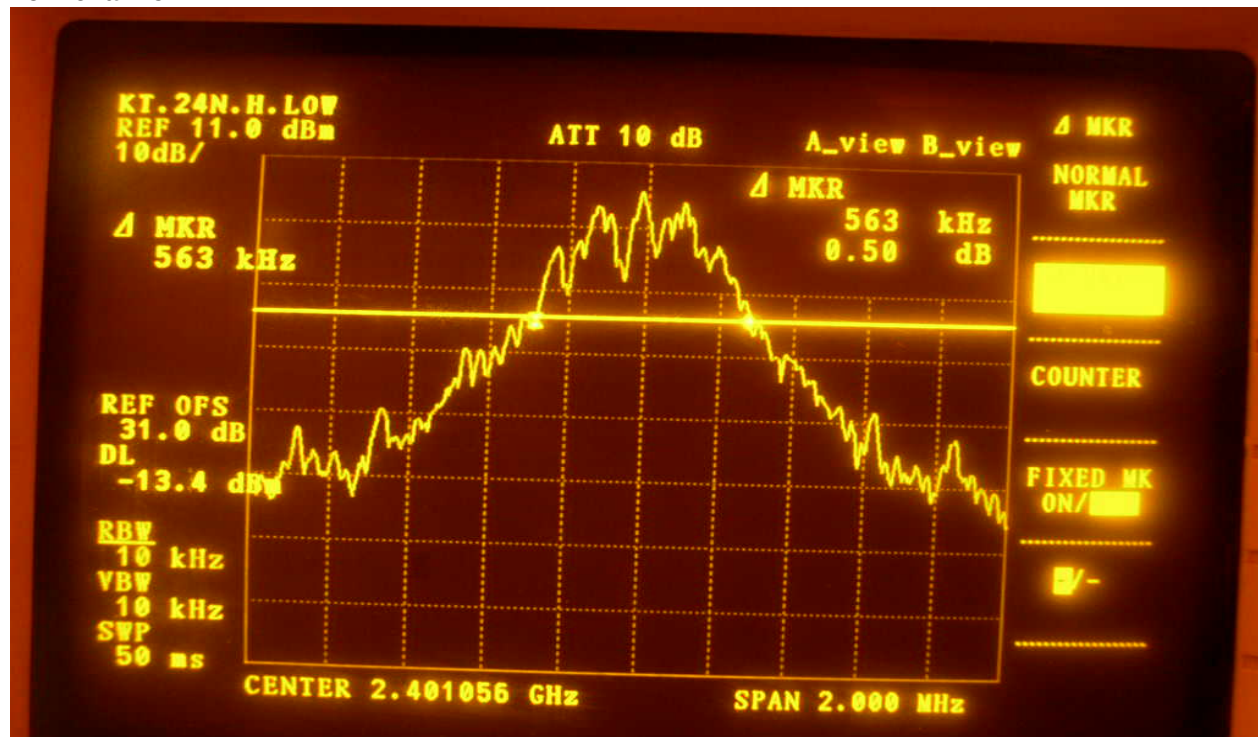

Mid channel

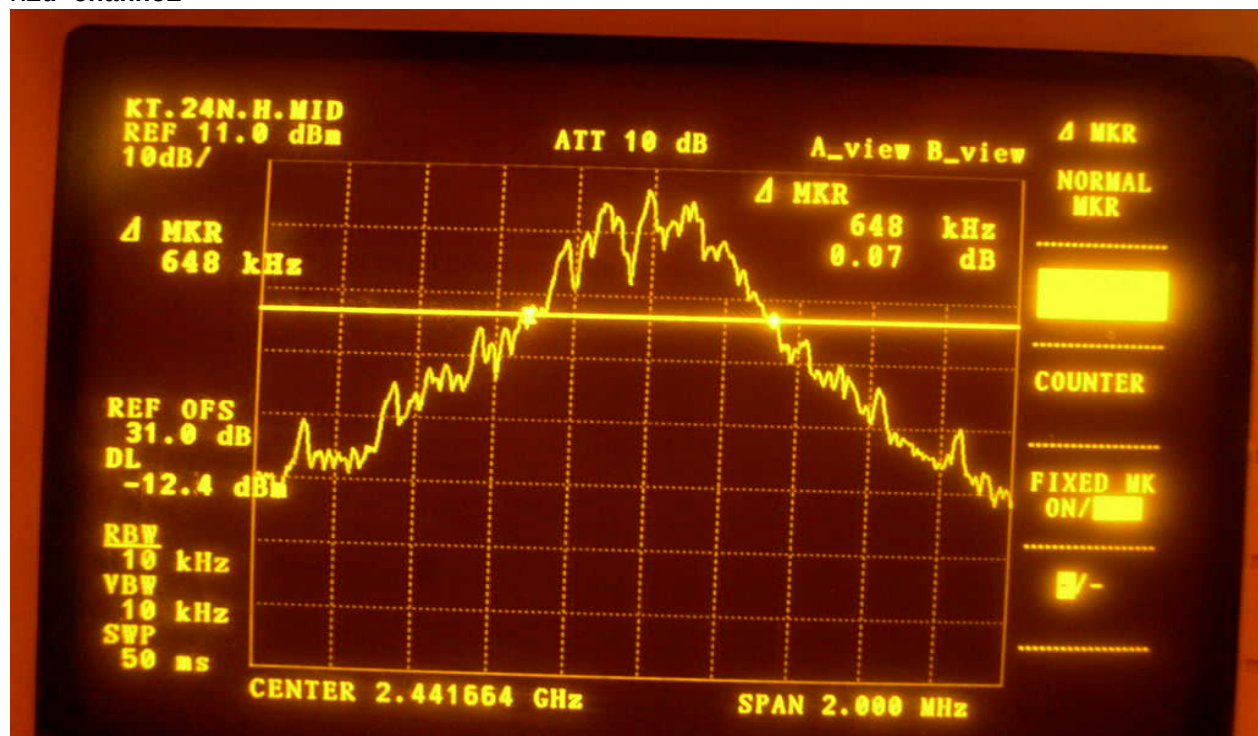

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

REPORT #: THRU-803002


THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092F820318835169 email thrukang@kornet.net

High channel

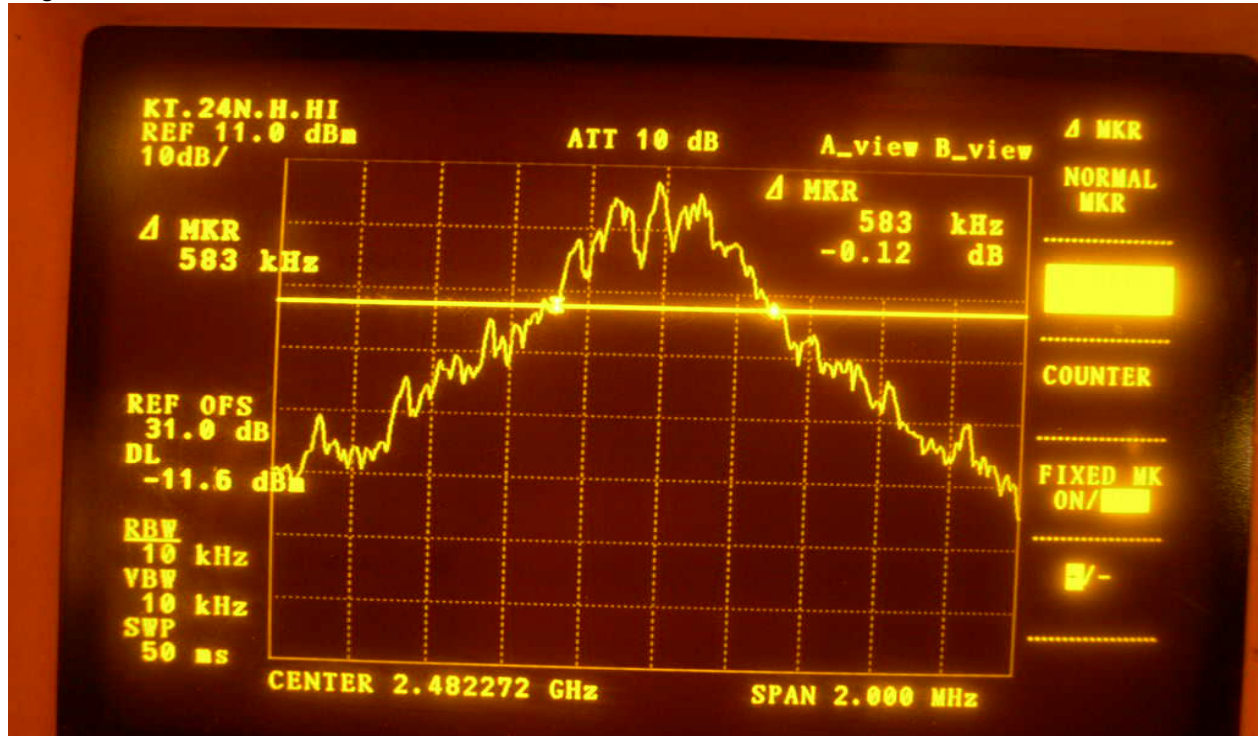

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

REPORT #: THRU-803002

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092F820318835169 email thrukang@kornet.net

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT


NAME OF TEST: CARRIER FREQUENCY SEPARATION

Rules Part No.: 15.247(a)(1)

Requirements: The hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Test Data:

The channel frequency separation(886kHz)

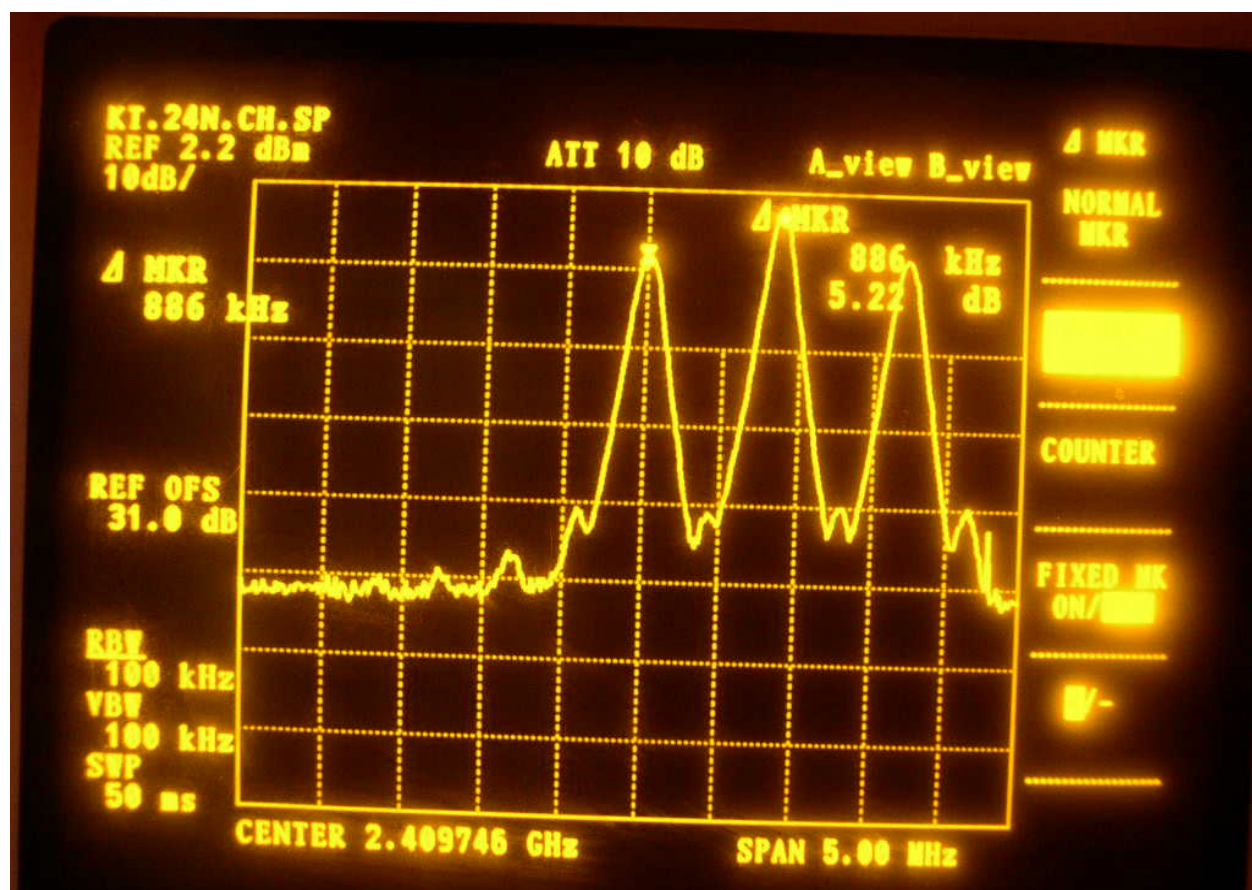

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

REPORT #: THRU-803002

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092F820318835169 email thrukang@kornet.net

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

NAME OF TEST: CONDUCTED POWER OUTPUT

Rules Part No.: 15.247(b)(1)

Requirements: The maximum peak output power shall not exceed 1 watt (30 dBm). If directional transmitting antennas with a gain of more than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

Both the base and handset have a maximum power output of less than +30 dBm. Power was measured by disconnecting the antennas and measuring across a 50 ohm load as recommended by the manufacturer using a HP spectrum analyzer Model 8566B. The antennas are non-directional and do not exceed 6dBi gain. The power output was measured at three places in the band highest is reported below.



Test Data:

Frequency	dBm	mW
Low Channel 2401.056 MHz	-4.60 dBm	0.346 mW
Mid Channel 2441.664 MHz	-5.60 dBm	0.275 mW
High Channel 2482.272 MHz	-2.90 dBm	0.512 mW

Three places in the band were measured and the highest power presented above.

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

REPORT #: THRU-803002

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun


Kyunggi-Do, 469-803, Korea

T820318835092F820318835169 email thrukang@kornet.net

Low channel



Mid channel

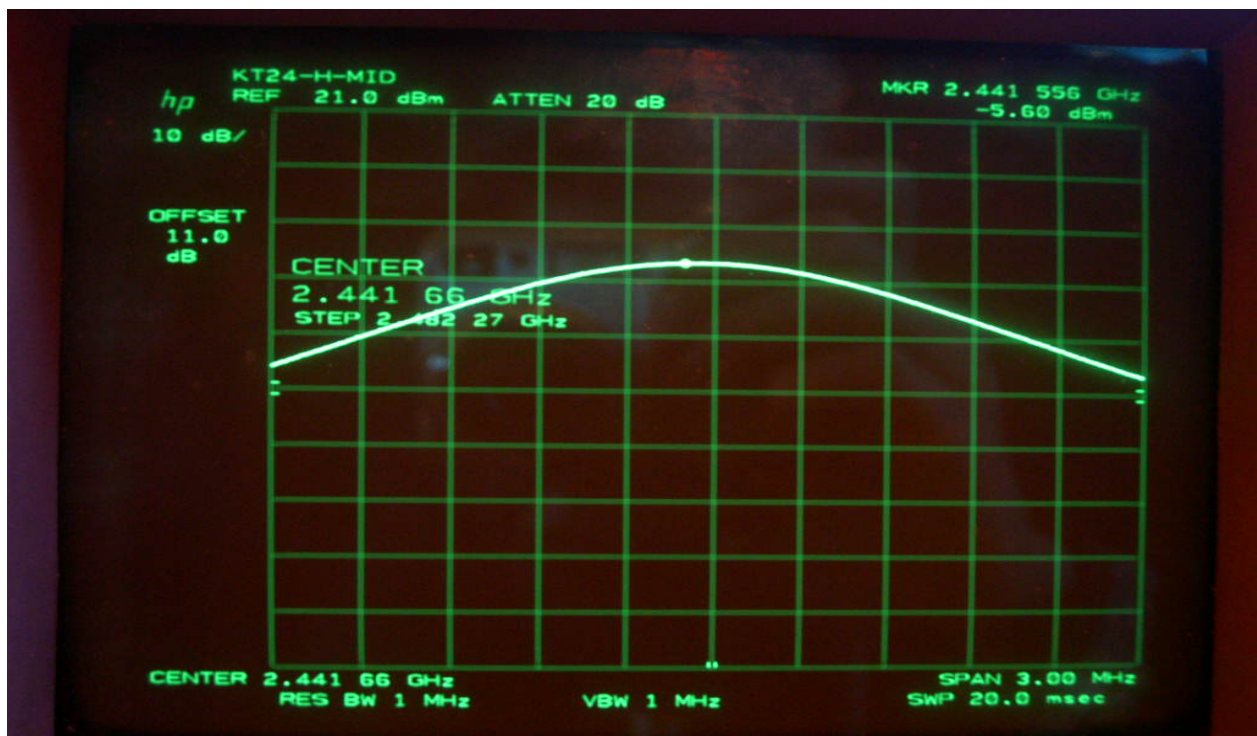

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

REPORT #: THRU-803002

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092F820318835169 email thrukang@kornet.net

High channel



APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

REPORT #: THRU-803002

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092F820318835169 email thrukang@kornet.net

APPLICANT: ISV Co., Ltd.


FCC ID: PE3KT-24NT

NAME OF TEST: SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Rules Part No.: 15.247(c)

Requirements: Emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.

Method of Measuring:

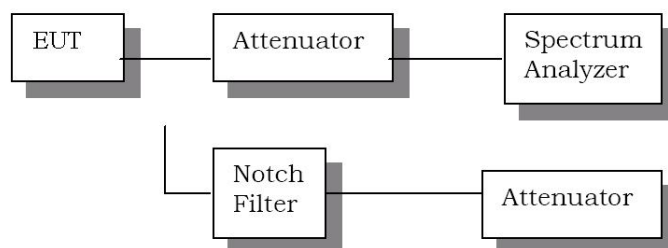

Note: The spectrum was scanned to the tenth harmonic.

Test Data:

"Not Applicable"

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

REPORT #: THRU-803002

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092F820318835169 email thrukang@kornet.net

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

NAME OF TEST: FIELD STRENGTH OF SPURIOUS EMISSIONS


Rules Part No.: 15.247(c), 15.205 & 15.209(b)

Requirements:

(Fundamental) Frequency	(Field Strength) Limits
902 - 928MHz	127.37dBuV/m
2.4 - 2.4835GHz	54 dBuV/m @ 3m
30 - 88 MHz	40 dBuV/m @3m
88 -216 MHz	43.5 dBuV/m @3m
216 -960 MHz	46 dBuV/m @3m
ABOVE 960 MHz	54dBuV/m

Emissions that fall in the restricted bands (15.205) must be less than or equal to 500 uV/m (54dBuV/m). Spurious not in a restricted band must be 20 dBc.

Test Setup

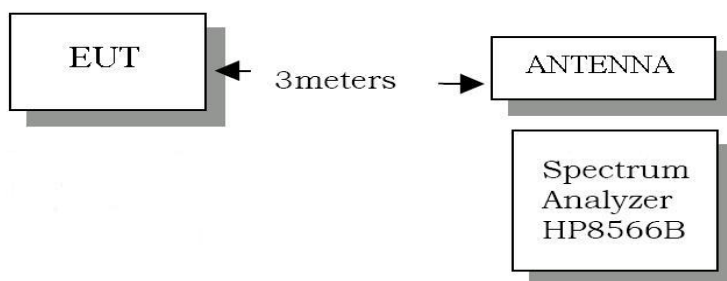

Equipment placed 80cm above ground on a rotatable platform.

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

REPORT #: THRU-803002

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092F820318835169 email thrukang@kornet.net

Test Data:

Low : 2401.056MHz

No	Emission Frequency (MHz)	Meter Reading dBuV/m	Ant. Polarity	Correction Factor dB	Cable Loss dB	Field Strength (dBuV/m)	Margin (dBuV)	Limit (dBuV/m)	Mode
1	4802.11	2.0	H	33.7	4.6	40.3	-13.7	54.0	PK
2	7203.16	14.3	H	36.1	5.7	56.2	2.2	54.0	PK
3	4802.11	1.1	V	33.7	4.6	39.4	-14.6	54.0	PK
4	7203.16	12.7	V	36.1	5.7	54.6	0.6	54.0	PK

No	Emission Frequency (MHz)	Meter Reading dBuV/m	Ant. Polarity	Correction Factor dB	Cable Loss dB	Field Strength (dBuV/m)	Margin (dBuV)	Limit (dBuV/m)	Mode
1	7203.16	9.4	H	36.1	5.7	51.3	-2.7	54.0	AV
2	7203.16	7.3	V	36.1	5.7	49.2	-4.8	54.0	AV

Mid : 2441.664MHz

No	Emission Frequency (MHz)	Meter Reading dBuV/m	Ant. Polarity	Correction Factor dB	Cable Loss dB	Field Strength (dBuV/m)	Margin (dBuV)	Limit (dBuV/m)	Mode
1	4883.33	4.1	H	33.9	4.6	42.7	-11.3	54.0	PK
2	7325.00	13.2	H	36.2	5.8	55.2	1.2	54.0	PK
3	4883.33	2.0	V	33.9	4.6	40.6	-13.4	54.0	PK
4	7325.00	13.0	V	36.2	5.8	55.0	1.0	54.0	PK

No	Emission Frequency (MHz)	Meter Reading dBuV/m	Ant. Polarity	Correction Factor dB	Cable Loss dB	Field Strength (dBuV/m)	Margin (dBuV)	Limit (dBuV/m)	Mode
1	7325.00	9.8	H	36.2	5.8	51.8	-2.2	54.0	AV
2	7325.00	10.1	V	36.2	5.8	52.1	-1.9	54.0	AV

High : 2480.272MHz

No	Emission Frequency (MHz)	Meter Reading dBuV/m	Ant. Polarity	Correction Factor dB	Cable Loss dB	Field Strength (dBuV/m)	Margin (dBuV)	Limit (dBuV/m)	Mode
1	4964.54	2.4	H	34.2	4.7	41.2	-12.8	54.0	PK
2	7446.81	12.1	H	36.3	5.9	54.2	0.2	54.0	PK
3	4964.54	4.3	V	34.2	4.7	43.1	-10.9	54.0	PK
4	7446.81	10.2	V	36.3	5.9	52.3	-1.7	54.0	PK

No	Emission Frequency (MHz)	Meter Reading dBuV/m	Ant. Polarity	Correction Factor dB	Cable Loss dB	Field Strength (dBuV/m)	Margin (dBuV)	Limit (dBuV/m)	Mode
1	7446.81	7.5	H	36.3	5.9	49.6	-4.4	54.0	AV
2	7446.81	6.7	V	36.3	5.9	48.8	-5.2	54.0	AV

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

REPORT #: THRU-803002

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092F820318835169 email thrukang@kornet.net

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

NAME OF TEST: RADIATED SPURIOUS EMISSIONS INTO ADJACENT RESTRICTED BAND

Rule Parts No.: Part 15.205

Requirements: Emissions that fall in the restricted bands (15.205). These emissions must be less than or equal to 500 uV/m (54dBuV/m). Emissions not in the restricted band must be 20 dBc.

Test Data

Result :

1. Reading dBuV + Step Atten Value(20dB) - PAM-0118 Preamplifier Gain(45dB)

2. 1 + ANT Factor + Cable Loss

Low

PK : $43.30 + 20 - 45 = 20.1\text{dBuV}$

AV : $31.90 + 20 - 45 = 7.8\text{dBuV}$

High

PK : $43.70 + 20 - 45 = 21.5\text{dBuV}$

AV : $32.10 + 20 - 45 = 7.9\text{dBuV}$

No	Emission Frequency (MHz)	Meter Reading dBuV/m	Ant. Polarity	Correction Factor dB	Cable Loss dB	Field Strength (dBuV/m)	Margin (dBuV)	Limit (dBuV/m)
	Low							
PK	2395.35	18.3	V	27.8	3.3	49.4	-4.6	54.0
AV	2395.35	6.9	V	27.8	3.3	38.0	-16.0	54.0
	HIGH							
PK	2484.76	18.7	V	27.9	3.3	49.9	-4.1	54.0
AV	2484.76	7.1	V	27.9	3.3	38.3	-15.7	54.0

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

REPORT #: THRU-803002



THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092F820318835169 email thrukang@kornet.net

Low channel

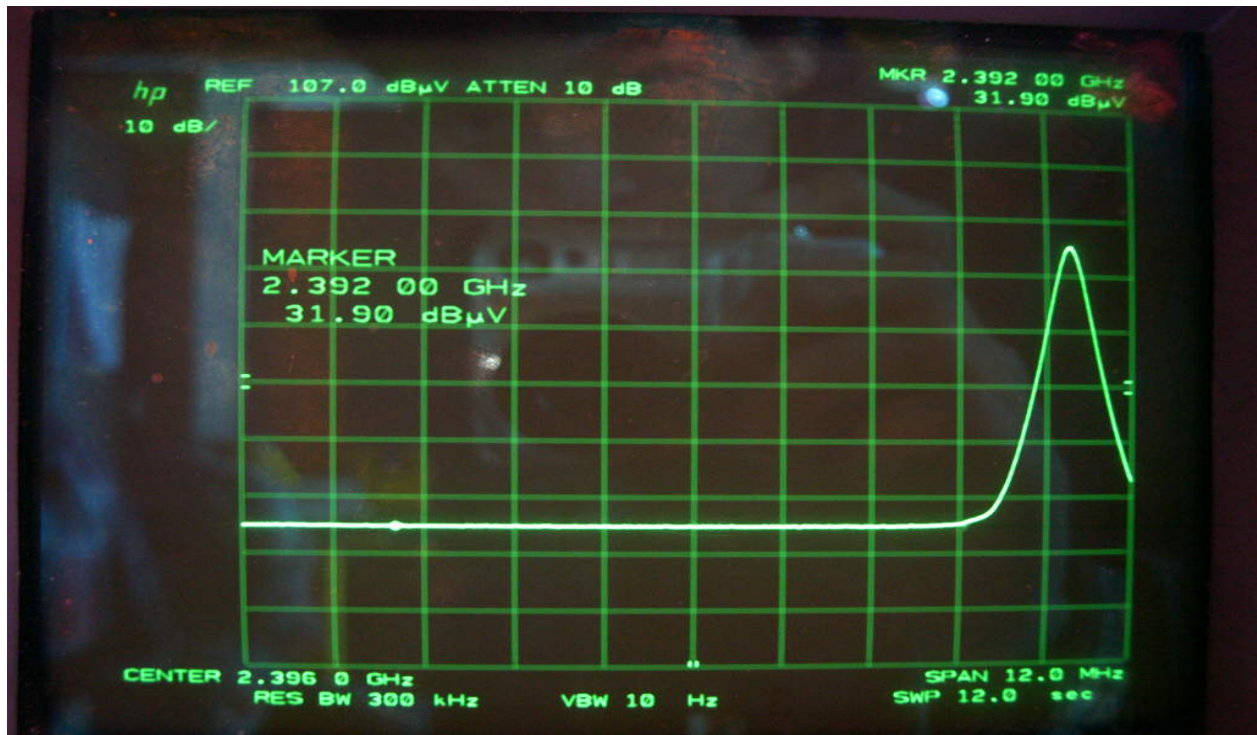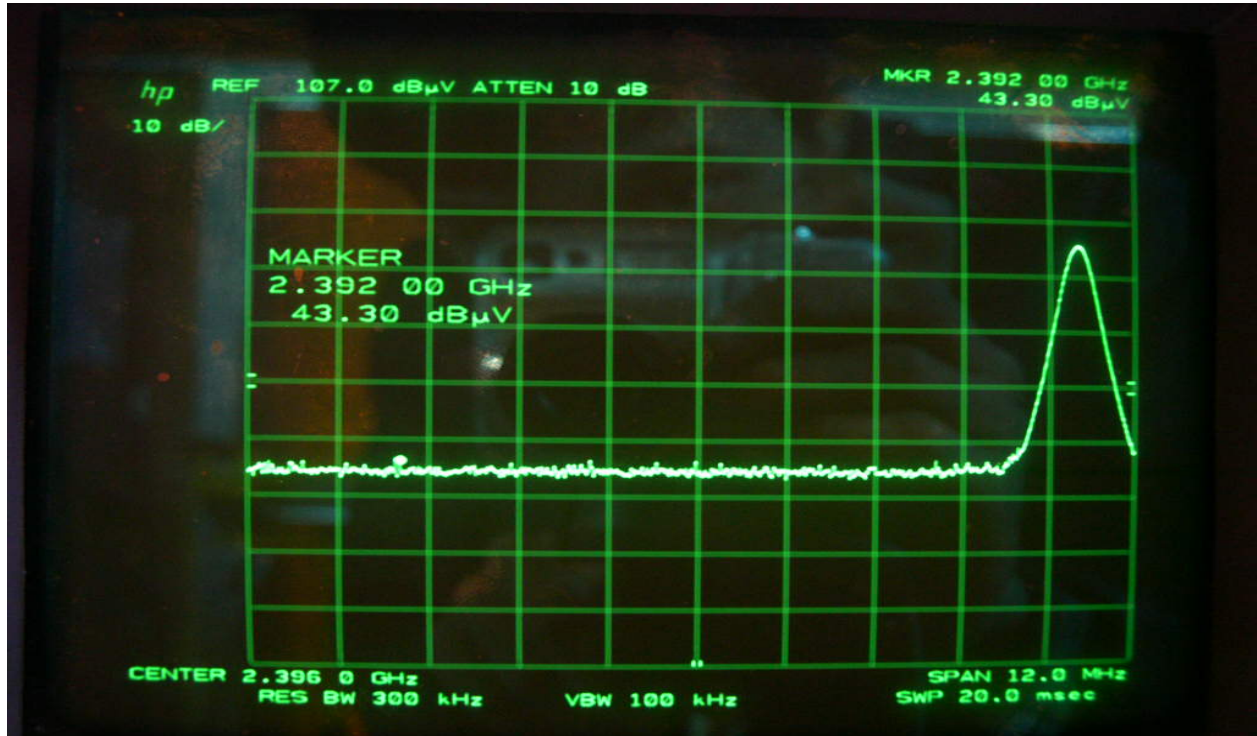

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

REPORT #: THRU-803002



THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092F820318835169 email thrukang@kornet.net

High channel

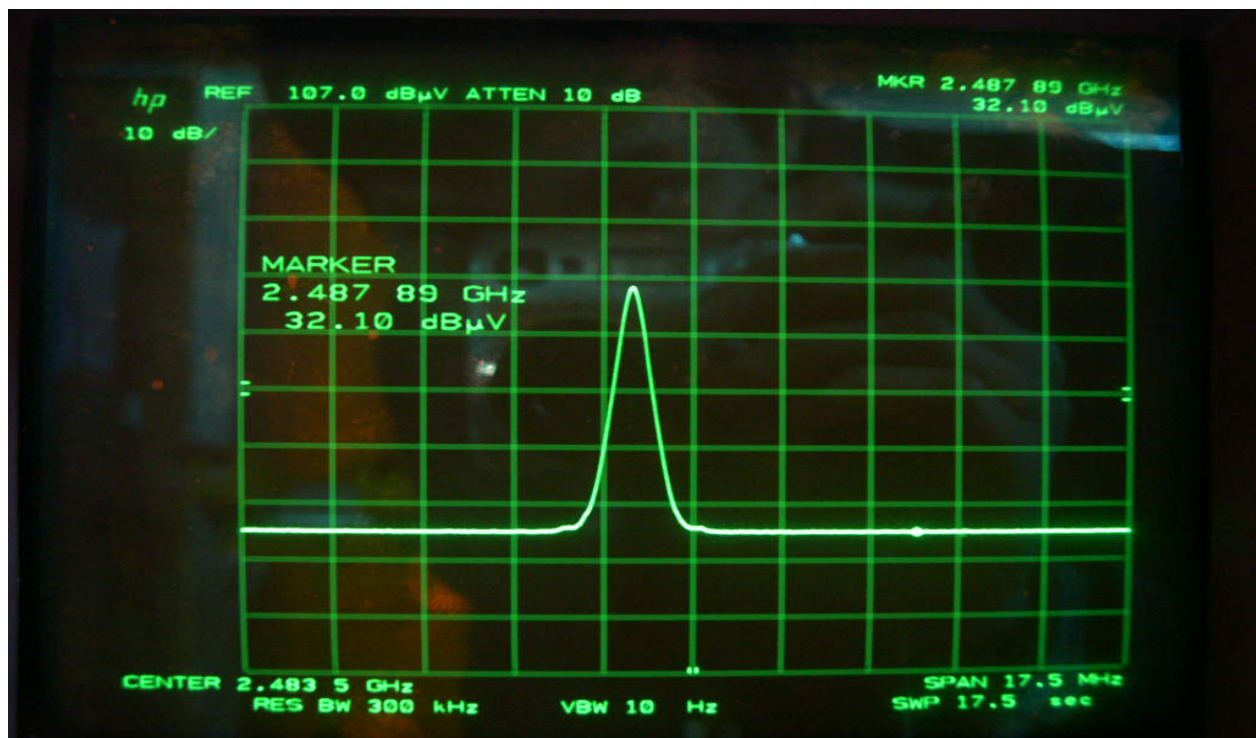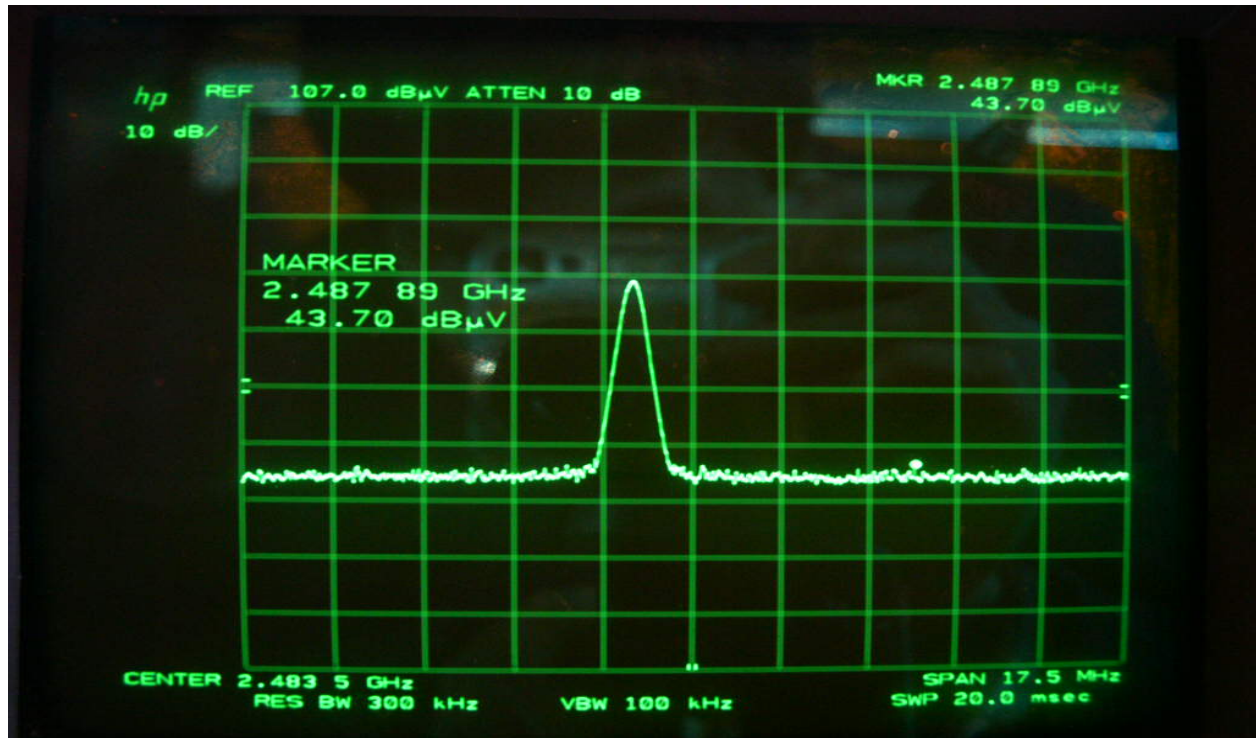

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

REPORT #: THRU-803002

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092F820318835169 email thrukang@kornet.net

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

NAME OF TEST: POWER LINE CONDUCTED INTERFERENCE

RULES PART NO.: 15.207

REQUIREMENTS:

	QUASI - PEAK	AVERAGE
.15 - 0.5 MHz	66-56 dBuV	56-46 dBuV
0.5 - 5.0	56	46
5.0 - 30.	60	50

TEST PROCEDURE: ANSI STANDARD C63.4-1992. The spectrum was scanned from .15 to 30 MHz.

The highest emission read for Line 1 was

The highest emission read for Line 2 was

THE GRAPHS ON THE FOLLOWING PAGES REPRESENT THE EMISSIONS READ FOR POWER LINE CONDUCTED FOR THIS DEVICE.

TEST RESULTS: Both lines were observed. The measurements indicate that the unit DOES appear to meet the FCC requirements for this class of equipment.

"Not Applicable"

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

REPORT #: THRU-803002

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092F820318835169 email thrukang@kornet.net

TEST Equipment List

No	Description	Manufacturer	Model No.	Serial No.	Due Cal.	Used
1	Test Receiver	Rohde & Schwarz	ESHS 10	862970/018	2008.05.01	☐
2	Test Receiver	Rohde & Schwarz	ESVS 10	826008/014	2008.06.12	☐
3	Spectrum Analyzer	Hewlett Packard	8566B	2311A02394	2008.06.13	☒
4	Spectrum Display	Hewlett Packard	85662A	2542A12429	2008.06.13	☒
5	Quasi-peak Adapter	Hewlett Packard	85650A	2521A00887	2008.06.13	☐
6	RF Preselector	Hewlett Packard	85685A	2648A00504	2008.06.13	☐
7	Preamplifier	Hewlett Packard	8447F	2805A02570	2008.05.28	☐
8	Preamplifier	A.H. Systems	PAM-0118	164	2008.05.08	☒
9	Biconical Antenna	Eaton Corp.	94455-1	0977	2008.04.01	☐
10	Biconical Antenna	EMCO	3104C	9111-2468	2008.06.07	☒
11	Log Periodic Antenna	EMCO	3146	2051	2008.05.11	☒
12	Horn Antenna	A.H. Systems	SAS-571	414	2008.03.17	☒
13	Loop Antenna	Rohde & Schwarz	HFH2-Z2.335.4711.52	826532/006	2009.01.31	☐
14	Dipole Antenna	Rohde & Schwarz	VHAP	574	2008.12.12	☐
15	Dipole Antenna	Rohde & Schwarz	VHAP	575	2008.12.12	☐
16	Dipole Antenna	Rohde & Schwarz	UHAP	546	2008.12.12	☐
17	Dipole Antenna	Rohde & Schwarz	UHAP	547	2008.12.12	☐
18	Signal Generator	Hewlett Packard	8673D	2708A00448	2008.06.12	☐
19	Spectrum Analyzer	Advantest Corp.	R3261C	61720208	2008.06.12	☒
20	LISN	EMCO	3825/2	9111-1912	2008.12.12	☐
21	LISN	Kyoritsu	KNW-242	8-923-2	2009.05.23	☐
22	Modulation Analyzer	Hewlett Packard	8901B	3438A05094	2008.05.25	☐
23	Waveform Generator	Hewlett Packard	33120A	US34001190	2008.05.21	☐
24	Audio analyzer	Hewlett Packard	8903B	3011A12915	2008.05.21	☐
25	Digital Oscilloscope	Tektronix	TDS 340A	B012287	2008.06.13	☐

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

REPORT #: THRU-803002

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do, 469-803, Korea

T820318835092F820318835169 email thrukang@kornet.net

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

NAME OF TEST: RF EXPOSURE REQUIREMENT

§15.247 (e), §1.1307 (b)(2), §1.1310, & §2.1093	
Frequency Range (MHz)	Power Density (mW/cm ²)
Limits for Occupational/Controlled Exposures	
0.3 - 3.0	*(100)
3.0 - 30	*(900/f ₂)
30 - 300	1.0
300 - 1500	f/300
1500 - 100,000	5.0
Limits for General Population/Uncontrolled Exposure	
0.3 - 3.0	*(100)
3.0 - 30	*(180/f ₂)
30 - 300	0.2
300 - 1500	f/1500
1500 - 100,000	1.0
f = frequency in MHz * = Plane-wave equivalent power density	

MPE Calculation

The calculations on the next page are based on the following:

An output power of 0.512 mW

A gain of 0 dBi

A value for the general population exposure limit of 1 mW/cm² which in the formula is designated as S=1 or as calculated from 1500/1500=1

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

REPORT #: THRU-803002

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun

Kyunggi-Do,469-803, Korea

T820318835092F820318835169 email thrukang@kornet.net

Po :=0.512 mWatts

dBd :=0 antenna gain

f :=1500 Frequency in MHz

G :=dBd + 2.15 gain in dBi

G = 2.15

$$G_n := 10^{\frac{G}{10}} \quad \text{gain numeric}$$

$$S := \frac{f}{1500}$$

300 for controlled
1500 for uncontrolled

Gn = 1.641

S = 1

$$R := \sqrt{\frac{(P_o \cdot G_n)}{(4 \pi \cdot S)}}$$

R :=0.258 distance in centimeters
Required for compliance

APPLICANT: ISV Co., Ltd.

FCC ID: PE3KT-24NT

REPORT #: THRU-803002