Test Report

Date : 2017-03-21
No. : DM126789

Applicant	:	Electronics Tomorrow Ltd. Unit 903-7, 9/F., Tower 1, Harbour Center 1 Hok Cheung Street, Hung Hom, Kowloon, Hong Kong
Supplier / Manufacturer	:	Electronics Tomorrow Ltd. Unit 903-7, 9/F., Tower 1, Harbour Center 1 Hok Cheung Street, Hung Hom, Kowloon, Hong Kong
Description of Sample(s)	:	Submitted sample(s) said to be Product: Wifi Datalogging Barometric Pressure Hygrometer Thermometer Brand Name: TRACEABLE Model No.: 6529 FCC ID: PEQ6529170302
Date Samples Received	:	2017-03-07
Date Tested	:	2017-03-09 to 2017-03-21
Investigation Requested	:	Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2015 and ANSI C63.10:2013 for FCC Certification.
Conclusions	:	The submitted product COMPLIED with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report.
Remarks	:	WIFI (802.11b, 802.11g, 802.11n20) Modulation System: DSS, CCK, OFDM

LONG Yun Jian, Along
Authorized Signatory
ElectroMagnetic Compatibility Department
For and on behalf of
STC (Dongguan) Company Limited

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Test Report

CONTENT:

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

1.0 General Details

1.1 Test Laboratory

STC (Dongguan) Company Limited
EMC Laboratory
68 Fumin Nan Road, Dalang, Dongguan, Guangdong, China
Telephone: (86 769) 81119888
Fax: (86 769) 81116222

1.2 Equipment Under Test [EUT]

Description of Sample(s)

Product:	Wifi Datalogging Barometric Pressure Hygrometer Thermometer
Manufacturer:	Electronics Tomorrow Ltd. Unit 903-7, 9/F., Tower 1, Harbour Center 1 Hok Cheung Street, Hung Hom, Kowloon, Hong Kong
Brand Name:	TRACEABLE
Model Number:	6529
Rating:	6.0Vd.c. (AAA*4 battery)

1.2.1 Description of EUT Operation

The Equipment Under Test (EUT) is an Wifi Datalogging Barometric Pressure Hygrometer Thermometer. The transmission signal is digital modulated with channel frequency range 2412-2462MHz.

1.3 Date of Order

2017-03-07

1.4 Submitted Sample(s):

1 Sample

1.5 Test Duration

2017-03-09 to 2017-03-21

1.6 Country of Origin

China

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

2.0 Technical Details

2.1 Investigations Requested

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2015 Regulations and ANSI C63.10:2013for FCC Certification.

2.2 Test Standards and Results Summary Tables

EMISSION Results Summary						
Test Condition	Test Requirement	Test Method	Class / Severity	Test Result		
				Pass	Failed	N/A
Output Power of Fundamental Emissions	FCC 47CFR 15.247(b)(3)	ANSI C63.10:2013	N/A	☒	☐	☐
Radiated Emissions	FCC 47CFR 15.209	ANSI C63.10:2013	N/A	☒	☐	☐
Conducted Emissions	FCC 47CFR 15.207	ANSI C63.10:2013	N/A	☐	☐	☒
Power Spectral Density	FCC 47CFR 15.247(e)	N/A	N/A	☒	☐	☐
6dB Bandwidth	FCC 47CFR 15.247(a)(2)	N/A	N/A	☒	☐	☐
Band Edge Emissions	FCC 47CFR 15.247(d)	N/A	N/A	☒	☐	☐
Antenna requirement	FCC 47CFR 15.203	N/A	N/A	☒	☐	☐
RF Exposure	FCC 47CFR 15.247(i)	N/A	N/A	☒	☐	☐

Note: N/A - Not Applicable

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

3.0 Test Results

3.1 Emission

3.1.1 Maximum Peak Output Power

Test Requirement:	FCC 47CFR 15.247(b)(3)
Test Method:	N/A
Test Date:	2017-03-16
Mode of Operation:	Wifi mode

Test Method:

The RF output of the EUT was connected to the peak power meter. All the attenuation or cable loss will be added to the measured maximum output power. The results are recorded in mW.

Test Setup:

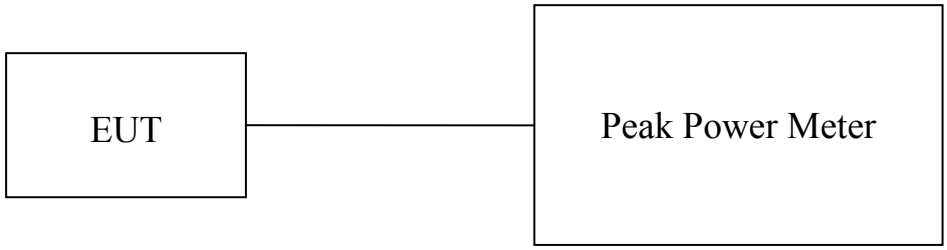

Note: a temporary antenna connector was soldered to the RF output.

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Limits for Peak Output Power of Fundamental & Harmonics Emissions [FCC 47CFR 15.247]:

For Digital Transmission systems in 2400-2483.5 MHz Band: 1 Watt (30dBm)

Results of WiFi mode 802.11 b, (2412MHz to 2462MHz) : Pass (TX Unit)
Maximum conducted output power

Channel	Frequency(MHz)	Output Power(Watt)
Low	2412	0.02679
Middle	2437	0.02979
High	2462	0.02512

Results of WiFi mode 802.11 g, (2412MHz to 2462MHz) : Pass (TX Unit)
Maximum conducted output power

Channel	Frequency(MHz)	Output Power(Watt)
Low	2412	0.03573
Middle	2437	0.04178
High	2462	0.03141

Results of WiFi mode 802.11 n20, (2412MHz to 2462MHz) : Pass (TX Unit)
Maximum conducted output power

Channel	Frequency(MHz)	Output Power(Watt)
Low	2412	0.03206
Middle	2437	0.03819
High	2462	0.02864

Calculated measurement uncertainty : 30MHz to 1GHz 1.7dB
1GHz to 26GHz 1.7dB

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

3.1.2 Radiated Emissions

Test Requirement:	FCC 47CFR 15.209
Test Method:	ANSI C63.10:2013
Test Date:	2017-03-16
Mode of Operation:	Tx mode / Wifi mode

Test Method:

For emission measurements at or below 1 GHz, the sample was placed 0.8m above the ground plane of semi-anechoic Chamber*. For emission measurements above 1 GHz, the sample was placed 1.5m above the ground plane of semi-anechoic Chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

* Semi-anechoic chamber located on the G/F of "STC (Dongguan) Company Limited" with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 629686.

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Spectrum Analyzer Setting:

9KHz – 30MHz (Pk & Av)	RBW:	10kHz
	VBW:	30kHz
	Sweep:	Auto
	Span:	Fully capture the emissions being measured
	Trace:	Max. hold
30MHz – 1GHz (QP)	RBW:	120kHz
	VBW:	120kHz
	Sweep:	Auto
	Span:	Fully capture the emissions being measured
	Trace:	Max. hold
Above 1GHz (Pk)	RBW:	1MHz
	VBW:	1MHz
	Sweep:	Auto
	Span:	Fully capture the emissions being measured
	Trace:	Max. hold
Above 1GHz (Av)	RBW:	1MHz
	VBW:	10Hz
	Sweep:	Auto
	Span:	Fully capture the emissions being measured
	Trace:	Max. hold

Test Setup:

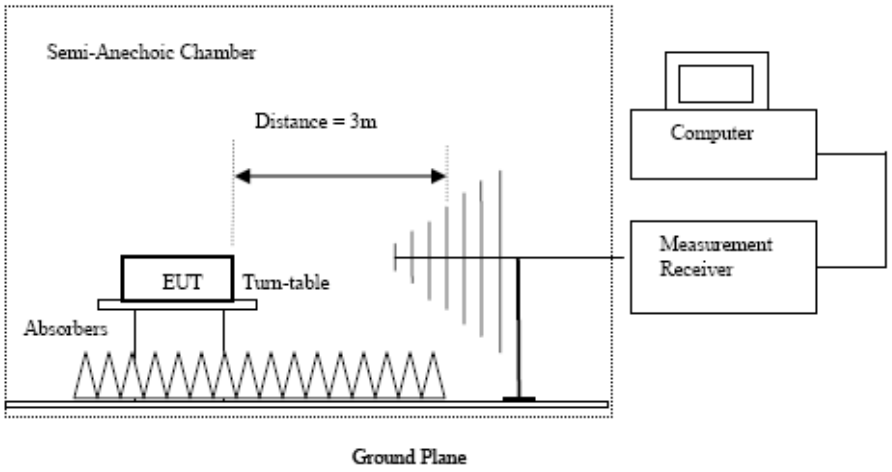

- Absorbers placed on top of the ground plane are for measurements above 1000MHz only.
- Measurements between 30MHz to 1000MHz made with Bi-log antennas, above 1000MHz horn antennas are used, 9kHz to 30MHz loop antennas are used.

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Limits for Radiated Emissions FCC 47 CFR 15.247]:

Frequency Range	Quasi-Peak Limits
[MHz]	[μV/m]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Tx mode (2412.0 MHz) (802.11b) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level dBuV	Correction Factor dB/m	Field Strength dBuV/m	Field Strength uV/m	Limit uV/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Wifi mode (2412.0 MHz) (802.11b) (1GHz-25GHz): Pass

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level @3m dBμV	Correction Factor dB/m	Field Strength dBμV/m	Limit @3m dBμV/m	Margin dBμV/m	E-Field Polarity
4824.0	15.6	41.5	57.1	74.0	16.9	Vertical
4824.0	14.0	42.4	56.4	74.0	17.6	Horizontal
7236.0	10.5	45.1	55.6	74.0	18.4	Vertical
7236.0	8.9	46.2	55.1	74.0	18.9	Horizontal
9648.0	7.7	48	55.7	74.0	18.3	Vertical
9648.0	6.0	48.8	54.8	74.0	19.2	Horizontal
12060.0	3.8	51.5	55.3	74.0	18.7	Vertical
12060.0	2.8	52.4	55.2	74.0	18.8	Horizontal

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level @3m dBuV	Correction Factor dB/m	Field Strength dBuV/m	Limit @3m dBuV/m	Margin dBuV/m	E-Field Polarity
4824.0	1.7	41.5	43.2	54.0	10.8	Vertical
4824.0	-0.2	42.4	42.2	54.0	11.8	Horizontal
7236.0	-2.8	45.1	42.3	54.0	11.7	Vertical
7236.0	-5.2	46.2	41.0	54.0	13.0	Horizontal
9648.0	-6.6	48	41.4	54.0	12.6	Vertical
9648.0	-7.2	48.8	41.6	54.0	12.4	Horizontal
12060.0	-10.0	51.5	41.5	54.0	12.5	Vertical
12060.0	-10.2	52.4	42.2	54.0	11.8	Horizontal

Result of Wifi mode (2437.0 MHz) (802.11b) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level dBuV	Correction Factor dB/m	Field Strength dBuV/m	Field Strength uV/m	Limit uV/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Wifi mode (2437.0 MHz) (802.11b) (1GHz-25GHz): Pass

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level @3m dBµV	Correction Factor dB/m	Field Strength dBµV/m	Limit @3m dBµV/m	Margin dBµV/m	E-Field Polarity
4874.0	15.4	41.6	57.0	74.0	17.0	Vertical
4874.0	13.6	42.5	56.1	74.0	17.9	Horizontal
7311.0	10.1	45.2	55.3	74.0	18.7	Vertical
7311.0	8.9	46.3	55.2	74.0	18.8	Horizontal
9748.0	7.2	48.1	55.3	74.0	18.7	Vertical
9748.0	6.8	48.9	55.7	74.0	18.3	Horizontal
12185.0	3.9	51.6	55.5	74.0	18.5	Vertical
12185.0	2.8	52.5	55.3	74.0	18.7	Horizontal

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level @3m dBuV	Correction Factor dB/m	Field Strength dBuV/m	Limit @3m dBuV/m	Margin dBuV/m	E-Field Polarity
4874.0	1.4	41.6	43.0	54.0	11.0	Vertical
4874.0	0.3	42.5	42.8	54.0	11.2	Horizontal
7311.0	-3.3	45.2	41.9	54.0	12.1	Vertical
7311.0	-4.2	46.3	42.1	54.0	11.9	Horizontal
9748.0	-6.3	48.1	41.8	54.0	12.2	Vertical
9748.0	-6.8	48.9	42.1	54.0	11.9	Horizontal
12185.0	-10.1	51.6	41.5	54.0	12.5	Vertical
12185.0	-10.5	52.5	42.0	54.0	12.0	Horizontal

Result of Wifi mode (2462.0 MHz) (802.11b) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level dBuV	Correction Factor dB/m	Field Strength dBuV/m	Field Strength uV/m	Limit uV/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Wifi mode (2462.0 MHz) (802.11b) (1GHz-25GHz): Pass

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level @3m dBµV	Correction Factor dB/m	Field Strength dBµV/m	Limit @3m dBµV/m	Margin dBµV/m	E-Field Polarity
4924.0	14.9	41.4	56.3	74.0	17.7	Vertical
4924.0	12.9	42.7	55.6	74.0	18.4	Horizontal
7386.0	9.2	45.6	54.8	74.0	19.2	Vertical
7386.0	8.4	46.5	54.9	74.0	19.1	Horizontal
9848.0	7.2	48.6	55.8	74.0	18.2	Vertical
9848.0	5.0	49.7	54.7	74.0	19.3	Horizontal
12310.0	3.7	51.7	55.4	74.0	18.6	Vertical
12310.0	3.1	52.7	55.8	74.0	18.2	Horizontal

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level @3m dBuV	Correction Factor dB/m	Field Strength dBuV/m	Limit @3m dBuV/m	Margin dBuV/m	E-Field Polarity
4924.0	0.8	41.4	42.2	54.0	11.8	Vertical
4924.0	-0.2	42.7	42.5	54.0	11.5	Horizontal
7386.0	-4.5	45.6	41.1	54.0	12.9	Vertical
7386.0	-5.2	46.5	41.3	54.0	12.7	Horizontal
9848.0	-6.3	48.6	42.3	54.0	11.7	Vertical
9848.0	-8.7	49.7	41.0	54.0	13.0	Horizontal
12310.0	-9.9	51.7	41.8	54.0	12.2	Vertical
12310.0	-10.8	52.7	41.9	54.0	12.1	Horizontal

Result of Wifi mode (2412.0 MHz) (802.11g) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level dBµV	Correction Factor dB/m	Field Strength dBµV/m	Field Strength dBµV/m	Limit dBµV/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Wifi mode (2412.0 MHz) (802.11g) (1GHz-25GHz): Pass

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level @3m dBµV	Correction Factor dB/m	Field Strength dBµV/m	Limit @3m dBµV/m	Margin dBµV/m	E-Field Polarity
4824.0	15.0	41.5	56.5	74.0	17.5	Vertical
4824.0	13.3	42.4	55.7	74.0	18.3	Horizontal
7236.0	10.7	45.1	55.8	74.0	18.2	Vertical
7236.0	8.7	46.2	54.9	74.0	19.1	Horizontal
9648.0	7.9	48	55.9	74.0	18.1	Vertical
9648.0	5.8	48.8	54.6	74.0	19.4	Horizontal
12060.0	4.3	51.5	55.8	74.0	18.2	Vertical
12060.0	3.2	52.4	55.6	74.0	18.4	Horizontal

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Field Strength of Spurious Emissions Average Value						
Frequency	Measured Level @3m	Correction Factor	Field Strength	Limit @3m	Margin	E-Field Polarity
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m	
4824.0	1.7	41.5	43.2	54.0	10.8	Vertical
4824.0	-0.8	42.4	41.6	54.0	12.4	Horizontal
7236.0	-3.1	45.1	42.0	54.0	12.0	Vertical
7236.0	-4.4	46.2	41.8	54.0	12.2	Horizontal
9648.0	-6.8	48	41.2	54.0	12.8	Vertical
9648.0	-7.3	48.8	41.5	54.0	12.5	Horizontal
12060.0	-9.5	51.5	42.0	54.0	12.0	Vertical
12060.0	-10.2	52.4	42.2	54.0	11.8	Horizontal

Result of Wifi mode (2437.0 MHz) (802.11g) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions Average Value						
Frequency	Measured Level	Correction Factor	Field Strength	Field Strength	Limit	E-Field Polarity
MHz	dBµV	dB/m	dBµV/m	dBµV/m	dBµV/m	
Emissions detected are more than 20 dB below the FCC Limits						

Result of Wifi mode (2437.0 MHz) (802.11g) (1GHz-25GHz): Pass

Field Strength of Spurious Emissions Peak Value						
Frequency	Measured Level @3m	Correction Factor	Field Strength	Limit @3m	Margin	E-Field Polarity
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m	
4874.0	15.4	41.6	57.0	74.0	17.0	Vertical
4874.0	13.2	42.5	55.7	74.0	18.3	Horizontal
7311.0	10.7	45.2	55.9	74.0	18.1	Vertical
7311.0	9.2	46.3	55.5	74.0	18.5	Horizontal
9748.0	7.7	48.1	55.8	74.0	18.2	Vertical
9748.0	6.4	48.9	55.3	74.0	18.7	Horizontal
12185.0	4.0	51.6	55.6	74.0	18.4	Vertical
12185.0	3.6	52.5	56.1	74.0	17.9	Horizontal

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level @3m dBuV	Correction Factor dB/m	Field Strength dBuV/m	Limit @3m dBuV/m	Margin dBuV/m	E-Field Polarity
4874.0	1.9	41.6	43.5	54.0	10.5	Vertical
4874.0	0.5	42.5	43.0	54.0	11.0	Horizontal
7311.0	-3.4	45.2	41.8	54.0	12.2	Vertical
7311.0	-4.6	46.3	41.7	54.0	12.3	Horizontal
9748.0	-6.4	48.1	41.7	54.0	12.3	Vertical
9748.0	-6.3	48.9	42.6	54.0	11.4	Horizontal
12185.0	-9.9	51.6	41.7	54.0	12.3	Vertical
12185.0	-10.3	52.5	42.2	54.0	11.8	Horizontal

Result of Wifi mode (2462.0 MHz) (802.11g) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level dBµV	Correction Factor dB/m	Field Strength dBµV/m	Field Strength dBµV/m	Limit dBµV/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Wifi mode (2462.0 MHz) (802.11g) (1GHz-25GHz): Pass

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level @3m dBµV	Correction Factor dB/m	Field Strength dBµV/m	Limit @3m dBµV/m	Margin dBµV/m	E-Field Polarity
4924.0	15.1	41.4	56.5	74.0	17.5	Vertical
4924.0	12.9	42.7	55.6	74.0	18.4	Horizontal
7386.0	9.6	45.6	55.2	74.0	18.8	Vertical
7386.0	8.4	46.5	54.9	74.0	19.1	Horizontal
9848.0	7.3	48.6	55.9	74.0	18.1	Vertical
9848.0	5.7	49.7	55.4	74.0	18.6	Horizontal
12310.0	3.7	51.7	55.4	74.0	18.6	Vertical
12310.0	2.1	52.7	54.8	74.0	19.2	Horizontal

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level @3m dBuV	Correction Factor dB/m	Field Strength dBuV/m	Limit @3m dBuV/m	Margin dBuV/m	E-Field Polarity
4924.0	1.3	41.4	42.7	54.0	11.3	Vertical
4924.0	-0.9	42.7	41.8	54.0	12.2	Horizontal
7386.0	-4.2	45.6	41.4	54.0	12.6	Vertical
7386.0	-5.2	46.5	41.3	54.0	12.7	Horizontal
9848.0	-6.1	48.6	42.5	54.0	11.5	Vertical
9848.0	-8.4	49.7	41.3	54.0	12.7	Horizontal
12310.0	-10.0	51.7	41.7	54.0	12.3	Vertical
12310.0	-11.4	52.7	41.3	54.0	12.7	Horizontal

Result of Wifi mode (2412.0 MHz) (802.11n20) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level dBµV	Correction Factor dB/m	Field Strength dBµV/m	Field Strength dBµV/m	Limit dBµV/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Wifi mode (2412.0 MHz) (802.11n20) (1GHz-25GHz): Pass

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level @3m dBµV	Correction Factor dB/m	Field Strength dBµV/m	Limit @3m dBµV/m	Margin dBµV/m	E-Field Polarity
4824.0	14.7	41.5	56.2	74.0	17.8	Vertical
4824.0	13.4	42.4	55.8	74.0	18.2	Horizontal
7236.0	10.4	45.1	55.5	74.0	18.5	Vertical
7236.0	9.0	46.2	55.2	74.0	18.8	Horizontal
9648.0	8.0	48	56.0	74.0	18.0	Vertical
9648.0	5.9	48.8	54.7	74.0	19.3	Horizontal
12060.0	4.5	51.5	56.0	74.0	18.0	Vertical
12060.0	3.3	52.4	55.7	74.0	18.3	Horizontal

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level @3m dBuV	Correction Factor dB/m	Field Strength dBuV/m	Limit @3m dBuV/m	Margin dBuV/m	E-Field Polarity
4824.0	1.5	41.5	43.0	54.0	11.0	Vertical
4824.0	-0.1	42.4	42.3	54.0	11.7	Horizontal
7236.0	-2.5	45.1	42.6	54.0	11.4	Vertical
7236.0	-4.6	46.2	41.6	54.0	12.4	Horizontal
9648.0	-6.2	48	41.8	54.0	12.2	Vertical
9648.0	-7.5	48.8	41.3	54.0	12.7	Horizontal
12060.0	-9.4	51.5	42.1	54.0	11.9	Vertical
12060.0	-10.1	52.4	42.3	54.0	11.7	Horizontal

Result of Wifi mode (2437.0 MHz) (802.11n20) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level dBµV	Correction Factor dB/m	Field Strength dBµV/m	Field Strength dBµV/m	Limit dBµV/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Wifi mode (2437.0 MHz) (802.11n20) (1GHz-25GHz): Pass

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level @3m dBµV	Correction Factor dB/m	Field Strength dBµV/m	Limit @3m dBµV/m	Margin dBµV/m	E-Field Polarity
4874.0	15.6	41.6	57.2	74.0	16.8	Vertical
4874.0	14.0	42.5	56.5	74.0	17.5	Horizontal
7311.0	10.5	45.2	55.7	74.0	18.3	Vertical
7311.0	9.2	46.3	55.5	74.0	18.5	Horizontal
9748.0	7.6	48.1	55.7	74.0	18.3	Vertical
9748.0	7.1	48.9	56.0	74.0	18.0	Horizontal
12185.0	4.0	51.6	55.6	74.0	18.4	Vertical
12185.0	3.6	52.5	56.1	74.0	17.9	Horizontal

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level @3m dBuV	Correction Factor dB/m	Field Strength dBuV/m	Limit @3m dBuV/m	Margin dBuV/m	E-Field Polarity
4874.0	1.9	41.6	43.5	54.0	10.5	Vertical
4874.0	0.3	42.5	42.8	54.0	11.2	Horizontal
7311.0	-3.6	45.2	41.6	54.0	12.4	Vertical
7311.0	-4.2	46.3	42.1	54.0	11.9	Horizontal
9748.0	-6.0	48.1	42.1	54.0	11.9	Vertical
9748.0	-6.5	48.9	42.4	54.0	11.6	Horizontal
12185.0	-9.8	51.6	41.8	54.0	12.2	Vertical
12185.0	-10.8	52.5	41.7	54.0	12.3	Horizontal

Result of Wifi mode (2462.0 MHz) (802.11n20) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level dBµV	Correction Factor dB/m	Field Strength dBµV/m	Field Strength dBµV/m	Limit dBµV/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Wifi mode (2462.0 MHz) (802.11n20) (1GHz-25GHz): Pass

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level @3m dBµV	Correction Factor dB/m	Field Strength dBµV/m	Limit @3m dBµV/m	Margin dBµV/m	E-Field Polarity
4924.0	14.8	41.4	56.2	74.0	17.8	Vertical
4924.0	13.1	42.7	55.8	74.0	18.2	Horizontal
7386.0	9.3	45.6	54.9	74.0	19.1	Vertical
7386.0	8.7	46.5	55.2	74.0	18.8	Horizontal
9848.0	7.3	48.6	55.9	74.0	18.1	Vertical
9848.0	5.2	49.7	54.9	74.0	19.1	Horizontal
12310.0	3.9	51.7	55.6	74.0	18.4	Vertical
12310.0	3.2	52.7	55.9	74.0	18.1	Horizontal

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level @3m dBuV	Correction Factor dB/m	Field Strength dBuV/m	Limit @3m dBuV/m	Margin dBuV/m	E-Field Polarity
4924.0	1.9	41.4	43.3	54.0	10.7	Vertical
4924.0	-0.2	42.7	42.5	54.0	11.5	Horizontal
7386.0	-4.0	45.6	41.6	54.0	12.4	Vertical
7386.0	-5.7	46.5	40.8	54.0	13.2	Horizontal
9848.0	-6.8	48.6	41.8	54.0	12.2	Vertical
9848.0	-8.7	49.7	41.0	54.0	13.0	Horizontal
12310.0	-10.0	51.7	41.7	54.0	12.3	Vertical
12310.0	-10.9	52.7	41.8	54.0	12.2	Horizontal

Remarks:
No additional spurious emissions found between lowest internal used/generated frequency and 30 MHz

* Denotes restricted band of operation.
Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty (9kHz-30MHz): 3.3dB
(30MHz -1GHz): 4.6dB
(1GHz -26GHz): 4.4dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Radiated Emissions Measurement:

Limit：

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).

Result：Band-edge Compliance of RF Radiated Emissions (Lowest)-802.11b

Field Strength of Band-edge Compliance Peak Value						
Frequency MHz	Measured Level @3m dBμV	Correction Factor dB/m	Field Strength dBμV/m	Limit @3m dBμV/m	Margin dBμV/m	E-Field Polarity
2390.0	18.9	36.8	55.7	74.0	18.3	Vertical

Field Strength of Band-edge Compliance Average Value						
Frequency MHz	Measured Level @3m dBμV	Correction Factor dB/m	Field Strength dBμV/m	Limit @3m dBμV/m	Margin dBμV/m	E-Field Polarity
2390.0	3.6	36.8	40.4	54.0	13.6	Vertical

Result：Band-edge Compliance of RF Radiated Emissions (Highest) -802.11b

Field Strength of Band-edge Compliance Peak Value						
Frequency MHz	Measured Level @3m dBμV	Correction Factor dB/m	Field Strength dBμV/m	Limit @3m dBμV/m	Margin dBμV/m	E-Field Polarity
2483.5	22.1	36.4	58.5	74.0	15.5	Horizontal

Field Strength of Band-edge Compliance Average Value						
Frequency MHz	Measured Level @3m dBμV	Correction Factor dB/m	Field Strength dBμV/m	Limit @3m dBμV/m	Margin dBμV/m	E-Field Polarity
2483.5	6.0	36.4	42.4	54.0	11.6	Horizontal

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Result：Band-edge Compliance of RF Radiated Emissions (Lowest)-802.11g

Field Strength of Band-edge Compliance Peak Value						
Frequency MHz	Measured Level @3m dBµV	Correction Factor dB/m	Field Strength dBµV/m	Limit @3m dBµV/m	Margin dBµV/m	E-Field Polarity
2390.0	26.4	36.8	63.2	74.0	10.8	Vertical

Field Strength of Band-edge Compliance Average Value						
Frequency MHz	Measured Level @3m dBµV	Correction Factor dB/m	Field Strength dBµV/m	Limit @3m dBµV/m	Margin dBµV/m	E-Field Polarity
2390.0	8.0	36.8	44.8	54.0	9.2	Vertical

Result：Band-edge Compliance of RF Radiated Emissions (Highest) -802.11g

Field Strength of Band-edge Compliance Peak Value						
Frequency MHz	Measured Level @3m dBµV	Correction Factor dB/m	Field Strength dBµV/m	Limit @3m dBµV/m	Margin dBµV/m	E-Field Polarity
2483.5	29.0	36.4	65.4	74.0	8.6	Horizontal

Field Strength of Band-edge Compliance Average Value						
Frequency MHz	Measured Level @3m dBµV	Correction Factor dB/m	Field Strength dBµV/m	Limit @3m dBµV/m	Margin dBµV/m	E-Field Polarity
2483.5	11.8	36.4	48.2	54.0	5.8	Horizontal

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Result：Band-edge Compliance of RF Radiated Emissions (Lowest)-802.11n20

Field Strength of Band-edge Compliance Peak Value						
Frequency MHz	Measured Level @3m dBµV	Correction Factor dB/m	Field Strength dBµV/m	Limit @3m dBµV/m	Margin dBµV/m	E-Field Polarity
2390.0	38.3	36.8	75.1	74.0	-1.1	Vertical

Field Strength of Band-edge Compliance Average Value						
Frequency MHz	Measured Level @3m dBµV	Correction Factor dB/m	Field Strength dBµV/m	Limit @3m dBµV/m	Margin dBµV/m	E-Field Polarity
2390.0	9.6	36.8	46.4	54.0	7.6	Vertical

Result：Band-edge Compliance of RF Radiated Emissions (Highest) -802.11n20

Field Strength of Band-edge Compliance Peak Value						
Frequency MHz	Measured Level @3m dBµV	Correction Factor dB/m	Field Strength dBµV/m	Limit @3m dBµV/m	Margin dBµV/m	E-Field Polarity
2483.5	29.3	36.4	65.7	74.0	8.3	Horizontal

Field Strength of Band-edge Compliance Average Value						
Frequency MHz	Measured Level @3m dBµV	Correction Factor dB/m	Field Strength dBµV/m	Limit @3m dBµV/m	Margin dBµV/m	E-Field Polarity
2483.5	10.1	36.4	46.5	54.0	7.5	Horizontal

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Limits for Radiated Emissions FCC 47 CFR 15.247]:

Frequency Range	Quasi-Peak Limits
[MHz]	[μV/m]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results of WiFi mode (2412MHz, 802.11b) (30MHz – 1GHz): Pass

Please refer to the following table for result details(The data is the worst cases)

Horizontal

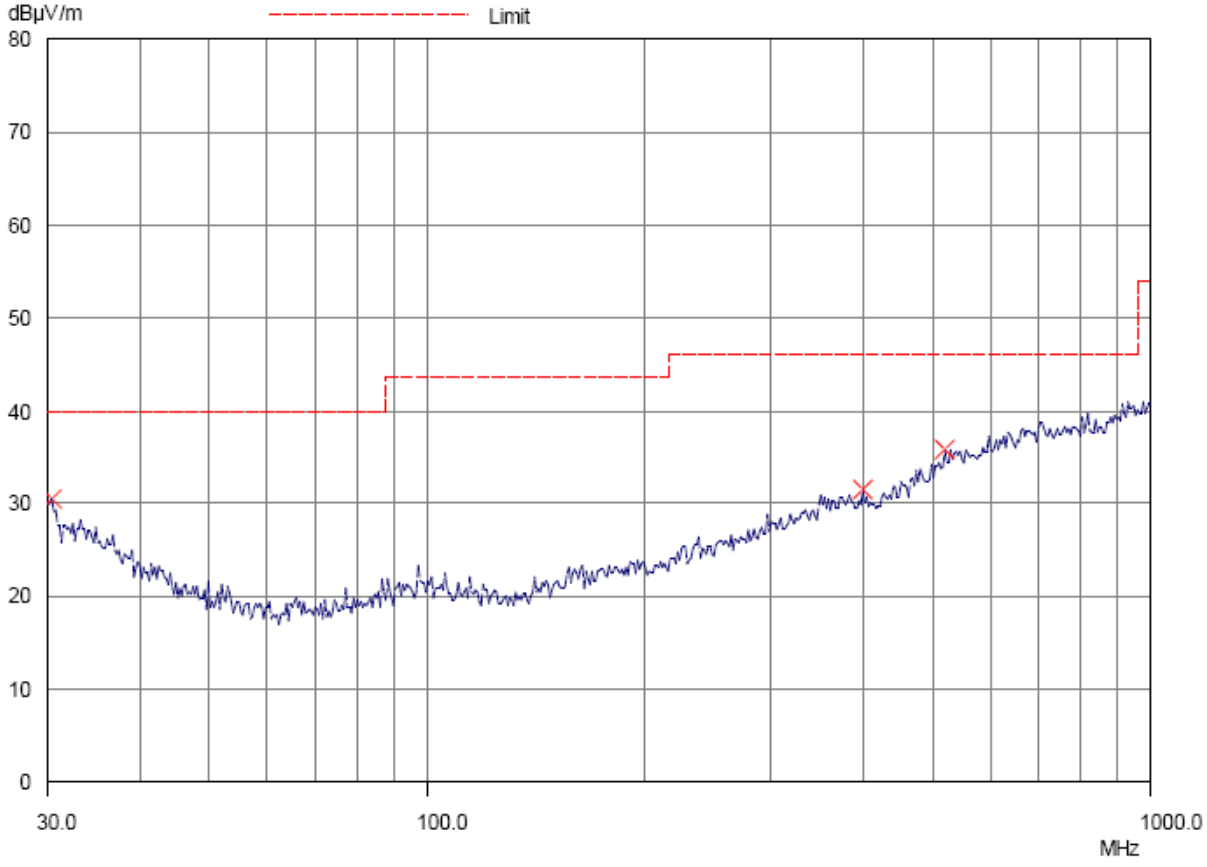

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Result of WiFi mode (2412MHz, 802.11b) (30MHz – 1GHz): Pass

Radiated Emissions Quasi-Peak					
Emission Frequency MHz	E-Field Polarity	Level @3m dBµV/m	Limit @3m dBµV/m	Level @3m µV/m	Limit @3m µV/m
30.3	Horizontal	30.5	40.0	33.5	100
399.1	Horizontal	31.6	46.0	38.0	200
516.9	Horizontal	35.8	46.0	61.7	200

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Limits for Radiated Emissions FCC 47 CFR 15.247]:

Frequency Range	Quasi-Peak Limits
[MHz]	[μV/m]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results of WiFi mode (2412MHz, 802.11b) (30MHz – 1GHz): Pass

Please refer to the following table for result details(The data is the worst cases)

Vertical

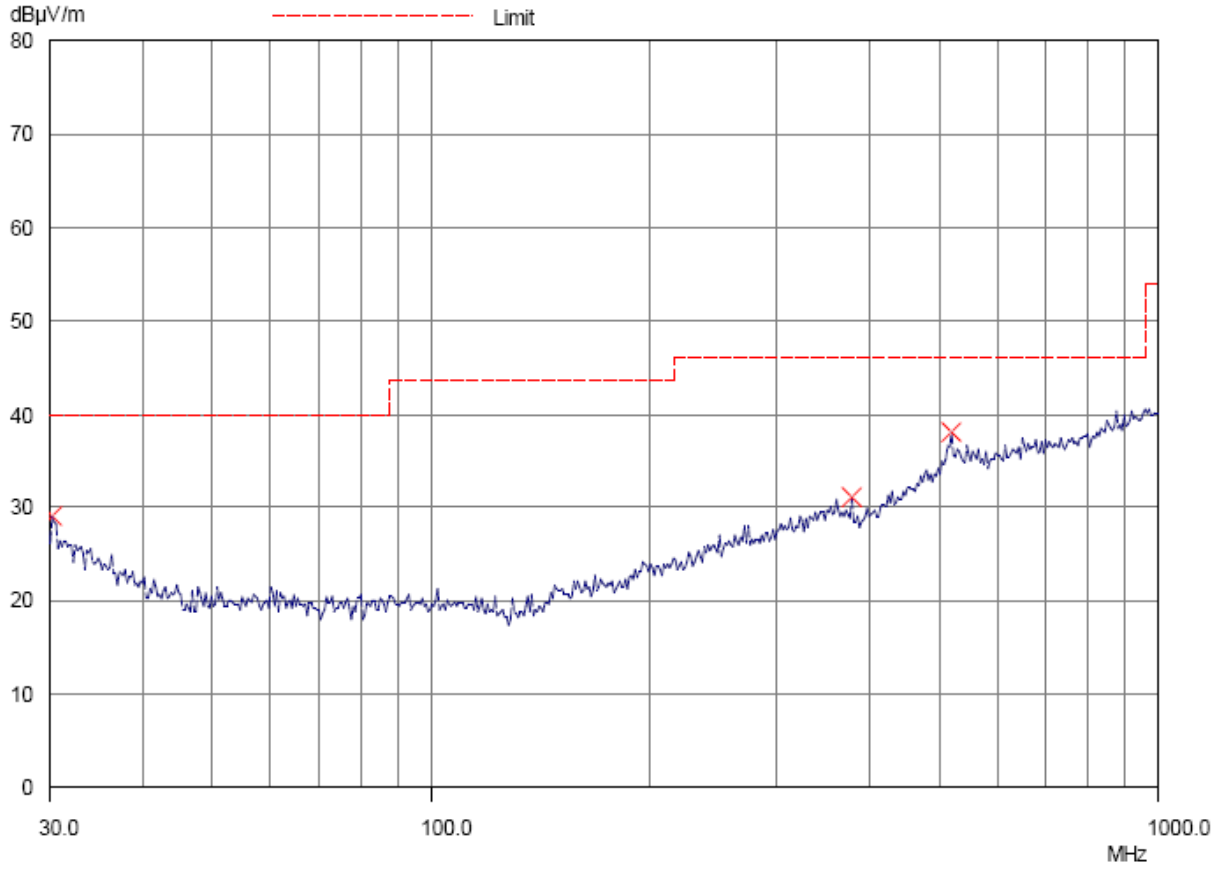

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Result of WiFi mode (2412MHz, 802.11b) (30MHz – 1GHz): Pass

Radiated Emissions Quasi-Peak					
Emission Frequency MHz	E-Field Polarity	Level @3m dBμV/m	Limit @3m dBμV/m	Level @3m μV/m	Limit @3m μV/m
30.1	Vertical	29.1	40.0	28.5	100
376.2	Vertical	31.0	46.0	35.5	200
518.7	Vertical	38.2	46.0	81.3	200

Remarks:
Calculated measurement uncertainty (30MHz – 1GHz): 4.6dB
Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

3.1.3 Power Spectral Density

Test Requirement:	FCC 47CFR 15.247(e)
Test Method:	ANSI C63.10:2013
Test Date:	2017-03-13
Mode of Operation:	Wifi mode

Test Method:

The RF output of the EUT was connected to the spectrum analyzer. Set the fundamental frequency as the center frequency of the spectral analyzer. Use RBW=3kHz , VBW= 10KHz , Set the span to 1.5 times the DTS channel bandwidth. Detector = peak, Sweep time = auto couple , Trace mode = max hold. Measure the Power Spectral Density (PSD) and record the results in dBm.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.

Test Limit:
The maximum power spectral density (PSD) shall not exceeded 8dBm in any 3kHz band.

Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where BWCF=10log (3 kHz/100 kHz=-15.2dB)

Results of WiFi Mode 802.11 b (Tx:2412MHz to 2462MHz) : Pass (TX Unit)
Maximum power spectral density

Transmitter Frequency (MHz)	Maximum Power spectral density level / 3kHz band (dBm)	Maximum Power spectral density / 3kHz band limit
2412.0	-12.75	8dBm
2437.0	-11.95	8dBm
2462.0	-12.59	8dBm

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Results of WiFi Mode 802.11 g (Tx:2412MHz to 2462MHz) : Pass (TX Unit)
Maximum power spectral density

Transmitter Frequency (MHz)	Maximum Power spectral density level / 3kHz band (dBm)	Maximum Power spectral density / 3kHz band limit
2412.0	-17.35	8dBm
2437.0	-14.79	8dBm
2462.0	-17.97	8dBm

Results of WiFi Mode 802.11 n20 (Tx:2412MHz to 2462MHz) : Pass (TX Unit)
Maximum power spectral density

Transmitter Frequency (MHz)	Maximum Power spectral density level / 3kHz band (dBm)	Maximum Power spectral density / 3kHz band limit
2412.0	-17.45	8dBm
2437.0	-15.49	8dBm
2462.0	-17.47	8dBm

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

WiFi mode 802.11 b, (Tx: 2412MHz to 2462MHz)
CH 1 (2412.0 MHz)

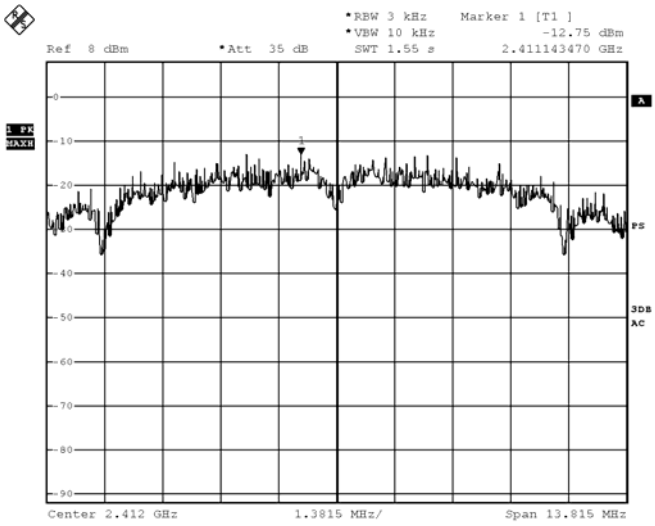

CH 6 (2437.0 MHz)

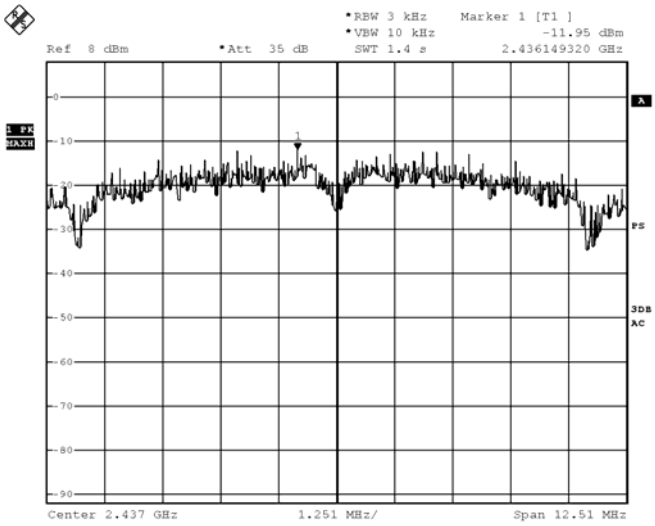

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

CH 11 (2462.0 MHz)

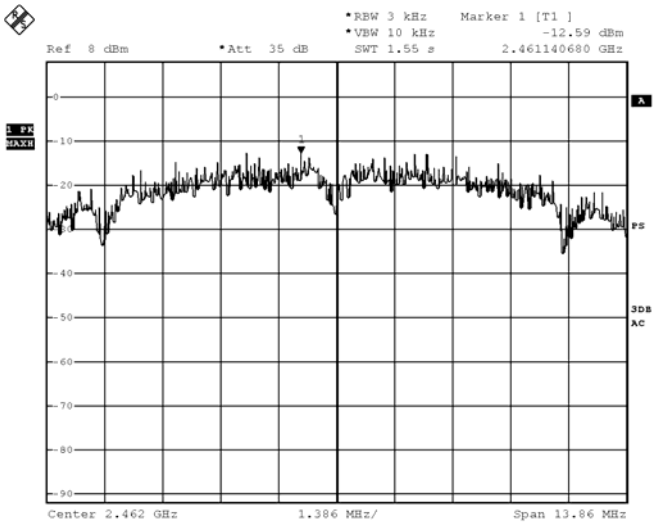

WiFi mode 802.11 g, (Tx:2412MHz to 2462MHz)
Ch 1 (2412.0 MHz)

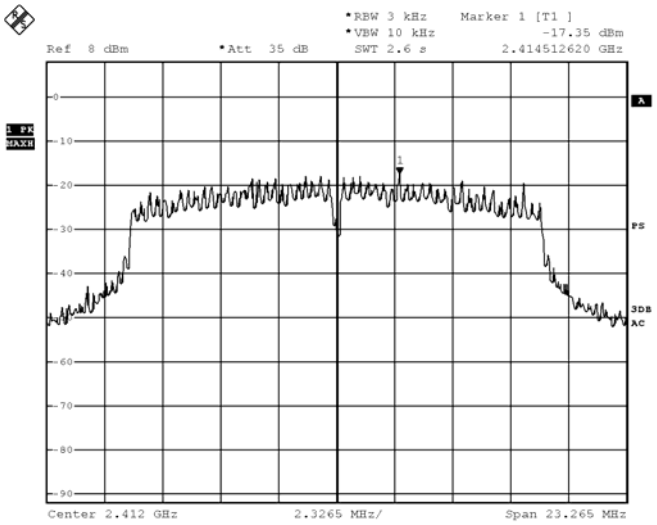

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

CH 6 (2437.0 MHz)

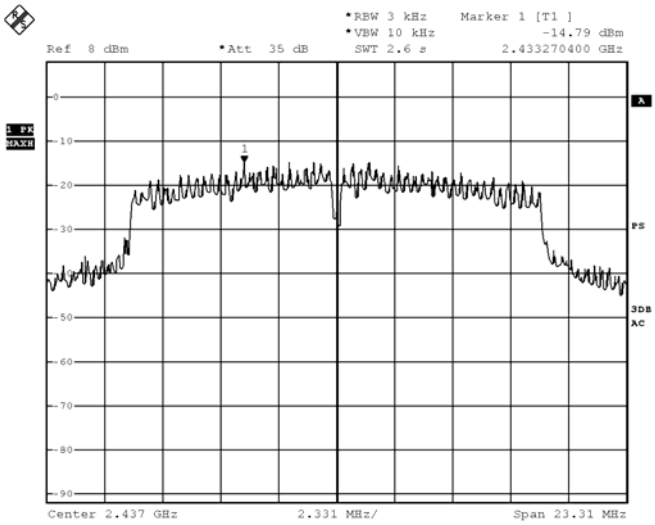

CH 11 (2462.0 MHz)

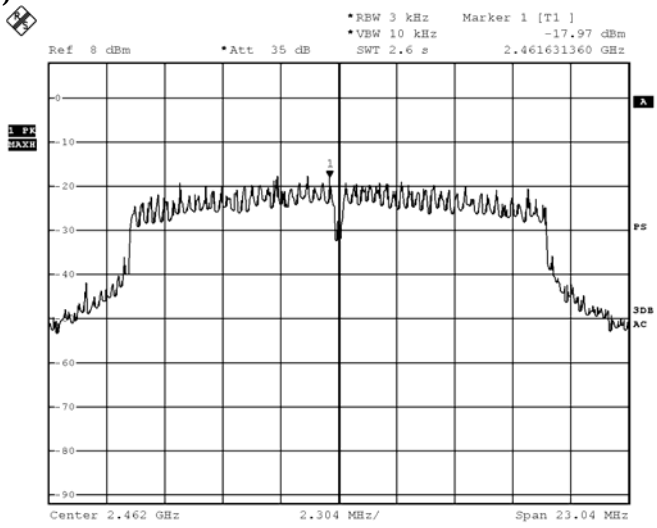

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

WiFi mode 802.11 n20, (Tx: 2412MHz to 2462MHz)
CH 1 (2412.0 MHz)

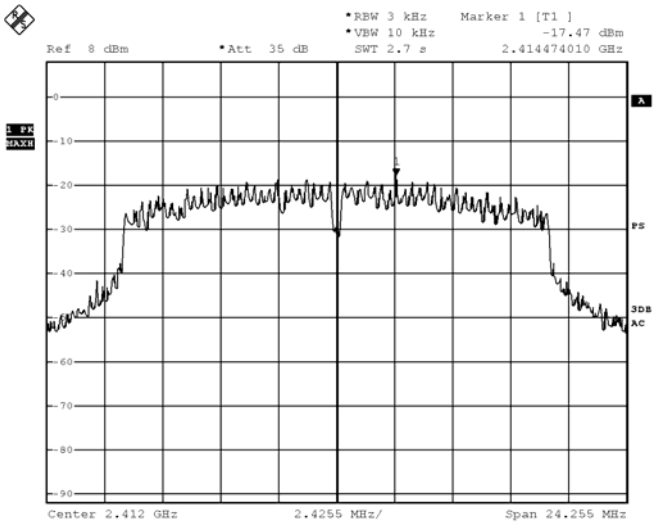

CH 6 (2437.0 MHz)

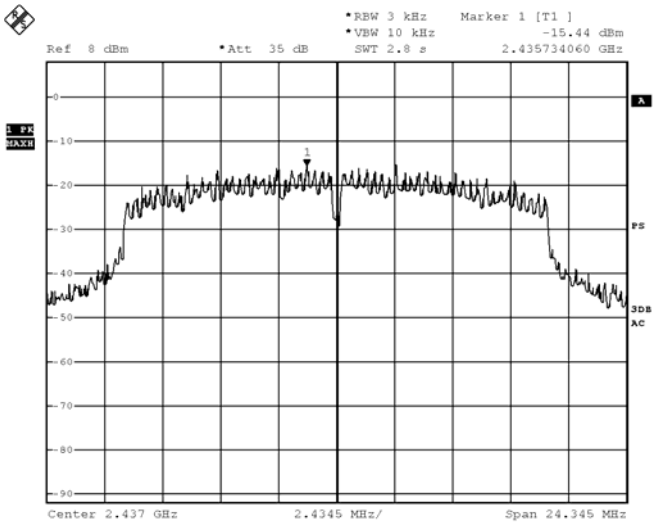

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Ch 11 (2462.0 MHz)

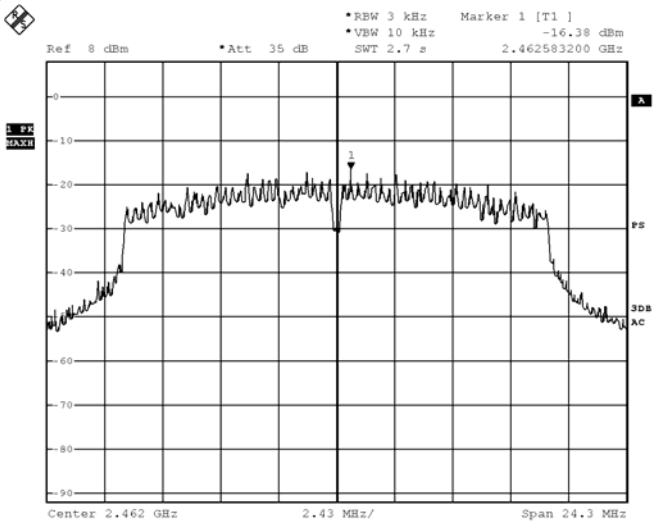

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

3.1.5 6dB Spectrum Bandwidth Measurement

Test Requirement:	FCC 47CFR 15.247(a)(2)
Test Method:	ANSI C63.10:2013
Test Date:	2017-03-13
Mode of Operation:	WiFi

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Spectrum Analyzer Setting:

RBW = 100kHz, VBW ≥ 3*RBW, Sweep = Auto couple
Detector = Peak, Trace = Max. hold

Test Setup:

As Test Setup of clause 3.1.1 in this test report.

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Limits for 6dB Spectrum Bandwidth Measurement:

Center Frequency [MHz]	6dB Bandwidth [MHz]	FCC Limits [kHz]
2412.0	9.210	> 500

6dB Bandwidth of Fundamental Emission on 802.11 b (2412MHz)

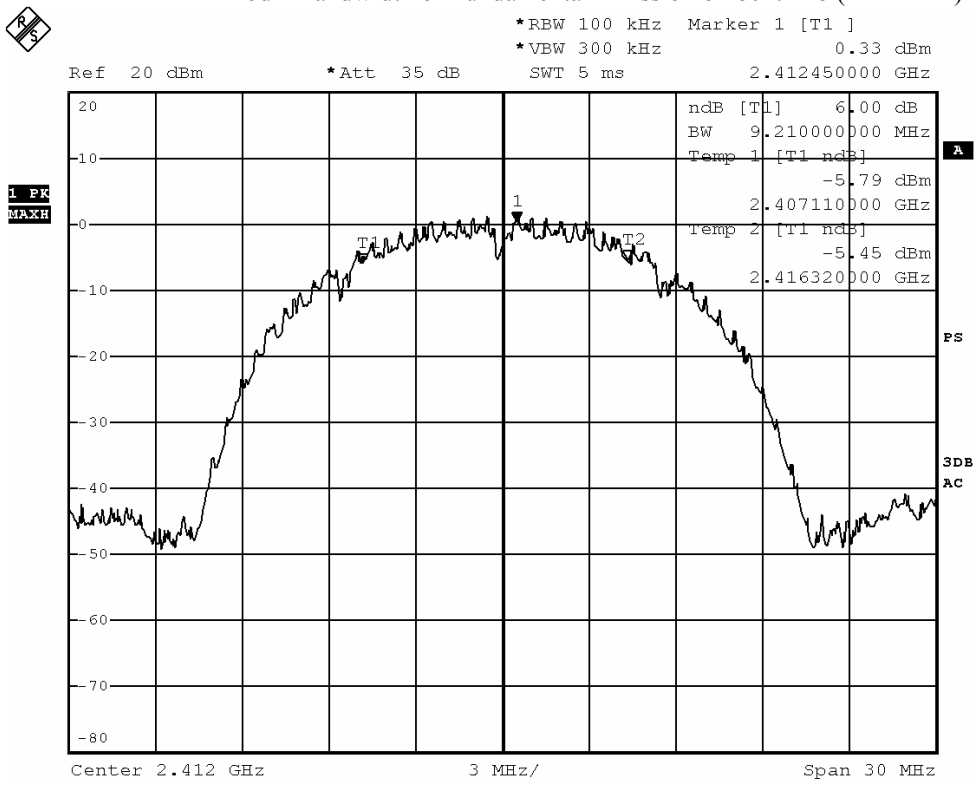

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Limits for 6dB Spectrum Bandwidth Measurement:

Frequency Range [MHz]	6dB Bandwidth [MHz]	FCC Limits [kHz]
2437.0	8.340	> 500

6dB Bandwidth of Fundamental Emission on 802.11 b (2437MHz)

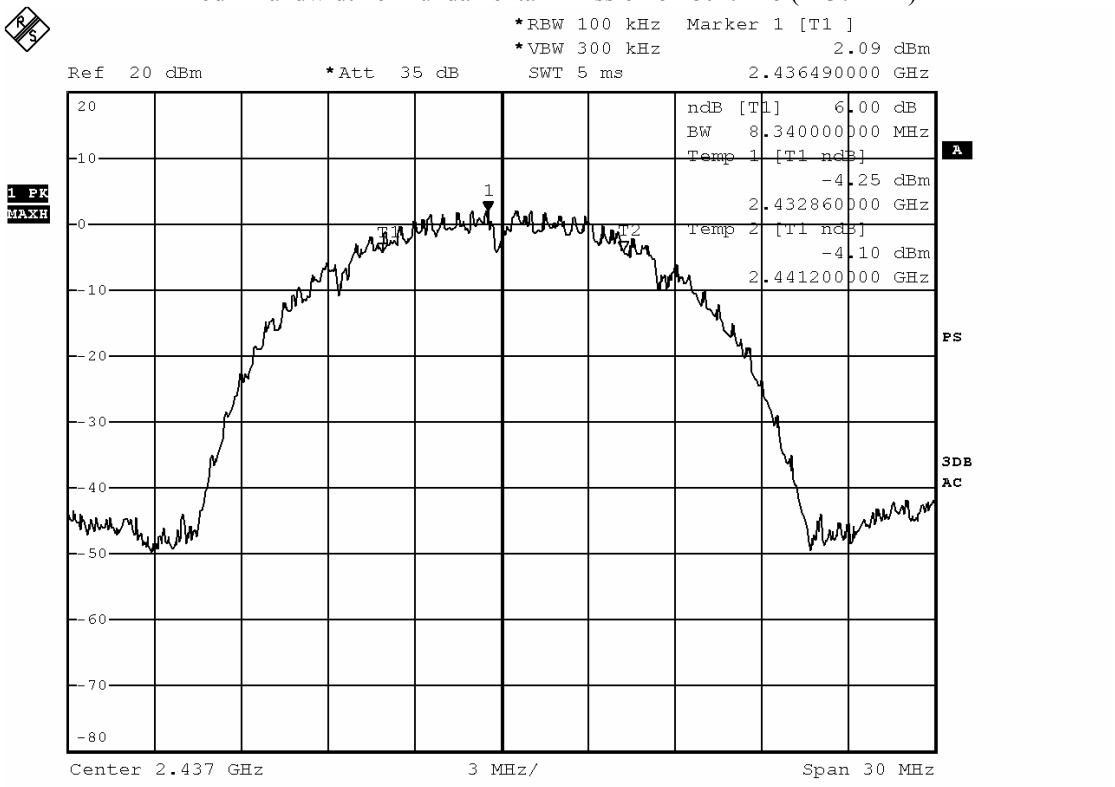

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Limits for 6dB Spectrum Bandwidth Measurement:

Frequency Range [MHz]	6dB Bandwidth [MHz]	FCC Limits [kHz]
2462.0	9.240	> 500

6dB Bandwidth of Fundamental Emission on 802.11 b (2462MHz)

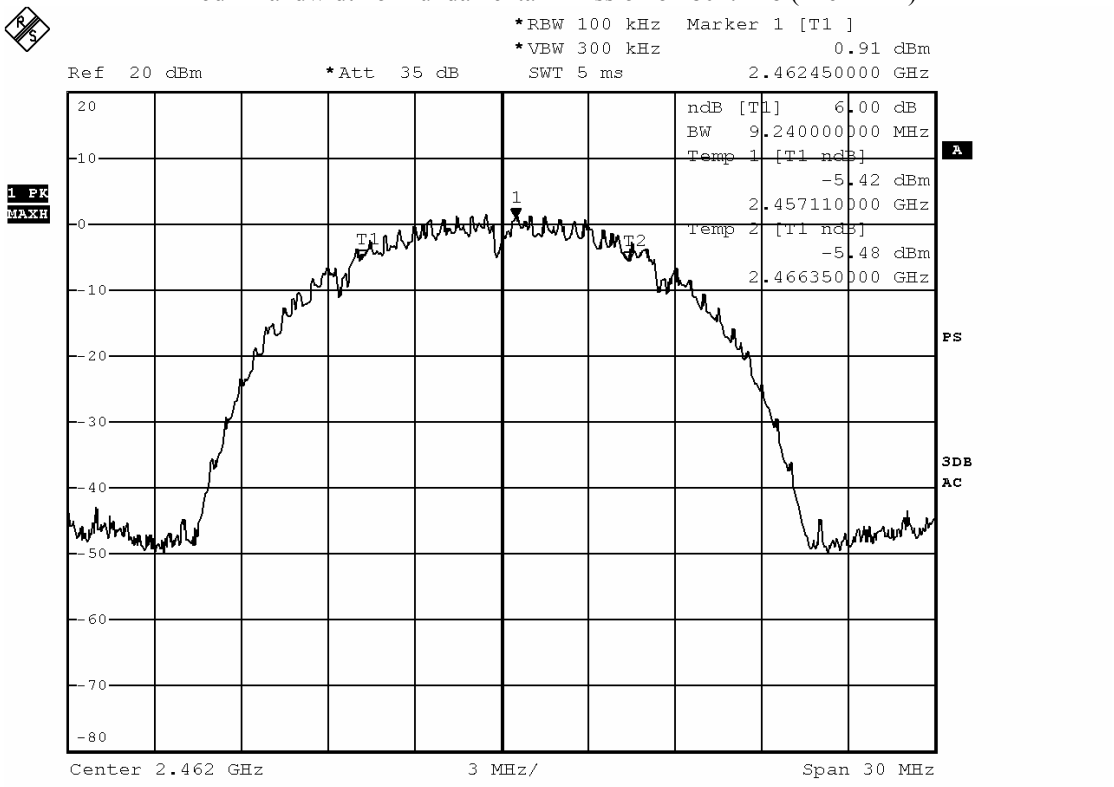

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Limits for 6dB Spectrum Bandwidth Measurement:

Center Frequency [MHz]	6dB Bandwidth [MHz]	FCC Limits [kHz]
2412.0	15.510	> 500

6dB Bandwidth of Fundamental Emission on 802.11 g (2412MHz)

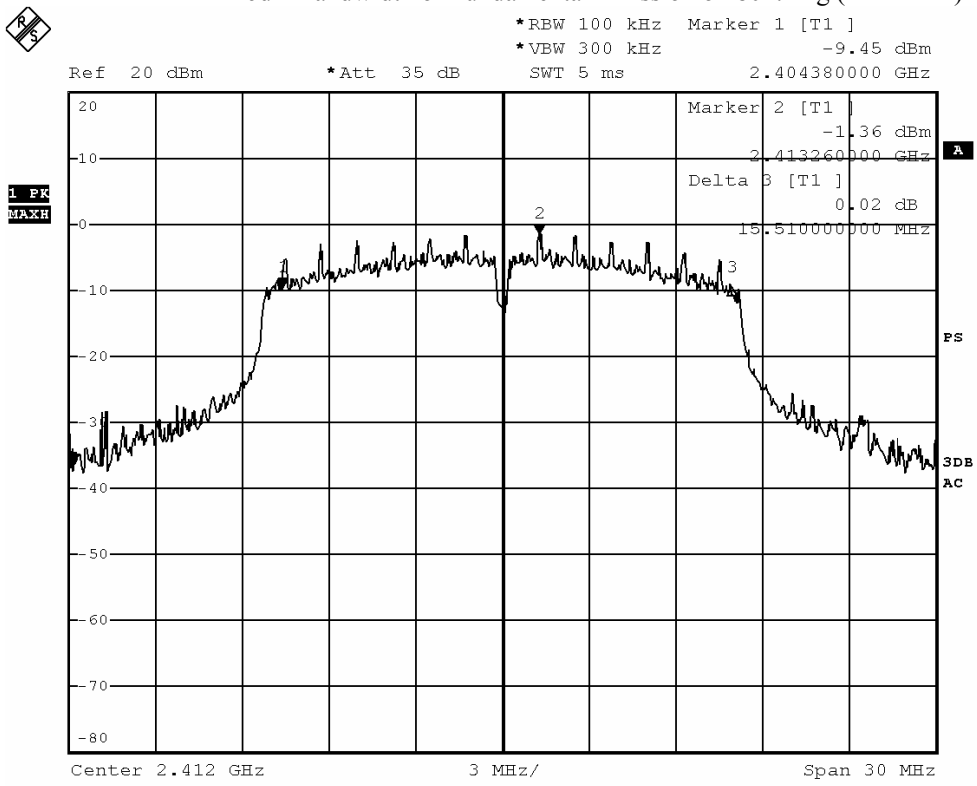

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Limits for 6dB Spectrum Bandwidth Measurement:

Frequency Range [MHz]	6dB Bandwidth [MHz]	FCC Limits [kHz]
2437.0	15.540	> 500

6dB Bandwidth of Fundamental Emission on 802.11 g (2437MHz)

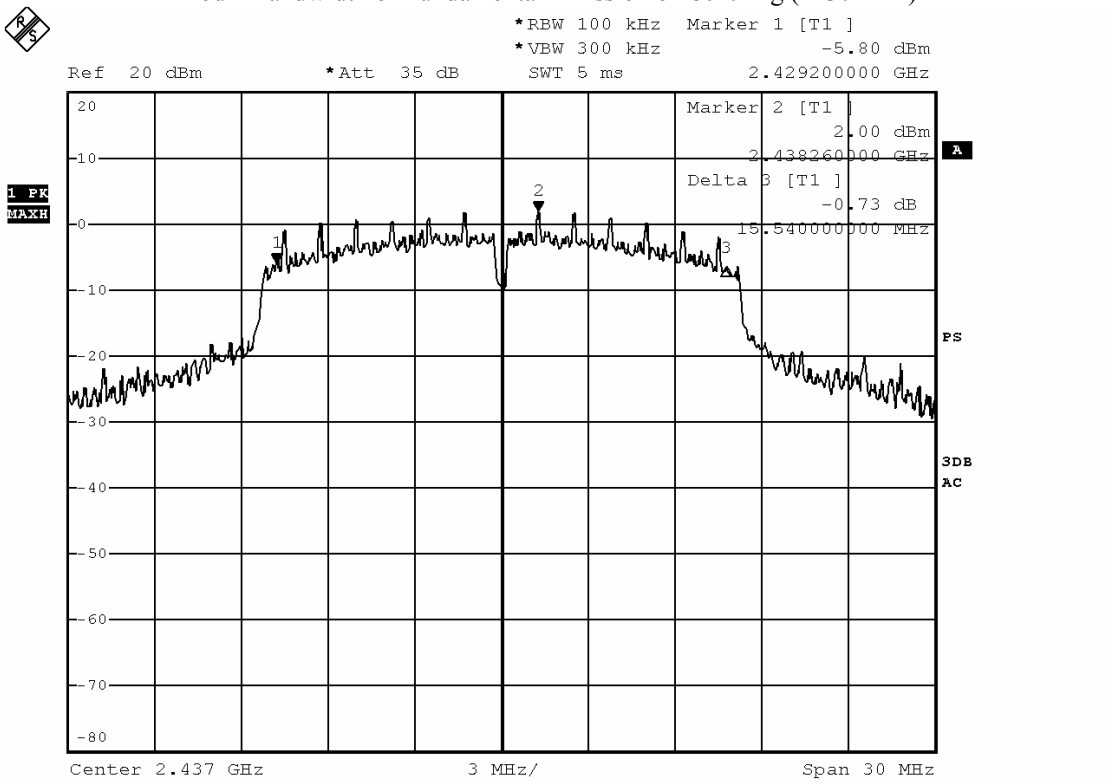

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Limits for 6dB Spectrum Bandwidth Measurement:

Frequency Range [MHz]	6dB Bandwidth [MHz]	FCC Limits [kHz]
2462.0	15.360	> 500

6dB Bandwidth of Fundamental Emission on 802.11 g (2462MHz)

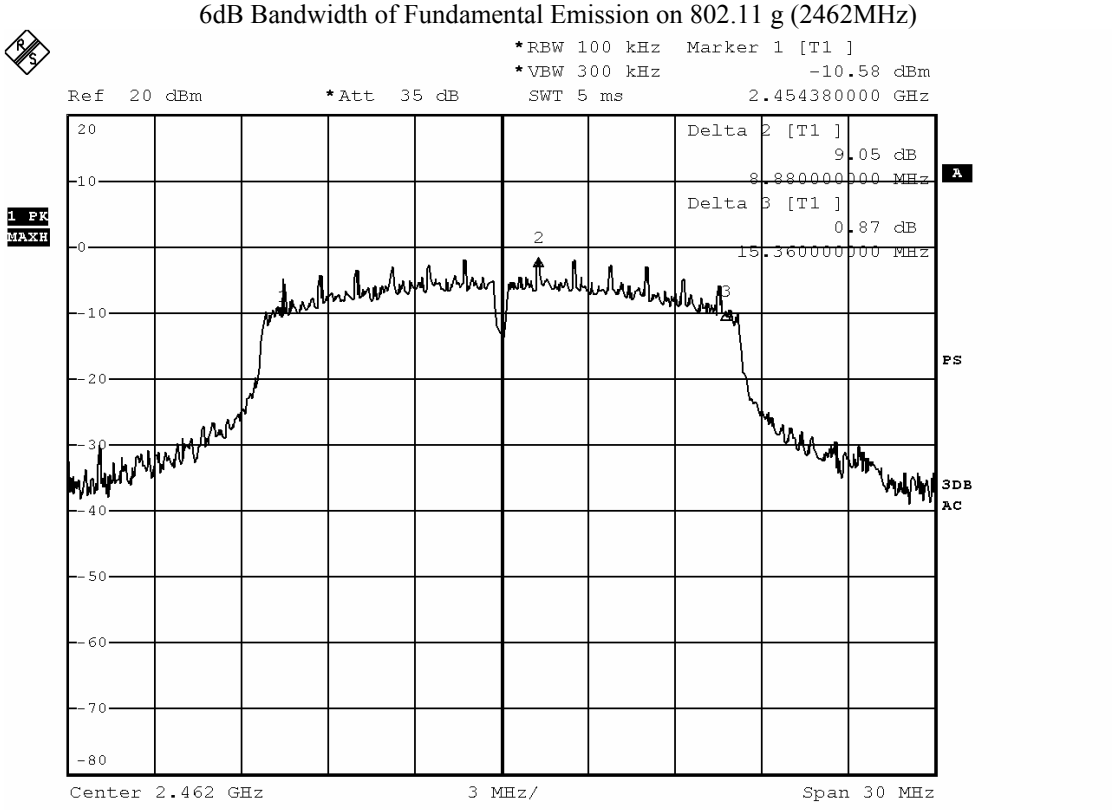

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Limits for 6dB Spectrum Bandwidth Measurement:

Center Frequency [MHz]	6dB Bandwidth [MHz]	FCC Limits [kHz]
2412.0	16.170	> 500

6dB Bandwidth of Fundamental Emission on 802.11 n20 (2412MHz)

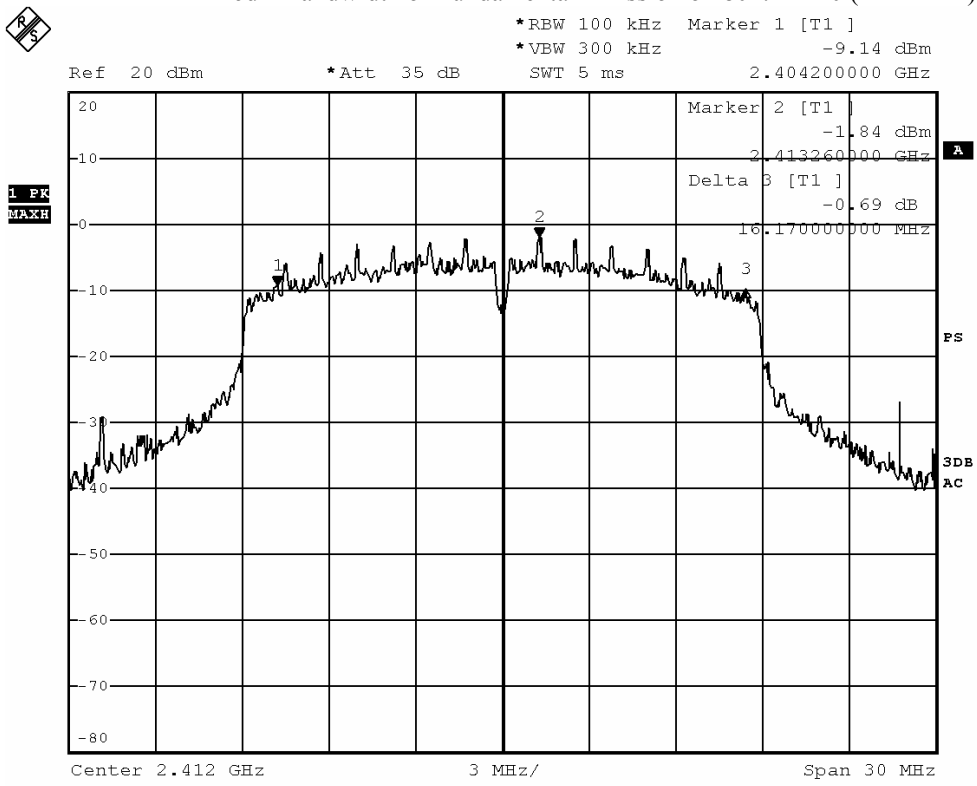

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Limits for 6dB Spectrum Bandwidth Measurement:

Frequency Range [MHz]	6dB Bandwidth [MHz]	FCC Limits [kHz]
2437.0	16.230	> 500

6dB Bandwidth of Fundamental Emission on 802.11 n20 (2437MHz)

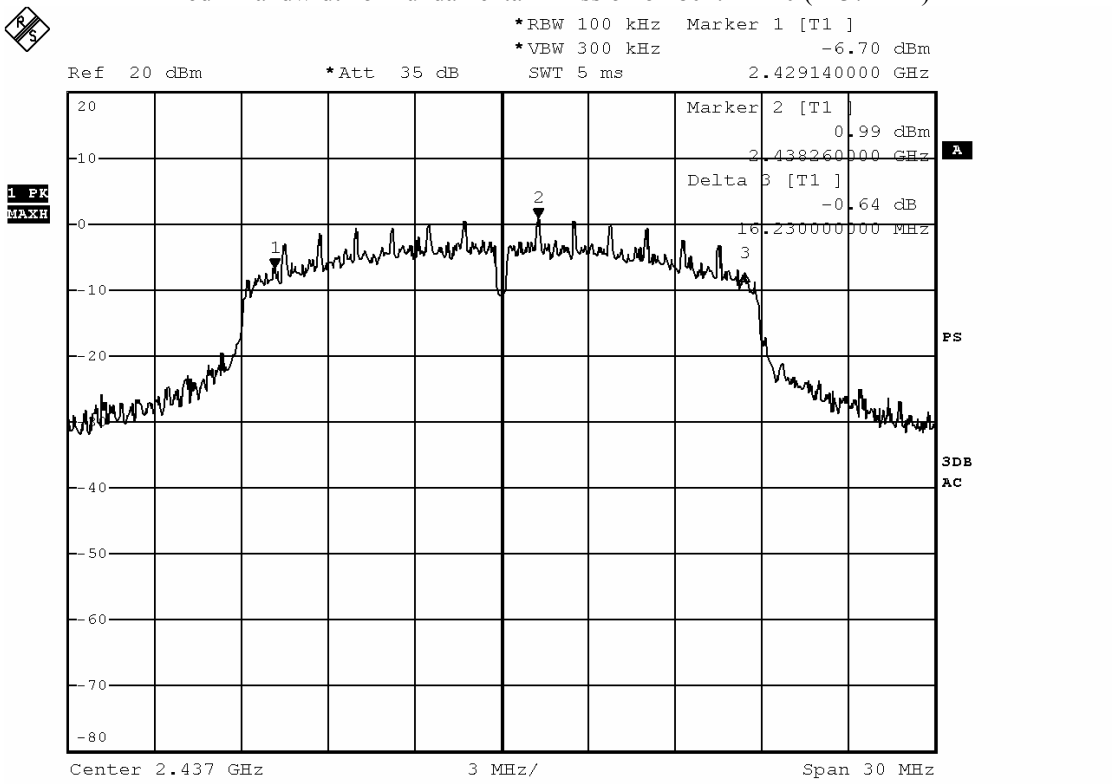

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Limits for 6dB Spectrum Bandwidth Measurement:

Frequency Range [MHz]	6dB Bandwidth [MHz]	FCC Limits [kHz]
2462.0	16.20	> 500

6dB Bandwidth of Fundamental Emission on 802.11 n20 (2462MHz)

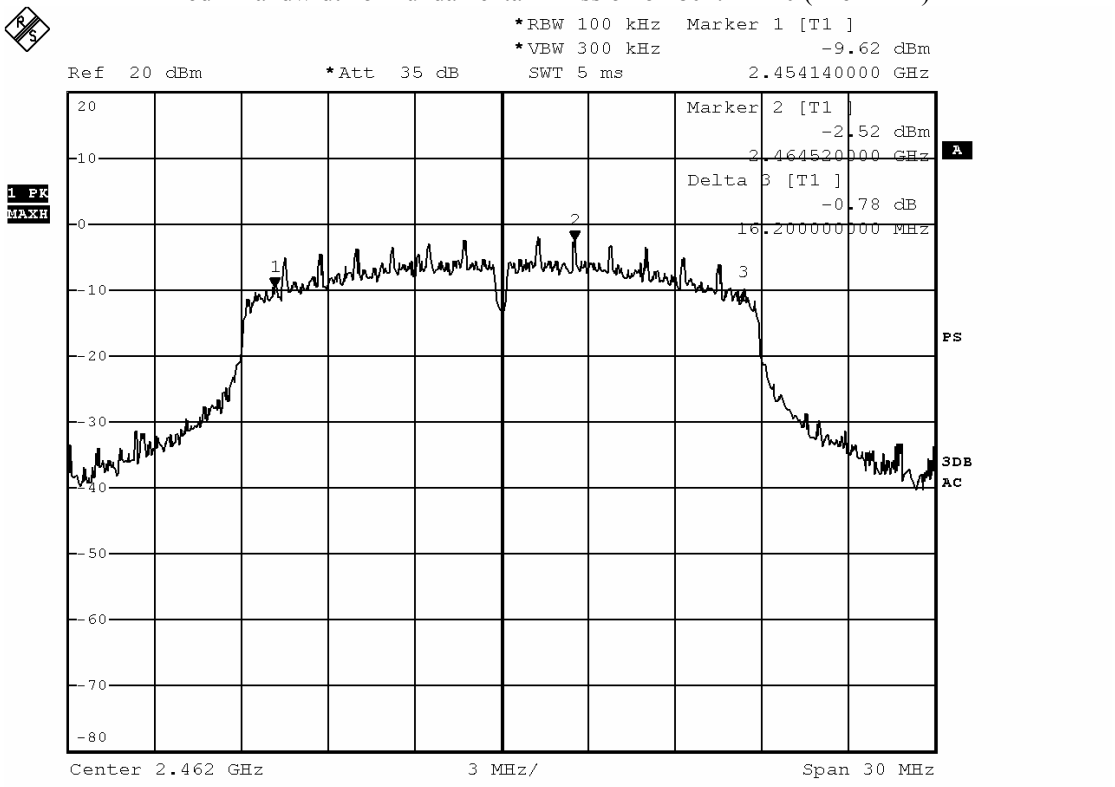

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

3.1.6 Band Edges Measurement

Test Requirement:	FCC 47CFR 15.247
Test Method:	ANSI C63.10:2013
Test Date:	2017-03-13
Mode of Operation:	Wifi mode

Test Method:

The band edge is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. The RBW are set to 100kHz and VBW are set to 300kHz for this measurement.

Test Setup:

As Test Setup of clause 3.1.2 in this test report.

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Band-edge Compliance of RF Conducted Emissions Measurement:

Limit：

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

Remark: Emissions under the fixed frequency mode and hopping mode have been investigated, the worst-case measurement results were recorded in the test report

Frequency Range [MHz]	Radiated Emission Attenuated below the Fundamental [dB]
2400 – Lowest Fundamental (2402)	49.21

Band-edge Compliance of RF Emissions – Lowest (802.11b)

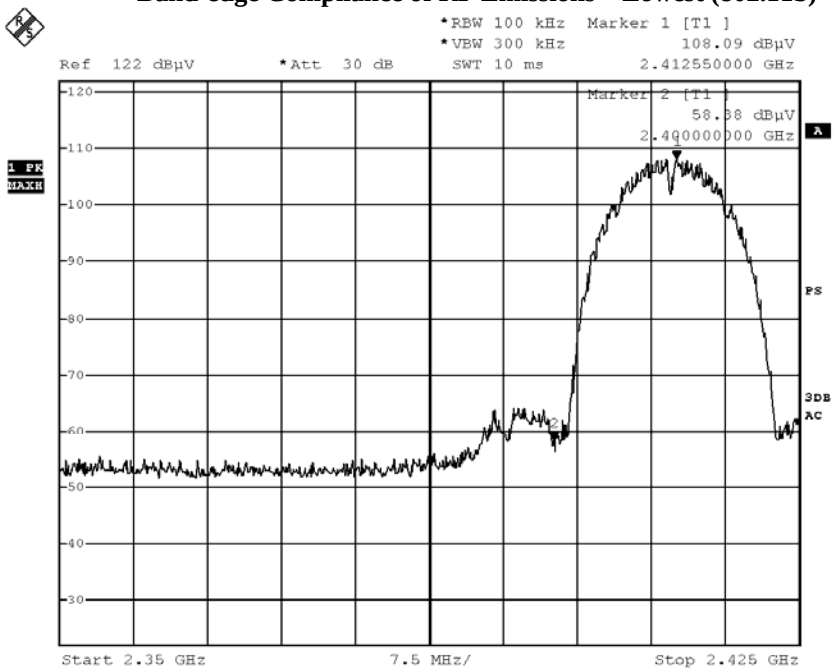

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range [MHz]	Radiated Emission Attenuated below the Fundamental [dB]
2483.5 - Highest Fundamental (2480)	53.68

Band-edge Compliance of RF Emissions – Highest (802.11b)

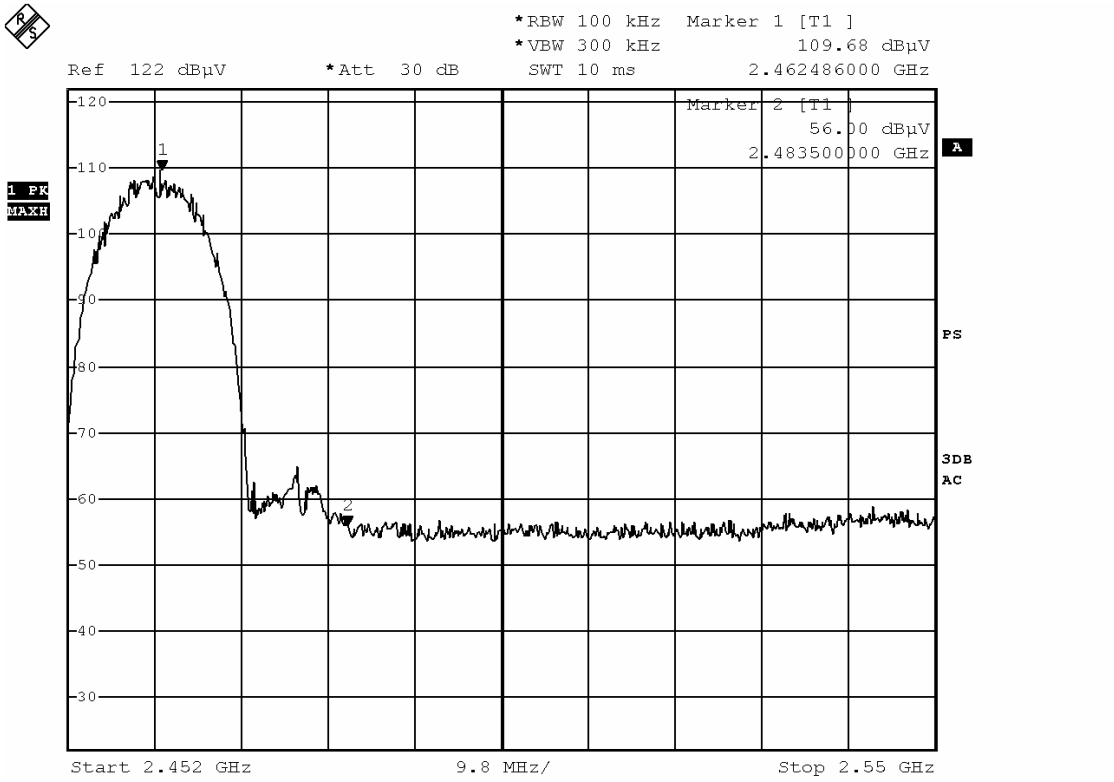

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range [MHz]	Radiated Emission Attenuated below the Fundamental [dB]
2400 - Lowest Fundamental (2402)	29.78

Band-edge Compliance of RF Emissions – Lowest (802.11g)

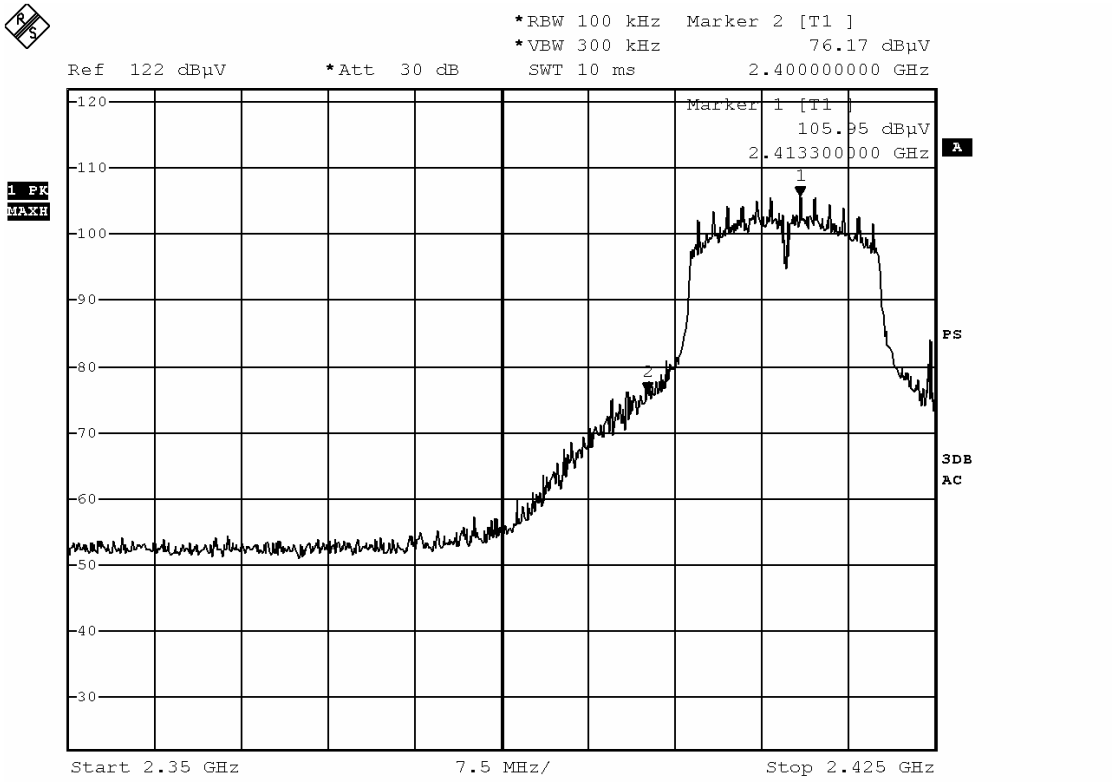

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range [MHz]	Radiated Emission Attenuated below the Fundamental [dB]
2483.5 - Highest Fundamental (2480)	47.24

Band-edge Compliance of RF Emissions – Highest (802.11g)

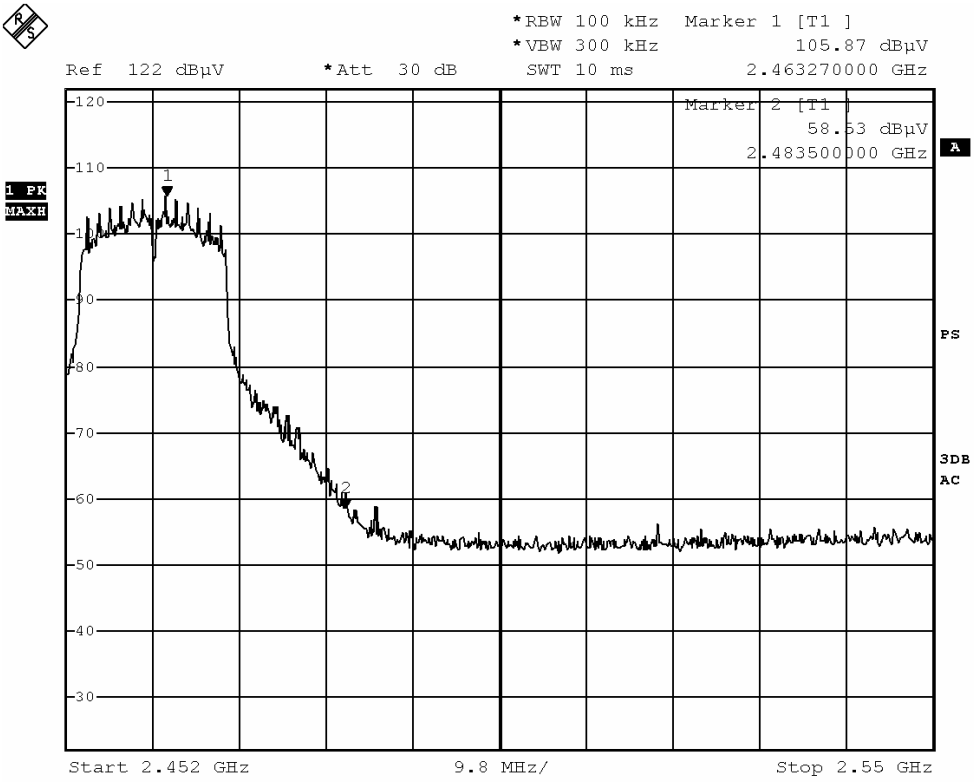

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range [MHz]	Radiated Emission Attenuated below the Fundamental [dB]
2400 - Lowest Fundamental (2402)	31.84

Band-edge Compliance of RF Emissions – Lowest (802.11n20)

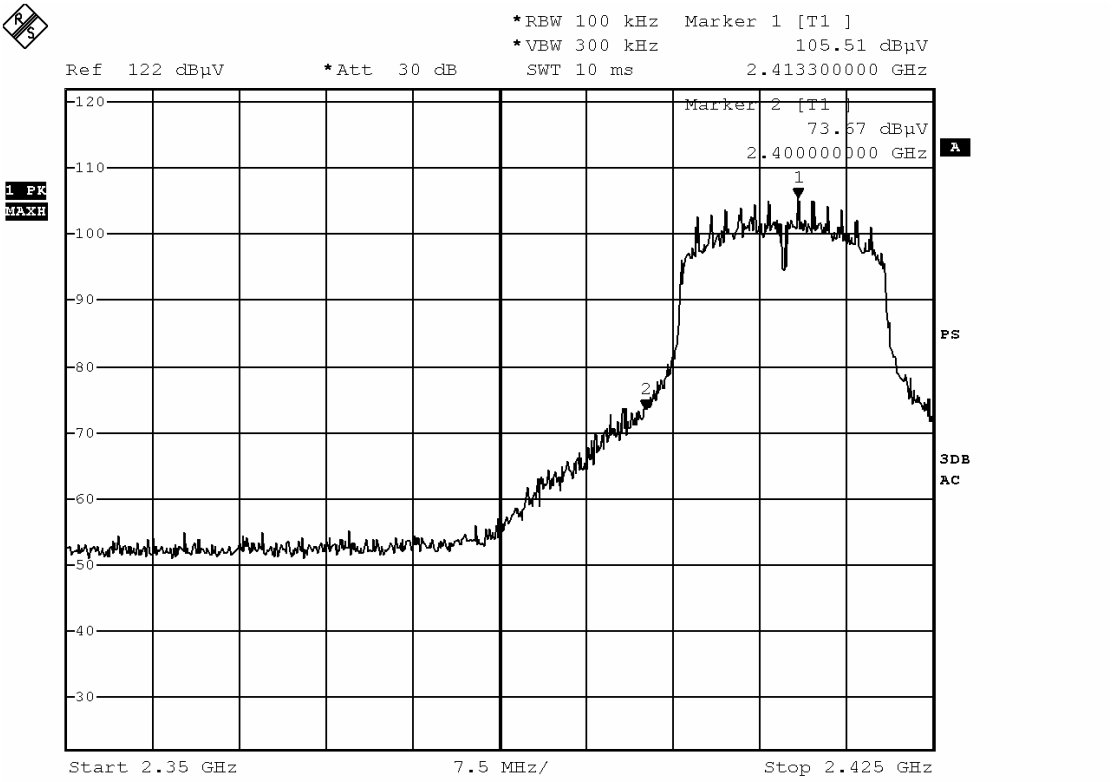

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range [MHz]	Radiated Emission Attenuated below the Fundamental [dB]
2483.5 - Highest Fundamental (2480)	48.13

Band-edge Compliance of RF Emissions – Highest (802.11n20)

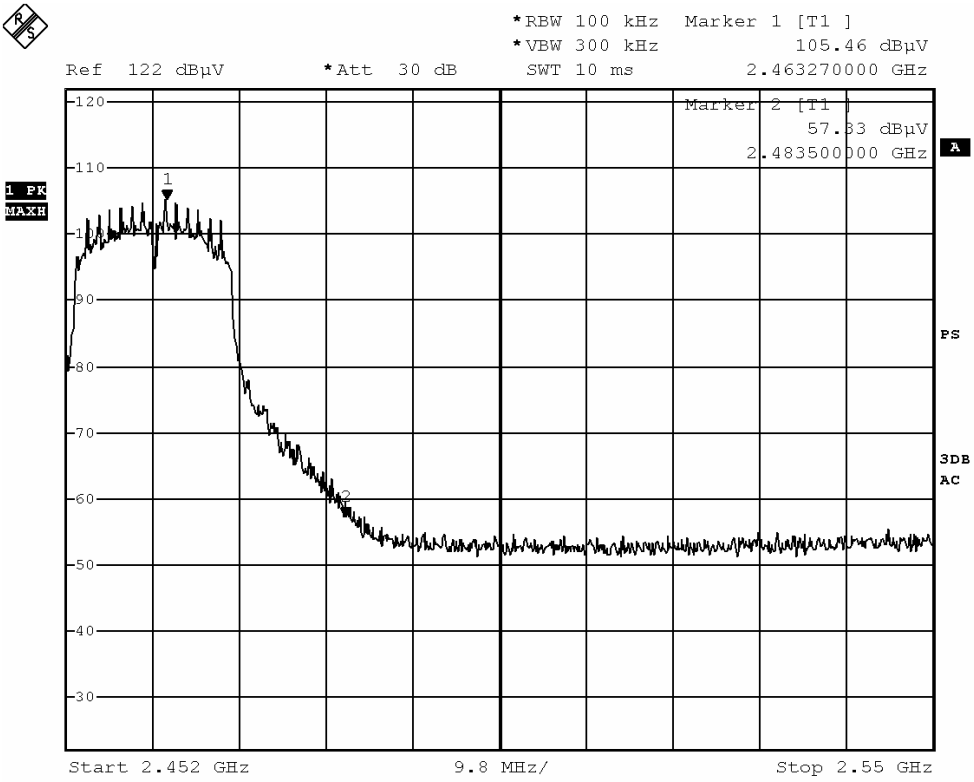

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Band-edge Compliance of RF Conducted Emissions Measurement:

Limit：

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

Remark: Emissions under the fixed frequency mode and hopping mode have been investigated, the worst-case measurement results were recorded in the test report

Band-edge Compliance of RF Emissions (802.11b 2412MHz)

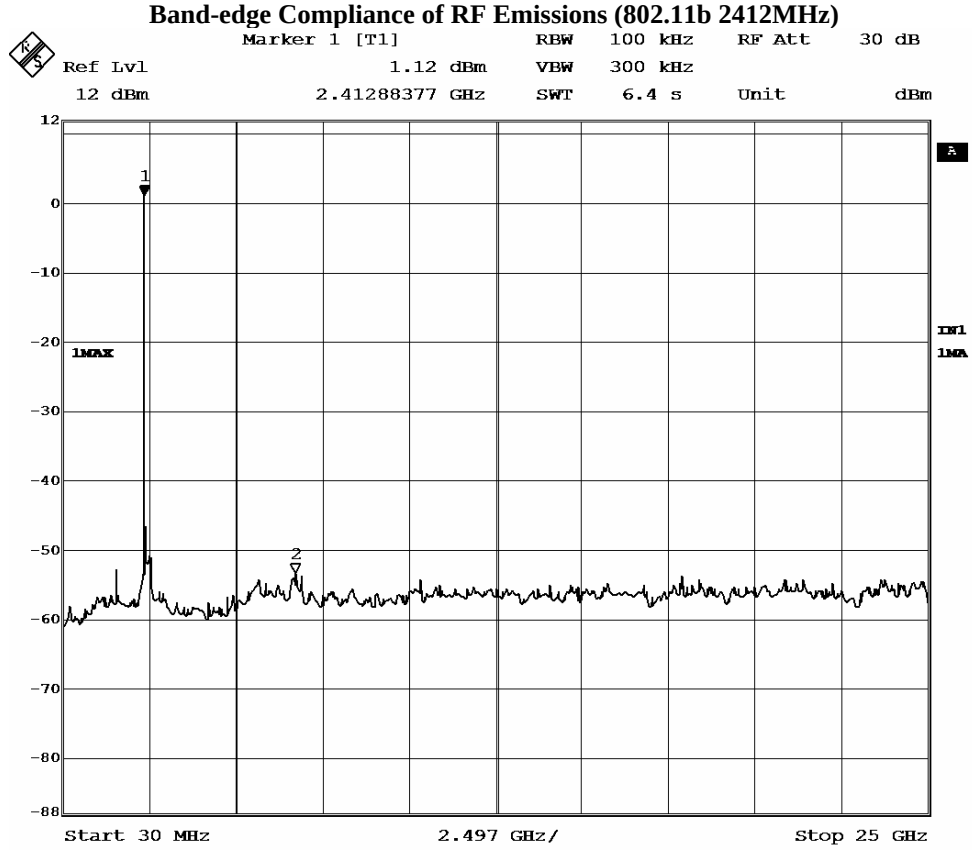

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Band-edge Compliance of RF Emissions (802.11g 2412MHz)

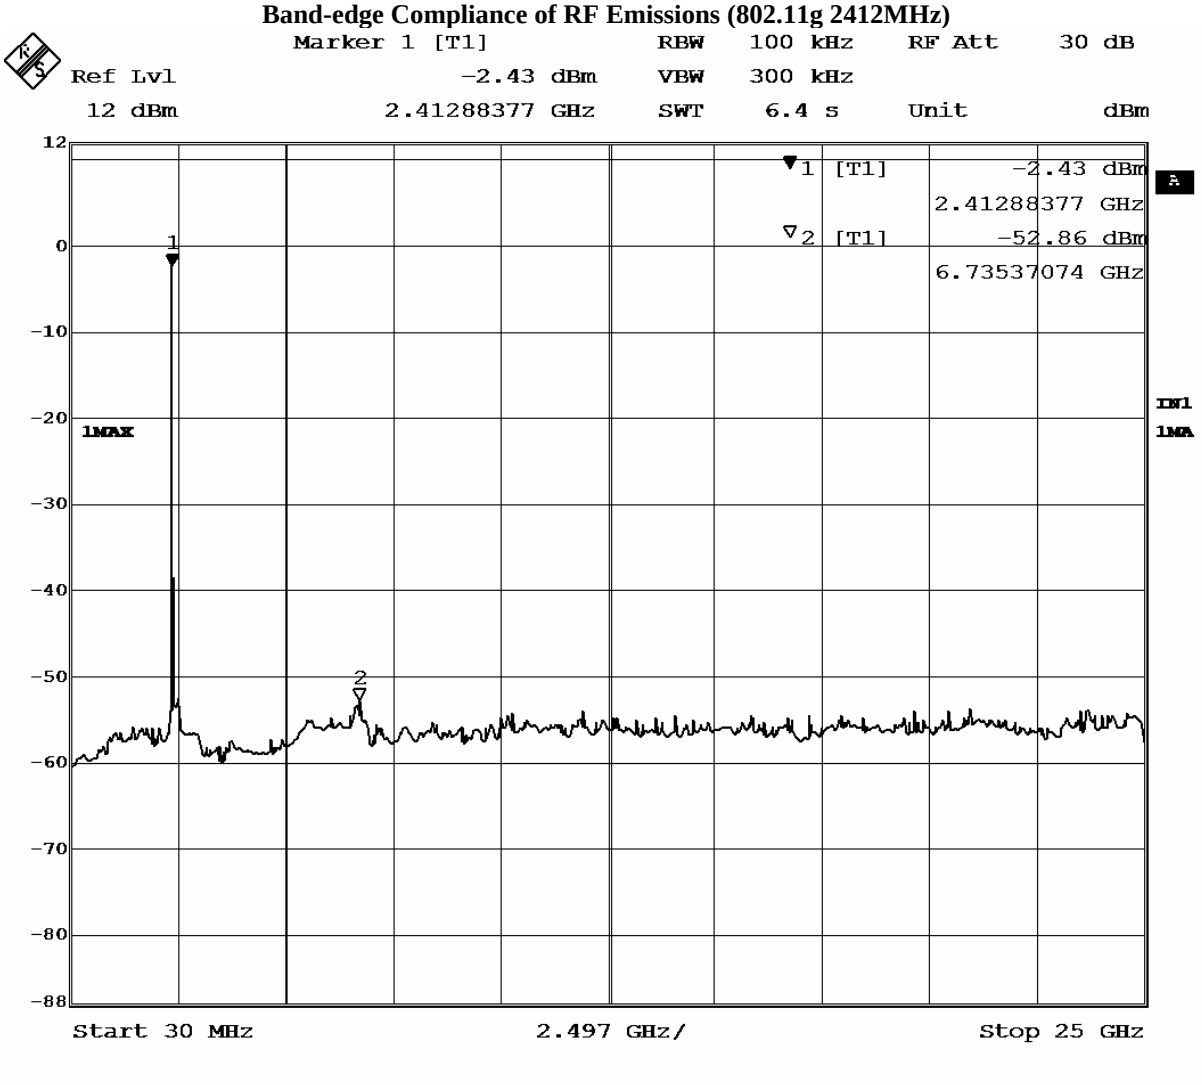

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Band-edge Compliance of RF Emissions (802.11n20 2412MHz)

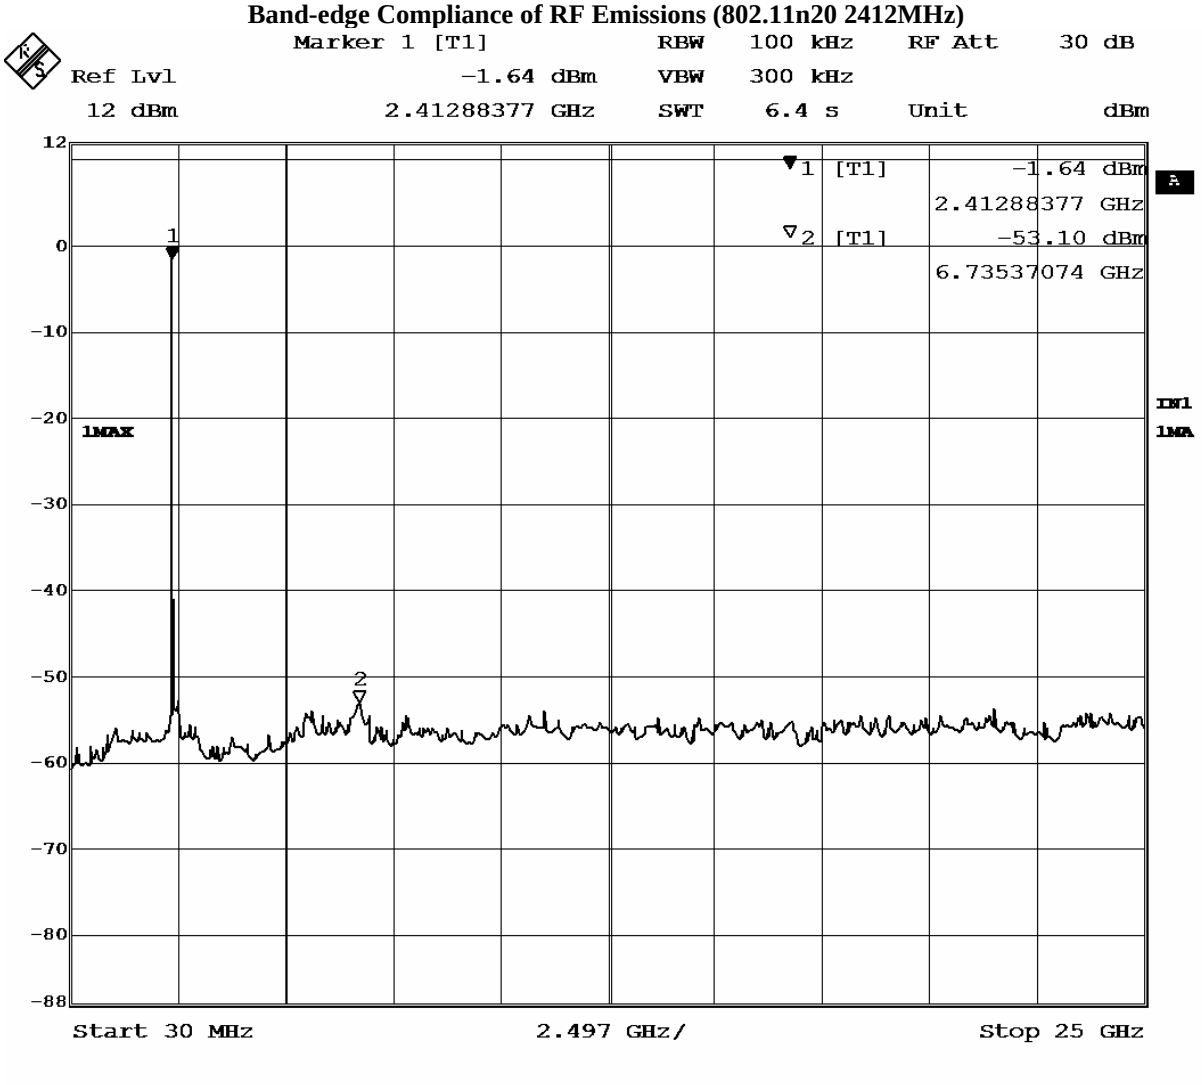

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

3.1.7 Antenna Requirement

Test Requirements: § 15.203

Test Specification:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Test Results:

This is chip antenna. There is no external antenna, the antenna gain = 1.9dBi. User is unable to remove or changed the Antenna.

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

3.1.8 RF Exposure

Test Requirement:	FCC 47CFR 15.247(i)
Test Date:	2017-03-21
Mode of Operation:	Wifi mode

Test Method:

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

Test Results:

The EUT complied with the requirement(s) of this section.
EUT meets the requirements of these sections as proven through MPE calculation
The MPE calculation for EUT @ 20cm
Based on the highest P =41.78 mW

The power tune up tolerance is 15.21±1.0dBm
Max. duty factor is 100%

$Pd = PG/ 4pi*R^2 = (41.78x\ 1.55)/12.566* (20)^2$
$= (64.71)/12.566x\ 400= 64.71 /5026.4$
$= 0.0129mW/cm^2$

where:
*Pd = power density in mW/cm2
* G = Antenna numeric gain (1.55); Log G = g/10 (g = 1.9dBi).
* P = Conducted RF power to antenna (41.78 mW).
* R = Minimum allowable distance.(20 cm)

*The power density Pd = $0.0129mW/cm^2$ is less than 1 mW/cm^2 (listed MPE limit)
*The SAR evaluation is not needed (this is a desk top device, R> 20 cm)
* The EUT(antenna) must be 0.2 meters away from the General Population.

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Appendix A

List of Measurement Equipment

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EMD004	LISN	ROHDE & SCHWARZ	ESH3-Z5	100102	2016.3.29	2017.3.29
EMD022	EMI Test Receiver	ROHDE & SCHWARZ	ESCS30	100314	2016.3.29	2017.3.29
EMD035	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	100441	2016.3.29	2017.3.29
EMD036	EMI Test Receiver	ROHDE & SCHWARZ	ESIB 26	100388	2016.3.29	2017.3.29
EMD041	TWO-LINE V-NETWORK	ROHDE & SCHWARZ	ENV216	100261	2016.3.29	2017.3.29
EMD061	Biconilog Antenna	ETS.LINDGREN	3142C	00060439	2016.12.30	2018.12.30
EMD062	Double-Ridged Waveguide (1GHz – 18GHz)	ETS.LINDGREN	3117	00075933	2014.11.15	2017.11.15
EMD084	MULTI-DVICE CONTROLLER	ETS.LINDGREN	2090	00060107	N/A	N/A
EMD088	Video Contol Unit	ETS.LINDGREN	Y21953A	2601073	N/A	N/A
EMD093	Monitor	ViewSonic	VA9036	Q8X064201876	N/A	N/A
EMD102	Intelligent Frequency	Ainuo lnstrument Co., Ltd	AN97005SS	79707454	N/A	N/A
EMD103	Intelligent Frequency	Ainuo lnstrument Co., Ltd	AN97005SS	79707455	N/A	N/A
EMD105	FACT-3 EMC Chamber	ETS.LINDGREN	FACT-3	3803	N/A	N/A
EMD106	Shielding Room #1	ETS.LINDGREN	RFD-100	3802	N/A	N/A
EMD111	Power meter	ROHDE & SCHWARZ	NRVD	102051	2016.3.29	2017.3.29
	100V Insertion Unit	ROHDE & SCHWARZ	URV5-Z4	100464	2016.3.29	2017.3.29
EMD113	Pre-Amplifier	ROHDE & SCHWARZ	N/A	1129588	2016.3.29	2017.3.29
EMD124	Loop Antenna	ETS-Lindgren	6502	00104905	2016.05.23	2017.05.23
EMD131	Standard Gain Horn Antenna (18GHz – 26.5GHz)	Chengdu AINFO lnc.	JXTXLB-42-15-C-KF	J2021100721001	2015.04.09	2017.04.09
RE01	RF cable	N/A	N/A	N/A	2016-9-28	2018-9-27
RE02	RF cable	N/A	N/A	N/A	2016-9-28	2018-9-27

Remarks:-

N/A Not Applicable or Not Available

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Appendix B

Photographs of EUT

Front View of the product

Rear View of the product

Inside View of the product

Inner Circuit Top View

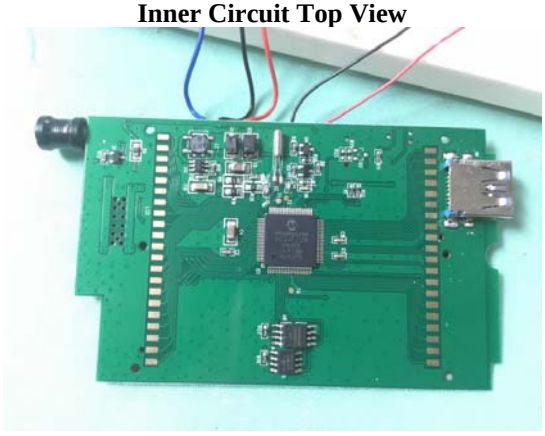

Inner Circuit Bottom View

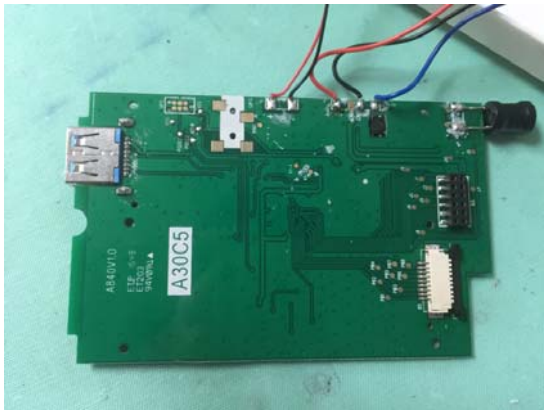

Inner Circuit Top View

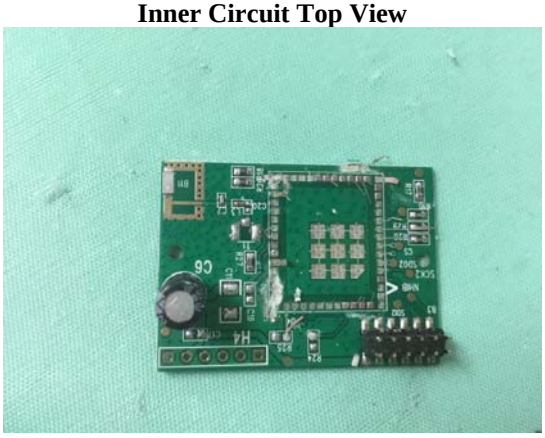

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Photographs of EUT

Inner Circuit Bottom View

Inner Circuit Top View

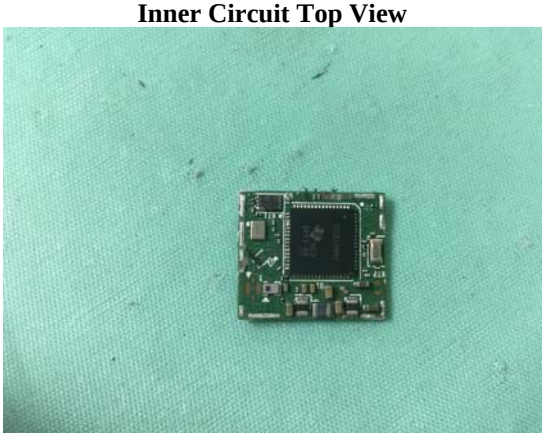

Inner Circuit Bottom View

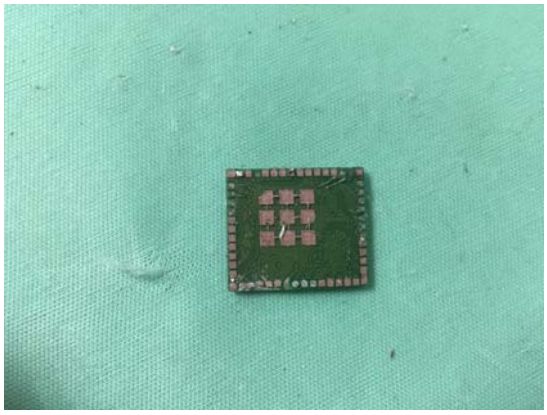

Inside View of the product

Inner Circuit Top View

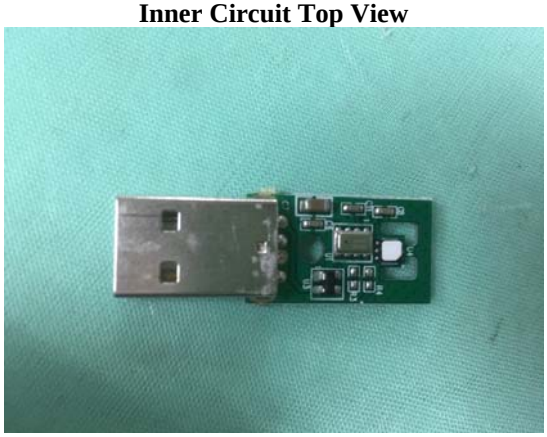

Inner Circuit Bottom View

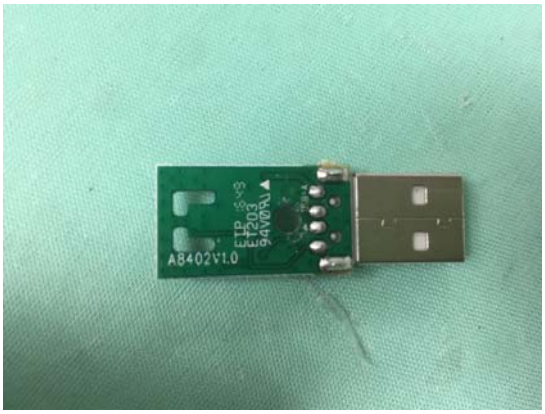

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Photographs of EUT

Measurement of Radiated Emission Test Set Up (9kHz – 30MHz)

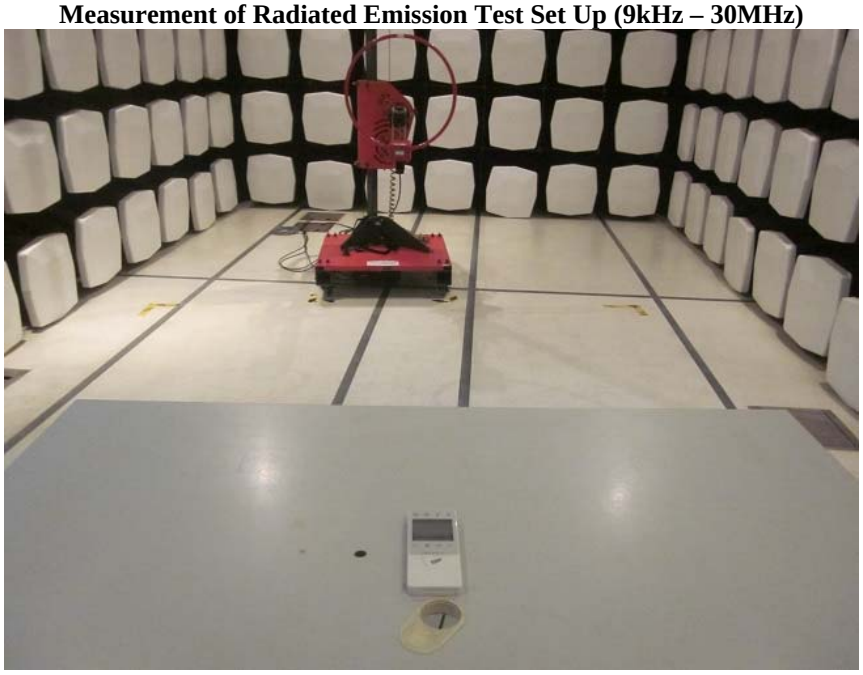

Measurement of Radiated Emission Test Set Up (30MHz – 1000MHz)

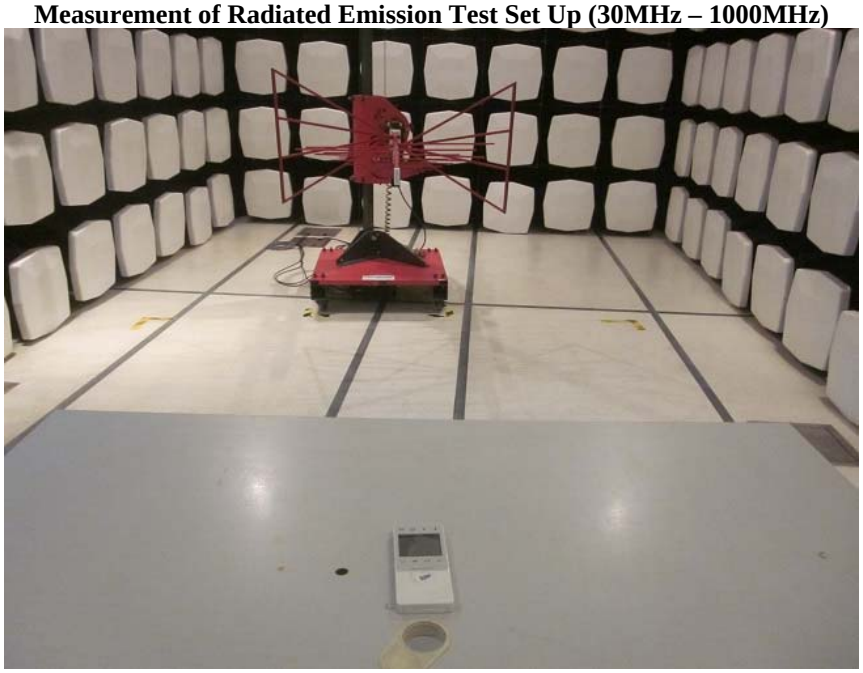

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Photographs of EUT

Measurement of Radiated Emission Test Set Up (above 1000MHz)

******* End of Test Report *******

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.
For Conditions of issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Conditions of Issuance of Test Reports

1. All samples and goods are accepted by The STC (Dongguan) Company Limited (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The Company provides its services on the basis that such terms and conditions constitute express agreement between the Company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by the Company as a result of this application for testing service (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to his customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. The Report refers only to the sample tested and does not apply to the bulk, unless the sampling has been carried out by the Company and is stated as such in the Report.

5. In the event of the improper use the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

6. Sample submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

7. The Company will not be liable for or accept responsibility for any loss or damage howsoever arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

8. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

9. Subject to the variable length of retention time for test data and report stored hereinto as to otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of this test report for a period of three years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after the retention period. Under no circumstances shall we be liable for damages of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.

10. Issuance records of the Report are available on the internet at dgstc@dgstc.org. Further enquiry of validity or verification of the Reports should be addressed to the Company.