

hp

REF -24.0 dBm

AT 10 dB

Worst Case:

PEAK

LOG


10

dB/

WA SB

SC VS

CORR

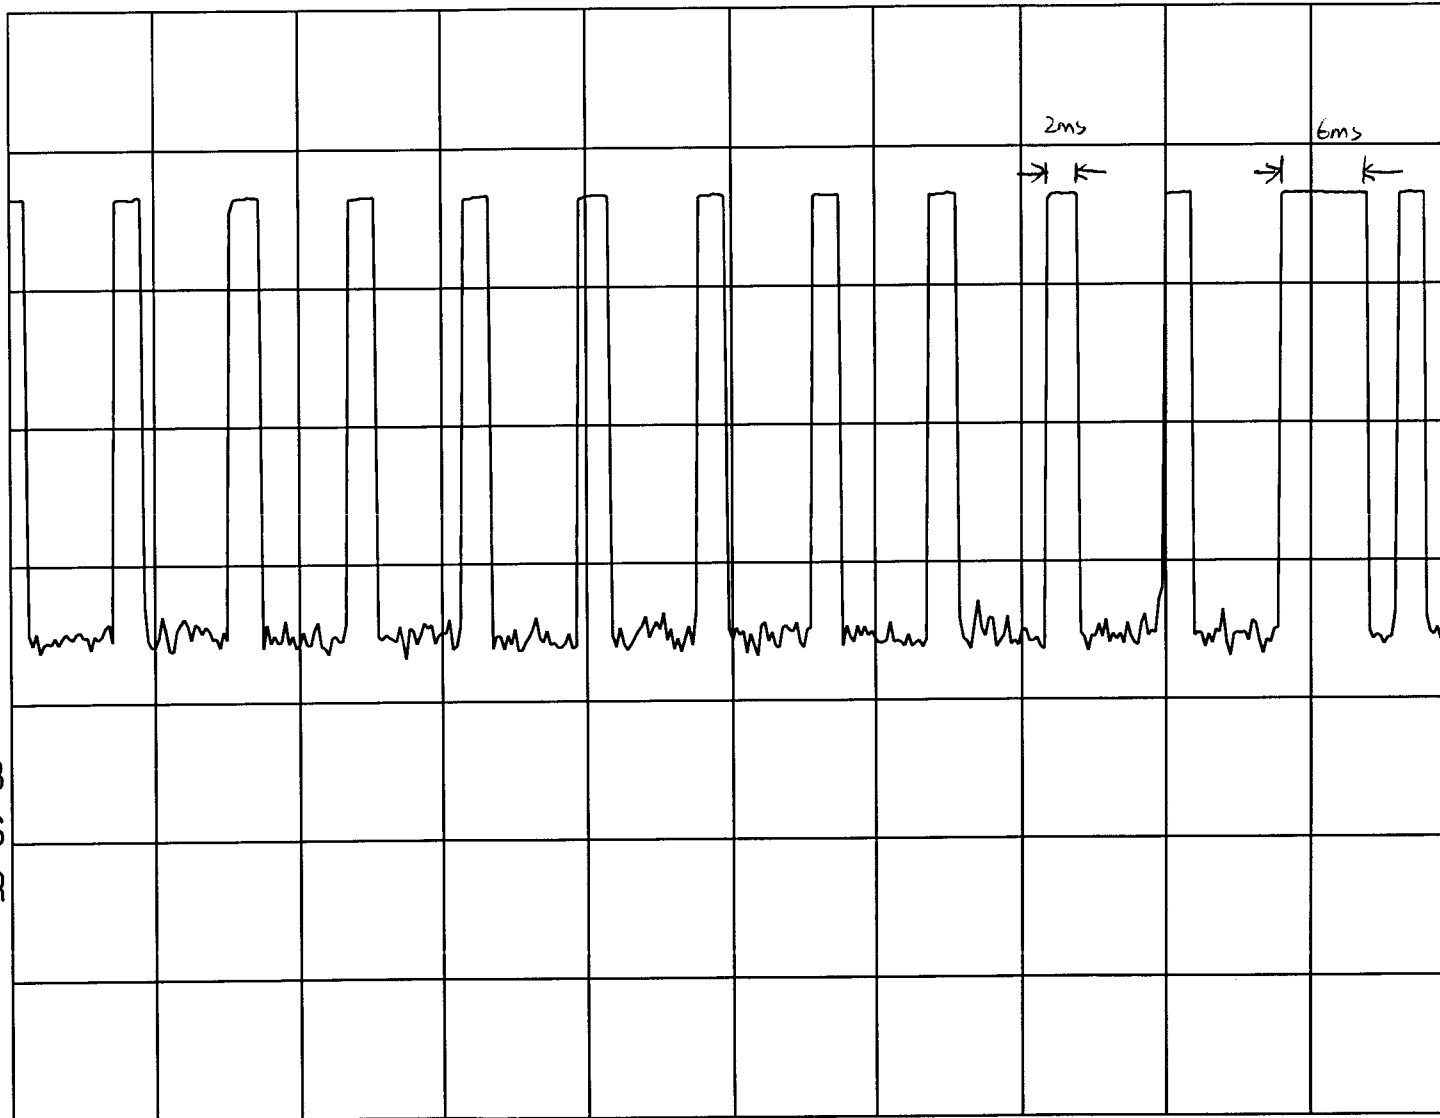

All 6ms
2ms

Duty Cycle = $(6 \times 12 + 4) / 100$
= $76 / 100 = 0.76$

Average Factor = -2.4 dB

CENTER 433.930 MHz

SPAN 0 Hz

#RES BW 3.0 MHz

#VBW 3 MHz

#SWP 100 msec

hp

REF -24.0 dBm

AT 10 dB

PEAK

LOG


10

dB/

WA SB

SC VS

CORR

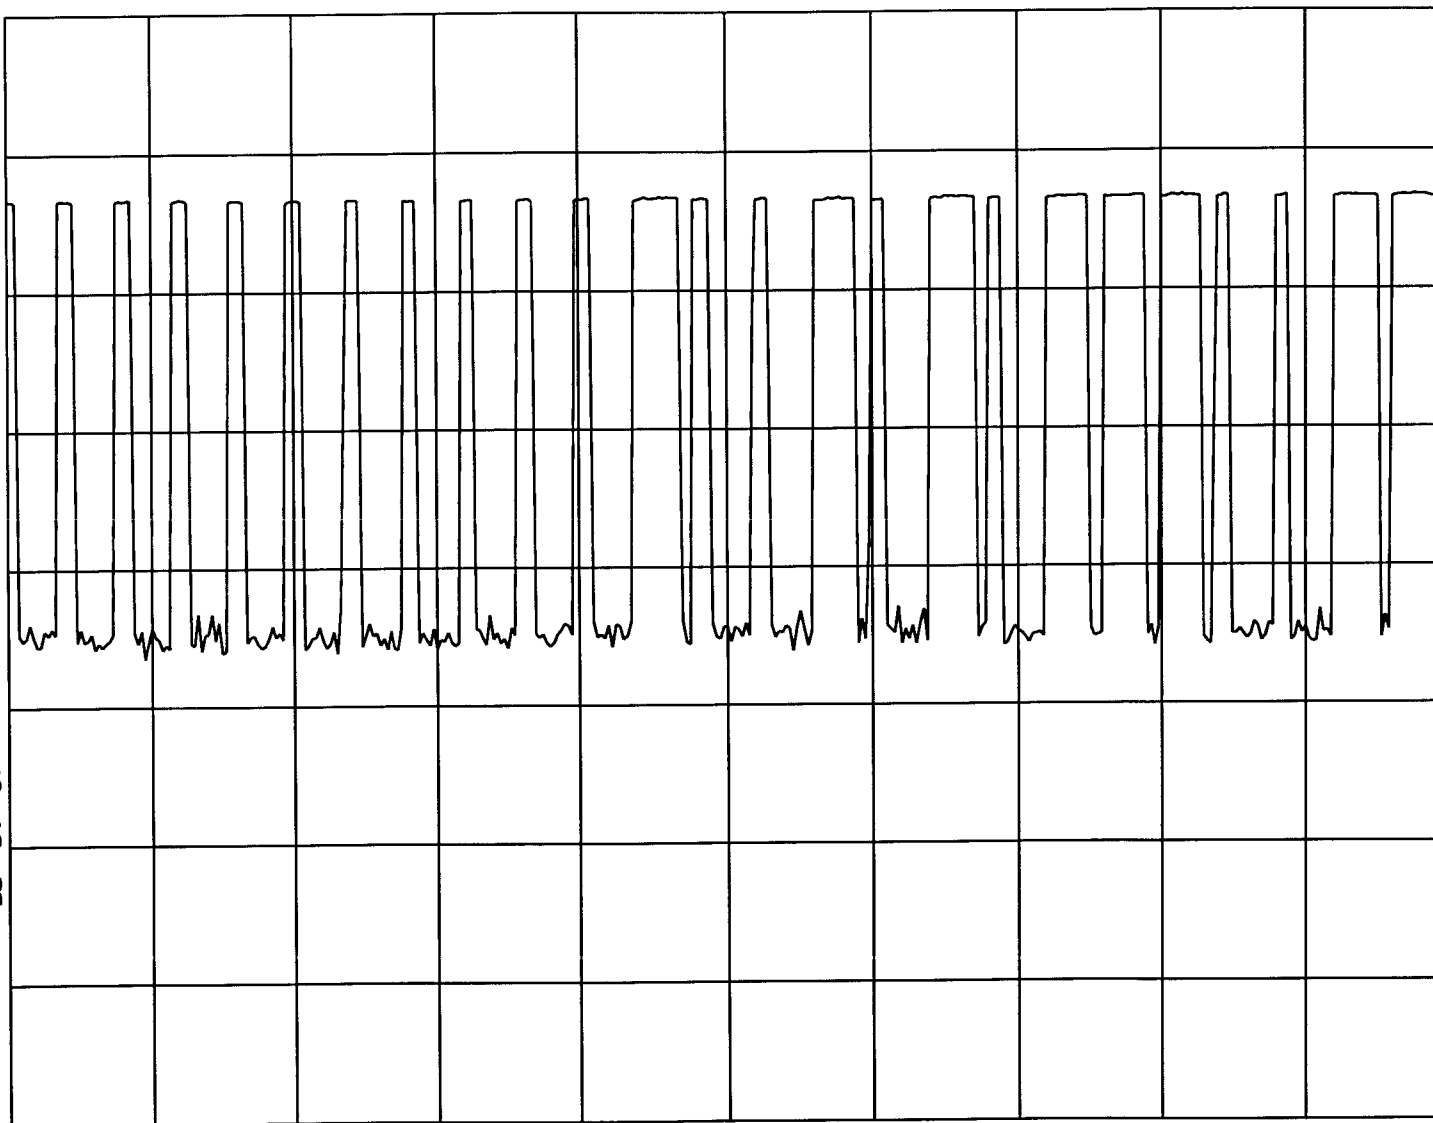

CENTER 433.930 MHz

SPAN 0 Hz

#RES BW 3.0 MHz

#VBW 3 MHz

SWP 200 msec

10

MKR 940.00 msec

REF -10.0 dBm

AT 10 dB

-33.64 dBm

PEAK

LOG

10

dB/

VA SB

SC VC

CORR

CENTER 433.970 MHz

#RES BW 3.0 MHz

#VBW 3 MHz

SPAN 0 Hz

#SWP 1.00 sec

7063

hp

REF -10.0 dBm

AT 10 dB

PEAK

LOG

10

dB/

Silent Period is about 3 min

WA SB

SC VC

CORR

CENTER 433.969 MHz

SPAN 0 Hz

#RES BW 3.0 MHz

#VBW 3 MHz

#SWP 100 sec

7063