



FCC TEST REPORT

REPORT NO.: 070215FIA02

MODEL NO.: BM-148

RECEIVED: Feb. 14, 2007

TESTED: Feb. 14 ~ Mar. 19, 2007

ISSUED: Mar. 20, 2007

APPLICANT: Tsuen Shing Enterprises Ltd

ADDRESS: 19/F, Billion Plaza, No. 8, Cheung Yue Street,
Chueng Sha Wan, Kowloon, H.K.

ISSUED BY: ADT (Shanghai) Corporation

ADDRESS: 2F, Building C, No.1618, Yishan Rd., 201103,
Shanghai, China

This test report consists of 62 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by A2LA or any government agencies. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards. This report contains data that were produced under Laboratory ADT (Shanghai) Corporation.

ADT (Shanghai) Corporation.



V 1.0



TABLE OF CONTENTS

| | |
|--|----|
| 1. CERTIFICATION | 5 |
| 2. SUMMARY OF TEST RESULTS..... | 6 |
| 2.1 MEASUREMENT UNCERTAINTY | 7 |
| 3. GENERAL INFORMATION | 8 |
| 3.1 GENERAL DESCRIPTION OF EUT..... | 8 |
| 3.2 DESCRIPTION OF TEST MODES..... | 10 |
| 3.2.1 CONFIGURATION OF SYSTEM UNDER TEST | 11 |
| 3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL..... | 12 |
| 3.2.3 GENERAL DESCRIPTION OF APPLIED STANDARDS..... | 15 |
| 3.2.4 DESCRIPTION OF SUPPORT UNITS | 15 |
| 4. TEST TYPES AND RESULTS..... | 16 |
| 4.1 CONDUCTED EMISSION MEASUREMENT | 16 |
| 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT..... | 16 |
| 4.1.2 TEST INSTRUMENTS | 16 |
| 4.1.3 TEST PROCEDURE | 16 |
| 4.1.4 DEVIATION FROM TEST STANDARD | 17 |
| 4.1.5 TEST SETUP | 17 |
| 4.1.6 EUT OPERATING CONDITIONS | 17 |
| 4.1.7 TEST RESULTS | 18 |
| 4.2 RADIATED EMISSION MEASUREMENT | 22 |
| 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT..... | 22 |
| 4.2.2 TEST INSTRUMENTS | 23 |
| 4.2.3 TEST PROCEDURES | 24 |
| 4.2.4 DEVIATION FROM TEST STANDARD | 24 |
| 4.2.5 TEST SETUP | 25 |
| 4.2.6 EUT OPERATING CONDITIONS | 25 |
| 4.2.7 TEST RESULTS | 26 |

| | | |
|-------|---|----|
| 4.3 | NUMBER OF HOPPING FREQUENCY USED | 38 |
| 4.3.1 | LIMIT OF HOPPING FREQUENCY USED | 38 |
| 4.3.2 | TEST INSTRUMENTS | 38 |
| 4.3.3 | TEST PROCEDURES | 38 |
| 4.3.4 | DEVIATION FROM TEST STANDARD | 38 |
| 4.3.5 | TEST SETUP | 39 |
| 4.3.6 | EUT OPERATING CONDITIONS | 39 |
| 4.3.7 | TEST RESULTS | 40 |
| 4.4 | DWELL TIME ON EACH CHANNEL | 41 |
| 4.4.1 | LIMIT OF DWELL TIME USED | 41 |
| 4.4.2 | TEST INSTRUMENTS | 41 |
| 4.4.3 | TEST PROCEDURES | 41 |
| 4.4.4 | DEVIATION FROM TEST STANDARD | 42 |
| 4.4.5 | TEST SETUP | 42 |
| 4.4.6 | EUT OPERATING CONDITIONS | 42 |
| 4.4.7 | TEST RESULTS | 43 |
| 4.5 | CHANNEL BANDWIDTH | 47 |
| 4.5.1 | LIMITS OF CHANNEL BANDWIDTH | 47 |
| 4.5.2 | TEST INSTRUMENTS | 47 |
| 4.5.3 | TEST PROCEDURE | 47 |
| 4.5.4 | DEVIATION FROM TEST STANDARD | 47 |
| 4.5.5 | TEST SETUP | 48 |
| 4.5.6 | EUT OPERATING CONDITION | 48 |
| 4.5.7 | TEST RESULTS | 49 |
| 4.6 | HOPPING CHANNEL SEPARATION | 51 |
| 4.6.1 | LIMIT OF HOPPING CHANNEL SEPARATION | 51 |
| 4.6.2 | TEST INSTRUMENTS | 51 |
| 4.6.3 | TEST PROCEDURES | 51 |
| 4.6.4 | DEVIATION FROM TEST STANDARD | 51 |
| 4.6.5 | TEST SETUP | 52 |
| 4.6.6 | EUT OPERATING CONDITIONS | 52 |
| 4.6.7 | TEST RESULTS | 53 |

| | | |
|-------|---|-----|
| 4.7 | MAXIMUM PEAK OUTPUT POWER | 55 |
| 4.7.1 | LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT | 55 |
| 4.7.2 | TEST INSTRUMENTS | 55 |
| 4.7.3 | TEST PROCEDURES | 55 |
| 4.7.4 | DEVIATION FROM TEST STANDARD | 56 |
| 4.7.5 | TEST SETUP | 56 |
| 4.7.6 | EUT OPERATING CONDITION | 56 |
| 4.7.7 | TEST RESULTS | 57 |
| 4.8 | BAND EDGES MEASUREMENT | 58 |
| 4.8.1 | LIMITS OF BAND EDGES MEASUREMENT | 58 |
| 4.8.2 | TEST INSTRUMENTS | 58 |
| 4.8.3 | TEST PROCEDURE | 58 |
| 4.8.4 | DEVIATION FROM TEST STANDARD | 58 |
| 4.8.5 | EUT OPERATING CONDITION | 58 |
| 4.8.6 | TEST RESULTS | 59 |
| 4.9 | ANTENNA REQUIREMENT | 60 |
| 4.9.1 | STANDARD APPLICABLE | 60 |
| 4.9.2 | ANTENNA CONNECTED CONSTRUCTION | 60 |
| 5. | INFORMATION ON THE TESTING LABORATORY | 61 |
| | APPENDIX-A..... | A-1 |



1. CERTIFICATION

PRODUCT: 2.4GHz Digital Baby Phone (with LCD / with LED)

MODEL NO.: BM-148

BRAND NAME: Tsuen Shing

APPLICANT: Tsuen Shing Enterprises Ltd

TESTED: Feb. 14 ~ Mar. 19, 2007

TEST ITEM: Engineering Sample

STANDARDS: FCC Part 15, Subpart C (Section 15.247),

ANSI C63.4-2003

We, **ADT (Shanghai) Corporation**, declare that the equipment above has been tested in our facility and found compliance with the requirement limits of applicable standards. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate under the standards herein specified.

**TECHNICAL
ACCEPTANCE :**

Bright Tong

, **DATE:** Mar. 20, 2007

Bright Tong
Engineering Supervisor

APPROVED BY :

A handwritten signature of Wallace Pan.

, **DATE:** Mar. 20, 2007

Wallace Pan
Director of Operations

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

| APPLIED STANDARD: FCC Part 15, Subpart C | | | |
|--|---|--------|--|
| STANDARD SECTION | TEST TYPE AND LIMIT | RESULT | REMARK |
| 15.207 | AC Power Conducted Emission (Test mode B2 & B4) | PASS | Meet the requirement of limit. Minimum passing margin is -32.05dB at 0.322MHz. |
| 15.247(a)(1) (iii) | Number of Hopping Frequency Used Spec.: At least 15 channels | PASS | Meet the requirement of limit. |
| 15.247(a)(1) (iii) | Dwell Time on Each Channel Spec.: Max. 0.4 second within 31.6 second | PASS | Meet the requirement of limit. |
| 15.247(a)(1) | 1. Hopping Channel Separation Spec. : Min. 25 kHz or two-thirds of 20 dB bandwidth, whichever is greater 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System | PASS | Meet the requirement of limit. |
| 15.247(b) | Maximum Peak Output Power Spec.: max. 1W | PASS | Meet the requirement of limit. |
| 15.247(d) | Transmitter Radiated Emissions Spec.: Table 15.209 (Test mode A2 & A4) | PASS | Meet the requirement of limit. Minimum passing margin is -11.59dB at 91.40MHz. |
| | Transmitter Radiated Emissions Spec.: Table 15.209 (Test mode B2 & B4) | PASS | Meet the requirement of limit. Minimum passing margin is -14.69dB at 12394.08MHz. |
| 15.247(d) | Band Edge Measurement | PASS | Meet the requirement of limit. |

Note: If the Frequency Hopping System operating in 2400-2483.5 MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20dB bandwidth of hopping channel, whichever is greater.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

| MEASUREMENT | FREQUENCY | UNCERTAINTY |
|---------------------|-----------------|-------------|
| Conducted emissions | 9kHz ~ 30MHz | 2.44 dB |
| Radiated emissions | 30MHz ~ 200MHz | 3.73 dB |
| | 200MHz ~1000MHz | 3.74 dB |
| | 1GHz ~ 18GHz | 2.20 dB |
| | 18GHz ~ 40GHz | 1.88 dB |

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

| | |
|-------------------------------|--|
| PRODUCT | 2.4GHz Digital Baby Phone (with LCD / with LED) |
| MODEL NO. | BM-148 |
| BRAND NAME | Tsuen Shing |
| POWER SUPPLY | For test mode A1 & A3: 4.5Vdc from batteries (3*AAA) For test mode B1 & B3: 120Vac, 60Hz from adapter |
| POWER ADAPTER SUPPLIED | Cable out: 1.8m, non-shielded |
| MODULATION TYPE | GFSK |
| RADIO TECHNOLOGY | FHSS |
| TRANSFER RATE | 558K/m |
| FREQUENCY RANGE | 2404.512 ~ 2478.816 MHz |
| NUMBER OF CHANNEL | 87 |
| OUTPUT POWER | 11.99dBm |
| ANTENNA TYPE | Soldered on PCB |
| ANTENNA GAIN | 0dBi |
| DATA CABLE | N/A |
| I/O PORTS | Refer to user's manual |
| ASSOCIATED DEVICES | N/A |

Note: 1. The whole system [2.4GHz Digital Baby Phone (with LCD / with LED)], with the general model number of BM-148, is composed by two single parts, one is with the model number of BM-148 TRANSMITTER and the other one is with the model number of BM-148 RECEIVER. This test report only contains the test results of model BM-148 RECEIVER. For model BM-148 TRANSMITTER, please refer to 070215FIA01 (FCC ID:PERBM-148TX).

Please take table 1 for the primary description of this product:

| Description | | | |
|----------------------|-----------|--------------------------|------------------------------------|
| Power supply | Test mode | Component's model number | Component's description |
| Powered by batteries | A | A1 BM-148 TRANSMITTER | Baby phone with music IC and LED |
| | | A2 BM-148 RECEIVER | Mother phone with music IC and LED |
| | | A3 BM-148 TRANSMITTER | Baby phone with music IC and LCD |
| | | A4 BM-148 RECEIVER | Mother phone with music IC and LCD |
| Powered by adapter | B | B1 BM-148 TRANSMITTER | Baby phone with music IC and LED |
| | | B2 BM-148 RECEIVER | Mother phone with music IC and LED |
| | | B3 BM-148 TRANSMITTER | Baby phone with music IC and LCD |
| | | B4 BM-148 RECEIVER | Mother phone with music IC and LCD |

(This test report only recorded the test data performed under test mode A2, A4 & B2, B4.)

Table 1

2. Please take table 2 for the specifications of power adapter:

| Manufactory | Model No. | Input voltage | Output voltage |
|-------------|-----------------|--------------------|----------------|
| ktec | KA12D075030024U | 120Vac, 60Hz, 65mA | 7.5Vdc, 300mA |

Table 2

3. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.


3.2 DESCRIPTION OF TEST MODES

87 channels are provided to this EUT:


| CH | FREQUENCY | CH | FREQUENCY |
|----|-----------|----|-----------|
| 1 | 2404.512 | 45 | 2442.528 |
| 2 | 2405.376 | 46 | 2443.392 |
| 3 | 2406.24 | 47 | 2444.256 |
| 4 | 2407.104 | 48 | 2445.12 |
| 5 | 2407.968 | 49 | 2445.984 |
| 6 | 2408.832 | 50 | 2446.848 |
| 7 | 2409.696 | 51 | 2447.712 |
| 8 | 2410.56 | 52 | 2448.576 |
| 9 | 2411.424 | 53 | 2449.44 |
| 10 | 2412.288 | 54 | 2450.304 |
| 11 | 2413.152 | 55 | 2451.168 |
| 12 | 2414.016 | 56 | 2452.032 |
| 13 | 2414.88 | 57 | 2452.896 |
| 14 | 2415.744 | 58 | 2453.76 |
| 15 | 2416.608 | 59 | 2454.624 |
| 16 | 2417.472 | 60 | 2455.488 |
| 17 | 2418.336 | 61 | 2456.352 |
| 18 | 2419.2 | 62 | 2457.216 |
| 19 | 2420.064 | 63 | 2458.08 |
| 20 | 2420.928 | 64 | 2458.944 |
| 21 | 2421.792 | 65 | 2459.808 |
| 22 | 2422.656 | 66 | 2460.672 |
| 23 | 2423.52 | 67 | 2461.536 |
| 24 | 2424.384 | 68 | 2462.4 |
| 25 | 2425.248 | 69 | 2463.264 |
| 26 | 2426.112 | 70 | 2464.128 |
| 27 | 2426.976 | 71 | 2464.992 |
| 28 | 2427.84 | 72 | 2465.856 |
| 29 | 2428.704 | 73 | 2466.72 |
| 30 | 2429.568 | 74 | 2467.584 |
| 31 | 2430.432 | 75 | 2468.448 |
| 32 | 2431.296 | 76 | 2469.312 |
| 33 | 2432.16 | 77 | 2470.176 |
| 34 | 2433.024 | 78 | 2471.04 |
| 35 | 2433.888 | 79 | 2471.904 |
| 36 | 2434.752 | 80 | 2472.768 |
| 37 | 2435.616 | 81 | 2473.632 |
| 38 | 2436.48 | 82 | 2474.496 |
| 39 | 2437.344 | 83 | 2475.36 |
| 40 | 2438.208 | 84 | 2476.224 |
| 41 | 2439.072 | 85 | 2477.088 |
| 42 | 2439.936 | 86 | 2477.952 |
| 43 | 2440.8 | 87 | 2478.816 |
| 44 | 2441.664 | | |

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Test mode A2 & A4

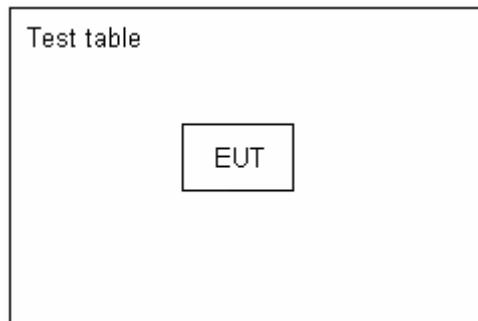

Test mode B2 & B4

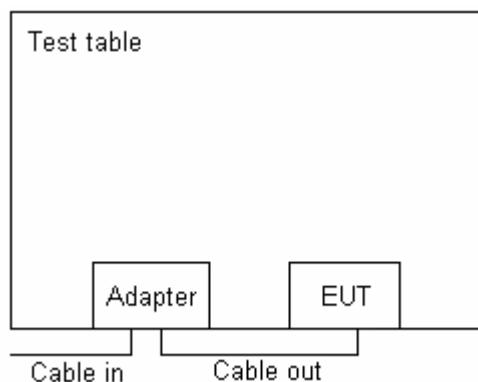

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

| EUT CONFIGURE MODE | Applicable to | | | | | | | Description |
|--------------------------|---------------|----|-----|------|----|----|----|----------------------|
| | DT | CB | HCS | MPOP | BM | CE | RE | |
| A2 | -- | -- | -- | -- | -- | -- | √ | Powered by batteries |
| A4 | -- | -- | -- | -- | -- | -- | √ | |
| B2 | | | | | | √ | √ | Powered by adapter |
| B4 | √ | √ | √ | √ | √ | √ | √ | |

Where

DT: Dwell Time on Each Channel**HCS:** Hopping Channel Separation**BM:** Band edge Measurement**RE:** Radiated Emission**CB:** Cannel Bandwidth**MPOP:** Maximum Peak Output Power**CE:** AC Power Conducted Emission

DWELL TIME ON EACH CHANNEL:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE |
|--------------------------|----------------------|-------------------|--------------------------|--------------------|-----------|
| B4 | 1 ~ 87 | 1, 45, 87 | FHSS | GFSK | 558K/m |

CHANNEL BANDWIDTH:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE |
|--------------------------|----------------------|-------------------|--------------------------|--------------------|-----------|
| B4 | 1 ~ 87 | 1, 45, 87 | FHSS | GFSK | 558K/m |

HOPPING CHANNEL SEPARATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types.

Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE |
|--------------------------|----------------------|-------------------|--------------------------|--------------------|-----------|
| B4 | 1 ~ 87 | 1, 45, 87 | FHSS | GFSK | 558K/m |

MAXIMUM PEAK OUTPUT POWER

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types.

Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE |
|--------------------------|----------------------|-------------------|--------------------------|--------------------|-----------|
| B4 | 1 ~ 87 | 1, 45, 87 | FHSS | GFSK | 558K/m |

BANDEdge MEASUREMENT:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types.

Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE |
|--------------------------|----------------------|-------------------|--------------------------|--------------------|-----------|
| B4 | 1 ~ 87 | 1, 87 | FHSS | GFSK | 558K/m |

AC POWER CONDUCTED EMISSION:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE |
|--------------------------|----------------------|-------------------|--------------------------|--------------------|-----------|
| B2 & B4 | 1 ~ 87 | 1 ~ 87 | FHSS | GFSK | 558K/m |

RADIATED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE |
|--------------------------|----------------------|-------------------|--------------------------|--------------------|-----------|
| A2 & A4 | 1 ~ 87 | 1 ~ 87 | FHSS | GFSK | 558K/m |
| B2 & B4 | 1 ~ 87 | 1 ~ 87 | FHSS | GFSK | 558K/m |

3.2.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a 2.4GHz Digital Baby Phone (with LCD / with LED). According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4- 2003

All test items have been performed and recorded as per the above standards.

3.2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit.

Note: 1.8m non-shielded input power cable was used during the tests under test mode 2 which supplied by the lab.

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

| FREQUENCY OF EMISSION (MHz) | CONDUCTED LIMIT (dB μ V) | |
|-----------------------------|------------------------------|---------|
| | Quasi-peak | Average |
| 0.15 - 0.5 | 66 - 56 | 56 - 46 |
| 0.50 - 5.0 | 56 | 46 |
| 5.0 - 30.0 | 60 | 50 |

NOTES: (1) The lower limit shall apply at the transition frequencies.
 (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|----------------------------------|-----------------|------------|------------------|
| Test Receiver ROHDE & SCHWARZ | ESCS30 | E1R1002 | Jun. 12, 2007 |
| LISN ROHDE & SCHWARZ | NSLK8127 | E1L1001 | Apr. 13, 2007 |
| LISN ROHDE & SCHWARZ | NSLK8126 | E1L1002 | Jul. 12, 2007 |
| Software ADT | ADT_Cond_V7.3.0 | N/A | N/A |


4.1.3 TEST PROCEDURE

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit - 20dB) were not reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

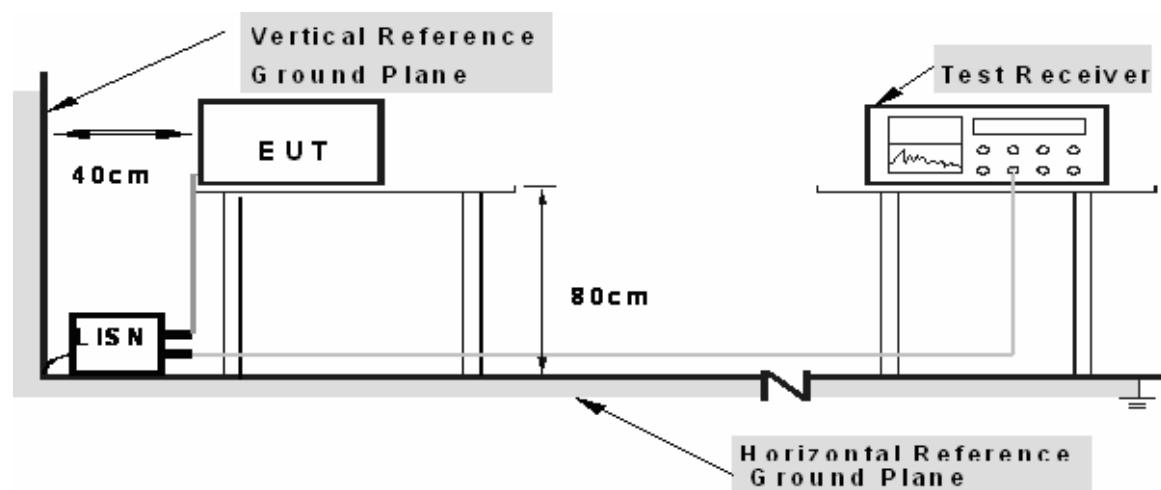

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

For Test mode B2 & B4: Normal operation (hopping according to its hoplist).

4.1.7 TEST RESULTS

| | | | |
|---------------------------------|--|----------------------|-----------|
| EUT | 2.4GHz Digital Baby Phone (with LCD / with LED) | MODEL NO. | BM-148 |
| TEST MODE | Mode B2 | 6dB BANDWIDTH | 9 kHz |
| INPUT POWER | 120Vac, 60Hz | PHASE | Line (L1) |
| ENVIRONMENTAL CONDITIONS | 21 deg. C, 48 % RH, 1012 hPa | TESTED BY: | Jason |

| No. | Frequency MHz | Corr. Factor dB | Reading (dBuV) | | Emission (dBuV) | | Limit (dBuV) | | Margins (dB) | |
|-----|------------------|-----------------------|-------------------|--------|--------------------|--------|-----------------|-------|-----------------|--------|
| | | | QP | AV | QP | AV | QP | AV | QP | AV |
| 1 | 0.150 | 1.80 | 30.72 | 1.34 | 32.52 | 3.14 | 66.00 | 56.00 | -33.48 | -52.86 |
| 2 | 0.234 | 0.80 | 27.83 | -0.73 | 28.63 | 0.07 | 62.32 | 52.32 | -33.69 | -52.25 |
| 3 | 0.326 | 0.67 | 26.04 | -2.28 | 26.71 | -1.61 | 59.54 | 49.54 | -32.83 | -51.15 |
| 4 | 0.616 | 0.44 | 20.76 | -6.38 | 21.20 | -5.94 | 56.00 | 46.00 | -34.80 | -51.94 |
| 5 | 1.995 | 0.46 | -6.95 | -12.87 | -6.49 | -12.41 | 56.00 | 46.00 | -62.49 | -58.41 |
| 6 | 14.612 | 0.66 | -0.34 | -8.50 | 0.32 | -7.84 | 60.00 | 50.00 | -59.68 | -57.84 |

REMARKS: 1. Margin value = Emission level - Limit value
 2 Correction factor = Insertion loss + Cable loss
 3. Emission Level = Correction Factor + Reading Value.

| | | | |
|---------------------------------|--|----------------------|--------|
| EUT | 2.4GHz Digital Baby Phone (with LCD / with LED) | MODEL NO. | BM-148 |
| TEST MODE | Mode B2 | 6dB BANDWIDTH | 9 kHz |
| INPUT POWER | 120Vac, 60Hz | PHASE | N |
| ENVIRONMENTAL CONDITIONS | 21 deg. C, 48 % RH, 1012 hPa | TESTED BY: | Jason |

| No. | Frequency MHz | Corr. Factor | Reading (dBuV) | | Emission (dBuV) | | Limit (dBuV) | | Margins (dB) | |
|------------|--------------------------------|-------------------------|---------------------------|-----------|----------------------------|-----------|-------------------------|-----------|-------------------------|-----------|
| | | | dB | QP | AV | QP | AV | QP | AV | QP |
| 1 | 0.151 | 1.76 | 30.48 | 1.08 | 32.24 | 2.84 | 65.93 | 55.93 | -33.69 | -53.09 |
| 2 | 0.220 | 0.82 | 27.59 | -0.66 | 28.41 | 0.16 | 62.82 | 52.82 | -34.40 | -52.65 |
| 3 | 0.383 | 0.61 | 23.11 | -4.17 | 23.72 | -3.56 | 58.21 | 48.21 | -34.49 | -51.77 |
| 4 | 0.590 | 0.49 | 18.56 | -7.21 | 19.05 | -6.72 | 56.00 | 46.00 | -36.95 | -52.72 |
| 5 | 1.827 | 0.53 | -5.62 | -12.95 | -5.09 | -12.42 | 56.00 | 46.00 | -61.09 | -58.42 |
| 6 | 10.617 | 0.56 | -6.03 | -11.10 | -5.47 | -10.54 | 60.00 | 50.00 | -65.47 | -60.54 |

REMARKS: 1. Margin value = Emission level - Limit value

2 Correction factor = Insertion loss + Cable loss

3. Emission Level = Correction Factor + Reading Value.



| | | | |
|---------------------------------|--|----------------------|-----------|
| EUT | 2.4GHz Digital Baby Phone (with LCD / with LED) | MODEL NO. | BM-148 |
| TEST MODE | Mode B4 | 6dB BANDWIDTH | 9 kHz |
| INPUT POWER | 120Vac, 60Hz | PHASE | Line (L1) |
| ENVIRONMENTAL CONDITIONS | 21 deg. C, 48 % RH, 1012 hPa | TESTED BY: | Jason |

| No. | Frequency MHz | Corr. Factor | Reading (dBuV) | | Emission (dBuV) | | Limit (dBuV) | | Margins (dB) | |
|-----|------------------|-----------------|-------------------|--------------|--------------------|--------------|-----------------|--------------|-----------------|---------------|
| | | | QP | AV | QP | AV | QP | AV | QP | AV |
| 1 | 0.150 | 1.80 | 31.61 | 1.98 | 33.41 | 3.78 | 66.00 | 56.00 | -32.59 | -52.22 |
| 2 | 0.322 | 0.68 | 26.94 | -1.62 | 27.62 | -0.94 | 59.67 | 49.67 | -32.05 | -50.61 |
| 3 | 0.468 | 0.47 | 21.28 | -5.51 | 21.75 | -5.04 | 56.55 | 46.55 | -34.80 | -51.59 |
| 4 | 0.619 | 0.44 | 21.41 | -6.03 | 21.85 | -5.59 | 56.00 | 46.00 | -34.15 | -51.59 |
| 5 | 2.702 | 0.49 | -7.58 | -12.70 | -7.09 | -12.21 | 56.00 | 46.00 | -63.09 | -58.21 |
| 6 | 14.209 | 0.66 | -1.64 | -8.87 | -0.98 | -8.21 | 60.00 | 50.00 | -60.98 | -58.21 |

REMARKS: 1. Margin value = Emission level - Limit value
 2 Correction factor = Insertion loss + Cable loss
 3. Emission Level = Correction Factor + Reading Value.

| | | | |
|---------------------------------|--|----------------------|--------|
| EUT | 2.4GHz Digital Baby Phone (with LCD / with LED) | MODEL NO. | BM-148 |
| TEST MODE | Mode B4 | 6dB BANDWIDTH | 9 kHz |
| INPUT POWER | 120Vac, 60Hz | PHASE | N |
| ENVIRONMENTAL CONDITIONS | 21 deg. C, 48 % RH, 1012 hPa | TESTED BY: | Jason |

| No. | Frequency MHz | Corr. Factor | Reading (dBuV) | | Emission (dBuV) | | Limit (dBuV) | | Margins (dB) | |
|------------|--------------------------|-------------------------|---------------------------|-----------|----------------------------|-----------|-------------------------|-----------|-------------------------|-----------|
| | | | dB | QP | AV | QP | AV | QP | AV | QP |
| 1 | 0.150 | 1.79 | 30.69 | 1.84 | 32.48 | 3.63 | 66.00 | 56.00 | -33.52 | -52.37 |
| 2 | 0.276 | 0.75 | 26.17 | 0.62 | 26.92 | 1.37 | 60.93 | 50.93 | -34.01 | -49.56 |
| 3 | 0.388 | 0.61 | 23.77 | -3.72 | 24.38 | -3.11 | 58.11 | 48.11 | -33.73 | -51.22 |
| 4 | 0.614 | 0.49 | 19.05 | -6.92 | 19.54 | -6.43 | 56.00 | 46.00 | -36.46 | -52.43 |
| 5 | 1.842 | 0.52 | -5.16 | -13.02 | -4.64 | -12.50 | 56.00 | 46.00 | -60.64 | -58.50 |
| 6 | 15.146 | 0.67 | -5.77 | -10.86 | -5.10 | -10.19 | 60.00 | 50.00 | -65.10 | -60.19 |

REMARKS: 1. Margin value = Emission level - Limit value

2 Correction factor = Insertion loss + Cable loss

3. Emission Level = Correction Factor + Reading Value.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

| FREQUENCIES (MHz) | FIELD STRENGTH (microvolts/meter) | MEASUREMENT DISTANCE (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009 ~ 0.490 | 2400/F(kHz) | 300 |
| 0.490 ~ 1.705 | 24000/F(kHz) | 30 |
| 1.705 ~ 30.0 | 30 | 30 |
| 30 ~ 88 | 100 | 3 |
| 88 ~ 216 | 150 | 3 |
| 216 ~ 960 | 200 | 3 |
| Above 960 | 500 | 3 |

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_uV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|--|-------------------|------------|------------------|
| Test Receiver ROHDE & SCHWARZ | ESCS30 | E1R1001 | Apr. 19, 2007 |
| BILOG Antenna SCHWARZBECK | VULB9168 | E1A1001 | Sept. 26, 2007 |
| Preamplifier Agilent | 8447D | E1A2001 | Jan. 27, 2008 |
| Preamplifier Agilent | 8449B | E1A2002 | Jan. 27, 2008 |
| Double Ridged Broadband Horn Antenna Schwarzbeck | BBHA 9120D | E1A1002 | Feb. 15, 2008 |
| Spectrum Analyzer Agilent | E4403B | E1S1001 | Jan. 13, 2008 |
| Signal Analyzer ROHDE & SCHWARZ | FSP | E1S1002 | May. 16, 2007 |
| RF signal cable Woken | RG-402 | E1CBH01 | May. 30, 2007 |
| RF signal cable Woken | RG-402 | E1CBH05 | May. 30, 2007 |
| RF signal cable Woken | RG-402 | E1CBH07 | May. 30, 2007 |
| RF signal cable Woken | RG-412 | E1CBL02 | May. 30, 2007 |
| RF signal cable Woken | RG-412 | E1CBL03 | May. 30, 2007 |
| RF signal cable Woken | RG-412 | E1CBL04 | May. 30, 2007 |
| Software ADT | ADT_Radiated_V7.5 | N/A | N/A |

NOTE:

1. The calibration interval of the above test instruments is 12 months.
2. “*” = These equipment are used for the final measurement.
3. The horn antenna and Agilent preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The Spectrum Analyzer (model: FSP) and RF signal cable (SERIAL: E1CBH05&E1CBH07) are used only for the measurement of emission frequency above 1GHz if tested.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

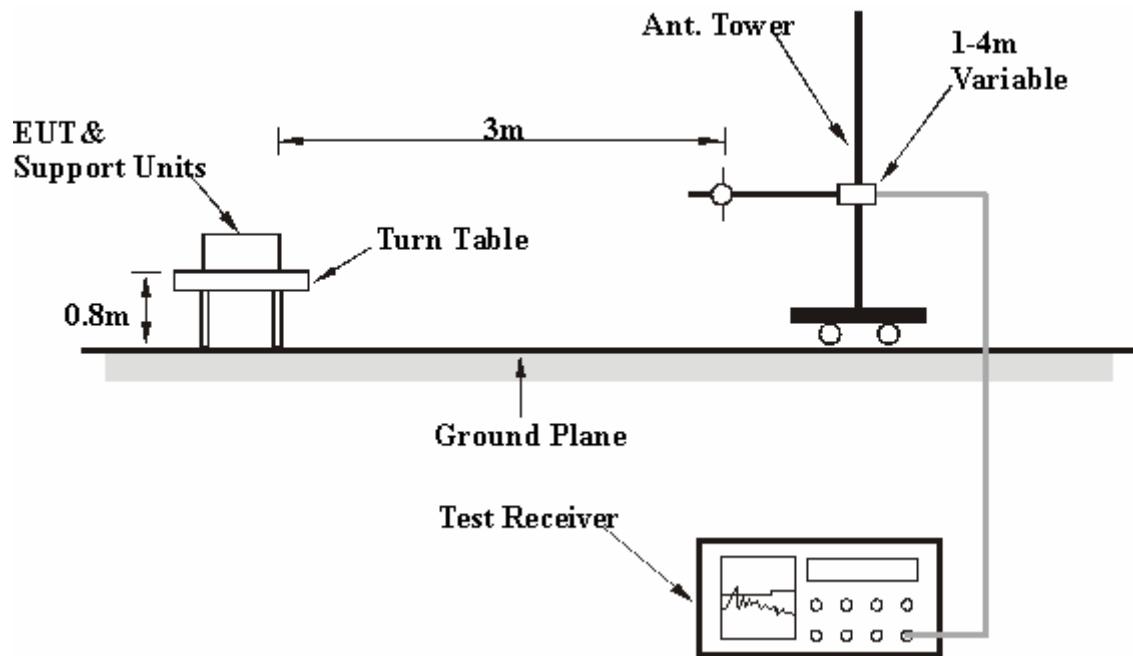

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Below 1 GHz: Normal operation (hopping according to its hoplist).

Above 1 GHz: Continuously transmitting with modulation on a certain channel that can be set by the software (with typical data input as the modulation source).

4.2.7 TEST RESULTS

Below 1 GHz

| EUT | 2.4GHz Digital Baby Phone (with LCD / with LED) | MEASUREMENT DETAIL | |
|-----------------|--|--------------------------|--------------------------|
| MODEL | BM-148 | FREQUENCY RANGE | Below 1000MHz |
| MODULATION TYPE | GFSK | DETECTOR FUNCTION | Quasi-Peak |
| TEST MODE | A2 | ENVIRONMENTAL CONDITIONS | 20deg. C, 60%RH, 1001hPa |
| TESTED BY | Rebecca | INPUT POWER | 4.5Vdc from batteries |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|---------------|-----------|----------------|-----------------|--------------|-----------|----------|-----------|
| No. | Frequency MHz | Factor dB | Reading dBuV/m | Emission dBuV/m | Limit dBuV/m | Margin dB | Tower cm | Table deg |
| 1 | 107.70 | 13.33 | 11.75 | 25.08 | 40.00 | -14.92 | 100.00 | 8.00 |
| 2 | 184.25 | 14.13 | 11.86 | 25.99 | 40.00 | -14.01 | 100.00 | 46.00 |
| 3 | 279.80 | 15.81 | 2.02 | 17.83 | 47.00 | -29.17 | 100.00 | 95.00 |
| 4 | 350.32 | 17.48 | 4.68 | 22.16 | 47.00 | -24.84 | 100.00 | 71.00 |
| 5 | 711.25 | 24.81 | 9.56 | 34.37 | 47.00 | -12.63 | 100.00 | 0.00 |
| 6 | 900.58 | 27.24 | -2.37 | 24.87 | 47.00 | -22.13 | 100.00 | 80.00 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|---------------|--------------|----------------|-----------------|--------------|---------------|---------------|--------------|
| No. | Frequency MHz | Factor dB | Reading dBuV/m | Emission dBuV/m | Limit dBuV/m | Margin dB | Tower cm | Table deg |
| 1 | 91.40 | 11.88 | 16.53 | 28.41 | 40.00 | -11.59 | 100.00 | 23.00 |
| 2 | 107.72 | 13.33 | 12.55 | 25.88 | 40.00 | -14.12 | 100.00 | 60.00 |
| 3 | 164.02 | 16.68 | 9.40 | 26.08 | 40.00 | -13.92 | 100.00 | 87.00 |
| 4 | 369.27 | 18.01 | 6.70 | 24.71 | 47.00 | -22.29 | 100.00 | 79.00 |
| 5 | 479.25 | 20.57 | 9.07 | 29.65 | 47.00 | -17.35 | 100.00 | 102.00 |
| 6 | 615.25 | 23.42 | 5.29 | 28.71 | 47.00 | -18.29 | 100.00 | 78.00 |

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

| | | | | |
|------------------------|--|---------------------------------|--|-----------------------------|
| EUT | 2.4GHz Digital Baby Phone (with LCD / with LED) | MEASUREMENT DETAIL | | |
| MODEL | BM-148 | FREQUENCY RANGE | | Below 1000MHz |
| MODULATION TYPE | GFSK | DETECTOR FUNCTION | | Quasi-Peak |
| TEST MODE | A4 | ENVIRONMENTAL CONDITIONS | | 20deg. C, 60%RH, 1001hPa |
| TESTED BY | Rebecca | INPUT POWER | | 4.5Vdc from batteries |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|---------------|-----------|----------------|-----------------|--------------|-----------|----------|-----------|
| No. | Frequency MHz | Factor dB | Reading dBuV/m | Emission dBuV/m | Limit dBuV/m | Margin dB | Tower cm | Table deg |
| 1 | 113.62 | 14.00 | -2.50 | 11.49 | 40.00 | -28.51 | 100.00 | 341.00 |
| 2 | 189.37 | 13.51 | -3.98 | 9.53 | 40.00 | -30.47 | 100.00 | 356.00 |
| 3 | 362.23 | 17.81 | -7.77 | 10.04 | 47.00 | -36.96 | 100.00 | 8.00 |
| 4 | 512.58 | 21.14 | -8.27 | 12.86 | 47.00 | -34.14 | 100.00 | 19.00 |
| 5 | 636.25 | 23.73 | -8.29 | 15.44 | 47.00 | -31.56 | 100.00 | 335.00 |
| 6 | 755.08 | 25.39 | -4.29 | 21.10 | 47.00 | -25.90 | 100.00 | 312.00 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|---------------|-----------|----------------|-----------------|--------------|-----------|----------|-----------|
| No. | Frequency MHz | Factor dB | Reading dBuV/m | Emission dBuV/m | Limit dBuV/m | Margin dB | Tower cm | Table deg |
| 1 | 164.03 | 16.68 | 4.23 | 20.91 | 40.00 | -19.09 | 100.00 | 112.00 |
| 2 | 245.82 | 14.78 | -7.78 | 7.00 | 47.00 | -40.00 | 100.00 | 67.00 |
| 3 | 352.52 | 17.54 | -7.75 | 9.80 | 47.00 | -37.20 | 100.00 | 139.00 |
| 4 | 445.02 | 19.99 | 0.93 | 20.93 | 47.00 | -26.07 | 100.00 | 118.00 |
| 5 | 616.85 | 23.45 | -8.06 | 15.39 | 47.00 | -31.61 | 100.00 | 177.00 |
| 6 | 738.10 | 25.22 | -8.56 | 16.66 | 47.00 | -30.34 | 100.00 | 147.00 |

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

| EUT | | 2.4GHz Digital Baby Phone (with LCD / with LED) | MEASUREMENT DETAIL | | |
|-----------------|---------|--|--------------------|--|--------------------------|
| MODEL | BM-148 | FREQUENCY RANGE | | | Below 1000MHz |
| MODULATION TYPE | GFSK | DETECTOR FUNCTION | | | Quasi-Peak |
| TEST MODE | B2 | ENVIRONMENTAL CONDITIONS | | | 20deg. C, 60%RH, 1001hPa |
| TESTED BY | Rebecca | INPUT POWER | | | 120Vac, 60Hz |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|---------------|-----------|----------------|-----------------|--------------|-----------|----------|-----------|
| No. | Frequency MHz | Factor dB | Reading dBuV/m | Emission dBuV/m | Limit dBuV/m | Margin dB | Tower cm | Table deg |
| 1 | 160.95 | 16.98 | -8.05 | 8.93 | 40.00 | -31.07 | 100.00 | 113.00 |
| 2 | 301.60 | 16.58 | -7.87 | 8.70 | 47.00 | -38.30 | 100.00 | 148.00 |
| 3 | 427.70 | 19.55 | -7.79 | 11.76 | 47.00 | -35.24 | 100.00 | 289.00 |
| 4 | 582.90 | 22.78 | -8.24 | 14.54 | 47.00 | -32.46 | 100.00 | 235.00 |
| 5 | 735.67 | 25.19 | -8.86 | 16.34 | 47.00 | -30.66 | 100.00 | 198.00 |
| 6 | 832.67 | 26.29 | -8.66 | 17.62 | 47.00 | -29.38 | 100.00 | 148.00 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|---------------|-----------|----------------|-----------------|--------------|-----------|----------|-----------|
| No. | Frequency MHz | Factor dB | Reading dBuV/m | Emission dBuV/m | Limit dBuV/m | Margin dB | Tower cm | Table deg |
| 1 | 160.95 | 16.98 | -8.41 | 8.57 | 40.00 | -31.43 | 100.00 | 241.00 |
| 2 | 196.61 | 13.12 | 3.29 | 16.41 | 40.00 | -23.59 | 100.00 | 148.00 |
| 3 | 347.68 | 17.44 | -7.81 | 9.63 | 47.00 | -37.37 | 100.00 | 170.00 |
| 4 | 445.00 | 19.99 | -0.07 | 19.93 | 47.00 | -27.07 | 100.00 | 255.00 |
| 5 | 546.52 | 21.97 | -8.21 | 13.76 | 47.00 | -33.24 | 100.00 | 273.00 |
| 6 | 701.73 | 24.62 | -7.73 | 16.89 | 47.00 | -30.11 | 100.00 | 189.00 |

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

3. The other emission levels were very low against the limit.

4. Margin value = Emission level – Limit value.

| | | | |
|------------------------|--|---------------------------------|--------------------------|
| EUT | 2.4GHz Digital Baby Phone (with LCD / with LED) | MEASUREMENT DETAIL | |
| MODEL | BM-148 | FREQUENCY RANGE | Below 1000MHz |
| MODULATION TYPE | GFSK | DETECTOR FUNCTION | Quasi-Peak |
| TEST MODE | B4 | ENVIRONMENTAL CONDITIONS | 20deg. C, 60%RH, 1001hPa |
| TESTED BY | Rebecca | INPUT POWER | 120Vac, 60Hz |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|---------------|-----------|----------------|-----------------|--------------|-----------|----------|-----------|
| No. | Frequency MHz | Factor dB | Reading dBuV/m | Emission dBuV/m | Limit dBuV/m | Margin dB | Tower cm | Table deg |
| 1 | 153.68 | 17.01 | -8.20 | 8.81 | 40.00 | -31.19 | 100.00 | 289.00 |
| 2 | 294.32 | 16.36 | -7.61 | 8.75 | 47.00 | -38.25 | 100.00 | 218.00 |
| 3 | 350.35 | 17.48 | 0.49 | 17.97 | 47.00 | -29.03 | 100.00 | 300.00 |
| 4 | 539.25 | 21.78 | -8.04 | 13.74 | 47.00 | -33.26 | 100.00 | 262.00 |
| 5 | 709.00 | 24.76 | -7.92 | 16.84 | 47.00 | -30.16 | 100.00 | 227.00 |
| 6 | 827.83 | 26.33 | -8.77 | 17.57 | 47.00 | -29.43 | 100.00 | 198.00 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|---------------|-----------|----------------|-----------------|--------------|-----------|----------|-----------|
| No. | Frequency MHz | Factor dB | Reading dBuV/m | Emission dBuV/m | Limit dBuV/m | Margin dB | Tower cm | Table deg |
| 1 | 146.40 | 16.70 | -8.21 | 8.49 | 40.00 | -31.51 | 100.00 | 152.00 |
| 2 | 196.62 | 13.12 | 5.90 | 19.02 | 40.00 | -20.98 | 100.00 | 168.00 |
| 3 | 321.00 | 17.04 | -8.28 | 8.77 | 47.00 | -38.23 | 100.00 | 189.00 |
| 4 | 454.50 | 20.19 | -1.38 | 18.81 | 47.00 | -28.19 | 100.00 | 177.00 |
| 5 | 558.65 | 22.25 | -7.18 | 15.08 | 47.00 | -31.92 | 100.00 | 137.00 |
| 6 | 849.65 | 26.12 | -8.05 | 18.08 | 47.00 | -28.92 | 100.00 | 242.00 |

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

Above 1 GHz

| | | | | |
|----------------------------|--|-------------------------------------|--|-----------------------------|
| EUT | 2.4GHz Digital Baby Phone (with LCD / with LED) | MEASUREMENT DETAIL | | |
| MODEL | BM-148 | FREQUENCY RANGE | | Above 1GHz |
| CHANNEL | Channel 1 | DETECTOR FUNCTION | | Peak (PK) Average (AV) |
| MODULATION TYPE | GFSK | ENVIRONMENTAL CONDITIONS | | 20deg. C, 60%RH, 1001hPa |
| TEST MODE | A4 | INPUT POWER | | 4.5Vdc from batteries |
| TESTED BY | Bright | | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|------------------|--------------|-------------------|--------------------|-----------------|--------------|-------------|--------------|
| No. | Frequency MHz | Factor dB | Reading dBuV/m | Emission dBuV/m | Limit dBuV/m | Margin dB | Tower cm | Table deg |
| 1 | 4809.04 PK | 38.06 | 16.07 | 54.14 | 74 | -19.86 | 100 | 6 |
| 1 | 4809.04 AV | 38.06 | -3.93 | 34.14 | 54 | -19.86 | 100 | 6 |
| 2 | 7213.54 PK | 45.19 | 10.34 | 55.53 | 74 | -18.47 | 100 | 11 |
| 2 | 7213.54 AV | 45.19 | -9.66 | 35.53 | 54 | -18.47 | 100 | 11 |
| 3 | 9618.05 PK | 47.94 | 8.79 | 56.73 | 74 | -17.27 | 100 | 89 |
| 3 | 9618.05 AV | 47.94 | -11.21 | 36.73 | 54 | -17.27 | 100 | 89 |
| 4 | 12022.56 PK | 49.05 | 9.00 | 58.06 | 74 | -15.94 | 100 | 119 |
| 4 | 12022.56 AV | 49.05 | -11.00 | 38.06 | 54 | -15.94 | 100 | 119 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|------------------|--------------|-------------------|--------------------|-----------------|--------------|-------------|--------------|
| No. | Frequency MHz | Factor dB | Reading dBuV/m | Emission dBuV/m | Limit dBuV/m | Margin dB | Tower cm | Table deg |
| 1 | 4809.10 PK | 38.07 | 17.26 | 55.32 | 74 | -18.68 | 100 | 0 |
| 1 | 4809.10 AV | 38.07 | -2.74 | 35.32 | 54 | -18.68 | 100 | 0 |
| 2 | 7213.54 PK | 45.19 | 10.88 | 56.07 | 74 | -17.93 | 100 | 19 |
| 2 | 7213.54 AV | 45.19 | -9.12 | 36.07 | 54 | -17.93 | 100 | 19 |
| 3 | 9618.05 PK | 47.94 | 8.63 | 56.57 | 74 | -17.43 | 100 | 334 |
| 3 | 9618.05 AV | 47.94 | -11.37 | 36.57 | 54 | -17.43 | 100 | 334 |
| 4 | 12022.56 PK | 49.05 | 10.35 | 59.40 | 74 | -14.60 | 100 | 26 |
| 4 | 12022.56 AV | 49.05 | -9.65 | 39.40 | 54 | -14.60 | 100 | 26 |

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The duty cycle is equal to: $20\log(\text{Duty cycle}) = 20\log(0.64*3/100) = -34.3\text{dB}$.
But in the actual test report, the duty cycle applied is -20dB if the figure calculated out is less than -20dB.
6. Average value = peak reading -20dB.
7. Please take Pg. 33 for the plots.

| | | | | |
|----------------------------|--|-------------------------------------|--|-----------------------------|
| EUT | 2.4GHz Digital Baby Phone (with LCD / with LED) | MEASUREMENT DETAIL | | |
| MODEL | BM-148 | FREQUENCY RANGE | | Above 1GHz |
| CHANNEL | Channel 45 | DETECTOR FUNCTION | | Peak (PK) Average (AV) |
| MODULATION TYPE | GFSK | ENVIRONMENTAL CONDITIONS | | 20deg. C, 60%RH, 1001hPa |
| TEST MODE | A4 | INPUT POWER | | 4.5Vdc from batteries |
| TESTED BY | Bright | | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|------------------|--------------|-------------------|--------------------|-----------------|--------------|-------------|--------------|
| No. | Frequency MHz | Factor dB | Reading dBuV/m | Emission dBuV/m | Limit dBuV/m | Margin dB | Tower cm | Table deg |
| 1 | 4885.00 PK | 38.36 | 15.26 | 53.62 | 74 | -20.38 | 100 | 118 |
| 1 | 4885.00 AV | 38.36 | -4.74 | 33.62 | 54 | -20.38 | 100 | 118 |
| 2 | 7327.58 PK | 45.26 | 11.00 | 56.26 | 74 | -17.74 | 100 | 26 |
| 2 | 7327.58 AV | 45.26 | -9.00 | 36.26 | 54 | -17.74 | 100 | 26 |
| 3 | 9770.11 PK | 48.34 | 8.92 | 57.25 | 74 | -16.75 | 100 | 334 |
| 3 | 9770.11 AV | 48.34 | -11.08 | 37.25 | 54 | -16.75 | 100 | 334 |
| 4 | 12212.64 PK | 49.16 | 8.51 | 57.68 | 74 | -16.32 | 100 | 28 |
| 4 | 12212.64 AV | 49.16 | -11.49 | 37.68 | 54 | -16.32 | 100 | 28 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|------------------|--------------|-------------------|--------------------|-----------------|--------------|-------------|--------------|
| No. | Frequency MHz | Factor dB | Reading dBuV/m | Emission dBuV/m | Limit dBuV/m | Margin dB | Tower cm | Table deg |
| 1 | 4885.16 PK | 38.36 | 17.49 | 55.85 | 74 | -18.15 | 100 | 116 |
| 1 | 4885.16 AV | 38.36 | -2.51 | 35.85 | 54 | -18.15 | 100 | 116 |
| 2 | 7327.58 PK | 45.26 | 10.76 | 56.02 | 74 | -17.98 | 100 | 234 |
| 2 | 7327.58 AV | 45.26 | -9.24 | 36.02 | 54 | -17.98 | 100 | 234 |
| 3 | 9770.11 PK | 48.34 | 9.11 | 57.44 | 74 | -16.56 | 100 | 335 |
| 3 | 9770.11 AV | 48.34 | -10.89 | 37.44 | 54 | -16.56 | 100 | 335 |
| 4 | 12212.64 PK | 49.16 | 9.76 | 58.92 | 74 | -15.08 | 100 | 195 |
| 4 | 12212.64 AV | 49.16 | -10.24 | 38.92 | 54 | -15.08 | 100 | 195 |

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The duty cycle is equal to: $20\log(\text{Duty cycle}) = 20\log(0.64*3/100) = -34.3\text{dB}$.
But in the actual test report, the duty cycle applied is -20dB if the figure calculated out is less than -20dB.
6. Average value = peak reading -20dB.
7. Please take Pg. 33 for the plots.



| | | | | |
|----------------------------|--|-------------------------------------|--|-----------------------------|
| EUT | 2.4GHz Digital Baby Phone (with LCD / with LED) | MEASUREMENT DETAIL | | |
| MODEL | BM-148 | FREQUENCY RANGE | | Above 1GHz |
| CHANNEL | Channel 87 | DETECTOR FUNCTION | | Peak (PK) Average (AV) |
| MODULATION TYPE | GFSK | ENVIRONMENTAL CONDITIONS | | 20deg. C, 60%RH, 1001hPa |
| TEST MODE | A4 | INPUT POWER | | 4.5Vdc from batteries |
| TESTED BY | Bright | | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|------------------|--------------|-------------------|--------------------|-----------------|--------------|-------------|--------------|
| No. | Frequency MHz | Factor dB | Reading dBuV/m | Emission dBuV/m | Limit dBuV/m | Margin dB | Tower cm | Table deg |
| 1 | 4957.49 PK | 38.63 | 15.68 | 54.31 | 74 | -19.69 | 100 | 168 |
| 1 | 4957.49 AV | 38.63 | -4.32 | 34.31 | 54 | -19.69 | 100 | 168 |
| 2 | 7436.45 PK | 45.20 | 9.91 | 55.11 | 74 | -18.89 | 100 | 224 |
| 2 | 7436.45 AV | 45.20 | -10.09 | 35.11 | 54 | -18.89 | 100 | 224 |
| 3 | 9915.26 PK | 48.53 | 10.22 | 58.74 | 74 | -15.26 | 100 | 334 |
| 3 | 9915.26 AV | 48.53 | -9.78 | 38.74 | 54 | -15.26 | 100 | 334 |
| 4 | 12394.08 PK | 49.26 | 9.24 | 58.51 | 74 | -15.49 | 100 | 195 |
| 4 | 12394.08 AV | 49.26 | -10.76 | 38.51 | 54 | -15.49 | 100 | 195 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|------------------|--------------|-------------------|--------------------|-----------------|--------------|-------------|--------------|
| No. | Frequency MHz | Factor dB | Reading dBuV/m | Emission dBuV/m | Limit dBuV/m | Margin dB | Tower cm | Table deg |
| 1 | 4957.61 PK | 38.63 | 18.11 | 56.74 | 74 | -17.26 | 100 | 221 |
| 1 | 4957.61 AV | 38.63 | -1.89 | 36.74 | 54 | -17.26 | 100 | 221 |
| 2 | 7436.45 PK | 45.20 | 9.54 | 54.75 | 74 | -19.25 | 100 | 34 |
| 2 | 7436.45 AV | 45.20 | -10.46 | 34.75 | 54 | -19.25 | 100 | 34 |
| 3 | 9915.26 PK | 48.53 | 9.64 | 58.17 | 74 | -15.83 | 100 | 268 |
| 3 | 9915.26 AV | 48.53 | -10.36 | 38.17 | 54 | -15.83 | 100 | 268 |
| 4 | 12394.08 PK | 49.26 | 9.01 | 58.28 | 74 | -15.72 | 100 | 27 |
| 4 | 12394.08 AV | 49.26 | -10.99 | 38.28 | 54 | -15.72 | 100 | 27 |

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The duty cycle is equal to: $20\log(\text{Duty cycle}) = 20\log(0.64*3/100) = -34.3\text{dB}$.
But in the actual test report, the duty cycle applied is -20dB if the figure calculated out is less than -20dB.
6. Average value = peak reading -20dB.
7. Please take Pg. 33 for the plots.

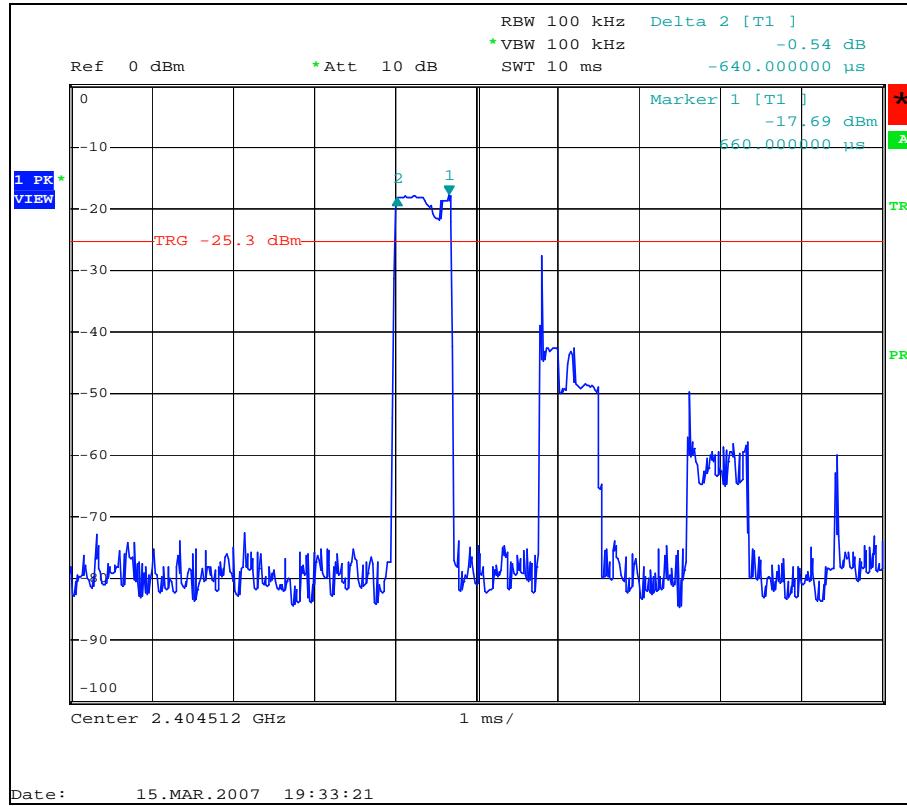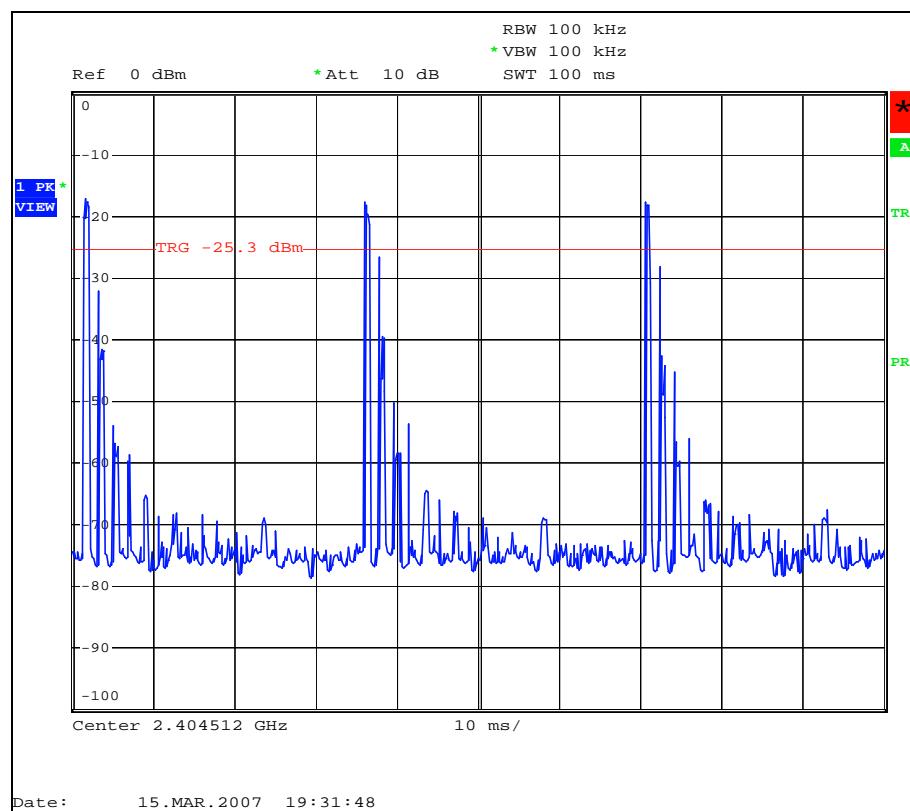

| | | | | |
|------------------------|--|---------------------------|---------------------------------|-----------------------------|
| EUT | 2.4GHz Digital Baby Phone (with LCD / with LED) | MEASUREMENT DETAIL | | |
| MODEL | BM-148 | | FREQUENCY RANGE | Above 1GHz |
| CHANNEL | Channel 1 | | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| MODULATION TYPE | GFSK | | ENVIRONMENTAL CONDITIONS | 20deg. C, 60%RH, 1001hPa |
| TEST MODE | B4 | | INPUT POWER | 120Vac, 60Hz |
| TESTED BY | Bright | | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|---------------|-----------|----------------|-----------------|--------------|-----------|----------|-----------|
| No. | Frequency MHz | Factor dB | Reading dBuV/m | Emission dBuV/m | Limit dBuV/m | Margin dB | Tower cm | Table deg |
| 1 | 4809.02 PK | 38.06 | 16.94 | 55.01 | 74 | -18.99 | 100 | 234 |
| 1 | 4809.02 AV | 38.06 | -3.06 | 35.01 | 54 | -18.99 | 100 | 234 |
| 2 | 7213.54 PK | 45.19 | 10.49 | 55.68 | 74 | -18.32 | 100 | 55 |
| 2 | 7213.54 AV | 45.19 | -9.51 | 35.68 | 54 | -18.32 | 100 | 55 |
| 3 | 9618.05 PK | 47.94 | 8.71 | 56.65 | 74 | -17.35 | 100 | 97 |
| 3 | 9618.05 AV | 47.94 | -11.29 | 36.65 | 54 | -17.35 | 100 | 97 |
| 4 | 12022.56 PK | 49.05 | 9.45 | 58.5 | 74 | -15.50 | 100 | 65 |
| 4 | 12022.56 AV | 49.05 | -10.55 | 38.5 | 54 | -15.50 | 100 | 65 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|---------------|-----------|----------------|-----------------|--------------|-----------|----------|-----------|
| No. | Frequency MHz | Factor dB | Reading dBuV/m | Emission dBuV/m | Limit dBuV/m | Margin dB | Tower cm | Table deg |
| 1 | 4809.14 PK | 38.07 | 17.35 | 55.42 | 74 | -18.58 | 100 | 112 |
| 1 | 4809.14 AV | 38.07 | -2.65 | 35.42 | 54 | -18.58 | 100 | 112 |
| 2 | 7213.54 PK | 45.19 | 10.64 | 55.83 | 74 | -18.17 | 100 | 332 |
| 2 | 7213.54 AV | 45.19 | -9.36 | 35.83 | 54 | -18.17 | 100 | 332 |
| 3 | 9618.05 PK | 47.94 | 8.87 | 56.8 | 74 | -17.20 | 100 | 64 |
| 3 | 9618.05 AV | 47.94 | -11.13 | 36.8 | 54 | -17.20 | 100 | 64 |
| 4 | 12022.56 PK | 49.05 | 8.92 | 57.97 | 74 | -16.03 | 100 | 335 |
| 4 | 12022.56 AV | 49.05 | -11.08 | 37.97 | 54 | -16.03 | 100 | 335 |

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The duty cycle is equal to: $20\log(\text{Duty cycle}) = 20\log(0.84*3/100) = -32\text{dB}$.
But in the actual test report, the duty cycle applied is -20dB if the figure calculated out is less than -20dB.
6. Average value = peak reading -20dB.
7. Please take Pg. 37 for the plots.

| | | | | |
|------------------------|--|---------------------------|---------------------------------|-----------------------------|
| EUT | 2.4GHz Digital Baby Phone (with LCD / with LED) | MEASUREMENT DETAIL | | |
| MODEL | BM-148 | | FREQUENCY RANGE | Above 1GHz |
| CHANNEL | Channel 45 | | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| MODULATION TYPE | GFSK | | ENVIRONMENTAL CONDITIONS | 20deg. C, 60%RH, 1001hPa |
| TEST MODE | B4 | | INPUT POWER | 120Vac, 60Hz |
| TESTED BY | Bright | | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|---------------|-----------|----------------|-----------------|--------------|-----------|----------|-----------|
| No. | Frequency MHz | Factor dB | Reading dBuV/m | Emission dBuV/m | Limit dBuV/m | Margin dB | Tower cm | Table deg |
| 1 | 4885.26 PK | 38.36 | 15.79 | 54.15 | 74 | -19.85 | 100 | 0 |
| 1 | 4885.26 AV | 38.36 | -4.21 | 34.15 | 54 | -19.85 | 100 | 0 |
| 2 | 7327.58 PK | 45.26 | 10.13 | 55.39 | 74 | -18.61 | 100 | 25 |
| 2 | 7327.58 AV | 45.26 | -9.87 | 35.39 | 54 | -18.61 | 100 | 25 |
| 3 | 9770.11 PK | 48.34 | 8.28 | 56.61 | 74 | -17.39 | 100 | 334 |
| 3 | 9770.11 AV | 48.34 | -11.72 | 36.61 | 54 | -17.39 | 100 | 334 |
| 4 | 12212.64 PK | 49.16 | 9.81 | 58.97 | 74 | -15.03 | 100 | 221 |
| 4 | 12212.64 AV | 49.16 | -10.19 | 38.97 | 54 | -15.03 | 100 | 221 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|---------------|-----------|----------------|-----------------|--------------|-----------|----------|-----------|
| No. | Frequency MHz | Factor dB | Reading dBuV/m | Emission dBuV/m | Limit dBuV/m | Margin dB | Tower cm | Table deg |
| 1 | 4885.02 PK | 38.36 | 18.99 | 57.35 | 74 | -16.65 | 100 | 264 |
| 1 | 4885.02 AV | 38.36 | -1.01 | 37.35 | 54 | -16.65 | 100 | 264 |
| 2 | 7327.58 PK | 45.26 | 9.99 | 55.25 | 74 | -18.75 | 100 | 87 |
| 2 | 7327.58 AV | 45.26 | -10.01 | 35.25 | 54 | -18.75 | 100 | 87 |
| 3 | 9770.11 PK | 48.34 | 8.30 | 56.63 | 74 | -17.37 | 100 | 64 |
| 3 | 9770.11 AV | 48.34 | -11.70 | 36.63 | 54 | -17.37 | 100 | 64 |
| 4 | 12212.64 PK | 49.16 | 9.52 | 58.68 | 74 | -15.32 | 100 | 49 |
| 4 | 12212.64 AV | 49.16 | -10.48 | 38.68 | 54 | -15.32 | 100 | 49 |

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The duty cycle is equal to: $20\log(\text{Duty cycle}) = 20\log(0.84*3/100) = -32\text{dB}$.
But in the actual test report, the duty cycle applied is -20dB if the figure calculated out is less than -20dB.
6. Average value = peak reading -20dB.
7. Please take Pg. 37 for the plots.

| | | | | |
|------------------------|--|---------------------------|---------------------------------|-----------------------------|
| EUT | 2.4GHz Digital Baby Phone (with LCD / with LED) | MEASUREMENT DETAIL | | |
| MODEL | BM-148 | | FREQUENCY RANGE | Above 1GHz |
| CHANNEL | Channel 87 | | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| MODULATION TYPE | GFSK | | ENVIRONMENTAL CONDITIONS | 20deg. C, 60%RH, 1001hPa |
| TEST MODE | B4 | | INPUT POWER | 120Vac, 60Hz |
| TESTED BY | Bright | | | |



| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|---------------|-----------|----------------|-----------------|--------------|-----------|----------|-----------|
| No. | Frequency MHz | Factor dB | Reading dBuV/m | Emission dBuV/m | Limit dBuV/m | Margin dB | Tower cm | Table deg |
| 1 | 4957.57 PK | 38.63 | 15.06 | 53.69 | 74 | -20.31 | 100 | 100 |
| 1 | 4957.57 AV | 38.63 | -4.94 | 33.69 | 54 | -20.31 | 100 | 100 |
| 2 | 7436.45 PK | 45.20 | 10.55 | 55.75 | 74 | -18.25 | 100 | 226 |
| 2 | 7436.45 AV | 45.20 | -9.45 | 35.75 | 54 | -18.25 | 100 | 226 |
| 3 | 9915.26 PK | 48.53 | 9.70 | 58.23 | 74 | -15.77 | 100 | 98 |
| 3 | 9915.26 AV | 48.53 | -10.30 | 38.23 | 54 | -15.77 | 100 | 98 |
| 4 | 12394.08 PK | 49.26 | 10.04 | 59.31 | 74 | -14.69 | 100 | 49 |
| 4 | 12394.08 AV | 49.26 | -9.96 | 39.31 | 54 | -14.69 | 100 | 49 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|---------------|-----------|----------------|-----------------|--------------|-----------|----------|-----------|
| No. | Frequency MHz | Factor dB | Reading dBuV/m | Emission dBuV/m | Limit dBuV/m | Margin dB | Tower cm | Table deg |
| 1 | 4957.73 PK | 38.63 | 19.49 | 58.12 | 74 | -15.88 | 100 | 116 |
| 1 | 4957.73 AV | 38.63 | -0.51 | 38.12 | 54 | -15.88 | 100 | 116 |
| 2 | 7436.45 PK | 45.20 | 10.56 | 55.77 | 74 | -18.23 | 100 | 34 |
| 2 | 7436.45 AV | 45.20 | -9.44 | 35.77 | 54 | -18.23 | 100 | 34 |
| 3 | 9915.26 PK | 48.53 | 10.10 | 58.63 | 74 | -15.37 | 100 | 29 |
| 3 | 9915.26 AV | 48.53 | -9.90 | 38.63 | 54 | -15.37 | 100 | 29 |
| 4 | 12394.08 PK | 49.26 | 9.81 | 59.07 | 74 | -14.93 | 100 | 111 |
| 4 | 12394.08 AV | 49.26 | -10.19 | 39.07 | 54 | -14.93 | 100 | 111 |

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The duty cycle is equal to: $20\log(\text{Duty cycle}) = 20\log(0.84*3/100) = -32\text{dB}$.
But in the actual test report, the duty cycle applied is -20dB if the figure calculated out is less than -20dB.
6. Average value = peak reading -20dB.
7. Please take Pg. 37 for the plots.

FCC ID: PERBM-148RX

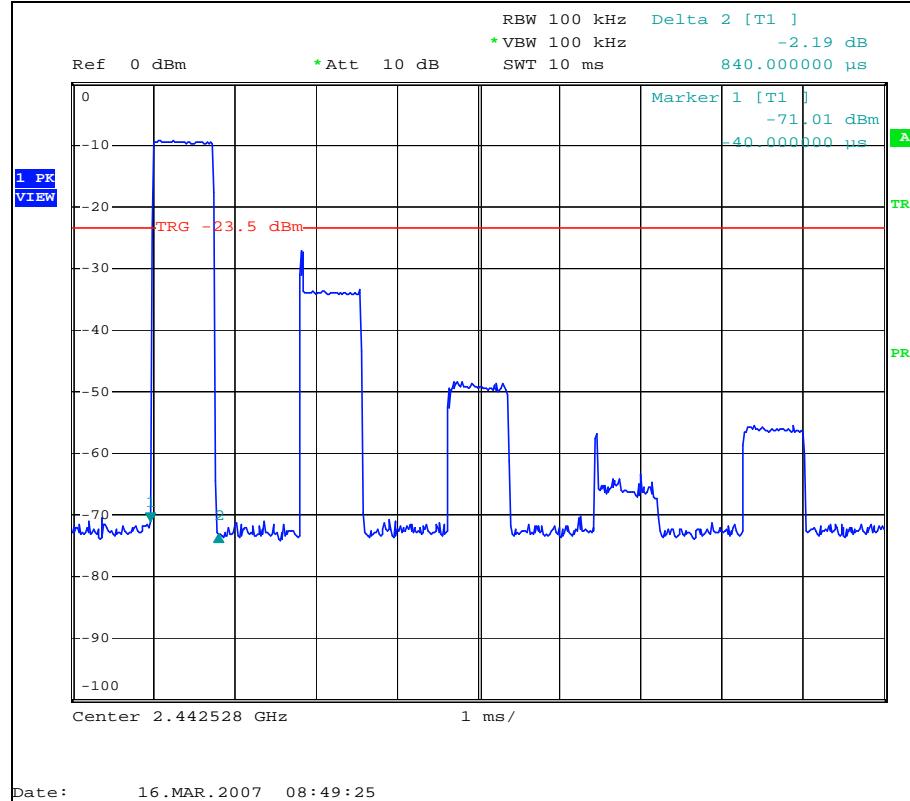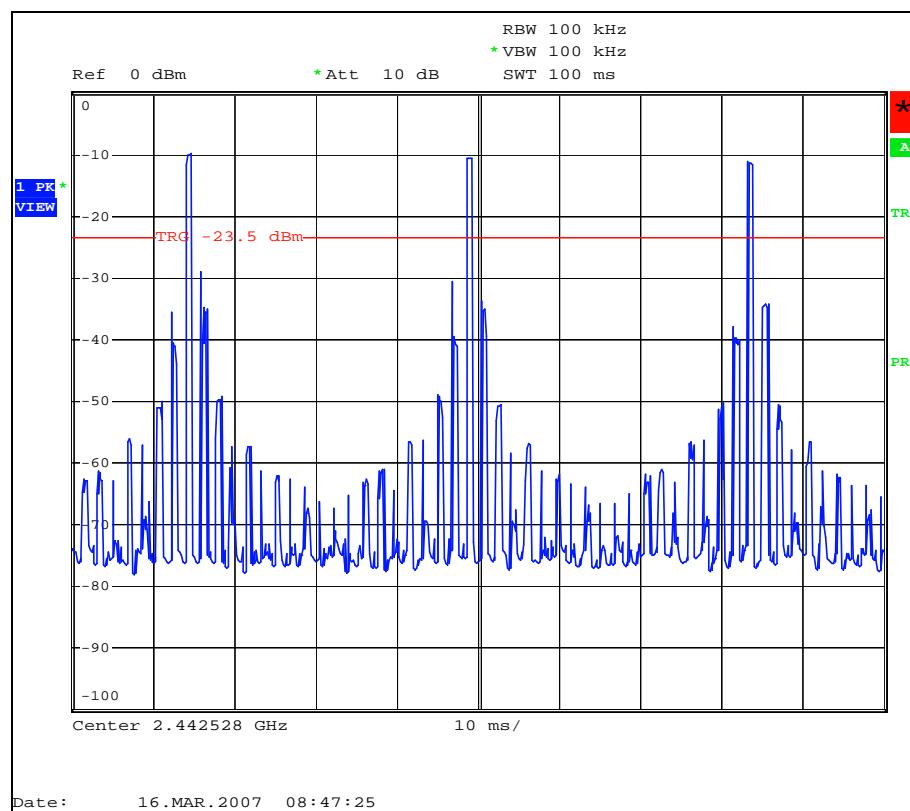

4.3 NUMBER OF HOPPING FREQUENCY USED

4.3.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 channels frequencies, and should be equally spaced.

4.3.2 TEST INSTRUMENTS

| DESCRIPTION & | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|--------------------------------------|-----------|------------|------------------|
| Spectrum Analyzer ROHDE & SCHWARZ | FSP | E1S1002 | May. 15, 2007 |

NOTE: The calibration interval of the above test instruments is 12 months.

4.3.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP





4.3.6 EUT OPERATING CONDITIONS

Normal operation (Hopping according to its hoplist).

4.3.7 TEST RESULTS

There are 87 hopping frequencies in the hopping mode. Please refer to the test results. On the plots, it shows that the hopping frequencies are equally spaced.

Test mode B4

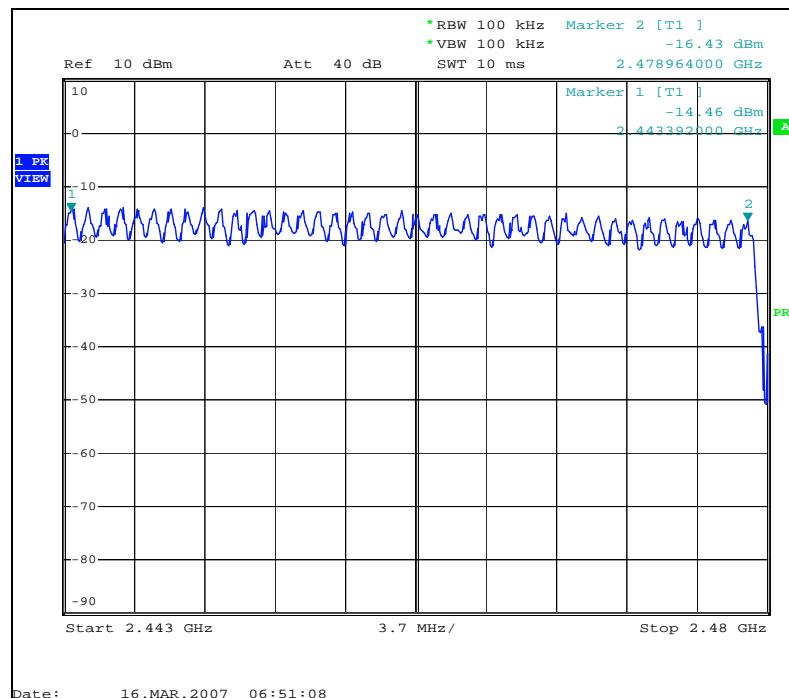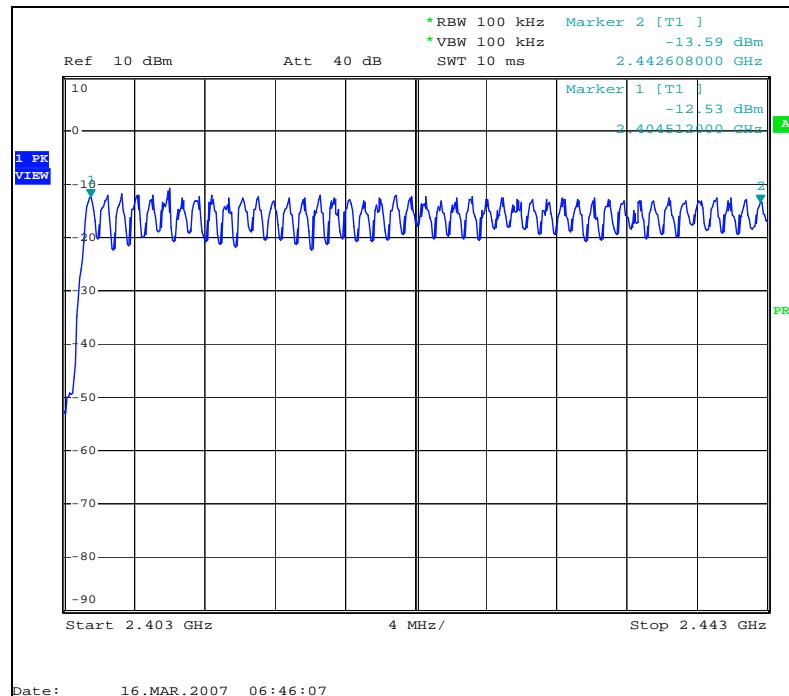

4.4 DWELL TIME ON EACH CHANNEL

4.4.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.4.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|---------------------------------------|-----------|------------|------------------|
| *Spectrum Analyzer ROHDE & SCHWARZ | FSP | E1S1002 | May.15, 2007 |

NOTES: The calibration interval of the above test instruments is 12 months.

4.4.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency to be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Normal operation (Hopping according to its hoplist).

4.4.7 TEST RESULTS



For test mode B4

| | | | |
|------------------------|--|---------------------------------|-----------------------------|
| EUT | 2.4GHz Digital Baby Phone (with LCD / with LED) | MODEL | BM-148 |
| MODULATION TYPE | GFSK | ENVIRONMENTAL CONDITIONS | 20deg. C, 60%RH, 1001Hpa |
| INPUT POWER | 120Vac, 60Hz | TESTED BY | Bright |



| MODE | NUMBER OF TRANSMISSION IN A 30 (75HOPPING * 0.4) | LENGTH OF TRANSMISSION TIME (msec) | RESULT (msec) | LIMIT (msec) |
|-------------|---|---|----------------------|---------------------|
| CH1 | 29(times/1sec)*7.6=220.4 times | 0.79 | 174.116 | 400 |
| CH45 | 29(times/1sec)*7.6=220.4 times | 0.80 | 176.320 | 400 |
| CH87 | 29(times/1sec)*7.6=220.4 times | 0.83 | 182.932 | 400 |

NOTE: Test plots of the transmitting time slot are shown on next 3 pages.



CH1

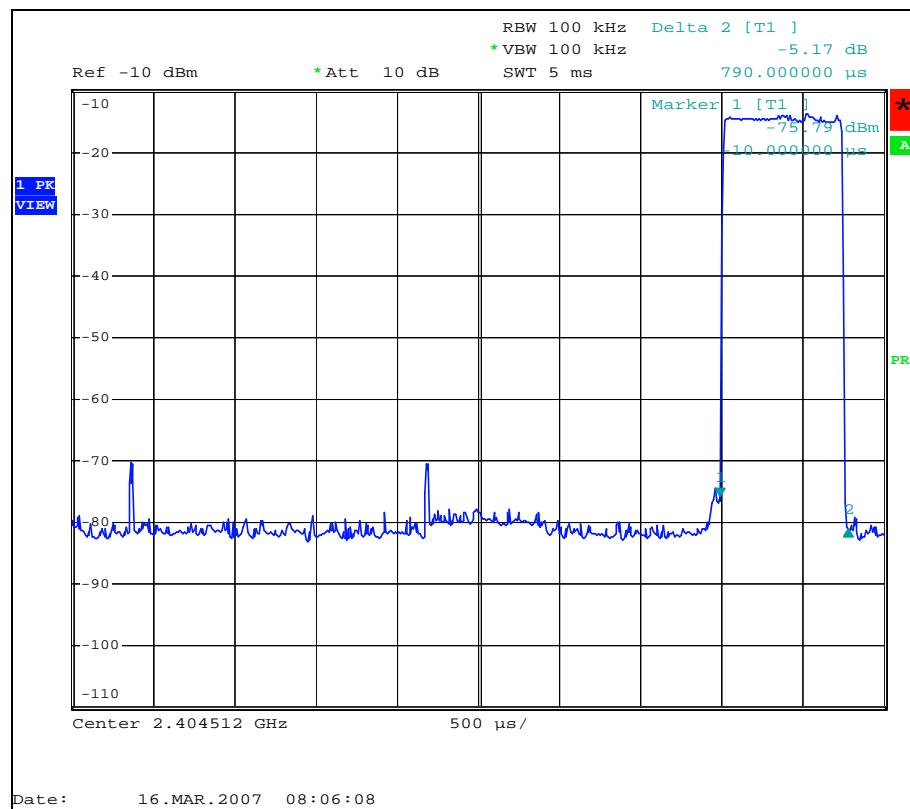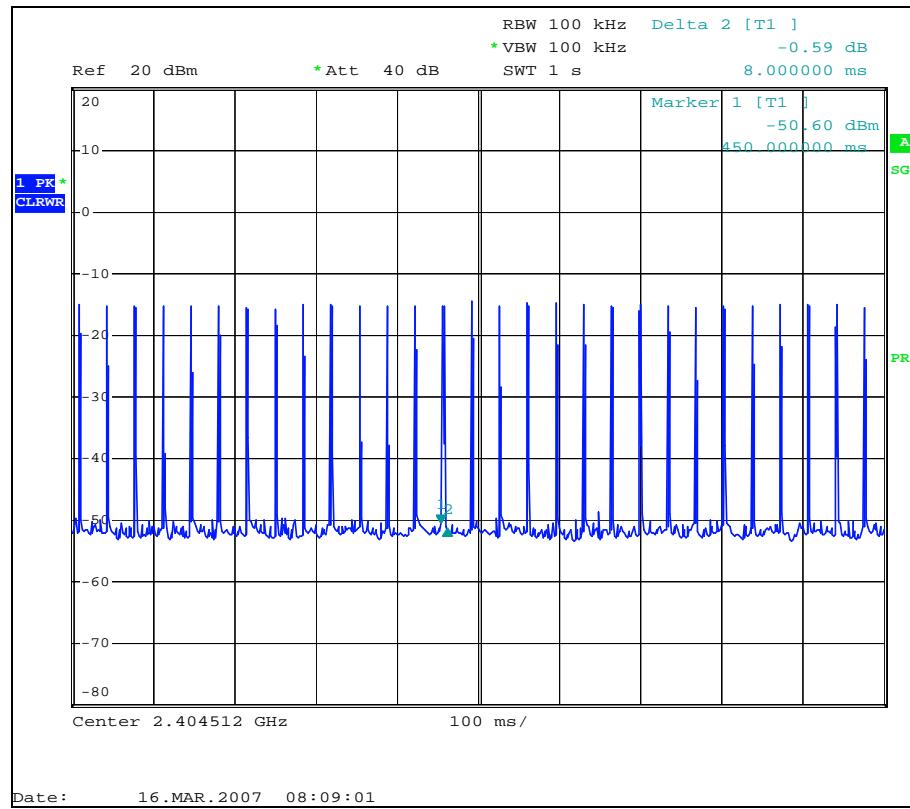

CH45

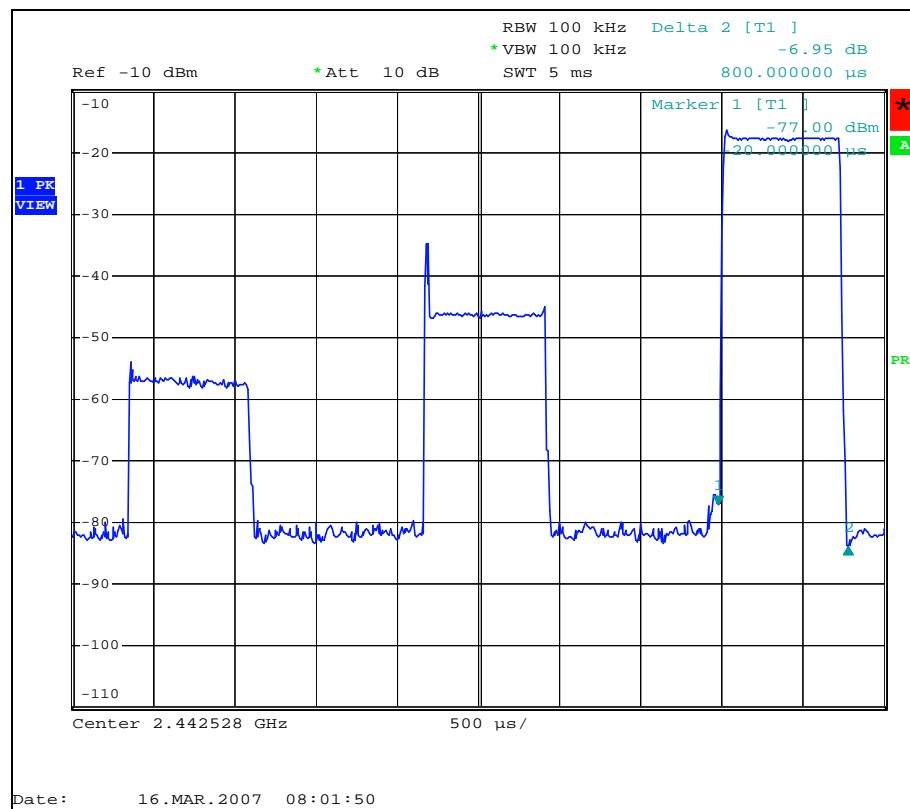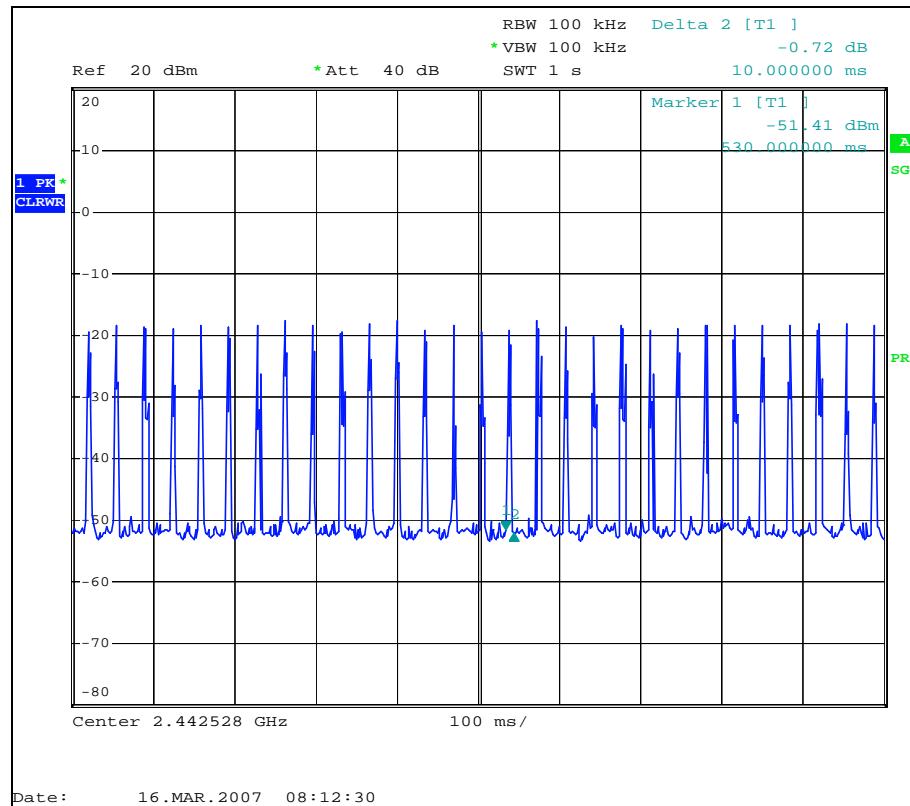

CH87

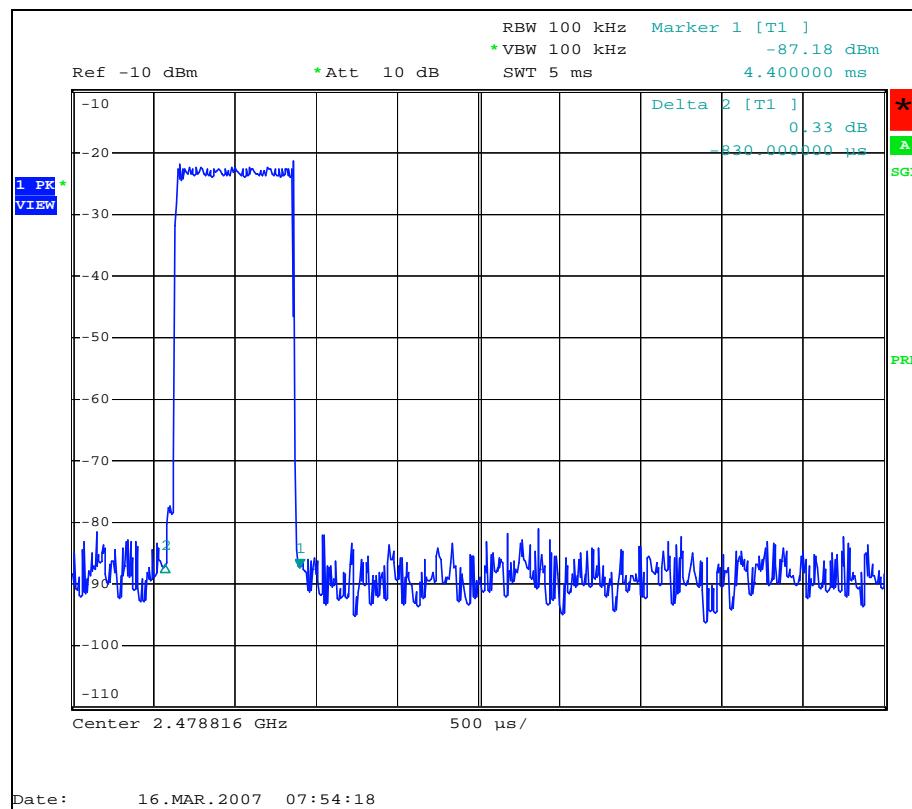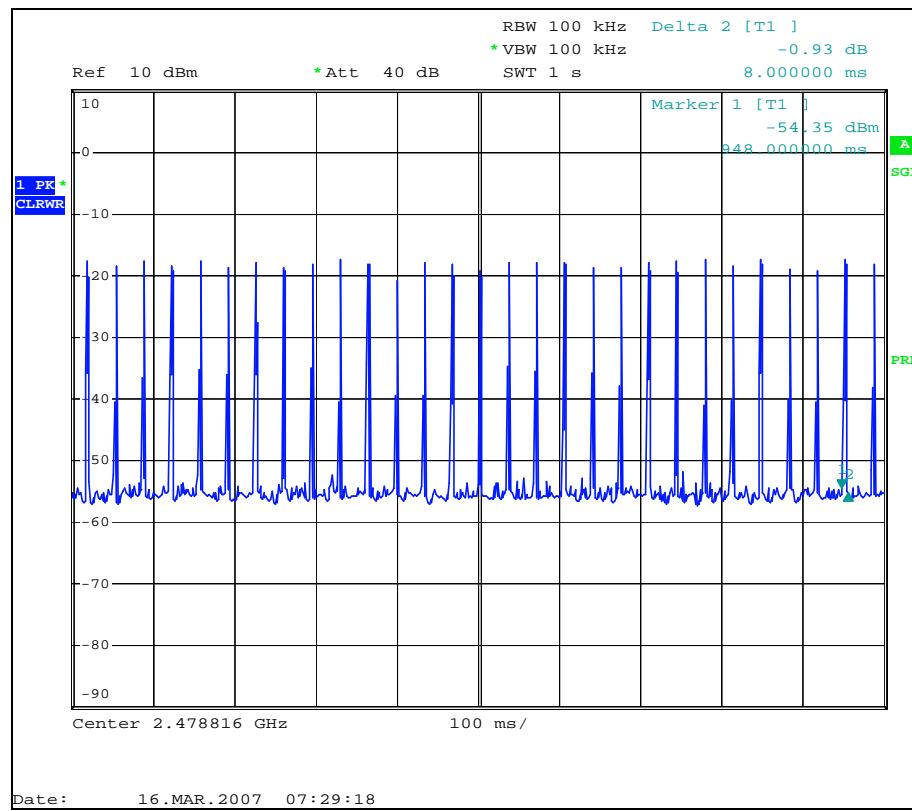

4.5 CHANNEL BANDWIDTH

4.5.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

4.5.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|--------------------------------------|-----------|------------|------------------|
| Spectrum Analyzer ROHDE & SCHWARZ | FSP | E1S1002 | May. 15, 2007 |

NOTE: The calibration interval of the above test instruments is 12 months.

4.5.3 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation.

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION

Continuously transmitting with modulation on a certain channel that can be set by the software (with typical data input as the modulation source).


4.5.7 TEST RESULTS

For test mode B4

| | | | |
|------------------------|--|---------------------------------|--------------------------|
| EUT | 2.4GHz Digital Baby Phone (with LCD / with LED) | MODEL | BM-148 Seires |
| MODULATION TYPE | GFSK | ENVIRONMENTAL CONDITIONS | 20deg. C, 60%RH, 1001Hpa |
| INPUT POWER | 120Vac, 60Hz | TESTED BY | Bright |

| CHANNEL | CHANNEL FREQUENCY (MHz) | 20dB BANDWIDTH (MHz) |
|---------|-------------------------|----------------------|
| 1 | 2404.512 | 0.860 |
| 45 | 2442.528 | 0.820 |
| 87 | 2478.816 | 0.820 |


CH1

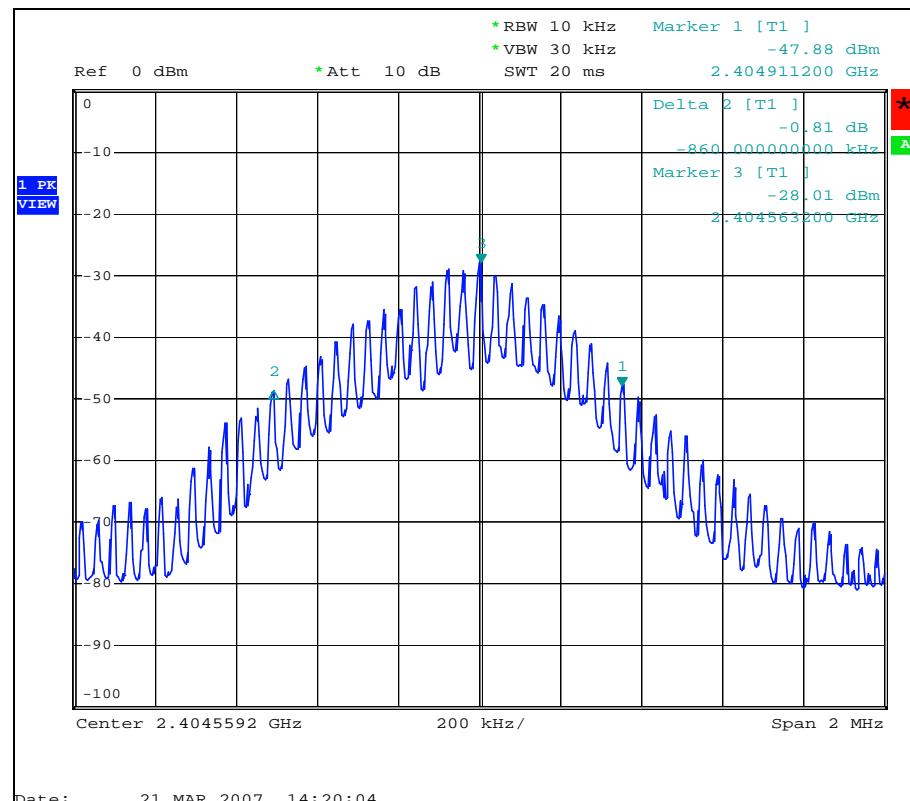


FCC ID: PERBM-148RX



CH45

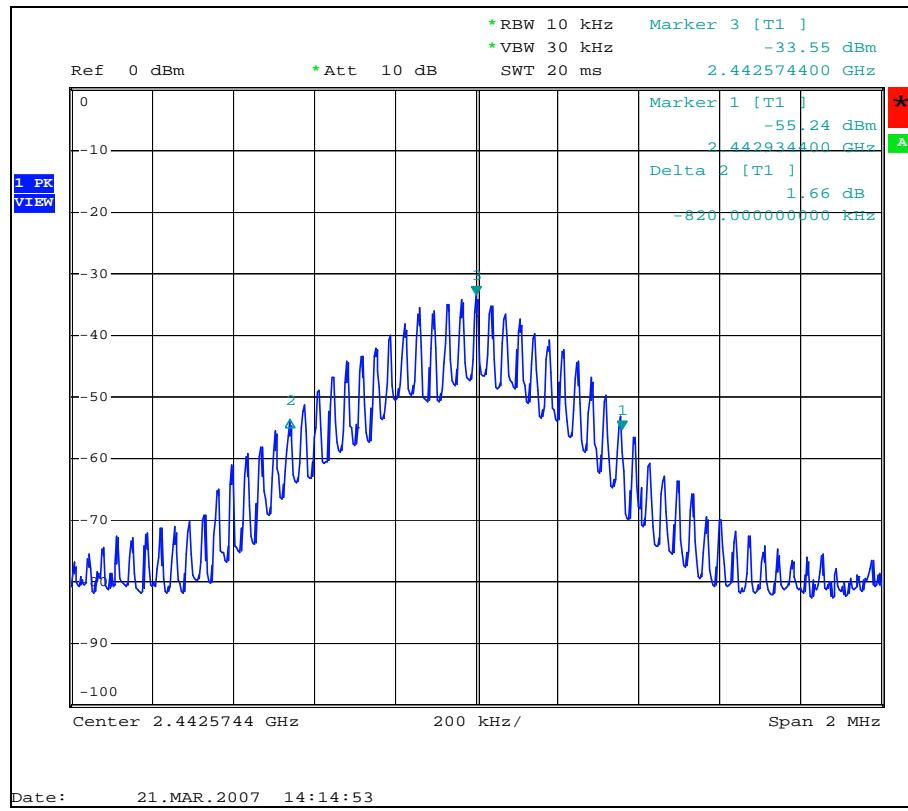

CH87

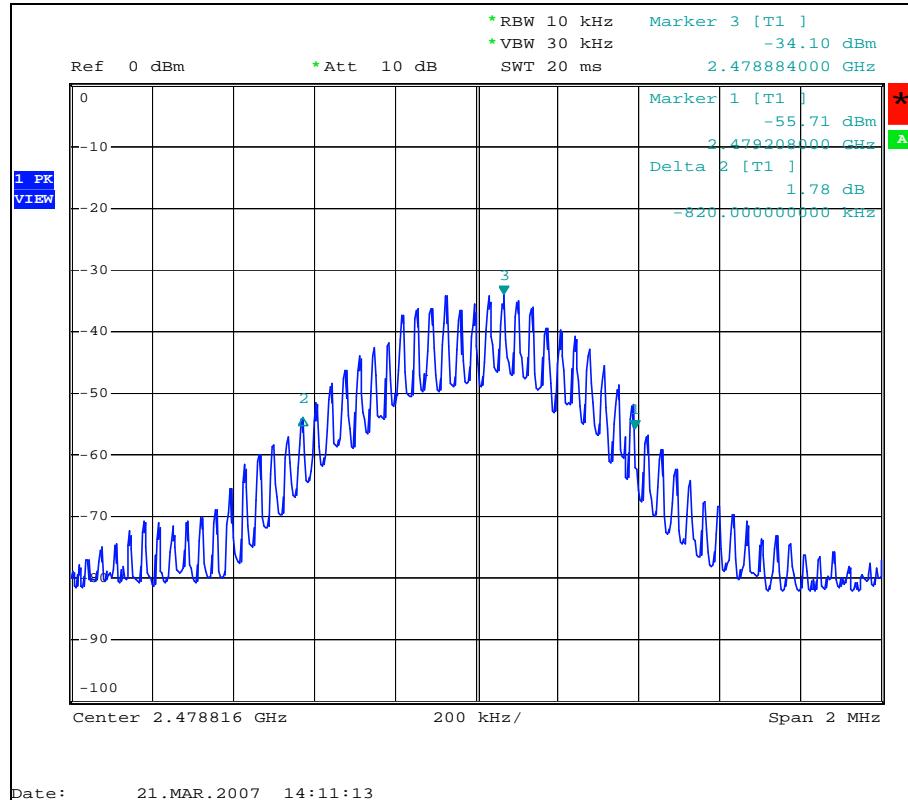

4.6 HOPPING CHANNEL SEPARATION

4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25 kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

4.6.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|--------------------------------------|-----------|------------|------------------|
| Spectrum Analyzer ROHDE & SCHWARZ | FSP | E1S1002 | May. 15, 2007 |

NOTES: The calibration interval of the above test instruments is 12 months.


4.6.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation.

4.6.5 TEST SETUP

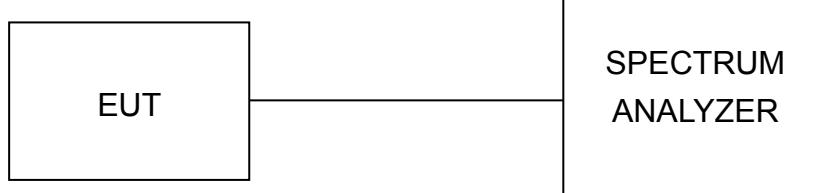

4.6.6 EUT OPERATING CONDITIONS

Hopping on a single channel that can be set by the software.

4.6.7 TEST RESULTS


For test mode B4

| | | | |
|------------------------|--|---------------------------------|--------------------------|
| EUT | 2.4GHz Digital Baby Phone (with LCD / with LED) | MODEL | BM-148 Series |
| MODULATION TYPE | GFSK | ENVIRONMENTAL CONDITIONS | 20deg. C, 60%RH, 1001Hpa |
| INPUT POWER | 120Vac, 60Hz | TESTED BY | Bright |


| CHANNEL | FREQUENCY (MHz) | ADJACENT CHANNEL SEPARATION (MHz) | 20dB BANDWIDTH (MHz) | MINIMUM LIMIT (MHz) | PASS / FAIL |
|----------------|------------------------|--|-----------------------------|----------------------------|--------------------|
| 1 | 2404.512 | 0.864 | 0.860 | 0.860 | PASS |
| 45 | 2442.528 | 0.868 | 0.820 | 0.820 | PASS |
| 87 | 2478.816 | 0.864 | 0.820 | 0.820 | PASS |

NOTE: The minimum limit is two-third of 20dB bandwidth.


CH1

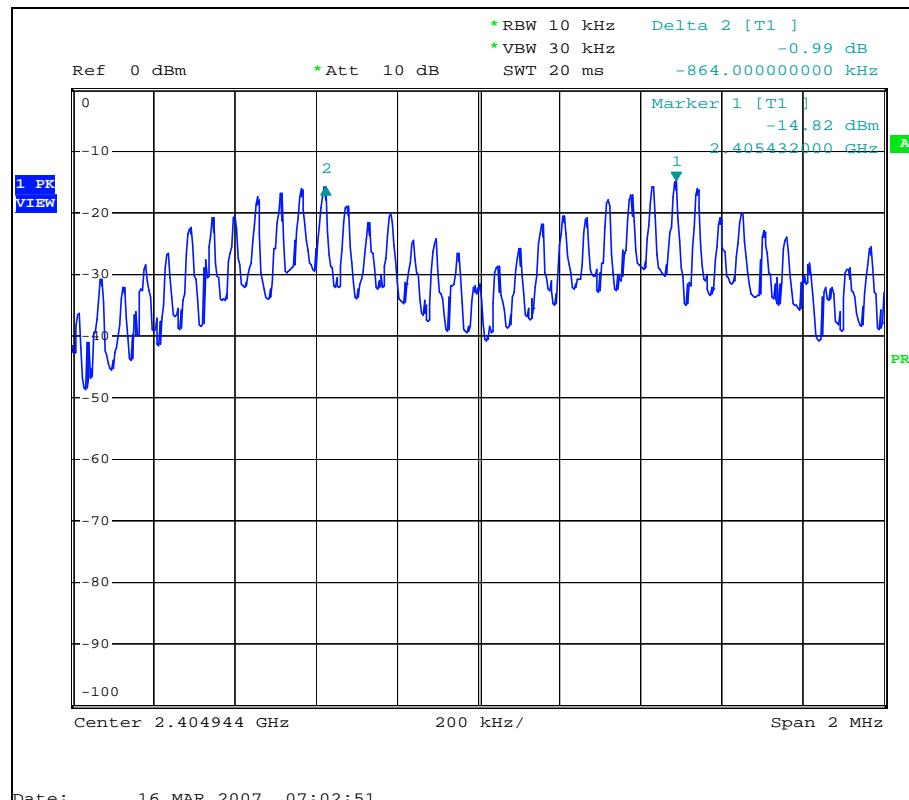

CH45

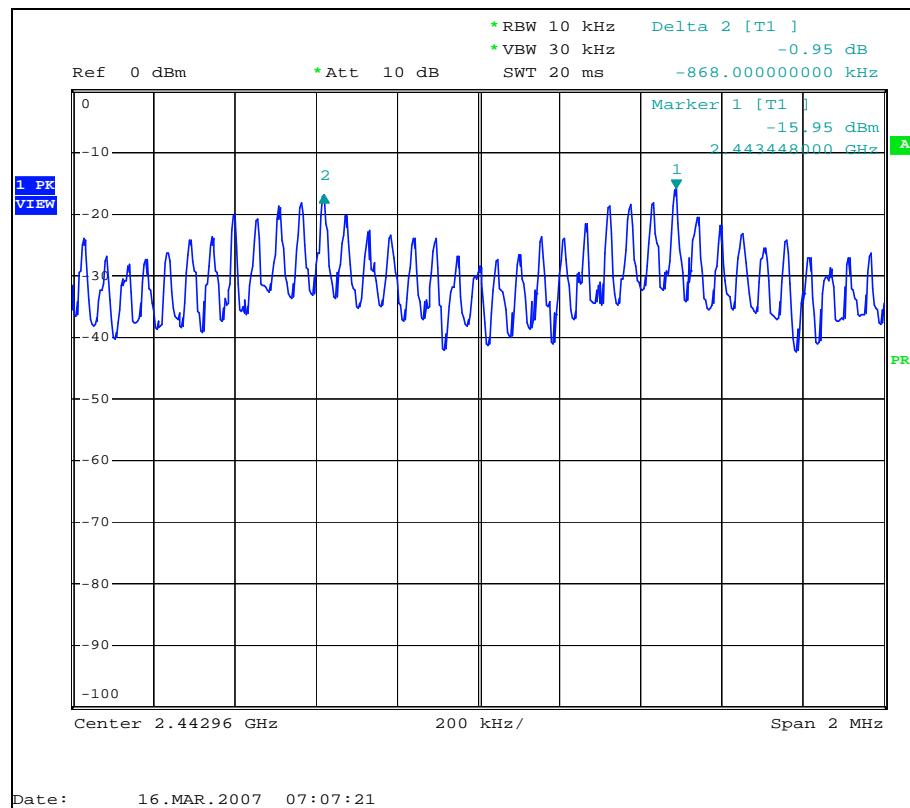

CH87

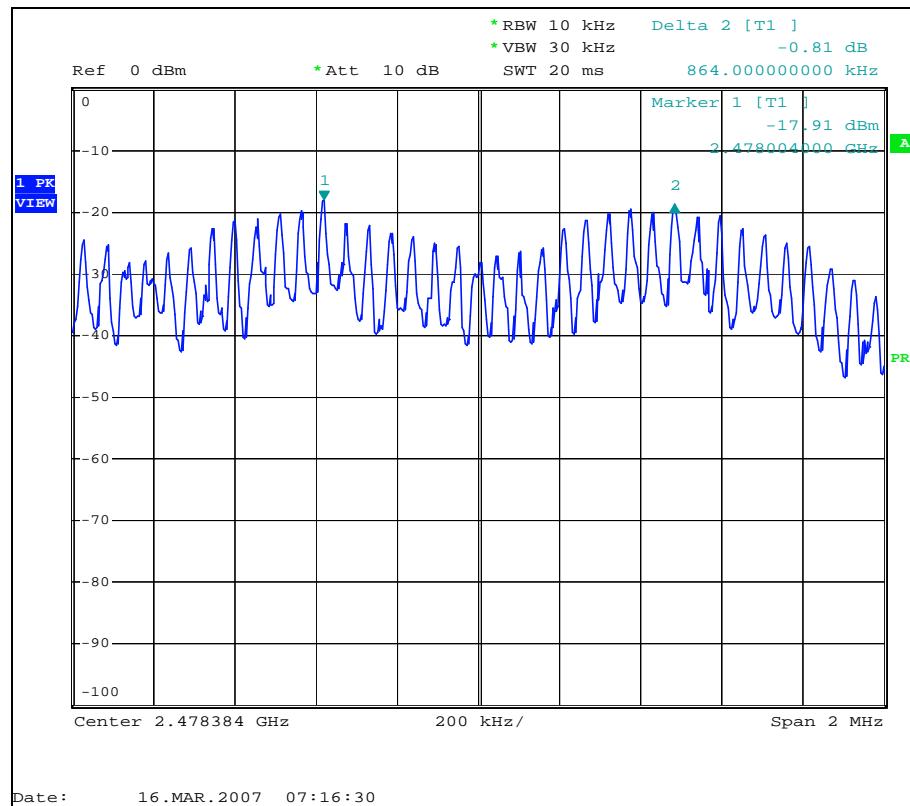

4.7 MAXIMUM PEAK OUTPUT POWER

4.7.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 1W.

4.7.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|---------------------------------------|-----------|------------|------------------|
| *Spectrum Analyzer ROHDE & SCHWARZ | FSP | E1S1002 | May. 15, 2007 |

NOTE: The calibration interval of the above test instruments is 12 months.

4.7.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 1 MHz RBW and 3 MHz VBW.
- d. Measure the captured power within the band and recording the plot.
- e. Repeat above procedures until all frequencies required were complete.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation.

4.7.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.7.6 EUT OPERATING CONDITION

Continuously transmitting with modulation on a certain channel that can be set by the software (with typical data input as the modulation source).

4.7.7 TEST RESULTS

For test mode B4

| | | | |
|------------------------|--|---------------------------------|--------------------------|
| EUT | 2.4GHz Digital Baby Phone (with LCD / with LED) | MODEL | BM-148 |
| MODULATION TYPE | GFSK | ENVIRONMENTAL CONDITIONS | 20deg. C, 60%RH, 1001Hpa |
| INPUT POWER | 120Vac, 60Hz | TESTED BY | Bright |

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER OUTPUT (dBm) | PEAK POWER LIMIT (dBm) | PASS/FAIL |
|---------|-------------------------|-------------------------|------------------------|-----------|
| 1 | 2404.512 | 11.99 | 30 | PASS |
| 45 | 2442.528 | 8.72 | 30 | PASS |
| 87 | 2478.816 | 6.42 | 30 | PASS |

4.8 BAND EDGES MEASUREMENT

4.8.1 LIMITS OF BAND EDGES MEASUREMENT

Below –20dB of the highest emission level of operating band.

4.8.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|--------------------------------------|-----------|------------|------------------|
| Spectrum Analyzer ROHDE & SCHWARZ | FSP | E1S1002 | May.15, 2007 |

NOTES: The calibration interval of the above test instruments is 12 months.

4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer with suitable frequency span including bandwidth from band edge. The band edges was measured and recorded.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation.



4.8.5 EUT OPERATING CONDITION

Continuously transmitting with modulation on a certain channel that can be set by the software (with typical data input as the modulation source).

4.8.6 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

For test mode B4

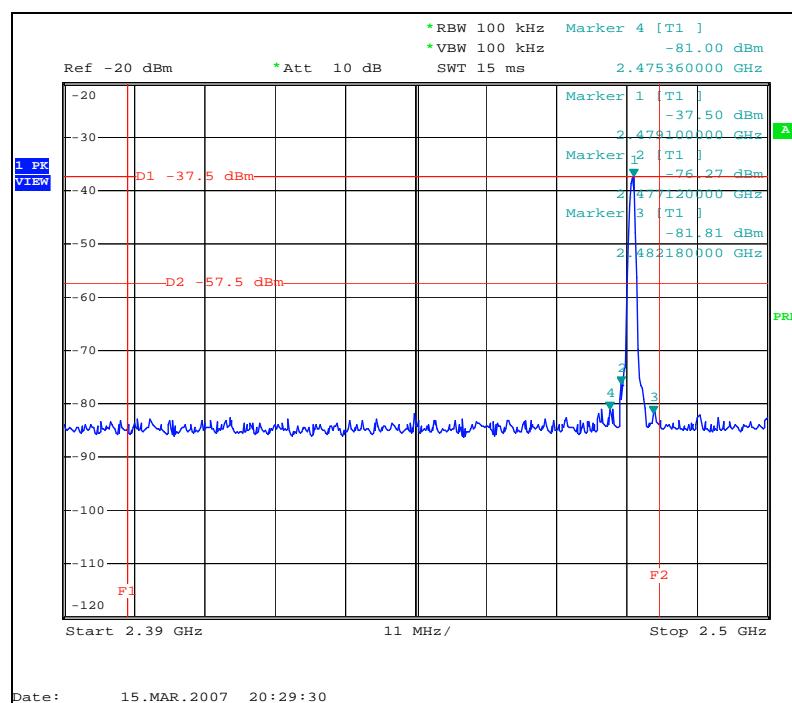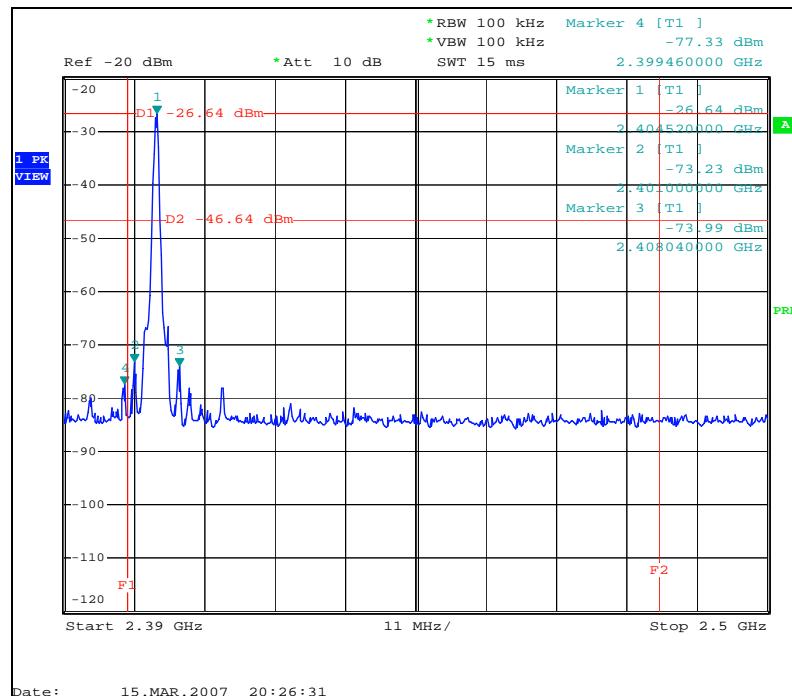

4.9 ANTENNA REQUIREMENT

4.9.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.9.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is soldered on PCB without antenna connector. The maximum gain of this antenna is 0dBi.

5. INFORMATION ON THE TESTING LABORATORY

We, ADT (Shanghai) Corp., was founded in 2003 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratory is accredited and approved by the following approval agencies according to ISO / IEC 17025 (2005).

The client should not use it to claim product endorsement by CNLS, A2LA, or any government agency.

| | |
|--------|-----------|
| Japan | VCCI |
| USA | FCC, A2LA |
| Norway | DNV |
| China | CNAS |



Copies of accreditation certificates of our laboratory obtained from approval agencies can be downloaded from our web site: www.cnadt.com

If you have any comments, please feel free to contact us at the following:

ADT (Shanghai) Corporation

TEL :86-21-6465-9091

Fax : 86-21-6465-9092

Email: service@adt-sh.com

Web Site: www.cnadt.com



APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.