

Description of product variants

Date:03/6/27

Difference between the exposure meter model L-558 and L-558CINE as follows:

The exposure meter model L-558 for photography and L-558CINE which are applying this time use the same electric wave module, and are the exposure meter which can make an electro flash emit light from the distant place.

The difference between L-558 and L-558CINE is only a measurement data display, and the substrate loading parts except a liquid crystal display do not have a difference.


- Liquid Crystal Display

To L-558, L-558CINE is the model developed to movie photography, measured value is processed after digital conversion and by CPU (an illumination unit, luminosity unit, etc.), and they show. Since it is specializing in a movie relation, the special display was needed and the liquid crystal display has changed as follows.

The difference portion to L-558



L-558

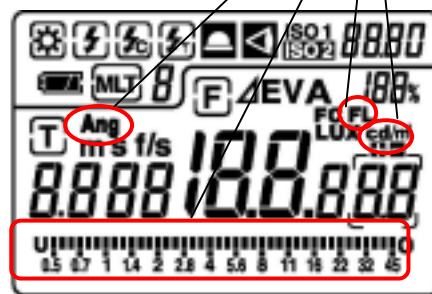

L-558CINE

Therefore these different may not affect the compliance of Safety and/or EMC requirements.

Kazuya Kuroi
General Manager
Quality Control Dept.
SEKONIC CORPORATION