

February 15, 2001

Elite Electronic Engineering, Inc.  
1516 Center Circle  
Downers Grove, IL 60515

Attn: Mr. Richard King

Dear Richard:

Enclosed you will find the revised report of measurements for the Sekonic Wireless Light Meter, Model L-608/L-608CINE, Serial No. n/a, FCC ID: PFK-608-01.

I trust that you will find the enclosed to be complete; however, should you have any questions or require any additional information, please feel free to contact us.

Very truly yours,

RETLIF TESTING LABORATORIES

Scott Wentworth  
Manager

Enc. (as stated)



Delta 1 [T1]

RBW

1 MHz

RF Att

10 dB

Ref Lvl

-4.56 dB

VBW

1 MHz

87 dBuV


26.452906 ms

SWT

30 ms

Unit

dBuV

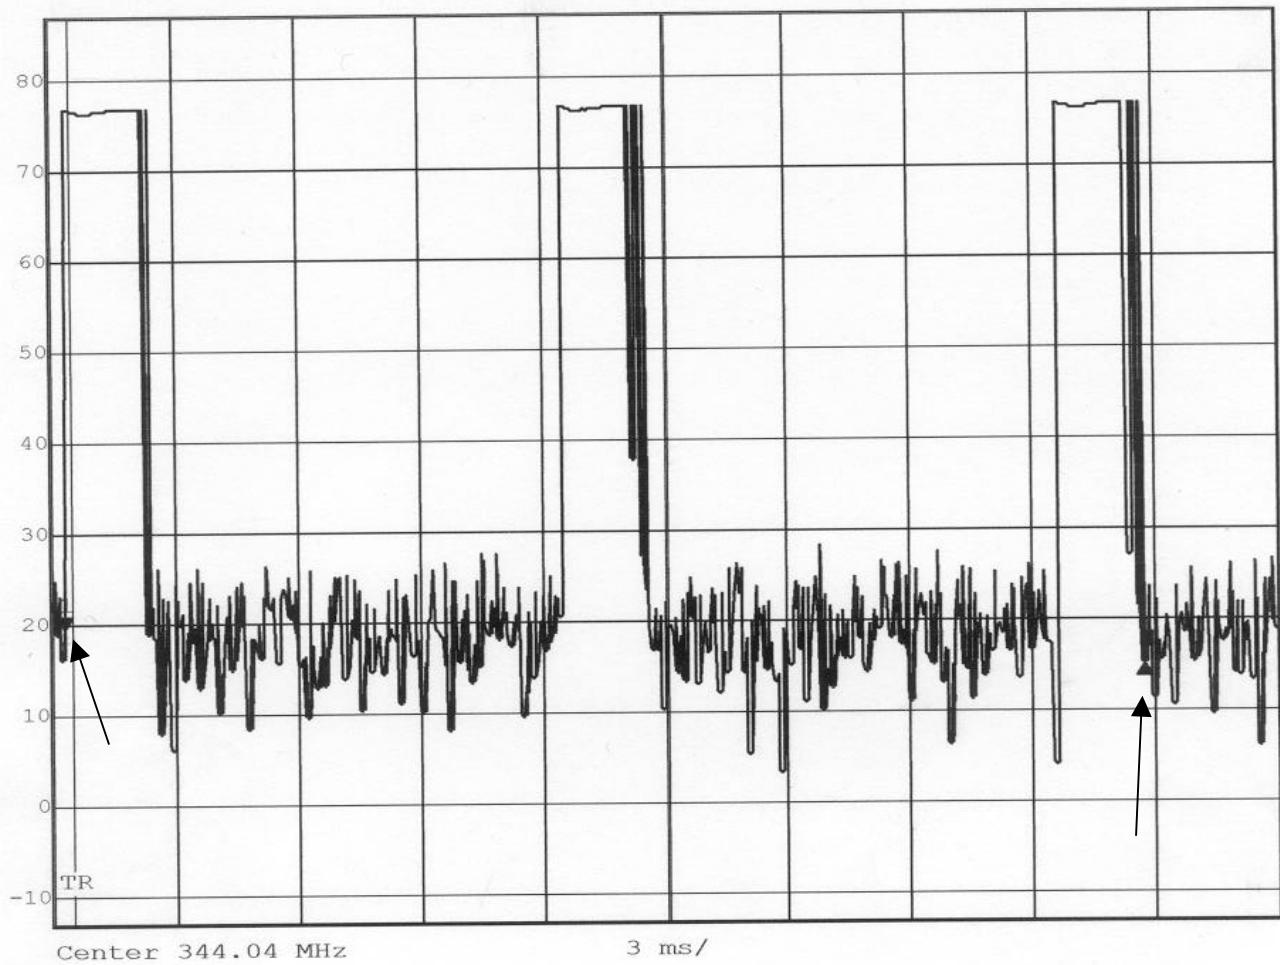

Date: 3.JAN.2001 13:26:27

Customer:  
Test Sample:  
Model No:  
Test Method:  
Notes:

Sekonic Corporation  
Wireless Light Meter  
L-608  
Duty Cycle Plots CH16 344 MHz

Date: 1/4/2001

Tech: T. Firkowski

Sheet 1 of 3



Retlif Testing Laboratories

Report No. R-3720N2

APPLICANT	MANUFACTURER
Sekonic Corporation 7-24-12, Oizum-Gakeun-Cho Nerima-Ku, Tokyo 178-8686 JAPAN	SAME

TEST SPECIFICATION: FCC Rules and Regulations Part 15, Subpart C, Para. 15.231

TEST PROCEDURE: ANSI C63.4:1992

#### TEST SAMPLE DESCRIPTION

BRANDNAME: Sekonic MODEL: L-608/L-608CINE

TYPE: Wireless Light Meter

POWER REQUIREMENTS: 3VDC Internal Battery

FREQUENCY BAND OF OPERATION: 344MHz to 354MHz (32 Discrete Channels)

MODULATION: Pulsed (On/Off Keying)

TYPE OF TRANSMISSION: Control Signal (Pulse Recognition Codes)

FREQUENCIES TESTED: 344.04MHz, 348.97MHz and 353.97MHz

FCC ID: PFK-608-01

APPLICABLE RULE SECTION: Part 15, Subpart C, Section 15.231

#### TESTS PERFORMED

Spurious Emissions

Field Strength of Fundamental

Occupied Bandwidth, 0.25% of Fundamental Frequency

Duty Cycle Determination

#### TEST SAMPLE OPERATION

The EUT is battery operated and was tested with new batteries installed. The device is normally manually operated and transmits a 3 packet burst control signal. Normal operation of the EUT complies with the parameters required in Part 15, Subpart C, Section 15.231. For testing purposes only the EUT was configured to continuously transmit. The Sekonic models L-608 and L-608CINE are electronically identical and utilize the exact same RF module. The only difference between these two models is the type of information which can be displayed on the LCD screen when the light meters are being used for cinematography measurements.

Test Report No. R-3720N2  
FCC ID: PFK-608-01

The L-608CINE model is capable of displaying more CINE speeds.

#### TEST SAMPLE / TEST PROGRAM

- The transmitter is manually activated.
- The transmitter does not perform periodic transmissions at regularly predetermined intervals.
- The device can not be employed for RC purposes involving security.
- The fundamental field strength at 344.04MHz did not exceed 7250.01FV/M (Average) at a test distance of 3 meters.  
The fundamental field strength at 348.97MHz did not exceed 7457.08FV/M (Average) at a test distance of 3 meters.  
The fundamental field strength at 353.97MHz did not exceed 7665.54FV/M (Average) at a test distance of 3 meters.
- The field strength of harmonic and spurious emissions did not exceed 725.0FV/M or 500FV/M as applicable at 344.04MHz.  
The field strength of harmonic and spurious emissions did not exceed 745.71FV/M or 500FV/M as applicable at 348.97.  
The field strength of harmonic and spurious emissions did not exceed 766.54FV/M or 500FV/M as applicable at 353.97.
- The device can operate at 32 discrete frequencies over the range of 344 to 354MHz. The device was tested at the frequencies of 344.04MHz, 348.97MHz and 353.97MHz. The bandwidth of emissions did not exceed 0.25% of the operating frequency and was determined as follows:

Fundamental Frequency	=	344.04MHz
0.25% of Center Frequency	=	0.86MHz
0.86 divided by 2	=	0.43MHz
Bandwidth Range	=	Fundamental Frequency + and - 0.43MHz
344MHz - 0.43MHz	=	343.61MHz
344MHz + 0.43MHz	=	344.47MHz
<b>Bandwidth Range</b>	<b>=</b>	<b>343.61MHz - 344.47MHz</b>
Fundamental Frequency	=	348.971MHz
0.25% of Center Frequency	=	0.872MHz
0.872 divided by 2	=	0.436MHz
Bandwidth Range	=	Fundamental Frequency + and - 0.436MHz
348.97MHz - 0.436MHz	=	348.534MHz

$$\begin{aligned}
 348.97\text{MHz} + 0.436\text{MHz} &= 349.406\text{MHz} \\
 \text{Bandwidth Range} &= \mathbf{348.53\text{MHz} - 349.41\text{MHz}}
 \end{aligned}$$

### TEST SAMPLE / TEST PROGRAM (continued)

Bandwidth Calculations continued:

$$\begin{aligned}
 \text{Fundamental Frequency} &= 353.971\text{MHz} \\
 0.25\% \text{ of Center Frequency} &= 0.884\text{MHz} \\
 0.884 \text{ divided by 2} &= 0.442\text{MHz} \\
 \text{Bandwidth Range} &= \text{Fundamental Frequency} + \text{and} - 0.436\text{MHz} \\
 353.97\text{MHz} - 0.442\text{MHz} &= 353.528\text{MHz} \\
 353.97\text{MHz} + 0.442\text{MHz} &= 354.412\text{MHz} \\
 \text{Bandwidth Range} &= \mathbf{353.53\text{MHz} - 354.41\text{MHz}}
 \end{aligned}$$

- The device uses an internal antenna.
- Radiated Emissions from the EUT were measured in all three axis. Worst case emissions were found with the EUT in the vertical upright position. This orientation is also the position in which the device will normally be used. The attached Radiated Emissions test data is representative of this worst case orientation.

### DETERMINATION OF FIELD STRENGTH LIMITS

The field strength limits shown below were calculated as instructed in Section 15.231.

#### **Fundamental Frequency: 344.04MHz**

Where F is the frequency in MHz, the formula for calculating the maximum permitted fundamental field strength for the band 260-470MHz, FV/m at 3 meters is as follows:

$$\begin{aligned}
 41.6667(F) - 7083.3333 &= \text{Field Strength Limit (FV/m)} \\
 41.6667 \times 344.04 &= 14335.01147 \\
 14335.01147 - 7083.3333 &= 7251.678168 \\
 \text{Field Strength Limit} &= 7251.68 \text{ FV/m}
 \end{aligned}$$

The maximum permitted unwanted emission level is 20dB below the maximum permitted fundamental level.

## TEST SAMPLE / TEST PROGRAM (continued)

Field Strength Limit Calculations continued:

### **Fundamental Frequency: 348.97MHz**

Where F is the frequency in MHz, the formula for calculating the maximum permitted fundamental field strength for the band 260-470MHz, FV/m at 3 meters is as follows:

$$\begin{aligned} 41.6667(F) - 7083.3333 &= \text{Field Strength Limit (FV/m)} \\ 41.6667 \times 348.97 &= 14540.4283 \\ 14540.4283 - 7083.3333 &= 7457.094999 \\ \text{Field Strength Limit} &= 7457.09 \text{ FV/m} \end{aligned}$$

The maximum permitted unwanted emission level is 20dB below the maximum permitted fundamental level.

### **Fundamental Frequency: 353.97MHz**

Where F is the frequency in MHz, the formula for calculating the maximum permitted fundamental field strength for the band 260-470MHz, FV/m at 3 meters is as follows:

$$\begin{aligned} 41.6667(F) - 7083.3333 &= \text{Field Strength Limit (FV/m)} \\ 41.6667 \times 353.97 &= 14748.7618 \\ 14748.7618 - 7083.3333 &= 7665.428499 \\ \text{Field Strength Limit} &= 7665.42 \text{ FV/m} \end{aligned}$$

The maximum permitted unwanted emission level is 20dB below the maximum permitted fundamental level.

### DETERMINATION OF DUTY CYCLE

The transmitter controls were adjusted to maximize the transmitted duty cycle. The analyzer was set for a frequency span of 0Hz. The sweep time was then adjusted in order to display one full pulse train. The transmitter on time was then summed and compared to the time for one full cycle in order to obtain the duty cycle.

#### **Fundamental Frequency: 344.04MHz**

Transmitter On Time	=	5.81 milliseconds (maximum)
Transmitter Cycle Time	=	26.45 milliseconds
Transmitter Duty Cycle	=	22.1 %
On Time divided by Cycle Time	=	Duty Cycle Factor
5.81 divided by 26.45	=	0.219
0.219 converted to dB ( $\text{LOG}_{10} .228$ )20	=	-13.164dB
<b><i>Duty Cycle Factor</i></b>	<b>=</b>	<b>-13.16dB</b>

#### **Fundamental Frequency: 348.97MHz**

Transmitter On Time	=	6.90 milliseconds (maximum)
Transmitter Cycle Time	=	26.69 milliseconds
Transmitter Duty Cycle	=	2.5 %
On Time divided by Cycle Time	=	Duty Cycle Factor
6.90 divided by 26.69	=	0.258
0.258 converted to dB ( $\text{LOG}_{10} .025$ )20	=	-11.749dB
<b><i>Duty Cycle Factor</i></b>	<b>=</b>	<b>-11.75dB</b>

#### **Fundamental Frequency: 353.97MHz**

Transmitter On Time	=	6.90 milliseconds (maximum)
Transmitter Cycle Time	=	26.69 milliseconds
Transmitter Duty Cycle	=	2.5 %
On Time divided by Cycle Time	=	Duty Cycle Factor
6.90 divided by 26.69	=	0.258
0.258 converted to dB ( $\text{LOG}_{10} .025$ )20	=	-11.749dB
<b>Duty Cycle Factor</b>	=	<b>-11.75dB</b>

Duty Cycle Factor Determination Plots are included with this application as a separate attachment.

TEST SAMPLE / TEST PROGRAM (continued)

SPECTRUM ANALYZER

Due to the nature of the emissions being measured, care was taken to ensure that the resolution bandwidth of the spectrum analyzer was adequate to provide accurate measurements.

GENERAL NOTES

1. All readings were taken utilizing a peak detector function at a test distance of 3 meters.
2. The duty cycle was applied to the peak readings in order to determine the average value of the emissions.
3. The frequency range was scanned from 30MHz to 3.6GHz. Emission levels closest to the specified limit are listed on the attached data sheet.

## EQUIPMENT LISTS

### Field Strength of Fundamental

<b>EN</b>	<b>Type</b>	<b>Manufacturer</b>	<b>Description</b>	<b>Model No.</b>	<b>Cal Date</b>	<b>Due Date</b>
4202	Biconilog	EMCO	26 MHz - 2 GHz	3142	7/10/00	7/10/01
4895	Spectrum Analyzer	Hewlett Packard	9kHz - 22GHz	8593EM	2/17/00	2/17/01
4921	Graphics Plotter	Hewlett Packard	N/A	7550A	4/25/00	4/25/01
713	EMI Test Receiver	Rohde & Schwarz	20 Hz - 26.5 GHz	ESI26	3/9/00	3/9/01

### Occupied Bandwidth


<b>EN</b>	<b>Type</b>	<b>Manufacturer</b>	<b>Description</b>	<b>Model No.</b>	<b>Cal Date</b>	<b>Due Date</b>
713	EMI Test Receiver	Rohde & Schwarz	20 Hz - 26.5 GHz	ESI26	3/9/00	3/9/01

### Spurious Emissions

<b>EN</b>	<b>Type</b>	<b>Manufacturer</b>	<b>Description</b>	<b>Model No.</b>	<b>Cal Date</b>	<b>Due Date</b>
3116	Pre-Amplifier	Miteq	0.1 GHz - 18 GHz	AFS42-35	11/7/00	11/7/01
3117	Power Supply	B&K Precision	0-30 Vdc, 3.0 A	1630	2/23/00	2/23/01
3258	Double Ridge Guide	EMCO	1 - 18 GHz	3115	4/6/00	4/6/01
4202	Biconilog	EMCO	26 MHz - 2 GHz	3142	7/10/00	7/10/01
4895	Spectrum Analyzer	Hewlett Packard	9kHz - 22GHz	8593EM	2/17/00	2/17/01
4921	Graphics Plotter	Hewlett Packard	N/A	7550A	4/25/00	4/25/01
713	EMI Test Receiver	Rohde & Schwarz	20 Hz - 26.5 GHz	ESI26	3/9/00	3/9/01



Delta 1 [T1] Ref Lvl 9.08 dB RBW 10 kHz RF Att 10 dB  
87 dB $\mu$ V 26.737475 ms VBW 10 kHz Unit dB $\mu$ V  
SWT 30 ms

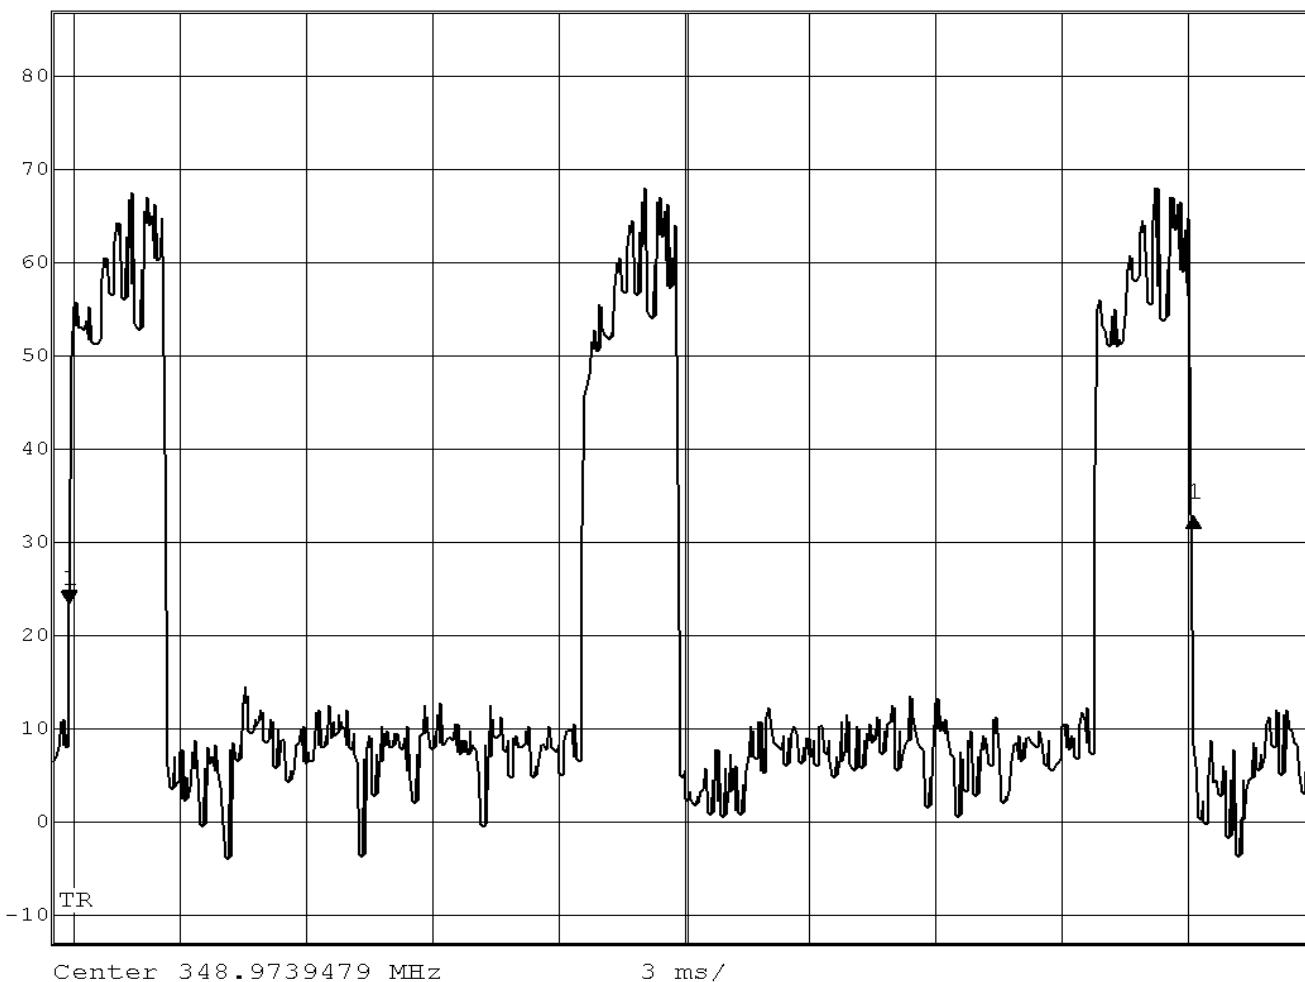

Date: 28.JAN.2001 11:05:31

Customer:  
Test Sample:  
Model No:  
Test Method:  
Notes:

Sekonic Corporation  
Wireless Light Meter  
L-608  
Duty Cycle Plots CH22 348.97 MHz

Date: 1/28/2001

Tech: T. Firkowski

Sheet 2 of 3



Retlif Testing Laboratories

Report No. R-3720N2

**Spurious Emissions**

<b>EN</b>	<b>Type</b>	<b>Manufacturer</b>	<b>Description</b>	<b>Model No.</b>	<b>Cal Date</b>	<b>Due Date</b>
3116	Pre-Amplifier	Miteq	0.1 GHz - 18 GHz	AFS42-35	11/7/00	11/7/01
3117	Power Supply	B&K Precision	0-30 Vdc, 3.0 A	1630	2/23/00	2/23/01
3258	Double Ridge Guide	EMCO	1 - 18 GHz	3115	4/6/00	4/6/01
4202	Biconilog	EMCO	26 MHz - 2 GHz	3142	7/10/00	7/10/01
4895	Spectrum Analyzer	Hewlett Packard	9kHz - 22GHz	8593EM	2/17/00	2/17/01
4921	Graphics Plotter	Hewlett Packard	N/A	7550A	4/25/00	4/25/01
713	EMI Test Receiver	Rohde & Schwarz	20 Hz - 26.5 GHz	ESI26	3/9/00	3/9/01

EN	Type	Occupied Bandwidth		Model No.	Cal Date	Due Date
		Manufacturer	Description			
713	EMI Test Receiver	Rohde & Schwarz	20 Hz - 26.5 GHz	ESI26	3/9/00	3/9/01

**Field Strength of Fundamental**

<b>EN</b>	<b>Type</b>	<b>Manufacturer</b>	<b>Description</b>	<b>Model No.</b>	<b>Cal Date</b>	<b>Due Date</b>
4202	Biconilog	EMCO	26 MHz - 2 GHz	3142	7/10/00	7/10/01
4895	Spectrum Analyzer	Hewlett Packard	9kHz - 22GHz	8593EM	2/17/00	2/17/01
4921	Graphics Plotter	Hewlett Packard	N/A	7550A	4/25/00	4/25/01
713	EMI Test Receiver	Rohde & Schwarz	20 Hz - 26.5 GHz	ESI26	3/9/00	3/9/01

## RETLIF TESTING LABORATORIES

## TABULAR DATA SHEET

**TEST METHOD:** Field Strength of Fundamental

**CUSTOMER:** Sekonic Corporation      **JOB NO:** R-3720N2

### TEST SAMPLE: Wireless Light Meter

**TEST SPECIFICATION:** FCC Part 15, Subpart C Paragraph: 15.231(a)(4)

**OPERATING MODE:** Continuously Transmitting

TECHNICIAN: T. Firkowski DATE: 1/28/01

NOTES: Detector Function: Peak @ 3m

DATA SHEET 1 of 1


**R-3720N2**



Ref Lvl  
87 dB $\mu$ V

Marker 1 [T1]  
76.77 dB $\mu$ V  
335.80579396 MHz

RBW 10 kHz  
VBW 100 kHz  
SWT 35 ms  
RF Att Unit  
10 dB  
dB $\mu$ V

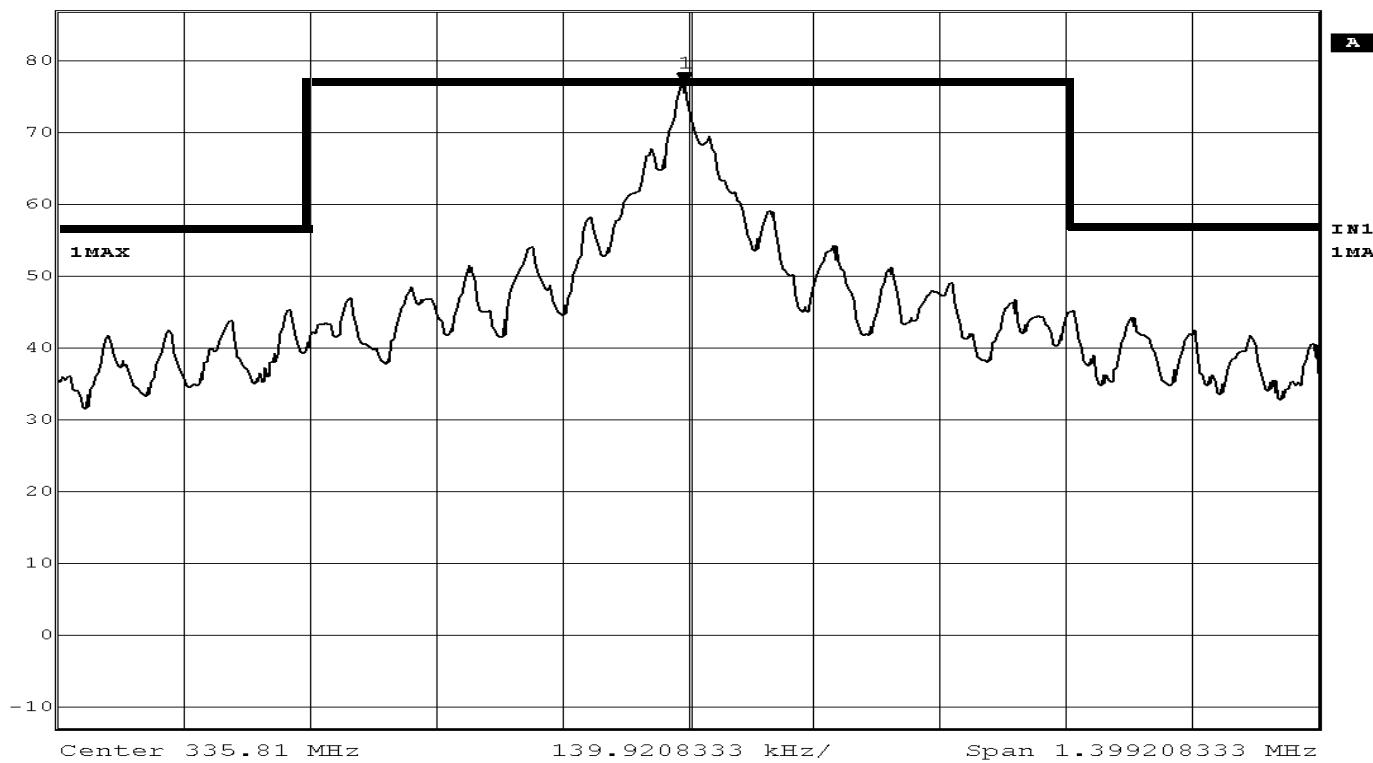

Date: 4.JAN.2001 10:18:56

Customer:  
Test Sample:  
Model No:  
Test Method:  
Notes:

Sekonic Corporation  
Wireless Light Meter  
L-608  
Occupied Bandwidth, FCC Part 15, Subpart C Para: 15.231(c)

Date: 1/4/2001

Tech: T. Firkowski

Sheet 1 of 3




Retlif Testing Laboratories

Report No. R-3720N2



Marker 1 [T1] RBW 10 kHz RF Att 10 dB  
Ref Lvl 79.00 dB $\mu$ V VBW 10 kHz  
87 dB $\mu$ V 348.96601051 MHz SWT 37 ms Unit dB $\mu$ V

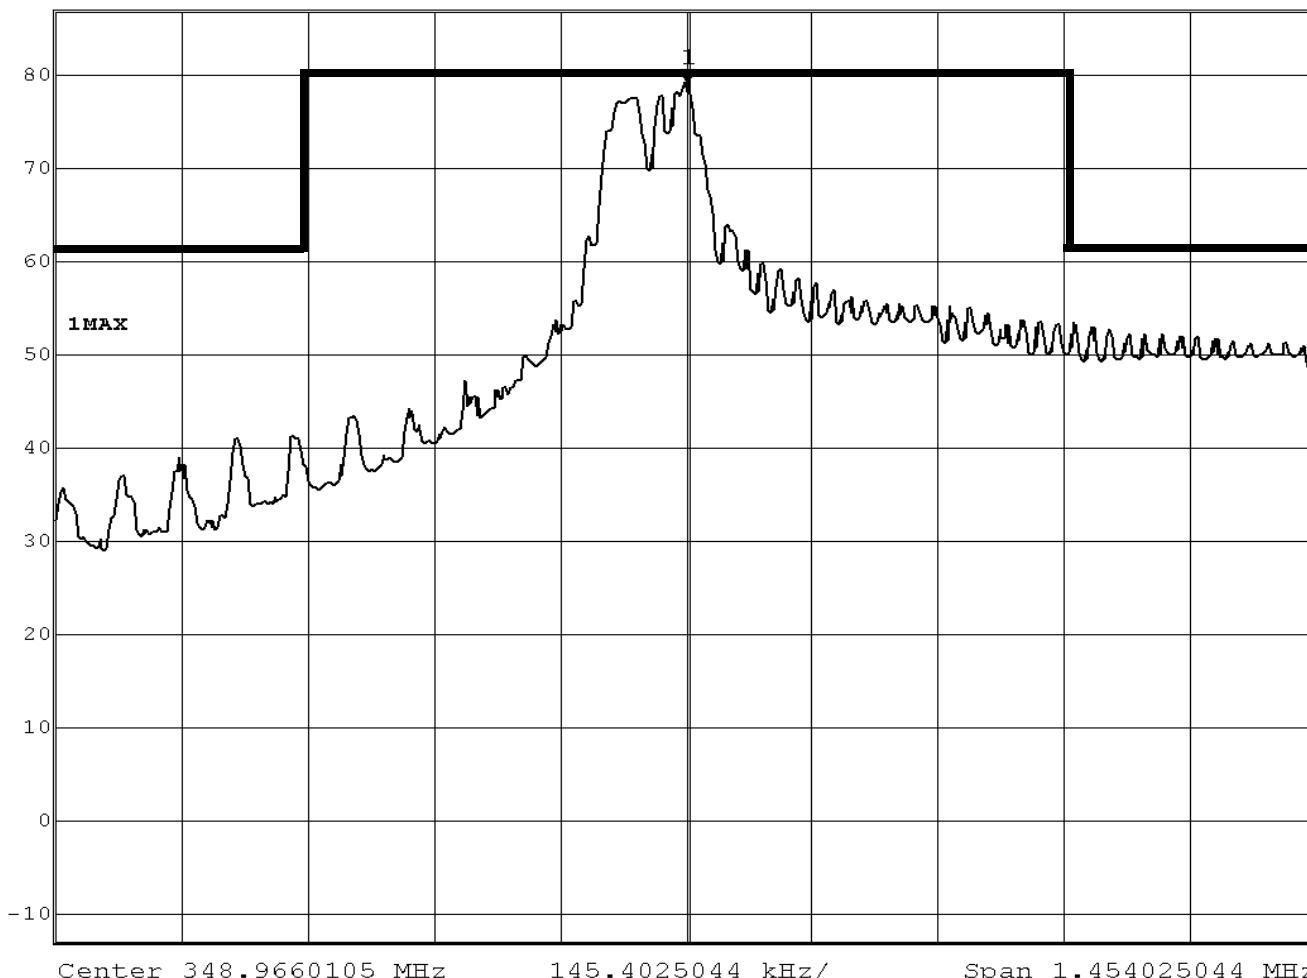

Date: 27.JAN.2001 15:18:14

Customer:  
Test Sample:  
Model No:  
Test Method:  
Notes:

Sekonic Corporation  
Wireless Light Meter  
L-608  
Occupied Bandwidth, FCC Part 15, Subpart C Para: 15.231(c)

Date: 1/27/2001

Tech: T. Firkowski

Sheet 2 of 3




**Retlif Testing Laboratories**

Report No. R-3720N2



	Marker 1 [T1]	RBW	10 kHz	RF Att	10 dB
Ref Lvl	80.47 dB $\mu$ V	VBW	10 kHz		
87 dB $\mu$ V	353.96209957 MHz	SWT	37 ms	Unit	dB $\mu$ V

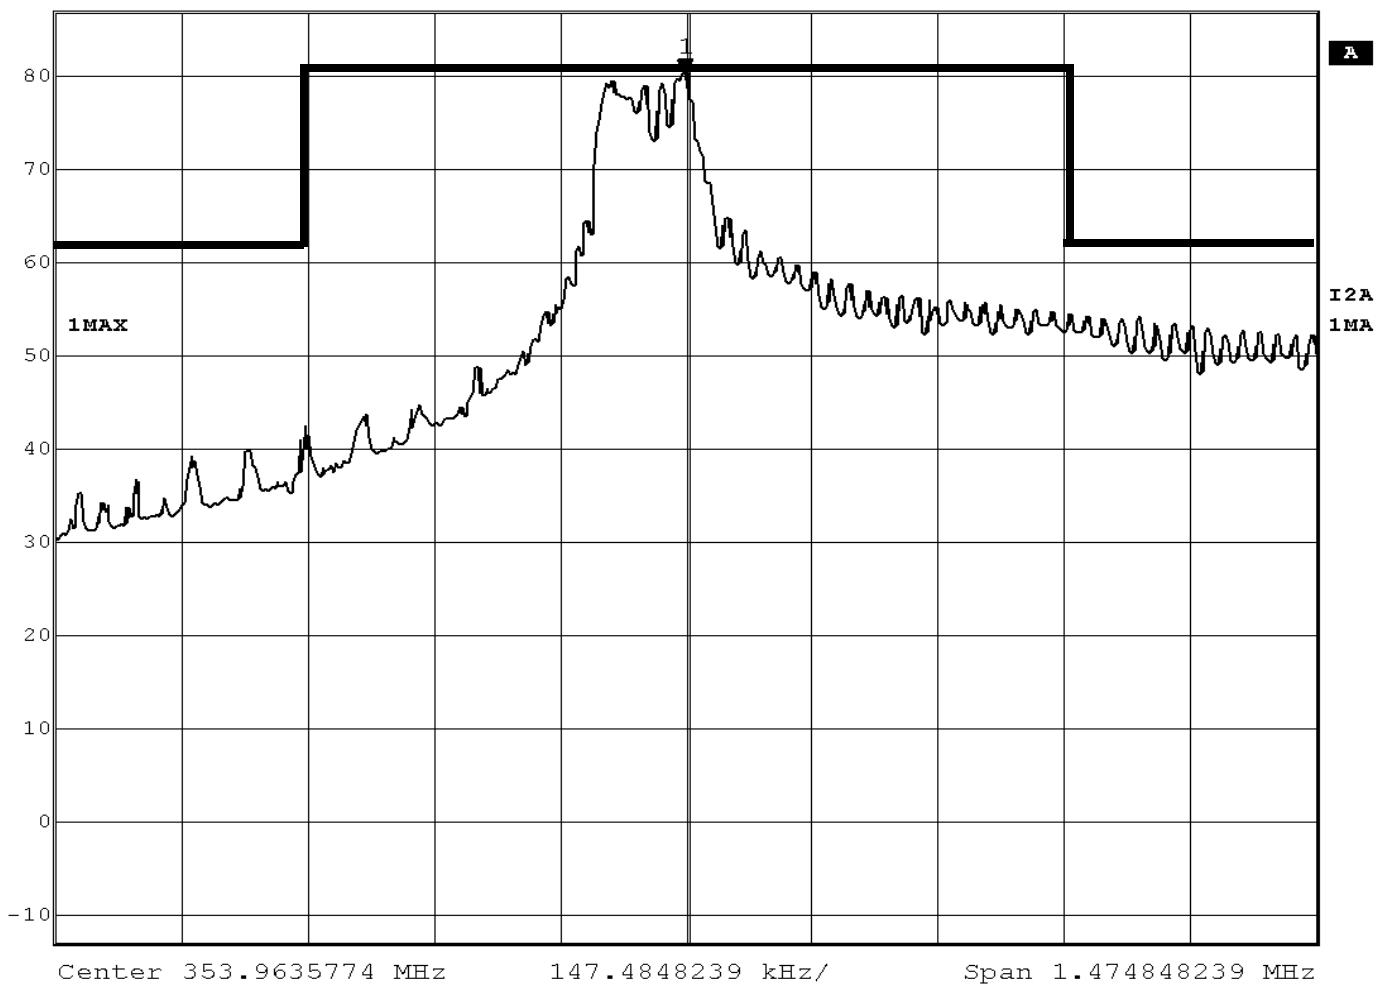

Date: 27.JAN.2001 15:16:33

Span 1.474848239 MHz

Customer:  
Test Sample:  
Model No:  
Test Method:  
Notes:

Sekonic Corporation  
Wireless Light Meter  
L-608  
Occupied Bandwidth, FCC Part 15, Subpart C Para: 15.231( c )



Retlif Testing Laboratories

Report No. R-3720N2

Date: 1/27/2001 Tech: T. Firkowski Sheet 3 of 3

## RETLIF TESTING LABORATORIES

### TABULAR DATA SHEET

**TEST METHOD:** Spurious Emissions (30MHz to 3.6GHz)

<b>CUSTOMER:</b> Sekonic Corporation	<b>JOB NO:</b> R-3720N2
--------------------------------------	-------------------------

**TEST SAMPLE:** Wireless Light Meter

<b>MODEL NO:</b> L-608	<b>SERIAL NO:</b> n/a
------------------------	-----------------------

**TEST SPECIFICATION:** FCC Part 15, Subpart C Paragraph: 15.231(b) & 15.205

**OPERATING MODE:** Continuously Transmitting

<b>TECHNICIAN:</b> T. Firkowski	<b>DATE:</b> 1/28/01
---------------------------------	----------------------

**NOTES:** Detector Function: Peak @ 3m Fundamental Frequency: 344.00 MHz (CH 16)

TRANSMIT FREQUENCY	TEST FREQUENCY	ANTENNA/EUT POSITION	METER READING	CORRECTION FACTOR	DUTY CYCLE CORRECTION FACTOR	CORRECTED READING	CONVERTED READING	LIMIT @ 3 METERS
MHz	MHz	Polarization/ Axis	dBuV	dB	dB	dBuV/m	uV/m	uV/m
344.00	688.00	---	---	---	---	---	---	725.00
	1032.00	---	---	---	---	---	---	500.00
	1376.00	---	---	---	---	---	---	500.00
	1720.00	---	---	---	---	---	---	500.00
	2064.00	---	---	---	---	---	---	725.00
	2408.00	---	---	---	---	---	---	725.00
	2752.00	---	---	---	---	---	---	500.00
	3096.00	---	---	---	---	---	---	725.00
344.00	3440.00	---	---	---	---	---	---	725.00

No Spurious Emissions or Harmonics were observed within the specified test distance throughout the given frequency spectrum.

## RETLIF TESTING LABORATORIES

### TABULAR DATA SHEET

**TEST METHOD:** Spurious Emissions (30MHz to 3.6GHz)

<b>CUSTOMER:</b> Sekonic Corporation	<b>JOB NO:</b> R-3720N2
--------------------------------------	-------------------------

**TEST SAMPLE:** Wireless Light Meter

<b>MODEL NO:</b> L-608	<b>SERIAL NO:</b> n/a
------------------------	-----------------------

**TEST SPECIFICATION:** FCC Part 15, Subpart C Paragraph: 15.231(b) & 15.205

**OPERATING MODE:** Continuously Transmitting

<b>TECHNICIAN:</b> T. Firkowski	<b>DATE:</b> 1/28/01
---------------------------------	----------------------

**NOTES:** Detector Function: Peak @ 3m Fundamental Frequency: 348.97 MHz (CH 22)

TRANSMIT FREQUENCY	TEST FREQUENCY	ANTENNA/EUT POSITION	METER READING	CORRECTION FACTOR	DUTY CYCLE CORRECTION FACTOR	CORRECTED READING	CONVERTED READING	LIMIT @ 3 METERS
MHz	MHz	Polarization/ Axis	dBuV	dB	dB	dBuV/m	uV/m	uV/m
348.97	697.95	---	---	---	---	---	---	745.71
	1046.92	---	---	---	---	---	---	500.00
	1395.90	---	---	---	---	---	---	500.00
	1744.87	---	---	---	---	---	---	745.71
	2093.84	---	---	---	---	---	---	745.71
	2442.82	---	---	---	---	---	---	745.71
	2791.79	---	---	---	---	---	---	500.00
	3140.77	---	---	---	---	---	---	745.71
348.97	3489.74	---	---	---	---	---	---	745.71

No Spurious Emissions or Harmonics were observed within the specified test distance throughout the given frequency spectrum.

## RETLIF TESTING LABORATORIES

### TABULAR DATA SHEET

**TEST METHOD:** Spurious Emissions (30MHz to 3.6GHz)

<b>CUSTOMER:</b> Sekonic Corporation	<b>JOB NO:</b> R-3720N2
--------------------------------------	-------------------------

**TEST SAMPLE:** Wireless Light Meter

<b>MODEL NO:</b> L-608	<b>SERIAL NO:</b> n/a
------------------------	-----------------------

**TEST SPECIFICATION:** FCC Part 15, Subpart C Paragraph: 15.231(b) & 15.205

**OPERATING MODE:** Continuously Transmitting

<b>TECHNICIAN:</b> T. Firkowski	<b>DATE:</b> 1/28/01
---------------------------------	----------------------

**NOTES:** Detector Function: Peak @ 3m Fundamental Frequency: 353.97 MHz (CH 32)

TRANSMIT FREQUENCY	TEST FREQUENCY	ANTENNA/EUT POSITION	METER READING	CORRECTION FACTOR	DUTY CYCLE CORRECTION FACTOR	CORRECTED READING	CONVERTED READING	LIMIT @ 3 METERS
MHz	MHz	Polarization/ Axis	dBuV	dB	dB	dBuV/m	uV/m	uV/m
353.97	707.94	---	---	---	---	---	---	766.54
	1061.90	---	---	---	---	---	---	500.00
	1415.87	---	---	---	---	---	---	500.00
	1769.84	---	---	---	---	---	---	766.54
	2123.81	---	---	---	---	---	---	766.54
	2477.78	---	---	---	---	---	---	766.54
	2831.75	---	---	---	---	---	---	500.00
	3185.71	---	---	---	---	---	---	766.54
353.97	3539.68	---	---	---	---	---	---	766.54

No Spurious Emissions or Harmonics were observed within the specified test distance throughout the given frequency spectrum.





