

Electromagnetic Emission

FCC MEASUREMENT REPORT

CERTIFICATION OF COMPLIANCE

FCC Part 15 Certification Measurement

PRODUCT : 17" Web Base Terminal
MODEL/TYPE NO : TC7730
FCC ID : PFMTC7730
APPLICANT : GEMPACK CO., LTD.
324-18, Dangjung-Dong, Kunpo-Si, Kyungki-Do, 435-030, Korea
Attn. : Woong Tae, Yoon / Director
Manufacturer : GEMPACK CO., LTD.
324-18, Dangjung-Dong, Kunpo-Si, Kyungki-Do, 435-030, Korea
FCC CLASSIFICATION : Part 15 Class B Unintentional Radiators Computing Device (JBC)
FCC RULE PART(S) : FCC Part 15 Subpart B
FCC PROCEDURE : Certification
TRADE NAME : N/A
TEST REPORT No. : E03.0718. FCC.404N
DATES OF TEST : July 15~17, 2003
DATES OF ISSUE : July 18, 2003
TEST LABORATORY : ETL Inc (FCC Registration Number : 95422)
584 Sangwhal-ri, Kanam-myon, Yoju-kun, Kyounggi-do,
469-885, Korea
Tel : (031) 885-0072 Fax : (031) 885-0074

This 17" Web Base Terminal, Model TC7730 has been tested in accordance with the measurement procedures specified in ANSI C63.4-1992 at the ETL/EMC Test Laboratory and has been shown to be complied with the electromagnetic radiated emission limits specified in FCC Rule Part15 Subpart B : Unintentional Radiators.

I attest to the accuracy of data. All measurement herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Yo han, Park

Name : Yo han, park

Title : Chief Engineer & Lab.Manager

E-RAE Testing Laboratory Inc.
584 Sangwhal-ri, Kanam-myon,
Yoju-kun, Kyounggi-do, 469-885, Korea



Table of Contents

ATTACHMENT A: COVER LETTER(S)

FCC Measurement Report

- 1. Introduction**
- 2. Product Information**
- 3. Description of Tests**
- 4. Test Condition**
- 5. Test Results**
 - 5.1 Summary of Test Results**
 - 5.2 Conducted Emissions Measurement**
 - 5.3 Radiated Emissions Measurement**
- 6. Sample Calculations**
- 7. List of test Equipment used for Measurement**

- Appendix A. FCC ID Label and Location**
- Appendix B. Test Setup Photographs**
- Appendix C. External Photographs**
- Appendix D. Internal Photographs**
- Appendix E. Block Diagram**
- Appendix F. User Manual**
- Appendix G. Schematics**

FCC MEASUREMENT REPORT

Scope – Measurement and determination of electromagnetic emission(EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)

General Information

Applicant Name : GEMPACK CO., LTD.

Address : 324-18, Dangjung-Dong, Kunpo-Si, Kyungki-Do,
435-030, Korea

Attention : Woong Tae, Yoon / Director

- **EUT Type** : 17" Web Base Terminal
- **Model Number** : TC7730
- **FCC Identifier** : PFMTC7730
- **S/N** : N/A
- **Modulation** : N/A
- **FCC Rule Part(s)** : Part 15 Subpart B Unintentional Radiators
- **Test Procedure** : ANSI C63.4-1992
- **FCC Classification** : Part 15 Class B Unintentional Radiators
Computing Device (JBC)
- **Dates of Tests** : July 15~17, 2003
- **Place of Tests** : ETL Inc
EMC Testing Lab (FCC Registration Number : 95422)
584, Sangwhal-Ri, Kanam-Myun, Yoju-Kun,
Kyounggi-Do, Korea
Tel : (031) 885-0072 Fax : (031) 885-0074
- **Test Report No.** : E03.0718.FCC.404N

1. INTRODUCTION

The measurement test for radiated and conducted emission test were conducted at the open area test site of E-RAE Testing Laboratory Inc. facility located at 584, Sangwhal-ri, Ganam-myun, Youju-kun, Kyounggi-do, Korea. The site is constructed in conformance with the requirements of the ANSI C63.4-1992 and CISPR Publication 16. The ETL has site descriptions on file with the FCC for 3 and 10 meter site configurations. Detailed description of test facility was found to be in compliance with the requirements of Section 2.948 FCC Rules according to the ANSI C63.4-1992 and registered to the Federal Communications Commission(Registration Number : 95422).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C.63.4-1992) was used in determining radiated and conducted emissions from the GEMPACK CO., LTD., Model: TC7730

2. PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test(EUT) is the GEMPACK CO., LTD. / 17" Web Base Terminal / TC7730

Please refer to Users manual

2.2 General Specification

- Chassis Type : Plastic Cover
- List of Each OSC. Or X-Tal. Freq. ($\geq 1\text{MHz}$) : X-TAL – 14.3181MHz, 25.0MHz
- Chipset Brand & Part No. : VT8231 – VIA, VT6103 – VIA, 55LDO17B – SST,
K9F2808U0B – SAMSUNG, DTC34LM85 – DOESTEK,
W29C020CP90B – WINBOND, 64MB UNB PC133 CL3 – Apacer
- Number of Layers : Main board – 4Layers, Inverter board – 4 Layers, Front board – 2 Layers
- Networking Protocols : 10/100 Base T Ethernet, RJ45, IEEE 802.11B Wireless LAN
: TCP/IP with DNS, DHCP and PPP
: Load balancing supported by Citrix ICA,
: Remote modem dial up with Citrix ICA
- Operating System : Microsoft Windows CE
- Power supply : External power supply 100-240VAC at 50-60Hz 4.58A, 50W nominal
- CPU : VIA Eden ESP 5000 533MHz
- RAM Memory : 64MB RAM Standard, Expandable to 256MB
- Flash memory : 32MB DOM or 32MB Compact Flash up to 256MB
: Flash upgrade utility via Ethernet
- Graphics Subsystem : VIA VT8606 North Bridge, Resolution of 1200 X 1024
: 32-bit (24) True colors, Supports all VESA monitors
- Audio support : VIA VT8231 controlled, with VT1611A AC'97 Audio Codec
: Full 16-bit stereo FM synthesis, Built-in speaker system

3. DESCRIPTION OF TESTS

3.1 Conducted Emission Measurement

Conducted emissions measurements were made in accordance with § 12.2 in ANSI C63.4-1992 "Measurement of Information Technology Equipment ". The measurement were performed over the frequency range of 0.15MHz to 30MHz using a 50Ω/50uH LISN as the input transducer to a Spectrum Analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 10KHz or for "quasi-peak" within a bandwidth of 9KHz.

- Procedure of Test

The line-conducted facility is located inside a shielded room 1m X 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 1.5m away from the side wall of the shielded room. Two EMCO 3825/2 LISN are bonded to the shielded room. The EUT is powered from the EMCO LISN and the support equipment is powered from the another EMCO LISN. Power to the LISNs are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner ϕ 1.2cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the EMCO LISN. Non-inductive bundling to a 1m length shortened all interconnecting cables more than 1m. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the EMI Test receiver ESHS 30 to determine the frequency producing the max. emission from the EUT. The frequency producing the max. level was reexamined using to set Quasi-Peak mode by manual, after scanned by automatic Peak mode from 0.15 to 30MHz. The bandwidth of the EMI Test receiver ESHS 30 was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission.

3. DESCRIPTION OF TESTS

3.2 Radiated Emission Measurement

Radiated emission measurements were in accordance with § 12.2 in ANSI C63.4-1992 "Measurement of Information Technology Equipment ". The measurements were performed over the frequency range of 30MHz to 1GHz using antenna as the input transducer to a Spectrum analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Quasi-peak" within a bandwidth of 120KHz.

- Procedure of Test

Preliminary measurements were made at 3 meter using broadband antennas, and spectrum analyzer to determined the frequency producing the max. emission in shielded room. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 to 1000MHz using SchwarzBeck Log-Bicon antenna. Above 1GHz, linearly polarized double ridge horn antennas were used. Final measurements were made open site at 10-meters. The test equipment was placed on a wooden turn-table. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR Quasi-peak mode and the bandwidth of the receiver was set to 120kHz or 1MHz depending on the frequency of type of signal. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the max. emission for the frequency and were placed on top of a 0.8-meter high nonmetallic 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the max. emission. Each emission was maximized by: varying the mode of operation to the EUT and/or support equipment and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.

4. TEST CONDITION

4.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the following conditions and configurations were used.

4.2 EUT operation

The EUT was connected as user's guide. And during the test executed test program for Ping Test Program with ping test display on Monitor.

Operating Mode	Worst case
Stand by	X
Ping test mode	O

O: Worst case investigated during the Test

4.3 Support Equipment Used

Following peripheral devices and interface cables were connected during the measurement:

EUT – 17" Web Base Terminal (GEMPACK CO., LTD.)

FCC ID : PFMTC7730
Model Name : TC7730
Serial No. : N/A
Manufacturer : GEMPACK CO., LTD.
Power Supply Type : Switching, DC 12V/5.0A of AC/DC Adapter
Power Cord : Non-shielded, Detachable: 1.2m
Port : RGB: 1, DC IN: 1, MIC IN: 1, EAR Phone: 1, USB: 2, RJ-45: 1,
Parallel: 1, RS-232: 1, PS/2: 2

Support Unit 1 – Keyboard (COMPAQ)

FCC ID : DOC
Model Name : KB-9963
Serial No. : B2696OLGAML00X
Manufacturer : Chicony Electronics
Power Supply Type : N/A
Power Cord : N/A
Data Cable : Shielded: 1.2m

Support Unit 2 - MOUSE (LOGITECH)

FCC ID : DZL211029
Model Name : M-S34
Serial No. : LNA10212779
Manufacturer : LOGITECH
Power Supply Type : N/A
Power Cord : N/A
Data Cable : Shielded, 1.2m

Support Unit 3 – USB MOUSE (N/A)

FCC ID : HLA311001
Model Name : HL898w
Serial No. : HL08011839
Manufacturer : N/A
Power Supply Type : N/A
Power Cord : N/A
Data Cable : Shielded, 1.2m

Support Unit 4 – Serial Mouse (N/A)

FCC ID : JKGMUS5S01
Model Name : MUS5S
Serial No. : N/A
Manufacturer : N/A
Power Supply Type : N/A
Power Cord : N/A
Data Cable : Un-Shielded, 1.2m

Support Unit 5 – Printer (SINDORICO)

FCC ID : N/A
Model Name : Colorcab330
Serial No. : 11-03098
Manufacturer : LEXMARK INTERNATIONAL INC.
Power Supply Type : Switching
Power Cord : Non-Shielded, Detachable, 1.2m
Data Cable : Shielded, 1.5m



FCC ID: PFMTC7730
Report No: E03.0718.FCC.404N
Issue of Date: July 18, 2003

Support Unit 6 – EAR MIC (JE TECH)

FCC ID	: N/A
Model Name	: N/A
Serial No.	: N/A
Manufacturer	: JE TECH
Power Supply Type	: N/A
Power Cord	: N/A
Data Cable	: Non-Shielded, 1.0m

Support Unit 7 – MONITOR (E-RAE)

FCC ID	: OIOELM-150A
Model Name	: ELM-150A
Serial No.	: N/A
Manufacturer	: E-RAE Electronic Industrial Co., Ltd.
Power Supply Type	: Switching, DC12V / 3.0A of AC/DC Adapter
Power Cord	: Non-shielded, Detachable: 1.2m
Data Port	: RGB IN: 1, AUDIO IN: 1, AUDIO OUT: 1

5. TEST RESULTS

5.1 Summary of Test Results


This equipment is Power Supply system from DC12V of AC/DC Adapter, The Conducted Test data is AC/DC Adapter Power Test data

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.


Test Rule Parts	Measurement Required	Result
15.107	Conducted Emissions Measurement	Passed by – 9.00 dB
15.109	Radiated Emissions Measurement	Passed by – 3.01 dB
15.33 (b) (1)	Radiated Emissions Measurement	No signal Detected

The data collected shows that the GEMPACK CO., LTD., 17" Web Base Terminal, TC7730 complies with technical requirements of above rules part 15.107 and 15.109 Class B Limits and 15.33 (b) (1)

The equipment is modified, mechanical or circuits to improve EMI status during a measurement.
EMI suppression device(s) was added and/or modified during testing.

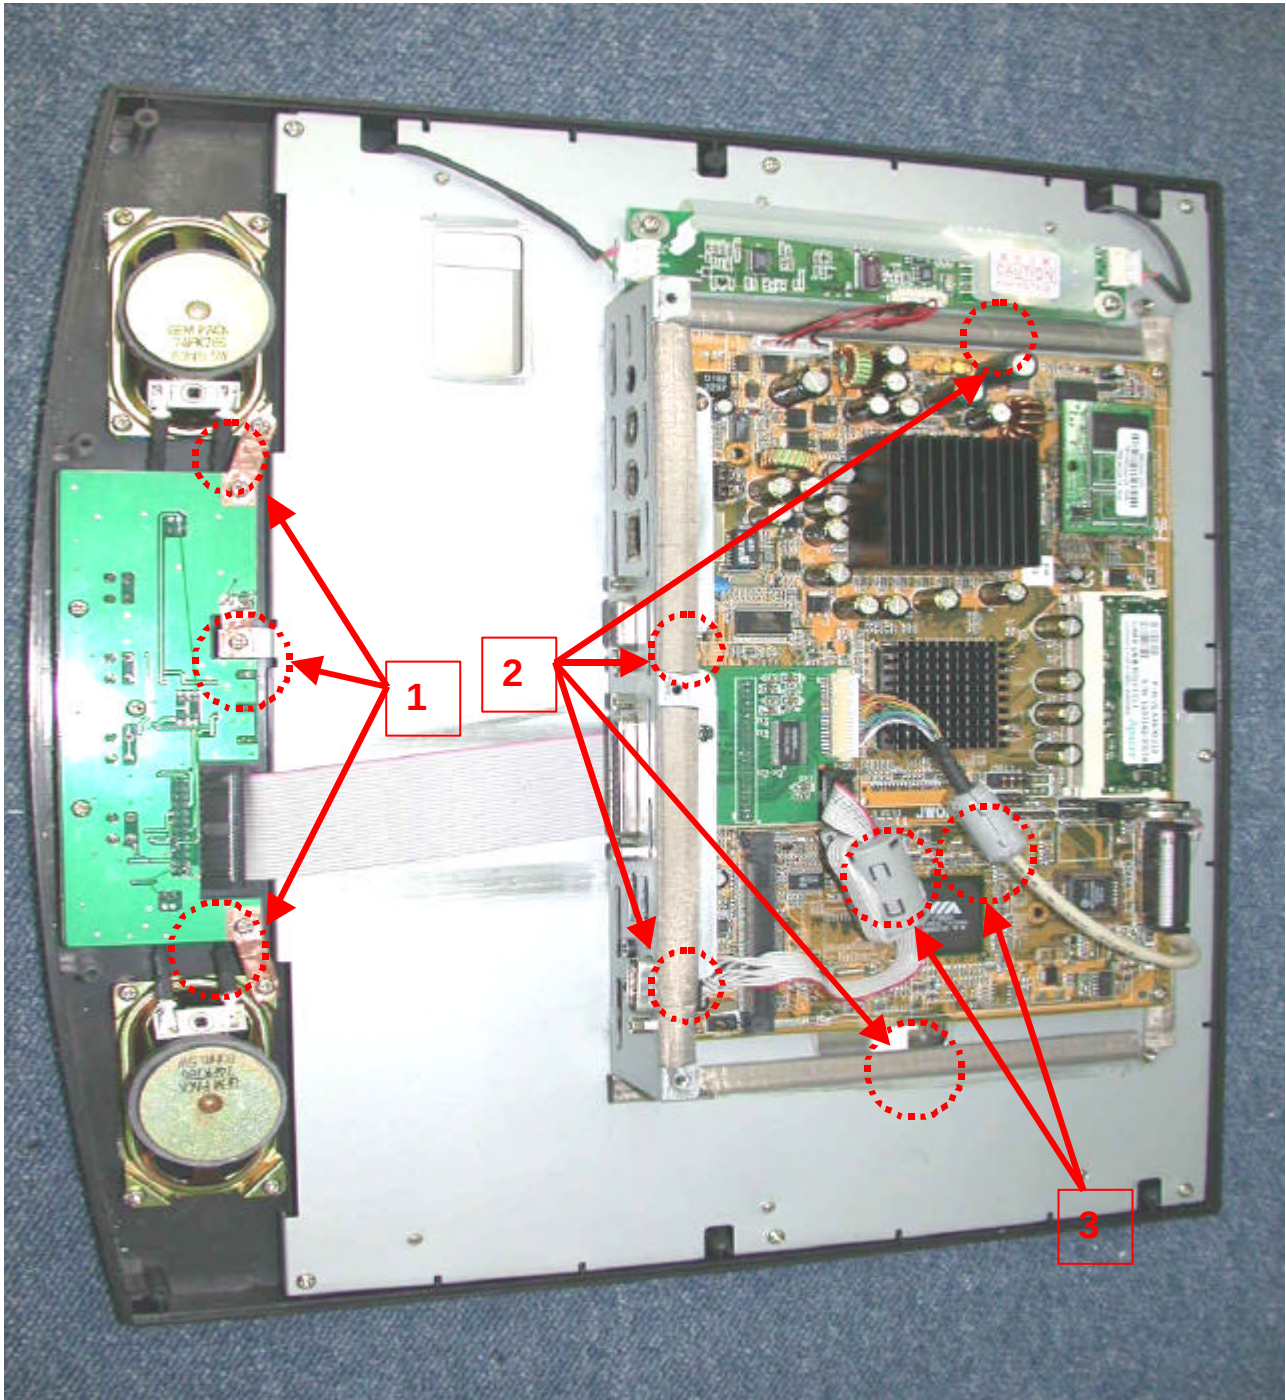

1. Ground added in front keyboard
2. EMI Gasket added in main metal chassis
3. Ferrite core added in RS-232 & LCD panel connector cable

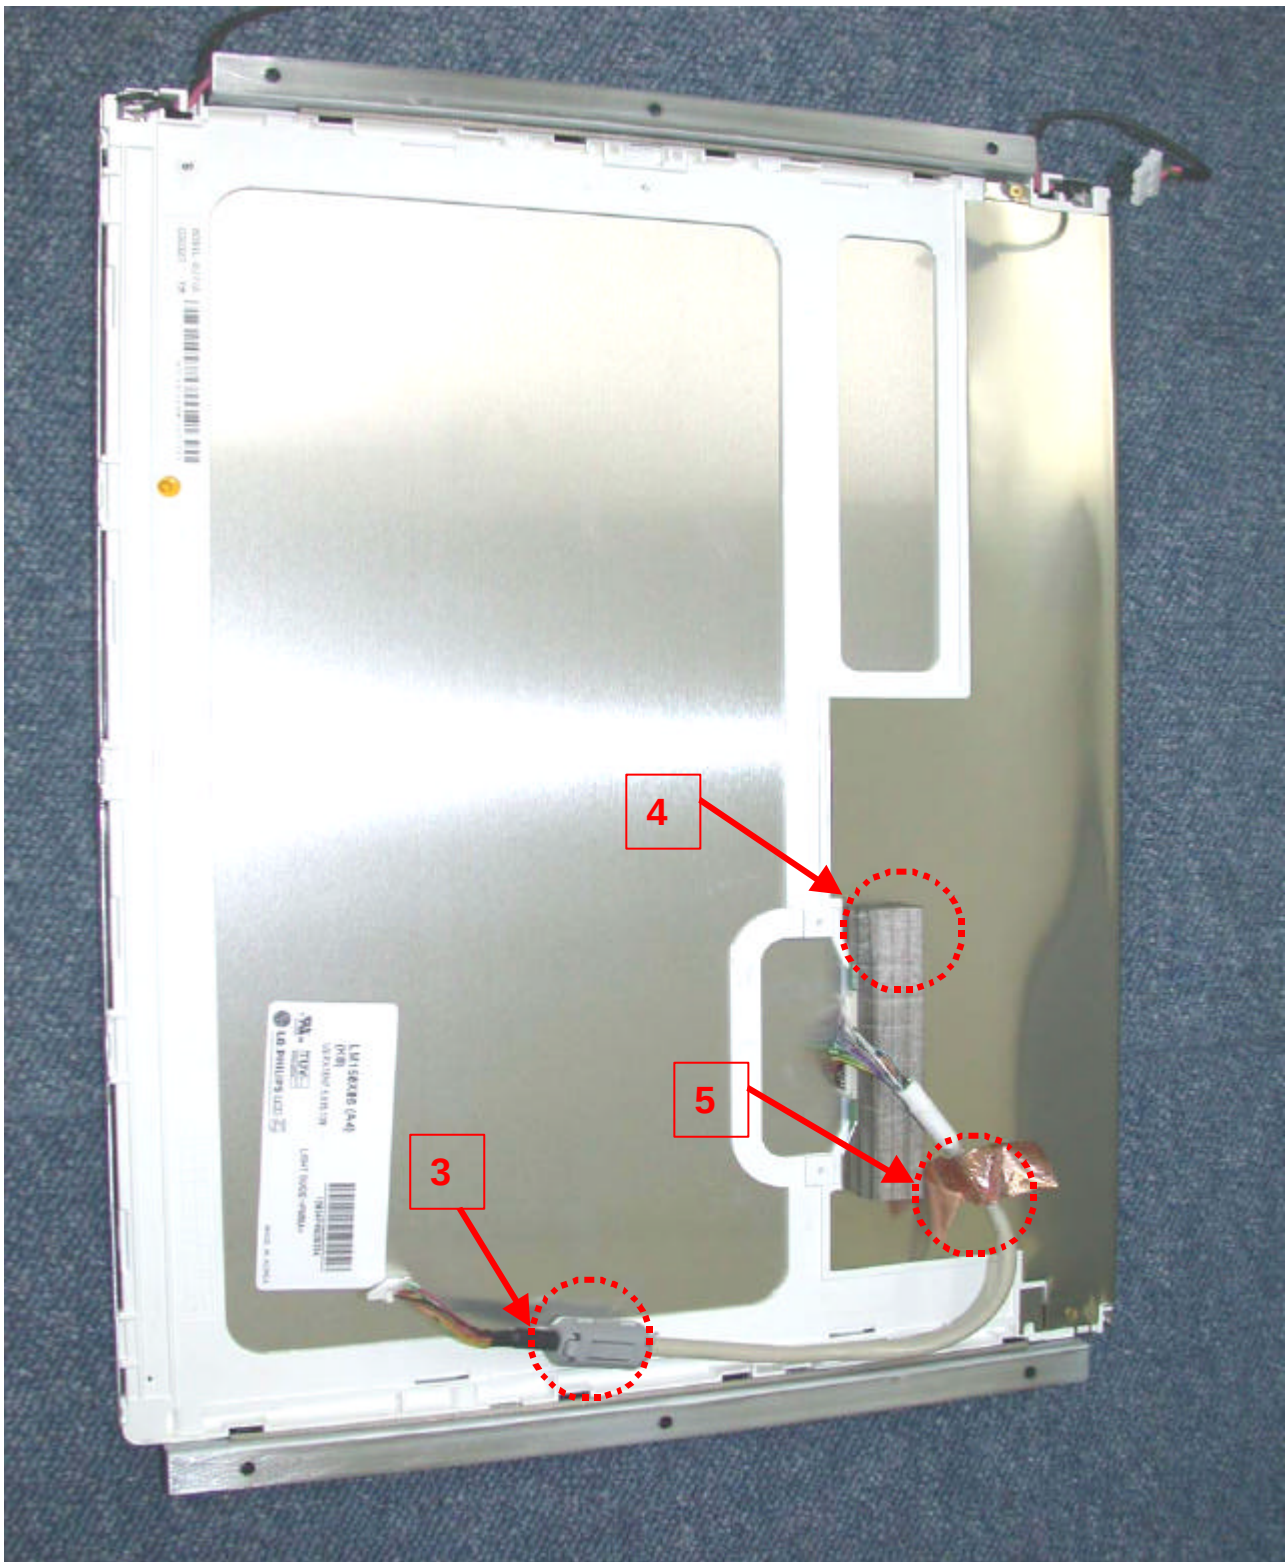

- 4. EMI Gasket added in LCD Panel
- 5. Ground added in LCD Panel connector cable with copper tape.

5. TEST RESULTS

5.2 Conducted Emissions Measurement

EUT	17" Web Base Terminal / TC7730 (SN:N/A)
Limit apply to	15.107 Class B
Test Date	July 16, 2003
Operating Condition	Ping Test mode
Environment Condition	Humidity Level : 43 %RH, Temperature : 23
Result	Passed by 9.0dB

Conducted Emission Test Data

The following table shows the highest levels of conducted emissions on both polarization of live and neutral line.

Detector mode : CISPR Quasi-Peak mode (6dB Bandwidth : 9 KHz)

Frequency [MHz]	Reading [dB μ V]		Phase (*H/**N)	Limit [dB μ V]		Margin [dB]	
	Quasi-peak	Average		Quasi-peak	Average	Q.Peak	Average
0.181	50.55	36.02	H	64.44	54.44	13.89	18.42
0.349	48.12	36.15	H	58.99	48.99	10.87	12.84
0.751	42.42	37.00	H	56.0	46.0	13.58	9.00
3.570	35.35	-	H			20.65	-
4.480	38.42	-	N			17.58	-
7.050	38.82	-	H	60.0	50.0	21.18	-
9.040	39.42	-	H			20.58	-
20.06	28.40	-	N			31.60	-

NOTES :



- * H : HOT Line , **N : Neutral Line
- Margin value = Limit - Reading
- Measurement were performed at the AC/DC Adapter Power Inlet in the frequency band of 150kHz ~ 30MHz according to the FCC Part 15.107 Class B
- If the Reading Quasi-Peak value is bellowed the Average Limit, Do not test Average Mode.



Test Engineer : C. S. Kim



5. TEST RESULTS

Line: HOT Line

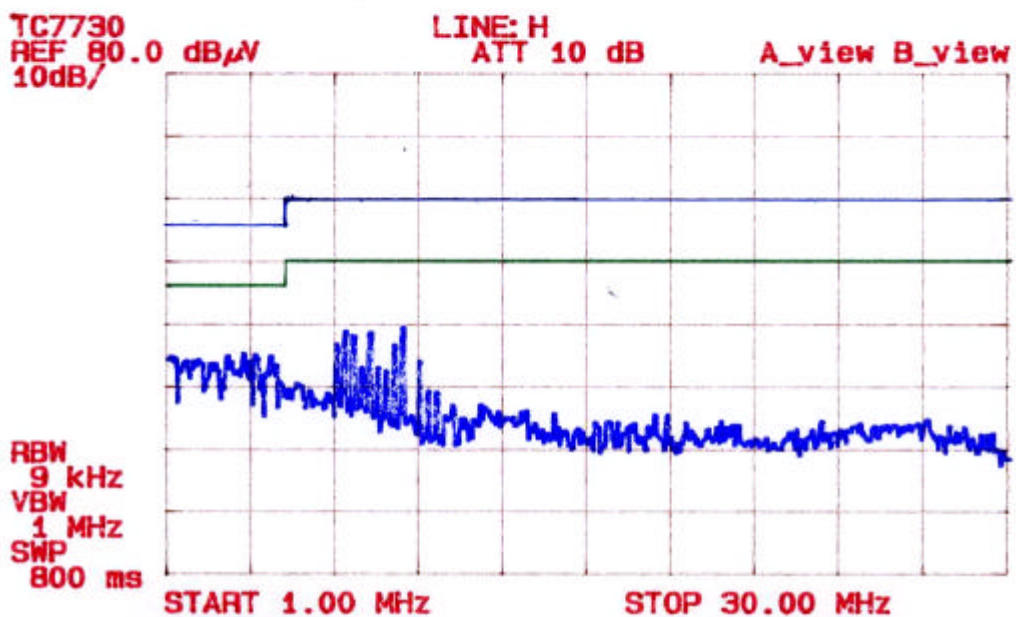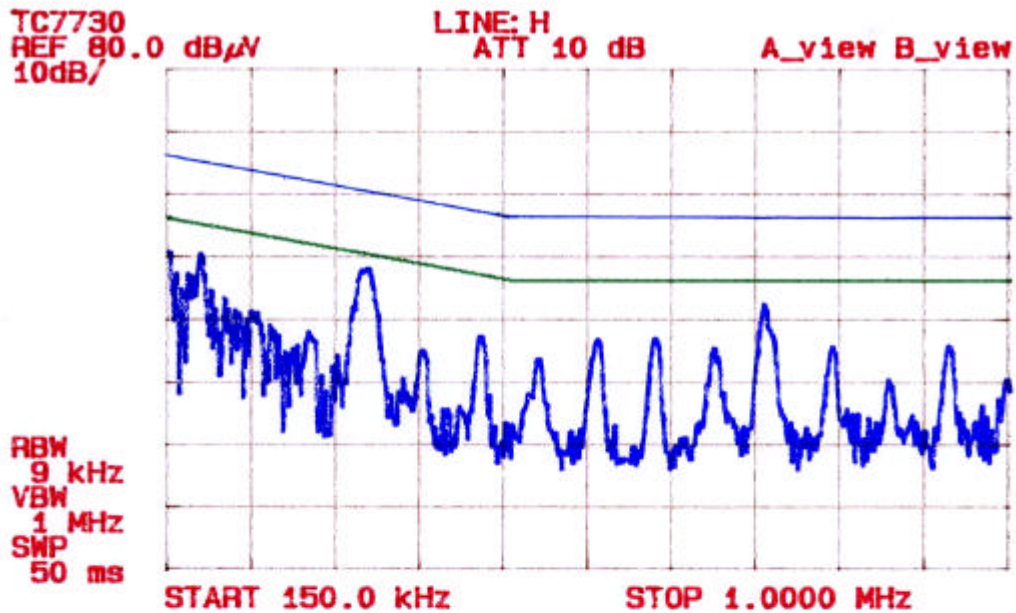

5. TEST RESULTS

Line: Neutral Line

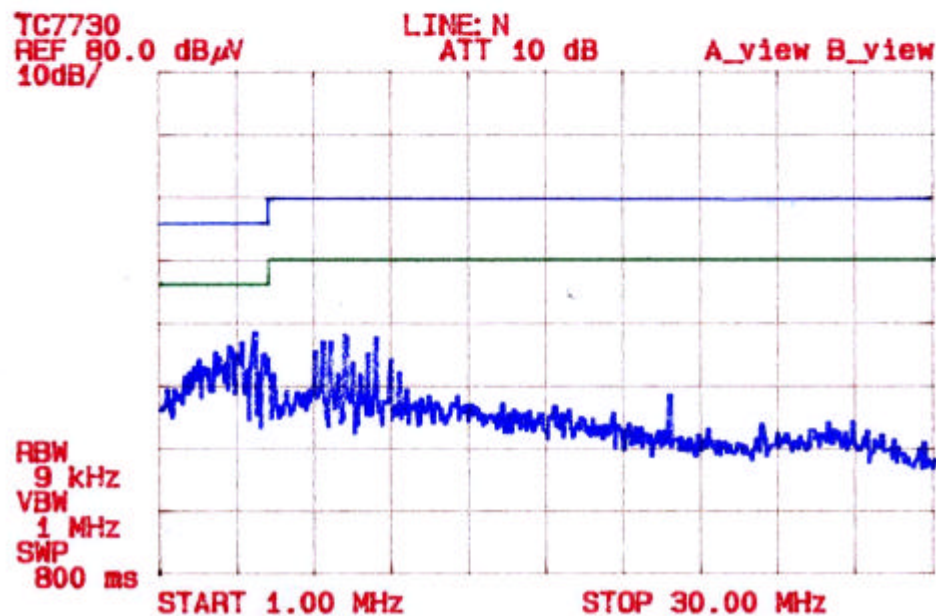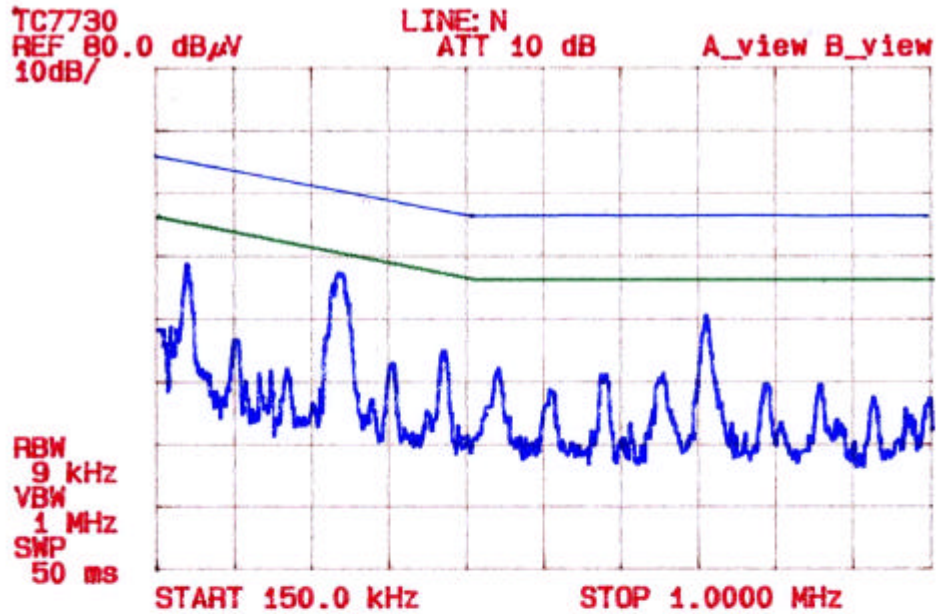

5. TEST RESULTS

5.3 Radiated Emissions Measurement

EUT	17" Web Base Terminal / TC7730 (SN:N/A)
Limit apply to	15.109, Class B
Test Date	July 16, 2003
Operating Condition	Ping Test mode
Environment Condition	Humidity Level : 48 %RH, Temperature : 29
Result	Passed by 3.01 dB

Radiated Emission Test Data

The following table shows the highest levels of radiated emissions on both polarization of horizontal and vertical.

Detector mode : CISPR Quasi-Peak mode (6dB Bandwidth : 120 kHz)

Measurement Distance : 10 meters

Frequency [MHz]	Reading [dB μ V]	Polarization (*H/**V)	Ant. Factor [dB]	Cable Loss [dB]	Emission Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
49.75	15.48	V	9.71	1.80	26.99	30.0	3.01
134.10	12.94	V	11.13	2.88	26.95		3.05
166.40	10.71	V	11.36	3.36	25.43		4.57
209.75	12.83	H	9.38	4.00	26.21		3.79
214.75	12.54	H	9.59	4.00	26.13		3.87
232.85	19.26	H	10.40	4.03	33.69	37.0	3.31
268.13	16.63	H	11.76	4.38	32.77		4.23
299.35	14.92	H	12.82	4.59	32.33		4.67
324.68	14.80	H	13.29	4.70	32.79		4.21
399.15	14.12	H	14.46	5.40	33.98		3.02

NOTES :

- * H : Horizontal polarization , ** V : Vertical polarization
- Emission Level = Reading + Antenna factor + Cable loss
- Margin value = Limit - Emission Level
- The measurement was performed for the frequency range 30MHz ~ 1000MHz according to the CISPR 22 Class B



Test Engineer : C. S. Kim

5. TEST RESULTS

5.4 Radiated Emissions Measurement

EUT	17" Web Base Terminal / TC7730 (SN:N/A)
Limit apply to	15.33(b) (1)
Test Date	July 17, 2003
Operating Condition	Ping Test mode
Environment Condition	Humidity Level : 48 %RH, Temperature : 29
Result	Passed

Radiated Emission Test Data

The following table shows the highest levels of radiated emissions on both polarization of horizontal and vertical.

Detector mode : Peak mode (Resolution Bandwidth : 1 MHz)

Measurement Distance : 3 meters

	Frequency [MHz]	Reading [dBμV]	Polarization (*H/**V)	Ant. Factor [dB]	Cable Loss [dB]	Emission Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]
Fundamental	533	-	-	-	-	-	-	-
2th Harmonic	1066	-	-	-	-	-	-	-
3th Harmonic	1599	No signal Detected						-
4th Harmonic	2132							-
5th Harmonic	2665	-	-	-	-	-	-	-

NOTES :

1. * H : Horizontal polarization , ** V : Vertical polarization
2. Emission Level = Reading + Antenna factor + Cable loss
3. Margin value = Limit - Emission Level
4. The measurement was performed for the frequency range according to the 15.33 (b) (1)



Test Engineer : C. S. Kim

6. SAMPLE CALCULATION

Sample Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

$$\text{dB}(\mu\text{V}/\text{m}) = 20 \log_{10} (\mu\text{V} / \text{m}) : \text{Equation 1}$$

$$\text{dB}\mu\text{V} = \text{dBm} + 107 : \text{Equation 2}$$

Example 1 : @ 0.751 MHz

Class B Limit	=	199.53 uV = 46.0 dBuV
Reading	=	37.0 dBuV
Convert to uV	=	70.79 uV
Margin	=	37.0 – 46.0 = - 9.00
	=	-9.00 dB below Limit

Example 2 : @ 49.75 MHz

Class B Limit	=	31.62 uV = 30.0 dBuV/m
Reading	=	15.48 dBuV
Antenna Factor + Cable Loss	=	11.51 dB
Total	=	26.99 dBuV/m
Margin	=	26.99 – 30.0 = - 3.01
	=	- 3.01 dB below Limit

7. TEST EQUIPMENT LIST

List of Test Equipments Used for Measurements

	Test Equipment	Model	Mfg.	Serial No.	Cal. Date
☒	Spectrum Analyzer	R3261A	Advantest	21720033	02-10-21
☒	Receiver	ESVS 10	R & S	835165/001	03-03-21
☒	Receiver	ESHS30	R & S	84190/002	03-01-24
☒	Spectrum Analyzer	E7402A	HP	US39110107	03-05-21
☒	LISN	3825/2	EMCO	9208-1995	02-12-27
☒	LISN	3825/2	EMCO	9006-1669	03-01-10
☒	Preamplifier	HP8447D	HP	2944A07626	03-01-10
☐	Preamplifier	HP 8347A	HP	2834A00544	03-05-23
☐	LogBicon Antenna	VULB9160	Schwarz Beck	3082	03-06-19
☒	LogBicon Antenna	VULB9165	Schwarz Beck	2023	03-05-28
☒	Dipole Antenna	VHAP	Schwarz Beck	964	03-05-09
☐	Dipole Antenna	VHAP	Schwarz Beck	965	03-07-03
☒	Dipole Antenna	UHAP	Schwarz Beck	949	03-07-03
☐	Dipole Antenna	UHAP	Schwarz Beck	950	03-05-09
☐	Broad-band Horn Antenna	3115	EMCO	9809-2334	02-09-20
☐	Magnetic Loop Antenna	6502	EMCO	9810-2111	02-12-11
☒	Turn-Table	DETT-03	Daeil EMC	-	N/A
☒	Antenna Master	DEAM-03	Daeil EMC	-	N/A
☒	Plotter	7440A	H.P	2725A 75722	N/A
☒	Chamber	DTEC01	DAETONG	-	N/A
☒	Thermo Hygrograph	3-3122	ISUZU	3312201	03-01-10
☒	BaroMeter	-	Regulus	-	-