

Electromagnetic Emission

FCC MEASUREMENT REPORT

CERTIFICATION OF COMPLIANCE


FCC Part 15 Certification Measurement

PRODUCT : Set-top Box
MODEL/Serial No. : DMS2444UHDW / NONE
FCC ID : PFNDMS2444UHDW
APPLICANT : Digital Multimedia Technology Co., Ltd.
2nd Fl., 926 Gwanyang-Dong, Dongan-Gu, Anyang-Si,
Gyeonggi-Do, 431-060 Korea
Attn.: Kee-Chul Lee / General Manager
MANUFACTURER : Hengdi Digital Technology (Shen Zhen) Co., Ltd
A.B Building, Xin Shi Qiao Guanjie Industrial Park, Guihua Community,
Guanlan Street, Bao'an District, Shenzhen City, Guangdong Province,
China, 518-110
FCC CLASSIFICATION : DTS (Part 15 Digital Transmission System)
TYPE OF MODULATION : DSSS
FREQUENCY CHANNEL : Zigbee: 2 425 MHz, 2 450 MHz, 2475 MHz (3 Ch)
ANTENNA TYPE : Internal Antenna (Integral)
ANTENNA GAIN : -2.30 dBi max
RF POWER : 0.736 mW
RULE PART(S) : FCC Part 15 Subpart C
FCC PROCEDURE : ANSI C63.10-2009
TEST REPORT No. : ETLT150527.0031
DATES OF TEST : June 08, 2015 to June 11, 2015
REPORT ISSUE DATE : July 07, 2015
TEST LABORATORY : ETL Inc. (FCC Designation Number : KR0022)

The Set-top Box, Model DMS2444UHDW has been tested in accordance with the measurement procedures specified in ANSI C63.10-2009 at the ETL Test Laboratory and has been shown to be complied with the electromagnetic radiated emission limits specified in FCC Rule Part15 Subpart C section 15.247.

I attest to the accuracy of data. All measurement herein was performed by me or was made under my supervision and is correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Prepared by: 
Seok Lyong, Choi (Test Engineer)
July 07, 2015

Reviewed by: 
Kug Kyoung, Yoon (Chief Engineer)
July 07, 2015

ETL Inc.

Head office: #371-51, Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea
Open site: #499-1, Sagot-ri, Seosin-myeon, Hwaseong-si, Gyeonggi-do, 445-882, Korea
Tel: 82-2-858-0786 Fax: 82-2-858-0788

*The test report merely corresponds to the test sample(s).
This report shall not be reproduced, in whole or in part without the written approval of ETL Inc.*

Table of Contents

FCC Measurement Report

- 1. Introduction**
- 2. Product Information**
- 3. Description of Tests**
- 4. Test Condition**
- 5. Test Results**
 - 5.1 Summary of Test Results**
 - 5.2 6 dB Bandwidth**
 - 5.3 Maximum Peak Output Power**
 - 5.4 Bandwidth of Frequency Band Edges**
 - 5.5 Power Spectral Density**
 - 5.6 Spurious Emissions**
 - 5.7 Conducted Emissions Test**
 - 5.8 Radio Frequency Exposure**
- 6. Sample Calculation**
- 7. List of test Equipment used for Measurement**

Appendix A. FCC ID Label and Location

Appendix B. Test Setup Photographs

Appendix C. External Photographs

Appendix D. Internal Photographs

Appendix E. Block Diagram

Appendix F. Circuit Diagram

Appendix G. User Manual

Appendix H. Operational Description

Appendix I. Antenna Requirement

Appendix J. Radio Frequency Exposure

FCC MEASUREMENT REPORT

Scope – Measurement and determination of electromagnetic emission (EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)

General Information

Applicant Name	: Digital Multimedia Technology Co., Ltd.
Address	: 2nd Fl., 926 Gwanyang-Dong, Dongan-Gu, Anyang-Si, Gyeonggi-Do, 431-060 Korea
Attention	: Kee-Chul Lee / General Manager

- **EUT Type** : Set-top Box
- **Model Number** : DMS2444UHDW
- **S/N** : NONE
- **Modulation Technique** : DSSS
- **Frequency Channel** : Zigbee: 2 425 MHz, 2 450 MHz, 2475 MHz (3 Ch)
- **Antenna Type** : Internal Antenna (Integral)
- **Antenna Gain** : -2.30 dBi max
- **RF Power** : 0.736 mW
- **Environmental of Tests** : Temperature: (29.3 ± 7.8) °C
Humidity: (42 ± 6) % R.H.
Atmospheric Pressure: (101.0 ± 0.6) kPa
- **FCC Rule Part(s)** : FCC Part 15 Subpart C
- **Test Procedure** : ANSI C63.10-2009
- **FCC Classification** : DTS (Part 15 Digital Transmission System)
- **Place of Tests** : ETL Inc. Testing Lab. (FCC Designation Number : KR0022)

Radiated Emission test 1;
#499-1, Sagot-ri, Seosin-myeon, Hwaseong-si,
Gyeonggi-do, 445-882, Korea

Radiated Emission test 2 and Conducted Emission test;
#371-51, Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea

- **Test Report No.** : ETLT150527.0031

1. INTRODUCTION

The measurement test for radiated and conducted emission test was conducted at the ETL Inc. The site is constructed in conformance with the requirements of the ANSI C63.10-2009 and CISPR Publication 16. The ETL has site descriptions on file with the FCC for 3 m and 10 m site configurations. Detailed description of test facility was found to be in compliance with FCC Rules according to the ANSI C63.10-2009 and registered to the Federal Communications Commission (FCC Designation Number : KR0022).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.10-2009) was used in determining radiated and conducted emissions from the Digital Multimedia Technology Co., Ltd. Model: DMS2444UHDW

2. PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the Set-top Box (model: DMS2444UHDW).

The model DMS2444UHDW is basic model that was tested.

The EUT has four types of AC/DC Adapter. And each has been tested.

(Model name of AC/DC Adapter: EDF0500150A1BB, EDF0500150A1BB-3, EDF0500150A1BA-3, EDF0500150A1BA)

AC/DC Adapter types may be used the one of four type selected by manufacturer.

Model name of AC/DC Adapter	Adapter View		
EDF0500150A1BB			
EDF0500150A1BB-3			
EDF0500150A1BA-3			
EDF0500150A1BA			

2.2 General Specification

Favorite channel, Parental Lock
Automatic search for newly added transponder (Network Auto Search)
Stores up to 5 000 channels
Plug-and-play data transfer system (DSR to DSR)
Timer function, automatically turns On/Off by setting function (daily, weekly, monthly and one time)
Automatic reserved channel moving system
Provide Electronic program Guide (EPG)
PAL/NTSC automatically conversion
Last channel automatically saving
Support RF4CE application
RF4CE Frequency range: 2 425 MHz ~ 2 475 MHz
Support for various video output: HDMI, RF 3/4 Mod.
HDMI 1.3a with HDCP 1.1
US3/4 Channel
MPEG-2 / MPEG-4 Part 10 / H.264
Video Display format with NTSC/480p/576p/720p/1 080i
Dolby Digital AC3
RF input frequency range: 105 MHz to 1 002 MHz
High Internal Frequency: X-tal → 54 MHz

3. DESCRIPTION OF TESTS

The tests documented in this report were performed in accordance with ANSI C63.10-2009 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

3.1 Radiated Emission Measurement

Radiated emission measurements were made in accordance with § 13 in ANSI C63.10-2009 "Measurement of Intentional radiators". The measurements were performed over the frequency range of 30 MHz to 40 GHz using antenna as the input transducer to a Spectrum analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak, Quasi-peak, Average" within a bandwidth of 120 kHz and above 1 GHz is 1 MHz.

Preliminary measurements were made at 3 m using broadband antennas, and spectrum analyzer to determine the frequency producing the maximum emission in shielded room. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 MHz to 1 000 MHz using Log-Bicon antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used. Final measurements were made open site or SVSWR chamber at 3 m. The test equipment was placed on a styrofoam table. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8 m high nonmetallic 1.0 m x 1.5 m table. The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 m to 4 m and stopped at the azimuth or height producing the maximum emission.

Varying the mode of operating frequencies of the EUT maximized each emission. The system was tested in all the three orthogonal planes and changing the polarity of the antenna. The worst-case emissions are recorded in the data tables. If necessary, the radiated emission measurement could be performed at a closer distance to ensure higher accuracy and the results were extrapolated to the specified distance using an inverse linear distance extrapolation factor (20 dB/decade) as per section 15.31(f).

Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.

3.2 Conducted Emission Measurement

Conducted emissions measurements were made in accordance with section § 13 in ANSI C63.10-2009 "measurement of intentional radiators" The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50 Ω /50 μ H LISN as the input transducer to a Spectrum Analyzer or a Test Receiver. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 9 kHz or for "quasi-peak" within a bandwidth of 9 kHz.

The line-conducted emission test is conducted inside a shielded anechoic chamber room with 1 m x 1.5 m x 0.8 m wooden table which is placed 0.4 m away from the vertical wall and 1.5 m away from the side wall of the chamber room. Two LISN are bonded to the shielded room. The EUT is powered from the LISN and the support equipment is powered from the other LISN. Power to the LISNs are filtered by a noise cut power line filters. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the LISN. Non-inductive bundling to a 1 m length shortened all interconnecting cables more than 1 m. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the EMI Test Receiver to determine the frequency producing the maximum emission from the EUT. The frequency producing the maximum level was reexamined using to set Quasi-Peak mode by manual, after scanned by automatic Peak mode from 0.15 MHz to 30 MHz. The bandwidth of the spectrum analyzer was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission.

Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.

3.3 FCC Part 15.205 Restricted Bands of Operations

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.694 75 - 16.695 25	608 - 614	5.35 - 5.46
2.173 5 - 2.190 5	16.804 25 - 16.804 75	960 - 1 240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1 300 - 1 427	8.025 - 8.5
4.177 25 - 4.177 75	37.5 - 38.25	1 435 - 1 626.5	9.0 - 9.2
4.207 25 - 4.207 75	73 - 74.6	1 645.5 - 1 646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1 660 - 1 710	10.6 - 12.7
6.267 75 - 6.268 25	108 - 121.94	1 718.8 - 1 722.2	13.25 - 13.4
6.311 75 - 6.312 25	123 - 138	2 200 - 2 300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2 310 - 2 390	15.35 - 16.2
8.362 - 8.366	156.524 75 - 156.525 25	2 483.5 - 2 500	17.7 - 21.4
8.376 25 - 8.386 75	156.7 - 156.9	2 690 - 2 900	22.01 - 23.12
8.414 25 - 8.414 75	162.012 5 - 167.17	3 260 - 3 267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3 332 - 3 339	31.2 - 31.8
12.519 75 - 12.520 25	240 - 285	3 345.8 - 3 358	36.43 - 36.5
12.576 75 - 12.577 25	322 - 335.4	3 600 - 4 400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490 MHz - 0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1 000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1 000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.4 Antenna connection requirement

(1) According to §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

4. TEST CONDITION


4.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the following conditions and configurations were used.

4.2 Description of Test modes

Set-top Box that has the control software.

4.3 The setup drawing(s)

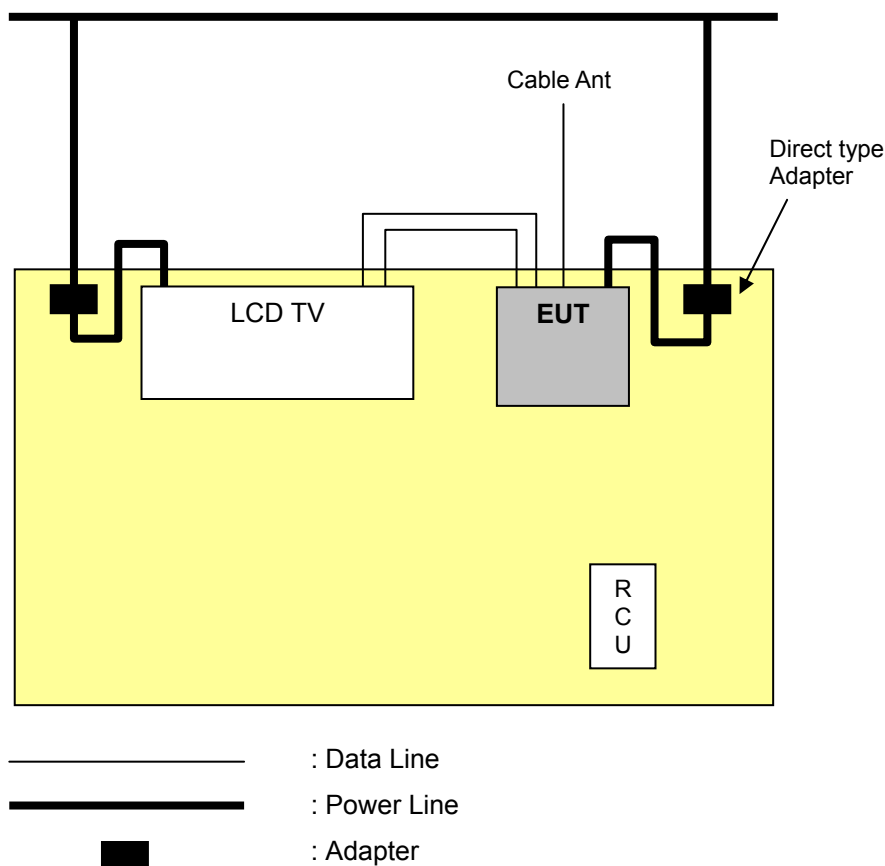

5. TEST RESULTS

5.1 Summary of Test Results

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.

47 CFR Part 15, Subpart C	Measurement Required	Result
15.247(a)(2)	6 dB Bandwidth	Pass
15.247(b)(3)	Maximum Peak Output Power	Pass
15.247(d)	Bandwidth of Frequency Band Edges	Pass
15.247(e)	Power Spectral Density	Pass
15.209(a)	Spurious Emissions	Pass
15.207	Conducted Emissions	Pass
15.203	Antenna connection requirement	Integral antenna which is permanently attached and cannot be replaced.
1.1307(b)(1)	RF Exposure	Pass

The data collected shows that the **Digital Multimedia Technology Co., Ltd. / Set-top Box / DMS2444UHDW** complied with technical requirements of above rules part 15.207, 209 and 15.247 Limits.

The equipment is not modified anything, mechanical or circuits to improve EMI status during a measurement. No EMI suppression device(s) was added and/or modified during testing.

5.2 6 dB Bandwidth

EUT	Set-top Box / DMS2444UHDW
Limit apply to	FCC Part 15.247(a)(2)
Test Date	June 08, 2015
Environmental of Test	(24.8 ± 0.3) °C, (46 ± 1) % R.H., (100.6 ± 0.0) kPa
Operating Condition	RF transmitting continuously during the tested.
Result	Passed

Limit

The maximum 6 dB bandwidth shall be at least 500 kHz.

Test Data

- Adapter: EDF0500150A1BB

Frequency [MHz]	6 dB Bandwidth [MHz]	Limit
2 425	1.590	> 500 kHz
2 450	1.598	
2 475	1.569	

- Adapter: EDF0500150A1BB-3

Frequency [MHz]	6 dB Bandwidth [MHz]	Limit
2 425	1.618	> 500 kHz
2 450	1.599	
2 475	1.596	

NOTES:

1. Measure frequency separation of relevant channel using spectrum analyzer.
2. RBW 100 kHz, VBW 300 kHz, Sweep time 1s.
3. Please see the measured plot in next page.

- Adpater: EDF0500150A1BA-3

Frequency [MHz]	6 dB Bandwidth [MHz]	Limit
2 425	1.618	> 500 kHz
2 450	1.609	
2 475	1.605	

- Adpater: EDF0500150A1BA

Frequency [MHz]	6 dB Bandwidth [MHz]	Limit
2 425	1.598	> 500 kHz
2 450	1.599	
2 475	1.598	


NOTES:

1. Measure frequency separation of relevant channel using spectrum analyzer.
2. RBW 100 kHz, VBW 300 kHz, Sweep time 1s.
3. Please see the measured plot in next page.


Plots of 6 dB Bandwidth

- Adapter: EDF0500150A1BB


[2 425 MHz]

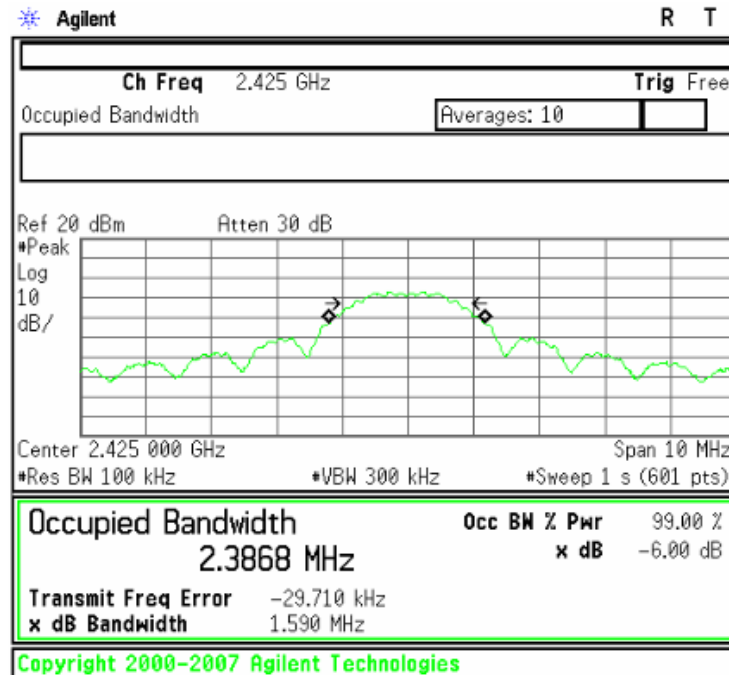

[2 450 MHz]

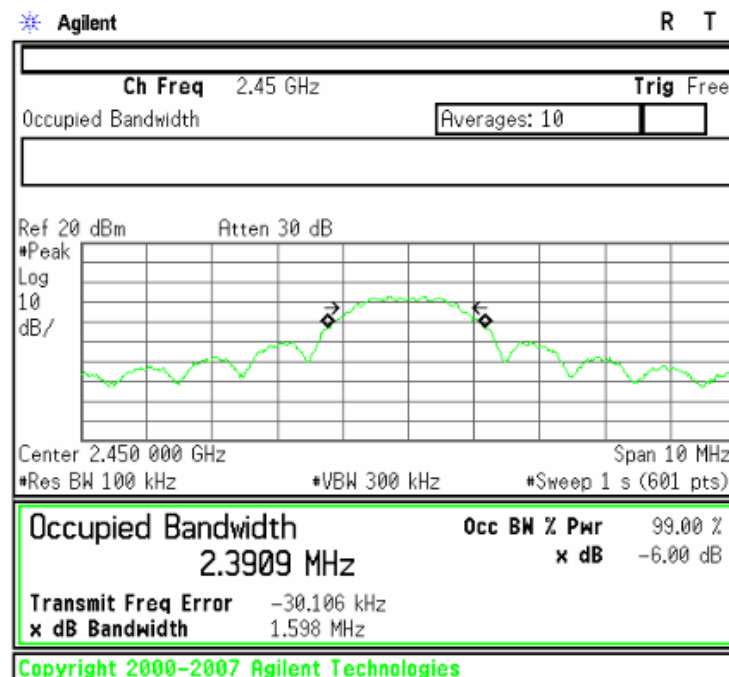


[2 475 MHz]

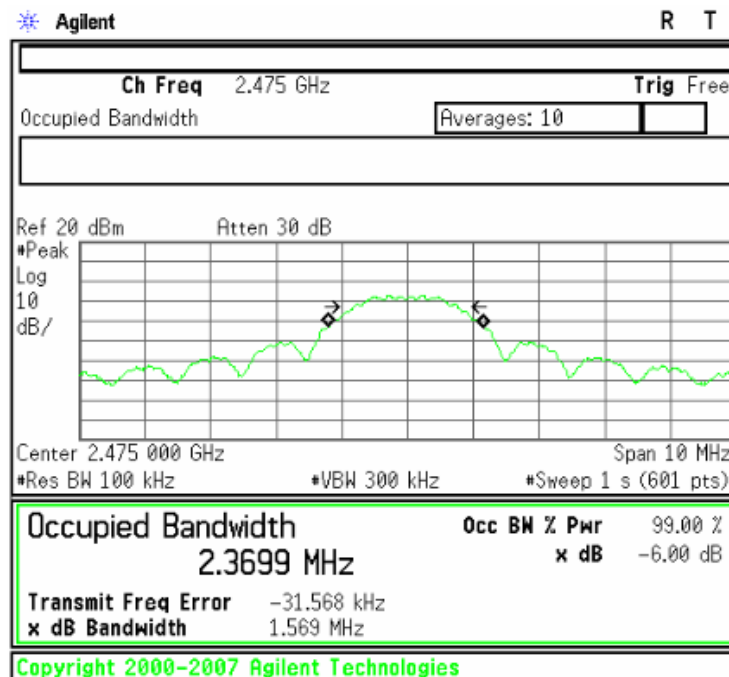


- Adapter: EDF0500150A1BB-3


[2 425 MHz]

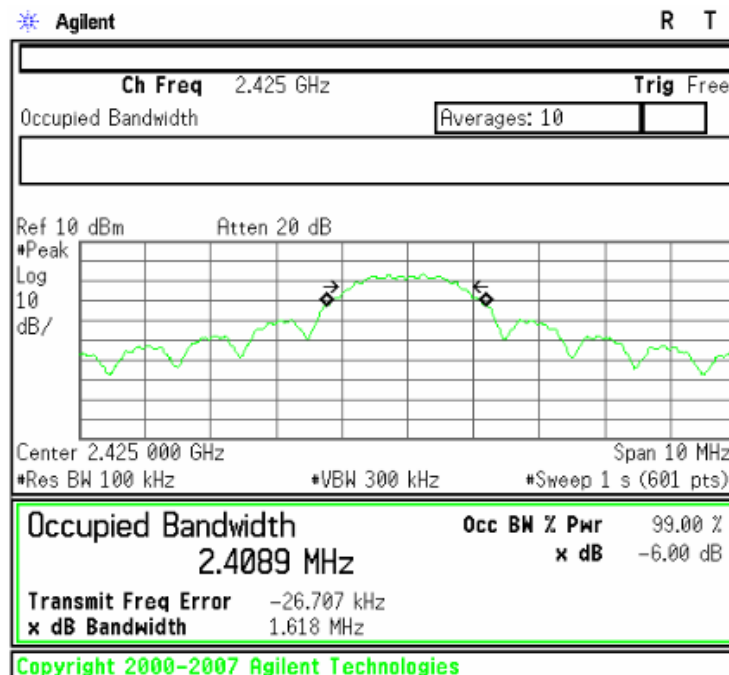

[2 450 MHz]

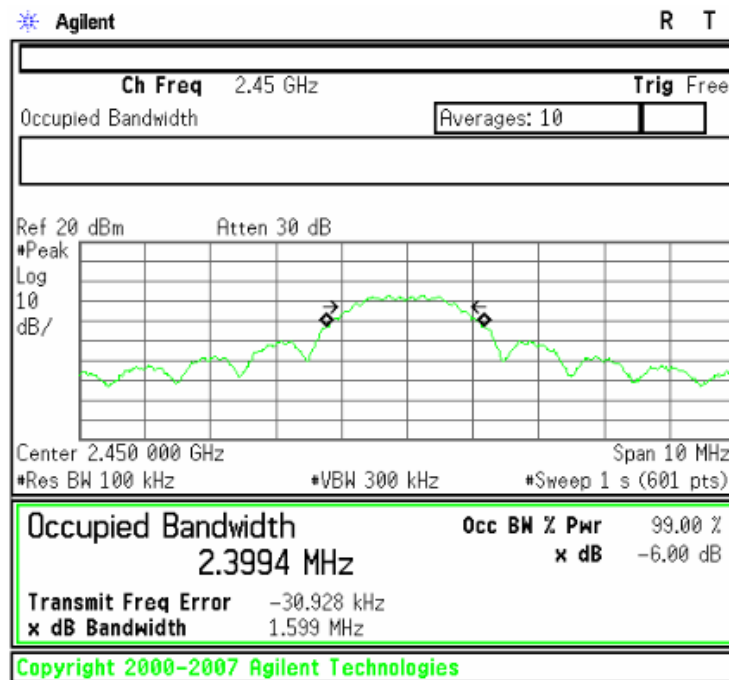


[2 475 MHz]

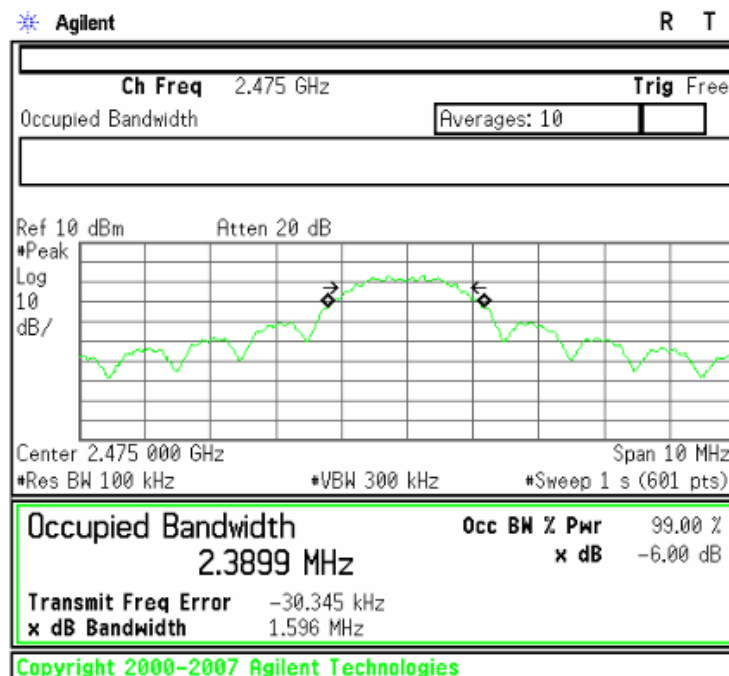


- Adapter: EDF0500150A1BA-3


[2 425 MHz]

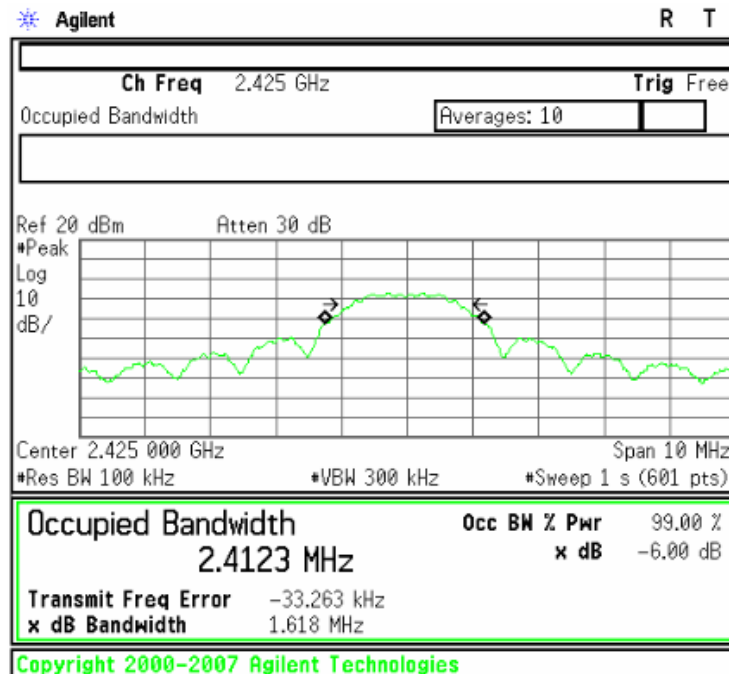

[2 450 MHz]

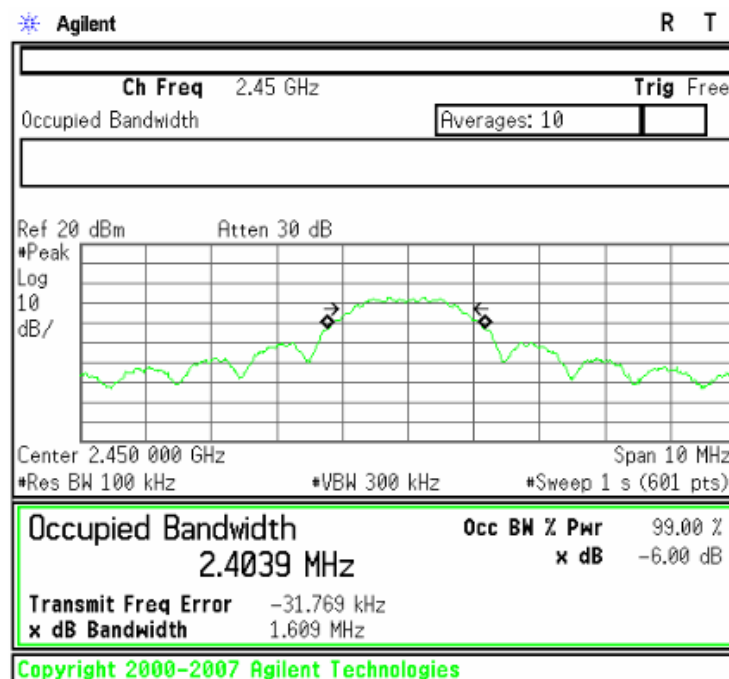


[2 475 MHz]

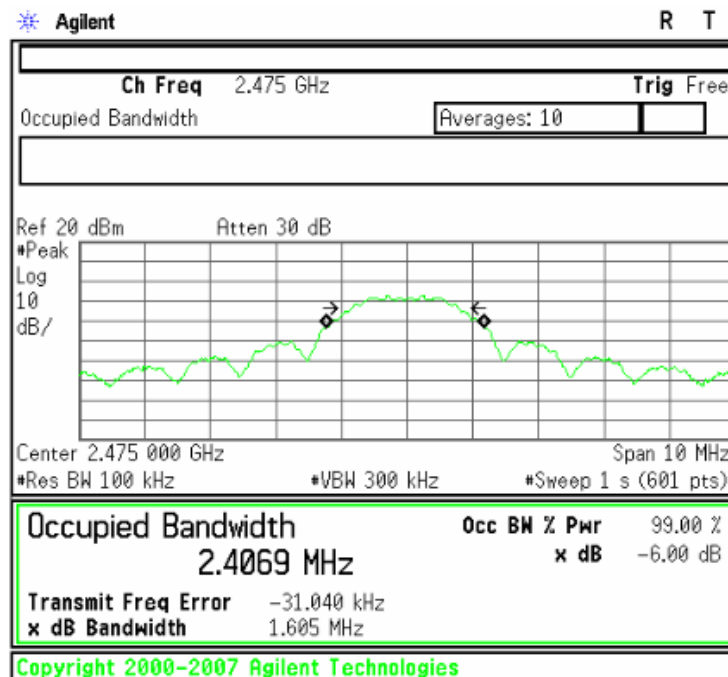


- Adapter: EDF0500150A1BA


[2 425 MHz]

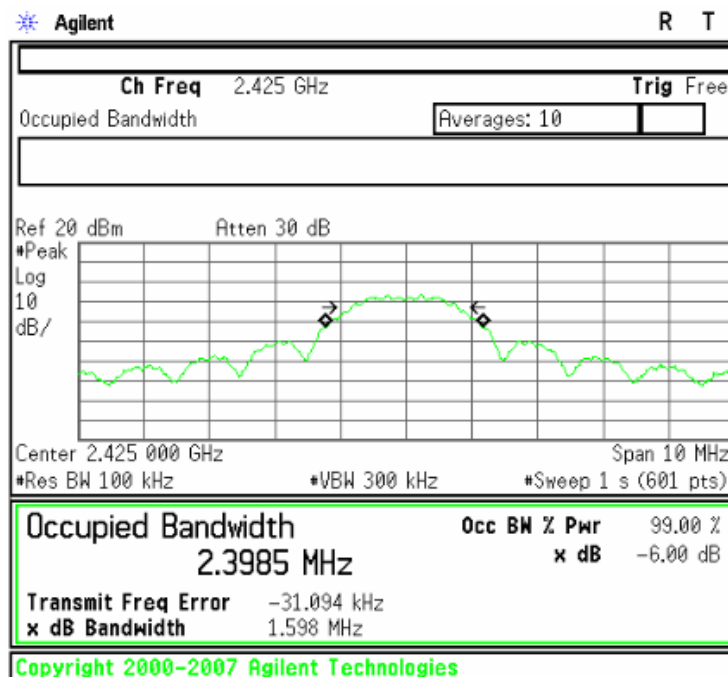

[2 450 MHz]

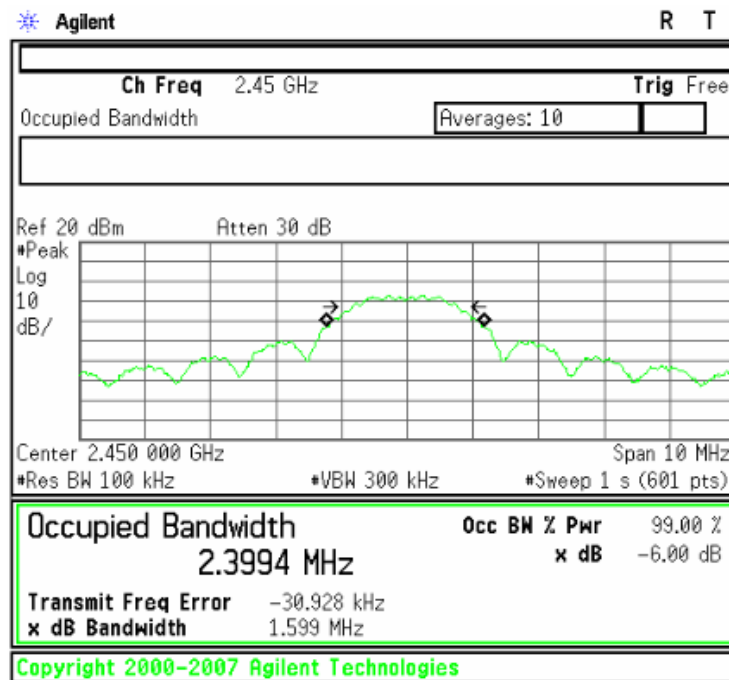

[2 475 MHz]

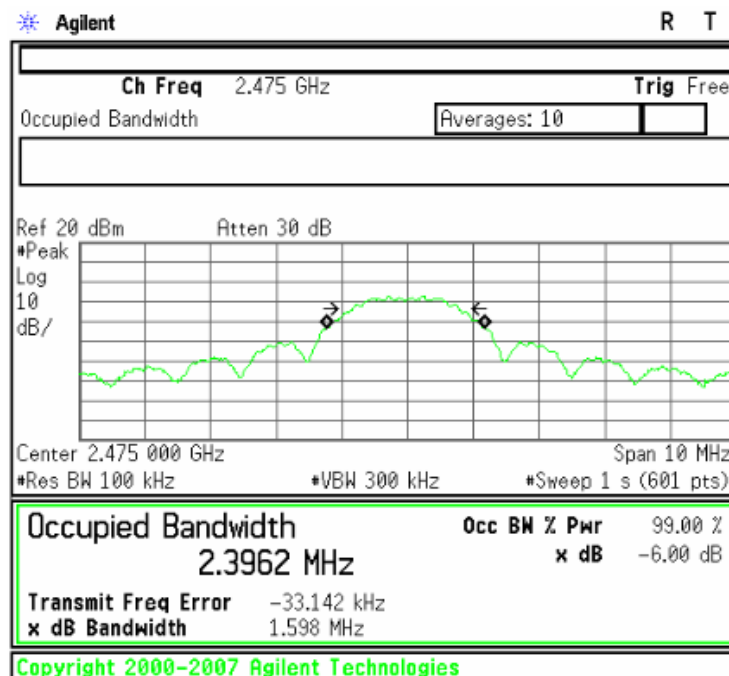

5.3 Maximum Peak Conducted Output Power

EUT	Set-top Box / DMS2444UHDW
Limit apply to	FCC Part 15.247(b)(3)
Test Date	June 08, 2015
Environmental of Test	(25.7 ± 0.2) °C, (42 ± 1) % R.H., (101.7 ± 0.0) kPa
Operating Condition	RF transmitting continuously during the tested.
Result	Passed

Limit

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

For frequency hopping systems operating in the 2 400.0 MHz - 2 483.5 MHz band: 1 Watt

Test Data

- Adpater: EDF0500150A1BB

Frequency [MHz]	Output Power [dBm]	Limit
2 425	-1.64	< 30.00 dBm (1 W)
2 450	-1.66	
2 475	-1.91	

- Adpater: EDF0500150A1BB-3

Frequency [MHz]	Output Power [dBm]	Limit
2 425	-1.33	< 30.00 dBm (1 W)
2 450	-1.80	
2 475	-2.01	

NOTES:

1. Measure conducted Channel power of relevant channel using spectrum analyzer.
2. RBW 1 MHz, VBW 8 MHz
3. Please see the measured plot in next page.

- Adapter: EDF0500150A1BA-3

Frequency [MHz]	Output Power [dBm]	Limit
2 425	-3.59	< 30.00 dBm (1 W)
2 450	-4.02	
2 475	-4.06	

- Adapter: EDF0500150A1BA

Frequency [MHz]	Output Power [dBm]	Limit
2 425	-3.70	< 30.00 dBm (1 W)
2 450	-3.82	
2 475	-4.06	


NOTES:

1. Measure conducted Channel power of relevant channel using spectrum analyzer.
2. RBW 1 MHz, VBW 8 MHz
3. Please see the measured plot in next page.


Plots of Maximum Peak Output Power Bandwidth

- Adapter: EDF0500150A1BB


[2 425 MHz]

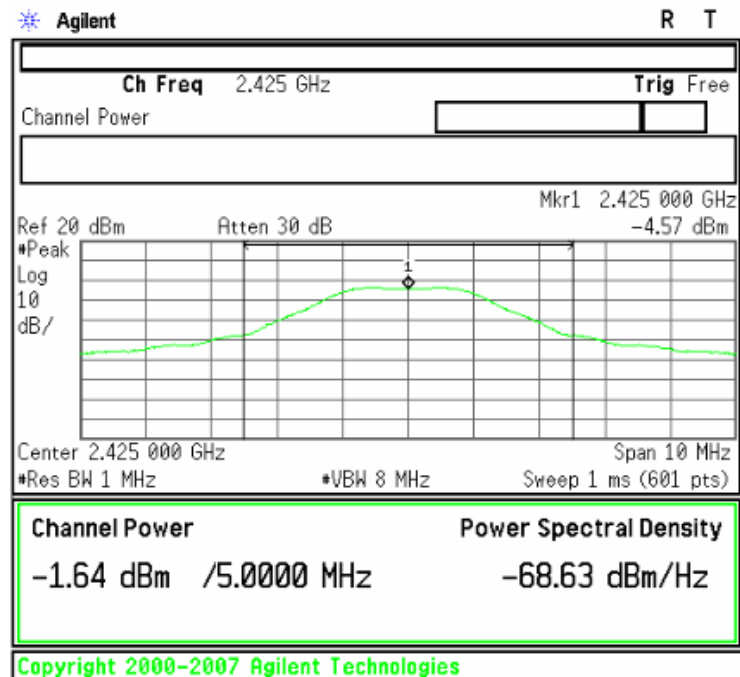

[2 450 MHz]

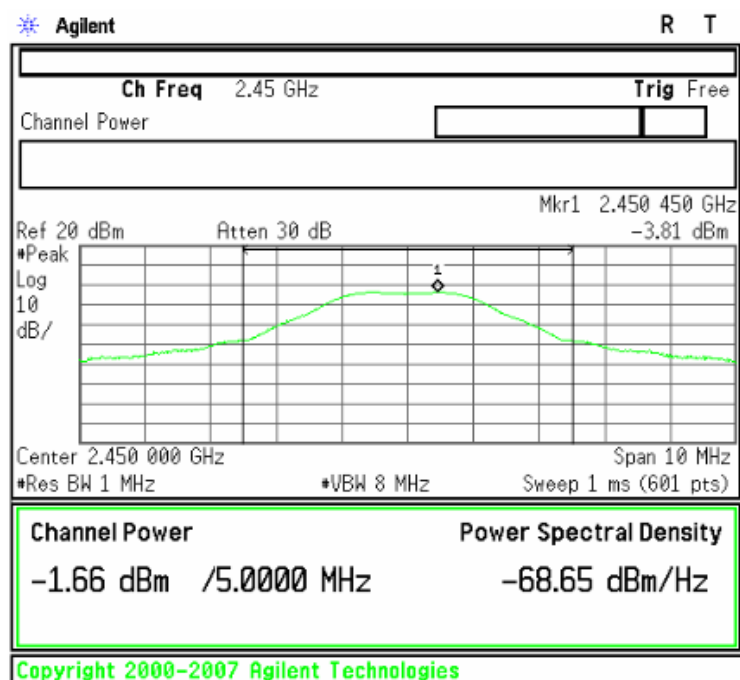


[2 475 MHz]

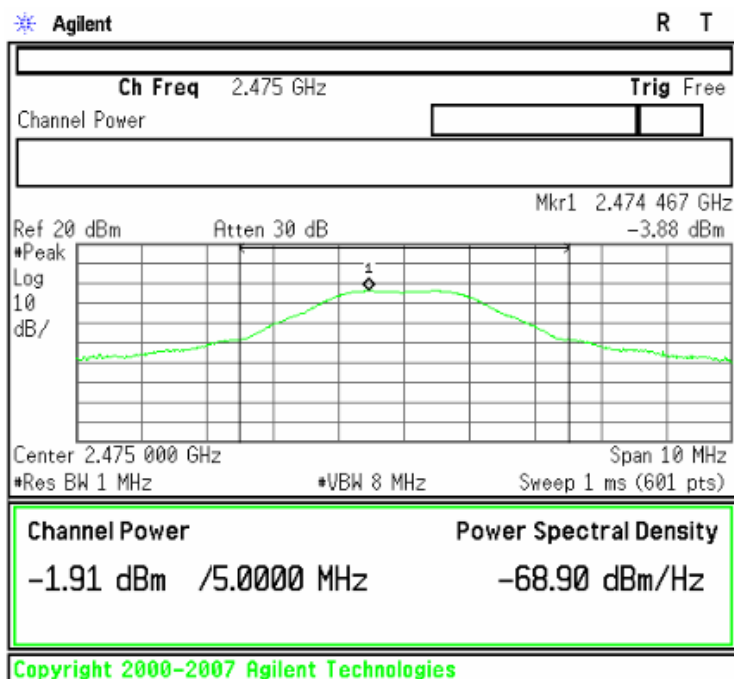


- Adapter: EDF0500150A1BB-3


[2 425 MHz]

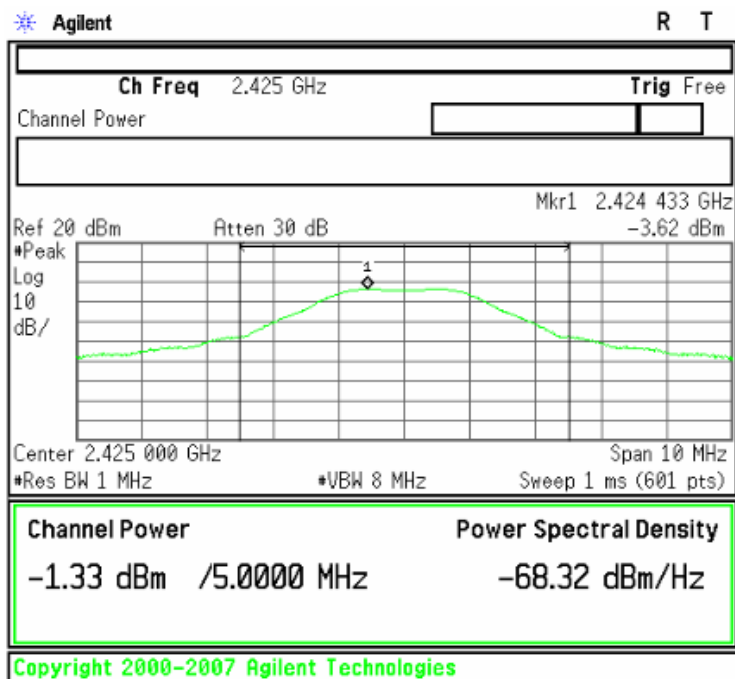

[2 450 MHz]

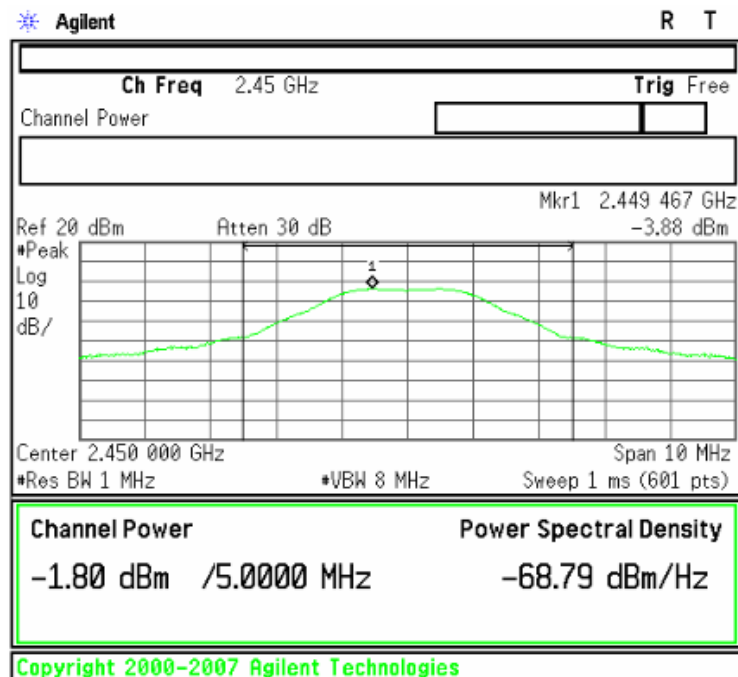


[2 475 MHz]

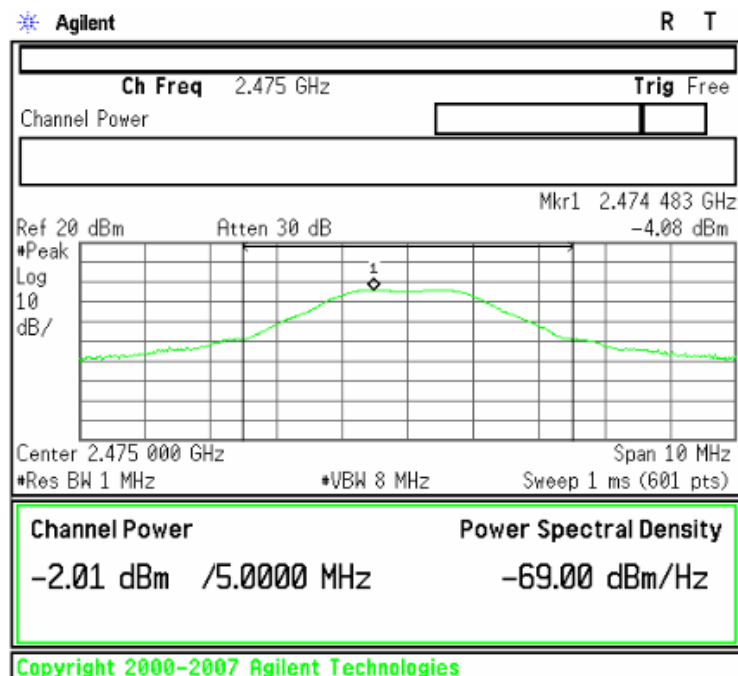


- Adapter: EDF0500150A1BA-3


[2 425 MHz]

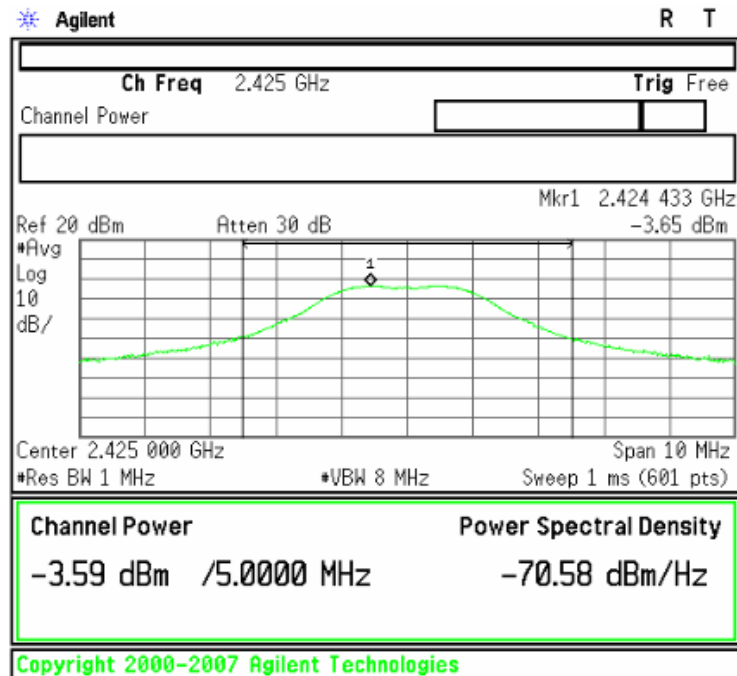

[2 450 MHz]

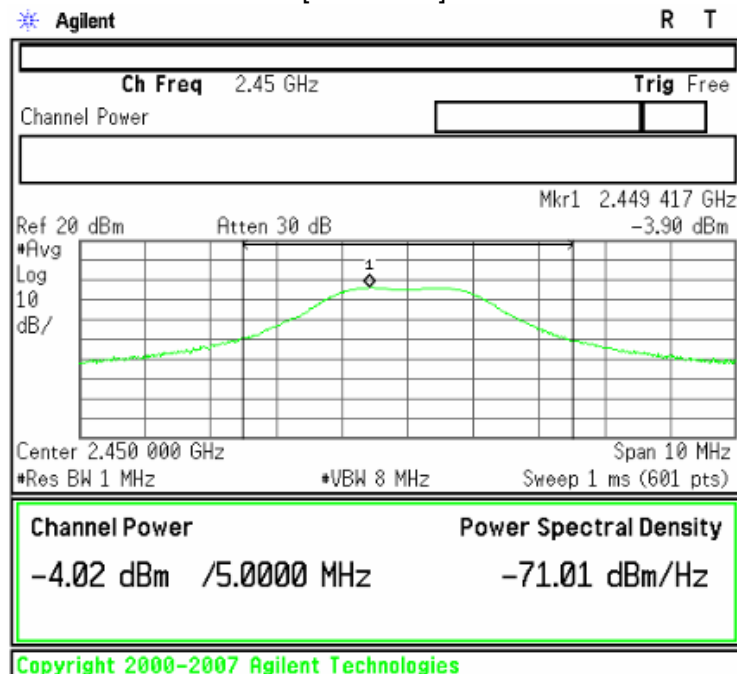


[2 475 MHz]

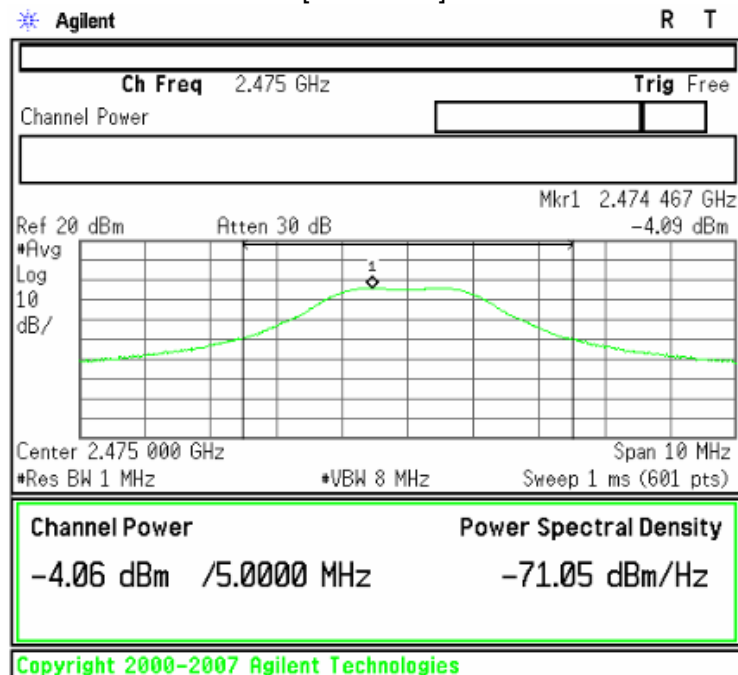


- Adapter: EDF0500150A1BA


[2 425 MHz]

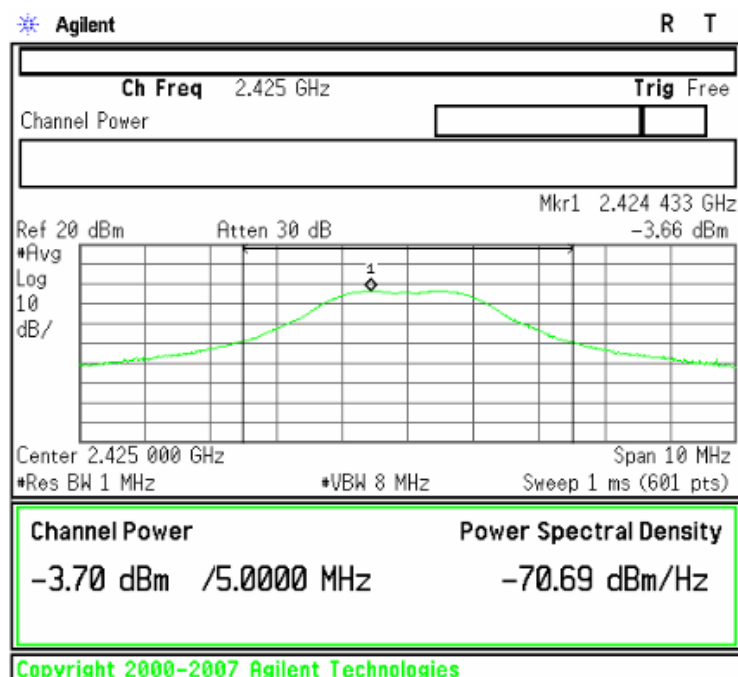

[2 450 MHz]

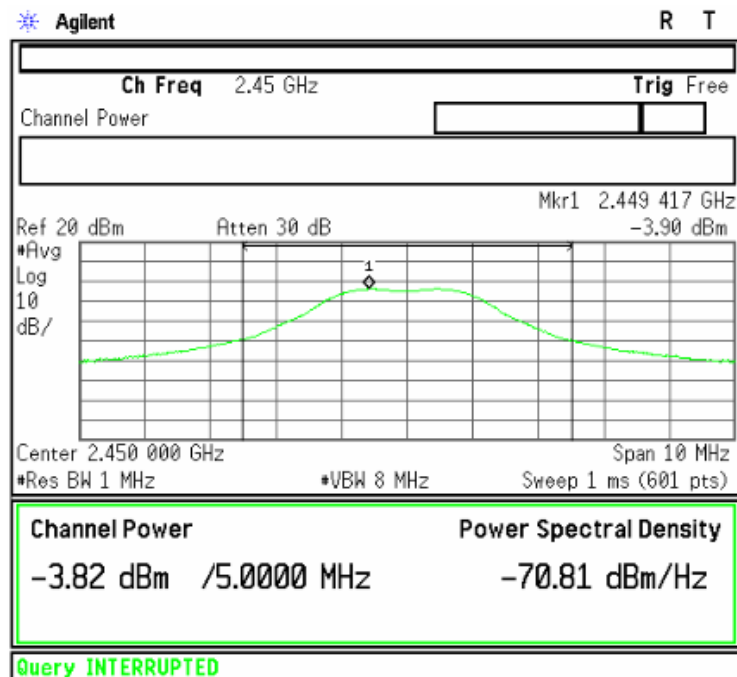

[2 475 MHz]

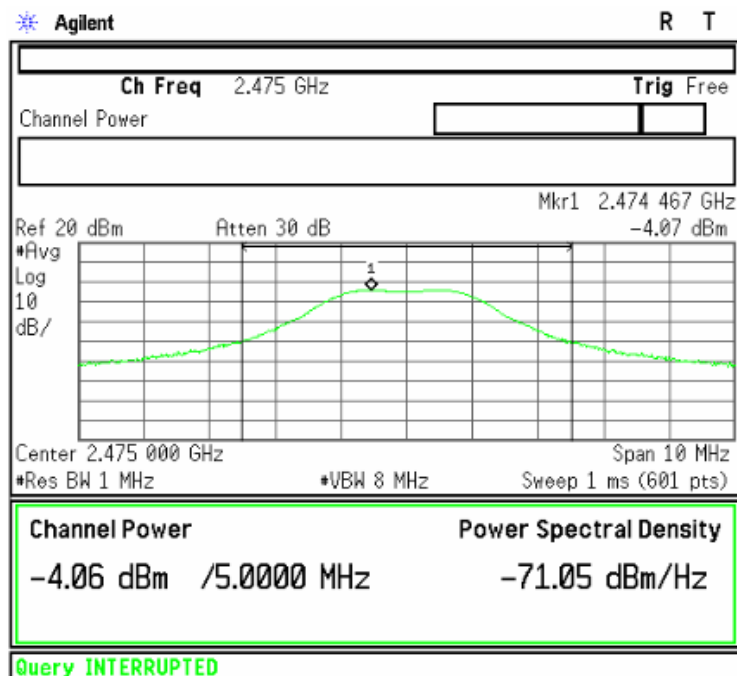

5.4 Bandwidth of Frequency Band Edges

EUT	Set-top Box / DMS2444UHDW
Limit apply to	FCC Part 15.247(d)
Test Date	June 09, 2015
Environmental of Test	(25.7 ± 1.8) °C, (43 ± 3) % R.H., (101.1 ± 0.1) kPa
Operating Condition	RF transmitting continuously during the tested.
Result	Passed

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Test Results

- Refer to see the measured plot in next page.



NOTES:

1. The test was performed to make a direct field strength measurement at the band edge frequencies.

Plots of Bandwidth of Frequency Band Edges

Conducted


- Adapter: EDF0500150A1BB

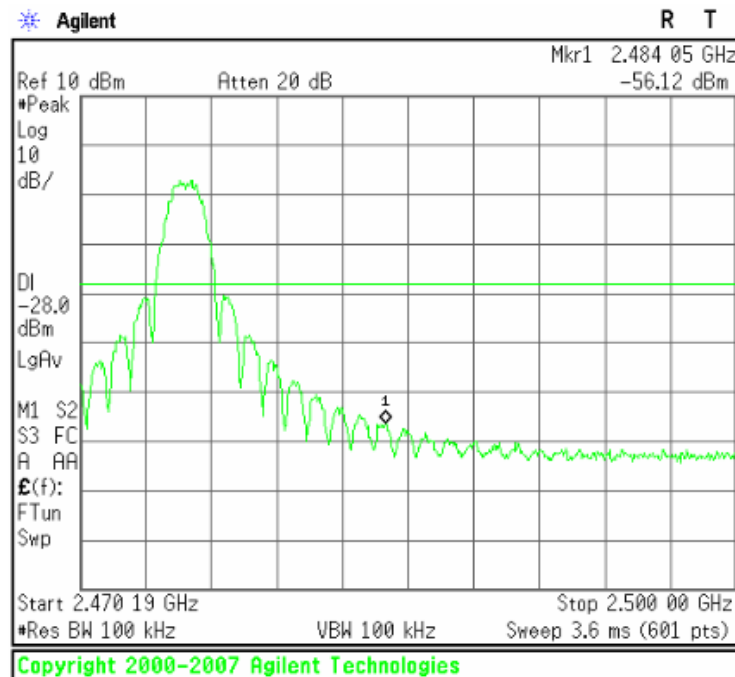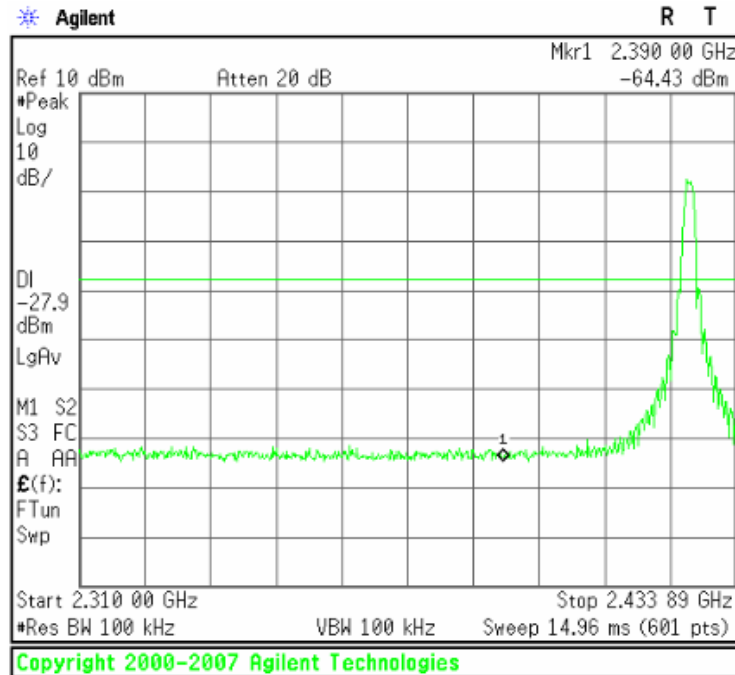

Radiated


Peak Detector: RBW: 1 MHz, VBW: 1 MHz (2 310 MHz - 2 390 MHz), Worst case (Low, Horizontal)

— Peak Limit Line
— AV Limit Line

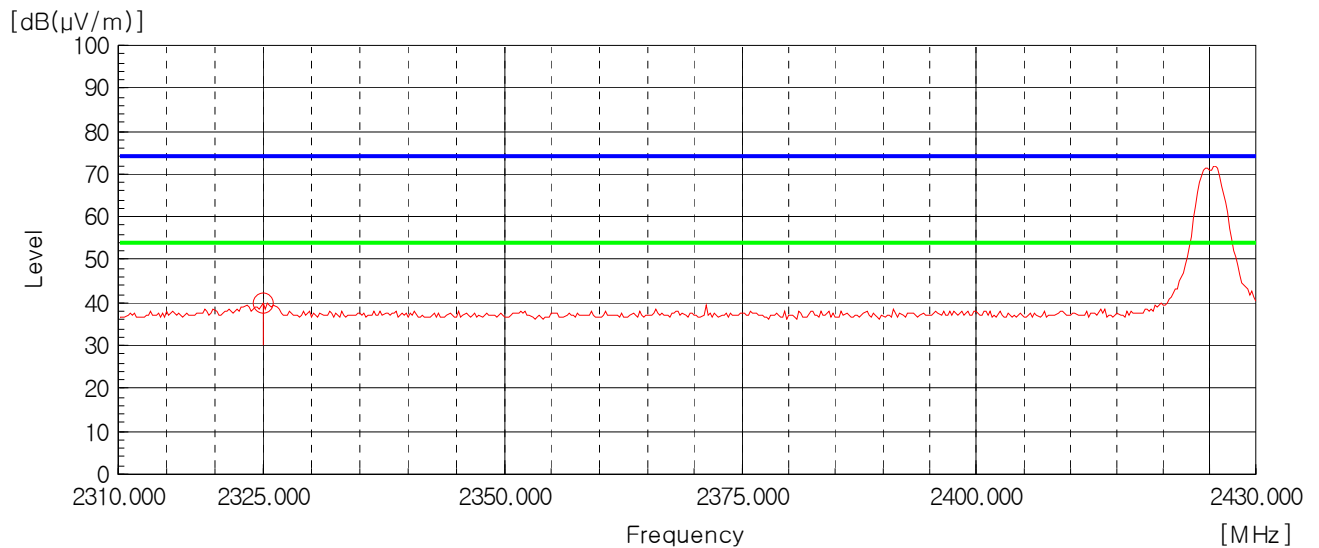


AV Detector: RBW: 1 MHz, VBW: 10 Hz (2 310 MHz - 2 390 MHz), Worst case (Low, Horizontal)

— Peak Limit Line
— AV Limit Line

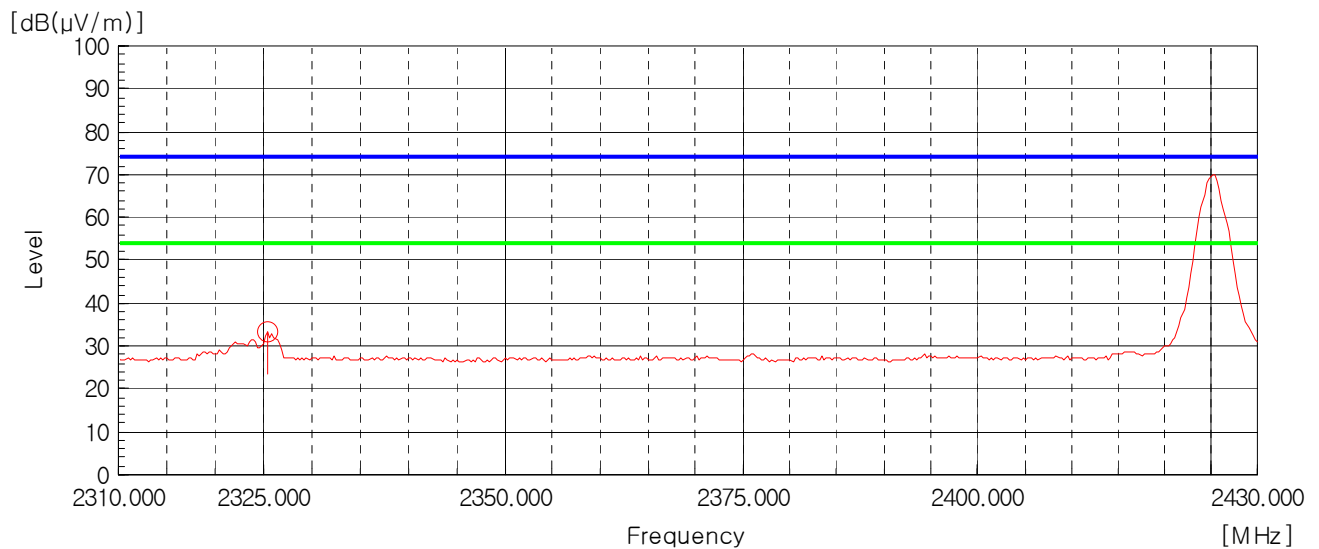


Peak Detector: RBW: 1 MHz, VBW: 1 MHz (2 483.5 MHz - 2 500 MHz), Worst case (High, Horizontal)

— Peak Limit Line
— AV Limit Line


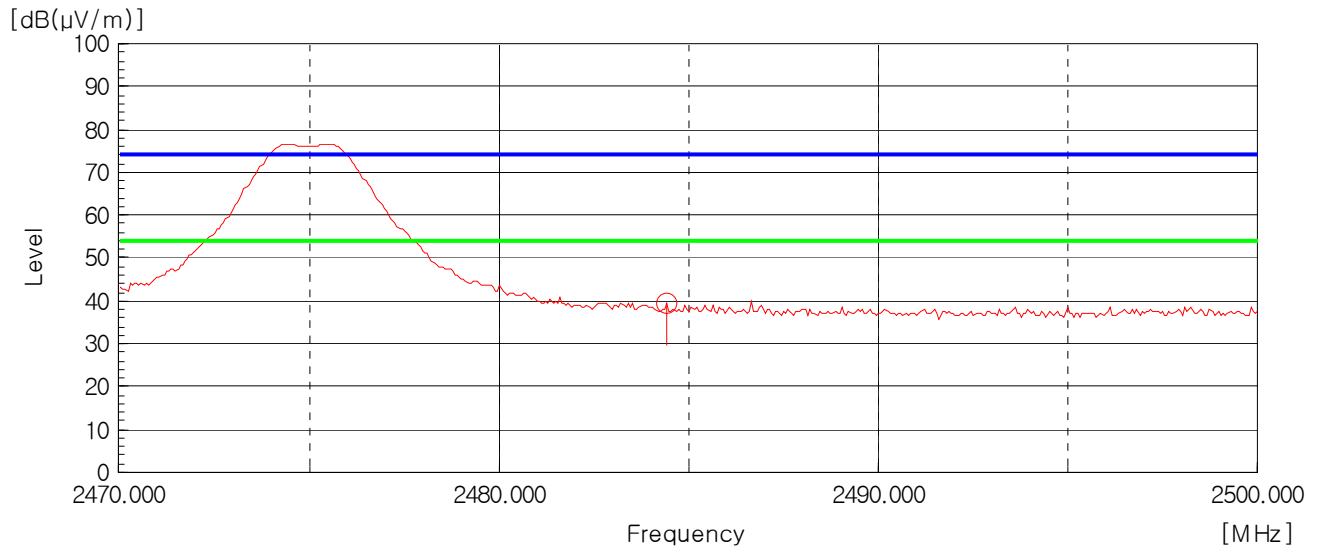


AV Detector: RBW: 1 MHz, VBW: 10 Hz (2 483.5 MHz - 2 500 MHz), Worst case (High, Horizontal)

— Peak Limit Line
— AV Limit Line

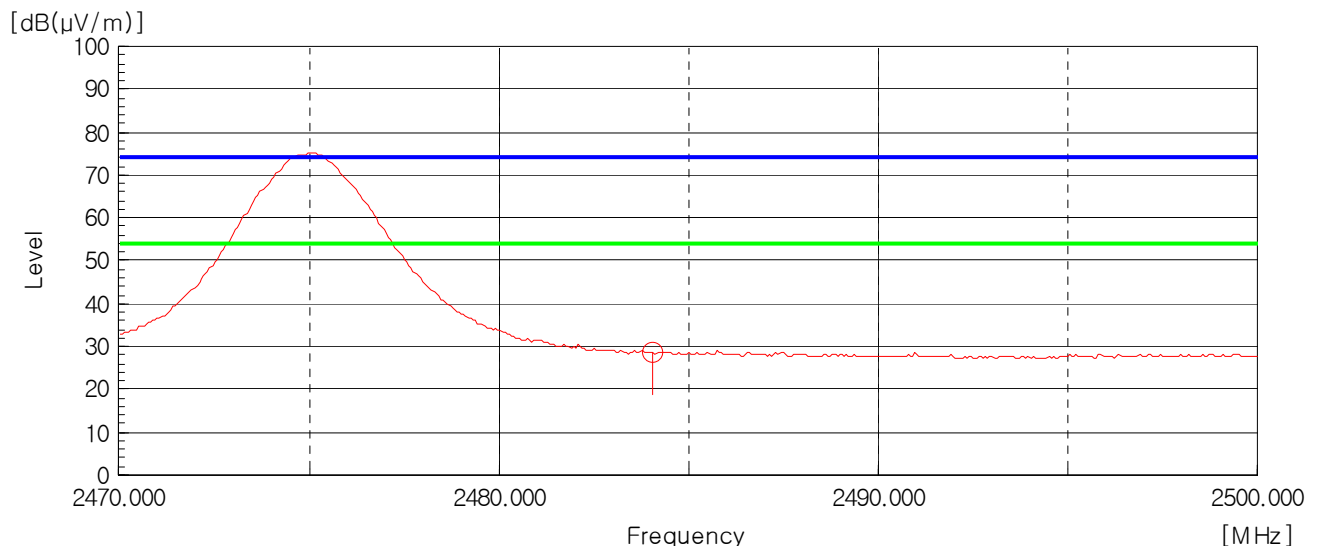


- Adapter: EDF0500150A1BB-3

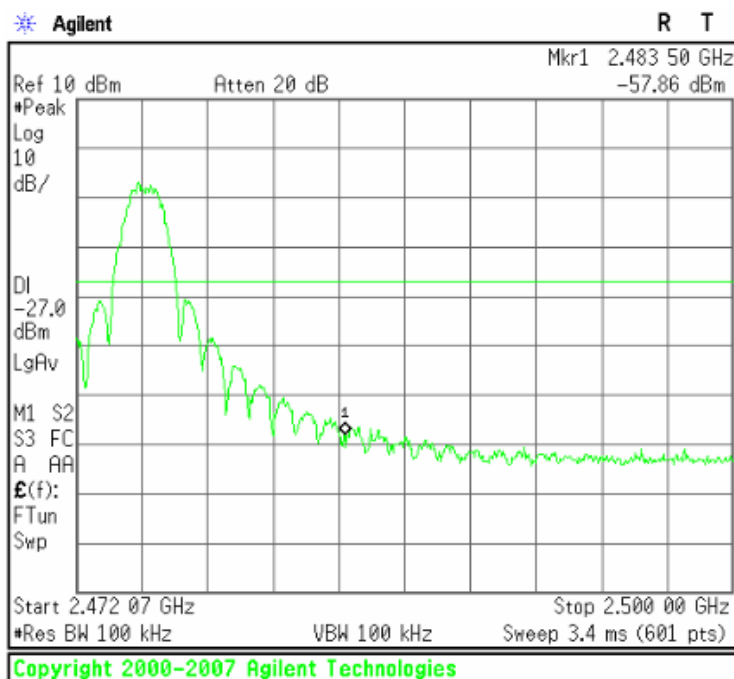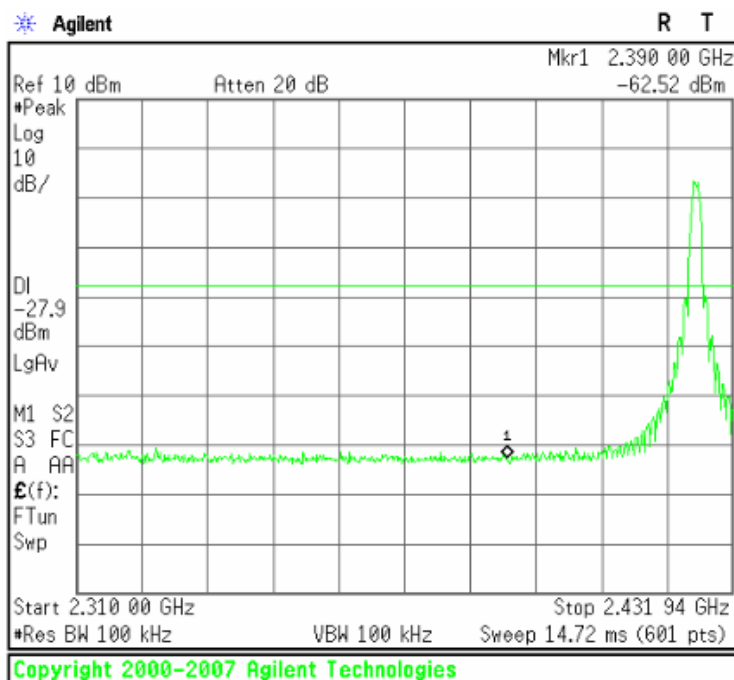

Radiated


Peak Detector: RBW: 1 MHz, VBW: 1 MHz (2 310 MHz - 2 390 MHz), Worst case (Low, Horizontal)

— Peak Limit Line
— AV Limit Line

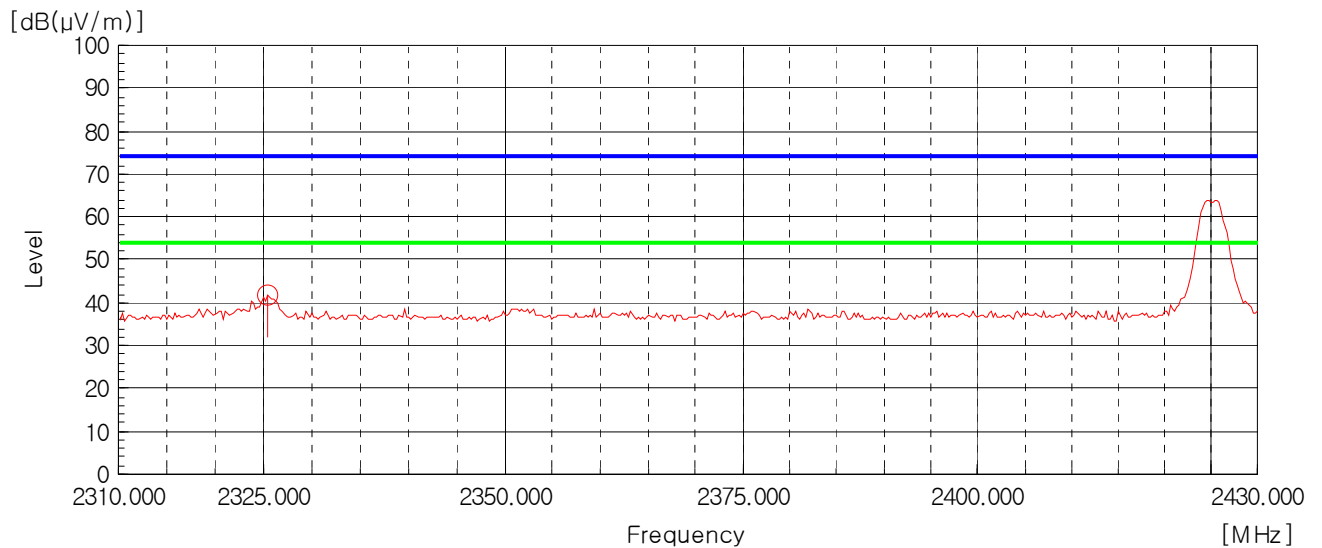


AV Detector: RBW: 1 MHz, VBW: 10 Hz (2 310 MHz - 2 390 MHz), Worst case (Low, Horizontal)

— Peak Limit Line
— AV Limit Line

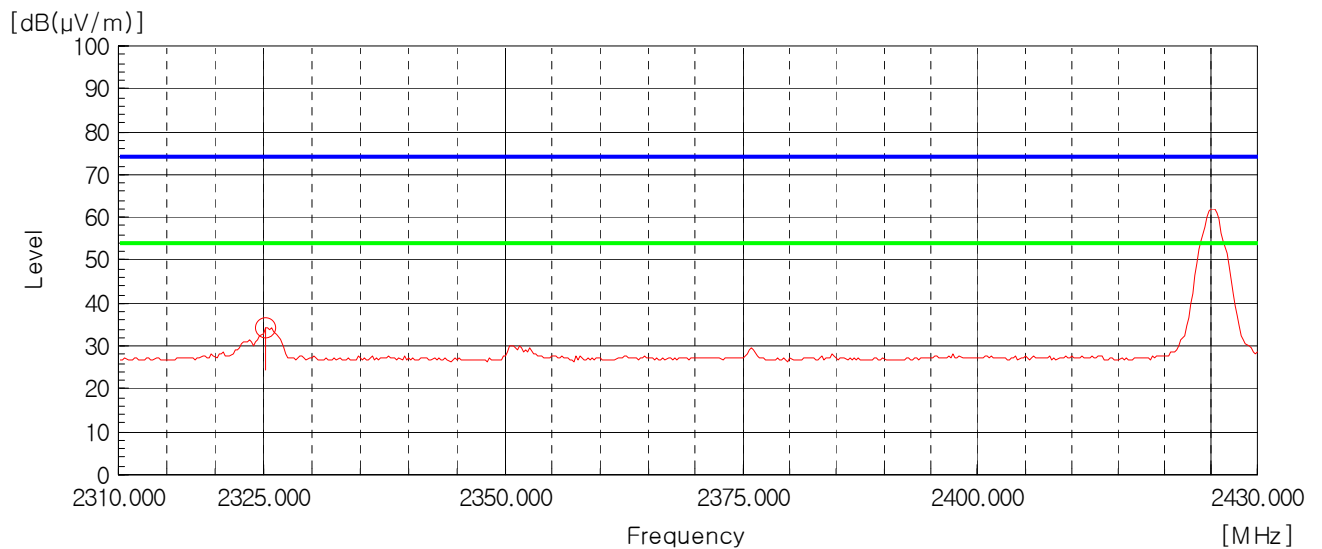


Peak Detector: RBW: 1 MHz, VBW: 1 MHz (2 483.5 MHz - 2 500 MHz), Worst case (High, Horizontal)

— Peak Limit Line
— AV Limit Line


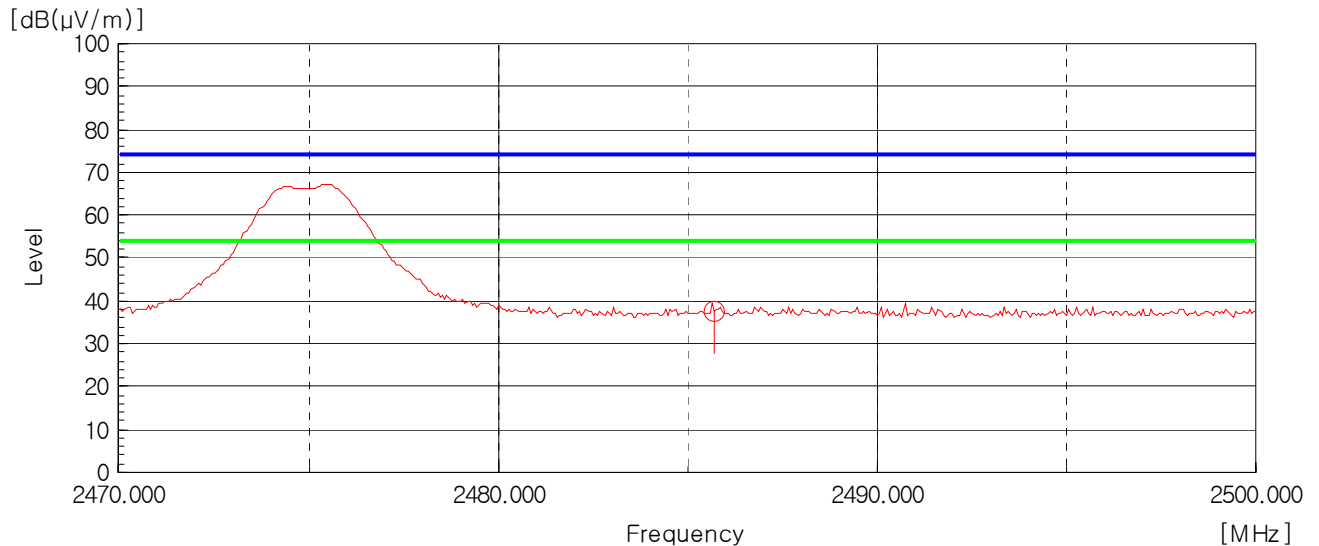


AV Detector: RBW: 1 MHz, VBW: 10 Hz (2 483.5 MHz - 2 500 MHz), Worst case (High, Horizontal)

— Peak Limit Line
— AV Limit Line

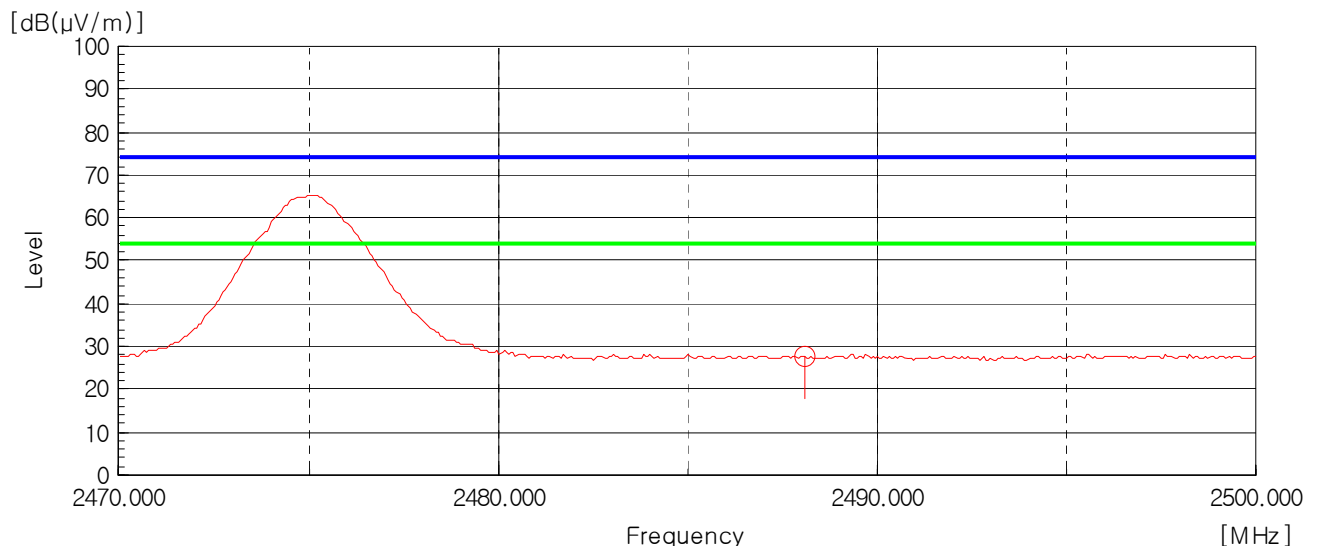


- Adapter: EDF0500150A1BA-3

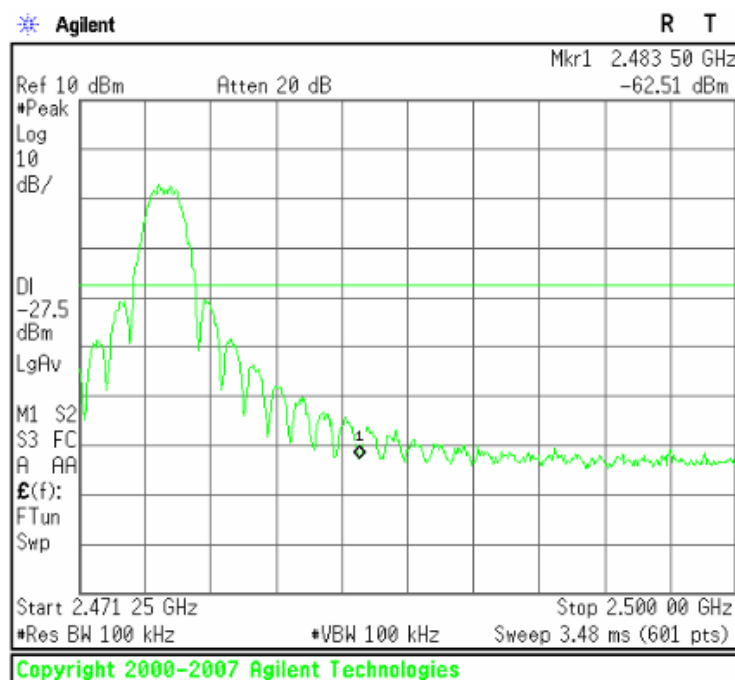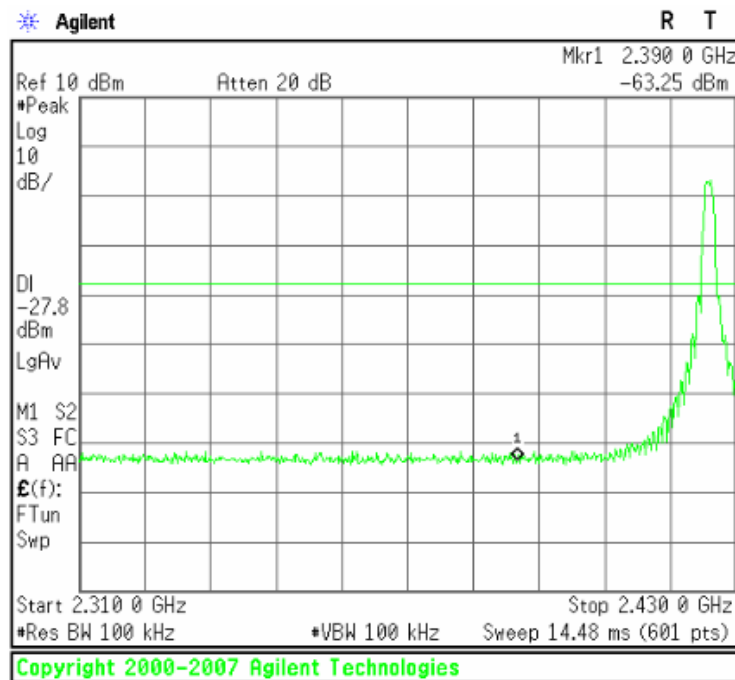

Radiated


Peak Detector: RBW: 1 MHz, VBW: 1 MHz (2 310 MHz - 2 390 MHz), Worst case (Low, Horizontal)

— Peak Limit Line
— AV Limit Line

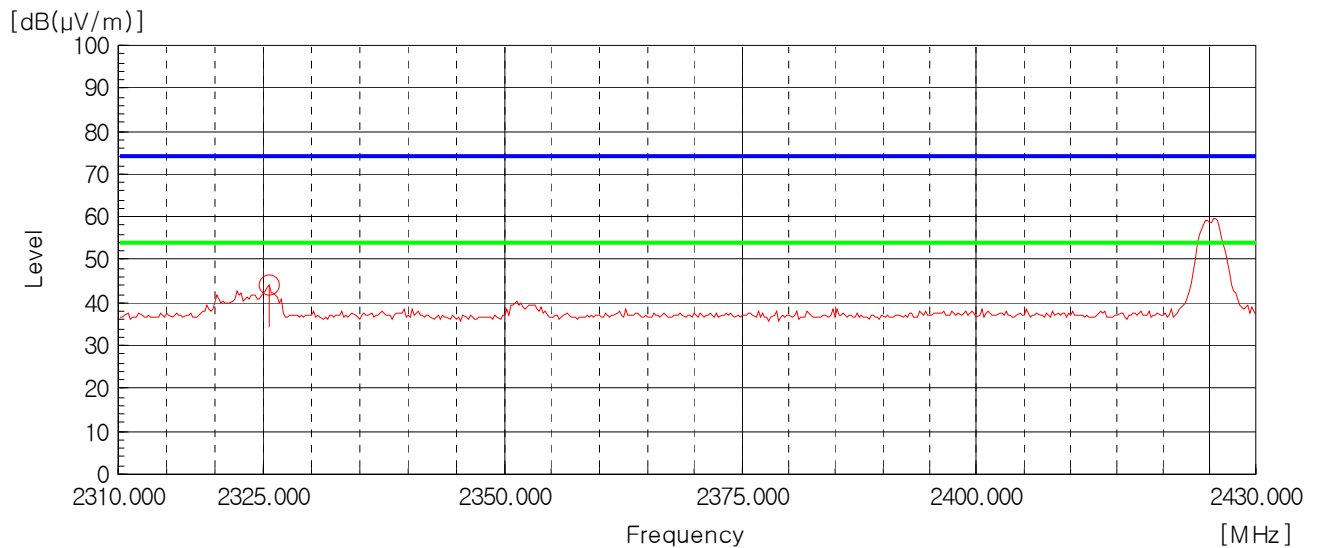


AV Detector: RBW: 1 MHz, VBW: 10 Hz (2 310 MHz - 2 390 MHz), Worst case (Low, Horizontal)

— Peak Limit Line
— AV Limit Line

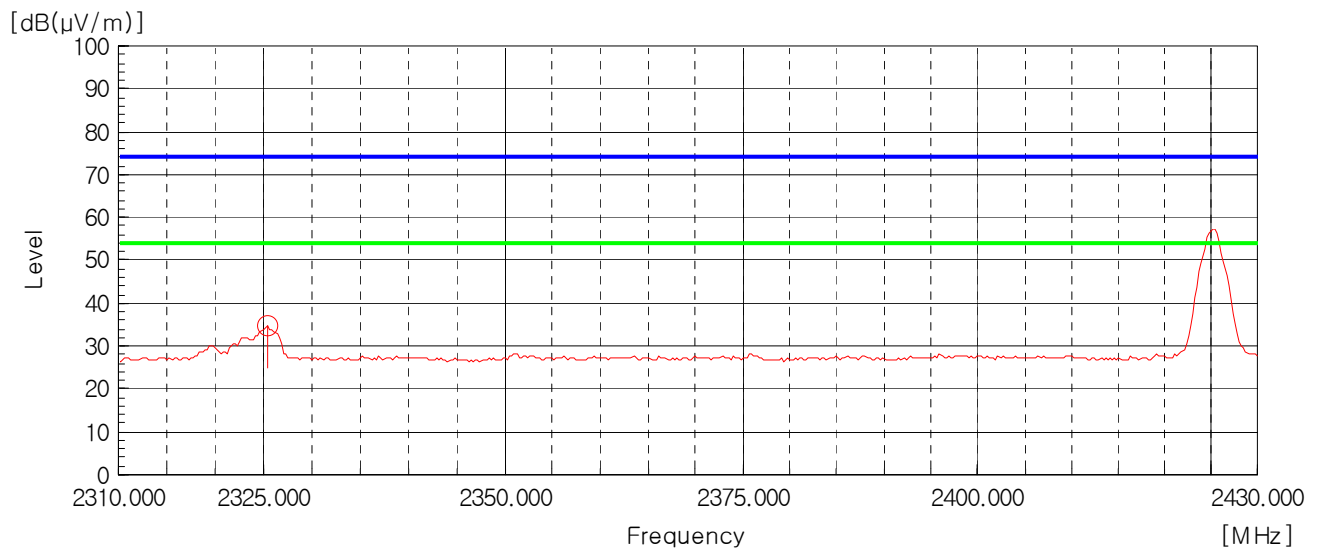


Peak Detector: RBW: 1 MHz, VBW: 1 MHz (2 483.5 MHz - 2 500 MHz), Worst case (High, Horizontal)

— Peak Limit Line
— AV Limit Line


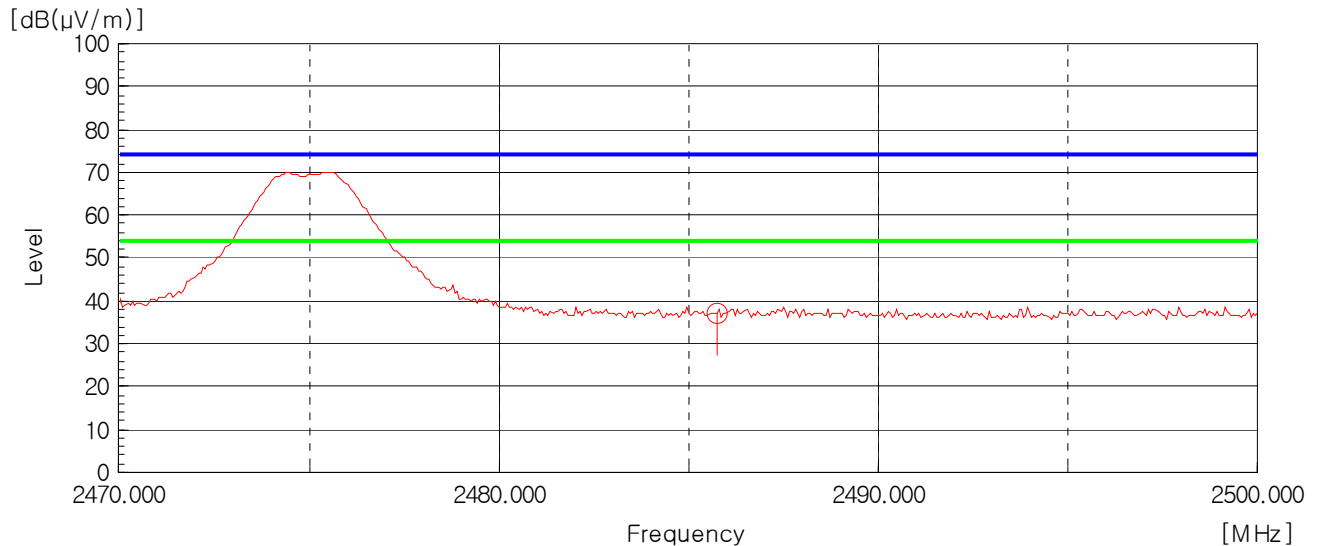


AV Detector: RBW: 1 MHz, VBW: 10 Hz (2 483.5 MHz - 2 500 MHz), Worst case (High, Horizontal)

— Peak Limit Line
— AV Limit Line

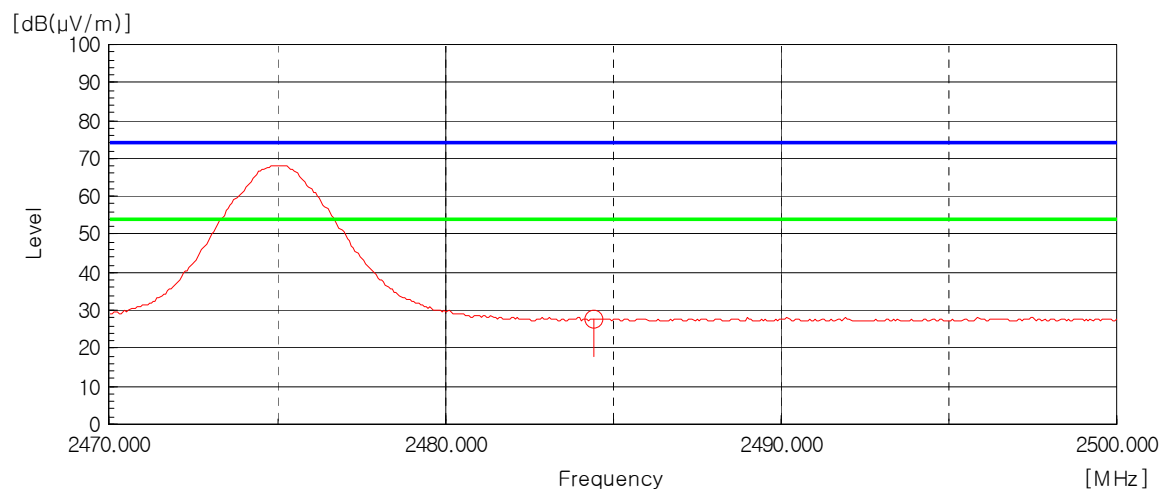


- Adapter: EDF0500150A1BA

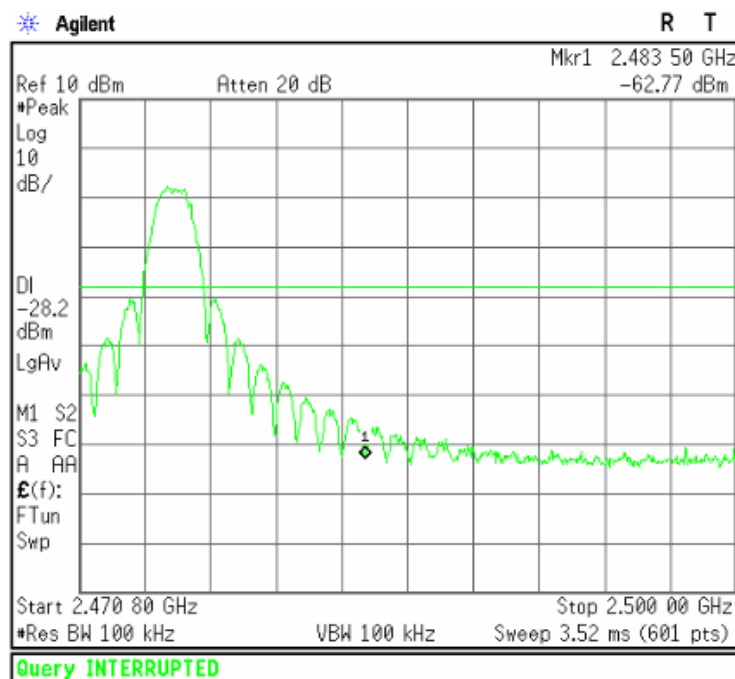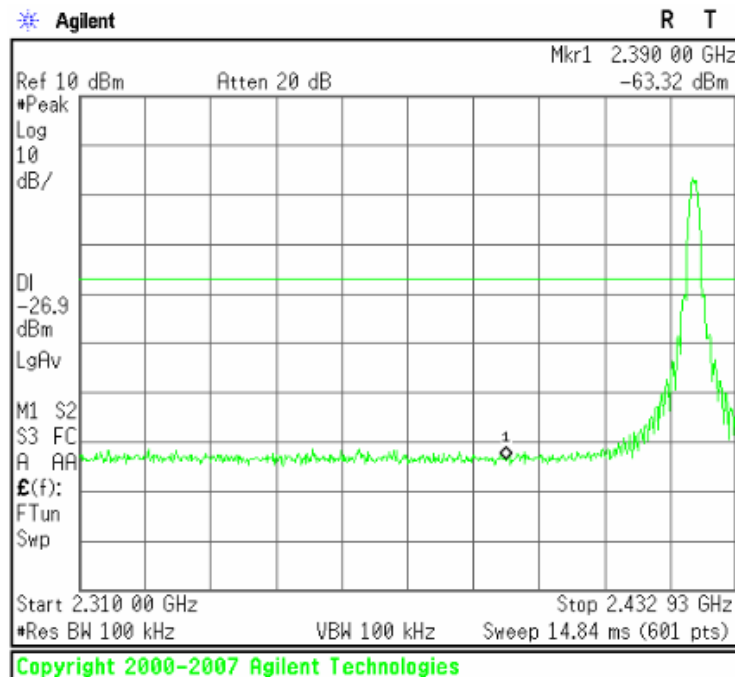

Radiated


Peak Detector: RBW: 1 MHz, VBW: 1 MHz (2 310 MHz - 2 390 MHz), Worst case (Low, Horizontal)

— Peak Limit Line
— AV Limit Line

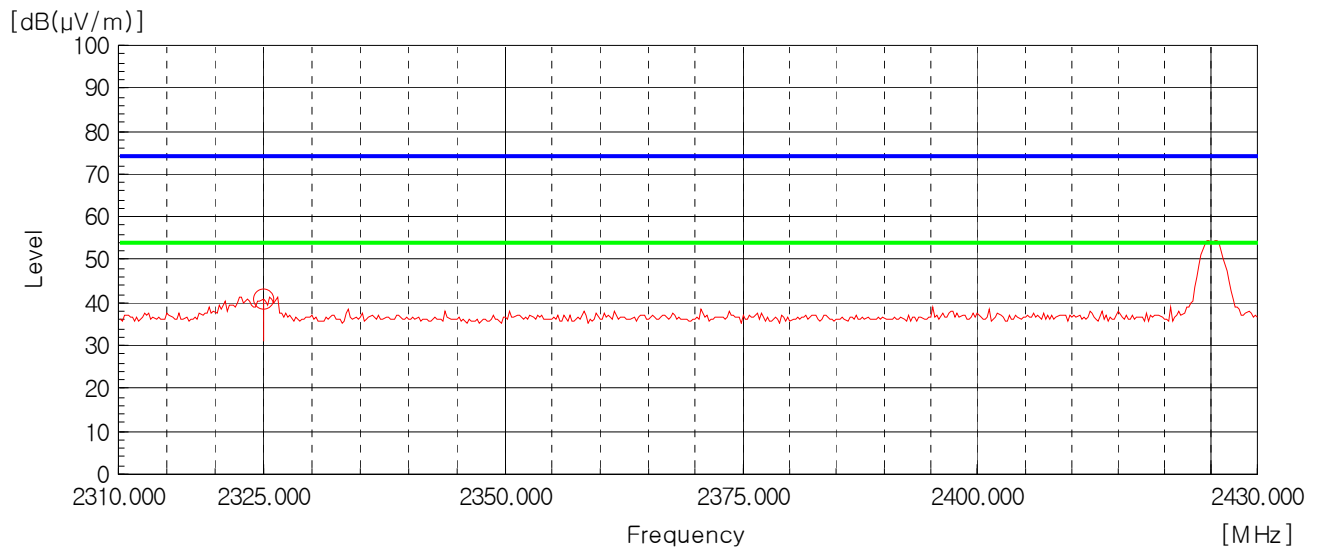


AV Detector: RBW: 1 MHz, VBW: 10 Hz (2 310 MHz - 2 390 MHz), Worst case (Low, Horizontal)

— Peak Limit Line
— AV Limit Line

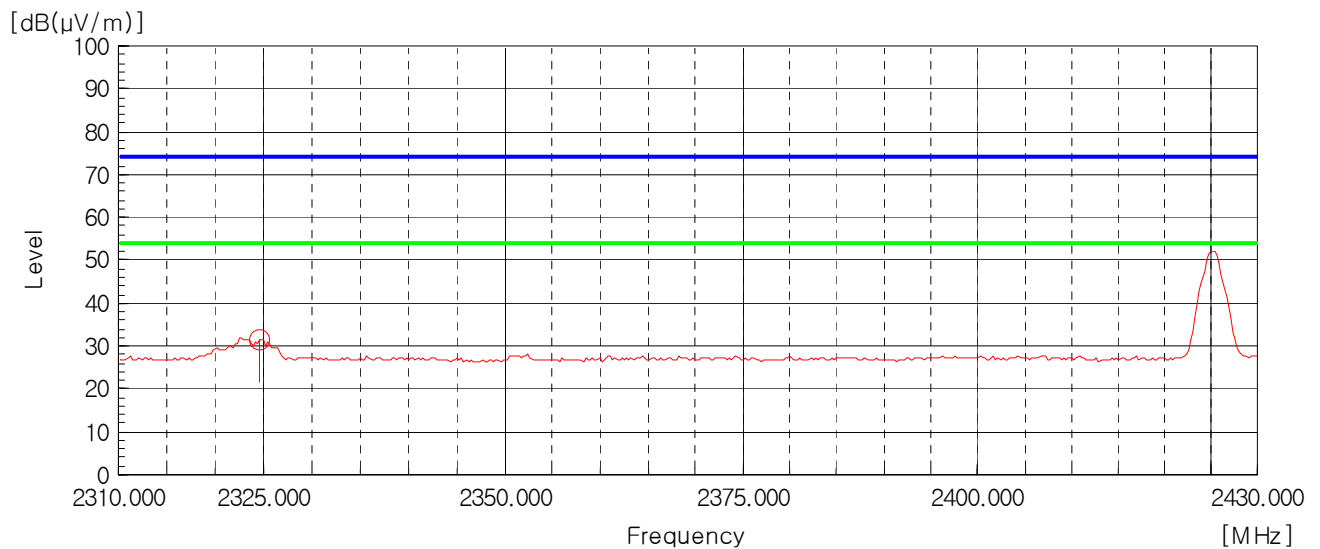


Peak Detector: RBW: 1 MHz, VBW: 1 MHz (2 483.5 MHz - 2 500 MHz), Worst case (High, Horizontal)

— Peak Limit Line
— AV Limit Line

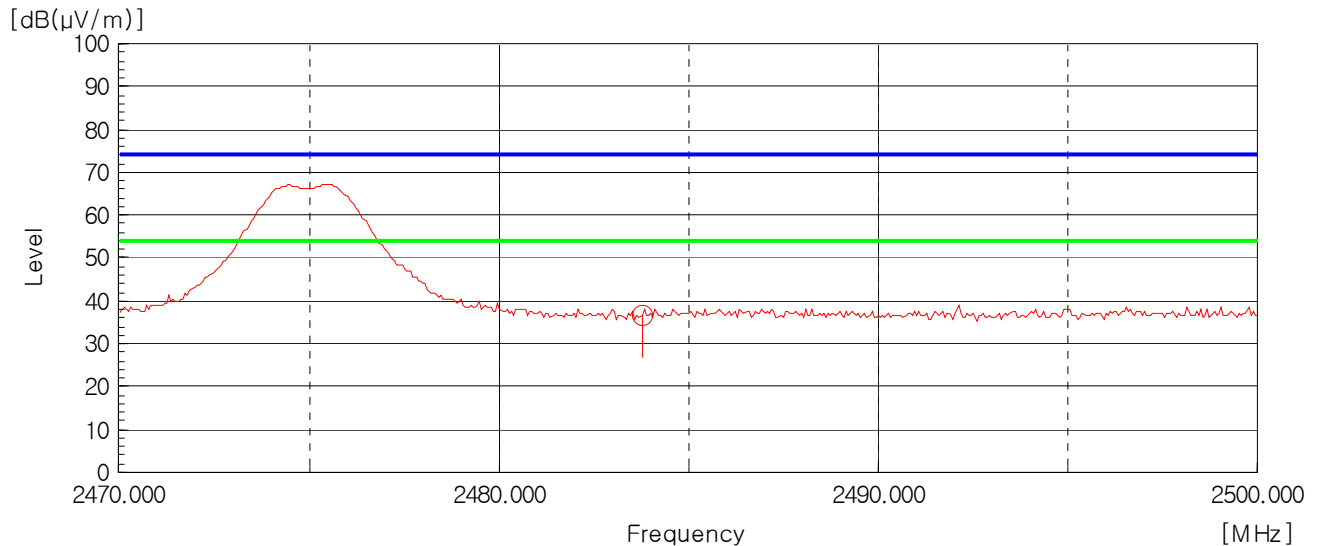

AV Detector: RBW: 1 MHz, VBW: 10 Hz (2 483.5 MHz - 2 500 MHz), Worst case (High, Horizontal)

— Peak Limit Line
— AV Limit Line

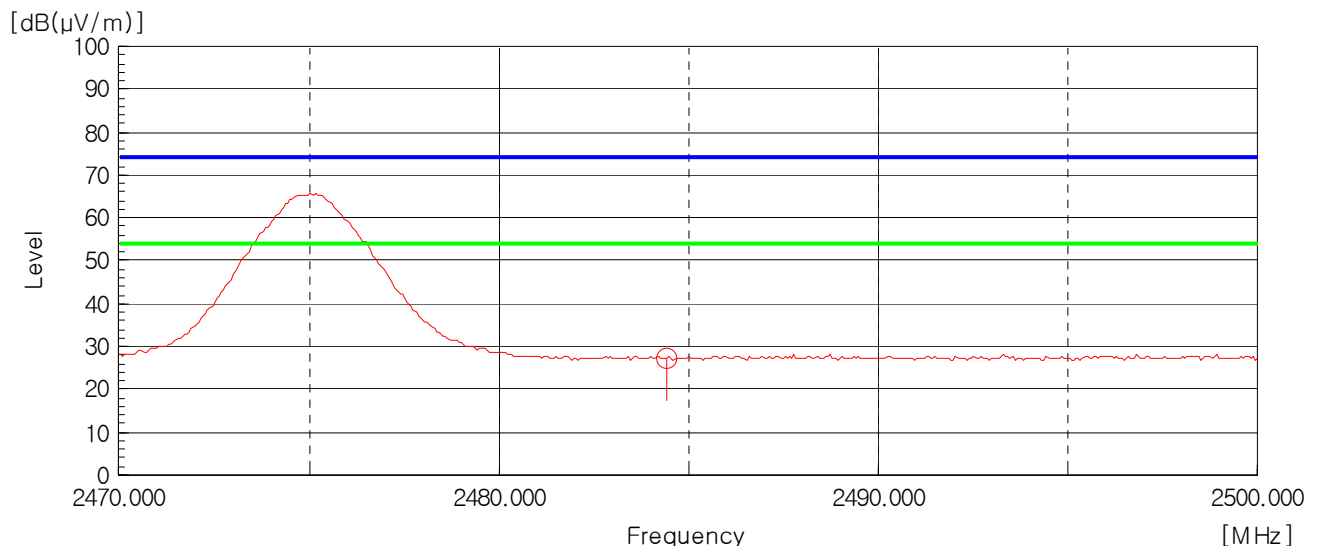

5.5 Power Spectral Density

EUT	Set-top Box / DMS2444UHDW
Limit apply to	FCC Part 15.247(e)
Test Date	June 08, 2015
Environmental of Test	(24.9 ± 0.2) °C, (44 ± 1) % R.H., (101.6 ± 0.0) kPa
Operating Condition	RF transmitting continuously during the tested.
Result	Passed

Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Data

- Adpater: EDF0500150A1BB

Frequency [MHz]	PSD [dBm]	Limit
2 425	-19.59	8.00 dBm
2 450	-19.44	
2 475	-19.42	

- Adpater: EDF0500150A1BB-3

Frequency [MHz]	PSD [dBm]	Limit
2 425	-19.35	8.00 dBm
2 450	-18.75	
2 475	-18.46	

NOTES:

1. Measure power spectral density of relevant channel using spectrum analyzer.
2. RBW 3 kHz, VBW 3 kHz, span 2 MHz, Sweep time (= span / 3 kHz).
3. Please see the measured plot in next page.

- Adpater: EDF0500150A1BA-3

Frequency [MHz]	PSD [dBm]	Limit
2 425	-19.29	8.00 dBm
2 450	-19.33	
2 475	-19.21	

- Adpater: EDF0500150A1BA

Frequency [MHz]	PSD [dBm]	Limit
2 425	-18.24	8.00 dBm
2 450	-19.15	
2 475	-19.49	


NOTES:

1. Measure power spectral density of relevant channel using spectrum analyzer.
2. RBW 3 kHz, VBW 3 kHz, span 2 MHz, Sweep time (= span / 3 kHz).
3. Please see the measured plot in next page.


Plots of Power Spectral Density

- Adapter: EDF0500150A1BB


[2 425 MHz]

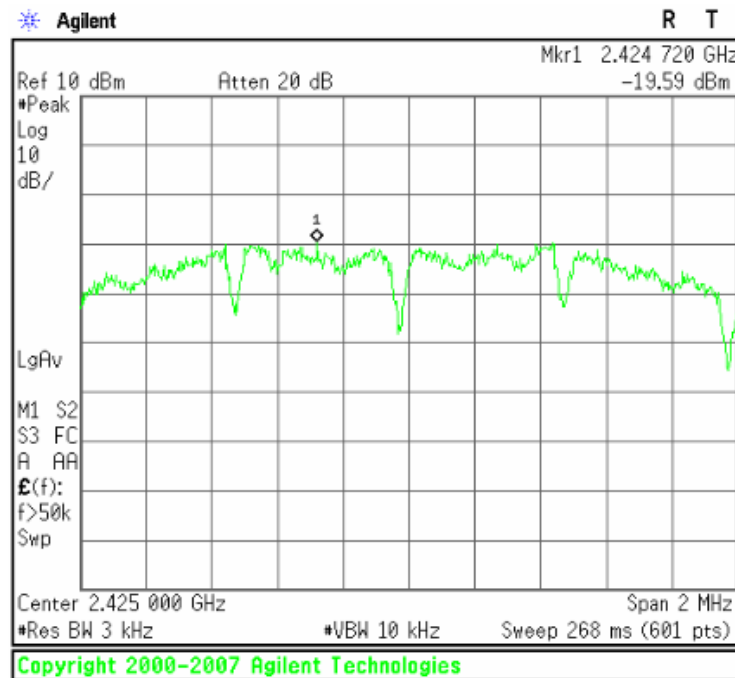

[2 450 MHz]

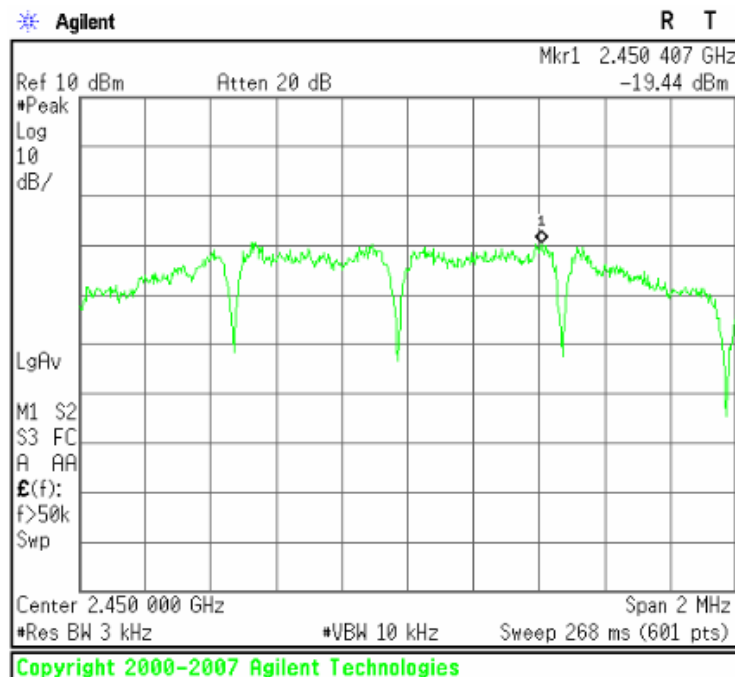


[2 475 MHz]

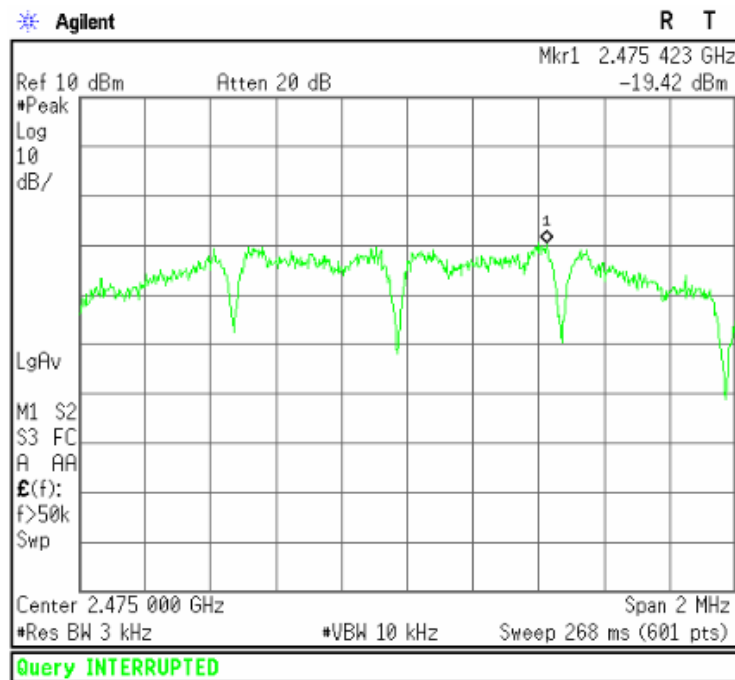


- Adapter: EDF0500150A1BB-3


[2 425 MHz]

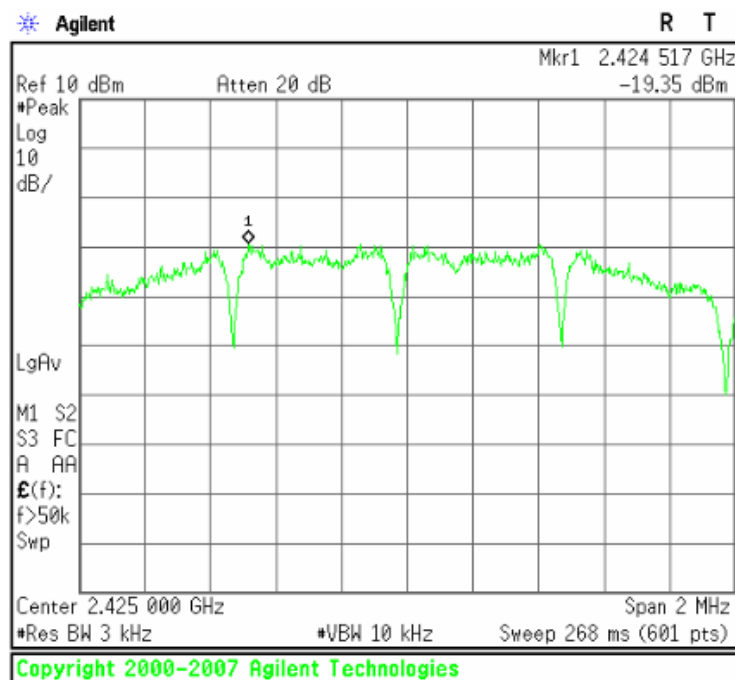

[2 450 MHz]

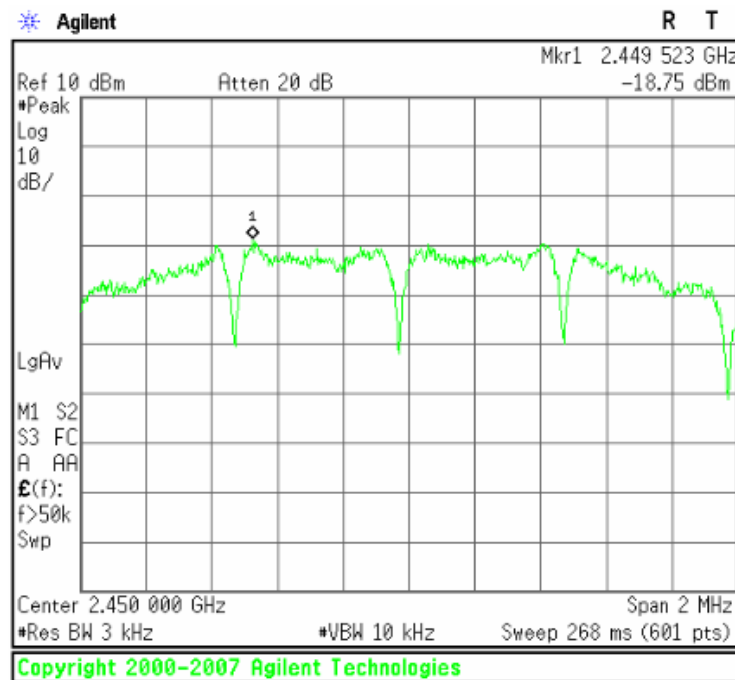


[2 475 MHz]

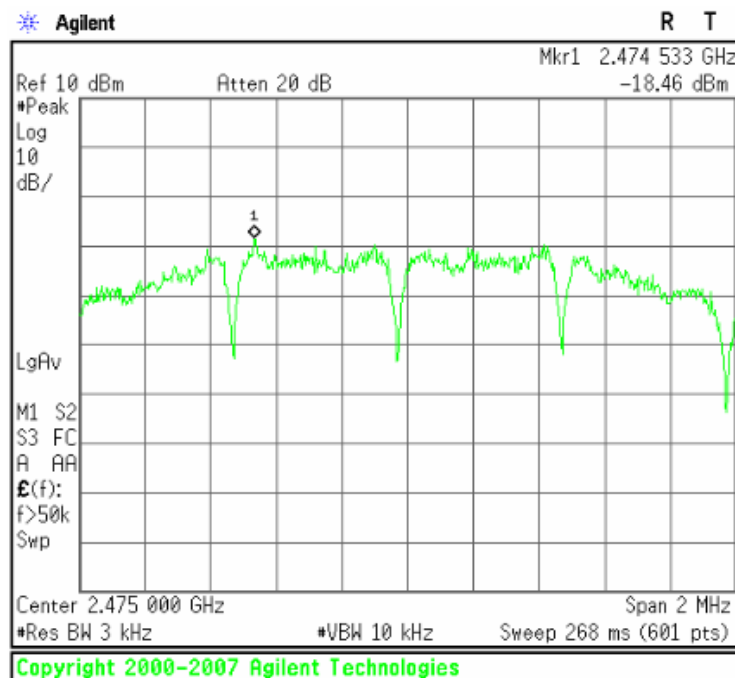


- Adapter: EDF0500150A1BA-3


[2 425 MHz]

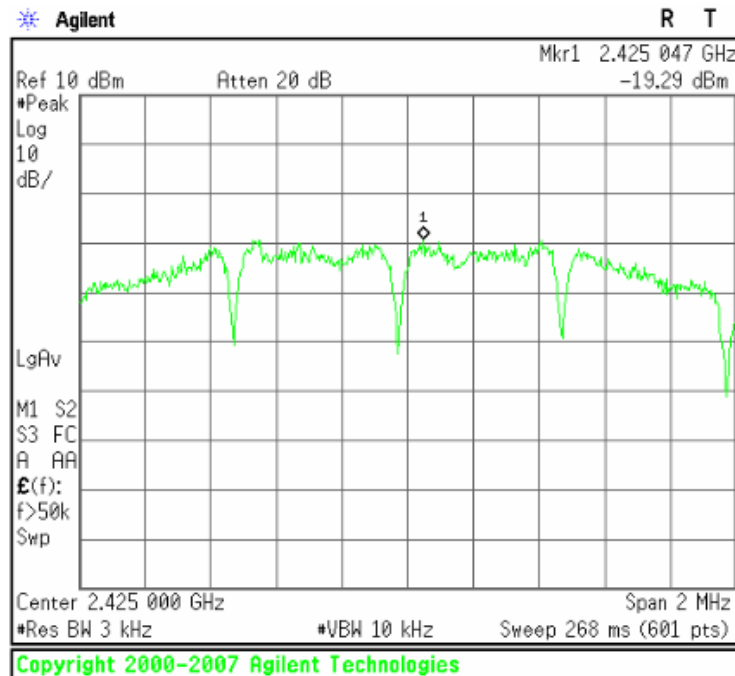

[2 450 MHz]

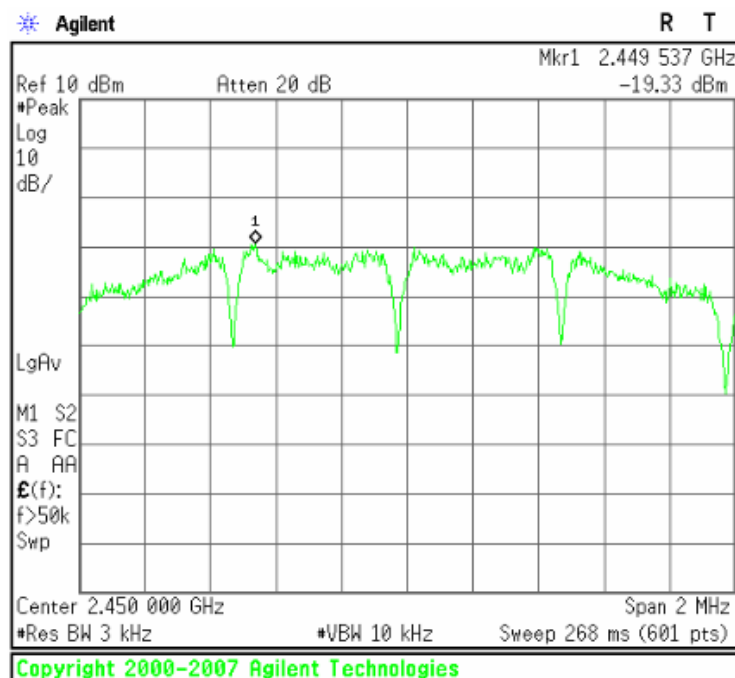


[2 475 MHz]

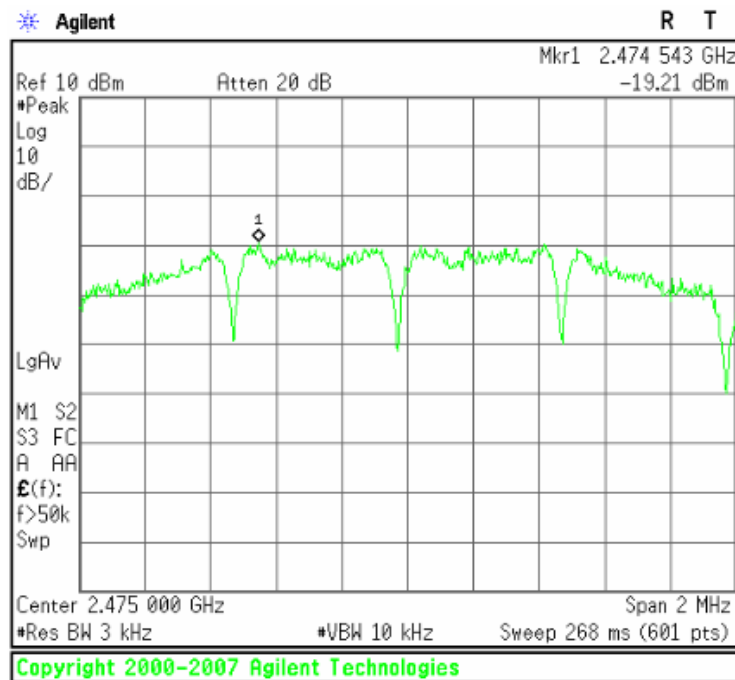


- Adapter: EDF0500150A1BA


[2 425 MHz]

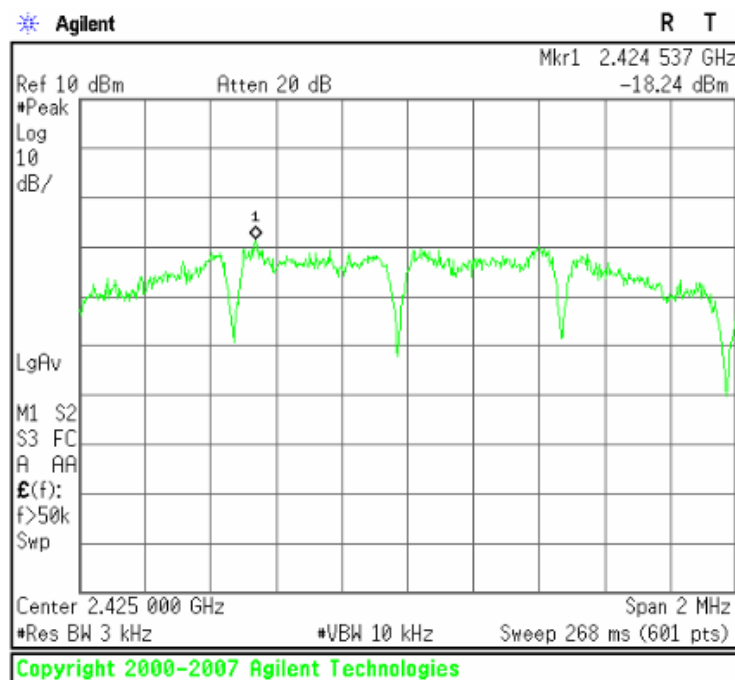

[2 450 MHz]

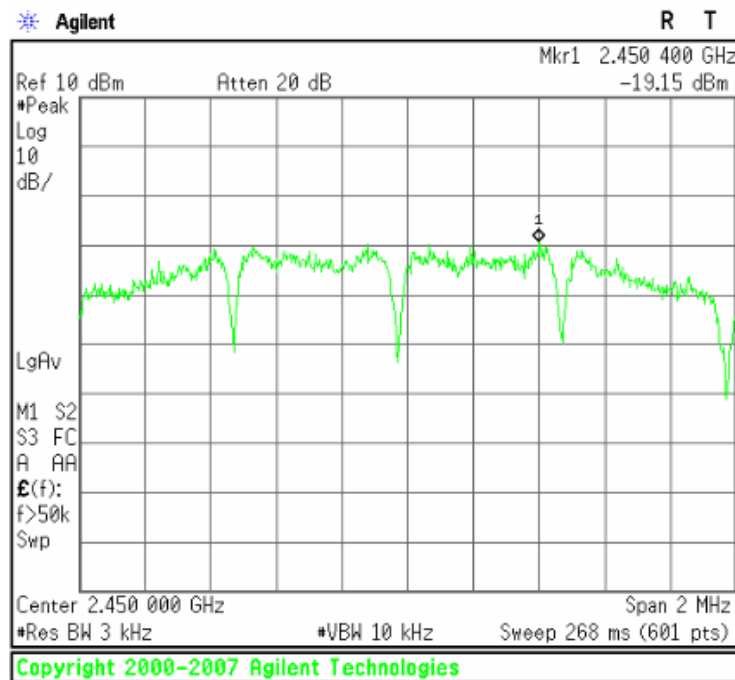

[2 475 MHz]

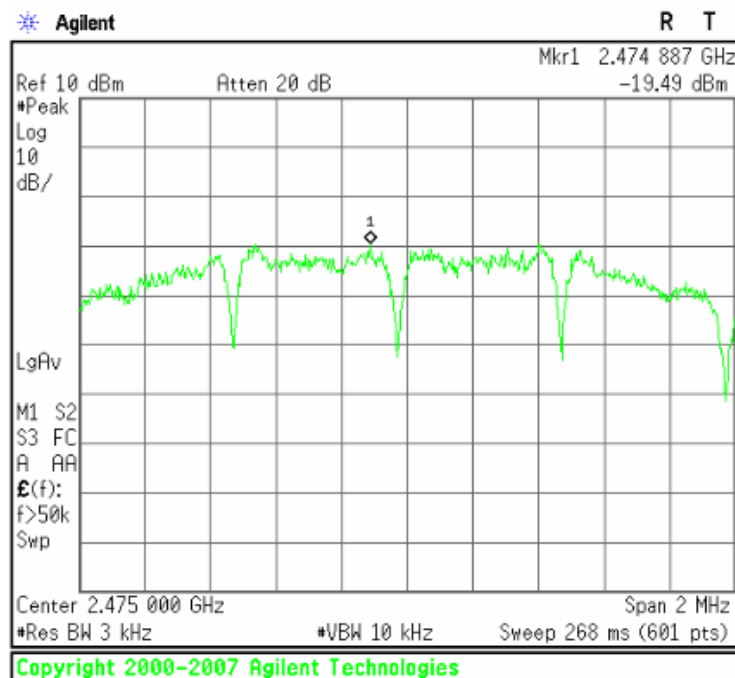

5.6 Spurious Emissions

EUT	Set-top Box / DMS2444UHDW
Limit apply to	FCC Part 15.209
Test Date	June 8, 2015 to June 10, 2015
Operating Condition	Low CH, Middle CH, High CH Transmission
Result	Passed

Limit

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequencies [MHz]	Field Strength [μV/m]	Measurement Distance [m]
0.009 - 0.490	2 400/F(kHz)	300
0.490 - 1.705	24 000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 MHz - 72 MHz, 76 MHz - 88 MHz, 174 MHz - 216 MHz or 470 MHz - 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

Test Results

- Refer to see the measured plot in next page.

Radiated Emissions Test data

- 9 kHz to 30 MHz

Test Date	June 10, 2015
Environmental of Test	(33.8 ± 2.9) °C, (42 ± 3) % R.H., (100.6 ± 0.1) kPa

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.
Detector mode: CISPR Quasi-Peak mode (100 Hz, 9 kHz)

- Adapter: EDF0500150A1BB, EDF0500150A1BB-3, EDF0500150A1BA-3, EDF0500150A1BA

Frequency [MHz]	Reading [dB(μV)]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
	Emission attenuated more than 20 dB below the limit are not reported.						

Result: All emissions below noise floor of 20 dB(μV/m).

NOTES:

- * H : Horizontal polarization , ** V : Vertical polarization
- Result = Reading + Antenna factor + Cable loss
- Margin = Limit - Result
- The measurement was performed for the frequency range 9 kHz to 30 MHz according to FCC Part 15.209.


- Below 1 GHz (30 MHz to 1 GHz)

Test Date	June 10, 2015
Environmental of Test	(34.7 ± 2.3) °C, (44 ± 2) % R.H., (100.6 ± 0.1) kPa

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.
Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth: 120 kHz)


- Adapter: EDF0500150A1BB

Frequency [MHz]	Reading [dB(μV)]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB(μV)]	Height [cm]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
38.24	9.67	V	11.03	1.00	100	21.70	40.00	18.30

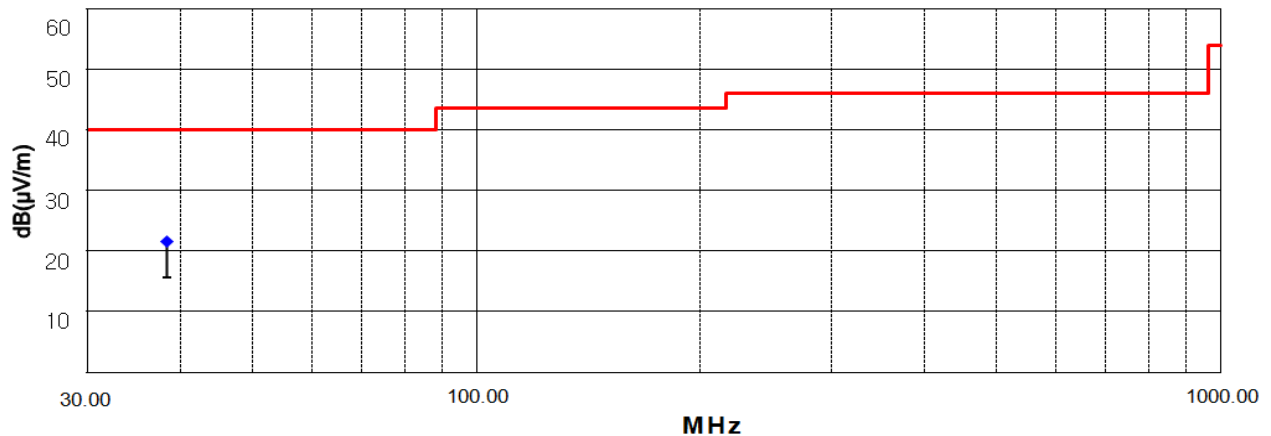


- Adapter: EDF0500150A1BB-3

Frequency [MHz]	Reading [dB(μV)]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB(μV)]	Height [cm]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
38.57	9.06	V	11.03	1.01	100	21.10	40.00	18.90

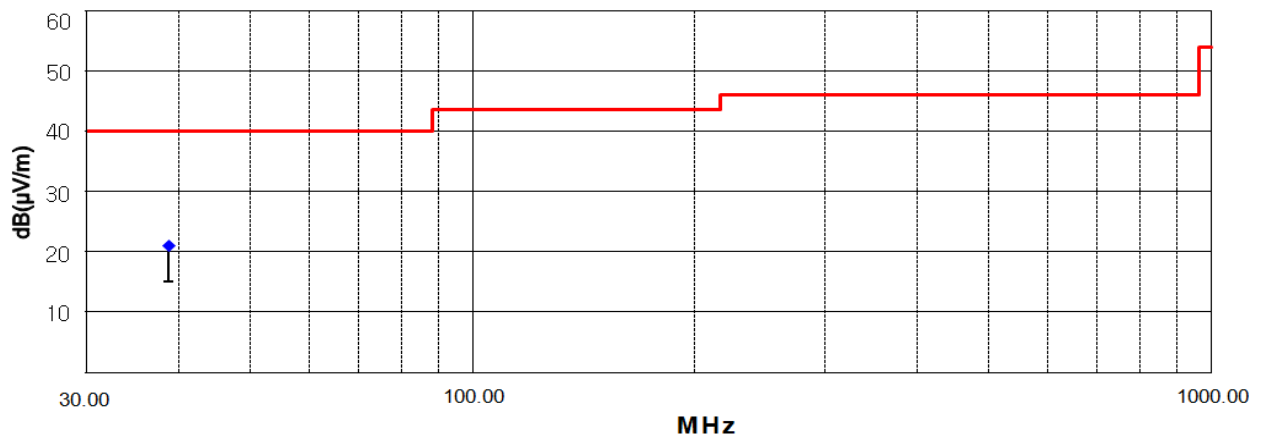


- Adpater: EDF0500150A1BA-3

Frequency [MHz]	Reading [dB(μV)]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB(μV)]	Height [cm]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
38.62	9.46	V	11.03	1.01	100	21.50	40.00	18.50

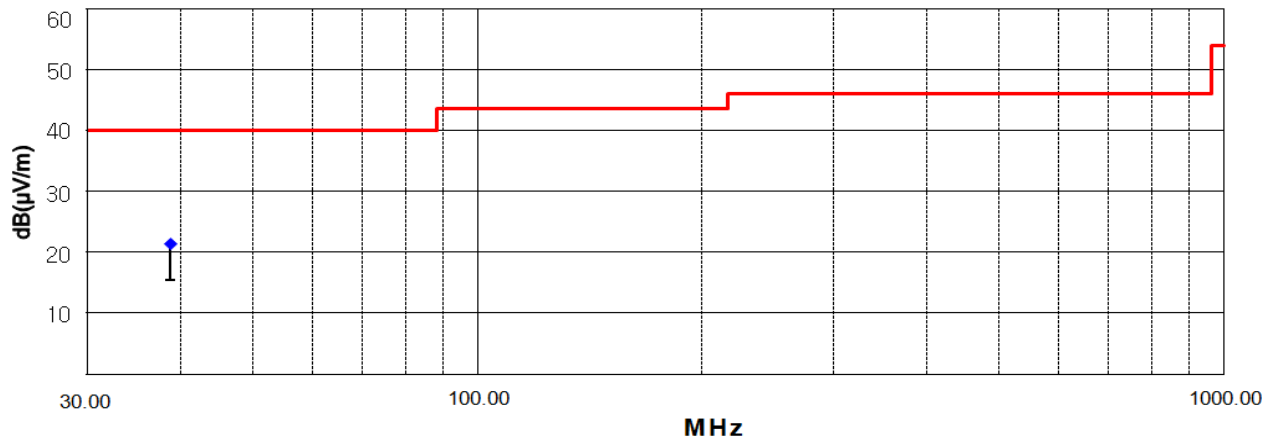

- Adpater: EDF0500150A1BA

Frequency [MHz]	Reading [dB(μV)]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB(μV)]	Height [cm]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
39.17	9.56	V	11.03	1.01	100	21.60	40.00	18.40

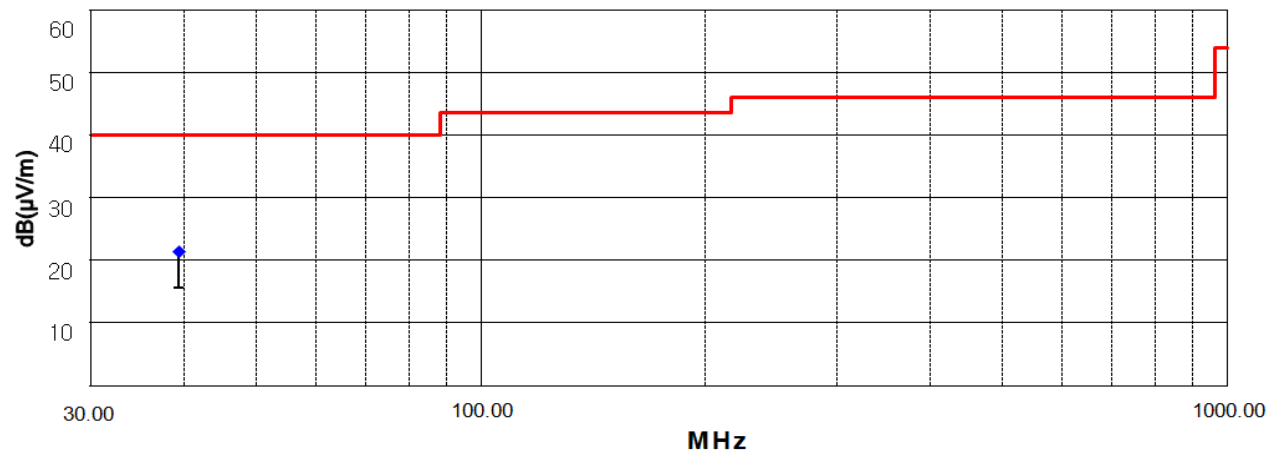

NOTES:

- * H : Horizontal polarization, ** V : Vertical polarization
- Result = Reading + Antenna factor + Cable loss
- Margin value = Limit – Result
- The measurement was performed for the frequency range above 30 MHz according to FCC Part 15.209.

- Above 1 GHz (1 GHz to 25 GHz)

Test Date	June 09, 2015
Environmental of Test	(23.1 ± 0.3) °C, (44 ± 0) % R.H., (101.0 ± 0.0) kPa

- Adapter: EDF0500150A1BB

1. Low CH (2 425 MHz)

Frequency [MHz]	Reading [dB(μV)]		Polarity (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(μV/m)]		Limit [dB(μV/m)]		Margin [dB]	
	Peak	Average				Peak	Average	Peak	Average	Peak	Average
-	-	-	-	-	-	-	-	-	-	-	-

Result: No signal detect

2. Middle CH (2 450 MHz)

Frequency [MHz]	Reading [dB(μV)]		Polarity (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(μV/m)]		Limit [dB(μV/m)]		Margin [dB]	
	Peak	Average				Peak	Average	Peak	Average	Peak	Average
-	-	-	-	-	-	-	-	-	-	-	-

Result: No signal detect

3. High CH (2 475 MHz)

Frequency [MHz]	Reading [dB(μV)]		Polarity (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(μV/m)]		Limit [dB(μV/m)]		Margin [dB]	
	Peak	Average				Peak	Average	Peak	Average	Peak	Average
1 585.80	57.14	41.34	H	25.72	-37.96	44.90	29.10	73.97	53.97	29.07	24.87

Result: No signal detect above second harmonic.

NOTES:

- * H : Horizontal polarization , ** V : Vertical polarization
- Factor = Antenna factor + Cable loss + Preamp
- Result = Reading + Factor
- Margin = Limit - Result
- Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- Spectrum setting:
 - Peak Setting 1 GHz to 10th harmonics of fundamental, RBW = 1 MHz, VBW = 1 MHz, Sweep = Auto
 - AV Setting 1 GHz to 10th harmonics of fundamental, RBW = 1 MHz, VBW = 10 Hz, Sweep = Auto

- Adapter: EDF0500150A1BB-3

1. Low CH (2 425 MHz)

Frequency [MHz]	Reading [dB(μV)]		Polarity (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(μV/m)]		Limit [dB(μV/m)]		Margin [dB]	
	Peak	Average				Peak	Average	Peak	Average	Peak	Average
-	-	-	-	-	-	-	-	-	-	-	-

Result: No signal detect

2. Middle CH (2 450 MHz)

Frequency [MHz]	Reading [dB(μV)]		Polarity (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(μV/m)]		Limit [dB(μV/m)]		Margin [dB]	
	Peak	Average				Peak	Average	Peak	Average	Peak	Average
-	-	-	-	-	-	-	-	-	-	-	-

Result: No signal detect

3. High CH (2 475 MHz)

Frequency [MHz]	Reading [dB(μV)]		Polarity (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(μV/m)]		Limit [dB(μV/m)]		Margin [dB]	
	Peak	Average				Peak	Average	Peak	Average	Peak	Average
1 844.36	55.87	40.77	H	26.01	-37.48	44.40	29.30	73.97	53.97	29.57	24.67

Result: No signal detect above second harmonic.

NOTES:

- * H : Horizontal polarization , ** V : Vertical polarization
- Factor = Antenna factor + Cable loss + Preamp
- Result = Reading + Factor
- Margin = Limit - Result
- Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- Spectrum setting:
 - Peak Setting 1 GHz to 10th harmonics of fundamental, RBW = 1 MHz, VBW = 1 MHz, Sweep = Auto
 - AV Setting 1 GHz to 10th harmonics of fundamental, RBW = 1 MHz, VBW = 10 Hz, Sweep = Auto

- Adapter: EDF0500150A1BA-3

1. Low CH (2 425 MHz)

Frequency [MHz]	Reading [dB(μV)]		Polarity (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(μV/m)]		Limit [dB(μV/m)]		Margin [dB]	
	Peak	Average				Peak	Average	Peak	Average	Peak	Average
-	-	-	-	-	-	-	-	-	-	-	-

Result: No signal detect

2. Middle CH (2 450 MHz)

Frequency [MHz]	Reading [dB(μV)]		Polarity (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(μV/m)]		Limit [dB(μV/m)]		Margin [dB]	
	Peak	Average				Peak	Average	Peak	Average	Peak	Average
1 496.92	58.51	41.21	V	25.62	-38.13	46.00	28.70	73.97	53.97	27.97	25.27

Result: No signal detect above second harmonic.

3. High CH (2 475 MHz)

Frequency [MHz]	Reading [dB(μV)]		Polarity (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(μV/m)]		Limit [dB(μV/m)]		Margin [dB]	
	Peak	Average				Peak	Average	Peak	Average	Peak	Average
-	-	-	-	-	-	-	-	-	-	-	-

Result: No signal detect

NOTES:

- * H : Horizontal polarization , ** V : Vertical polarization
- Factor = Antenna factor + Cable loss + Preamp
- Result = Reading + Factor
- Margin = Limit - Result
- Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- Spectrum setting:
 - Peak Setting 1 GHz to 10th harmonics of fundamental, RBW = 1 MHz, VBW = 1 MHz, Sweep = Auto
 - AV Setting 1 GHz to 10th harmonics of fundamental, RBW = 1 MHz, VBW = 10 Hz, Sweep = Auto

- Adapter: EDF0500150A1BA

1. Low CH (2 425 MHz)

Frequency [MHz]	Reading [dB(μV)]		Polarity (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(μV/m)]		Limit [dB(μV/m)]		Margin [dB]	
	Peak	Average				Peak	Average	Peak	Average	Peak	Average
-	-	-	-	-	-	-	-	-	-	-	-

Result: No signal detect

2. Middle CH (2 450 MHz)

Frequency [MHz]	Reading [dB(μV)]		Polarity (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(μV/m)]		Limit [dB(μV/m)]		Margin [dB]	
	Peak	Average				Peak	Average	Peak	Average	Peak	Average
-	-	-	-	-	-	-	-	-	-	-	-

Result: No signal detect

3. High CH (2 475 MHz)

Frequency [MHz]	Reading [dB(μV)]		Polarity (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(μV/m)]		Limit [dB(μV/m)]		Margin [dB]	
	Peak	Average				Peak	Average	Peak	Average	Peak	Average
1 477.57	57.77	40.87	V	25.59	-38.16	45.20	28.30	73.97	53.97	28.77	25.67

Result: No signal detect above second harmonic.

NOTES:



- * H : Horizontal polarization , ** V : Vertical polarization
- Factor = Antenna factor + Cable loss + Preamp
- Result = Reading + Factor
- Margin = Limit - Result
- Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- Spectrum setting:
 - Peak Setting 1 GHz to 10th harmonics of fundamental, RBW = 1 MHz, VBW = 1 MHz, Sweep = Auto
 - AV Setting 1 GHz to 10th harmonics of fundamental, RBW = 1 MHz, VBW = 10 Hz, Sweep = Auto

Plots of Spurious Emissions (Conducted Measurement)



Test Date	June 08, 2015
Environmental of Test	(23.2 ± 0.2) °C, (42 ± 0) % R.H., (100.7 ± 0.0) kPa

- Adapter: EDF0500150A1BB



[CH Low]

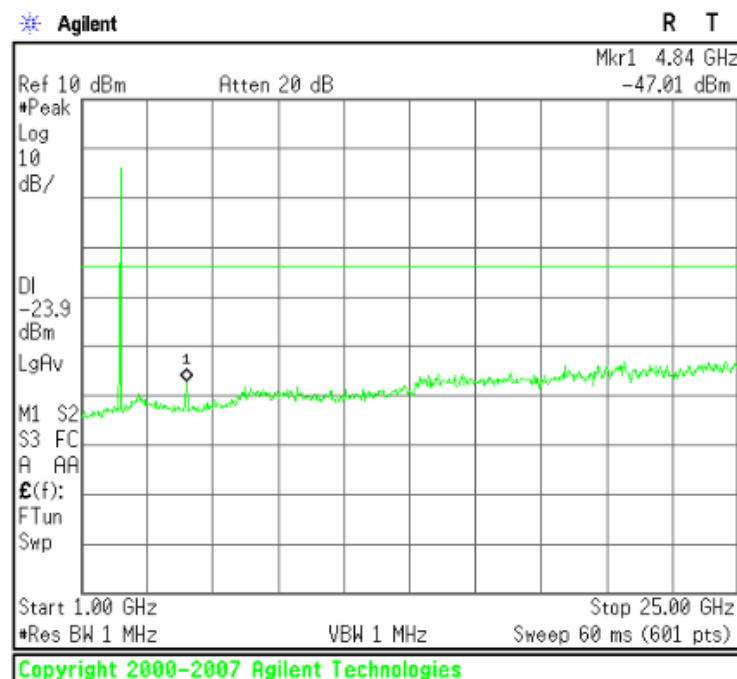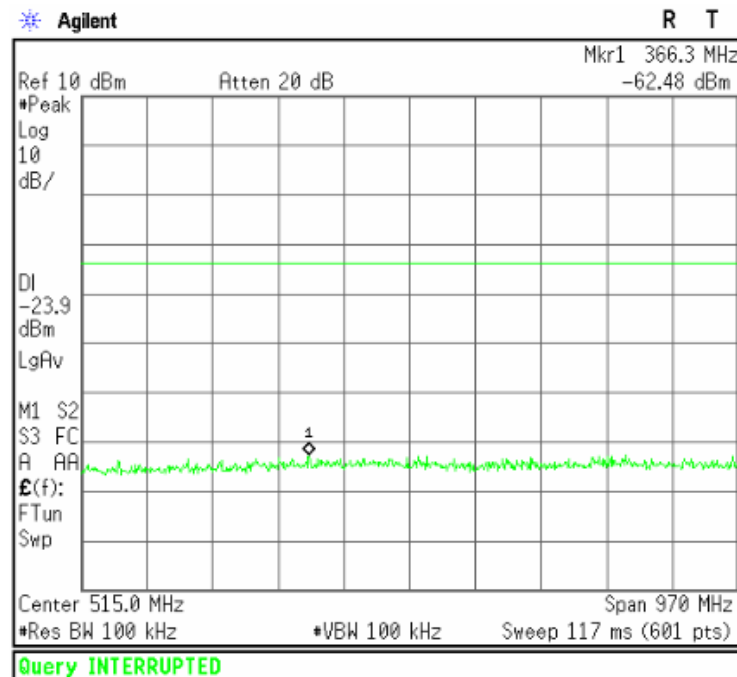

[CH Mid]

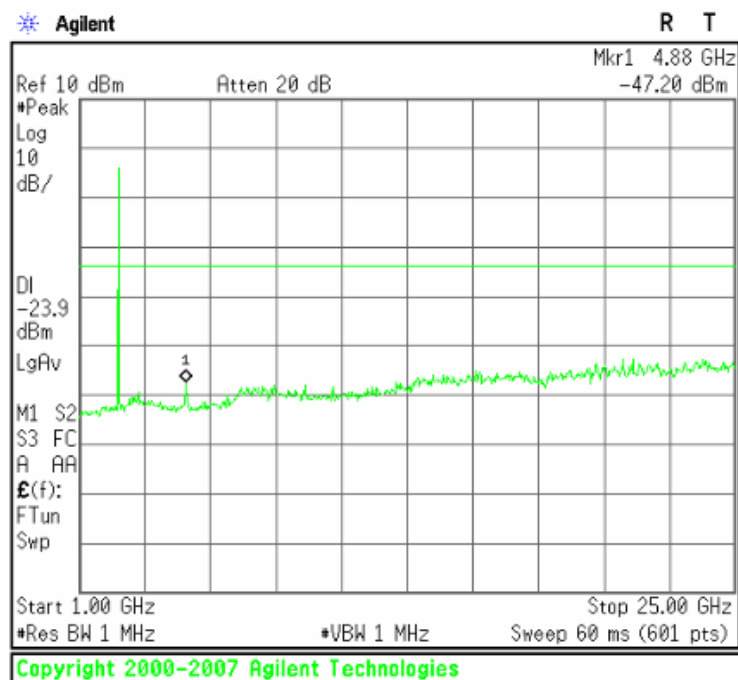
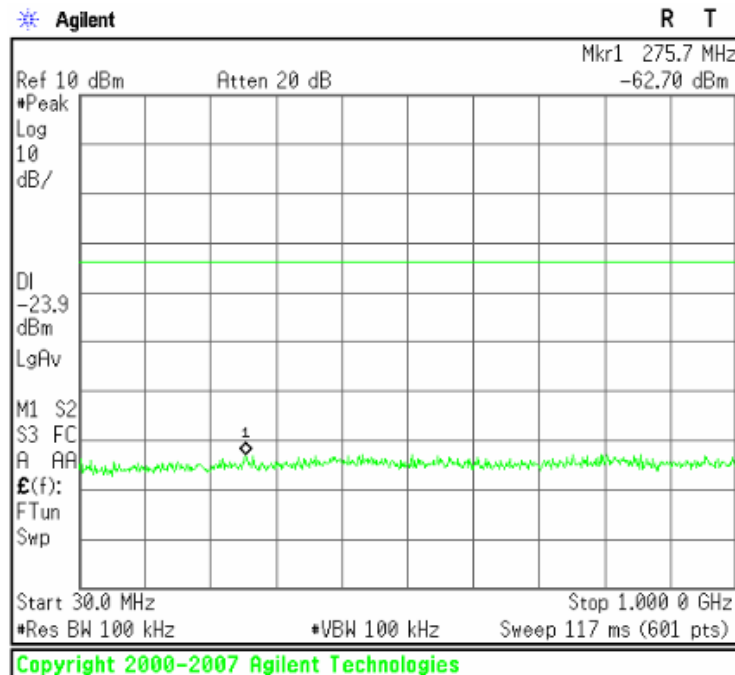


[CH High]

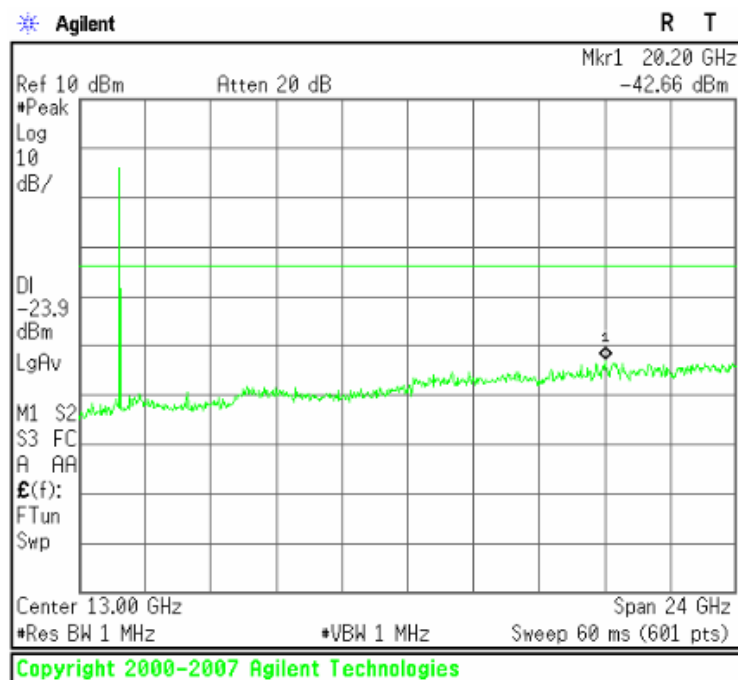
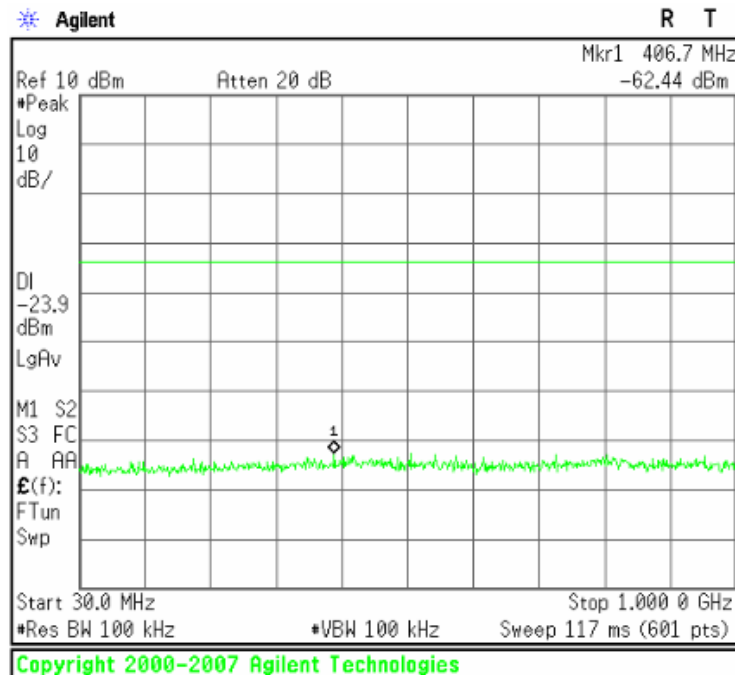


- Adapter: EDF0500150A1BB-3



[CH Low]

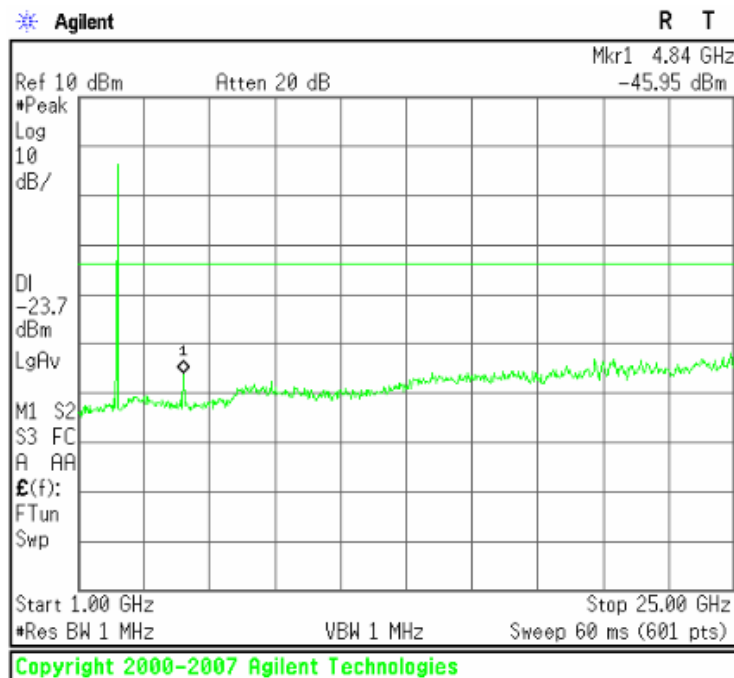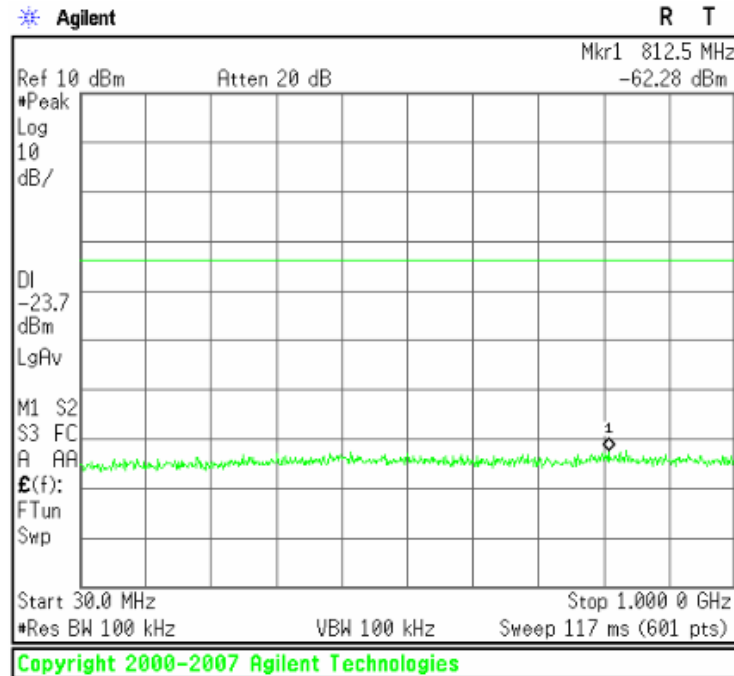

[CH Mid]

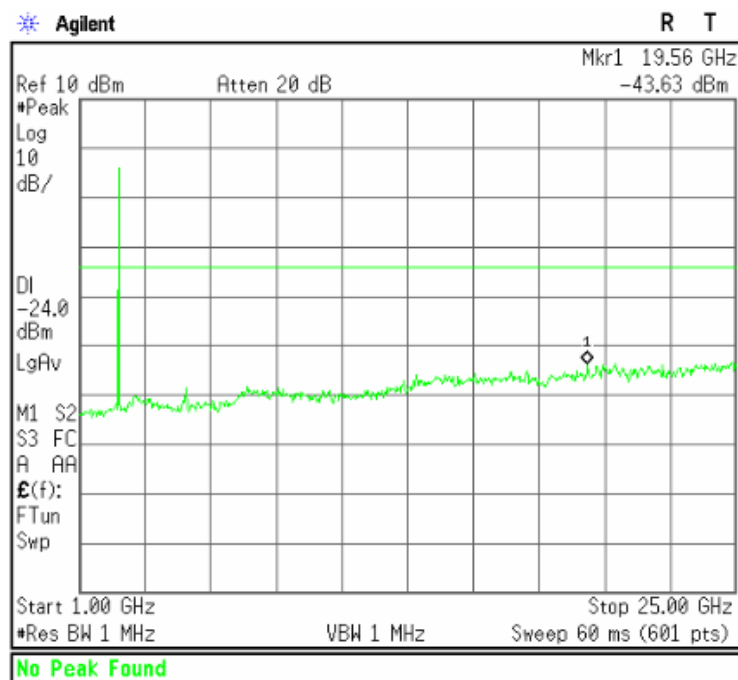
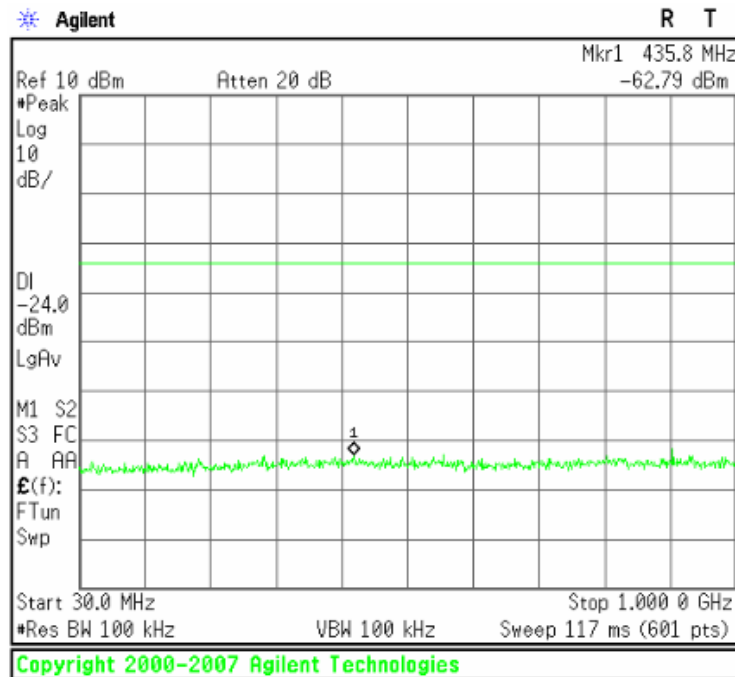


[CH High]

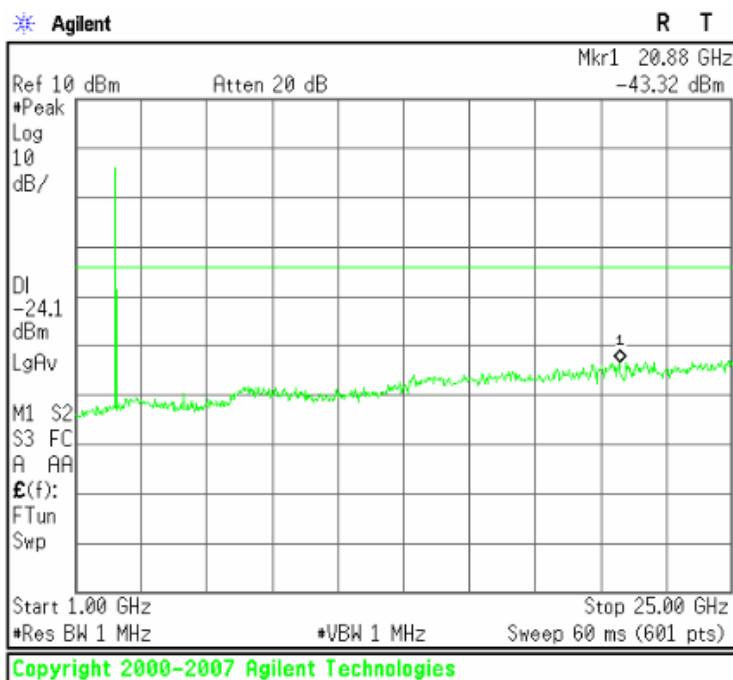
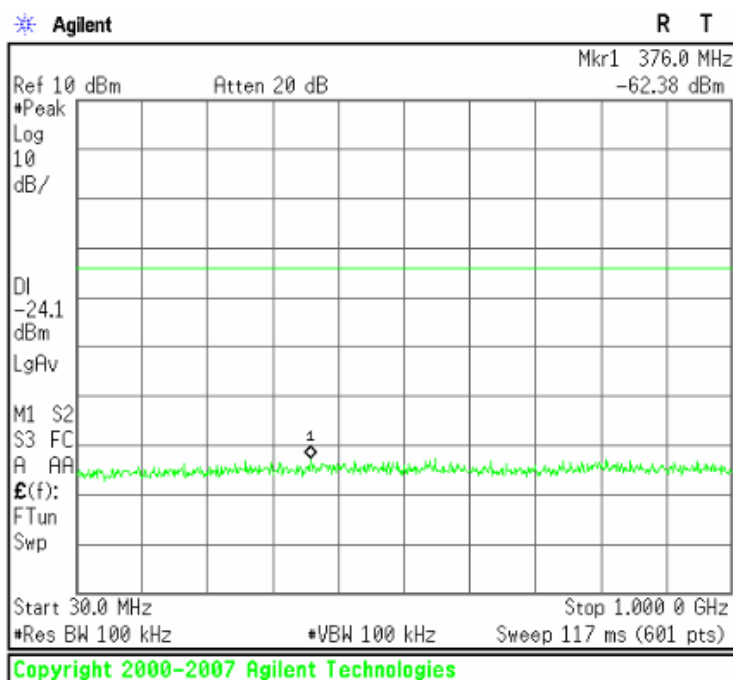


- Adapter: EDF0500150A1BA-3



[CH Low]

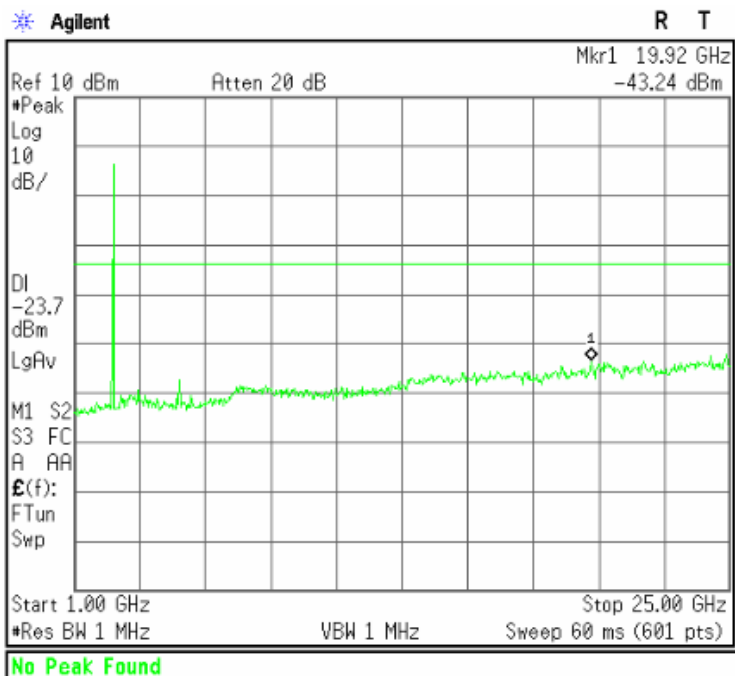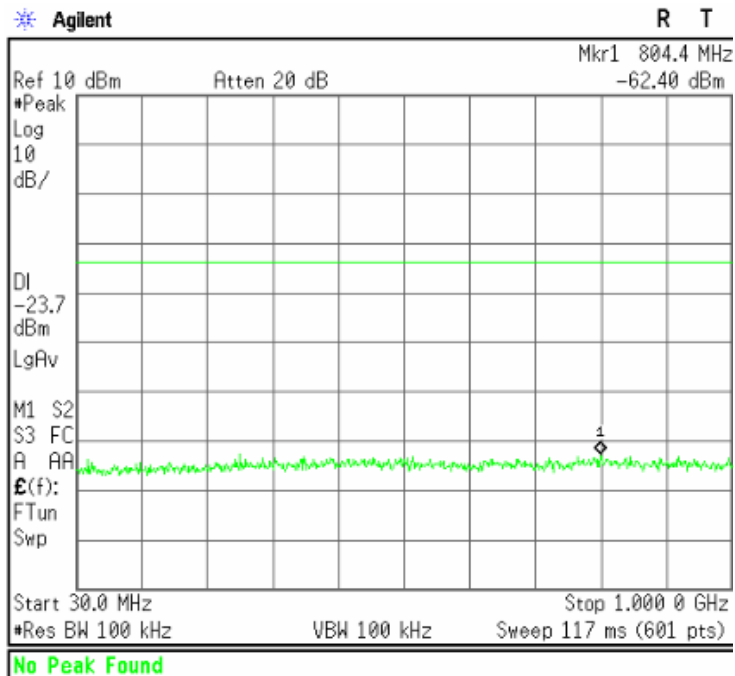

[CH Mid]

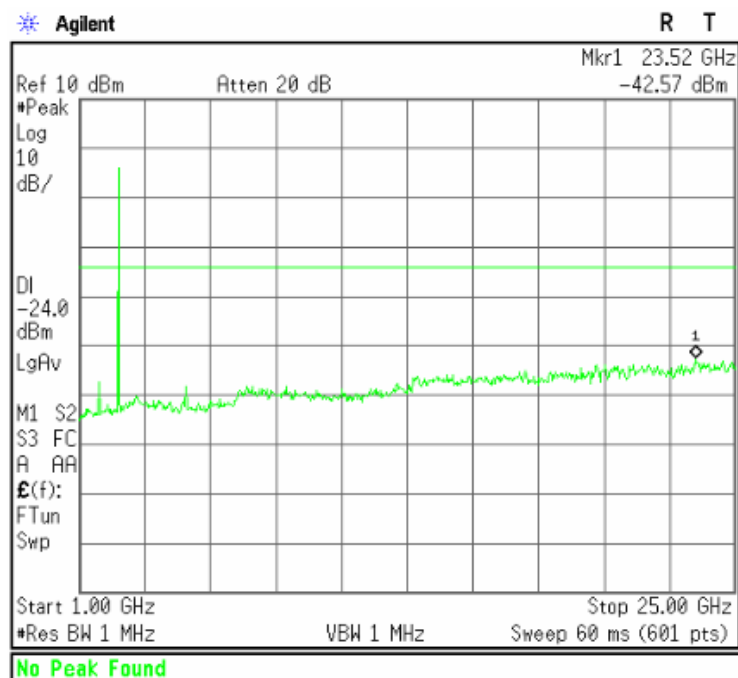
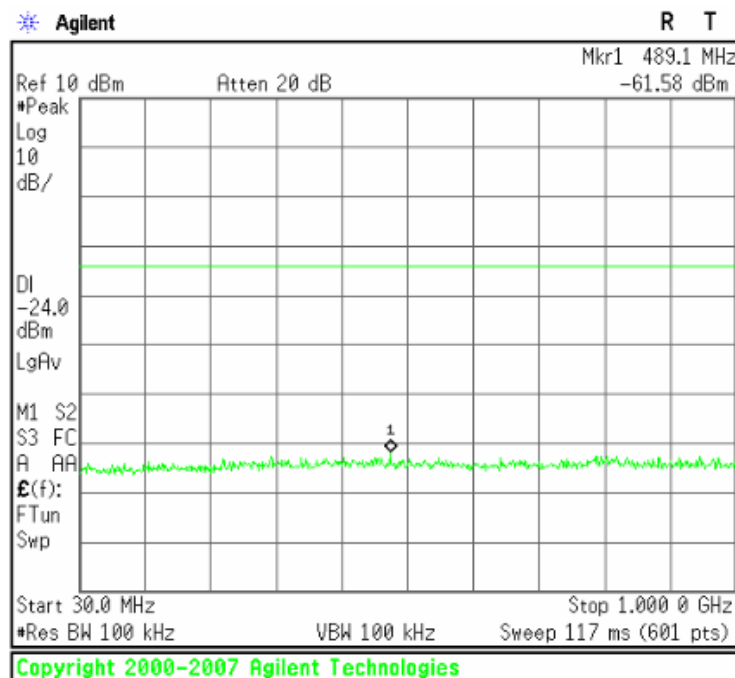


[CH High]

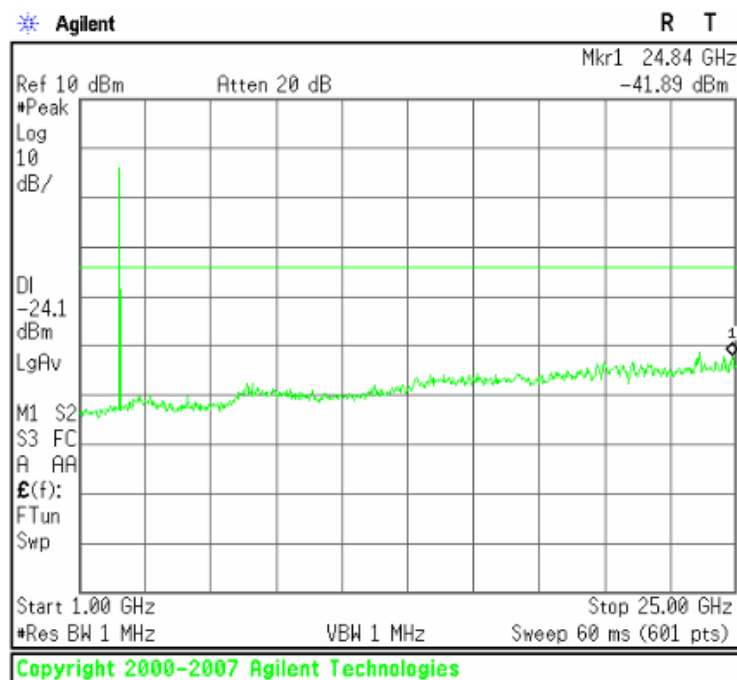
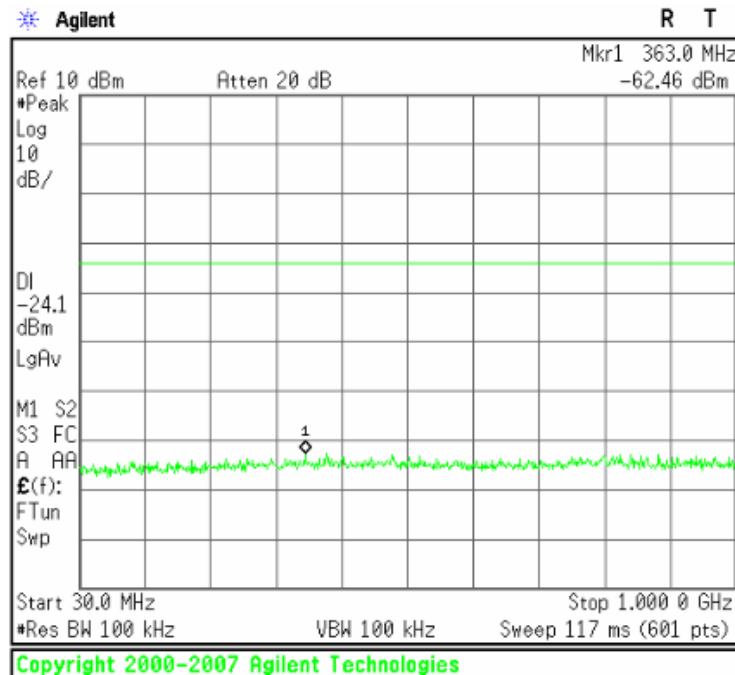


- Adapter: EDF0500150A1BA



[CH Low]

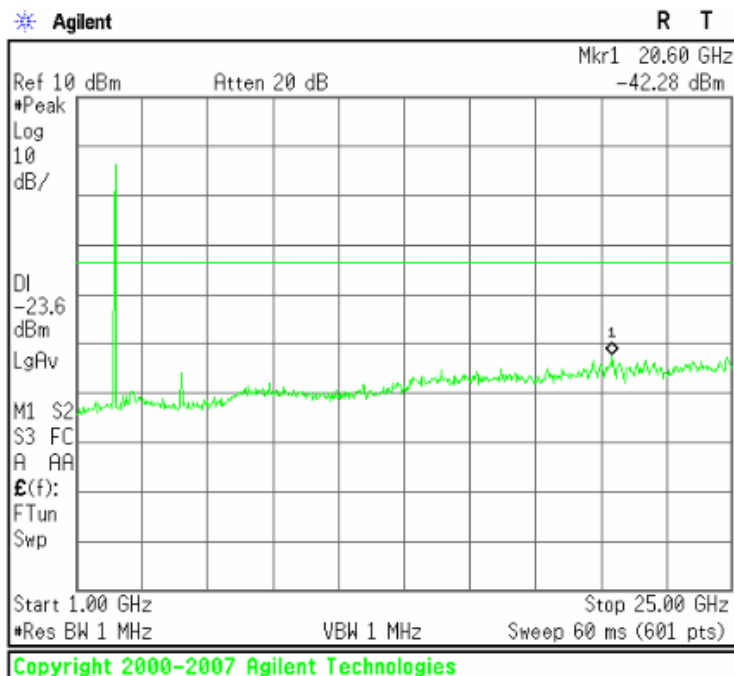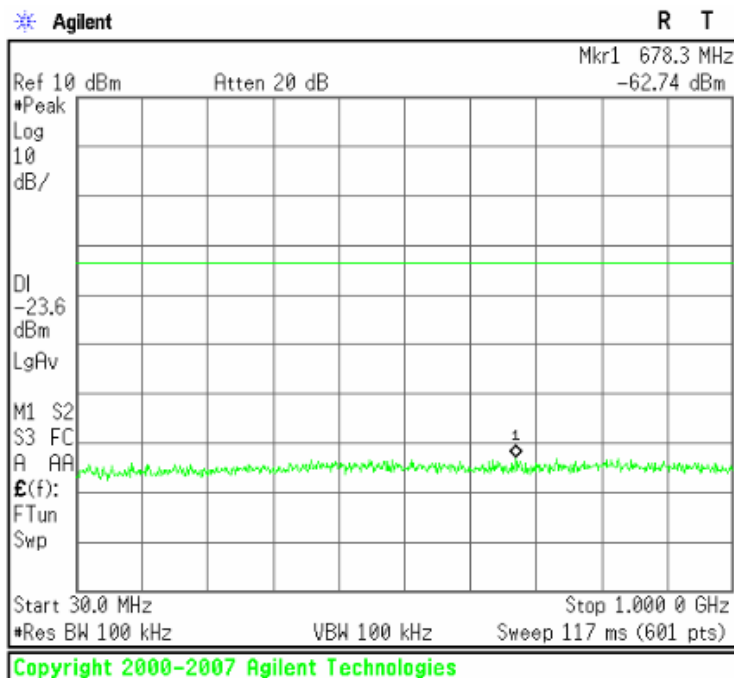

[CH Mid]

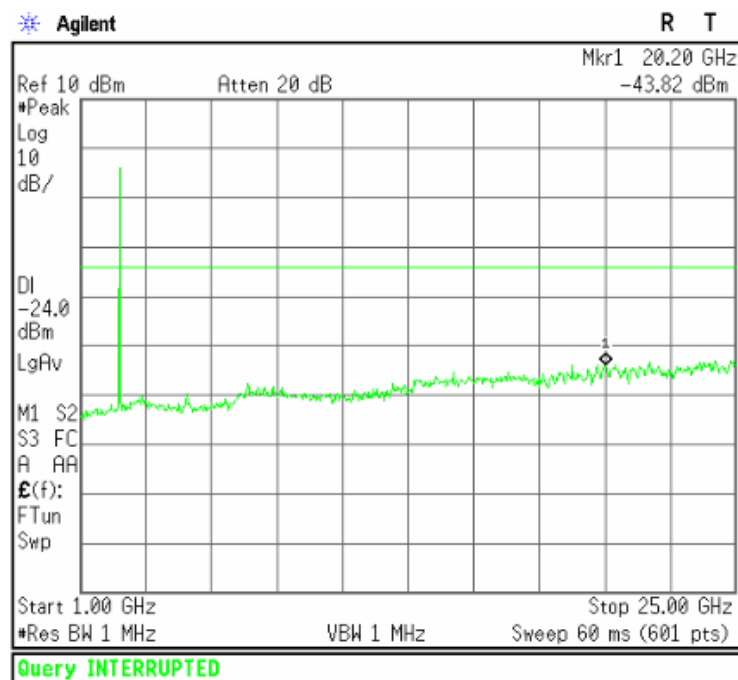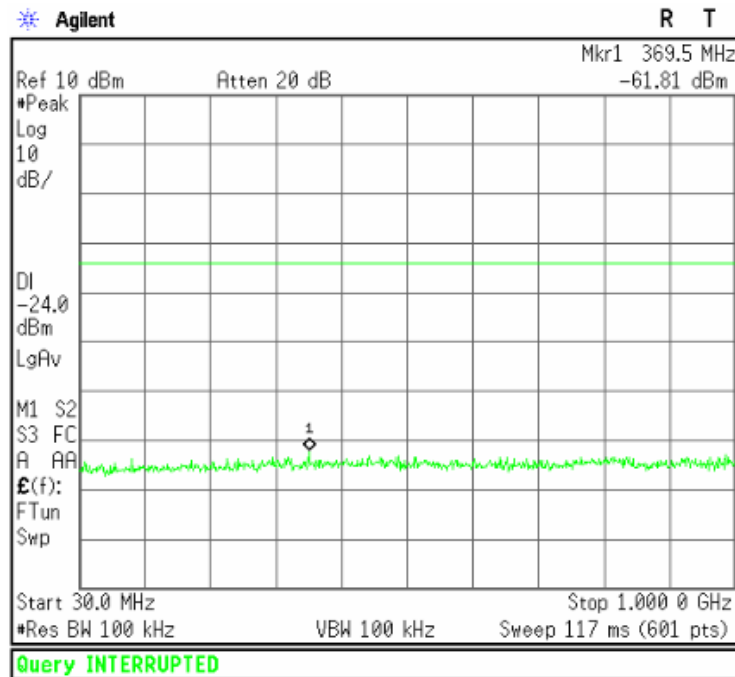

[CH High]

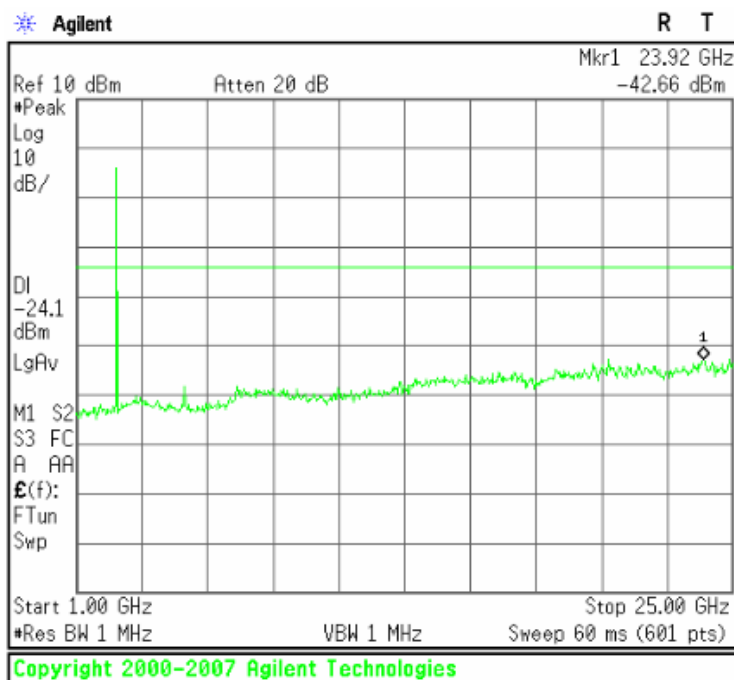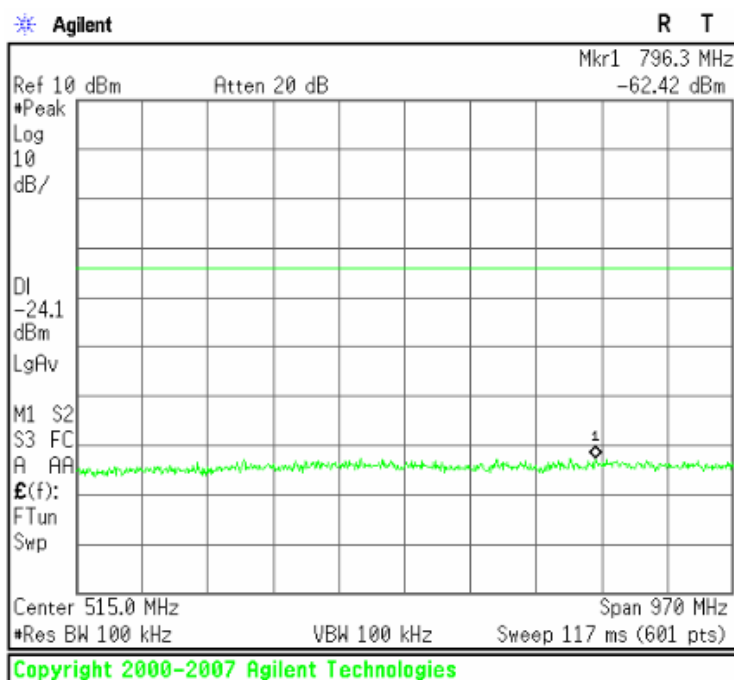

5.7 Conducted Emissions Measurement

EUT	Set-top Box / DMS2444UHDW
Limit apply to	FCC Part 15.207
Test Date	June 11, 2015
Environmental of Test	(23.9 ± 2.4) °C, (41 ± 5) % R.H., (100.5 ± 0.1) kPa
Operating Condition	RF transmitting continuously during the tested.
Result	Passed

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission [MHz]	Conducted limit [dB(μ V)]	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50

* Decreases with the logarithm of the frequency.

Test Results

- Refer to see the measured plot in next page.

Conducted Emission Test Data

The following data and graph shows the highest levels of conducted emissions on both polarizations of hot and neutral line.

Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth: 9 kHz)

NOTES:

1. Please see the measured data and graph in next page.
2. The c.f value was included the antenna factor and cable loss.
3. Result value = Reading + c.f
4. Margin value = Limit - Result
5. Measurements were performed at the AC Power Inlet in the frequency band of 150 kHz ~ 30 MHz according to the FCC Part 15 Class B.

Line: HOT (Adpater: EDF0500150A1BB)

ETL EMC Laboratory

Conducted Emission Test Result

EUT: ETLT150527.0031

Manuf:

Op Cond:

Operator:

Test Spec:

Comment: H
1

Prescan Measurement:

Detectors:

X PK / + AV

Meas Time:


see scan settings

Peaks:

16

Acc Margin:

10 dB

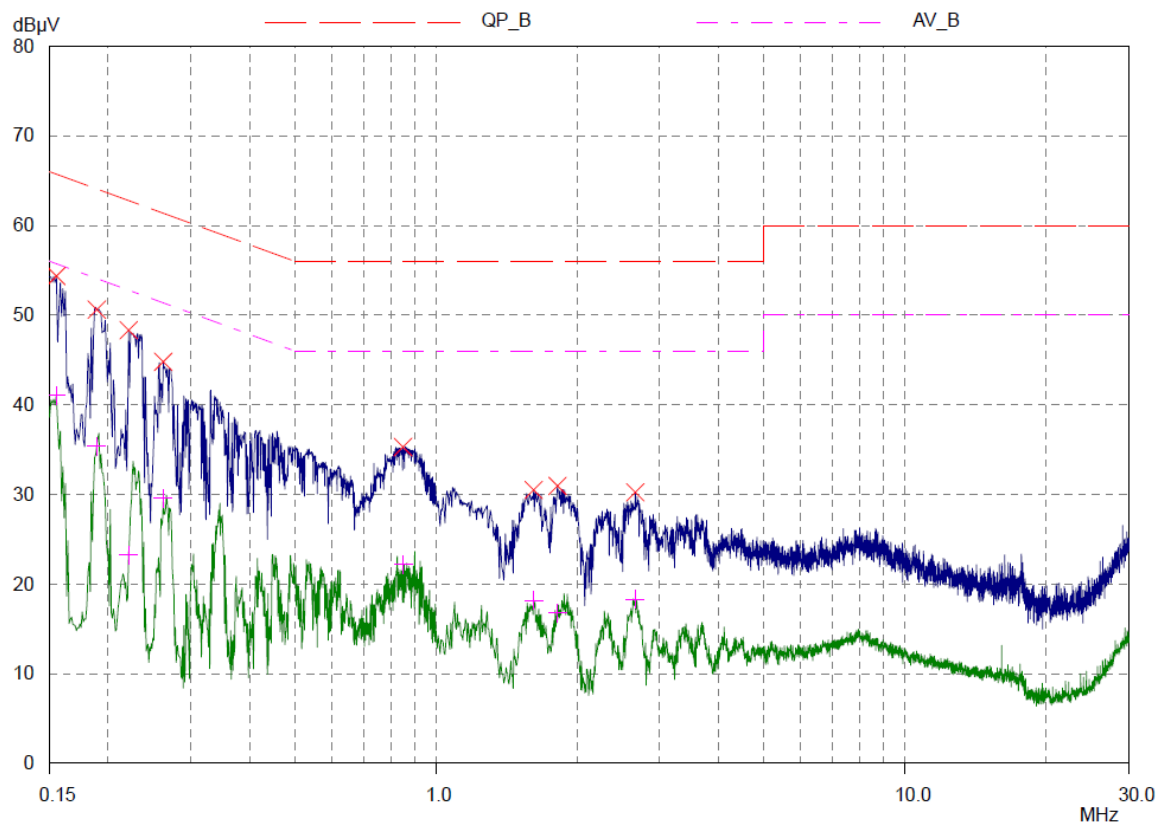

Report no. ETLT150527.0031, Page 71 of 89

ETL EMC Laboratory

Conducted Emission Test Result

EUT: ETLT150527.0031

Manuf:

Op Cond:

Operator:

Test Spec:

Comment: H
1

Prescan Measurement:	Detectors:	X PK / + AV
	Meas Time:	see scan settings
	Peaks:	16
	Acc Margin:	10 dB

Peak Search Results

Frequency MHz	PK Level dBμV	PK Limit dBμV	PK Delta dB
0.155	54.35	65.73	11.38
0.189	50.61	64.08	13.47
0.221	48.30	62.78	14.48
0.262	44.80	61.37	16.57
0.85	35.29	56.00	20.71
1.615	30.48	56.00	25.52
1.815	30.94	56.00	25.06
2.66	30.22	56.00	25.78

Frequency MHz	AV Level dBμV	AV Limit dBμV	AV Delta dB
0.155	41.05	55.73	14.68
0.189	35.37	54.08	18.71
0.221	23.23	52.78	29.55
0.262	29.55	51.37	21.82
0.85	22.17	46.00	23.83
1.615	18.18	46.00	27.82
1.815	16.79	46.00	29.21
2.66	18.27	46.00	27.73

* limit exceeded

Line: Neutral (Adpater: EDF0500150A1BB)

ETL EMC Laboratory

Conducted Emission Test Result

EUT: ETLT150527.0031

Manuf:

Op Cond:

Operator:

Test Spec:

Comment: N
1

Prescan Measurement:

Detectors:

X PK / + AV

Meas Time:


see scan settings

Peaks:

16

Acc Margin:

10 dB

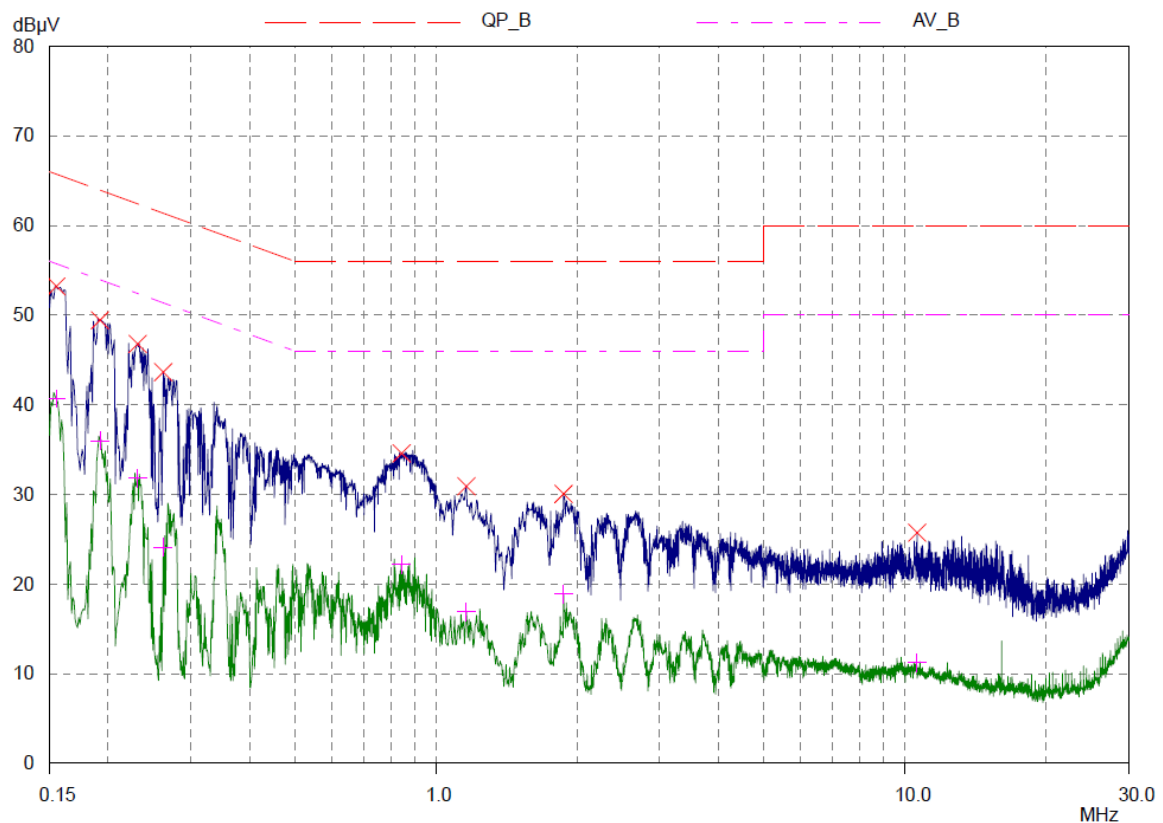

ETL EMC Laboratory

Conducted Emission Test Result

EUT: ETLT150527.0031

Manuf:

Op Cond:

Operator:

Test Spec:

Comment: N
1

Prescan Measurement:	Detectors:	X PK / + AV
	Meas Time:	see scan settings
	Peaks:	16
	Acc Margin:	10 dB

Peak Search Results

Frequency MHz	PK Level dBμV	PK Limit dBμV	PK Delta dB
0.155	53.20	65.73	12.53
0.192	49.43	63.95	14.52
0.231	46.78	62.41	15.63
0.262	43.63	61.37	17.74
0.844	34.58	56.00	21.42
1.16	30.89	56.00	25.11
1.87	30.05	56.00	25.95
10.61	25.71	60.00	34.29

Frequency MHz	AV Level dBμV	AV Limit dBμV	AV Delta dB
0.155	40.68	55.73	15.05
0.192	35.98	53.95	17.97
0.231	31.80	52.41	20.61
0.262	24.09	51.37	27.28
0.844	22.16	46.00	23.84
1.16	16.87	46.00	29.13
1.87	18.86	46.00	27.14
10.61	11.24	50.00	38.76

* limit exceeded

Line: HOT (Adpater: EDF0500150A1BB-3)

ETL EMC Laboratory

Conducted Emission Test Result

EUT: ETLT150527.0031

Manuf:


Op Cond:

Operator:

Test Spec:

Comment: H
Adapter 2

Prescan Measurement:	Detectors:	X PK / + AV
	Meas Time:	see scan settings
	Peaks:	16
	Acc Margin:	10 dB

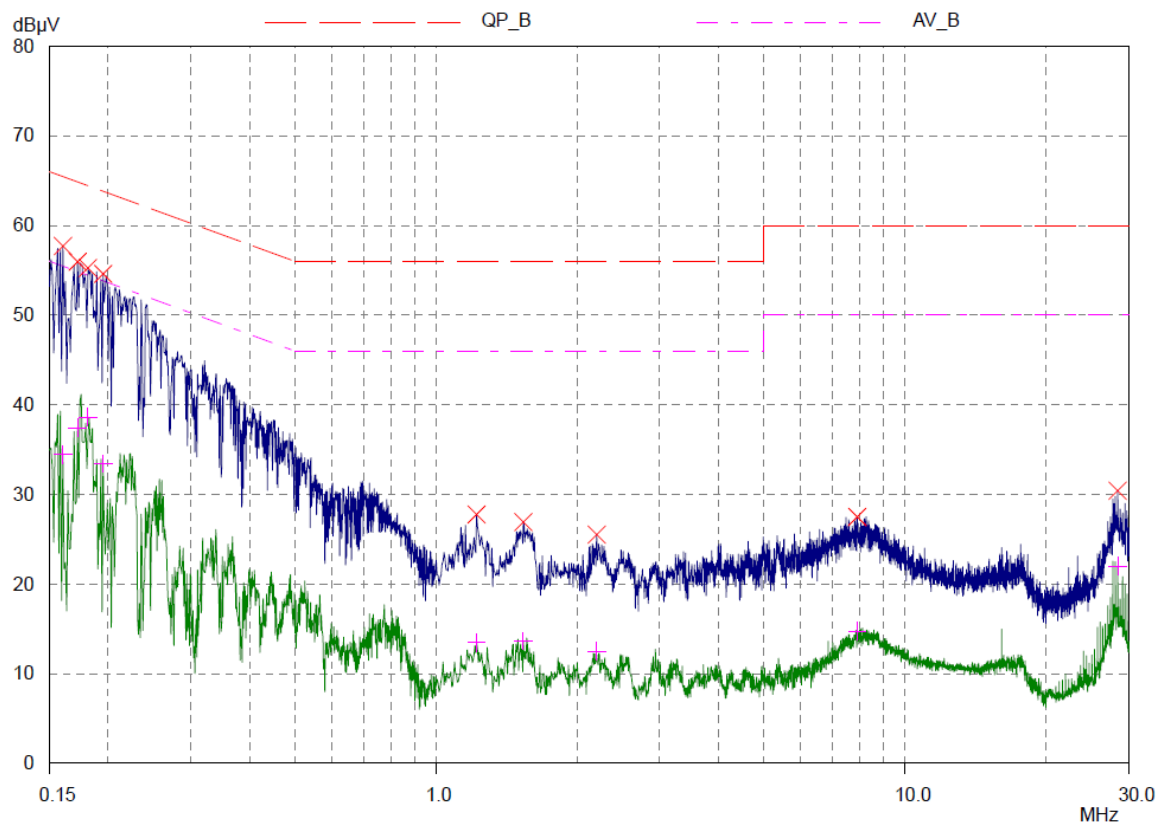

ETL EMC Laboratory

Conducted Emission Test Result

EUT: ETLT150527.0031

Manuf:

Op Cond:

Operator:

Test Spec:

Comment: H
Adapter 2

Prescan Measurement:	Detectors:	X PK / + AV
	Meas Time:	see scan settings
	Peaks:	16
	Acc Margin:	10 dB

Peak Search Results

Frequency MHz	PK Level dBμV	PK Limit dBμV	PK Delta dB
0.16	57.70	65.46	7.76
0.172	55.95	64.86	8.91
0.181	55.25	64.44	9.19
0.195	54.60	63.82	9.22
1.22	27.77	56.00	28.23
1.535	26.92	56.00	29.08
2.2	25.51	56.00	30.49
7.905	27.49	60.00	32.51
28.41	30.40	60.00	29.60

Frequency MHz	AV Level dBμV	AV Limit dBμV	AV Delta dB
0.16	34.43	55.46	21.03
0.172	37.42	54.86	17.44
0.181	38.59	54.44	15.85
0.195	33.42	53.82	20.40
1.22	13.44	46.00	32.56
1.535	13.65	46.00	32.35
2.2	12.46	46.00	33.54
7.905	14.72	50.00	35.28
28.41	21.97	50.00	28.03

* limit exceeded

Line: Neutral (Adpater: EDF0500150A1BB-3)

ETL EMC Laboratory

Conducted Emission Test Result

EUT: ETLT150527.0031

Manuf:

Op Cond:

Operator:

Test Spec:

Comment: N
2

Prescan Measurement:

Detectors:

X PK / + AV

Meas Time:


see scan settings

Peaks:

16

Acc Margin:

10 dB

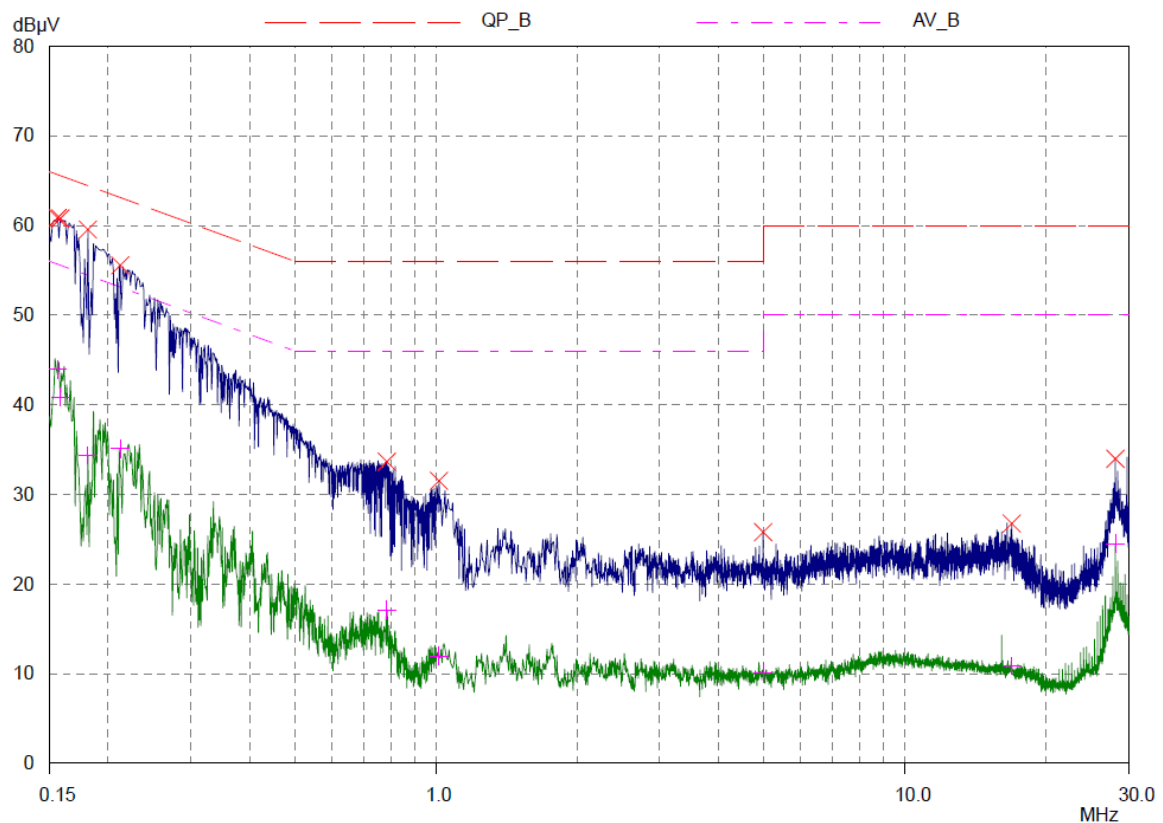

ETL EMC Laboratory

Conducted Emission Test Result

EUT: ETLT150527.0031

Manuf:

Op Cond:

Operator:

Test Spec:

Comment: N
2

Prescan Measurement:	Detectors:	X PK / + AV
	Meas Time:	see scan settings
	Peaks:	16
	Acc Margin:	10 dB

Peak Search Results

Frequency MHz	PK Level dBμV	PK Limit dBμV	PK Delta dB
0.156	60.84	65.67	4.83
0.158	60.79	65.57	4.78
0.181	59.54	64.44	4.90
0.212	55.55	63.13	7.58
0.785	33.65	56.00	22.35
1.015	31.50	56.00	24.50
4.98	25.78	56.00	30.22
16.88	26.74	60.00	33.26
28.08	33.98	60.00	26.02

Frequency MHz	AV Level dBμV	AV Limit dBμV	AV Delta dB
0.156	43.94	55.67	11.73
0.158	40.85	55.57	14.72
0.181	34.34	54.44	20.10
0.212	35.11	53.13	18.02
0.785	17.11	46.00	28.89
1.015	11.97	46.00	34.03
4.98	10.10	46.00	35.90
16.88	10.86	50.00	39.14
28.08	24.47	50.00	25.53

* limit exceeded

Line: HOT (Adpater: EDF0500150A1BA-3)

ETL EMC Laboratory

Conducted Emission Test Result

EUT: ETLT150527.0031

Manuf:


Op Cond:

Operator:

Test Spec:

Comment: H
Adapter 3

Prescan Measurement:	Detectors:	X PK / + AV
	Meas Time:	see scan settings
	Peaks:	16
	Acc Margin:	10 dB

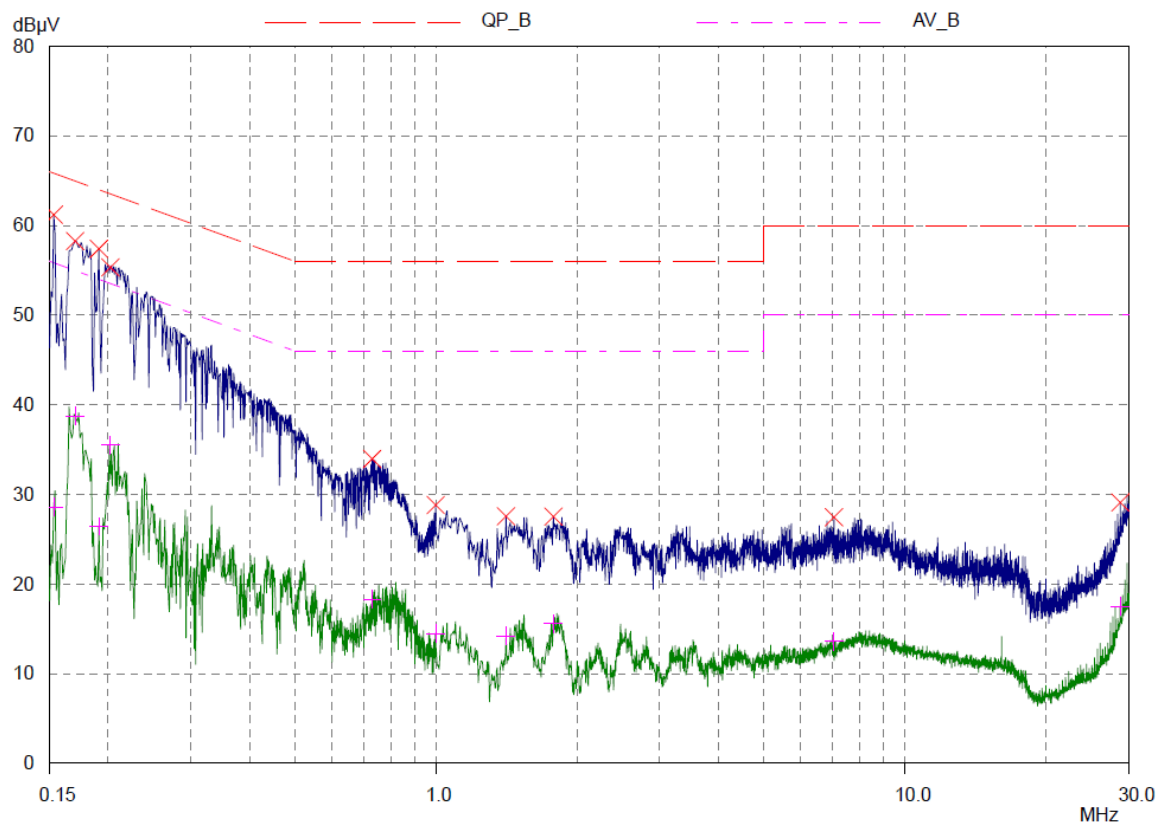

Report no. ETLT150527.0031, Page 79 of 89

ETL EMC Laboratory

Conducted Emission Test Result

EUT: ETLT150527.0031

Manuf:

Op Cond:

Operator:

Test Spec:

Comment: H
Adapter 3

Prescan Measurement: Detectors: X PK / + AV
Meas Time: see scan settings
Peaks: 16
Acc Margin: 10 dB

Peak Search Results

Frequency MHz	PK Level dBμV	PK Limit dBμV	PK Delta dB
0.153	61.20	65.84	4.64
0.17	58.25	64.96	6.71
0.191	57.39	63.99	6.60
0.202	55.32	63.53	8.21
0.731	33.95	56.00	22.05
0.998	28.81	56.00	27.19
1.41	27.55	56.00	28.45
1.78	27.51	56.00	28.49
7.055	27.45	60.00	32.55
28.76	29.08	60.00	30.92

Frequency MHz	AV Level dBμV	AV Limit dBμV	AV Delta dB
0.153	28.57	55.84	27.27
0.17	38.76	54.96	16.20
0.191	26.45	53.99	27.54
0.202	35.48	53.53	18.05
0.731	18.30	46.00	27.70
0.998	14.48	46.00	31.52
1.41	14.18	46.00	31.82
1.78	15.55	46.00	30.45
7.055	13.61	50.00	36.39
28.76	17.51	50.00	32.49

* limit exceeded

Line: Neutral (Adpater: EDF0500150A1BA-3)

ETL EMC Laboratory

Conducted Emission Test Result

EUT: ETLT150527.0031

Manuf:

Op Cond:

Operator:

Test Spec:

Comment: N
3

Prescan Measurement:

Detectors:

X PK / + AV

Meas Time:


see scan settings

Peaks:

16

Acc Margin:

10 dB

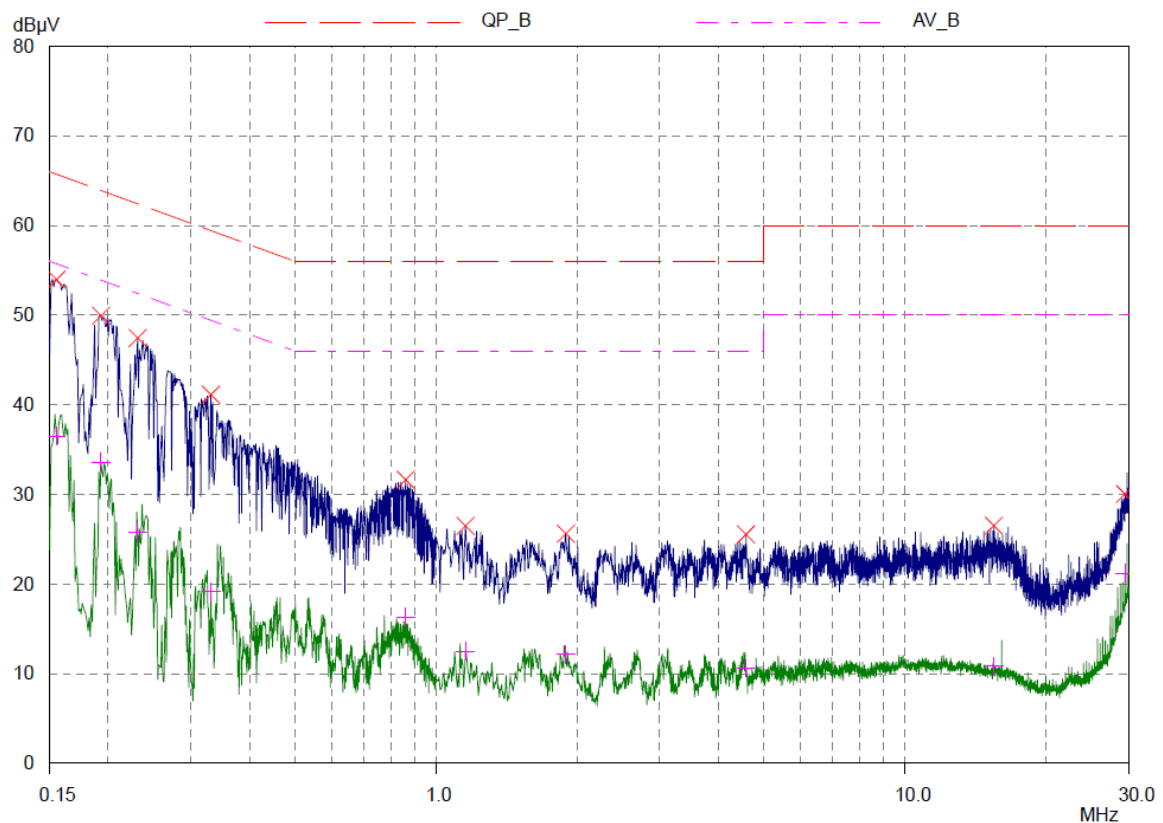

ETL EMC Laboratory

Conducted Emission Test Result

EUT: ETLT150527.0031

Manuf:

Op Cond:

Operator:

Test Spec:

Comment: N
3

Prescan Measurement:	Detectors:	X PK / + AV
	Meas Time:	see scan settings
	Peaks:	16
	Acc Margin:	10 dB

Peak Search Results

Frequency MHz	PK Level dBμV	PK Limit dBμV	PK Delta dB
0.155	53.96	65.73	11.77
0.193	49.92	63.91	13.99
0.231	47.44	62.41	14.97
0.331	41.13	59.43	18.30
0.861	31.63	56.00	24.37
1.155	26.48	56.00	29.52
1.89	25.61	56.00	30.39
4.58	25.53	56.00	30.47
15.47	26.51	60.00	33.49
29.43	30.04	60.00	29.96

Frequency MHz	AV Level dBμV	AV Limit dBμV	AV Delta dB
0.155	36.50	55.73	19.23
0.193	33.61	53.91	20.30
0.231	25.75	52.41	26.66
0.331	19.15	49.43	30.28
0.861	16.31	46.00	29.69
1.155	12.50	46.00	33.50
1.89	12.13	46.00	33.87
4.58	10.60	46.00	35.40
15.47	10.85	50.00	39.15
29.43	21.16	50.00	28.84

* limit exceeded

Line: HOT (Adpater: EDF0500150A1BA)

ETL EMC Laboratory

Conducted Emission Test Result

EUT: ETLT150527.0031

Manuf:

Op Cond:

Operator:

Test Spec:

Comment: H
4

Prescan Measurement:

Detectors:

X PK / + AV

Meas Time:


see scan settings

Peaks:

16

Acc Margin:

10 dB

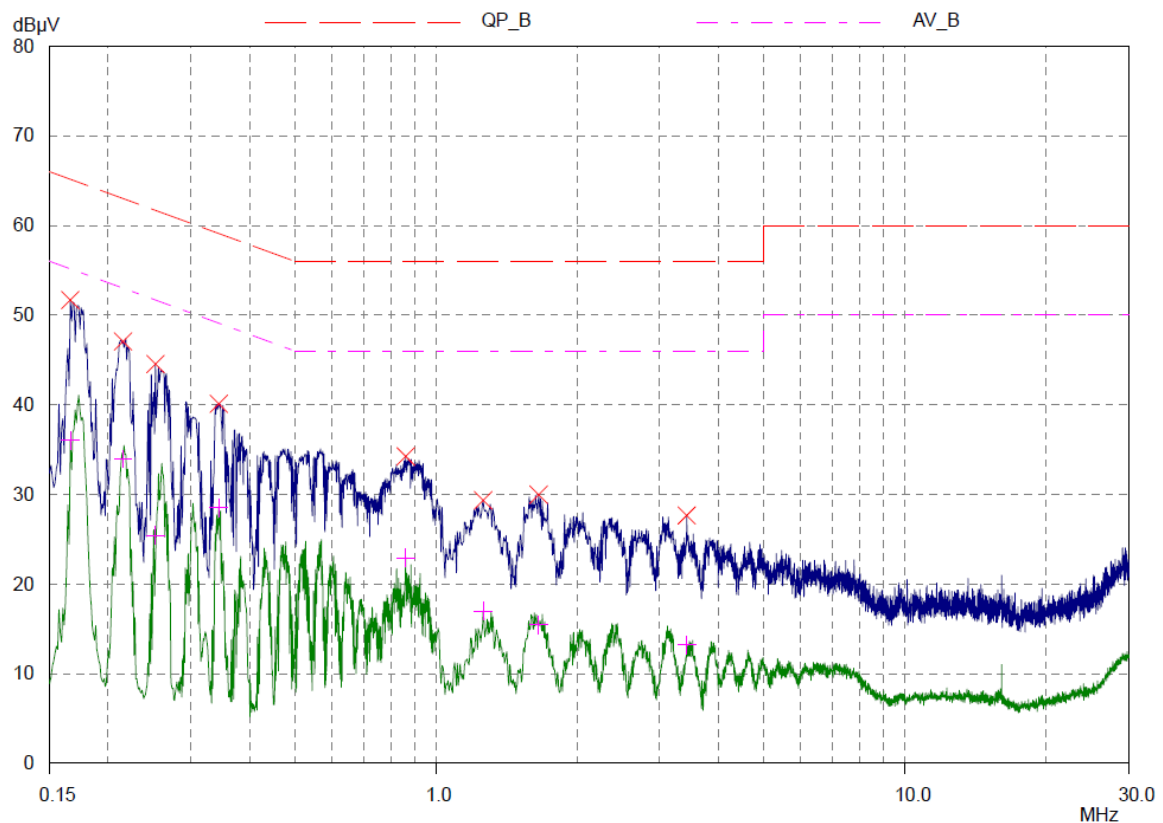

Report no. ETLT150527.0031, Page 83 of 89

ETL EMC Laboratory

Conducted Emission Test Result

EUT: ETLT150527.0031

Manuf:

Op Cond:

Operator:

Test Spec:

Comment: H
4

Prescan Measurement: Detectors: X PK / + AV
Meas Time: see scan settings
Peaks: 16
Acc Margin: 10 dB

Peak Search Results

Frequency MHz	PK Level dBμV	PK Limit dBμV	PK Delta dB
0.166	51.67	65.16	13.49
0.215	47.06	63.01	15.95
0.252	44.54	61.69	17.15
0.344	40.11	59.11	19.00
0.861	34.24	56.00	21.76
1.26	29.35	56.00	26.65
1.655	29.98	56.00	26.02
3.425	27.65	56.00	28.35

Frequency MHz	AV Level dBμV	AV Limit dBμV	AV Delta dB
0.166	36.02	55.16	19.14
0.215	33.95	53.01	19.06
0.252	25.41	51.69	26.28
0.344	28.48	49.11	20.63
0.861	22.92	46.00	23.08
1.26	16.97	46.00	29.03
1.655	15.48	46.00	30.52
3.425	13.23	46.00	32.77

* limit exceeded

Line: Neutral (Adpater: EDF0500150A1BA)

ETL EMC Laboratory

Conducted Emission Test Result

EUT: ETLT150527.0031

Manuf:

Op Cond:

Operator:

Test Spec:

Comment: N
4

Prescan Measurement:

Detectors:

X PK / + AV

Meas Time:


see scan settings

Peaks:

16

Acc Margin:

10 dB

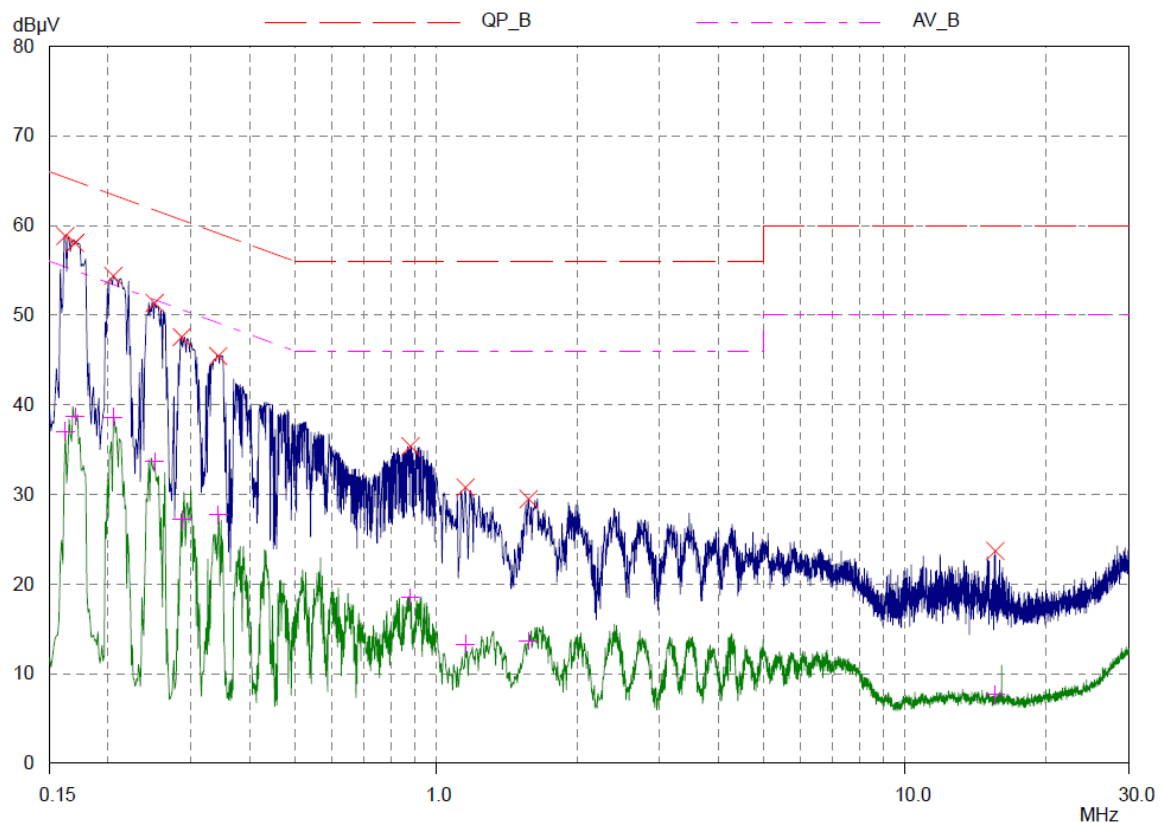

ETL EMC Laboratory

Conducted Emission Test Result

EUT: ETLT150527.0031

Manuf:

Op Cond:

Operator:

Test Spec:

Comment: N
4

Prescan Measurement:	Detectors:	X PK / + AV
	Meas Time:	see scan settings
	Peaks:	16
	Acc Margin:	10 dB

Peak Search Results

Frequency MHz	PK Level dBμV	PK Limit dBμV	PK Delta dB
0.162	58.81	65.36	6.55
0.17	58.04	64.96	6.92
0.205	54.37	63.41	9.04
0.251	51.34	61.72	10.38
0.287	47.54	60.61	13.07
0.343	45.42	59.13	13.71
0.882	35.37	56.00	20.63
1.155	30.77	56.00	25.23
1.575	29.49	56.00	26.51
15.57	23.69	60.00	36.31

Frequency MHz	AV Level dBμV	AV Limit dBμV	AV Delta dB
0.162	36.99	55.36	18.37
0.17	38.71	54.96	16.25
0.205	38.57	53.41	14.84
0.251	33.65	51.72	18.07
0.287	27.21	50.61	23.40
0.343	27.73	49.13	21.40
0.882	18.52	46.00	27.48
1.155	13.27	46.00	32.73
1.575	13.63	46.00	32.37
15.57	7.66	50.00	42.34

* limit exceeded

5.8 Radio Frequency Exposure

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this Chapter.

Limit

Limits for general population/Uncontrolled exposure

Frequency Range [MHz]	Electric Field Strength (E) [V/m]	Magnetic Field Strength (H) [A/m]	Power Density (S) [mW/cm ²]	Averaging Time E ² , H ² or S [minutes]
0.3 - 1.34	614	1.63	(100)	30
1.34 - 30	824/f	2.19/f	(180/f ²)	30
30 - 300	27.5	0.073	0.2	30
300 - 1 500	--	--	f/1 500	30
1 500 - 100 000	--	--	1.0	30

f = frequency in MHz

*Plane-wave equivalent power density

MPE Prediction

Predication of MPE limit at a given distance.

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG / 4\pi R^2$$

Where: S = power density (in appropriate units, e.g. mW/cm²)
P = power input to the antenna (in appropriate units, e.g., mW)
G = power gain of the antenna in the direction of interest relative to an isotropic radiator
R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Max tune up power	: -1.33 dBm (0.736 mW)
Prediction distance	: 20 cm
Predication frequency	: 2 425 MHz
Antenna gain(Max)	: -2.30 dBi (0.588 numeric)
Power density at predication frequency at 20 cm	: 0.000 086 24 mW/cm ²
MPE Limit for	: 1 mW/cm ²

Test Result

The power density level at 20 cm is 0.000 086 24 mW/cm² which is below the uncontrolled exposure limit of 1 mW/cm² at 2 425 MHz to 2 475 MHz.

6. SAMPLE CALCULATION

Sample Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - PA$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

PA* = Preamplifier Factor

* PA is only be used for the measuring frequency above 1 GHz.

$$dB(\mu V) = 20 \log_{10} (\mu V) : \text{Equation}$$

$$dB(\mu V) = dBm + 107$$

Example : @ 38.24 MHz

$$\text{Class B Limit} = 40.00 \text{ dB}(\mu V/m)$$

$$\text{Reading} = 9.67 \text{ dB}(\mu V)$$

$$\text{Antenna Factor + Cable loss} = 11.03 + 1.00 = 12.03 \text{ dB}(\mu V/m)$$

$$\text{Total} = 21.70 \text{ dB}(\mu V/m)$$

$$\text{Margin} = 40.00 - 21.70 = 18.30 \text{ dB}$$

$$= 18.30 \text{ dB below Limit}$$

7. List of test equipments used for measurements

	Test Equipment	Model	Mfg.	Serial No.	Cal. Date	Cal. Due Date
☒	EMI Test Receiver	ESVS 10	R&S	835165/001	15.03.17	16.03.17
☒	EMI Test Receiver	ESPI3	R&S	100478	14.09.03	15.09.03
☒	EMI Test Receiver	ESCS30	R&S	847793/005	15.03.17	16.03.17
☒	EMI Test Receiver	ESCI7	R&S	100851	14.09.03	15.09.03
☒	Two-Line V-Network	ENV216	R&S	958599/106	15.03.17	16.03.17
☒	LISN	3816-2	EMCO	1002	15.04.22	16.04.22
☒	Loop Antenna	AL-130	EMCO	121025	14.04.08	16.04.08
☒	LogBicon Antenna	VULB9160	Schwarzbeck	3082	13.07.25	15.07.25
☒	Horn Antenna	BBHA 9120D	Schwarzbeck	826	14.04.02	16.04.02
☒	PSA Series Spectrum Analyzer	E4440A	Agilent	US40420382	14.09.13	15.09.13
☒	Amplifier	TK-PA18	TESTEK	120020	14.09.04	15.09.04
☒	Attenuator	BW-S10-2W263+	Mini-Circuits	NONE	15.03.16	16.03.16
☒	AC Power Source	6405-12230-3	Extech Electronics	1390168	N/A	N/A
☒	Band Reject Filter	WRCGV 2402/2480-2382/2500-52/10SS	Wainwright Instrument	2	14.09.03	15.09.03
☒	Highpass Filter	WHKX3.0 /18G-6SS	Wainwright Instrument	15	15.03.17	16.03.17
☒	Controller	HD2000	HD GmbH	C/125	N/A	N/A
☒	Turn-Table	TT 1.35 SI	SES	-	N/A	N/A
☒	Antenna Master	AM 4.5	SES	-	N/A	N/A