

# TEST REPORT

## Part 15E

**Equipment under test** Flat Panel Detector

**Model name** FXRD-1012NAW

**Derivative model** FXRD-1012NBW

**FCC ID** PFRFXRD-1012NAW

**Trade mark**



vieworks

**Applicant** Vieworks Co., Ltd.

**Manufacturer** Vieworks Co., Ltd.

**Date of test(s)** 2015.01.19 ~ 2015.01.23

**Date of issue** 2015.08.24

**Issued to**

**Vieworks Co., Ltd.**

41-3, Burim-ro 170beon-gil, Dongan-gu, Anyang-si,

Gyeonggi-do, Republic of KOREA

Tel: +82-70-4496-1860 / Fax: +82-31-386-8631

**Issued by**

**KES Co., Ltd.**

C-3701, Simin-daero 365-40, Dongan-gu, Anyang-si,

Gyeonggi-do, 431-716, Korea

473-29, Gayeo-ro, Yeosu-si, Gyeonggi-do, Korea

Tel: +82-31-425-6200 / Fax: +82-31-424-0450

| Test and report completed by :                                                      | Report approval by :                                                                 |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  |  |
| Kwang-Yeol Choo / Test engineer                                                     | Jeff Do / Technical manager                                                          |



---

### Revision history

| Revision | Date of issue | Test report No.   | Description                         |
|----------|---------------|-------------------|-------------------------------------|
| -        | 2015.01.29    | KES-RF-15T0004    | Initial                             |
| R1       | 2015.08.24    | KES-RF-15T0004-R1 | A revision by typo of power current |



---

## TABLE OF CONTENTS

|             |                                                      |    |
|-------------|------------------------------------------------------|----|
| 1.          | General information .....                            | 4  |
| 1.1.        | EUT description .....                                | 4  |
| 1.2.        | Test frequency .....                                 | 4  |
| 1.3.        | Information about derivative model .....             | 4  |
| 1.4.        | Device modifications.....                            | 4  |
| 1.5.        | Device information.....                              | 4  |
| 1.6.        | Test facility .....                                  | 5  |
| 1.7.        | Laboratory accreditations and listings.....          | 5  |
| 1.8.        | Directional antenna gain for MIMO (correlated) ..... | 5  |
| 2.1         | Summary of tests .....                               | 6  |
| 2.2         | Worst-Case and Mode.....                             | 6  |
| 3.          | Test results.....                                    | 7  |
| 3.1         | Radiated spurious emissions.....                     | 7  |
| Appendix A. | Measurement equipment .....                          | 17 |
| Appendix B. | Test setup photo .....                               | 18 |

## 1. General information

### 1.1. EUT description

|                             |                                                                                                                                                                                                                                                                                           |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Equipment under test</b> | Flat Panel Detector                                                                                                                                                                                                                                                                       |
| <b>Model name</b>           | FXRD-1012NAW                                                                                                                                                                                                                                                                              |
| <b>Serial number</b>        | N/A                                                                                                                                                                                                                                                                                       |
| <b>Frequency range</b>      | 2 412 MHz ~ 2 462 MHz(802.11b/g/n_HT20), 2 422 MHz ~ 2 452 MHz(802.11n_HT40)<br>5 745 MHz ~ 5 825 MHz(802.11a/n_HT20), 5 755 MHz ~ 5 795 MHz(802.11n_HT40)<br>5 180 MHz ~ 5 240 MHz(802.11a/n_HT20), 5 190 MHz ~ 5 230 MHz(802.11n_HT40)                                                  |
| <b>Modulation technique</b> | CCK(dBPSK, DQPSK), OFDM (BPSK, QPSK, 16QAM, 64QAM)                                                                                                                                                                                                                                        |
| <b>Number of channels</b>   | 2 412 MHz ~ 2 462 MHz(802.11b/g/n_HT20) : 11 ch<br>2 422 MHz ~ 2 452 MHz(802.11n_HT40) : 7 ch<br>5 745 MHz ~ 5 825 MHz(802.11a/n_HT20) : 5 ch<br>5 755 MHz ~ 5 795 MHz(802.11n_HT40) : 2 ch<br>5 180 MHz ~ 5 240 MHz(802.11a/n_HT20) : 4 ch<br>5 190 MHz ~ 5 230 MHz(802.11n_HT40) : 2 ch |
| <b>Antenna type</b>         | PCB antenna(I-PEX)                                                                                                                                                                                                                                                                        |
| <b>Power source</b>         | 24 V dc // 0.8A                                                                                                                                                                                                                                                                           |
| <b>Note</b>                 | Contains transmitter Module. (FCC ID : RYK-WPEA-121N)<br>- Contains transmitter Module does not use DFS band.<br>- Duty cycle is > 98%                                                                                                                                                    |

### 1.2. Test frequency

|                        | <b>Low channel</b> | <b>Middle channel</b> | <b>High channel</b> | <b>Mode</b>    |
|------------------------|--------------------|-----------------------|---------------------|----------------|
| <b>Frequency (MHz)</b> | 5 180              | 5 220                 | 5 240               | 802.11a/n_HT20 |
|                        | 5 190              | -                     | 5 230               | 802.11n_HT40   |

### 1.3. Information about derivative model

This is to notify that FXRD-1012NAW / FXRD-1012NBW are same Hardware, Software and components. But \*scintillator layer are different. Scintillator is a phosphor that produces scintillations.

|              |                                                             |
|--------------|-------------------------------------------------------------|
| <b>Model</b> | <b>Scintillator layer</b>                                   |
| FXRD-1012NAW | CsI (Cesium Iodide)                                         |
| FXRD-1012NBW | Gd <sub>2</sub> O <sub>2</sub> S:Tb (Gadolinium Oxysulfide) |

### 1.4. Device modifications

N/A

### 1.5. Device information

### 1.6. Test facility

C-3701, Simin-daero 365-40, Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea  
473-29, Gayeo-ro, Yeosu-si, Gyeonggi-do, Korea

The open area test site is constructed in conformance with the requirements ANSI C63.4-2003/2009.

### 1.7. Laboratory accreditations and listings

| Country | Agency | Scope of accreditation                                                                                                               | Certificate No. |
|---------|--------|--------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| USA     | FCC    | 3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements.                                     | 343818          |
| KOREA   | KC     | EMI<br>(10 meter Open Area Test Site and two conducted sites)<br>Radio<br>(3 & 10 meter Open Area Test Sites and one conducted site) | KR0100          |
| CANADA  | IC     | 3 & 10 meter Open Area Test Sites and one conducted site                                                                             | 4769B-1         |

### 1.8. Directional antenna gain for MIMO (correlated)

Model : AEi-2450/5500DP-C1.13[Vieworks]

| ANT1 Gain (dBi) | ANT2 Gain (dBi) | Total Gain (dBi) | Note        |
|-----------------|-----------------|------------------|-------------|
| 1.99            | 1.99            | 5.00             | For 5.2 GHz |

-Ant Gain =  $G_{ANT} + 10 \log(N)$

## 2.1 Summary of tests

| FCC Part Sections | Parameter                  | Test results |
|-------------------|----------------------------|--------------|
| 15.205<br>15.209  | Radiated spurious emission | Pass         |
| 15.407(b)         | Undesirable emission       | Pass         |

### Test procedures;

The measurement procedures described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2003/2009), the guidance provided in KDB 558074 D01 v03r02, KDB 662911 D01 v02r01 were used in the measurement of the EUT.

## 2.2 Worst-Case and Mode

The worst-case data rates are determined to be as follows for each mode, based on the investigations by measuring the average power, peak power across all the data rates.  
all tests were made with following data rates:

802.11a mode : 6 Mbps.

802.11n HT20 mode : MCS8.

802.11n HT40 mode : MCS8.

The EUT antenna has been tested in X, Y and Z axis.


The worst case position is X-axis(below 1GHz), Y-axis(above 1GHz). Each axis were recorded in this report.

### 3. Test results


#### 3.1 Radiated spurious emissions

##### Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

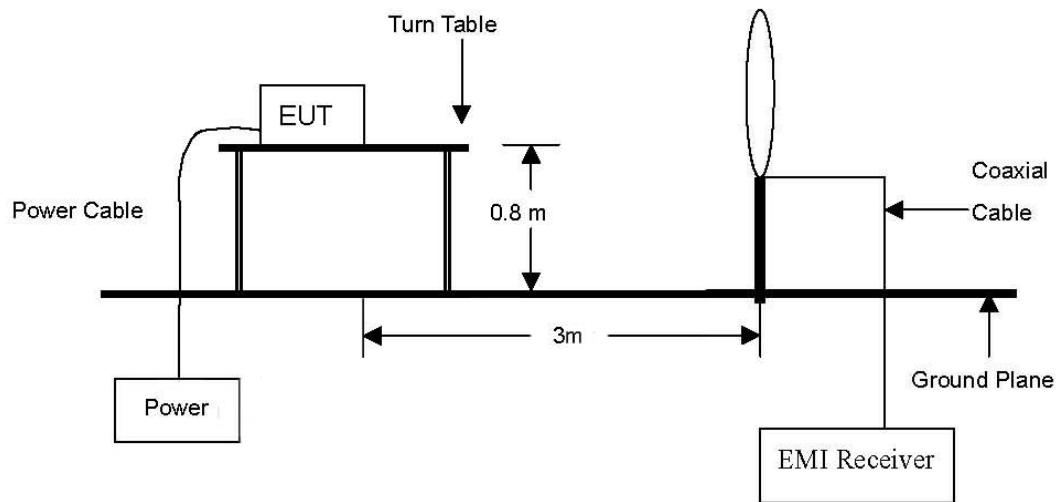

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

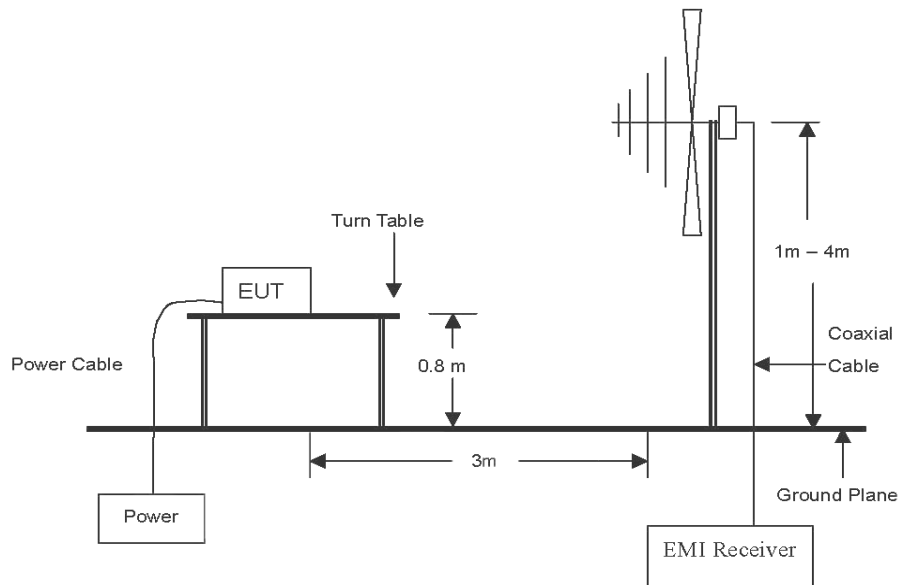

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 40 GHz emissions.

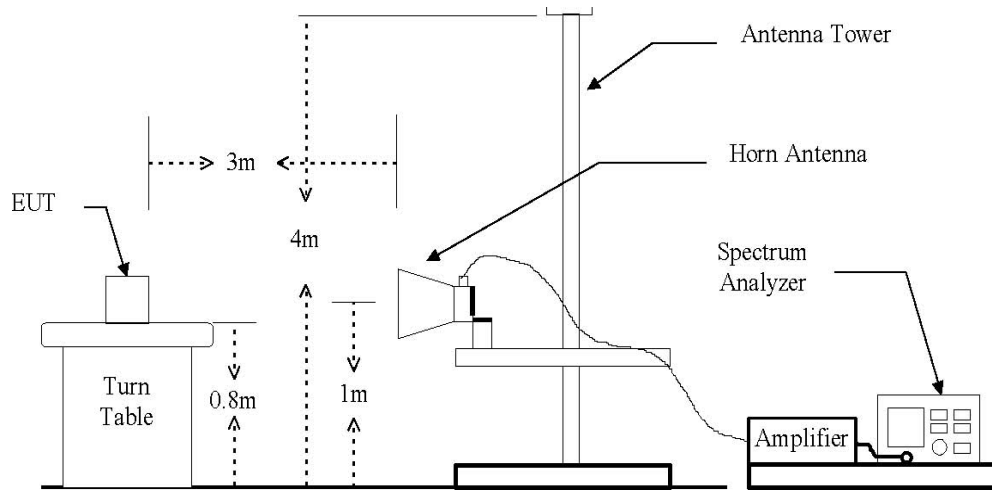

### Test procedure

Radiated emissions from the EUT were measured according to the dictates in section 12.0 of KDB 558074 D01 v03r02 and ANSI C63.4-2003/2009

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site or open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference receiving antenna.
3. The antenna is a broadband antenna, and its height is varied from 1 meter to 4 meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test receiver system was set to peak detect function and specified bandwidth with maximum hold mode.
6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be retested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet

---

**Note.**

All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

The spectrum analyzer is set to:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer 200 Hz for Quasi-peak detection (QP) at frequency below 9 kHz~ 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer 9 kHz for Quasi-peak detection (QP) at frequency below 150 kHz~ 30 MHz.
3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer 120 kHz for Peak detection (PK) or Quasi-peak detection (QP) at frequency below 1 GHz.
4. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1 GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Average detection (AV) at frequency above 1 GHz. (Detect mode: RMS(power), Averaging 100)

To get a maximum emission level from the EUT, the EUT is manipulated through three orthogonal planes.

### Limit

According to 15.209(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

| Frequency (MHz) | Distance (Meters) | Radiated ( $\mu V/m$ ) |
|-----------------|-------------------|------------------------|
| 0.009 ~ 0.490   | 300               | 2 400 / F(kHz)         |
| 0.490 ~ 1.705   | 30                | 24 000 / F(kHz)        |
| 1.705 ~ 30.0    | 30                | 30                     |
| 30 ~ 88         | 3                 | 100**                  |
| 88 ~ 216        | 3                 | 150**                  |
| 216 ~ 960       | 3                 | 200**                  |
| Above 960       | 3                 | 500                    |

\*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 ~ 72 MHz, 76 ~ 88 MHz, 174 ~ 216 MHz or 470 ~ 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

According to 15.205(a), only spurious emissions are permitted in any of the frequency bands listed below:

| MHz                        | MHz                   | MHz             | GHz              |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110              | 16.42 - 16.423        | 399.9 - 410     | 4.5 - 5.15       |
| <sup>1</sup> 0.495 - 0.505 | 16.69475 - 16.69525   | 608 - 614       | 5.35 - 5.46      |
| 2.1735 - 2.1905            | 16.80425 - 16.80475   | 960 - 1240      | 7.25 - 7.75      |
| 4.125 - 4.128              | 25.5 - 25.67          | 1300 - 1427     | 8.025 - 8.5      |
| 4.17725 - 4.17775          | 37.5 - 38.25          | 1435 - 1626.5   | 9.0 - 9.2        |
| 4.20725 - 4.20775          | 73 - 74.6             | 1645.5 - 1646.5 | 9.3 - 9.5        |
| 6.215 - 6.218              | 74.8 - 75.2           | 1660 - 1710     | 10.6 - 12.7      |
| 6.26775 - 6.26825          | 108 - 121.94          | 1718.8 - 1722.2 | 13.25 - 13.4     |
| 6.31175 - 6.31225          | 123 - 138             | 2200 - 2300     | 14.47 - 14.5     |
| 8.291 - 8.294              | 149.9 - 150.05        | 2310 - 2390     | 15.35 - 16.2     |
| 8.362 - 8.366              | 156.52475 - 156.52525 | 2483.5 - 2500   | 17.7 - 21.4      |
| 8.37625 - 8.38675          | 156.7 - 156.9         | 2690 - 2900     | 22.01 - 23.12    |
| 8.41425 - 8.41475          | 162.0125 - 167.17     | 3260 - 3267     | 23.6 - 24.0      |
| 12.29 - 12.293             | 167.72 - 173.2        | 3332 - 3339     | 31.2 - 31.8      |
| 12.51975 - 12.52025        | 240 - 285             | 3345.8 - 3358   | 36.43 - 36.5     |
| 12.57675 - 12.57725        | 322 - 335.4           | 3600 - 4400     | ( <sup>2</sup> ) |

According to 15.205(b), Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in § 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in § 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1 000 MHz, compliance with the emission limits in § 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in § 15.35 apply to these measurements.

According to 15.407(b),

(b) Undesirable emission limits: Except as shown in paragraph (b)(6) of this section, the peak emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz.

(2) For transmitters operating in the 5.25–5.35 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz. Devices operating in the 5.25–5.35 GHz band that generate emissions in the 5.15–5.25 GHz band must meet all applicable technical requirements for operation in the 5.15–5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of –27 dBm/MHz in the 5.15–5.25 GHz band.

(3) For transmitters operating in the 5.47–5.725 GHz band: all emissions outside of the 5.47–5.725 GHz band shall not exceed an EIRP of –27 dBm/MHz.

(4) For transmitters operating in the 5.725–5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of –17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of –27 dBm/MHz.

(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz.

A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.

$$\text{*EIRP[dBm]} = E[\text{dB}\mu\text{V/m}] - 95.2$$

$$\text{EIRP of } -27 \text{ dBm/MHz} = 68.3 \text{ dB}\mu\text{V/m (3m)}$$

### Test results (Below 30 MHz)

The frequency spectrum from 9 kHz to 30 MHz was investigated. Emission levels are not reported much lower than the limits by over 20 dB.

| Radiated emissions            |                   | Ant. | Correction factors    |                    |                        | Total              | Limit             |                |
|-------------------------------|-------------------|------|-----------------------|--------------------|------------------------|--------------------|-------------------|----------------|
| Frequency<br>(MHz)            | Reading<br>(dBμV) | Pol. | Ant. factor<br>(dB/m) | Cable loss<br>(dB) | F <sub>d</sub><br>(dB) | Actual<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
| Not detected for below 30 MHz |                   |      |                       |                    |                        |                    |                   |                |

### Note.

1. All spurious emission at channels are almost the same below 30 MHz, so that 802.11a 5180 MHz were chosen at representative in final test.
2. Actual = Reading + Ant. factor + Cable loss + F<sub>d</sub>
3. F<sub>d</sub> = 40log(D<sub>m</sub> / D<sub>s</sub>)

Where:

- F<sub>d</sub> = Distance factor in dB  
D<sub>m</sub> = Measurement distance in meters  
D<sub>s</sub> = Specification distance in meters

### Test results (Below 1 000 MHz)

The frequency spectrum from 30 MHz to 1 000 MHz was investigated. Emission levels are not reported much lower than the limits by over 20 dB.

#### 802.11a / 5180 MHz

| Radiated emissions |                | Ant. | Correction factors |                 | Total           | Limit          |             |
|--------------------|----------------|------|--------------------|-----------------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Pol. | Ant. factor (dB/m) | Cable loss (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| 51.347             | 21.260         | V    | 13.570             | 1.640           | 36.470          | 40.000         | 3.530       |
| 198.915            | 19.020         | V    | 9.980              | 3.440           | 32.440          | 43.500         | 11.060      |
| 247.345            | 19.530         | H    | 11.650             | 3.850           | 35.030          | 46.000         | 10.970      |

### Note.

1. All spurious emission at channels are almost the same below 1 000 MHz, so that 802.11a 5 180 MHz were chosen at representative in final test.
2. Actual = Reading + Ant. factor + Cable loss
3. Detector mode: Quasi peak
4. To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ and YZ planes.

### Test results (Above 1 000 MHz)

The frequency spectrum from 1 GHz to 25 GHz and 40 GHz was investigated. No Emissions were found above 20 dB below the limit.

#### 802.11a / 5180 MHz

| Radiated emissions |                |               | Ant. | Correction factors |          | Total           | Limit          |             |
|--------------------|----------------|---------------|------|--------------------|----------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detector mode | Pol. | AFCL (dB)          | DCF (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| 4813.81            | 34.56          | PK            | H    | 13.61              | -        | 48.17           | 74.00          | 25.83       |
| 4834.87            | 35.08          | PK            | V    | 13.75              | -        | 48.83           | 74.00          | 25.17       |
| 10359.00           | 30.32          | PK            | H    | 31.08              | -        | 61.40           | 74.00          | 12.60       |
| 10359.00           | 19.49          | AV            | V    | 31.08              | -        | 50.57           | 54.00          | 3.43        |
| 10359.00           | 29.69          | PK            | H    | 31.08              | -        | 60.77           | 74.00          | 13.23       |
| 10359.00           | 19.52          | AV            | V    | 31.08              | -        | 50.60           | 54.00          | 3.40        |

#### 802.11a / 5220 MHz

| Radiated emissions |                |               | Ant. | Correction factors |          | Total           | Limit          |             |
|--------------------|----------------|---------------|------|--------------------|----------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detector mode | Pol. | AFCL (dB)          | DCF (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| 10440.00           | 30.30          | PK            | H    | 31.40              | -        | 61.70           | 74.00          | 12.30       |
| 10440.00           | 19.49          | AV            | V    | 31.40              | -        | 50.89           | 54.00          | 3.11        |
| 10440.00           | 30.33          | PK            | H    | 31.40              | -        | 61.73           | 74.00          | 12.27       |
| 10440.00           | 19.26          | AV            | V    | 31.40              | -        | 50.66           | 54.00          | 3.34        |

#### 802.11a / 5240 MHz

| Radiated emissions |                |               | Ant. | Correction factors |          | Total           | Limit          |             |
|--------------------|----------------|---------------|------|--------------------|----------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detector mode | Pol. | AFCL (dB)          | DCF (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| 10480.00           | 30.23          | PK            | H    | 31.56              | -        | 61.79           | 74.00          | 12.21       |
| 10480.00           | 19.22          | AV            | V    | 31.56              | -        | 50.78           | 54.00          | 3.22        |
| 10480.00           | 29.70          | PK            | H    | 31.56              | -        | 61.26           | 74.00          | 12.74       |
| 10480.00           | 19.18          | AV            | V    | 31.56              | -        | 50.74           | 54.00          | 3.26        |

### Note.

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + AFCL(Ant. factor – Amp. gain + Cable loss) + DCF(Duty cycle Correction Factor)+Distance
5. DCF(Duty cycle Correction Factor) = 10log(1/Duty cycle)

**802.11n\_HT20 / 5180 MHz**

| Radiated emissions |                |               | Ant. | Correction factors |          | Total           | Limit          |             |
|--------------------|----------------|---------------|------|--------------------|----------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detector mode | Pol. | AFCL (dB)          | DCF (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| 4815.52            | 34.94          | PK            | H    | 13.62              | -        | 48.56           | 74.00          | 25.44       |
| 4822.74            | 35.97          | PK            | V    | 13.67              | -        | 49.64           | 74.00          | 24.36       |
| 10360.00           | 30.33          | PK            | H    | 31.09              | -        | 61.42           | 74.00          | 12.58       |
| 10360.00           | 18.56          | AV            | V    | 31.09              | -        | 49.65           | 54.00          | 4.35        |
| 10360.00           | 30.47          | PK            | H    | 31.09              | -        | 61.56           | 74.00          | 12.44       |
| 10360.00           | 18.86          | AV            | V    | 31.09              | -        | 49.95           | 54.00          | 4.05        |

**802.11n\_HT20 / 5220 MHz**

| Radiated emissions |                |               | Ant. | Correction factors |          | Total           | Limit          |             |
|--------------------|----------------|---------------|------|--------------------|----------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detector mode | Pol. | AFCL (dB)          | DCF (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| 10440.00           | 29.01          | PK            | H    | 31.40              | -        | 60.41           | 74.00          | 13.59       |
| 10440.00           | 18.92          | AV            | V    | 31.40              | -        | 50.32           | 54.00          | 3.68        |
| 10440.00           | 29.88          | PK            | H    | 31.40              | -        | 61.28           | 74.00          | 12.72       |
| 10440.00           | 18.81          | AV            | V    | 31.40              | -        | 50.21           | 54.00          | 3.79        |

**802.11n\_HT20 / 5240 MHz**

| Radiated emissions |                |               | Ant. | Correction factors |          | Total           | Limit          |             |
|--------------------|----------------|---------------|------|--------------------|----------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detector mode | Pol. | AFCL (dB)          | DCF (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| 10480.00           | 30.00          | PK            | H    | 31.56              | -        | 61.56           | 74.00          | 12.44       |
| 10480.00           | 18.99          | AV            | V    | 31.56              | -        | 50.55           | 54.00          | 3.45        |
| 10480.00           | 30.72          | PK            | H    | 31.56              | -        | 62.28           | 74.00          | 11.72       |
| 10480.00           | 19.49          | AV            | V    | 31.56              | -        | 51.05           | 54.00          | 2.95        |

**Note.**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + AFCL(Ant. factor – Amp. gain + Cable loss) + DCF(Duty cycle Correction Factor)+Distance
5. DCF(Duty cycle Correction Factor) = 10log(1/Duty cycle)

**802.11n\_HT40 / 5190 MHz**

| Radiated emissions |                      |               | Ant. | Correction factors |          | Total                 | Limit                |             |
|--------------------|----------------------|---------------|------|--------------------|----------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detector mode | Pol. | AFCL (dB)          | DCF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 4830.63            | 34.95                | PK            | H    | 13.72              | -        | 48.67                 | 74.00                | 25.33       |
| 4833.81            | 34.78                | PK            | V    | 13.74              | -        | 48.52                 | 74.00                | 25.48       |
| 10380.00           | 29.05                | PK            | H    | 31.17              | -        | 60.22                 | 74.00                | 13.78       |
| 10380.00           | 19.37                | AV            | V    | 31.17              | -        | 50.54                 | 54.00                | 3.46        |
| 10380.00           | 29.14                | PK            | H    | 31.17              | -        | 60.31                 | 74.00                | 13.69       |
| 10380.00           | 18.58                | AV            | V    | 31.17              | -        | 49.75                 | 54.00                | 4.25        |

**802.11n\_HT40 / 5230 MHz**

| Radiated emissions |                      |               | Ant. | Correction factors |          | Total                 | Limit                |             |
|--------------------|----------------------|---------------|------|--------------------|----------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detector mode | Pol. | AFCL (dB)          | DCF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 10460.00           | 29.04                | PK            | H    | 31.48              | -        | 60.52                 | 74.00                | 13.48       |
| 10460.00           | 18.62                | AV            | V    | 31.48              | -        | 50.10                 | 54.00                | 3.90        |
| 10460.00           | 29.90                | PK            | H    | 31.48              | -        | 61.38                 | 74.00                | 12.62       |
| 10460.00           | 18.77                | AV            | V    | 31.48              | -        | 50.25                 | 54.00                | 3.75        |

**Note.**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + AFCL(Ant. factor – Amp. gain + Cable loss) + DCF(Duty cycle Correction Factor)+Distance
5. DCF(Duty cycle Correction Factor) = 10log(1/Duty cycle)

## Appendix A. Measurement equipment

| Equipment                           | Manufacturer          | Model               | Serial No.   | Calibration interval | Calibration due. |
|-------------------------------------|-----------------------|---------------------|--------------|----------------------|------------------|
| Spectrum analyzer                   | R&S                   | FSV30               | 101389       | 1 year               | 2015.04.30       |
| Spectrum analyzer                   | Agilent               | N9010A              | MY51440103   | 1 year               | 2016.01.26       |
| Power Meter                         | Anritsu               | ML2495A             | 1438001      | 1 year               | 2015.09.24       |
| Pulse Power Sensor                  | Anritsu               | MA2411B             | 1339205      | 1 year               | 2015.10.03       |
| Vector signal generator             | R&S                   | SMBV100A            | 1407.6004K02 | 1 year               | 2015.07.24       |
| 8360B Series Swept Signal Generator | HP                    | 83630B              | 3844A00786   | 1 year               | 2015.04.30       |
| Loop antenna                        | R&S                   | HFH2-Z2.335.4711.52 | 826532       | 2 years              | 2015.04.25       |
| Trilog-broadBand antenna            | Schwarzbeck           | VULB 9168           | 9168-385     | 2 years              | 2015.05.09       |
| Horn antenna                        | A.H.                  | SAS-571             | 414          | 2 years              | 2015.02.28       |
| Horn antenna                        | Schwarzbeck           | BBHA 9170           | BBHA9170551  | 2 years              | 2015.09.04       |
| Preamplifier                        | HP                    | 8447F               | 2805A02570   | 1 year               | 2015.04.30       |
| Preamplifier                        | HP                    | 8449B               | 3008A00538   | 1 years              | 2015.07.23       |
| Preamplifier                        | Schwarzbeck           | BBV 9721            | 9721-003     | 1 years              | 2015.09.04       |
| Attenuator                          | HP                    | 8494B               | 2630A12857   | 1 year               | 2015.04.30       |
| EMI Test Receiver                   | R & S                 | ESVS10              | 826008/014   | 1 year               | 2015.04.04       |
| EMI Receiver/Signal Analyzer        | Narda S.T.S / PMM     | PMM 9010F           | 020WW31006   | 1 year               | 2015.04.04       |
| LISN                                | R & S                 | ENV216              | 101137       | 1 year               | 2015.02.21       |
| HIGH PASS FILTER                    | WAINWRIGHT INSTRUMENT | WHNX6.0/26.5G-6SS   | 1            | 1 year               | 2015.07.23       |
| HIGH PASS FILTER                    | WAINWRIGHT INSTRUMENT | WHJS3000-10TT       | 1            | 1 year               | 2015.07.23       |
| LOW PASS FILTER                     | WEINSCHL              | WLK1.0/18G-10TT     | 1            | 1 year               | 2015.07.23       |

## Peripheral devices


| Device   | Manufacturer                       | Model No.   | Serial No.                    |
|----------|------------------------------------|-------------|-------------------------------|
| Desktop  | DELL                               | OPTIPLEX990 | 95KYVBX                       |
| Monitor  | SAMSUNG                            | LS23C340    | ZXPCHTMFB01032M               |
| Adapter  | 11ssan Elecom(shen yang) Co., Ltd. | A2514_DPN   | CN07BN4400591<br>BSK28F6NF841 |
| Mouse    | Logitech                           | M-U0026     | 1248HS021ZRS                  |
| Keyboard | Logitech                           | Y-S0002     | -                             |

## Appendix B. Test setup photo

**Radiated Emission (30MHz~1GHz)**



**Radiated Emission (Above 1GHz)**

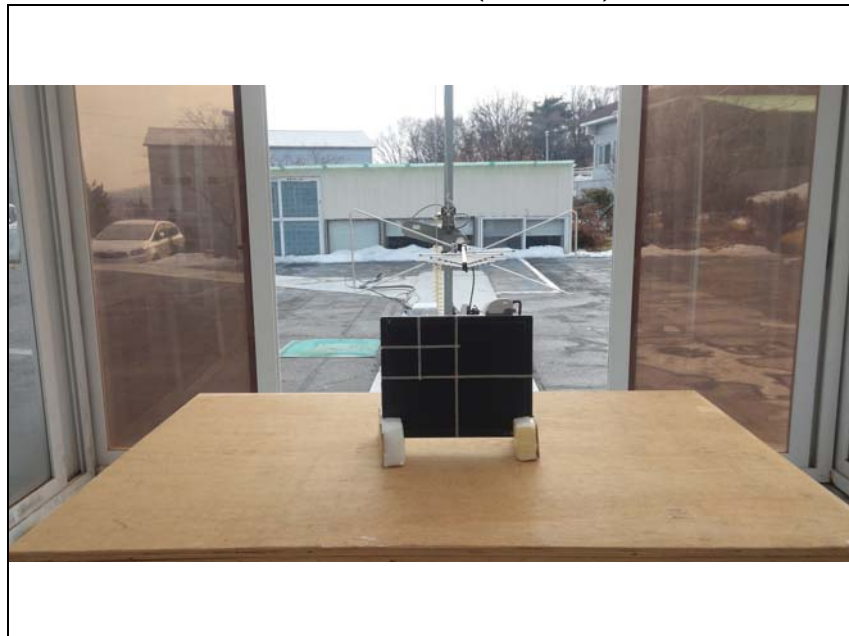

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The test results in the report only apply to the tested sample.