



EXHIBIT Q – Radiated Emissions Data


FCC ID# PG6BA0T

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets				Rev 3.4 10/11/00
EUT:	Serial Number: 75103203-210	Job Number: MICR0001	Date: 10/19/00	
Manufacturer: Micro Systems Engineering, Inc	Test Engineer: Rod Peloquin	Job Site: EV01		
Customer Reference Number:	Software:	Power:		
Comments: EUT in test fixture at 1.5m above ground plane, EUT in horizontal polarity				
		Temperature (°C): 22	% Humidity: 41	


FCC 95.635 Radiated Specification Limit (3 meter)

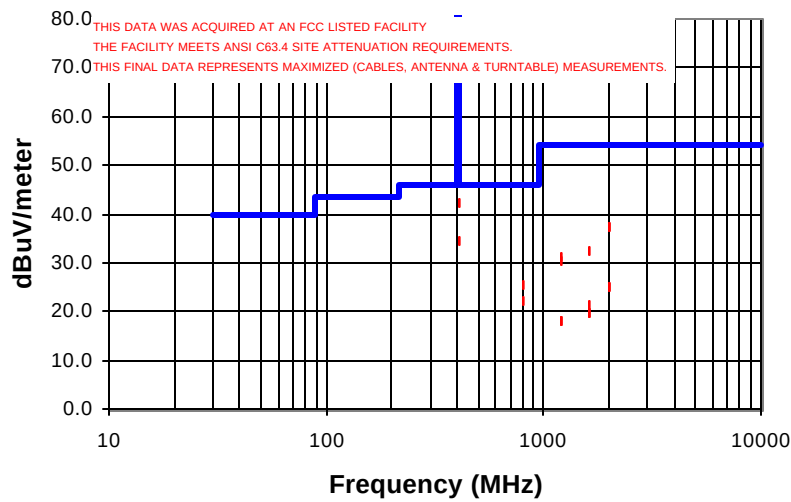

Frequency (MHz)	Reading (dBuV)	Detector	Antenna Factor (dB/m)	Antenna Polarity	Preamplifier Gain (dB)	Cable Loss (dB)	Turntable Azimuth (degrees)	Antenna Height (meters)	Adjusted Level (dBuV/m)	Spec. Limit (dBuV/m)	Margin (dB)	Comment
403.572	56.2	PK	16.1	HBLG	31.3	1.1	49.0	1.3	42.1	85.2	-43.1	transmit frequency
403.574	48.4	PK	16.1	VBLG	31.3	1.1	57.0	1.1	34.3	85.2	-50.9	transmit frequency
807.157	34.4	PK	22.1	HBLG	32.7	1.6	89.0	1.0	25.4	46.0	-20.7	
807.161	31.3	PK	22.1	VBLG	32.7	1.6	4.0	1.3	22.3	46.0	-23.7	
1210.737	39.7	PK	23.8	HHRN	35.2	2.2	0.0	1.5	30.5	54.0	-23.6	No detectable signal
1210.737	27.2	AV	23.8	VHRN	35.2	2.2	48.0	1.3	18.0	54.0	-36.1	No detectable signal
1210.737	40.3	PK	23.8	VHRN	35.2	2.2	48.0	1.3	31.1	54.0	-23.0	No detectable signal
1210.737	27.2	AV	23.8	HHRN	35.2	2.2	0.0	1.5	18.0	54.0	-36.0	No detectable signal
1614.316	39.7	PK	25.2	HHRN	34.6	2.2	53.0	1.5	32.5	54.0	-21.6	No detectable signal
1614.316	28.6	PK	25.2	VHRN	34.6	2.2	0.0	1.4	21.4	54.0	-32.7	No detectable signal
1614.316	26.9	AV	25.2	HHRN	34.6	2.2	53.0	1.5	19.7	54.0	-34.4	No detectable signal
1614.316	26.9	AV	25.2	VHRN	34.6	2.2	0.0	1.2	19.7	54.0	-34.4	No detectable signal
2017.895	39.2	PK	26.9	HHRN	31.1	2.5	0.0	1.0	37.5	54.0	-16.5	No detectable signal
2017.895	39.1	PK	26.9	VHRN	31.1	2.5	0.0	1.5	37.4	54.0	-16.6	No detectable signal
2017.895	26.8	AV	26.9	HHRN	31.1	2.5	0.0	1.0	25.1	54.0	-29.0	No detectable signal
2017.895	26.8	AV	26.9	VHRN	31.1	2.5	0.0	1.5	25.1	54.0	-28.9	No detectable signal

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets				Rev 3.4 10/11/00
EUT:	Serial Number: 75103203-210	Job Number: MICR0001	Date: 10/19/00	
Manufacturer: Micro Systems Engineering, Inc	Test Engineer: Rod Peloquin	Job Site: EV01		
Customer Reference Number:	Software:	Power:		
Comments: EUT in test fixture at 1.5m above ground plane, EUT in vertical polarity				
		Temperature (°C): 22	% Humidity: 41	

FCC 95.635 Radiated Specification Limit (3 meter)

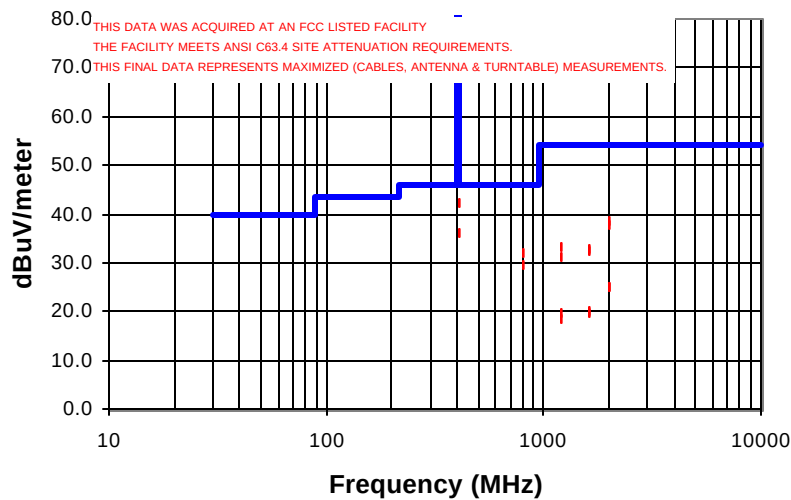


Frequency (MHz)	Reading (dBuV)	Detector	Antenna Factor (dB/m)	Antenna Polarity	Preamplifier Gain (dB)	Cable Loss (dB)	Antenna Azimuth (degrees)	Antenna Height (meters)	Adjusted Level (dBuV/m)	Spec. Limit (dBuV/m)	Margin (dB)	Comment
403.572	50.1	PK	16.1	VBLG	31.3	1.1	287.0	1.9	36.0	85.2	-49.2	transmit frequency
403.577	56.2	PK	16.1	HBLG	31.3	1.1	8.0	1.3	42.1	85.2	-43.1	transmit frequency
807.149	38.5	PK	22.1	VBLG	32.7	1.6	2.0	1.4	29.5	46.0	-16.5	
807.162	40.9	PK	22.1	HBLG	32.7	1.6	352.0	1.5	31.9	46.0	-14.2	
1210.737	42.3	PK	23.8	VHRN	35.2	2.2	18.0	1.3	33.1	54.0	-20.9	
1210.737	29.0	AV	23.8	VHRN	35.2	2.2	18.0	1.3	19.8	54.0	-34.2	
1210.737	40.4	PK	23.8	HHRN	35.2	2.2	15.0	1.4	31.2	54.0	-22.9	
1210.737	27.8	AV	23.8	HHRN	35.2	2.2	15.0	1.4	18.6	54.0	-35.5	
1614.316	39.8	PK	25.2	VHRN	34.6	2.2	30.0	1.2	32.6	54.0	-21.4	
1614.316	27.5	AV	25.2	VHRN	34.6	2.2	30.0	1.2	20.3	54.0	-33.7	
1614.316	39.9	PK	25.2	HHRN	34.6	2.2	1.0	1.0	32.7	54.0	-21.3	No detectable signal
1614.316	26.8	AV	25.2	HHRN	34.6	2.2	1.0	1.0	19.6	54.0	-34.5	No detectable signal
2017.895	40.3	PK	26.9	VHRN	31.1	2.5	0.0	1.5	38.6	54.0	-15.5	No detectable signal
2017.895	26.8	AV	26.9	VHRN	31.1	2.5	0.0	1.5	25.1	54.0	-29.0	No detectable signal
2017.895	39.4	PK	26.9	HHRN	31.1	2.5	0.0	1.5	37.7	54.0	-16.3	No detectable signal
2017.895	26.8	AV	26.9	HHRN	31.1	2.5	0.0	1.5	25.1	54.0	-29.0	No detectable signal

Tek

Ref Lv1 105.0dBuV

10dB/

Atten 20dB

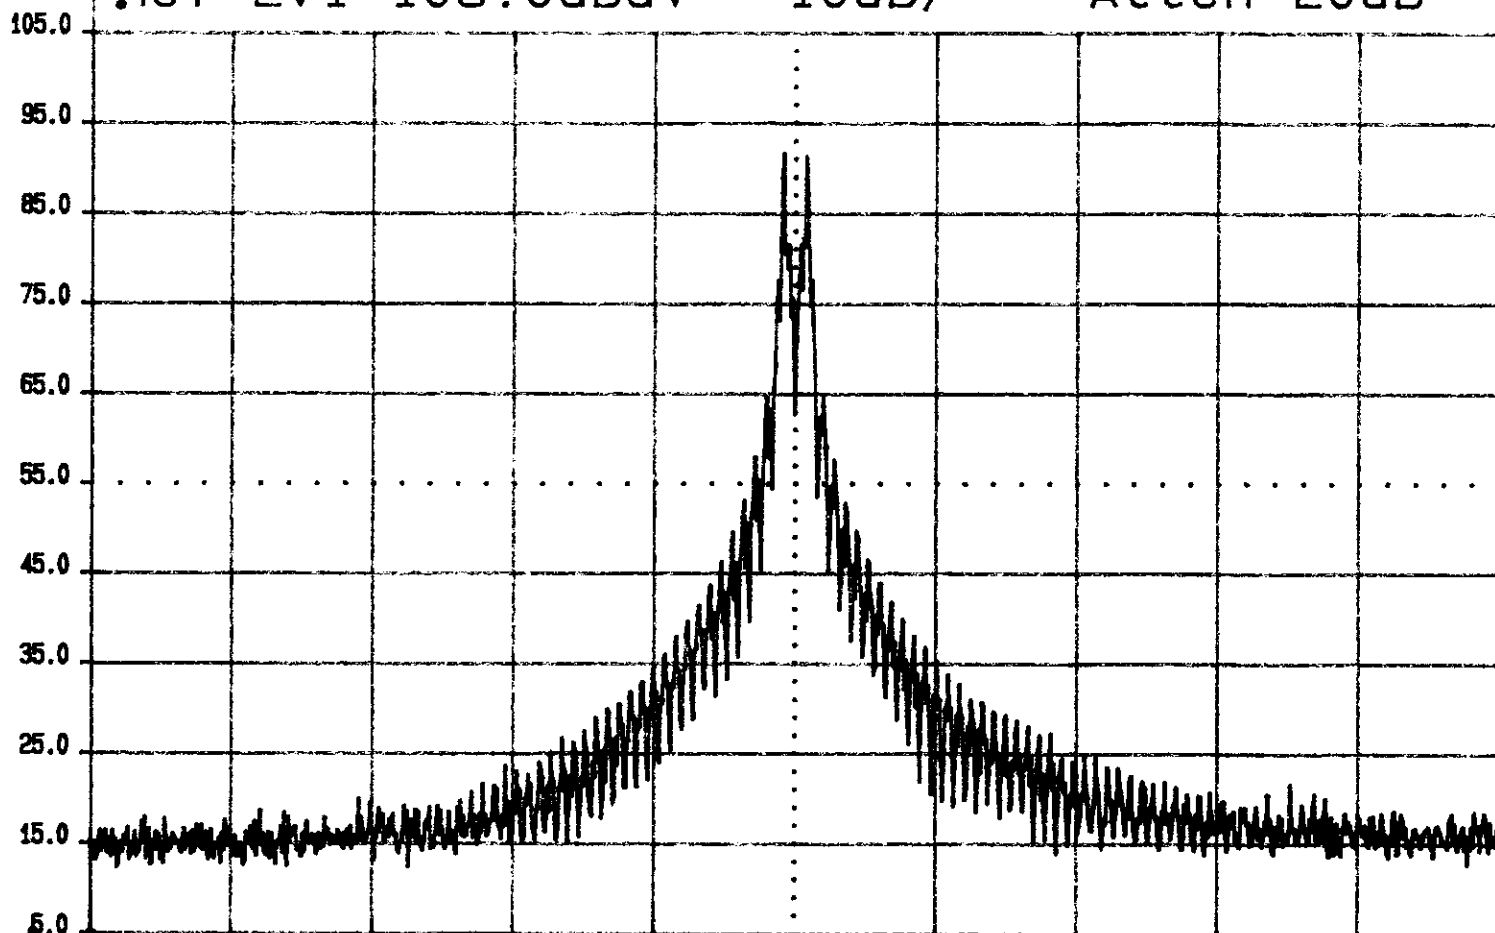

Freq 403.613 1MHz

Span 500kHz

ResBW 300Hz

VidBW 300Hz

SWP 32S

LEVEL

SPAN

SWP 32S

Knob 2

Knob 1


KEYPAD

Tektronix

2784

Tek

Ref Lv1 105.0dBuV 10dB/ Atten 20dB

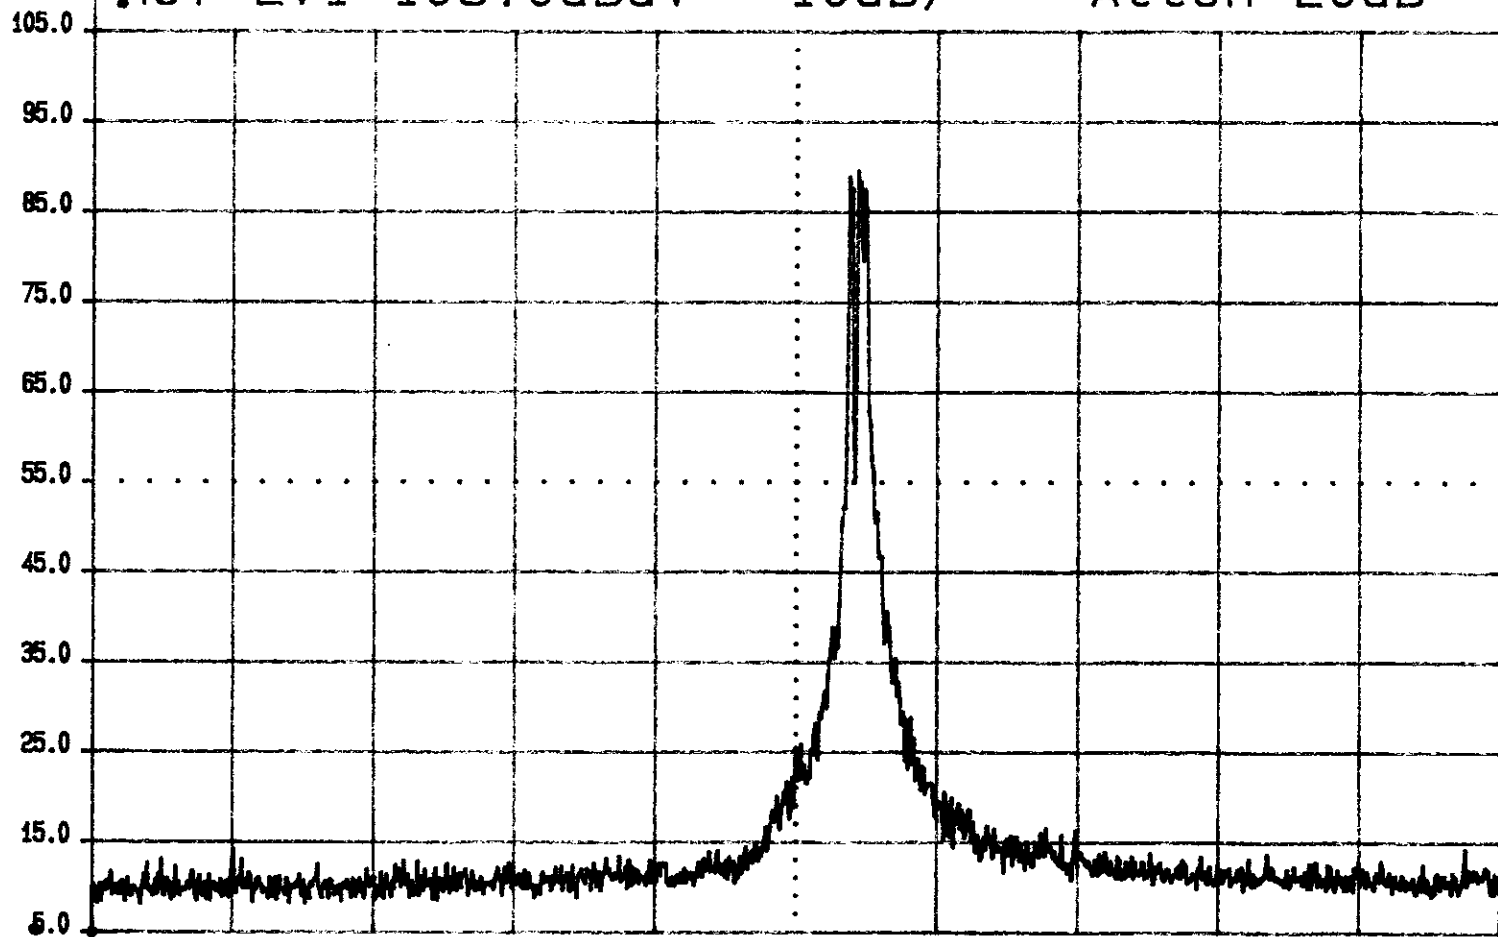

402.000MHz to 405.000MHz
ResBW 300Hz VidBW 300Hz SWP 190S

LEVEL

SPAN

Stop 405.000MHz

KnOB 2

KnOB 1

KEYPAD

Tektronix


2784

Tek

Ref Lv1 105.0dBuV

10dB/

Atten 20dB

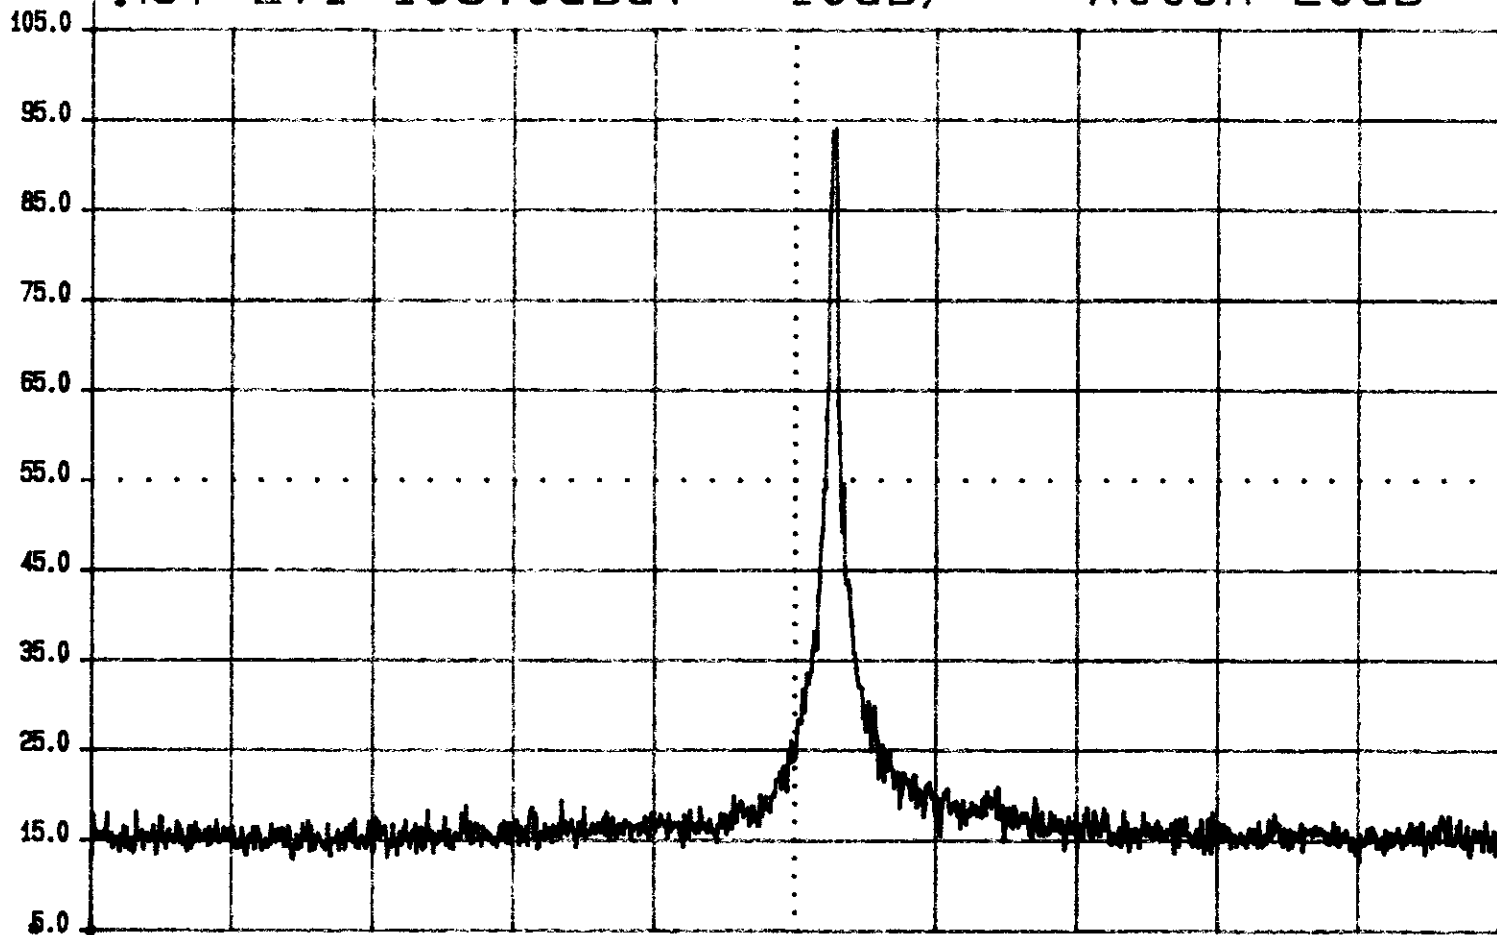

401.500MHz

to

405.500MHz

ResBW 1kHz

VidBW 1kHz

SWP 23S

LEVEL

SPAN

ResBW 1kHz

KnOB 2

KnOB 1

KEYPAD

Tektronix


2784

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.4
10/11/00

EUT: Philos DR-T	Serial Number: 75103203-210	Job Number: MICR0001	Date: 10/19/00
Manufacturer: Micro Systems Engineering, Inc	Test Engineer: Rod Peloquin	Job Site: EV01	
Customer Reference Number:	Software:	Power:	
Comments: EUT in test fixture at 1.5m above ground plane, EUT in horizontal polarity			
<i>Rod Peloquin</i>		Temperature (°C): 22	% Humidity: 41
		Run #01	

FCC 95.635 Radiated Specification Limit (3 meter)

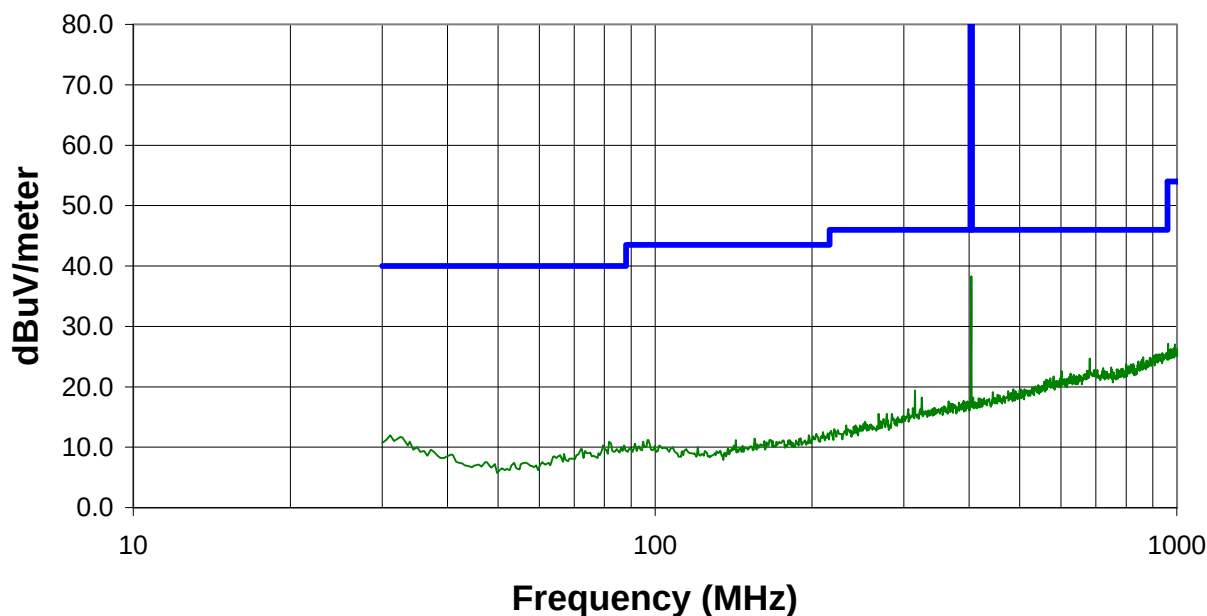


Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
959.898	31.9	Hor.	-6.2	25.7	46.0	-20.3
938.954	32.2	Hor.	-6.6	25.6	46.0	-20.4
954.573	31.9	Hor.	-6.3	25.6	46.0	-20.4
921.205	32.2	Ver.	-6.8	25.4	46.0	-20.6
912.685	32.3	Hor.	-6.9	25.4	46.0	-20.6
927.950	32.1	Ver.	-6.7	25.4	46.0	-20.6
952.443	31.6	Ver.	-6.3	25.3	46.0	-20.7
948.184	31.5	Hor.	-6.3	25.2	46.0	-20.8
940.374	31.8	Ver.	-6.6	25.2	46.0	-20.8
907.716	32.1	Ver.	-6.9	25.2	46.0	-20.8
901.326	32.2	Hor.	-7.1	25.1	46.0	-20.9
941.084	31.6	Hor.	-6.6	25.0	46.0	-21.0
956.703	31.2	Hor.	-6.2	25.0	46.0	-21.0
957.413	31.2	Ver.	-6.2	25.0	46.0	-21.0
950.669	31.3	Ver.	-6.3	25.0	46.0	-21.0
862.278	32.8	Hor.	-7.9	24.9	46.0	-21.1
947.119	31.2	Ver.	-6.3	24.9	46.0	-21.1
944.634	31.2	Hor.	-6.4	24.8	46.0	-21.2
933.984	31.4	Ver.	-6.6	24.8	46.0	-21.2
887.837	32.2	Ver.	-7.4	24.8	46.0	-21.2

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.4
10/11/00

EUT: Philos DR-T	Serial Number: 75103203-210	Job Number: MICR0001	Date: 10/19/00
Manufacturer: Micro Systems Engineering, Inc	Test Engineer: Rod Peloquin	Job Site: EV01	
Customer Reference Number:	Software:	Power:	
Comments: EUT in test fixture at 1.5m above ground plane, EUT in horizontal polarity			
<i>Rod Peloquin</i>		Temperature (°C): 22	% Humidity: 41
		Run #04	

FCC 95.635 Radiated Specification Limit (3 meter)

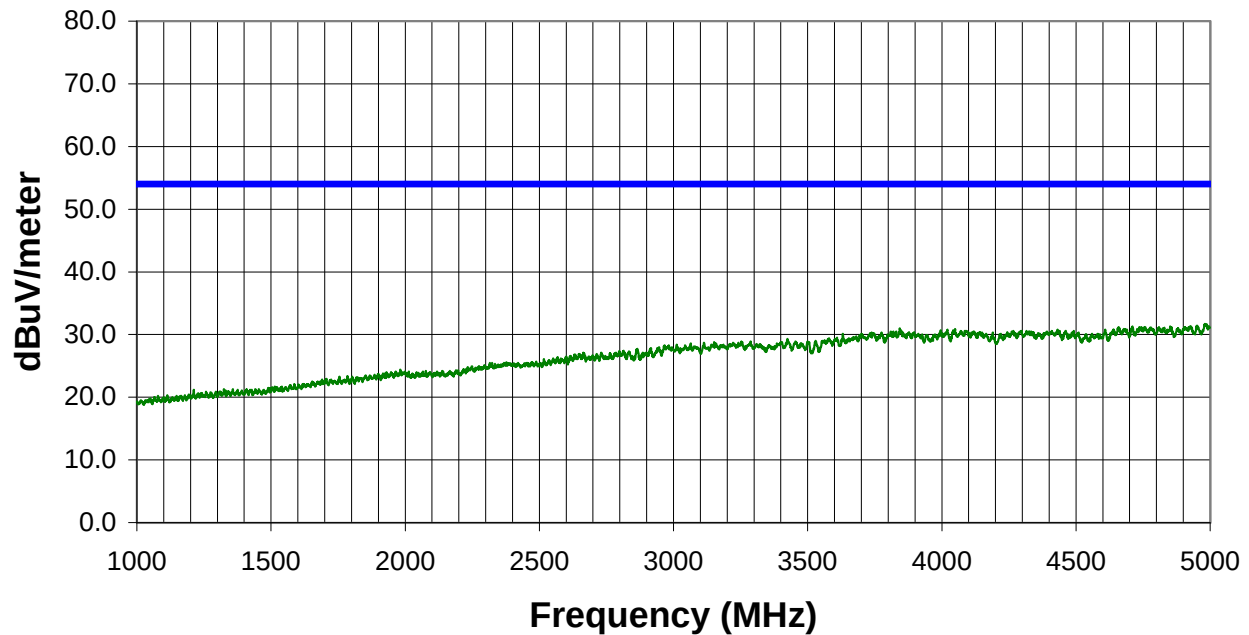


Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
4980.500	28.9	Ver.	2.8	31.7	54.0	-22.3
4984.500	28.8	Ver.	2.8	31.6	54.0	-22.4
4978.000	28.8	Ver.	2.8	31.6	54.0	-22.4
4986.500	28.8	Ver.	2.8	31.6	54.0	-22.4
4987.500	28.8	Ver.	2.8	31.6	54.0	-22.4
4952.500	28.7	Ver.	2.7	31.4	54.0	-22.6
4949.500	28.7	Ver.	2.7	31.4	54.0	-22.6
4999.500	28.6	Ver.	2.8	31.4	54.0	-22.6
4925.000	28.6	Ver.	2.7	31.3	54.0	-22.7
4951.500	28.6	Ver.	2.7	31.3	54.0	-22.7
4929.000	28.6	Ver.	2.7	31.3	54.0	-22.7
4996.000	28.5	Hor.	2.8	31.3	54.0	-22.7
4850.500	28.9	Ver.	2.4	31.3	54.0	-22.7
4710.000	29.1	Ver.	2.2	31.3	54.0	-22.7
4992.500	28.5	Ver.	2.8	31.3	54.0	-22.7
4906.000	28.7	Ver.	2.5	31.2	54.0	-22.8
4903.000	28.7	Hor.	2.5	31.2	54.0	-22.8
4920.000	28.5	Ver.	2.7	31.2	54.0	-22.8

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.4
10/11/00

EUT: Philos DR-T	Serial Number: 75103203-210	Job Number: MICR0001	Date: 10/19/00
Manufacturer: Micro Systems Engineering, Inc	Test Engineer: Rod Peloquin	Job Site: EV01	
Customer Reference Number:	Software:	Power:	
Comments: EUT in test fixture at 1.5m above ground plane, EUT in vertical polarity			
<i>Rod Peloquin</i>		Temperature (°C): 22	% Humidity: 41
		Run #05	

FCC 95.635 Radiated Specification Limit (3 meter)

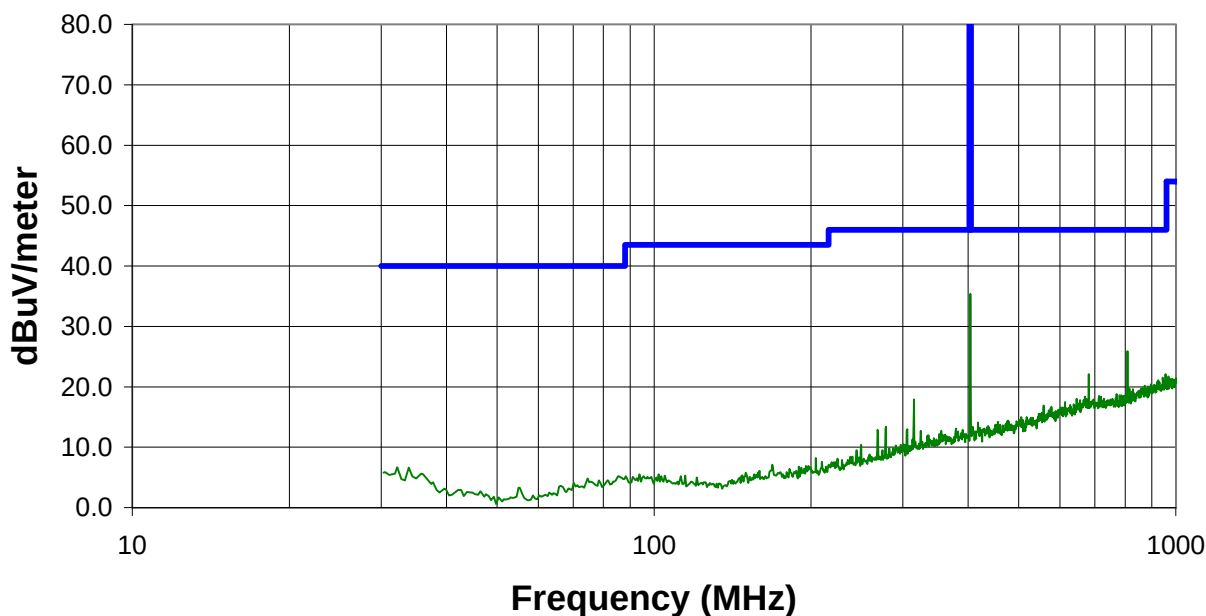


Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
807.611	34.9	Hor.	-9.0	25.9	46.0	-20.1
681.238	31.5	Ver.	-9.4	22.1	46.0	-23.9
955.283	28.3	Hor.	-6.2	22.1	46.0	-23.9
943.924	27.9	Hor.	-6.4	21.5	46.0	-24.5
925.465	27.8	Hor.	-6.7	21.1	46.0	-24.9
951.733	27.3	Hor.	-6.3	21.0	46.0	-25.0
944.634	27.2	Ver.	-6.4	20.8	46.0	-25.2
921.205	27.6	Ver.	-6.8	20.8	46.0	-25.2
957.413	27.0	Hor.	-6.2	20.8	46.0	-25.2
930.435	27.4	Hor.	-6.7	20.7	46.0	-25.3
959.188	26.8	Ver.	-6.2	20.6	46.0	-25.4
922.625	27.3	Ver.	-6.8	20.5	46.0	-25.5
895.646	27.6	Ver.	-7.2	20.4	46.0	-25.6
942.504	27.0	Hor.	-6.6	20.4	46.0	-25.6
928.305	27.1	Hor.	-6.7	20.4	46.0	-25.6
908.426	27.2	Ver.	-6.9	20.3	46.0	-25.7
910.911	27.2	Hor.	-6.9	20.3	46.0	-25.7
906.296	27.2	Hor.	-7.0	20.2	46.0	-25.8
948.184	26.5	Ver.	-6.3	20.2	46.0	-25.8
871.863	27.9	Ver.	-7.7	20.2	46.0	-25.8

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.4
10/11/00

EUT: Philos DR-T	Serial Number: 75103203-210	Job Number: MICR0001	Date: 10/19/00
Manufacturer: Micro Systems Engineering, Inc	Test Engineer: Rod Peloquin	Job Site: EV01	
Customer Reference Number:	Software:	Power:	
Comments: EUT in test fixture at 1.5m above ground plane, EUT in vertical polarity			
		Temperature (°C): 22	% Humidity: 41
		Run #06	

FCC 95.635 Radiated Specification Limit (3 meter)

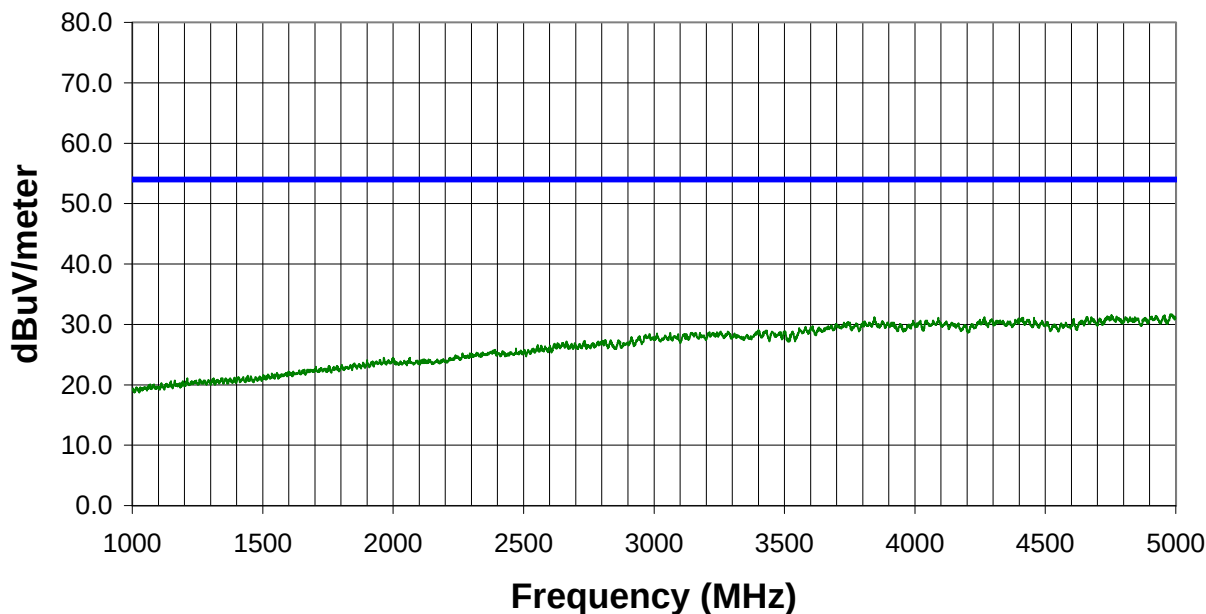

Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
4979.500	28.9	Hor.	2.8	31.7	54.0	-22.3
4984.500	28.9	Hor.	2.8	31.7	54.0	-22.3
4754.000	29.2	Hor.	2.4	31.6	54.0	-22.4
4987.500	28.8	Hor.	2.8	31.6	54.0	-22.4
4957.000	28.8	Hor.	2.7	31.5	54.0	-22.5
4980.500	28.7	Hor.	2.8	31.5	54.0	-22.5
4922.500	28.7	Hor.	2.7	31.4	54.0	-22.6
4953.500	28.7	Ver.	2.7	31.4	54.0	-22.6
4925.500	28.7	Hor.	2.7	31.4	54.0	-22.6
4908.000	28.7	Hor.	2.6	31.3	54.0	-22.7
4958.000	28.6	Hor.	2.7	31.3	54.0	-22.7
4952.000	28.6	Ver.	2.7	31.3	54.0	-22.7
4757.000	28.9	Hor.	2.4	31.3	54.0	-22.7
4993.500	28.5	Hor.	2.8	31.3	54.0	-22.7
4995.000	28.5	Hor.	2.8	31.3	54.0	-22.7
4990.500	28.5	Hor.	2.8	31.3	54.0	-22.7
4976.500	28.5	Hor.	2.8	31.3	54.0	-22.7
4773.000	28.9	Hor.	2.4	31.3	54.0	-22.7
4739.000	29.0	Hor.	2.3	31.3	54.0	-22.7
4736.000	29.0	Hor.	2.3	31.3	54.0	-22.7