

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR FCC CERTIFICATION


Test Report No. : E073R-046
AGR No. : A072A-138
Applicant : DVS Korea Co., Ltd.
Address : 7th & 8th Fl. KPS Bldg., 196 Kumgok-dong, Boondang-ku, Sungnam-city,
Kyungki-do, 463-726, Korea
Manufacturer : DVS Korea Co., Ltd.
Address : 7th & 8th Fl. KPS Bldg., 196 Kumgok-dong, Boondang-ku, Sungnam-city,
Kyungki-do, 463-726, Korea
Type of Equipment : 4INCH WIDE TOUCH SCREEN NAVIGATION (FM Transmitter)
FCC ID. : PGJVXA-4010
Model Name : VXA-4010
Multiple Model Name : SCOUT355B
Serial number : N/A
Total page of Report : 19 pages (including this page)
Date of Incoming : March 12, 2007
Date of Issuing : March 22, 2007

SUMMARY

The equipment complies with the regulation of **FCC CRF 47 PART 15, SUBPART C, SECTION 15.239**.


This test report contains only the results of a single test of the sample supplied for the examination. It is not a general valid assessment of the features of the respective products of the mass-production.

Prepared by:

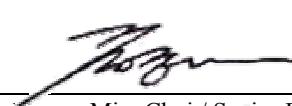

Young-Min, Choi / Senior Engineer
EMC Div.
ONETECH Corp.

Reviewed by:

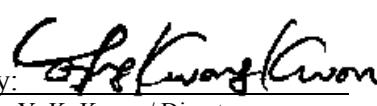
Y. K. Kwon / Director
EMC Div.
ONETECH Corp.

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-002 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, 462-705, Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 307-51 Daessangryung-ri, Chowol-eup, Gwangju-si, Gyeonggi-do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)

CONTENTS

	PAGE
1. VERIFICATION OF COMPLIANCE	3
2. GENERAL INFORMATION.....	4
2.1 PRODUCT DESCRIPTION.....	4
2.2 MODEL DIFFERENCES.....	4
2.3 RELATED SUBMITTAL(S) / GRANT(S)	4
2.4 TEST SYSTEM DETAILS	4
2.5 TEST METHODOLOGY	5
2.6 TEST FACILITY	5
3. SYSTEM TEST CONFIGURATION.....	6
3.1 JUSTIFICATION	6
3.2 EUT EXERCISE SOFTWARE	6
3.3 CABLE DESCRIPTION FOR THE EUT	6
3.4 EQUIPMENT MODIFICATIONS	6
3.5 CONFIGURATION OF TEST SYSTEM	6
3.6 ANTENNA REQUIREMENT	7
4. PRELIMINARY TEST	7
4.1 AC POWER LINE CONDUCTED EMISSION TEST	7
4.2 RADIATED EMISSION TEST	7
5. FINAL RESULT OF MEASUREMENT	8
5.1 CONDUCTED EMISSION TEST	8
5.2 RADIATED EMISSION TEST (WITHIN THE PERMITTED 200 KHZ BAND)	10
5.2.1 Operating Condition: Used Car Battery.....	10
5.2.2 Operating Condition: Used AC/DC Adaptor	11
5.3 RADIATED EMISSION TEST (OUTSIDE OF THE SPECIFIED 200 KHZ BAND).....	12
5.3.1 Operating Condition: Used Car Battery.....	12
5.3.2 Operating Condition: Used AC/DC Adaptor	13
5.4 BANDWIDTH OF THE OPERATING FREQUENCY	14
5.5 TUNING RANGE OF THE OPERATING FREQUENCY	16
6. FIELD STRENGTH CALCULATION	18
7. LIST OF TEST EQUIPMENT	19

1. VERIFICATION OF COMPLIANCE

- . APPLICANT : DVS Korea Co., Ltd.
- . ADDRESS : 7th & 8th Fl. KPS Bldg., 196 Kumgok-dong, Boondang-ku, Sungnam-city, Kyungki-do,
463-726, Korea
- . CONTACT PERSON : Mr. Hyundoo, Kim / Manager
- . TELEPHONE NO : +82-31-546-3142
- . FCC ID : PGJVXA-4010
- . MODEL NAME : VXA-4010
- . SERIAL NUMBER : N/A
- . DATE : March 22, 2007

EQUIPMENT CLASS	DXX – Part 15 Low Power Communication Device Transmitter
E.U.T. DESCRIPTION	4INCH WIDE TOUCH SCREEN NAVIGATION (FM Transmitter)
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	Charter 13 of ANSI C63.4: 2003
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SECTION 15.239
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 METER OPEN AREA TEST SITE

- . The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. GENERAL INFORMATION

2.1 Product Description

The DVS Korea Co., Ltd., Model VXA-4010 (referred to as the EUT in this report) is a 4INCH WIDE TOUCH SCREEN NAVIGATION that has a function for transmitting of FM broadcasting frequency range and Bluetooth. This report covers a FM transmitter from 88.1 MHz to 88.7 MHz for audio signal of FM radio receiver. Product specification described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	Plastic
TRANSMITTING FREQUENCY RANGE	88.1 ~ 88.7 MHz
LIST OF EACH OSC. or CRY. FREQ.(FREQ.>=1MHz)	12 MHz and 7.6 MHz
NUMBER OF LAYERS	8 Layers: Main Board 2 Layers: Button Board, Cradle Board and Sub Board
POWER REQUIREMENT	DC 5V from a car battery or AC/DC adaptor
EXTERNAL CONNECTOR	DC In, Audio Out, GPS(Used only European), SD Card In

2.2 Model Differences

- The difference(s) compared to the EUT is as follows:

	Model Name	Model Differences
Basic Model	VXA-4010	-
Multiple Models	SCOUT355B	This model is same to basic model, except for model designation only.

2.3 Related Submittal(s) / Grant(s)

- Original submittal only

2.4 Test System Details

The model numbers for all the equipments which were used in the tested system is:

Model	Manufacturer	FCC ID	Description	Connected to
VXA-4010	DVS Korea Co., Ltd.	PGJVXA-4010	4INCH WIDE TOUCH SCREEN NAVIGATION (EUT)	-
CP79A0050V2000U	NCE	N/A	AC/DC Adaptor	EUT
N/A	N/A	N/A	Headset	EUT

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4: 2003. Radiated testing was performed at a distance of 3 meters from EUT to the antenna.

2.6 Test Facility

The open area test site and conducted measurement facilities are located on at 307-51 Daessangryung-ri, Chowol-eup, Gwangju-si, Gyeonggi-do, 464-080, Korea. Description details of test facilities were submitted to the Commission on August 30, 2005. (Registration Number: 340658)

3. SYSTEM TEST CONFIGURATION

3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	N/A	VXA4000 MAIN	N/A
LCD Panel	InnoLux	PT035TN01	N/A
GPS Module	LEADTEK	LR9552	N/A
Keypad Board	N/A	KEYPAD B/D	N/A
Cradle Board	N/A	CRADLE B/D	N/A

3.2 Mode of operation during the test

The Model, VXA-4010 is included a FM transmitter designed to operate on function in the 88.1 ~ 88.7 MHz. The EUT does not have an audio input port, so the EUT played mp3 file that was stored in the SD memory and than transmitted audio signal with the maximum output volume. This device can be used in hand-held position, so testing was performed in three orthogonal planes and worst data was recorded in this report.

3.3 Cable Description for the EUT

Ports Name	Shielded	Ferrite Bead	Metal Hood	Length (m)	Connected to
DC In	N	N	EUT END	1.2	-
Audio Out	N	N	BOTH END	1.5	Headset

3.4 Equipment Modifications

- None

3.5 Configuration of Test System

Line Conducted Test: The EUT was connected to adaptor and the power line of adaptor was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.4: 2003 7.2.3 and ICES-003 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.4: 2003 8.3.1.1 and 13.1.4.1 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter open area test site.

Occupied Bandwidth Measurement:

This measurement is performed with the antenna located close enough to give a full-scale deflection of the modulated carrier on the spectrum analyzer.

Tuning Range Measurement:

This measurement is performed with the search coil located close to the EUT enough to get a full-scale of the modulated carrier on the spectrum analyzer.

3.6 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The wire of cigar jack and AC/DC adaptor will be used for FM transmitter antenna, no consideration of replacement by the user.

4. PRELIMINARY TEST**4.1 AC Power line Conducted Emission Test**

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Transmit the RF Signal continuously	X

4.2 Radiated Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Transmit the RF Signal continuously	X

5. FINAL RESULT OF MEASUREMENT

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level

5.1 Conducted Emission Test

Humidity Level : 40 % Temperature: 21 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.207 (a)
 Type of Test : Low Power Communication Device Transmitter
 Result : PASSED BY -3.24 dB at 0.22 MHz under peak detector mode

EUT : 4INCH WIDE TOUCH SCREEN NAVIGATION Date: March 14, 2007

Operating Condition : Transmit the RF signal.

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)

Frequency (MHz)	Line	Peak (dBuV)		Margin (dB)
		Emission level	Q.P Limits	
0.16	H	59.31	65.46	-6.15
0.17	N	55.73	64.96	-9.23
0.22	N	59.39	62.63	-3.24
0.24	H	52.52	61.92	-9.40
0.46	N	47.79	56.69	-8.90
0.59	H	47.79	56.00	-8.21
Frequency (MHz)	Line	Average (dBuV)		Margin (dB)
		Emission level	Limits	
0.16	H	22.87	55.46	-32.59
0.17	N	22.37	54.96	-32.59
0.22	N	33.82	52.63	-18.81
0.24	H	36.27	51.92	-15.65
0.46	N	26.72	46.69	-19.97
0.59	H	27.21	46.00	-18.79


Line Conducted Emission Tabulated Data

Remark : "H": Hot Line, "N": Neutral line

See next page for an overview sweep performed with peak and average detector



Tested by: Hyun-Ho, Kim / Test Engineer

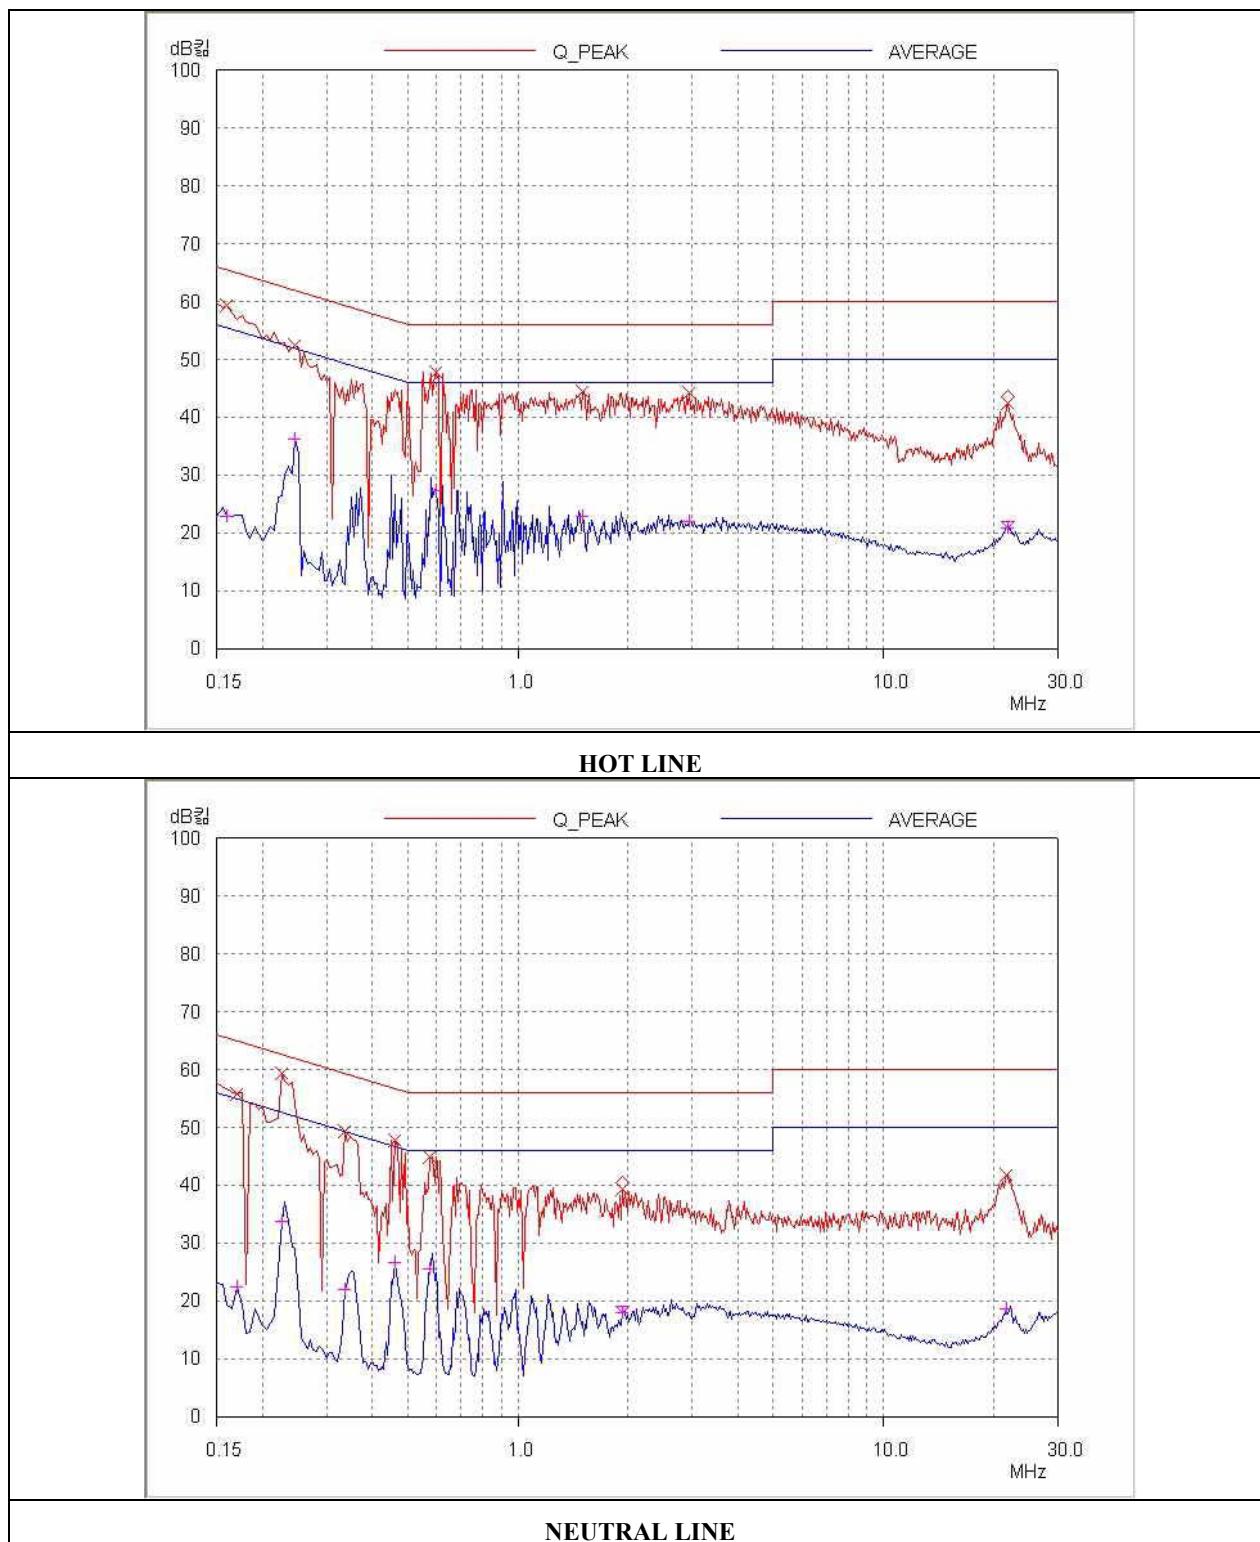

5.2 Radiated Emission Test (Within the permitted 200 kHz band)

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

5.2.1 Operating Condition: Used Car Battery

Humidity Level	: <u>47 %</u>	Temperature: <u>17 °C</u>
Limits apply to	: <u>FCC CFR 47, PART 15, SUBPART C, SECTION 15.239 (b)</u>	
Type of Test	: <u>Low Power Communication Device Transmitter</u>	
Result	: <u>PASSED BY -5.96 dB at 88.50 MHz under average detector mode</u>	

EUT	: 4INCH WIDE TOUCH SCREEN NAVIGATION	Date: March 15, 2007
Operating Condition	: Transmit the RF signal.	
Distance	: 3 Meter	

Radiated Emission			Ant	Correction Factors		Total	Limit (dBuV/m)	Margin (dB)
Freq. (MHz)	Amp. (dBuV)	Detect Mode	Pol.	Ant. (dBuV/m)	Cable (dB)	Amp. (dBuV/m)		
88.50	35.10	Peak	H	8.27	2.37	45.74	68.00	-22.26
	31.40	Average	H	8.27	2.37	42.04	48.00	-5.96
88.50	31.10	Peak	V	8.27	2.37	41.74	68.00	-26.26
	29.80	Average	V	8.27	2.37	40.44	48.00	-7.56

Radiated Emission Tabulated Data

Remark: Per 15.31(m), one channel (middle) was tested because the EUT's frequency range is less than 1 MHz.



Tested by: Hyun-Ho, Kim / Test Engineer

5.2.2 Operating Condition: Used AC/DC Adaptor

Humidity Level : 47 % Temperature: 17 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.239 (b)
 Type of Test : Low Power Communication Device Transmitter
 Result : PASSED BY -7.26 dB at 88.50 MHz under average detector mode

EUT : 4INCH WIDE TOUCH SCREEN NAVIGATION Date: March 15, 2007
 Operating Condition : Transmit the RF signal.
 Distance : 3 Meter

Radiated Emission			Ant	Correction Factors		Total	Limit (dBuV/m)	Margin (dB)
Freq. (MHz)	Amp. (dBuV)	Detect Mode	Pol.	Ant. (dBuV/m)	Cable (dB)	Amp. (dBuV/m)		
88.50	33.60	Peak	H	8.27	2.37	44.24	68.00	-23.76
	30.10	Average	H	8.27	2.37	40.74	48.00	-7.26
88.50	32.80	Peak	V	8.27	2.37	43.44	68.00	-24.56
	29.40	Average	V	8.27	2.37	40.04	48.00	-7.96

Radiated Emission Tabulated Data

Remark: Per 15.31(m), one channel (middle) was tested because the EUT's frequency range is less than 1 MHz.



Tested by: Hyun-Ho, Kim / Test Engineer

5.3 Radiated Emission Test (Outside of the specified 200 kHz band)


The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

5.3.1 Operating Condition: Used Car Battery

Humidity Level	: <u>47 %</u>	Temperature: <u>17 °C</u>
Limits apply to	: <u>FCC CFR 47, PART 15, SUBPART C, SECTION 15.209 (a)</u>	
Type of Test	: <u>Low Power Communication Device Transmitter</u>	
Result	: <u>PASSED BY -12.72 dB at 305.20 MHz</u>	

EUT	: 4INCH WIDE TOUCH SCREEN NAVIGATION	Date: March 15, 2007
Operating Condition	: Transmit the RF signal.	
Frequency range	: 30MHz – 1000MHz	
Detector	: CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)	
Distance	: 3 Meter	
Remark	: Other emissions	

Radiated Emission		Ant	Correction Factors		Total	FCC CLASS B	
Freq. (MHz)	Amp. (dBuV)	Pol.	Ant. (dBuV/m)	Cable (dB)	Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
56.30	12.10	V	8.87	1.65	22.62	40.00	-17.38
76.20	10.60	H	6.30	1.71	18.61	43.52	-24.91
120.40	16.50	H	13.01	2.70	32.21	46.02	-13.81
137.30	10.60	V	14.26	2.60	27.46	46.02	-18.56
250.60	12.40	V	17.57	3.32	33.29	46.02	-12.73
305.20	15.40	H	14.22	3.68	33.30	46.02	-12.72

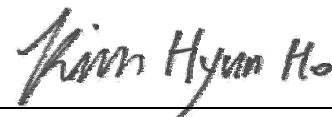

Tested by: Hyun-Ho, Kim / Test Engineer

5.3.2 Operating Condition: Used AC/DC Adaptor

Humidity Level	: <u>47 %</u>	Temperature: <u>17 °C</u>
Limits apply to	: <u>FCC CFR 47, PART 15, SUBPART C, SECTION 15.209 (a)</u>	
Type of Test	: <u>Low Power Communication Device Transmitter</u>	
Result	: <u>PASSED BY -8.69 dB at 130.20 MHz</u>	

EUT	: 4INCH WIDE TOUCH SCREEN NAVIGATION	Date: March 15, 2007
Operating Condition	: Transmit the RF signal.	
Frequency range	: 30MHz – 1000MHz	
Detector	: CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)	
Distance	: 3 Meter	
Remark	: Other emissions	

Radiated Emission		Ant	Correction Factors		Total	FCC CLASS B	
Freq. (MHz)	Amp. (dBuV)		Ant.	Cable (dB)		Amp. (dBuV/m)	Limit (dBuV/m)
56.80	16.40	V	8.69	1.67	26.76	40.00	-13.24
110.80	14.20	H	11.77	2.52	28.49	43.52	-15.03
130.20	18.50	V	13.73	2.60	34.83	43.52	-8.69
260.70	10.60	H	17.77	3.60	31.97	46.02	-14.05
301.80	14.90	V	14.08	3.63	32.61	46.02	-13.41



Tested by: Hyun-Ho, Kim / Test Engineer

5.4 Bandwidth of the operating frequencyHumidity Level : 46 % Temperature: 18 °CLimits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.239 (a)Result : PASSED


EUT : 4INCH WIDE TOUCH SCREEN NAVIGATION Date: March 15, 2007

Operating Condition : Transmit the RF signal.


Minimum Resolution

Bandwidth : 10 kHz


Operating Condition	Frequency (MHz)	Measured Value (kHz)	Limit (kHz)	Margin (kHz)
Used Car Battery	88.50	171.3	200	-28.7
Used AC/DC Adaptor	88.50	170.7		-29.3

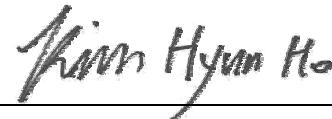

Tested by: Hyun-Ho, Kim / Test Engineer

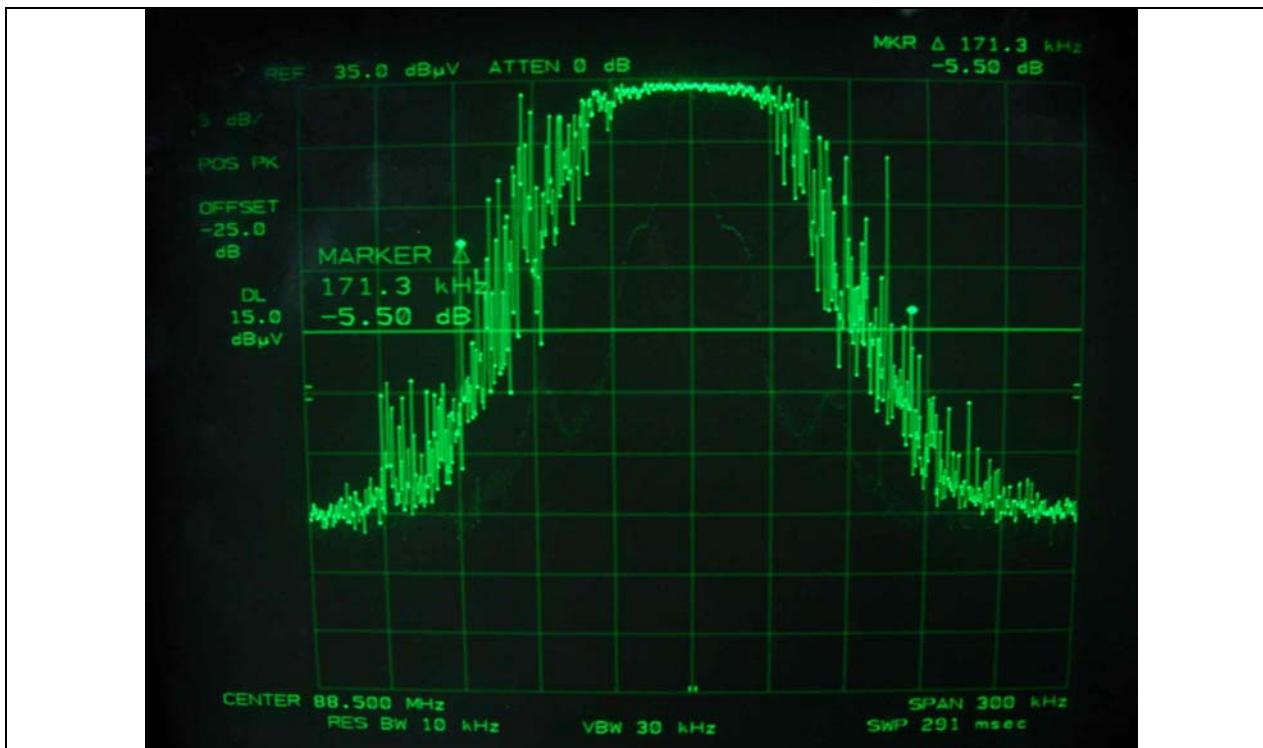

Used Car Battery - Middle Frequency (88.5 MHz)

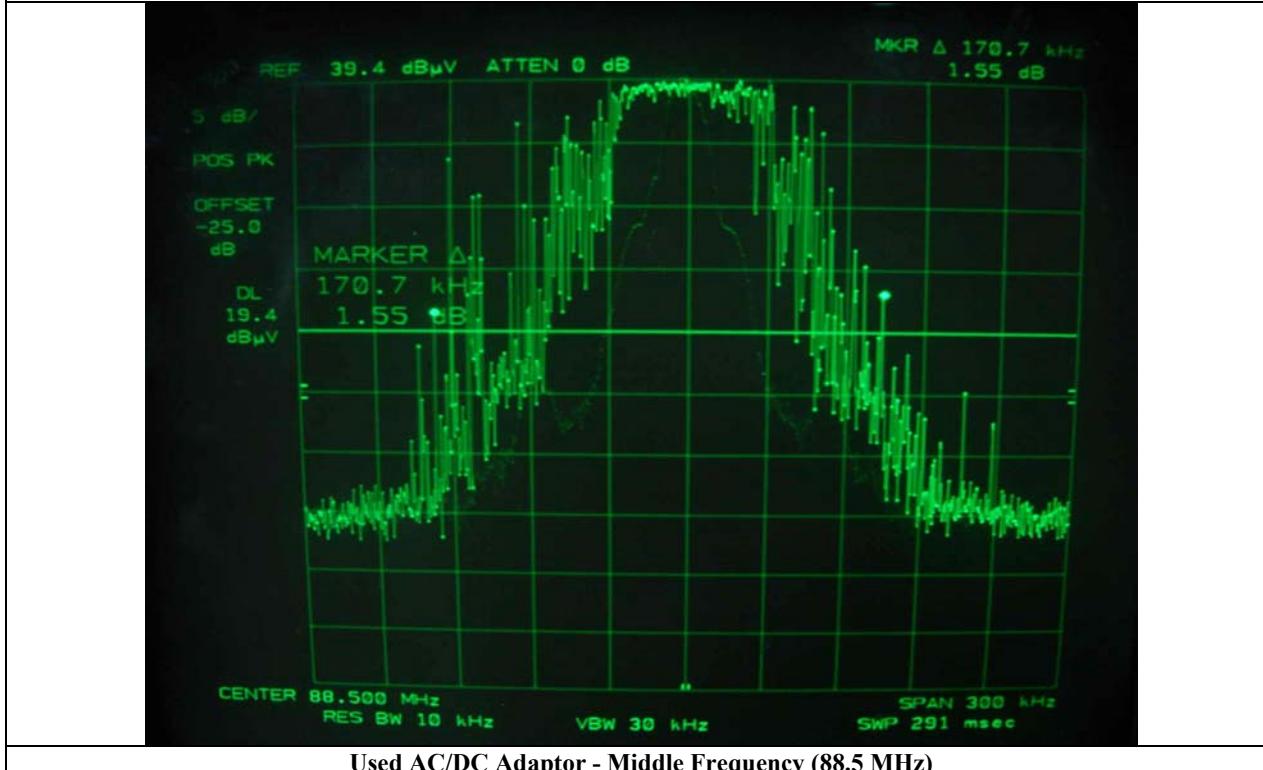

Used AC/DC Adaptor - Middle Frequency (88.5 MHz)


5.5 Tuning Range of the operating frequency

Humidity Level : 46 % Temperature: 18 °C
Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.239 (a)
Result : PASSED

EUT : 4INCH WIDE TOUCH SCREEN NAVIGATION Date: March 15, 2007
Operating Condition : The lowest and highest frequency was adjusted by manual using up/down button on the side of the EUT and the spectrum was in max hold mode for capturing the spectrum.
Test Result : Met the requirement. Refer to test data in next page.



Tested by: Hyun-Ho, Kim / Test Engineer

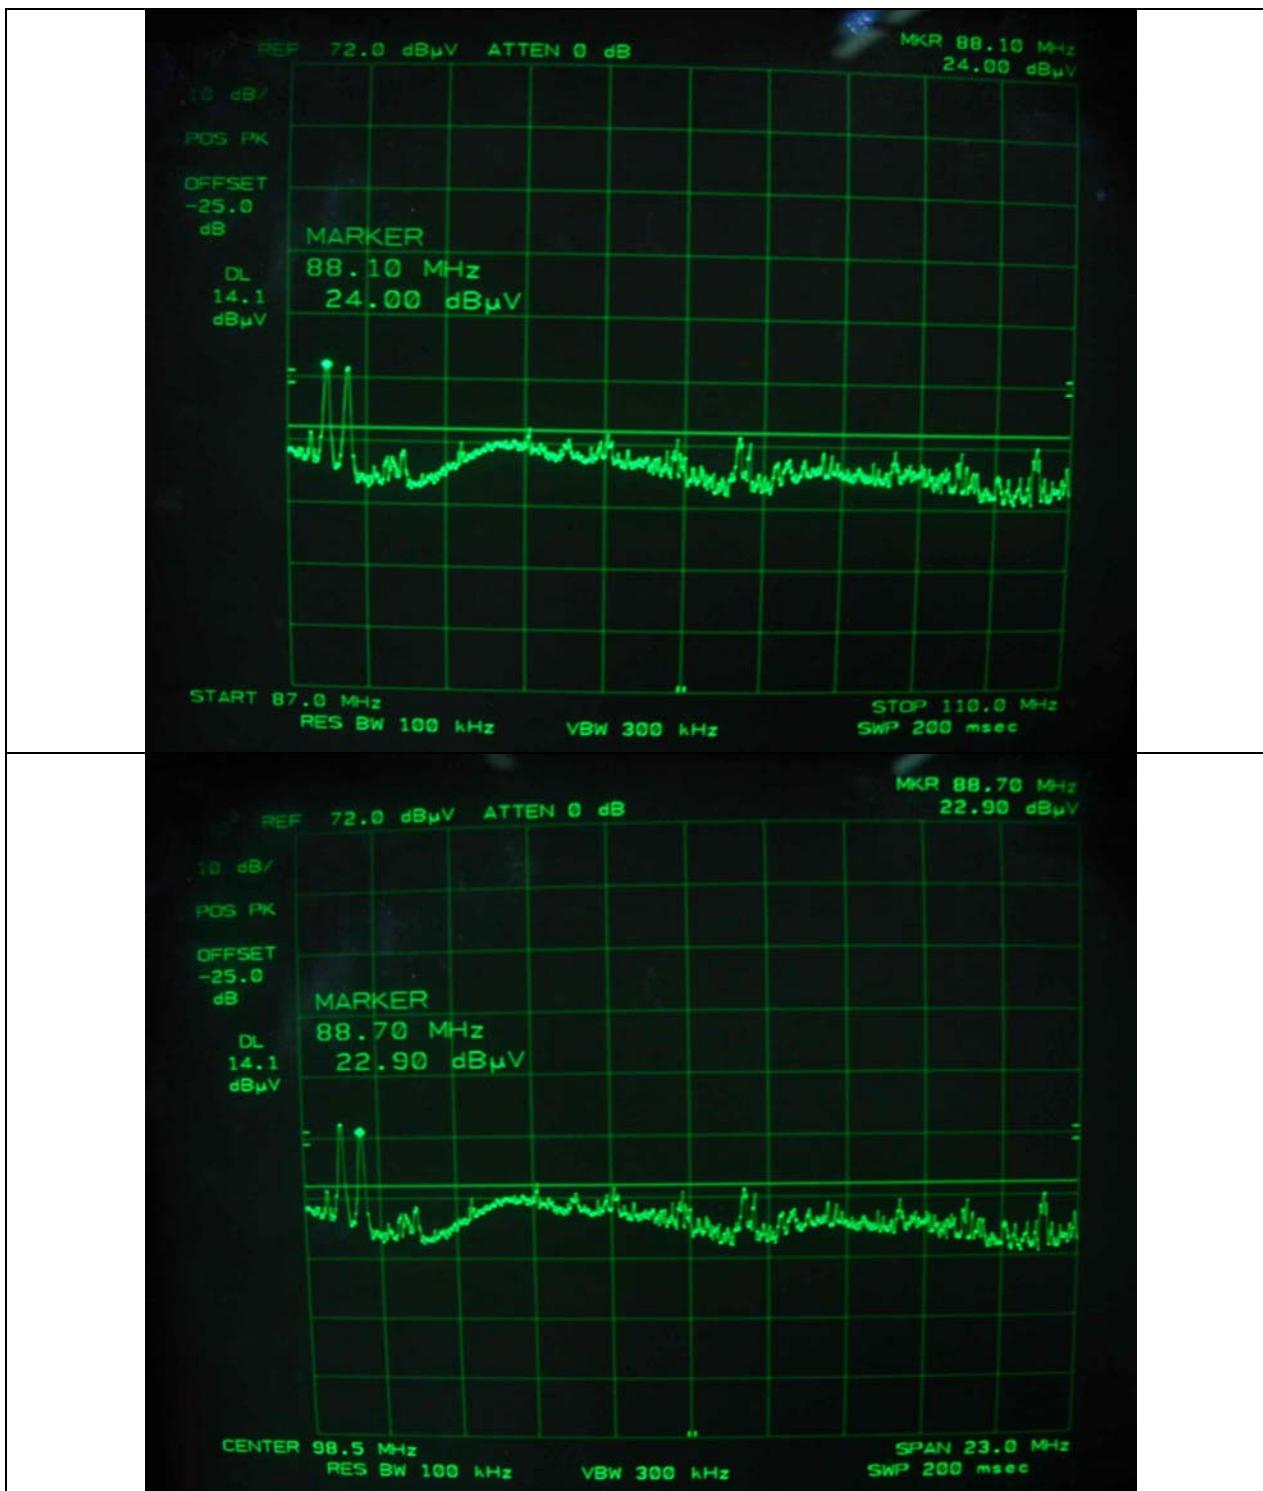

6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBuV)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/meter)

= Corrected Reading (dBuV/meter)

- Specification Limit (dBuV/meter)

= dB Relative to Spec (+/- dB)

7. LIST OF TEST EQUIPMENT

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUe CAL	USE
1.	Test receiver	R/S	ESVS10	827864/005	DEC/06	12MONTH	■
2.	Test receiver	R/S	ESHS 10	834467/007	MAY/06	12MONTH	■
3.	Spectrum analyzer	R/S	FSP	100017	JUN/06	12MONTH	■
4.	TRILOG Broadband Antenna	Schwarzbeck	VULB9163	VULB9163 166	MAY/06	12MONTH	
5.	Biconical antenna	EMCO	3110	9003-1121	JUN/06	12MONTH	
		Schwarzbeck	VHA9103	91031852	FEB/07		■
6.	Log Periodic antenna	EMCO	3146	9001-2614	JUN/06	12MONTH	
		Schwarzbeck	9108-A(494)	62281001	FEB/07		■
7.	LISN	EMCO	3825/2	9109-1867	JUN/06	12MONTH	■
				9109-1869	JUN/06		
		Schwarzbeck	NSLK 8126	8126-404	JUL/06		■
8.	Position Controller	HD GmbH	HD100	N/A	N/A	N/A	■
9.	Turn Table	HD GmbH	DS420S	N/A	N/A	N/A	■
10.	Antenna Master	HD GmbH	MA240	N/A	N/A	N/A	■