

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : E074R-035

AGR No. : A072A-139

Applicant : DVS Korea Co., Ltd.
Address : 7th & 8th Fl. KPS Bldg., 196 Kungok-dong, Boondang-ku, Sungnam-city,
Kyungki-do, 463-726, Korea

Manufacturer : DVS Korea Co., Ltd.
Address : 7th & 8th Fl. KPS Bldg., 196 Kungok-dong, Boondang-ku, Sungnam-city,
Kyungki-do, 463-726, Korea

Type of Equipment : 4.3" Portable Navigation with MP3 Player

FCC ID. : PGJVXA-5000

Model Name : VXA-5000

Serial number : N/A

Total page of Report : 43 pages (including this page)

Date of Incoming : March 21, 2007

Date of issue : April 13, 2007

SUMMARY

The equipment complies with the regulation; **FCC Part 15 Subpart C Section 15.247.**

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

Prepared by: 
Young-Min, Choi / Senior Engineer
EMC Div.
ONETECH Corp.

Reviewed by: 
Y. K. Kwon / Director
EMC Div.
ONETECH Corp.

CONTENTS

	PAGE
1. VERIFICATION OF COMPLIANCE.....	5
2. TEST SUMMARY.....	6
2.1 TEST ITEMS AND RESULTS.....	6
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	6
2.3 RELATED SUBMITTAL(S) / GRANT(S)	6
2.4 PURPOSE OF THE TEST	6
2.5 TEST METHODOLOGY	6
2.6 TEST FACILITY	6
3. GENERAL INFORMATION.....	7
3.1 PRODUCT DESCRIPTION.....	7
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.	7
4. EUT MODIFICATIONS	7
5. SYSTEM TEST CONFIGURATION.....	8
5.1 JUSTIFICATION	8
5.2 PERIPHERAL EQUIPMENT.....	8
5.3 CABLE DESCRIPTION	8
5.4 MODE OF OPERATION DURING THE TEST.....	8
5.5 CONFIGURATION OF TEST SYSTEM	9
5.6 ANTENNA REQUIREMENT	9
6. PRELIMINARY TEST.....	9
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	9
6.2 GENERAL RADIATED EMISSIONS TESTS.....	9
7. 20DB BANDWIDTH	10
7.1 OPERATING ENVIRONMENT	10
7.2 TEST SET-UP	10
7.3 TEST EQUIPMENT USED	10
7.4 TEST DATA	10
8. HOPPING FREQUENCY SEPARATION	13
8.1 OPERATING ENVIRONMENT	13
8.2 TEST SET-UP	13

8.3 TEST EQUIPMENT USED	13
8.4 TEST DATA	13
9. NUMBER OF HOPPING CHANNELS	15
9.1 OPERATING ENVIRONMENT	15
9.2 TEST SET-UP	15
9.3 TEST EQUIPMENT USED	15
9.4 TEST DATA	15
10. TIME OF OCCUPANCY	19
10.1 OPERATING ENVIRONMENT	19
10.2 TEST SET-UP	19
10.3 TEST EQUIPMENT USED	19
10.4 TEST DATA	20
11. MAXIMUM PEAK OUTPUT POWER.....	23
11.1 OPERATING ENVIRONMENT	23
11.2 TEST SET-UP	23
11.3 TEST EQUIPMENT USED	23
11.4 TEST DATA	23
12. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND.....	26
12.1 OPERATING ENVIRONMENT	26
12.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	26
12.3 TEST SET-UP FOR RADIATED MEASUREMENT	26
12.4 TEST EQUIPMENT USED	26
12.5. TEST DATA	27
12.5.1. TEST DATA FOR CONDUCTED EMISSION.....	27
12.5.2. TEST DATA FOR RADIATED EMISSION	31
12.5.2.1. RADIATED EMISSION WHICH FALL IN THE RESTRICTED BAND	31
12.5.2.2. SPURIOUS & HARMONIC RADIATED EMISSION.....	32
13. PEAK POWER SPECTRUL DENSITY	34
13.1 OPERATING ENVIRONMENT	34
13.2 TEST SET-UP	34
13.3 TEST EQUIPMENT USED	34
13.4 TEST DATA	34
14. RADIO FREQUENCY EXPOSURE.....	37
14.1 RF EXPOSURE LIMIT	37

14.2 EUT DESCRIPTION	37
14.3 TEST RESULT	37
15. RADIATED EMISSION TEST	38
15.1 OPERATING ENVIRONMENT	38
15.2 TEST SET-UP	38
15.3 MEASUREMENT UNCERTAINTY	38
15.4 TEST EQUIPMENT USED	38
15.5 TEST DATA	39
16. CONDUCTED EMISSION TEST	41
16.1 OPERATING ENVIRONMENT	41
16.2 TEST SET-UP	41
16.3 TEST EQUIPMENT USED	41
16.4 TEST DATA	42

1. VERIFICATION OF COMPLIANCE

APPLICANT : DVS Korea Co., Ltd.
ADDRESS : 7th & 8th Fl. KPS Bldg., 196 Kumgok-dong, Boondang-ku, Sunnam-city, Kyungki-do,
463-726, Korea
CONTACT PERSON : Mr. Hyundoo, Kim / Manager
TELEPHONE NO : +82-31-546-3142
FCC ID : PGJVXA-5000
MODEL NAME : VXA-5000
BRAND NAME : PLENiO
SERIAL NUMBER : N/A
DATE : April 13, 2007

EQUIPMENT CLASS	<i>DSS – PART 15 SPREAD SPECTRUM TRANSMITTER</i>
KIND OF EQUIPMENT	4.3" Portable Navigation with MP3 Player
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	ANSI C63.4: 2003
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	None
FINAL TEST WAS CONDUCTED ON	3 METER(S) OPEN AREA TEST SITE

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (1)	Carrier Frequency Separation	Met the Limit / PASS
15.247 (a) (1) (iii)	Minimum Number of Hopping Channels	Met the Limit / PASS
15.247 (a) (1) (iii)	Average Time of Occupancy	Met the Limit / PASS
15.247 (a) (2)	Minimum 6dB Bandwidth	Met the Limit / PASS
15.247 (b) (3)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (b) (5)	Radio Frequency Exposure Level	Met the Limit / PASS
15.247 (c)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (c)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.247 (d)	Peak Power Spectral Density	Met the Limit / PASS
15.209 and 15.109	Radiated Emission Limits	Met the Limit / PASS
15.207 and 15.107	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met requirement / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in section 2.1.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4: 2003. Radiated testing was performed at a distance of 3 meters from EUT to the antenna.

2.6 Test Facility

The Electromagnetic compatibility measurement facilities are located on at 307-51 Daessangryung-ri, Chowol-eup, Gwangju-si, Gyeonggi-do 464-080 Korea. Description details of test facilities were submitted to the Federal Communications Commission on August 30, 2005 (Registration Number: 92819 and 340658), accredited by KOLAS (Korea Laboratory Accreditation Scheme, No: 85) and approved by TUV, DNV and MIC (Ministry of Information and Communications in Korea) according to the requirement of ISO17025.

3. GENERAL INFORMATION

3.1 Product Description

The DVS Korea Co., Ltd., Model VXA-5000 (referred to as the EUT in this report) is a 4.3" Portable Navigation with MP3 Player that has a function for transmitting of FM broadcasting frequency range and Bluetooth. This report covers a Bluetooth function. The product specification described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	4.3" Portable Navigation with MP3 Player
OPERATING FREQUENCY	2402~2480 MHz
RF OUTPUT POWER	0.002 Watt
NUMBER OF CHANNEL	79 Channels
RATED OCCUPIED BANDWIDTH	1 MHz
MODULATION TYPE	GFSK
ANTENNA MFG / MODEL NAME	Sejong Tronics Co., Ltd. / ALA931C4
ANTENNA TYPE	Multilayer Chip Antenna
ANTENNA GAIN	0dBi
LIST OF EACH OSC. OR CRYSTAL. FREQ.(FREQ.>=1MHz)	12 MHz and 7.6 MHz
NUMBER OF LAYER	8 Layers: Main Board 2 Layers: Button Board, Cradle Board and Sub Board
POWER REQUIREMENT	DC 5V from a car battery or AC/DC adaptor

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	N/A	VXA5000 MAIN	N/A
LCD Panel	N/A	N/A	N/A
GPS Module	LEADTEK	LR9552	N/A
Front Function Key Board	N/A	TOUCH B/D	N/A
Cradle Board	N/A	CRADLE B/D	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	FCC ID	Description	Connected to
VXA-5000	DVS Korea Co., Ltd.	PGJVXA-5000	4.3" Portable Navigation with MP3 Player (EUT)	-
CP79A0050V2000U	NCE	N/A	AC/DC Adaptor	EUT
N/A	N/A	N/A	Headset	EUT
PP01L	Dell Computer	DoC	Laptop PC	Test Jig
MO56UOA	Dell Computer	DoC	Mouse	Laptop PC
N/A	N/A	N/A	Test Jig	EUT & Laptop PC

5.3 Cable Description

Ports Name	Shielded	Ferrite Bead	Metal Hood	Length (m)	Connected to
DC In	N	N	EUT END	1.2	-
Audio Out	N	N	BOTH END	1.5	Headset

5.4 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting and receiving mode is programmed. For final testing, Bluetooth was set at Low Channel (2402MHz), Middle Channel (2441MHz), and High Channel (2480MHz). To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

5.5 Configuration of Test System

Line Conducted Test: The EUT was connected to adaptor and the power line of adaptor was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.4: 2003 7.2.3 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.4: 2003 8.3.1.1 and 13.1.4.1 to determine the worse operating conditions. Final radiated emission tests were conducted at 3meter open area test site.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.6 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The wire of cigar jack and AC/DC adaptor will be used for FM transmitter antenna, no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
TX mode	X

6.2 General Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
TX mode	X

7. 20dB BANDWIDTH

7.1 Operating environment

Temperature : 21 °C

Relative humidity : 43 %

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 10 kHz, and peak detection was used. The 20dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 20 dB.



7.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - 8564E	HP	Spectrum Analyzer	3650A00756	June 22, 2006

All test equipment used is calibrated on a regular basis.

7.4 Test data


- Test Date : April 06, 2007

- Test Result : Pass


CHANNEL	FREQUENCY(MHz)	MEASURED VLAUE (kHz)	LIMIT (kHz)	MARGIN (kHz)
Low	2402	825	1000	-175
Middle	2441	825	1000	-175
High	2480	833	1000	-167

Remark: See next page for an overview sweep performed with peak detector.


Tested by: Ki-Hong, Nam / Test Engineer

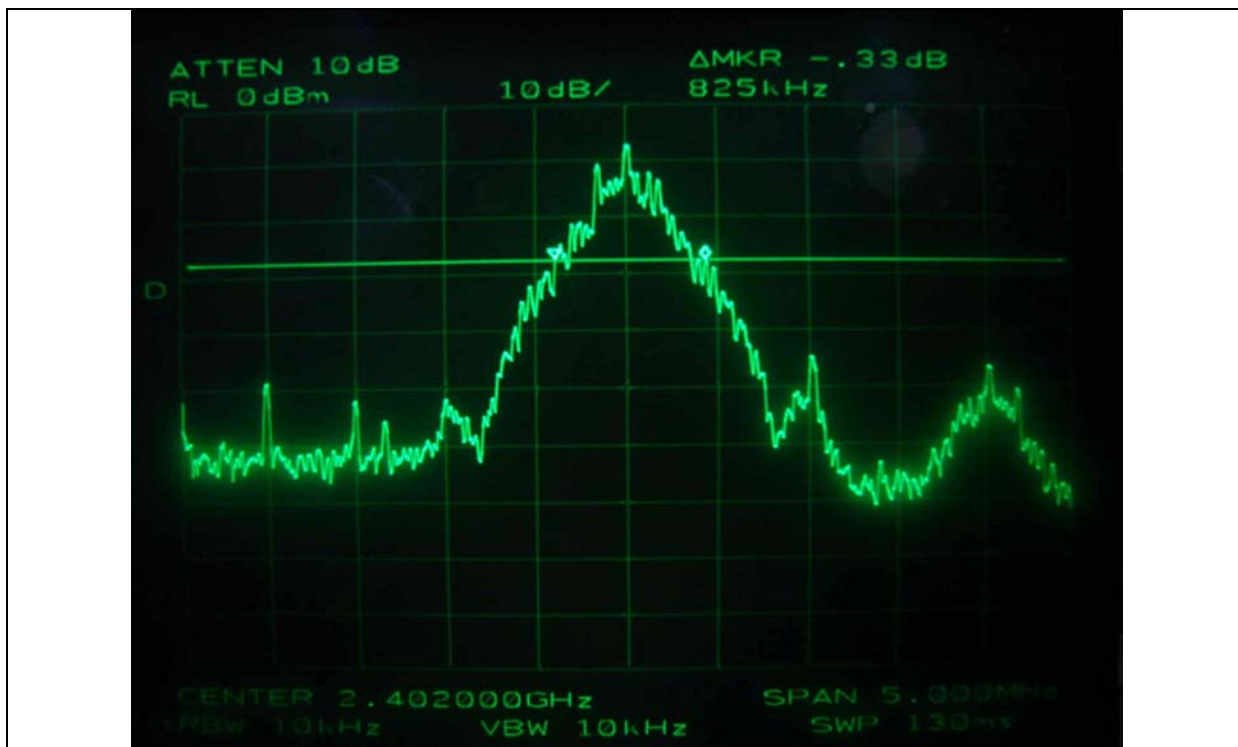

Low Channel

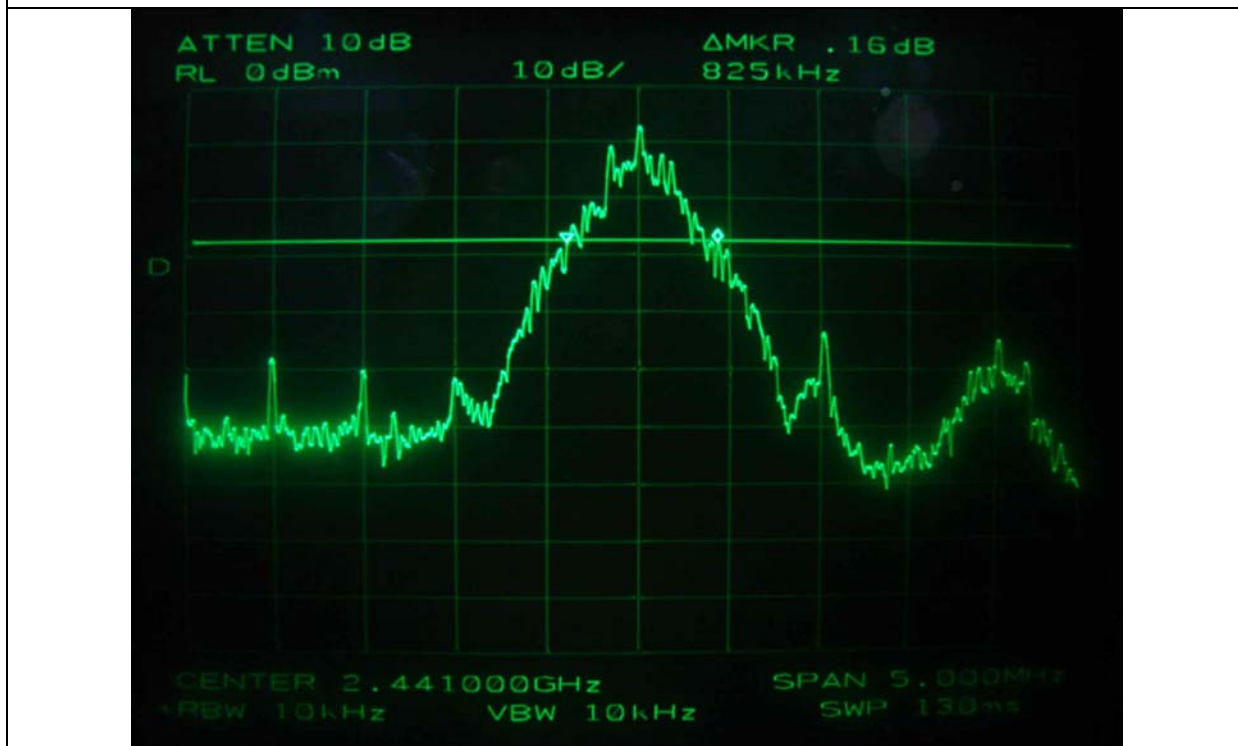

Middle Channel

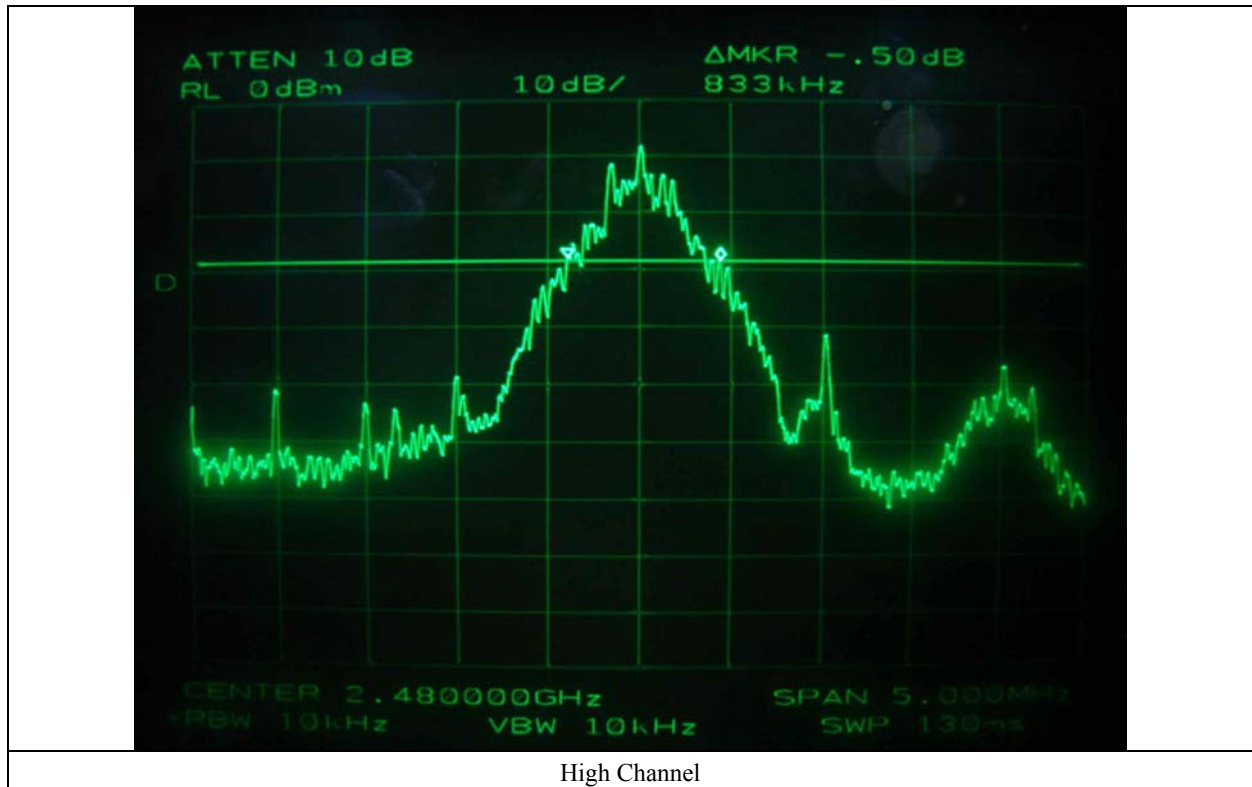

8. HOPPING FREQUENCY SEPARATION


8.1 Operating environment

Temperature : 21 °C

Relative humidity : 43 %

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 10 MHz. The analyzer is set to peak hold, and then a pseudo-random hopping sequence of the transmitter is captured. The mark delta function was used to measure the frequency separation between two adjacent hopping channels.

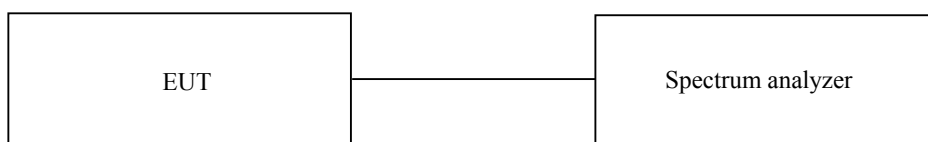

8.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - 8564E	HP	Spectrum Analyzer	3650A00756	June 22, 2006

All test equipment used is calibrated on a regular basis.

8.4 Test data


-. Test Date : April 06, 2007

-. Test Result : Pass

MEASURED VLAUE (kHz)	LIMIT, 20dB Bandwidth (kHz)	MARGIN (kHz)
1030	833	-197

기홍

Tested by: Ki-Hong, Nam / Test Engineer

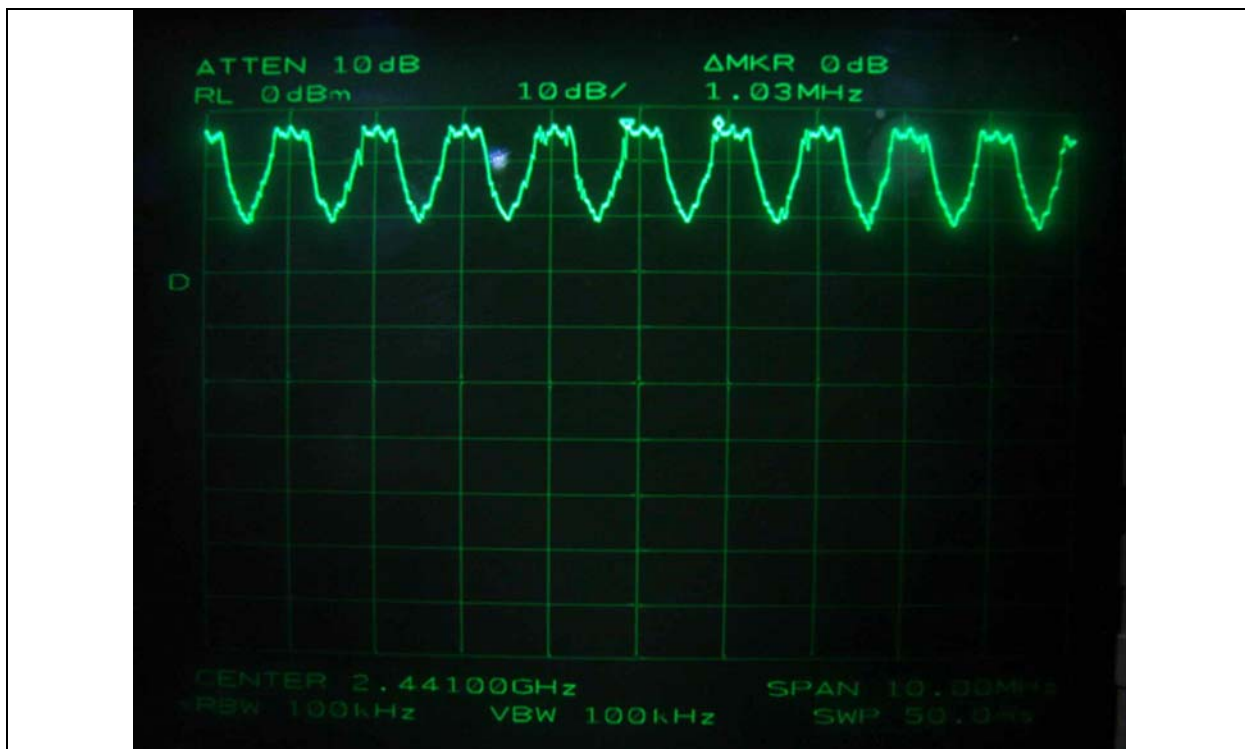

9. NUMBER OF HOPPING CHANNELS


9.1 Operating environment

Temperature : 21 °C

Relative humidity : 43 %

9.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 100 MHz and the resolution bandwidth is set to 1 MHz. The analyzer is set to peak hold and then complete pseudo-random hopping sequence of the transmitter is captured.

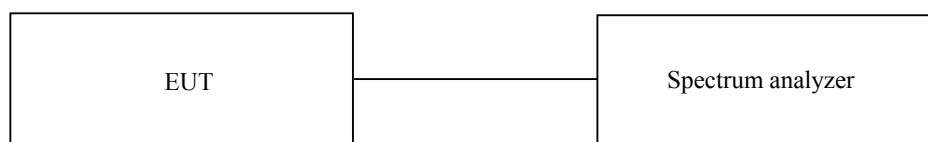

9.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - 8564E	HP	Spectrum Analyzer	3650A00756	June 22, 2006

All test equipment used is calibrated on a regular basis.


9.4 Test data


-. Test Date : April 06, 2007

-. Test Result : Pass


MEASURED VLAUE (Number)	LIMIT (Number)	MARGIN (Number)
79	Minimum of 75	4

Tested by: Ki-Hong, Nam / Test Engineer

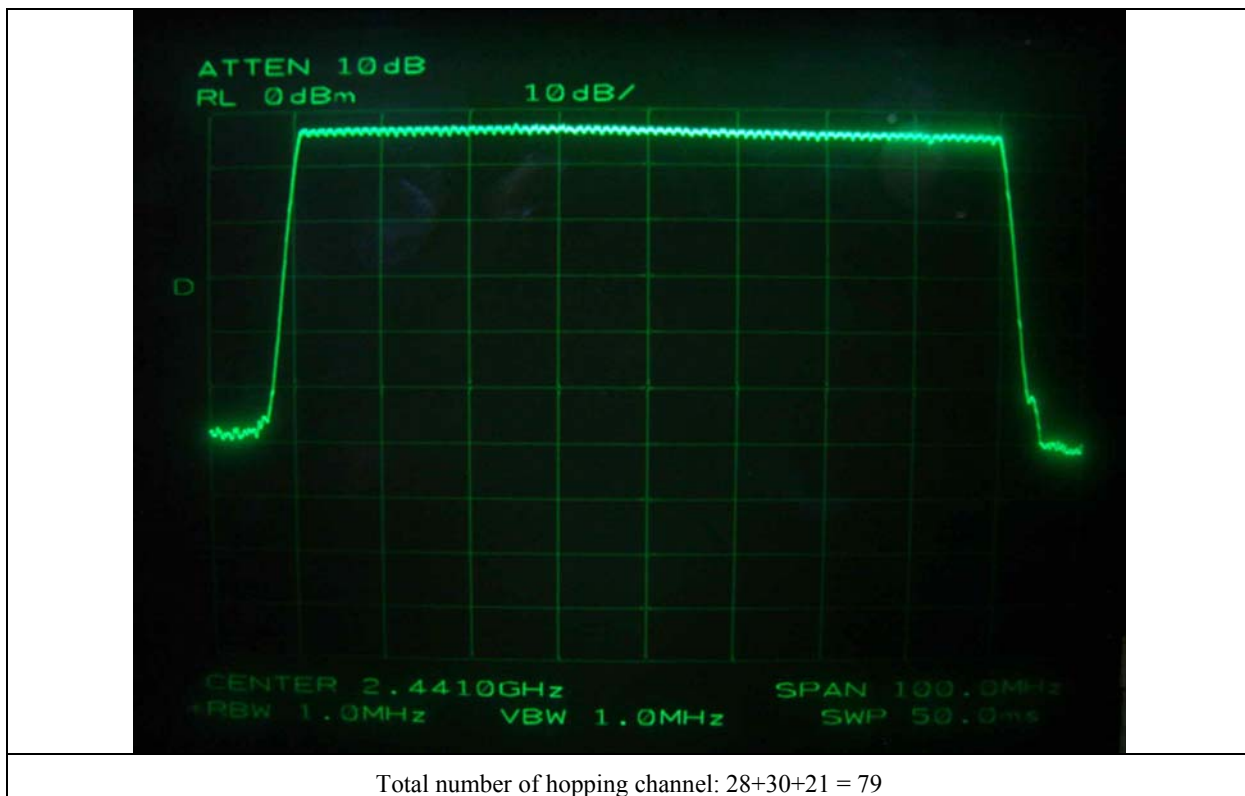


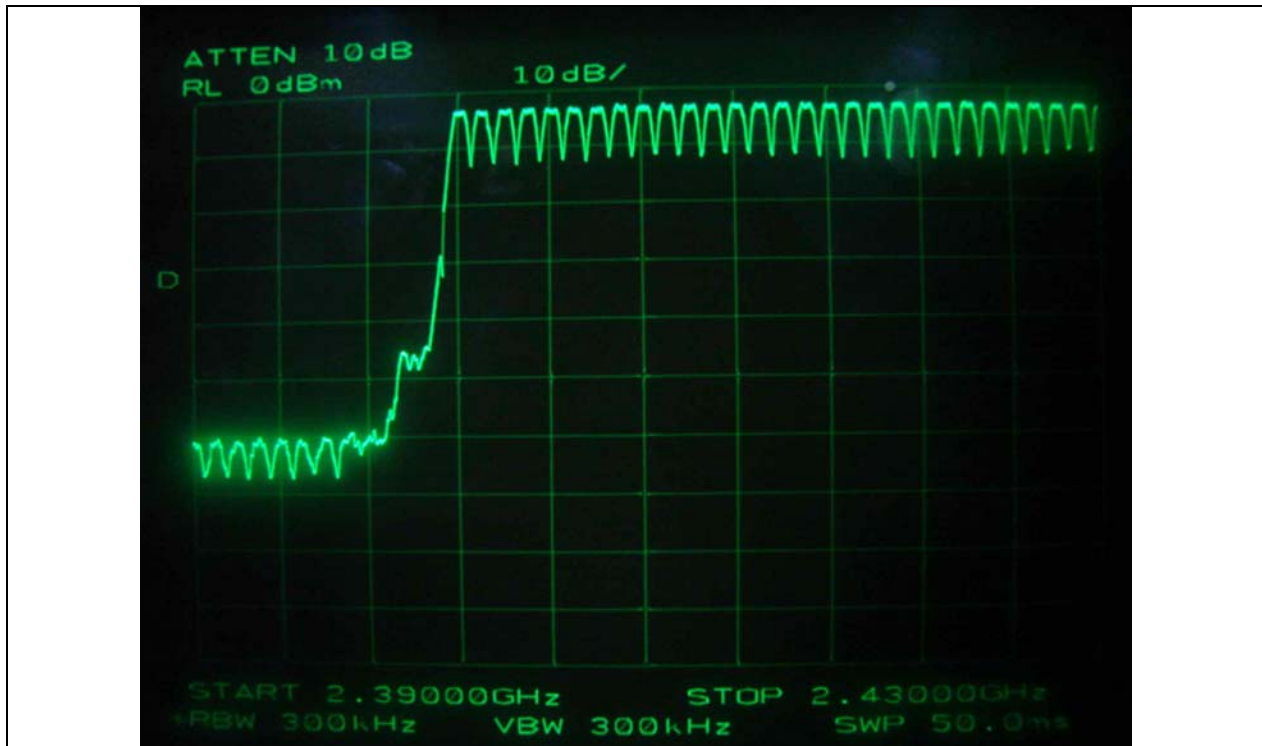

Number of hopping channel: 28

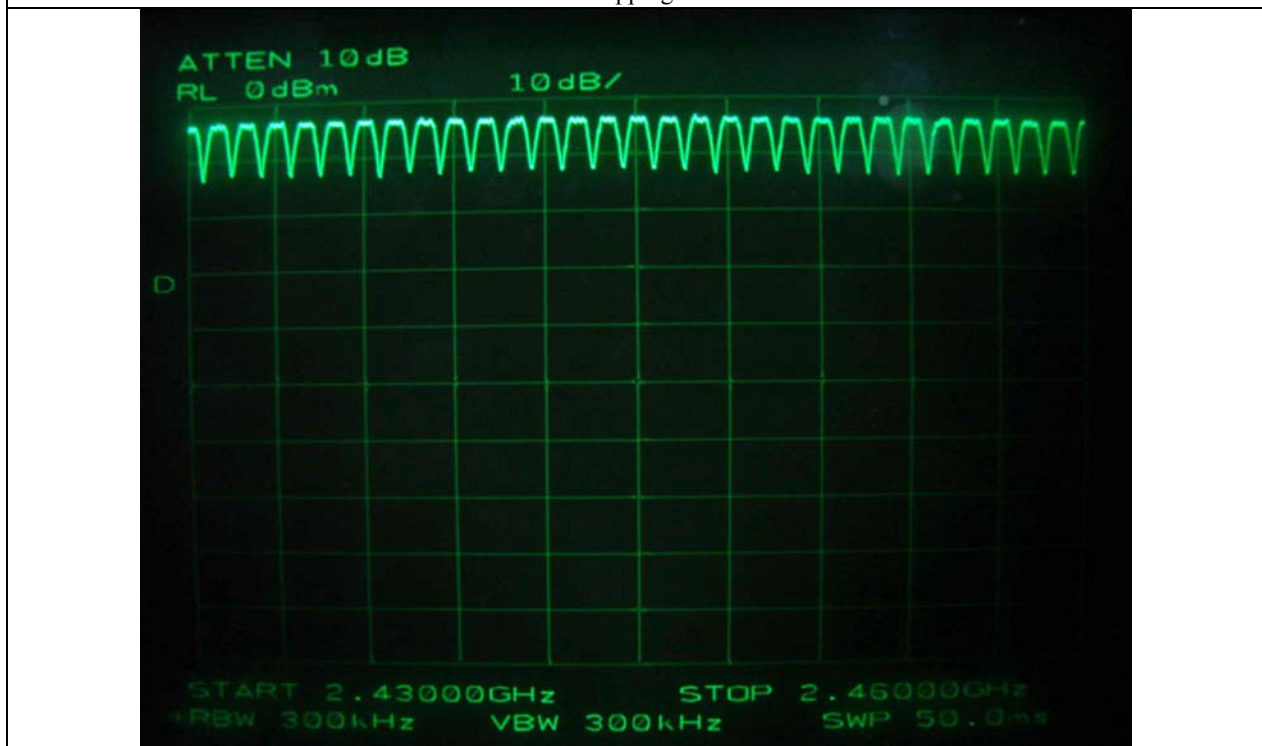

Number of hopping channel: 30

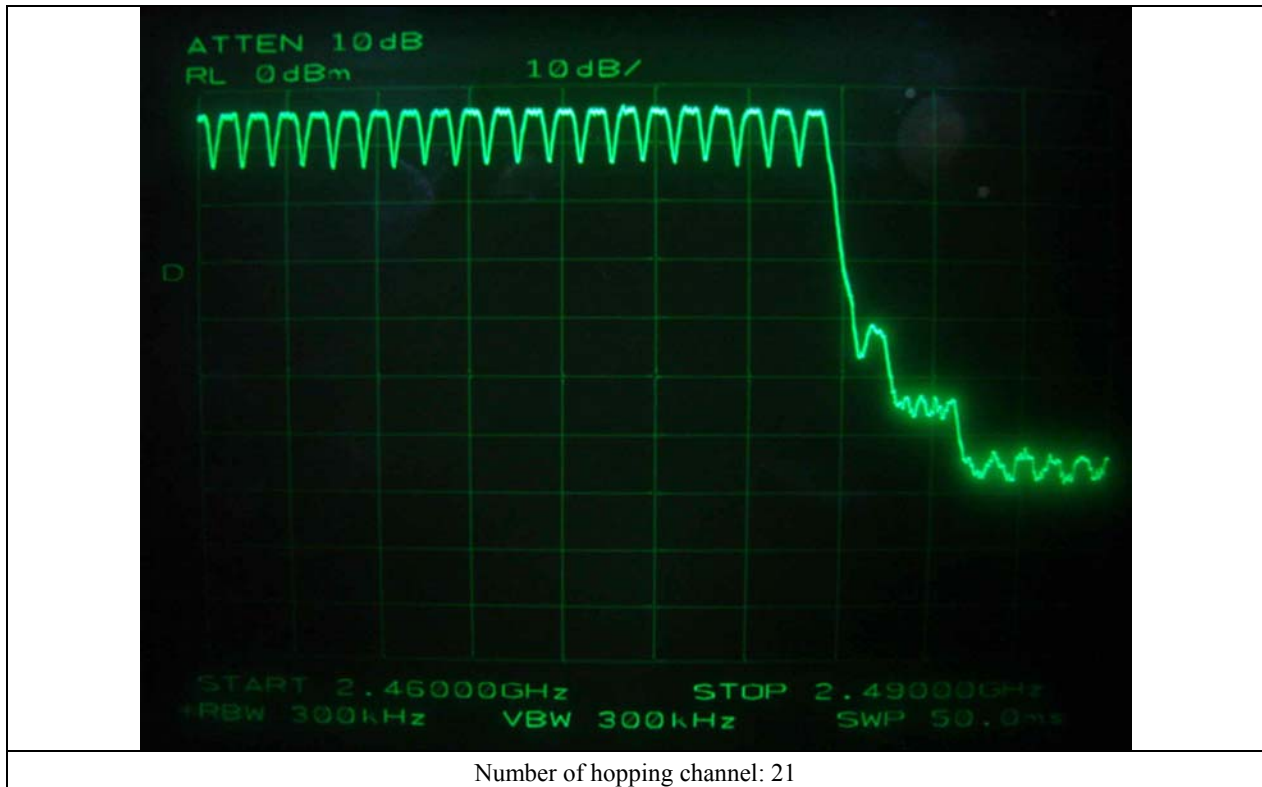

10. TIME OF OCCUPANCY

10.1 Operating environment

Temperature : 21 °C

Relative humidity : 43 %

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The transmitter is set to operate in its normal frequency hopping mode. The center frequency of the spectrum analyzer is set to one of hopping channels near the center of the operating band and span is set to zero Hz. The sweep time is set to display one complete pulse. The mark delta function is used to measure the duration of the pulses.



10.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	8564E	HP	Spectrum Analyzer	3650A00756	June 22, 2006

All test equipment used is calibrated on a regular basis.

10.4 Test data

-. Test Date : April 06, 2007


The system makes worst case 1600 hops per second or 1 time slot has a length of 625us with 79 channels.

For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second ($=1600/2/79$) for DH1, and 5.06 times ($=1600/4/79$) for DH3, and 3.38 times ($=1600/6/79$) for DH5.


Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.4167	10.13	31.6	133.39	400	PASS
DH3	1.6830	5.06	31.6	269.10	400	PASS
DH5	2.9000	3.38	31.6	309.74	400	PASS

Total dwell time is calculated as following.


Total Dwell Time = Pulse time * Hops per second with channels * period time




Tested by: Ki-Hong, Nam / Test Engineer

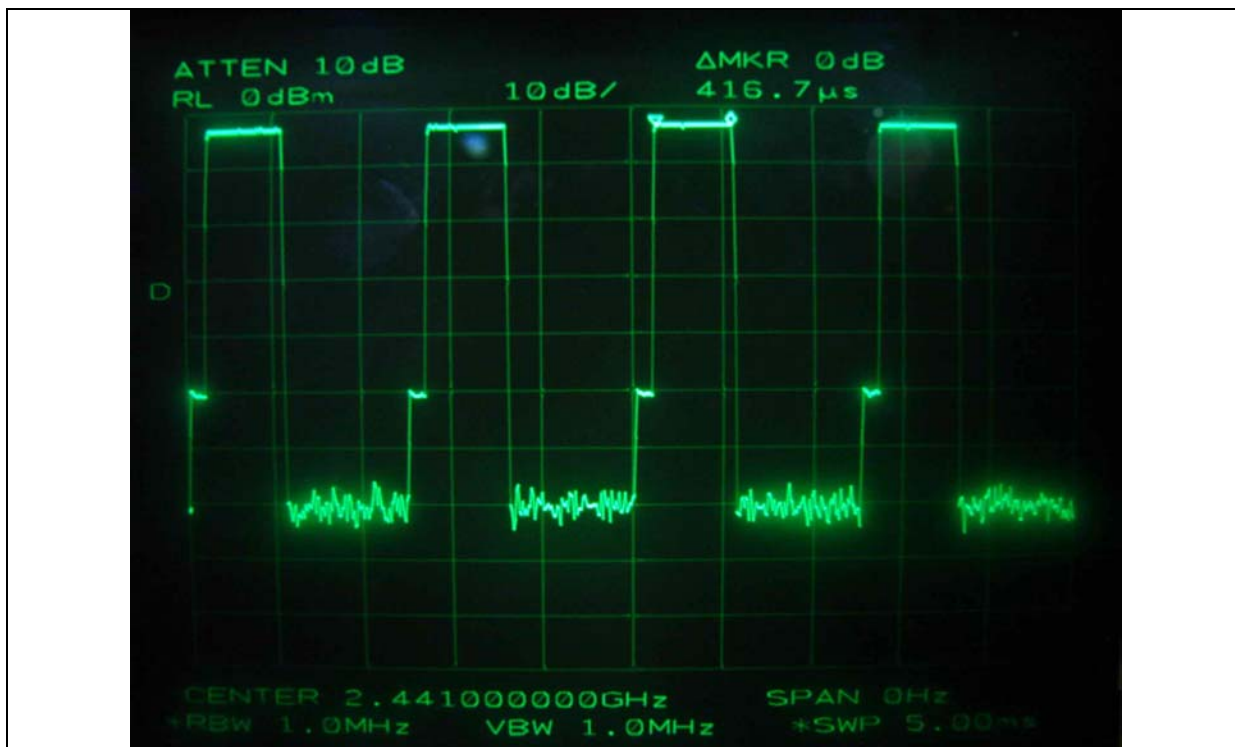

DH1

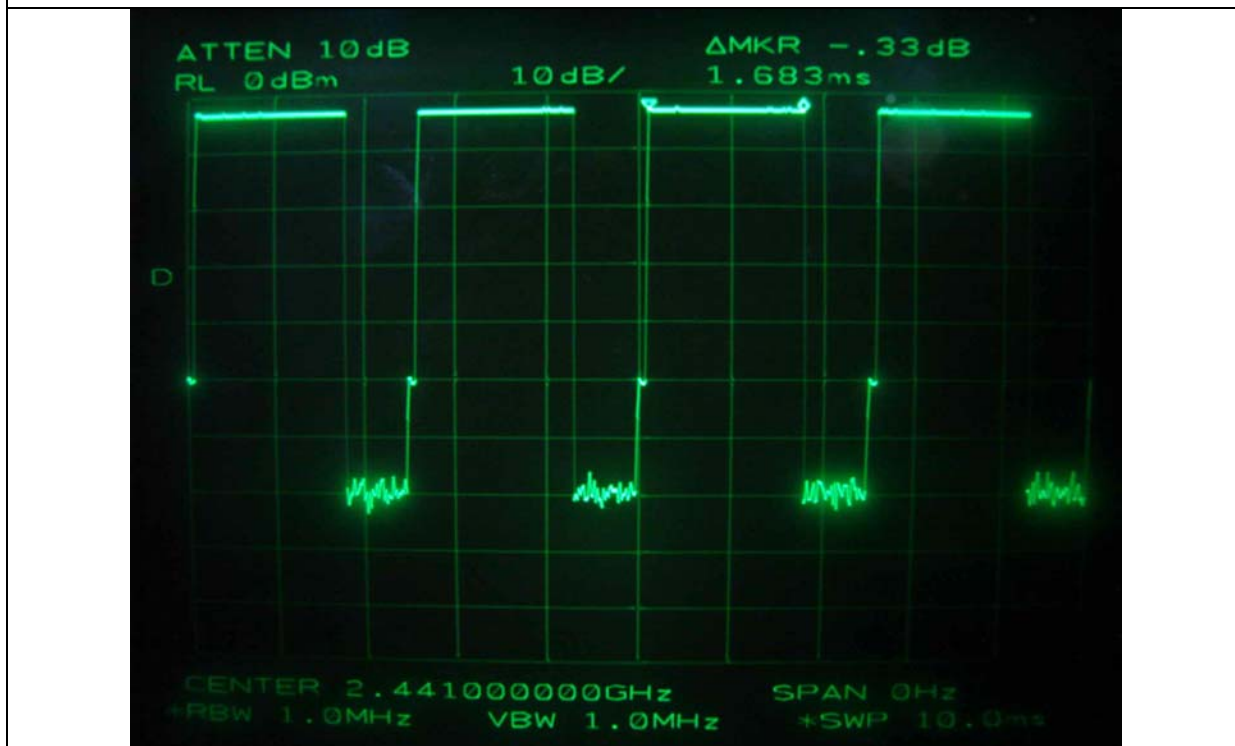

DH3

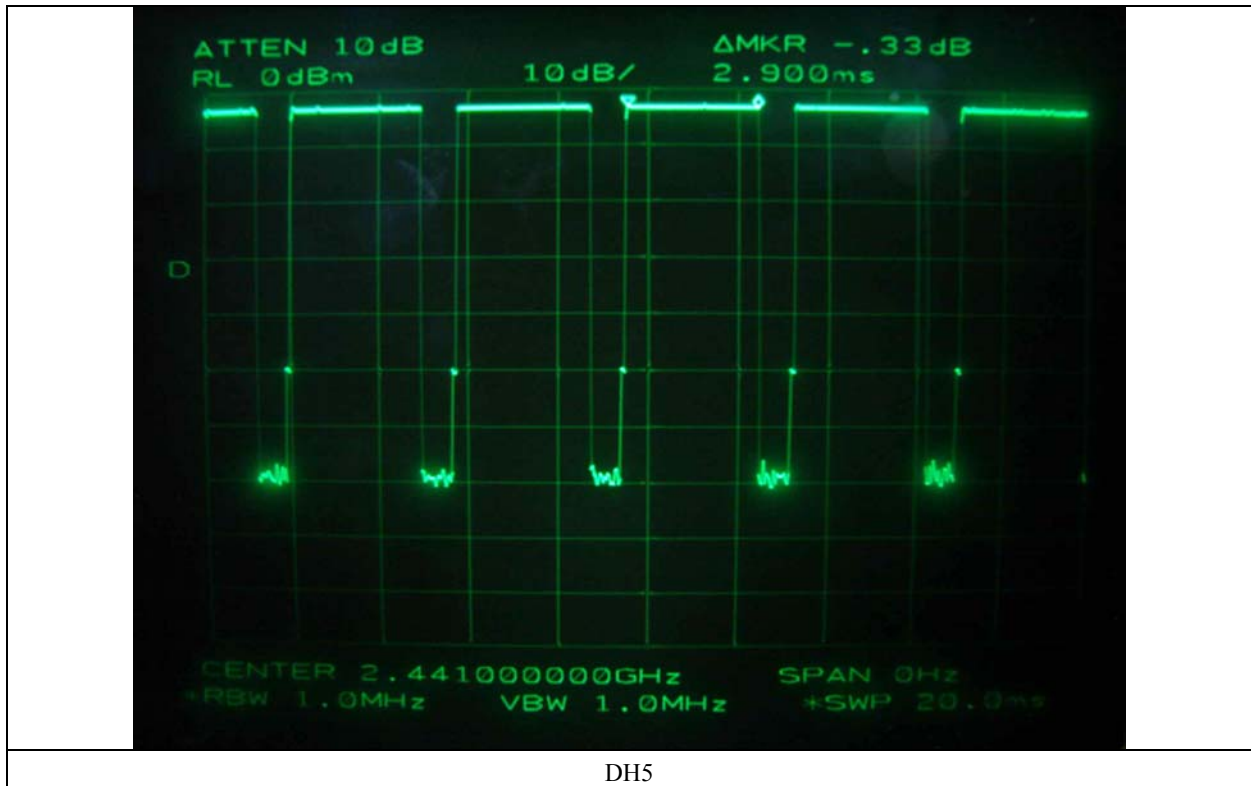

11. MAXIMUM PEAK OUTPUT POWER


11.1 Operating environment

Temperature : 21 °C

Relative humidity : 43 %

11.2 Test set-up

The maximum peak output power was measured with the power meter connected to the antenna output of the EUT. The EUT was operating in transmit mode at the appropriate center frequency.



11.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - 8564E	HP	Spectrum Analyzer	3650A00756	June 22, 2006

All test equipment used is calibrated on a regular basis.

11.4 Test data

- Test Date : April 06, 2007

- Test Result : Pass

CHANNEL	FREQUENCY(MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2402	-2.17	30.0	-32.17
Middle	2441	-1.83	30.0	-31.83
High	2480	-2.67	30.0	-32.67

Tested by: Ki-Hong, Nam / Test Engineer



Low Channel



Middle Channel



12. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

12.1 Operating environment

Temperature : 21°C
Relative humidity : 43 %

12.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.



12.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3meters, open-field test site. The EUT was placed on a non-conductive turntable approximately 0.8 meters above the ground plane.

The frequency spectrum from 30MHz to 25GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 and 4.0 meters in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.


12.4 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - 8564E	Hewlett-Packard	Spectrum Analyzer	3650A00756	June 22, 2006
■ - 8447D	Hewlett-Packard	Amplifier	2727A04987	June 14, 2006
□ - 83051A	Agilent	Preamplifier	3950M00201	June 23, 2006
■ - F-40-5000-RF	RLC Electronics	Highpass Filter	0425	July 14, 2006
■ - MA220	HD	Turn Table	N/A	N/A
■ - HD240	HD	Antenna Mast	N/A	N/A
■ - BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D294	July 03, 2006
■ - YSE 500B	YoungShin Eng.	Frequency Converter	950413001	N/A
■ - ETCR-10	DaeHa	Automatic Voltage Com.	N/A	N/A

All test equipment used is calibrated on a regular basis.

12.5. Test data

12.5.1. Test data for conducted emission

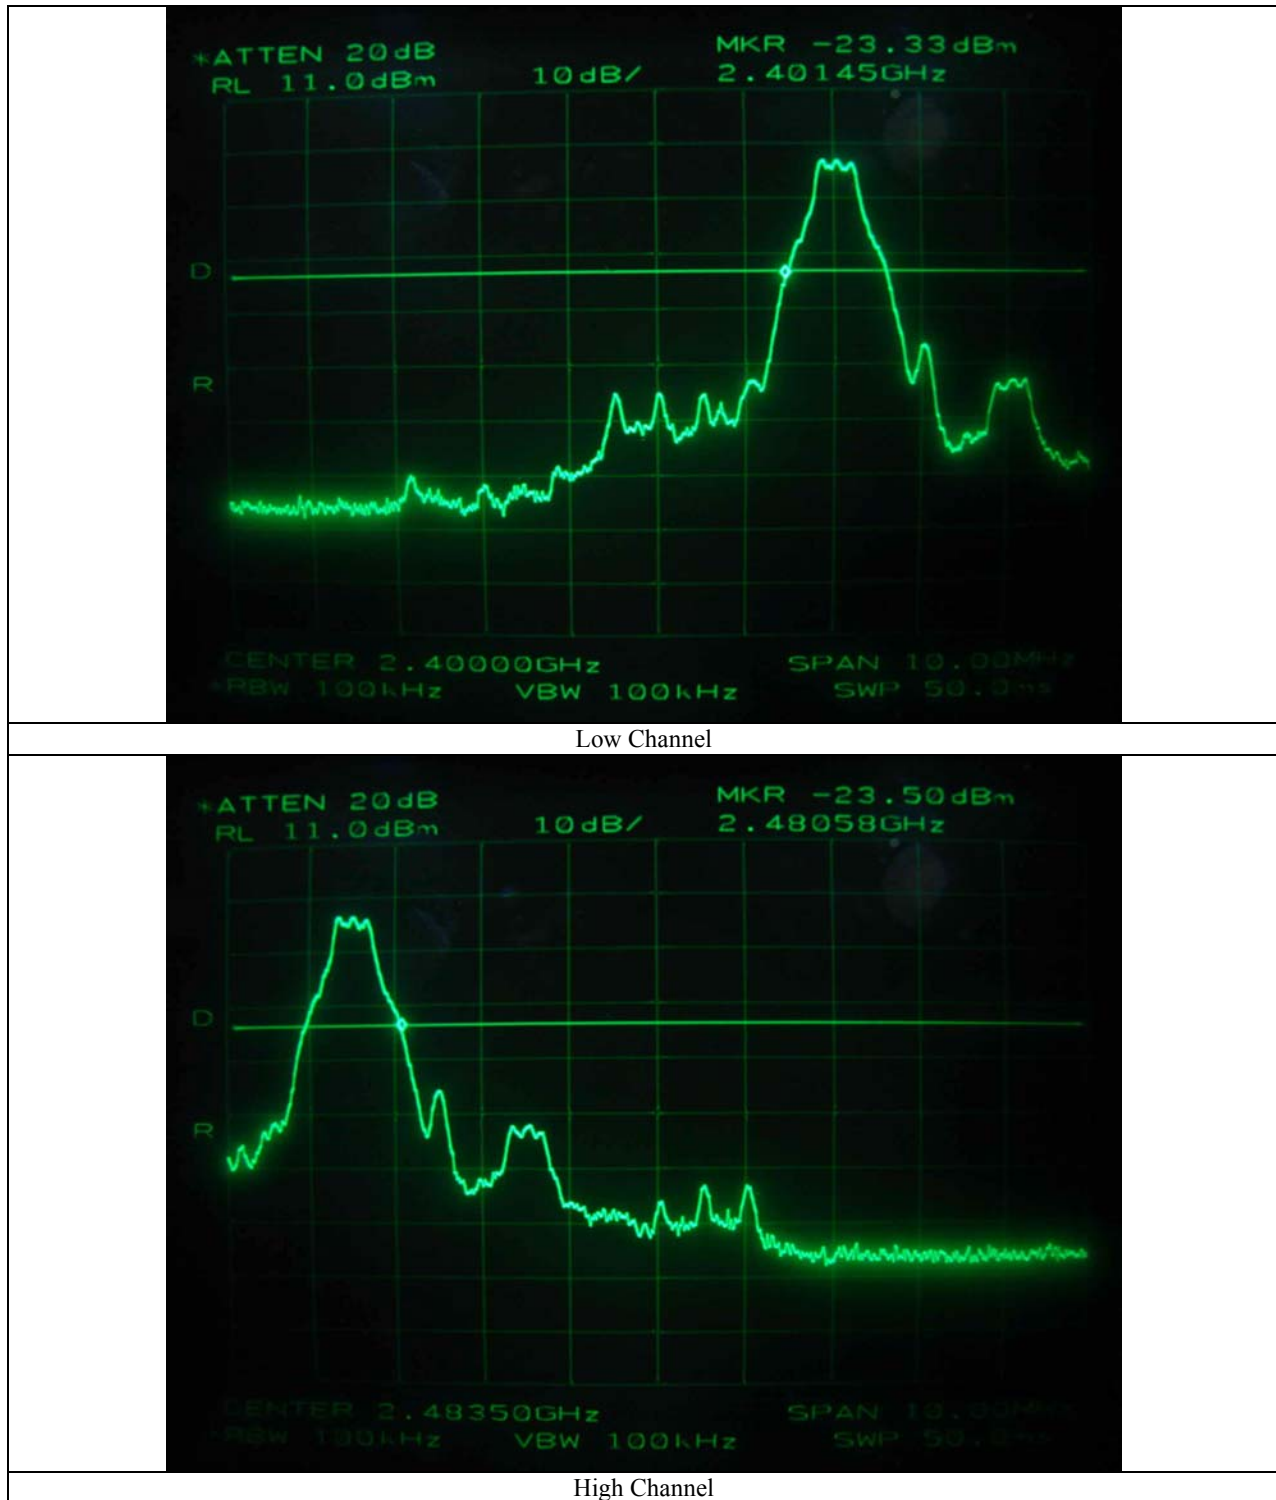


It should not be reproduced except in full, without the written approval of ONETECH.

EMC-003 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, 462-705, Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)


EMC Testing Dept : 307-51 Daessangryung-ri, Chowol-eup, Gwangju-si, Gyeonggi-do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)

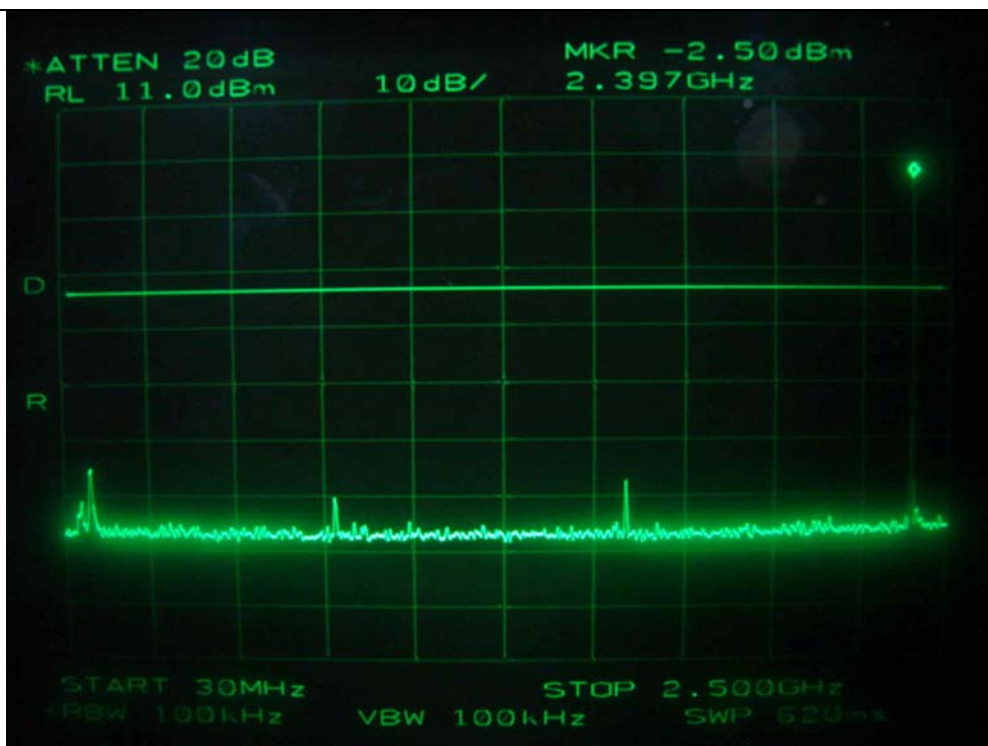


Low Channel




Low Channel

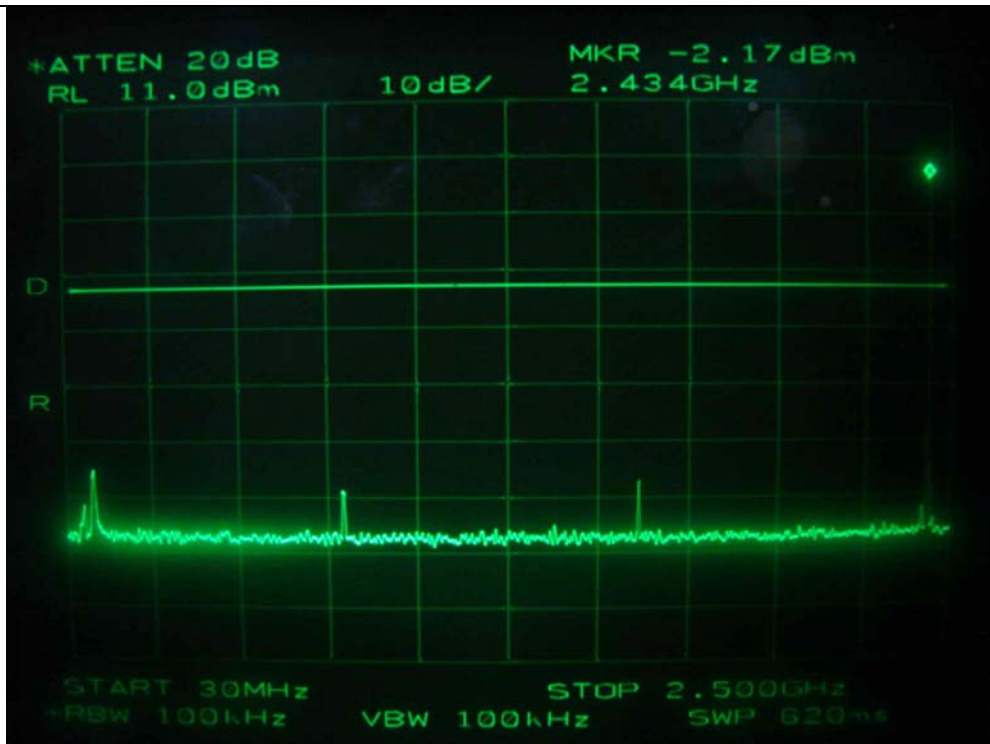

Middle Channel

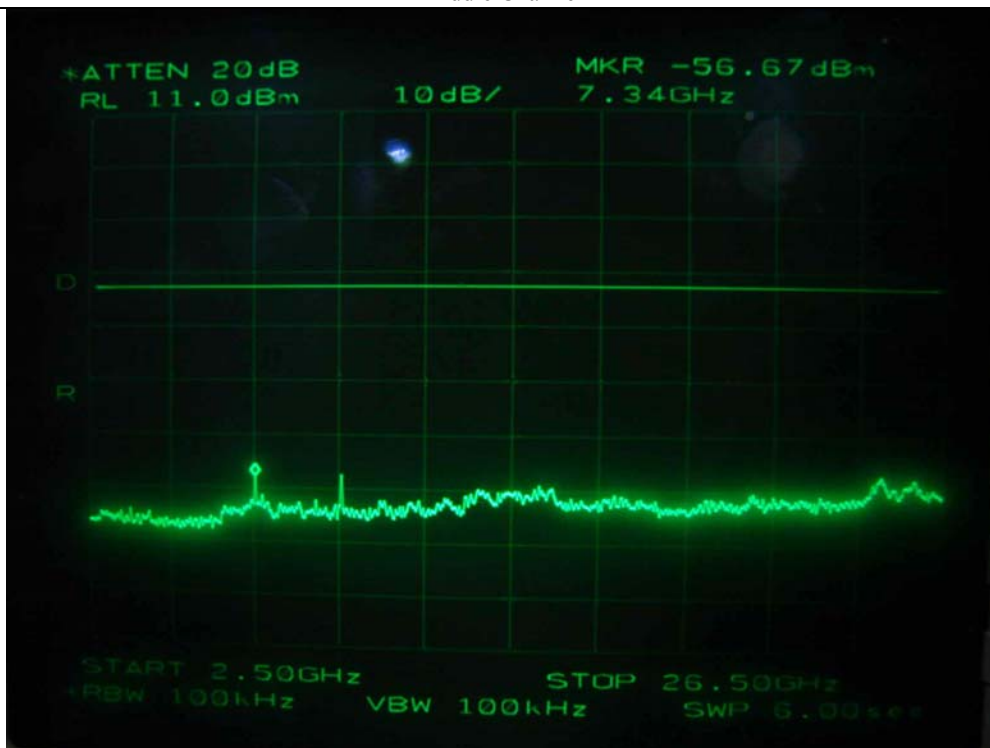

Middle Channel

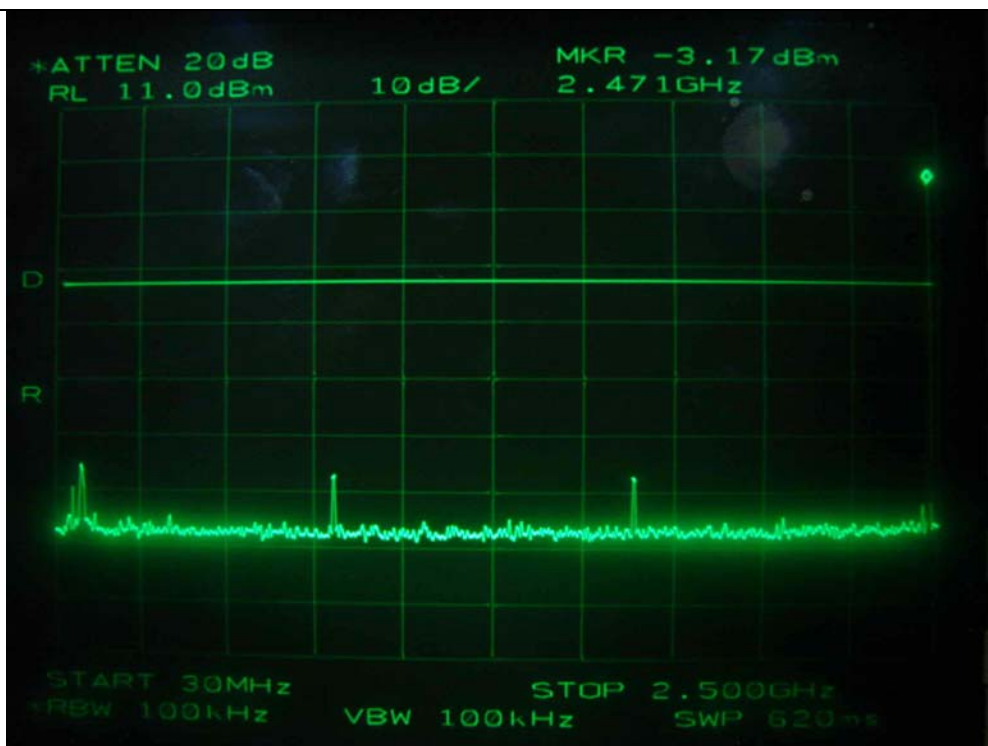

High Channel



High Channel

12.5.2. Test data for radiated emission

12.5.2.1. Radiated Emission which fall in the Restricted Band

- Test Date : April 09, 2007
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 1 MHz for Peak Mode, 10Hz for Average Mode
- Frequency range : 1 GHz ~ 25GHz
- Measurement distance : 3m
- Operating Condition : Low / High Channel
- Result : PASSED

Frequency (MHz)	Reading (dBuV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Dist. Factor	Total (dBuV/m)	Limits (dBuV/m)	Margin (dB)
Test Data for Low Channel										
2389.50	36.17	Peak	H	27.64	1.33	26.10		39.04	74.00	-34.96
	26.00	Average	H					28.87	54.00	-25.13
	37.50	Peak	V					40.37	74.00	-33.63
	27.17	Average	V					30.04	54.00	-23.96
Test Data for High Channel										
2483.83	37.33	Peak	H	27.64	1.33	26.10		40.20	74.00	-33.80
	26.50	Average	H					29.37	54.00	-24.63
	38.67	Peak	V					41.54	74.00	-32.46
	26.83	Average	V					29.70	54.00	-24.30

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

기홍

Tested by: Ki-Hong, Nam / Test Engineer

12.5.2.2. Spurious & Harmonic Radiated Emission

- Test Date : April 09, 2007
- Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 1 MHz for Peak Mode, 10Hz for Average Mode
- Frequency range : 1 GHz ~ 25 GHz
- Measurement distance : 3m
- Result : PASSED

Frequency (MHz)	Reading (dBuV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Dist. Factor	Total (dBuV/m)	Limits (dBuV/m)	Margin (dB)
Test Data for Low Channel										
2402.00	61.67	Peak	H	27.30	1.50			90.47	-	
	63.83	Peak	V					92.63	-	
4804.00*	37.50	Peak	H	31.60	3.30	26.10		46.30	74.00	-27.70
	27.13	Average	H					35.93	54.00	-18.07
	38.33	Peak	V					47.13	74.00	-26.87
	27.50	Average	V					36.30	54.00	-17.70
Test Data for Middle Channel										
2441.00	62.00	Peak	H	27.42	1.50			90.92	-	
	64.17	Peak	V					93.09	-	
4882.00*	37.67	Peak	H	31.74	3.38	26.10		46.69	74.00	-27.31
	27.00	Average	H					36.02	54.00	-17.98
	37.50	Peak	V					46.52	74.00	-27.48
	26.83	Average	V					35.85	54.00	-18.15

Tabulated test data for Restricted Band


Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band

-Continued

Frequency (MHz)	Reading (dBuV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Dist. Factor	Total (dBuV/m)	Limits (dBuV/m)	Margin (dB)
Test Data for High Channel										
2480.00	61.50	Peak	H	27.53	1.50			90.53	-	
	63.50	Peak	V					92.53	-	
4960.00*	37.83	Peak	H	31.87	3.46	26.10		47.06	74.00	-26.94
	27.17	Average	H					36.40	54.00	-17.60
	37.17	Peak	V					46.40	74.00	-27.60
	26.67	Average	V					35.90	54.00	-18.10

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band



Tested by: Ki-Hong, Nam / Test Engineer


13. PEAK POWER SPECTRUL DENSITY**13.1 Operating environment**

Temperature : 21 °C
Relative humidity : 43 %

13.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 3 kHz, the video bandwidth is same as above resolution, and sweep time was set to span / 3 kHz. The sweep time was allowed to be longer than span / 3 kHz for a full response of the mixer in the spectrum analyzer.

The maximum level from the EUT in a 3 kHz bandwidth was measured with above condition.

**13.3 Test equipment used**

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - 8564E	HP	Spectrum Analyzer	3650A00756	June 22, 2006

All test equipment used is calibrated on a regular basis.

13.4 Test data

- Test Date : April 06, 2007
- Result : PASSED

CHANNEL	FREQUENCY(MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2402	-13.67	8.0	-21.67
Middle	2441	-13.67	8.0	-21.67
High	2480	-14.33	8.0	-22.33

Tabulated test data for Peak Power Spectral Density.

Remark: See next page for measurement data.

기홍

Tested by: Ki-Hong, Nam / Test Engineer

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-003 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, 462-705, Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)


EMC Testing Dept : 307-51 Daessangryung-ri, Chowol-eup, Gwangju-si, Gyeonggi-do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)



Low Channel



Middle Channel

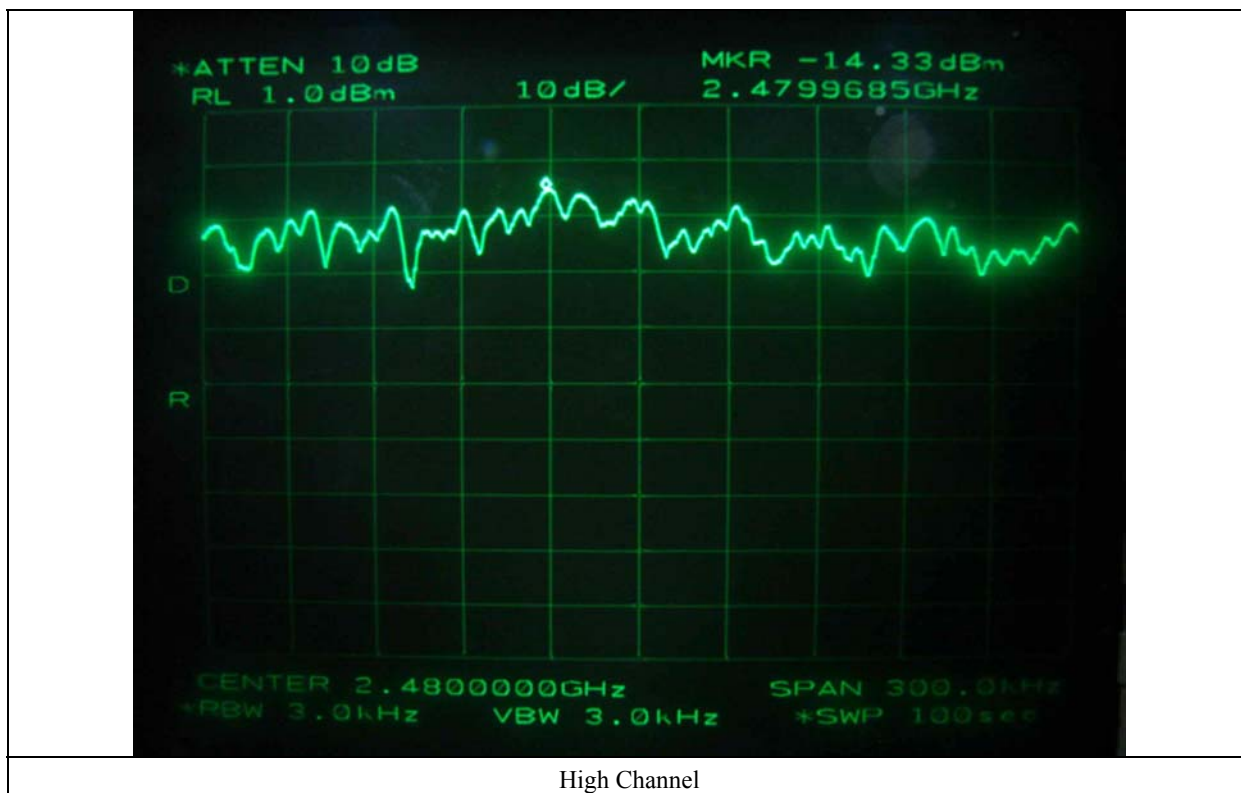

14. RADIO FREQUENCY EXPOSURE

14.1 RF Exposure Limit

According to the FCC rule §1.1310, the limit for General Population/Uncontrolled exposure is 1mW/cm² for the device operating 1,500~100,000 MHz.

14.2 EUT Description

Kind of EUT	4.3" Portable Navigation with MP3 Player with Bluetooth
Operating Frequency Band	☐ WLAN: 2400 ~ 2483.5 MHz ☐ WLAN: 5180 ~ 5320 MHz / 5500 ~ 5700 MHz ☐ WLAN: 5745 ~ 5825 MHz ☒ Bluetooth: 2400 ~ 2483.5 MHz
Device Category	☒ Portable (<20cm separation) ☐ Mobile (>20cm separation) ☐ Others
Max. Output Power	-1.83dBm(0.66mW) at 2441MHz
Used Antenna	MFR.: Sejong Tronics (Multilayer Chip Antenna)
Used Antenna Gain	0dBi
Exposure Evaluation Applied	☐ MPE ☐ SAR ☒ N/A

14.3 Test Result

According to the rule, §1.1307(b) (1) and §2.1093, mobile devices using Bluetooth technology according to §15.247 are exempt from the regulation.

Also, SAR evaluation is not required for the PORTABLE Device while its maximum output power is lower than threshold:

$$60/f(\text{ghz}) = 60/2.441 = 24.58\text{mW}.$$

So, the device meets the RF exposure requirement.

15. RADIATED EMISSION TEST

15.1 Operating environment

Temperature : 16 °C

Relative humidity : 35 %

15.2 Test set-up

The radiated emissions measurements were on the 3 meters, open-field test site. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from 30MHz to 1000MHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 and 4.0 meters in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

15.3 Measurement uncertainty

Radiated emission electric field intensity, 30 MHz ~ 300 MHz : ± 4.43 dBRadiated emission electric field intensity, 300 MHz ~ 1000 MHz : ± 3.80 dB

Measurement uncertainty is calculated in accordance with WECC 19-1990. The measurement uncertainty is given with a confidence of 95% with the coverage factor, $k=2$.

15.4 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - ESVS10	Rohde & Schwarz	EMI Test Receiver	827864/005	Dec 20, 2006
■ - MA240	HD GmbH	Antenna Master	N/A	N/A
■ - HD100	HD GmbH	Position Controller	N/A	N/A
■ - DS420S	HD GmbH	Turn Table	N/A	N/A
■ - VHA9103	Schwarzbeck	Biconical Antenna	91031852	Feb 08, 2007
■ - 9108-A(494)	Schwarzbeck	Log Periodic Antenna	62281001	Feb 08, 2007

All test equipment used is calibrated on a regular basis.

15.5 Test data

- Test Date : April 09, 2007
- Operating Condition : Transmitting Mode
- Resolution bandwidth : 120 kHz
- Frequency range : 30MHz ~ 1000MHz
- Measurement distance : 3m
- Channel : Low

Frequency (MHz)	Reading (dBuV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
54.30	22.50	V	9.61	1.60	33.71	40.00	-6.29
116.00	16.80	H	12.46	2.62	31.88	43.52	-11.64
125.00	16.30	H	13.35	2.65	32.30	43.52	-11.22
301.50	23.17	H	14.07	3.62	40.86	46.02	-5.16
317.50	20.50	H	14.72	3.88	39.10	46.02	-6.92
325.00	21.50	H	15.03	4.00	40.53	46.02	-5.49

Tabulated test data for Radiated Electromagnetic Field

- Channel : Middle

Frequency (MHz)	Reading (dBuV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
54.50	23.00	V	9.53	1.60	34.13	40.00	-5.87
115.80	16.90	H	12.43	2.62	31.95	43.52	-11.57
125.00	16.50	H	13.35	2.65	32.50	43.52	-11.02
301.80	23.50	H	14.08	3.63	41.21	46.02	-4.81
317.50	20.30	H	14.72	3.88	38.90	46.02	-7.12
325.00	21.67	H	15.03	4.00	40.70	46.02	-5.32


Tabulated test data for Radiated Electromagnetic Field

-. Channel : High

Frequency (MHz)	Reading (dBuV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
54.30	22.80	V	9.61	1.60	34.01	40.00	-5.99
115.80	17.00	H	12.43	2.62	32.05	43.52	-11.47
125.00	16.50	H	13.35	2.65	32.50	43.52	-11.02
301.50	23.50	H	14.07	3.62	41.19	46.02	-4.83
317.50	20.67	H	14.72	3.88	39.27	46.02	-6.75
325.00	21.33	H	15.03	4.00	40.36	46.02	-5.66

Tabulated test data for Radiated Electromagnetic Field

Remark: "H": Horizontal, "V": Vertical



Tested by: Ki-Hong, Nam / Test Engineer

16. CONDUCTED EMISSION TEST

16.1 Operating environment

Temperature : 18 °C

Relative humidity : 30 %

16.2 Test set-up

The EUT was placed on a wooden table, 0.8 meters height above the floor. The power of the EUT was connected through a 50 ohm/ 50 uH + 5 ohm Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.

16.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - ESHS10	Rohde & Schwarz	EMI Test Receiver	834467/007	May 15, 2006
■ - NSLK 8126	Schwarzbeck	AMN	8126-404	July. 04, 2006
□ - 3825/2	EMCO	AMN	9109-1867	June 23, 2006

All test equipment used is calibrated on a regular basis.

16.4 Test data


- Type of Test : FCC Class B
- Test Date : April 06, 2007
- Resolution bandwidth : 9 kHz
- Frequency range : 0.15MHz ~ 30MHz
- Test Result : PASSED BY -8.98 dB at 0.85 MHz under peak mode

Frequency (MHz)	Line	Peak (dBuV)		Margin (dB)	Average (dBuV)		Margin (dB)
		Emission level	Limits		Emission level	Limits	
0.17	N	50.53	64.96	-14.43	29.41	54.96	-25.55
0.34	H	49.65	59.20	-9.55	33.63	49.20	-15.57
0.53	N	42.41	56.00	-13.59	20.66	46.00	-25.34
0.68	H	46.55	56.00	-9.45	30.73	46.00	-15.27
0.85	H	47.02	56.00	-8.98	29.89	46.00	-16.11
1.70	H	46.60	56.00	-9.40	26.76	46.00	-19.24


Line Conducted Emissions Tabulated Data

Remark : "H": Hot Line, "N": Neutral line


See next page for an overview sweep performed with peak and average detector modes.



Tested by: Ki-Hong, Nam / Test Engineer

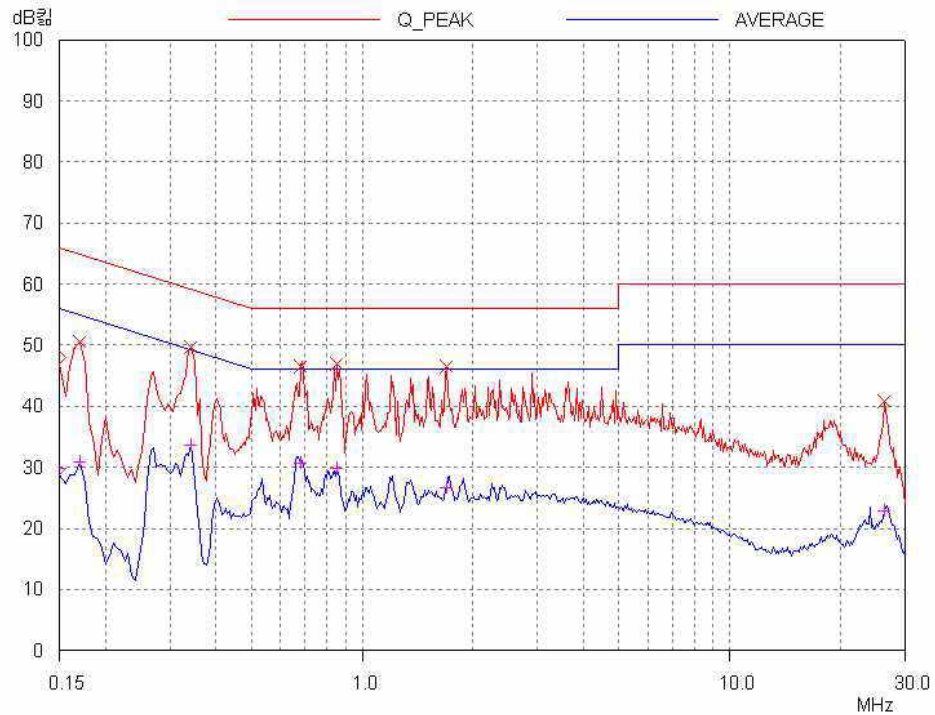

HOT LINE

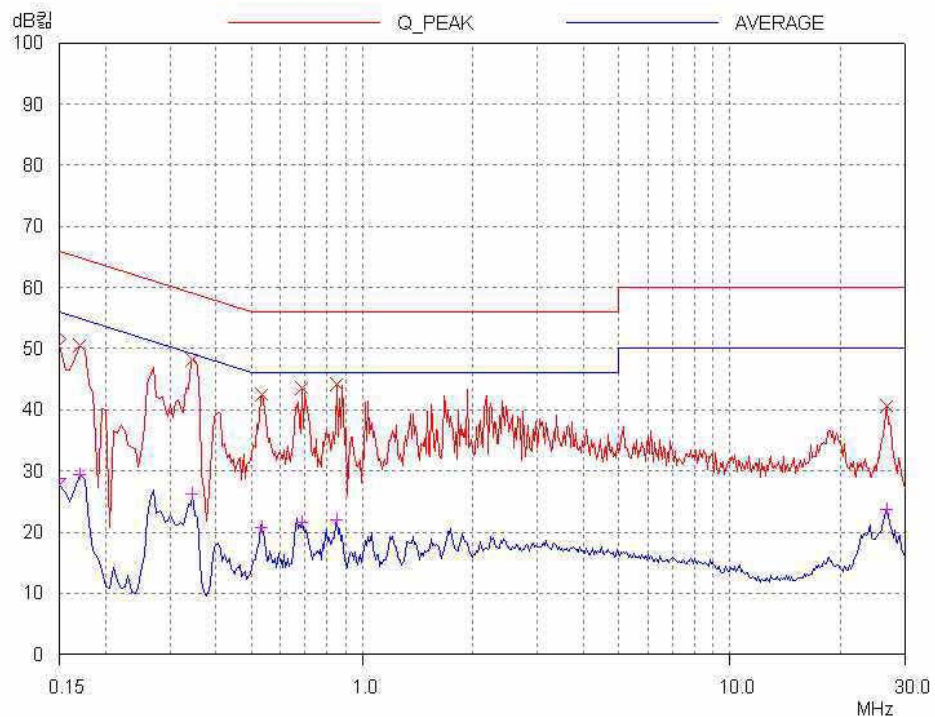

NEUTRAL LINE

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-003 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, 462-705, Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 307-51 Daessangryung-ri, Chowol-eup, Gwangju-si, Gyeonggi-do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)