


**Label with static, pre-printed text only
(STA-L000115)**

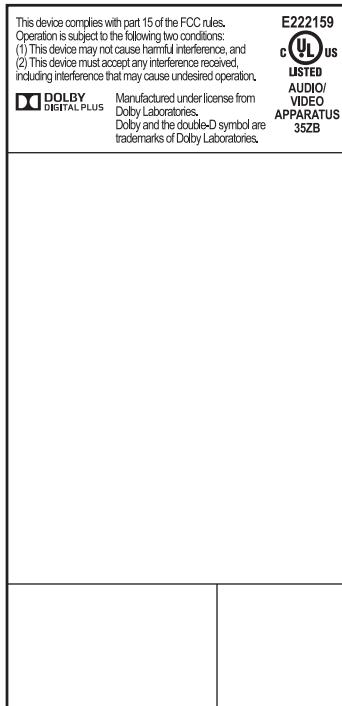

Notes:

The barcodes **MUST** have a minimum x-dimesion of 5 mils (0.125mm). This can only be achieved by using a 600dpi printer.

The barcodes must be as wide as possible across the width of the label, while still including enough quiet zone to the left and right of the barcode to ensure an accurate scan.

Colons (:) and hyphens (-) are to be used only in human-readable serial numbers. Do not include these in the barcoded serial numbers.


Minimum point size for serial numbers:

On base label: 8 point

On rear-panel label: 7 point

The label system (label, ink and printing) shall be UL certified to UL 969.

Label with example variable data (not for manufacture)

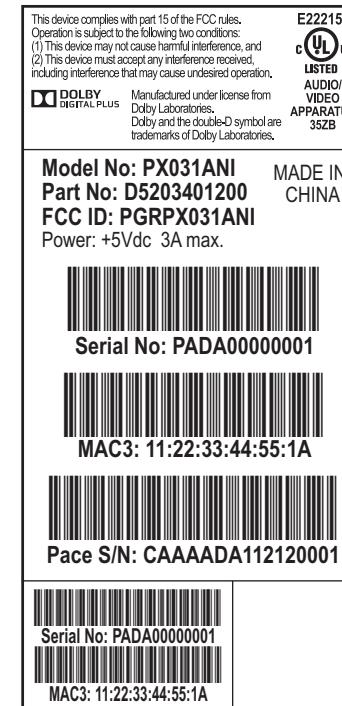

Blank Label Part	STA-L000115	Ribbon	STA-CZEB001		D520-PX031ANI-Product-Label			Rev	
Additional Notes				Model	Comcast PX031ANI	Drafted By	Nick Tonge	Sheet 1 of 1	A
See also: IT-S-Serialisation_D520_PX031ANI_D5203401200 Label Position Instructions 700-534031x				Model Part No	D5203401200	Date	13 March 2013		
				Additional Graphics (if required)		Approved by	Signature	Date	
First issue				N/A	Tech Pubs	M Heron			
					Approvals	R Turner			
					Project Team	Jon Naylor			