



HCT CO., LTD.

Product Compliance Division

TEL : +82 31 639 8518 FAX : +82 31 639 8525

CERTIFICATE OF COMPLIANCE

FCC PART 15.247 Certification

Applicant Name:

AXESSTEL INC.

Address:

6815 Flanders Drive Ste.210,
San Diego, CA 92121

Date of Testing:

August 27, 2008

Test Site/Location:

HCT.CO., LTD., San 136-1 Ami-ri, Bubal-eup, Icheon-si,
Kyungki-do, Korea

Test Report No.: HCT-R08-092

HCT FRN: 0005866421

FCC ID : **PH7MV440**

APPLICANT : **AXESSTEL INC.**

FCC Rule Part(s): Part 15 subpart C 15.247

Application Type: Certification

EUT Type: Cellular/PCS CDMA Wireless Gateway with WLAN

Model(s): MV440

Tx Frequency: 2412-2462 MHz(DSSS/OFDM)

Rx Frequency: 2412-2462 MHz(DSSS/OFDM)

Max. RF Output Power: Wi-Fi 802.11b(19.31 dBm) / Wi-Fi 802.11g (18.18dBm)

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT.CO., LTD. Certifies that no party to this application has been denied FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

Youn Seok Jung

Report prepared by

: Youn Seok Jung

Test engineer of RF Part

Sang Jun Lee

Approved by

: Sang Jun Lee

Manager of RF Part

HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-092	Test Dates: August 27, 2008	EUT Type: Cellular/PCS CDMA Wireless Gateway with WLAN	FCC ID: PH7MV440	Page 1 of 40	



Table of Contents

1. GENERAL INFORMATION	3
2. EUT DESCRIPTION	3
3. TEST METHODOLOGY	4
3.1 EUT CONFIGURATION.....	4
3.2 EUT EXERCISE.....	4
3.3 GENERAL TEST PROCEDURES.....	4
3.4 DESCRIPTION OF TEST MODES	4
4. INSTRUMENT CALIBRATION.....	5
5. FACILITIES AND ACCREDITATIONS	6
5.1 FACILITIES.....	6
5.2 EQUIPMENT	6
6. ANTENNA REQUIREMENTS	7
7. TEST RESULT	8
7.1 6dB Bandwidth Measurement (802.11b/g).....	8
7.2 Output Power Measurement (802.11b/g)	1 2
7.3 Power Spectral Density (802.11b/g)	1 6
7.4 Out of Band Emissions at the Band Edge/ Conducted Spurious Emissions	2 0
7.5 Radiated Measurement.....	2 6
7.5.1 Radiated Spurious Emissions	2 6
7.5.2 Radiated Restricted Band Edge Measurements	3 4
7.7 POWERLINE CONDUCTED EMISSIONS	3 5
8. LIST OF TEST EQUIPMENT	4 0

HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-092	Test Dates: August 27, 2008	EUT Type: Cellular/PCS CDMA Wireless Gateway with WLAN	FCC ID: PH7MV440	Page	2 of 40



1. GENERAL INFORMATION

Applicant: AXESSTEL INC.

6815 Flanders Drive Ste.210,
San Diego, CA

FCC ID: PH7MV440

EUT: Cellular/PCS CDMA Wireless Gateway with WLAN

Date of Test: August 27, 2008

Contact: Tel: 858- 625-2100 Fax: 858- 625- 2110
E-Mail: dskim@axesstel.com

2. EUT DESCRIPTION

Product	Cellular/PCS CDMA Wireless Gateway with WLAN
Model Name	MV440
Power Supply	DC 7.4 V
Battery type	Standard
Frequency Range	TX: 2412 ~ 2462 MHz RX: 2412 ~ 2462 MHz
Max. RF Output Power	Wi-Fi 802.11b(19.31 dBm) / Wi-Fi 802.11g (18.18dBm)
Modulation Type	DSSS/CCK(802.11b), OFDM(802.11g)
Antenna Specification	Manufacturer: Hankook Antenna Co.,LTD Antenna type: sleeve dipole antenna Antenna Max gain: 1.5 dBi

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-092	Test Dates: August 27, 2008	EUT Type: Cellular/PCS CDMA Wireless Gateway with WLAN	FCC ID: PH7MV440	Page 3 of 40



3. TEST METHODOLOGY

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz(ANSI C63.4-2003)

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version :2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version: 2003)

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-092	Test Dates: August 27, 2008	EUT Type: Cellular/PCS CDMA Wireless Gateway with WLAN	FCC ID: PH7MV440	Page 4	of 40



4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-092	Test Dates: August 27, 2008	EUT Type: Cellular/PCS CDMA Wireless Gateway with WLAN	FCC ID: PH7MV440	Page 5 of 40	



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1, Maekok-Ri, Hobup-Myun, Ichon-Si, Kyoungki-Do, 467-701, KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 6, 2006(Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-092	Test Dates: August 27, 2008	EUT Type: Cellular/PCS CDMA Wireless Gateway with WLAN	FCC ID: PH7MV440	Page 6 of 40	



6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203

HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-092	Test Dates: August 27, 2008	EUT Type: Cellular/PCS CDMA Wireless Gateway with WLAN	FCC ID: PH7MV440	Page 7 of 40	

7. TEST RESULT


7.1 6dB Bandwidth Measurement (802.11b/g)

Test Requirements and limit, §15.247(d)

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6dB bandwidth is 500 kHz.

□ TEST CONFIGURATION

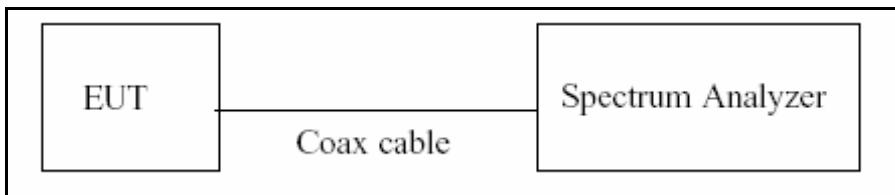

□ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to

RBW: 100 KHz

VBW: 100 KHz

SPAN: 40 MHz

□ TEST RESULTS

Conducted 6dB Bandwidth Measurements for 802.11b

802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	10.96	0.500	Pass
2437	6	11.44	0.500	Pass
2462	11	10.88	0.500	Pass


Conducted 6dB Bandwidth Measurements for 802.11g

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	16.64	0.500	Pass
2437	6	16.64	0.500	Pass
2462	11	16.56	0.500	Pass

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No.	Test Dates:	EUT Type:	FCC ID:	Page 8 of 40
HCT-R08-092	August 27, 2008	Cellular/PCS CDMA Wireless Gateway with WLAN	PH7MV440	


□ RESULT PLOTS

6dB Bandwidth plot (802.11b-CH 1)

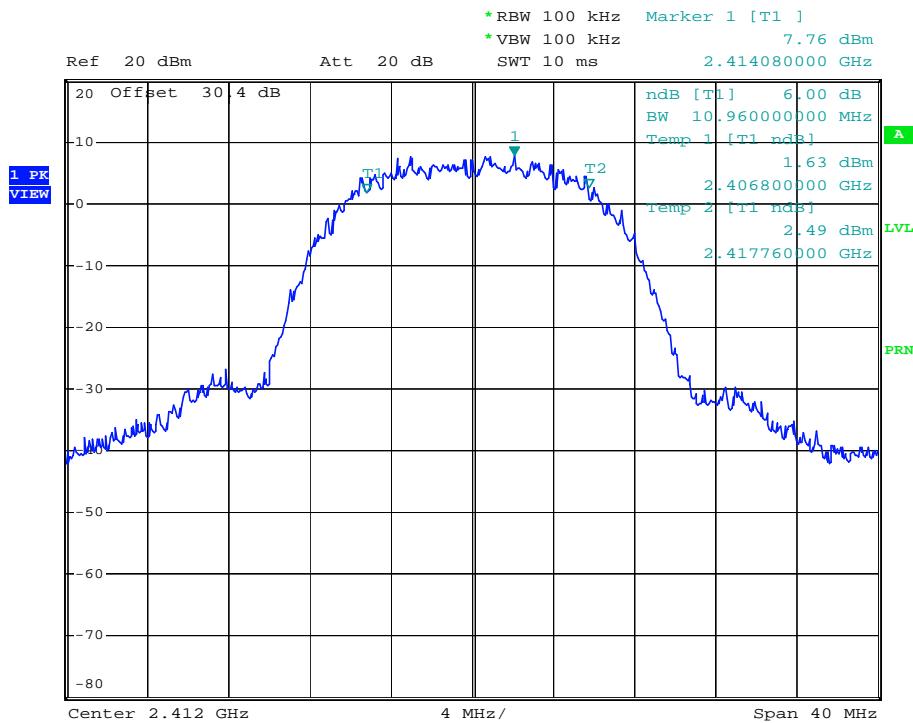

Date: 18.JUL.2008 11:53:39


6dB Bandwidth plot (802.11b-CH 6)

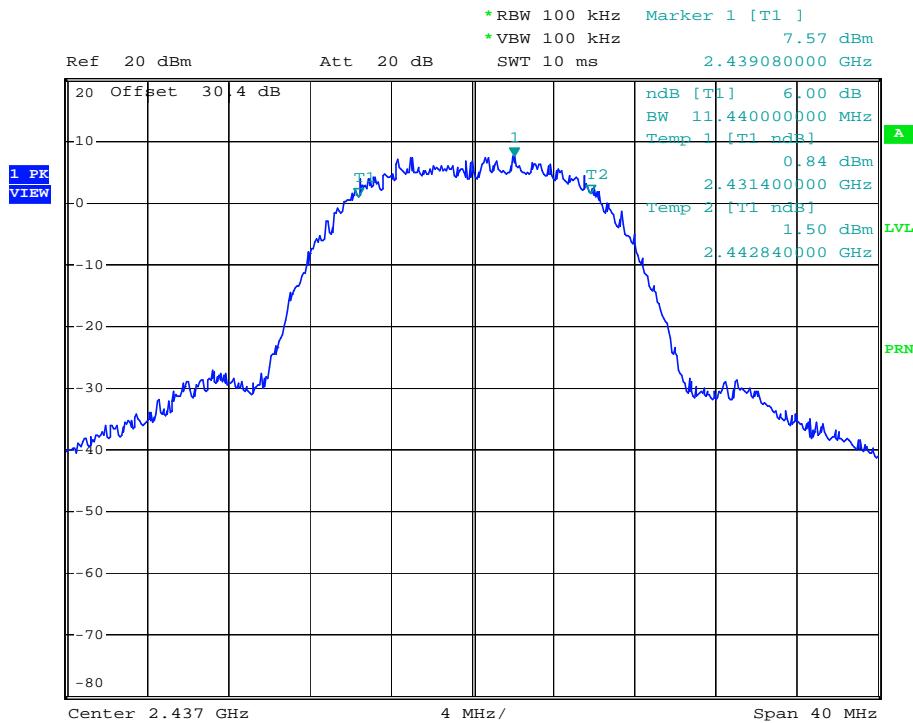

Date: 18.JUL.2008 11:54:29


HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No.	Test Dates:	EUT Type:	FCC ID:	Page 9 of 40	
HCT-R08-092	August 27, 2008	Cellular/PCS CDMA Wireless Gateway with WLAN	PH7MV440		

6dB Bandwidth plot (802.11b-CH 11)

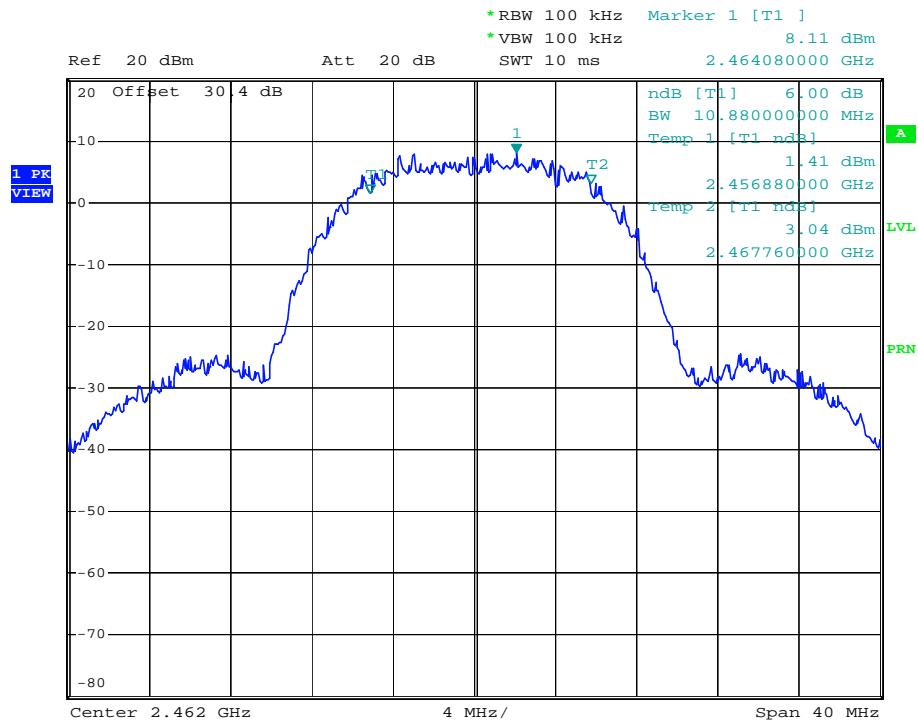

Date: 18.JUL.2008 11:55:19


6dB Bandwidth plot (802.11g-CH 1)

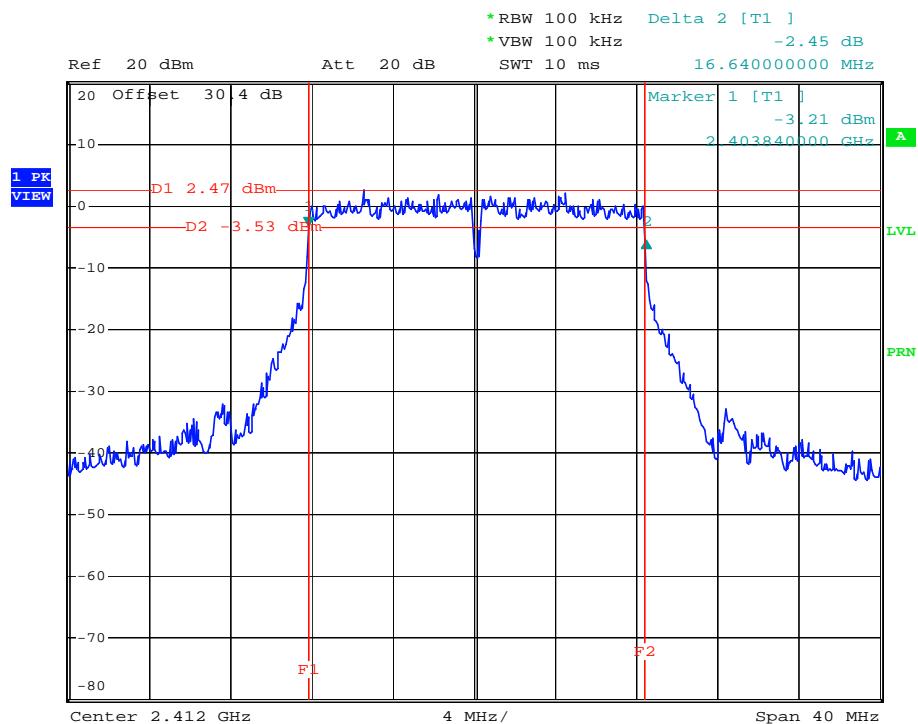

Date: 18.JUL.2008 11:52:32


HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No.	Test Dates:	EUT Type:	FCC ID:	Page 10 of 40	
HCT-R08-092	August 27, 2008	Cellular/PCS CDMA Wireless Gateway with WLAN	PH7MV440		

6dB Bandwidth plot (802.11g-CH 6)

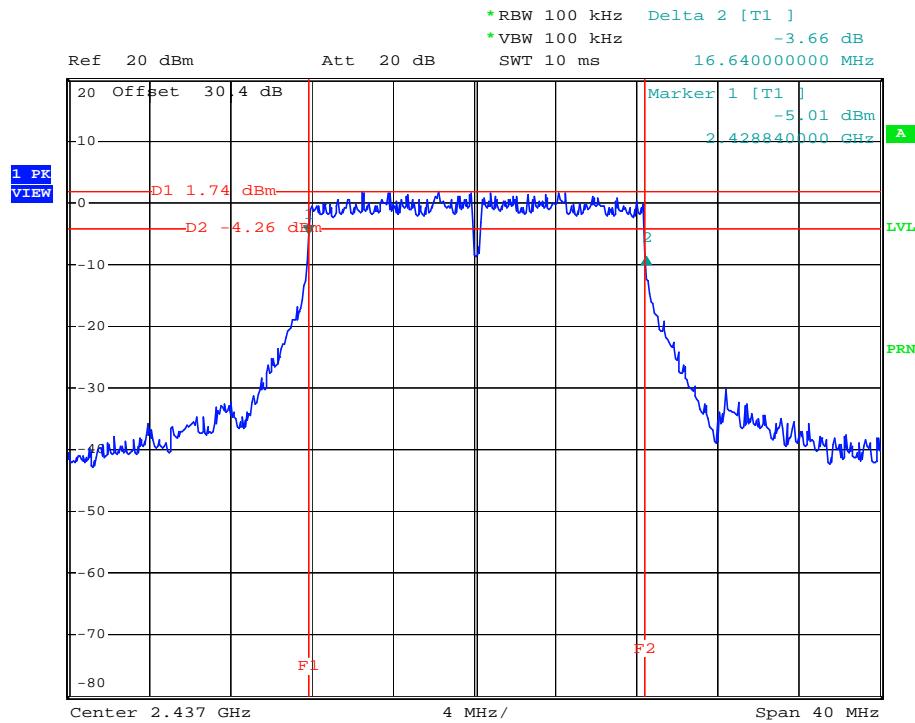

Date: 18.JUL.2008 11:43:31

6dB Bandwidth plot (802.11g-CH 11)

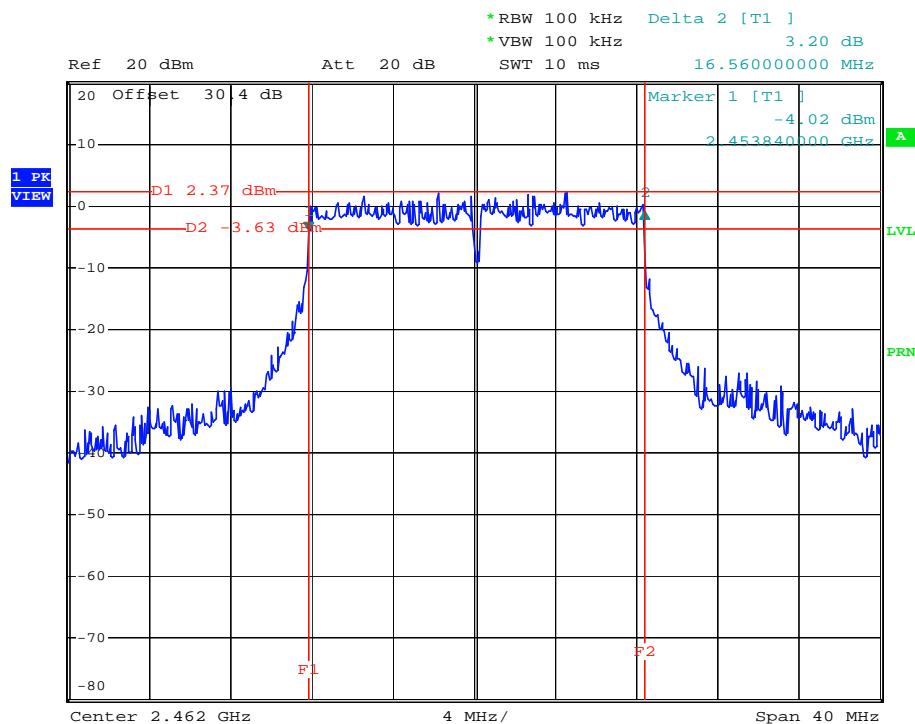

Date: 18.JUL.2008 11:38:32

HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No.	Test Dates:	EUT Type:	FCC ID:	Page 11 of 40	
HCT-R08-092	August 27, 2008	Cellular/PCS CDMA Wireless Gateway with WLAN	PH7MV440		

7.2 Output Power Measurement (802.11b/g)


Test Requirements and limit, §15.247(d)

A transmitter antenna terminal of EUT is connected to the input of a Spectrum Analyzer.

Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

□ TEST CONFIGURATION

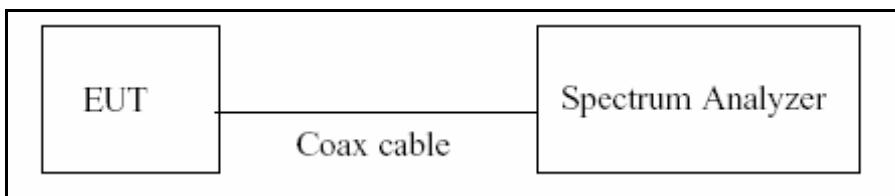

Note: Tests were performed all possible data rates and the worst cases were recorded.

□ TEST RESULTS

Conducted Output Power Measurements

802.11b Mode		Rate (Mbps)	Measured Power (dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	11 Mbps	23.83	30
2437	6	11 Mbps	23.56	30
2462	11	11 Mbps	24.14	30


Conducted Output Power Measurements

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	54 Mbps	20.41	30
2437	6	54 Mbps	20.28	30
2462	11	54 Mbps	20.80	30

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-092	Test Dates: August 27, 2008	EUT Type: Cellular/PCS CDMA Wireless Gateway with WLAN	FCC ID: PH7MV440	Page 1 2 of 40


□ RESULT PLOTS

Conducted Output Power (802.11b-CH 1)

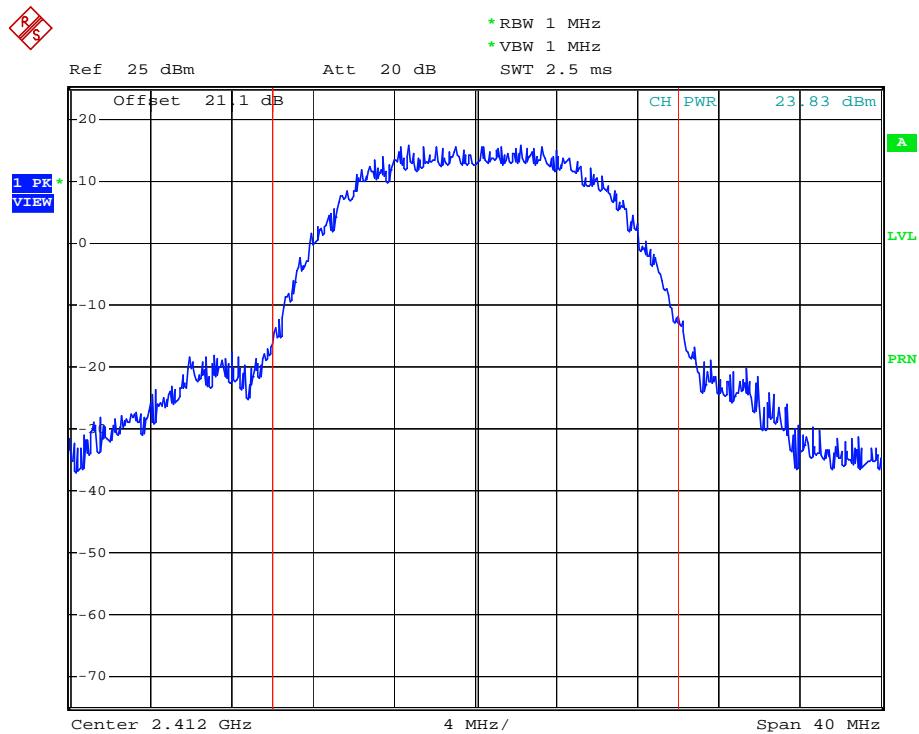

Date: 27.AUG.2008 13:38:08


Conducted Output Power (802.11b-CH 6)

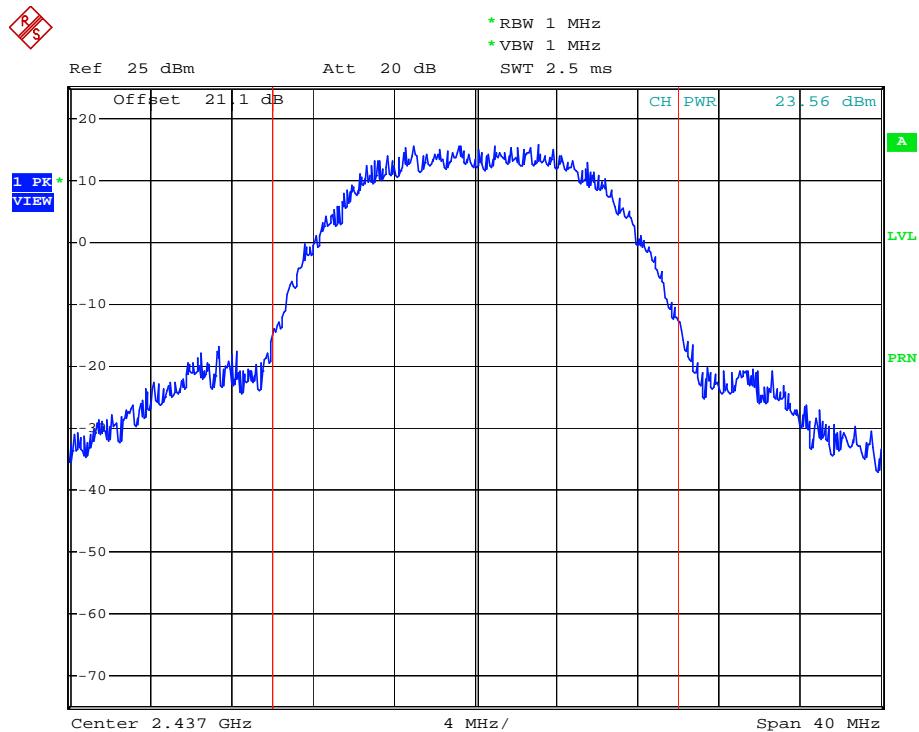

Date: 27.AUG.2008 13:53:26


HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No.	Test Dates:	EUT Type:	FCC ID:	Page 13 of 40	
HCT-R08-092	August 27, 2008	Cellular/PCS CDMA Wireless Gateway with WLAN	PH7MV440		

Conducted Output Power (802.11b-CH 11)

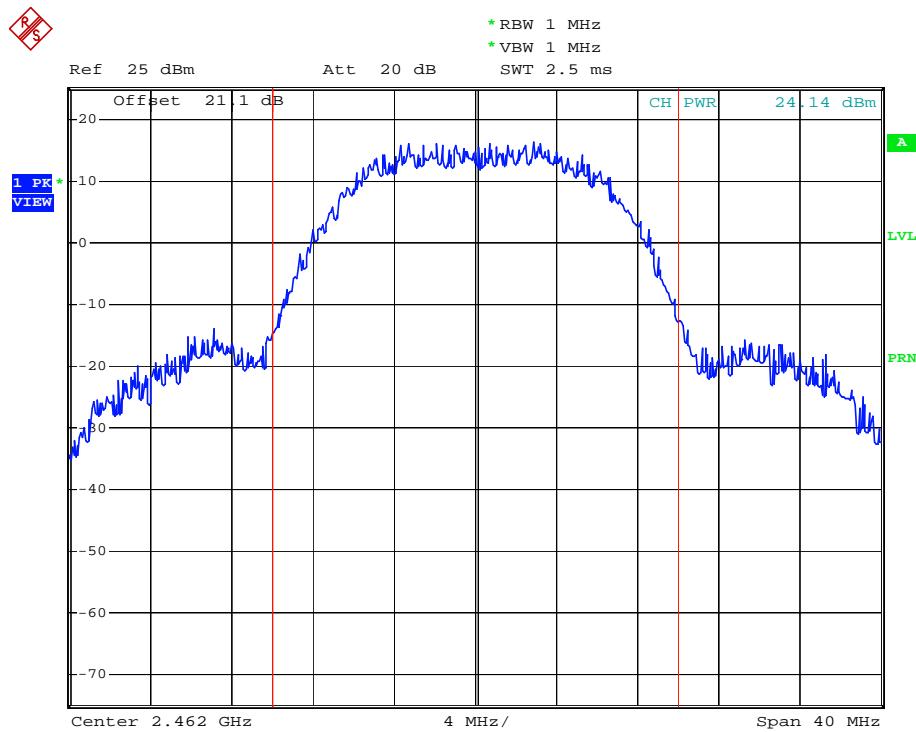

Date: 27.AUG.2008 13:40:23


Conducted Output Power (802.11g-CH 1)

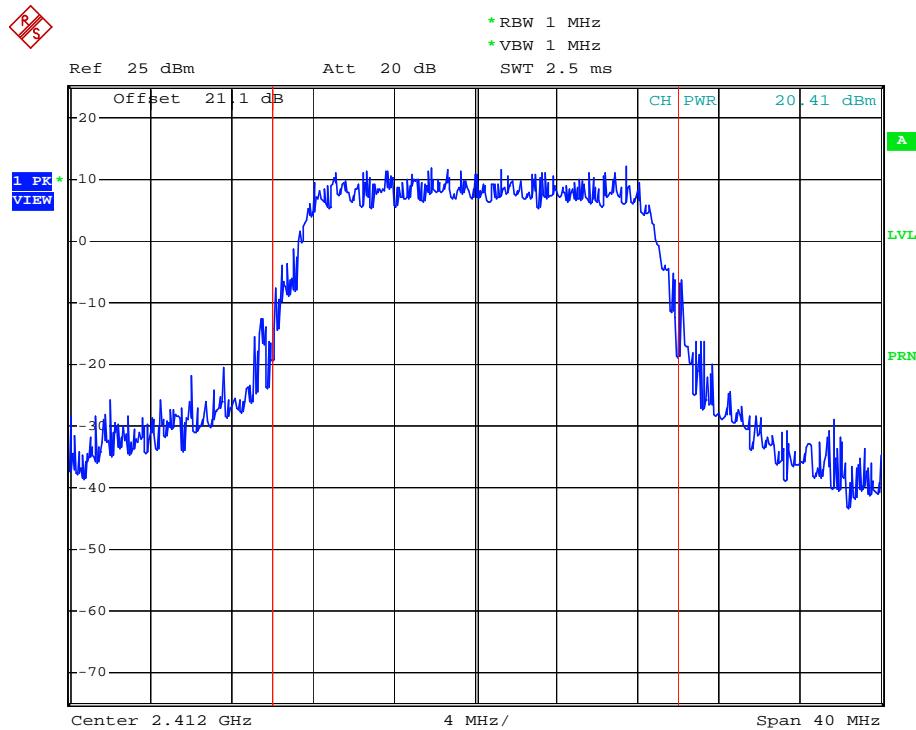

Date: 27.AUG.2008 13:41:55


HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No.	Test Dates:	EUT Type:	FCC ID:	Page 14 of 40	
HCT-R08-092	August 27, 2008	Cellular/PCS CDMA Wireless Gateway with WLAN	PH7MV440		

Conducted Output Power (802.11g-CH 6)

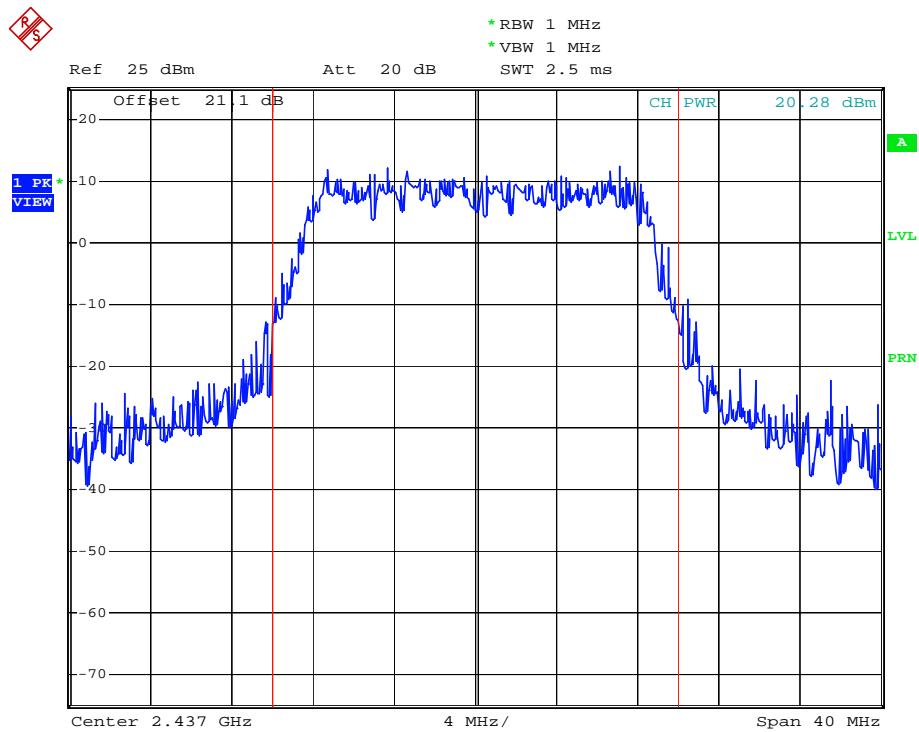

Date: 27.AUG.2008 13:43:16

Conducted Output Power (802.11g-CH 11)

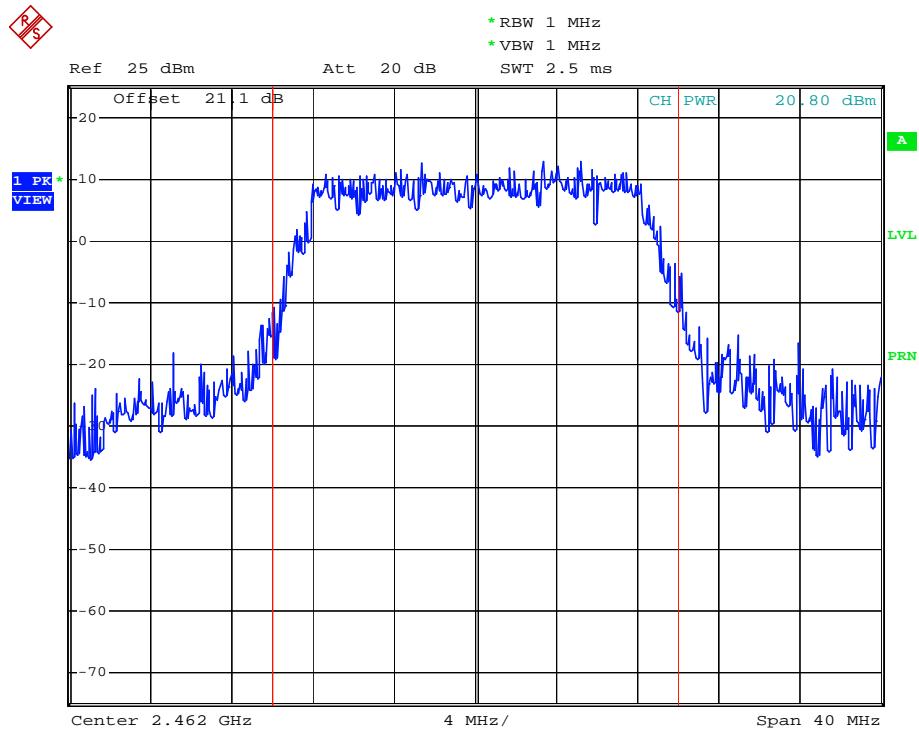

Date: 27.AUG.2008 13:44:30

HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No.	Test Dates:	EUT Type:	FCC ID:	Page 15 of 40	
HCT-R08-092	August 27, 2008	Cellular/PCS CDMA Wireless Gateway with WLAN	PH7MV440		




7.3 Power Spectral Density (802.11b/g)

Test Requirements and limit, §15.247(d)

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

Minimum Standard – The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.

□ TEST CONFIGURATION

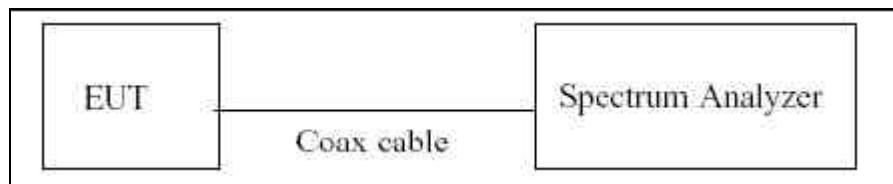

□ TEST PROCEDURE

The spectrum analyzer is set to :

1. Span = 300 KHz
2. RBW = 3 KHz (7dB/div)
3. VBW = 3 KHz
4. Sweep = 1000 sec

□ TEST RESULTS


Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result	
			Power Density (dBm)	Pass/Fail
2412	1	802.11b	-8.11	Pass
2437	6		-8.24	Pass
2462	11		-7.69	Pass
2412	1	802.11g	-13.76	Pass
2437	6		-13.60	Pass
2462	11		-12.78	Pass

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-092	Test Dates: August 27, 2008	EUT Type: Cellular/PCS CDMA Wireless Gateway with WLAN	FCC ID: PH7MV440	Page 16 of 40


□ RESULT PLOTS

Power Spectral Density (802.11b-CH 1)

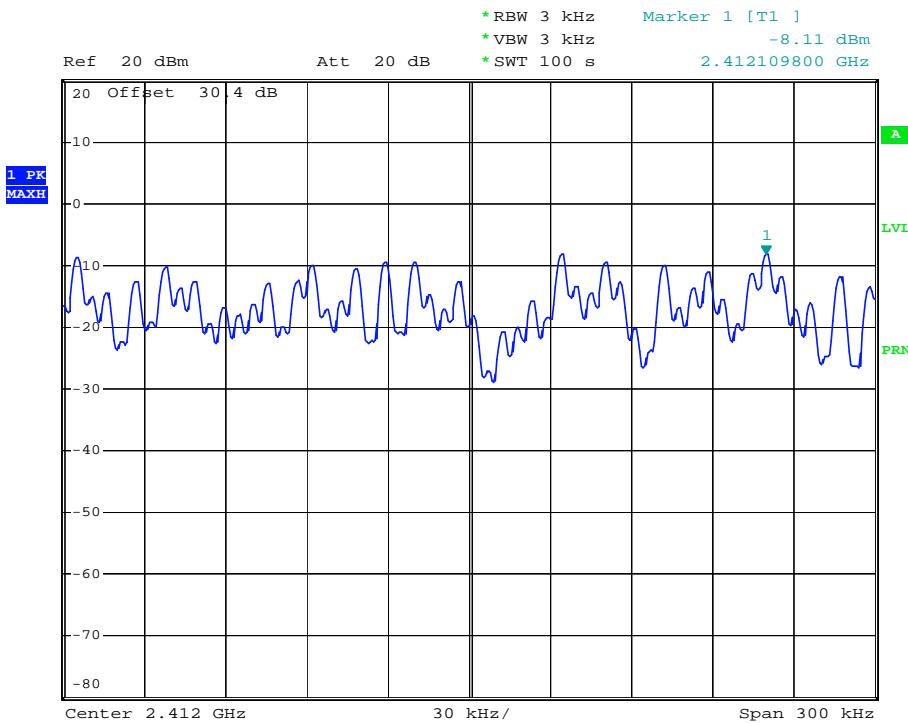

Date: 18.JUL.2008 11:16:41


Power Spectral Density (802.11b-CH 6)

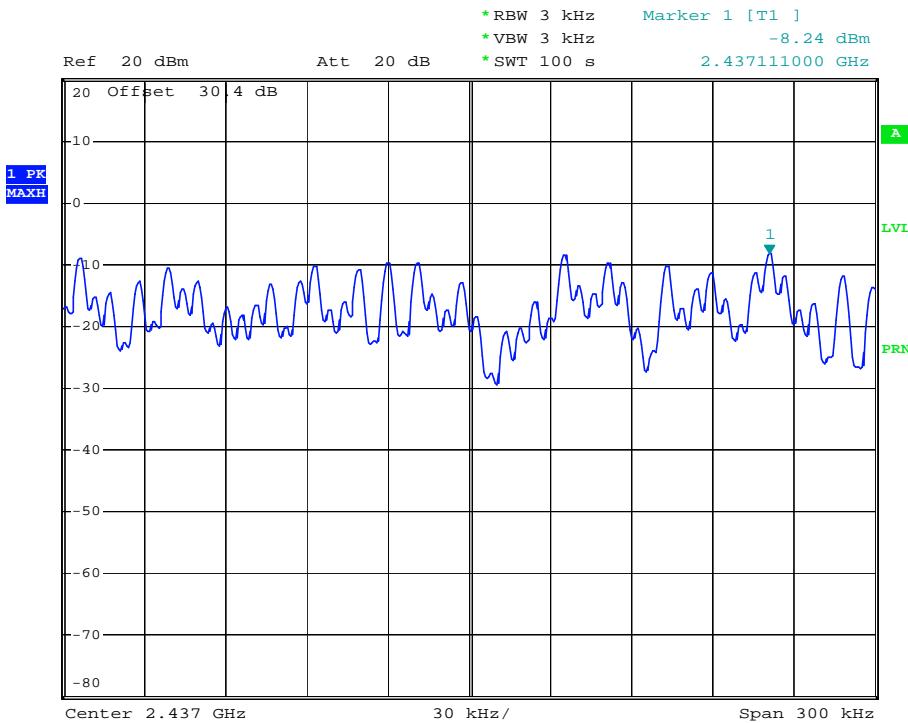

Date: 18.JUL.2008 11:09:06


HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No.	Test Dates:	EUT Type:	FCC ID:	Page 17 of 40	
HCT-R08-092	August 27, 2008	Cellular/PCS CDMA Wireless Gateway with WLAN	PH7MV440		

Power Spectral Density (802.11b-CH 11)

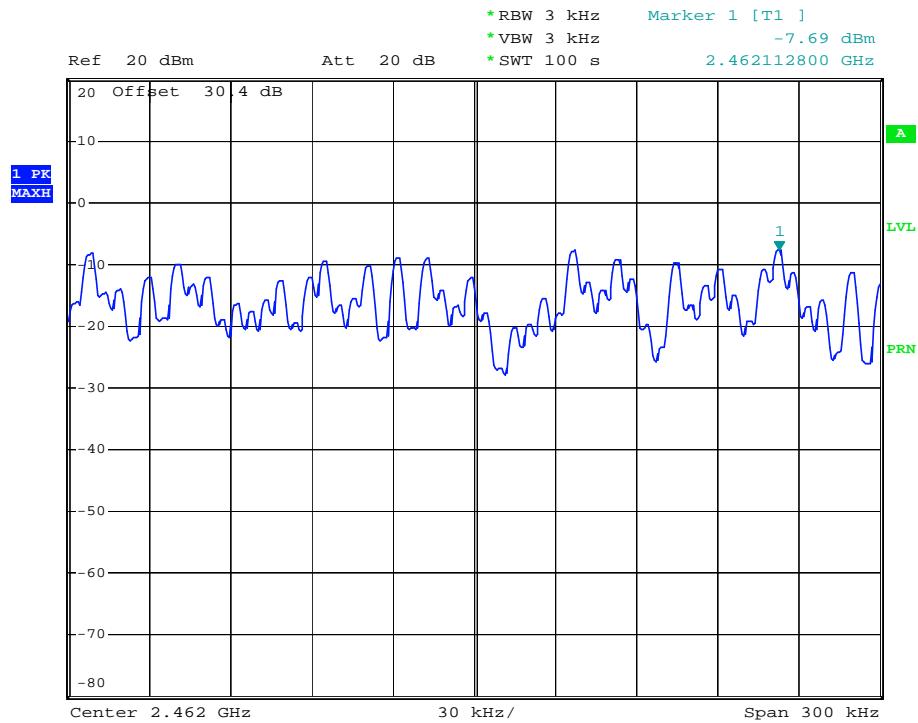

Date: 18.JUL.2008 11:04:35


Power Spectral Density (802.11g-CH 1)

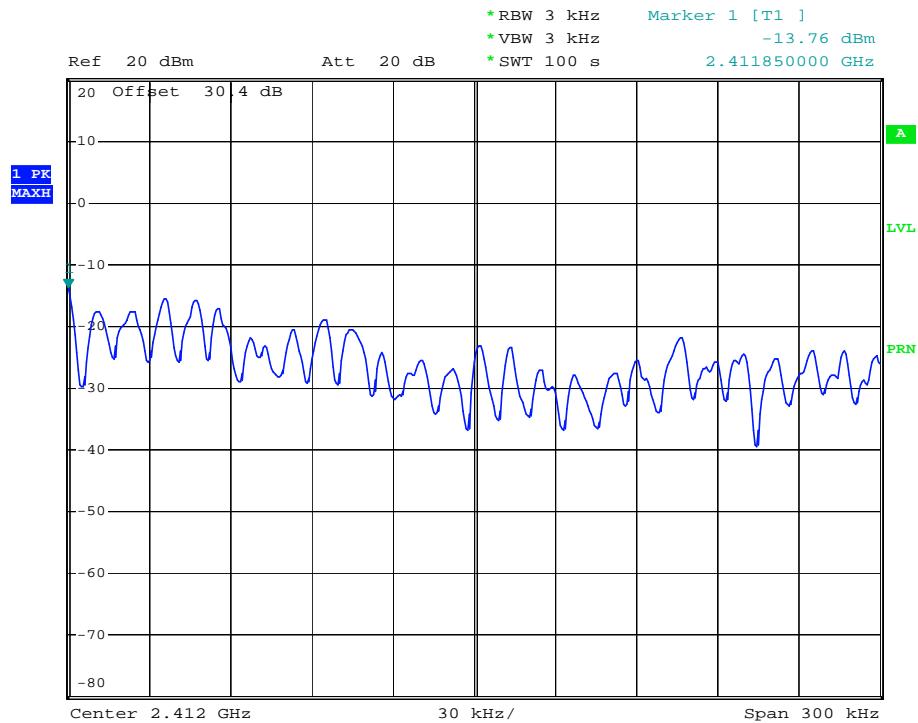

Date: 18.JUL.2008 10:57:26


HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No.	Test Dates:	EUT Type:	FCC ID:	Page 18 of 40	
HCT-R08-092	August 27, 2008	Cellular/PCS CDMA Wireless Gateway with WLAN	PH7MV440		

Power Spectral Density (802.11g-CH 6)

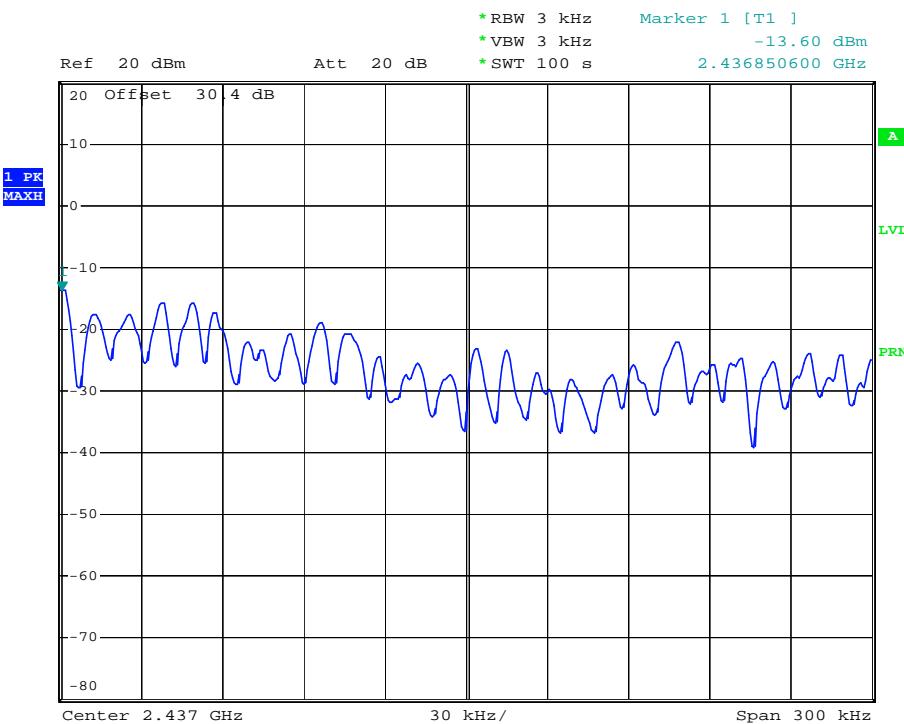

Date: 18.JUL.2008 10:38:03

Power Spectral Density (802.11g-CH11)

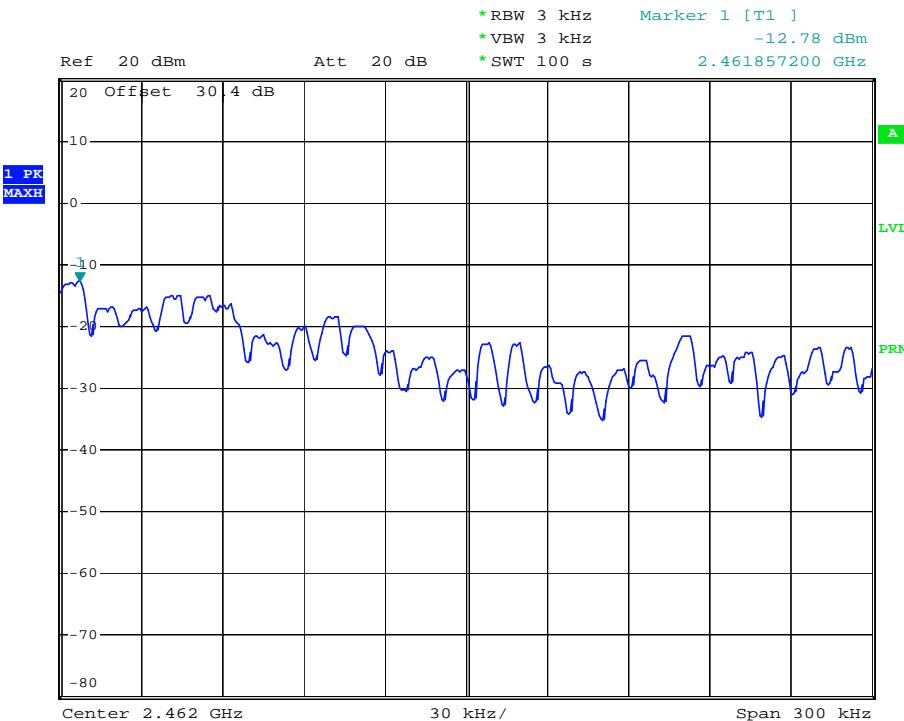

Date: 18.JUL.2008 10:32:58


HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No.	Test Dates:	EUT Type:	FCC ID:	Page 19 of 40	
HCT-R08-092	August 27, 2008	Cellular/PCS CDMA Wireless Gateway with WLAN	PH7MV440		

7.4 Out of Band Emissions at the Band Edge/ Conducted Spurious Emissions

Test Requirements and limit, §15.247(d)

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

█ TEST CONFIGURATION

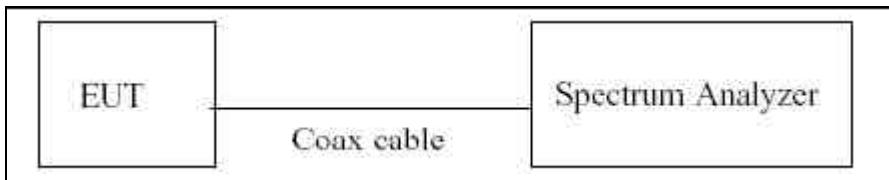

█ TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer.


The resolution bandwidth is set to 100 kHz and the video bandwidth is set to 100 kHz.

The spectrum from 30 MHz to 10th harmonics is investigated with the transmitter set to the lowest, middle, and highest channels.

HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-092	Test Dates: August 27, 2008	EUT Type: Cellular/PCS CDMA Wireless Gateway with WLAN	FCC ID: PH7MV440	Page 20 of 40	


□ RESULT PLOTS

BandEdge (802.11b-CH1)

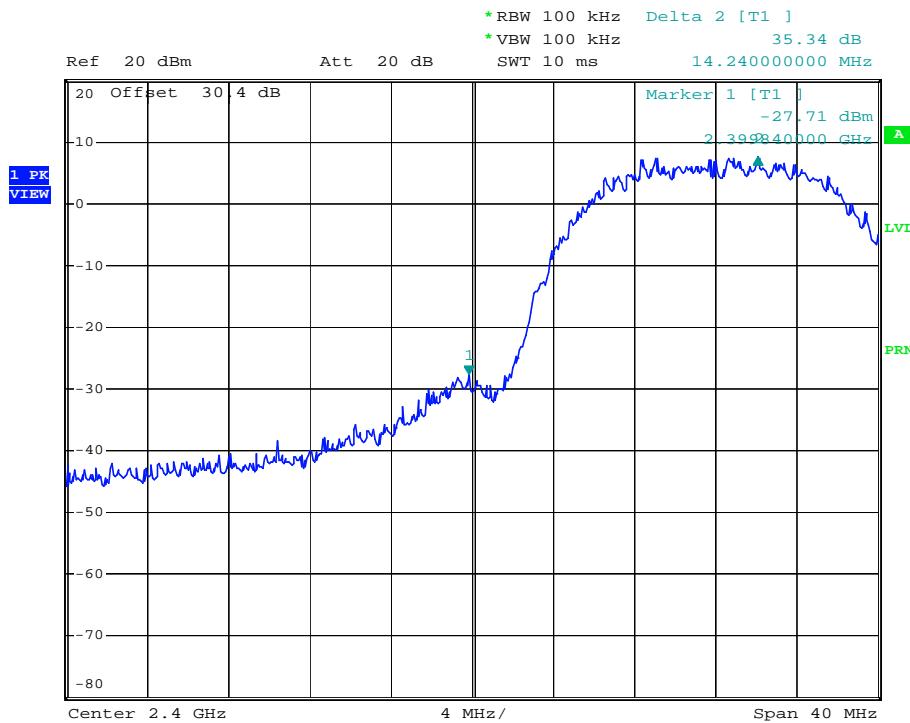

Date: 18.JUL.2008 12:05:43


BandEdge (802.11b-CH11)

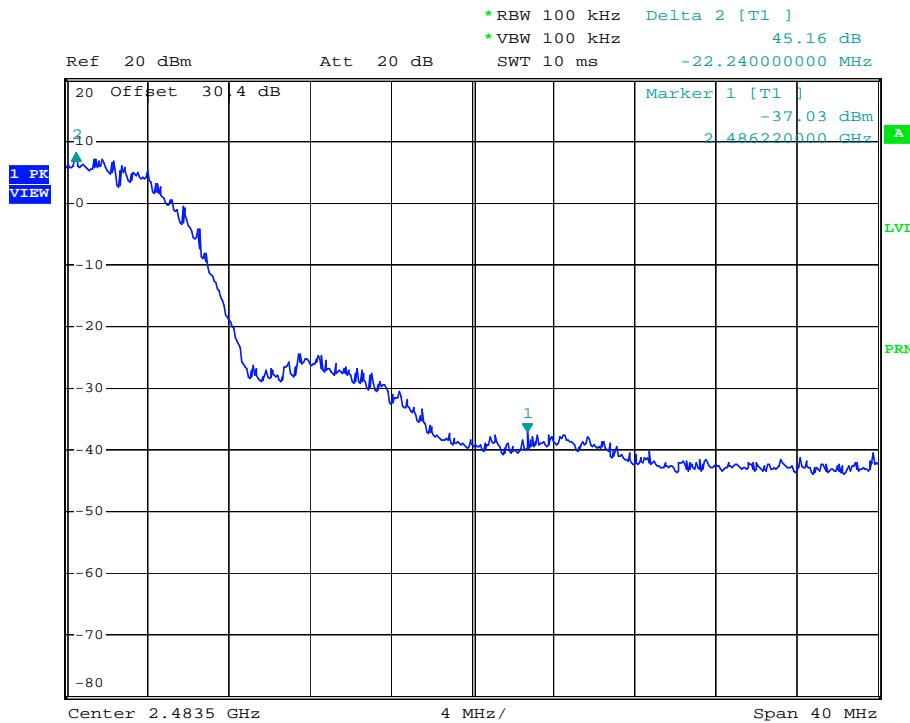

Date: 18.JUL.2008 12:04:09


HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No.	Test Dates:	EUT Type:	FCC ID:	Page 21 of 40	
HCT-R08-092	August 27, 2008	Cellular/PCS CDMA Wireless Gateway with WLAN	PH7MV440		

Conducted Spurious Emission (802.11b-CH1)

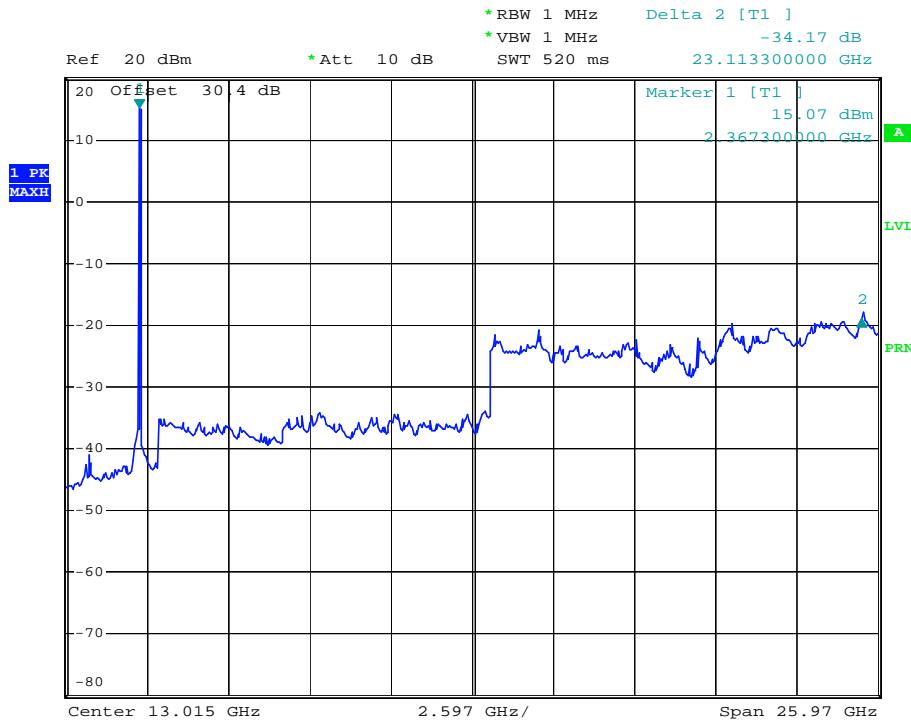

Date: 18.JUL.2008 12:16:52


Conducted Spurious Emission (802.11b-CH6)

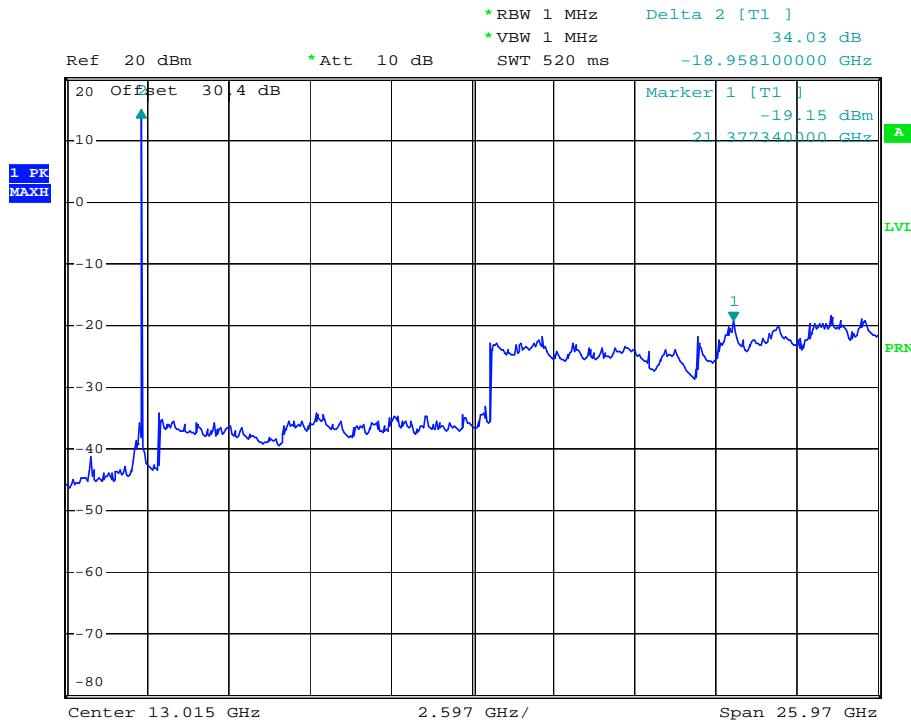

Date: 18.JUL.2008 12:17:28


HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-092	Test Dates: August 27, 2008	EUT Type: Cellular/PCS CDMA Wireless Gateway with WLAN	FCC ID: PH7MV440	Page 22	of 40

Conducted Spurious Emission (802.11b-CH11)

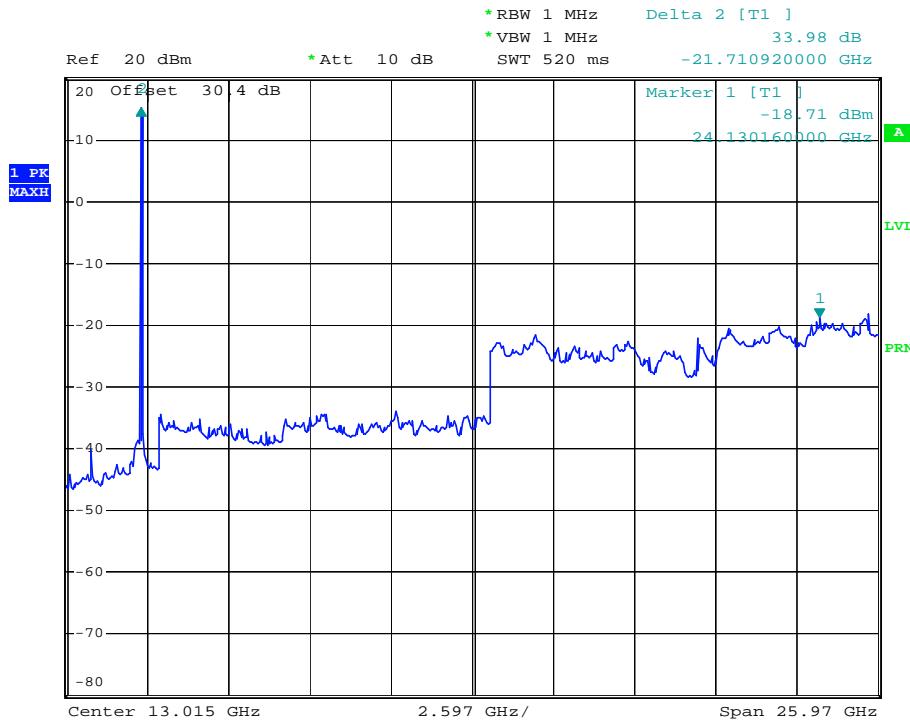

Date: 18.JUL.2008 12:17:59

BandEdge (802.11g-CH1)

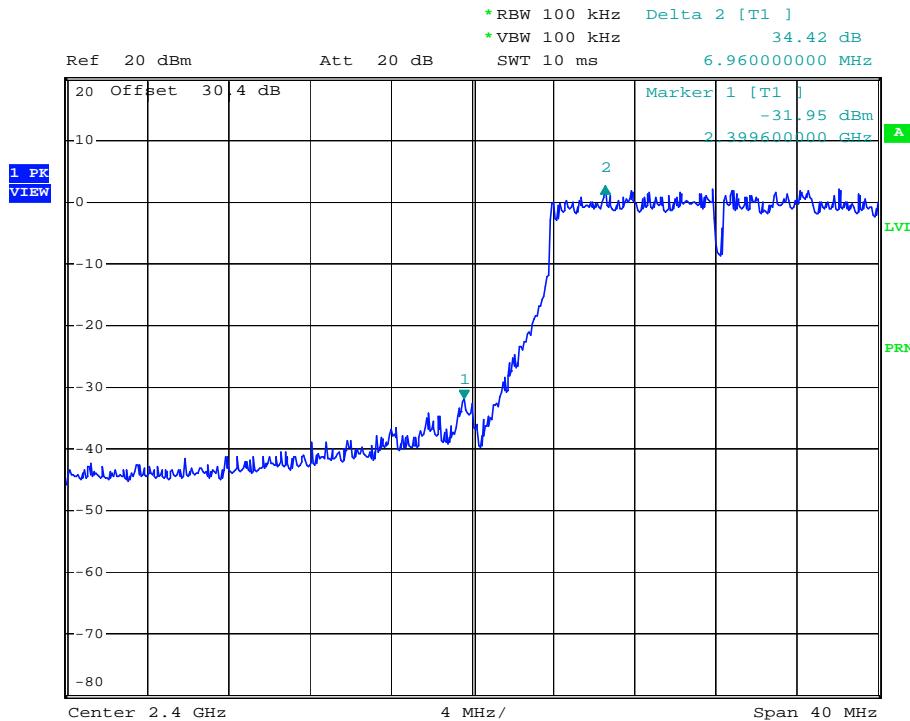


Date: 18.JUL.2008 12:12:19

HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-092	Test Dates: August 27, 2008	EUT Type: Cellular/PCS CDMA Wireless Gateway with WLAN	FCC ID: PH7MV440	Page 23 of 40	



BandEdge (802.11g-CH11)


* RBW 100 kHz Delta 2 [T1]
* VBW 100 kHz 38.81 dB
SWT 10 ms -16.240000000 MHz

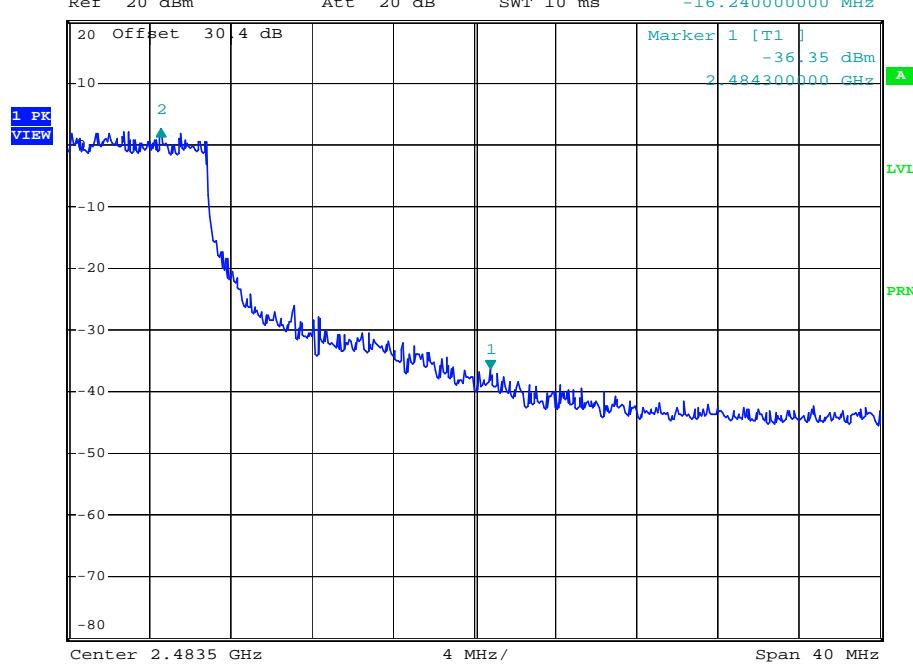

Date: 18.JUL.2008 12:13:26

Conducted Spurious Emission (802.11g-CH1)


* RBW 1 MHz Delta 2 [T1]
* VBW 1 MHz 30.05 dB
SWT 520 ms -23.165240000 GHz

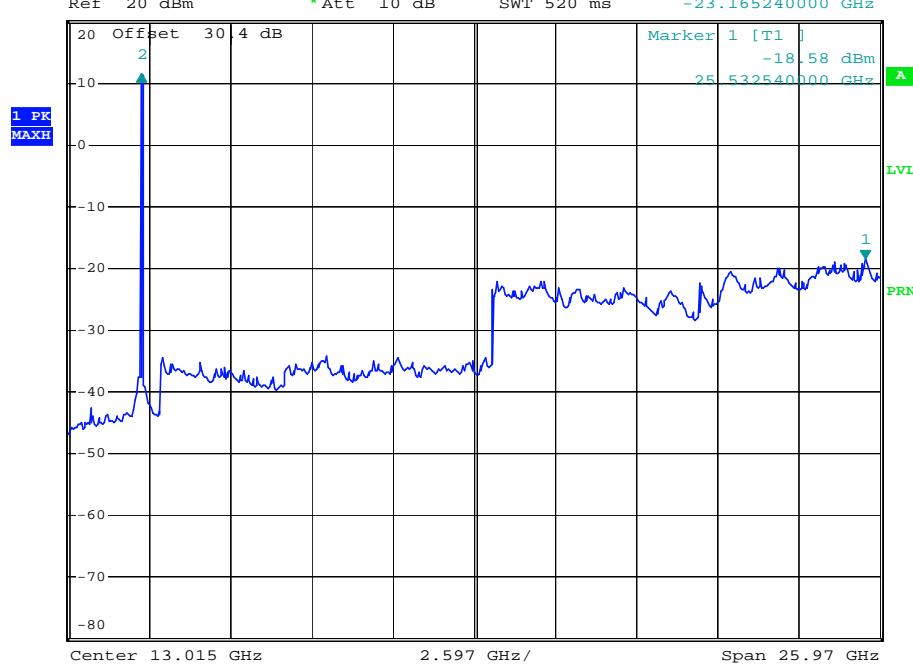

Date: 18.JUL.2008 12:16:07


FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R08-092	Test Dates: August 27, 2008	EUT Type: Cellular/PCS CDMA Wireless Gateway with WLAN FCC ID: PH7MV440

Conducted Spurious Emission (802.11g-CH6)

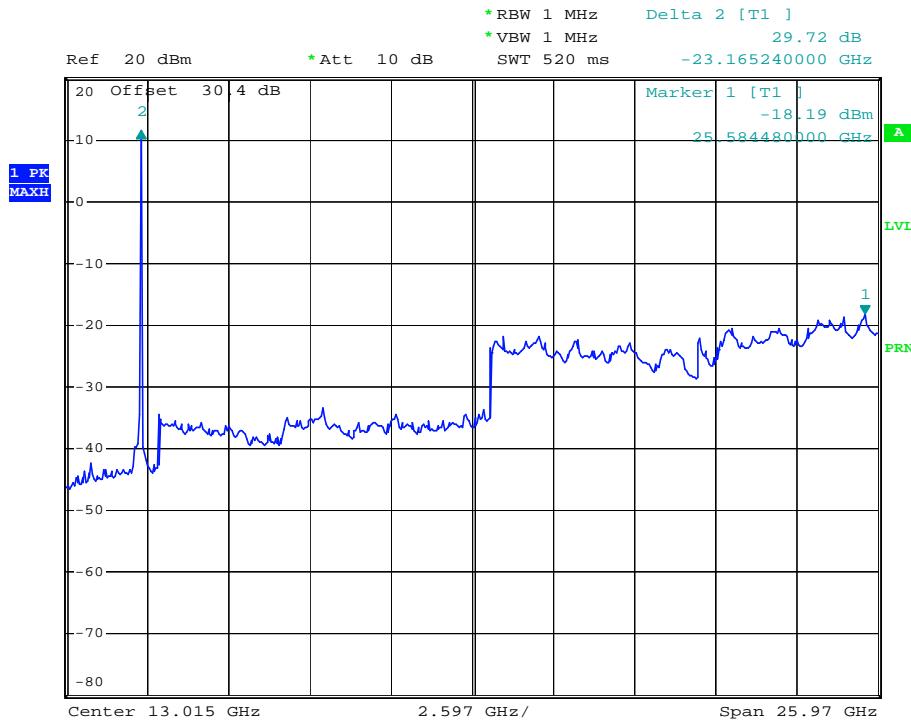

Date: 18.JUL.2008 12:15:32

Conducted Spurious Emission (802.11g-CH11)

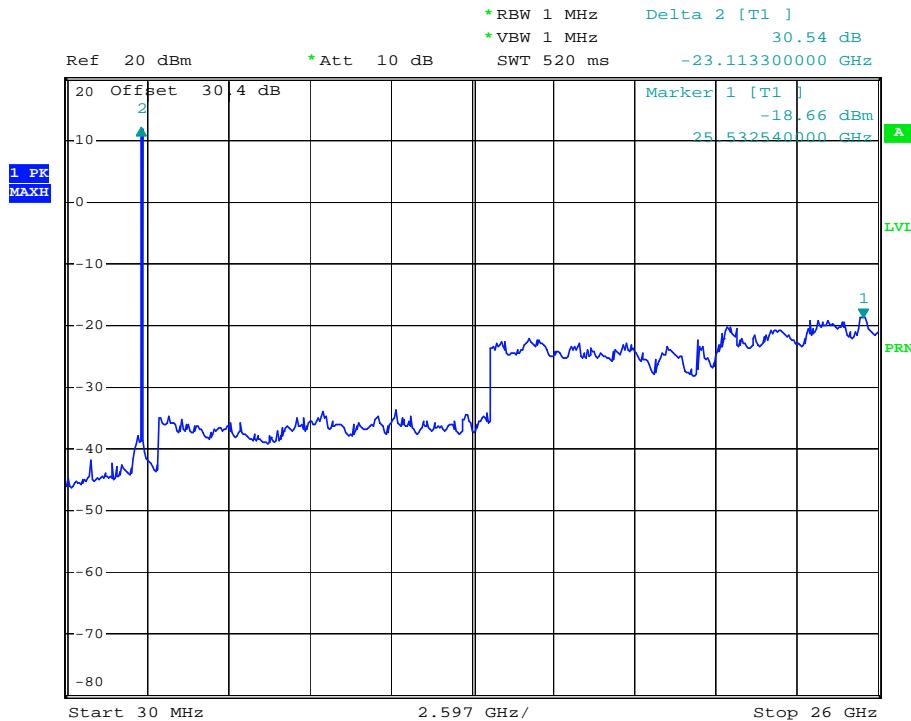

Date: 18.JUL.2008 12:14:41

HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No.	Test Dates:	EUT Type:	FCC ID:	Page 25 of 40	
HCT-R08-092	August 27, 2008	Cellular/PCS CDMA Wireless Gateway with WLAN	PH7MV440		



7.5 Radiated Measurement.

7.5.1 Radiated Spurious Emissions.

Test Requirements and limit, §15.247(d)


1. 20dBc in any 100kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-092	Test Dates: August 27, 2008	EUT Type: Cellular/PCS CDMA Wireless Gateway with WLAN	FCC ID: PH7MV440	Page 26 of 40

Test Configuration

Below 30 MHz

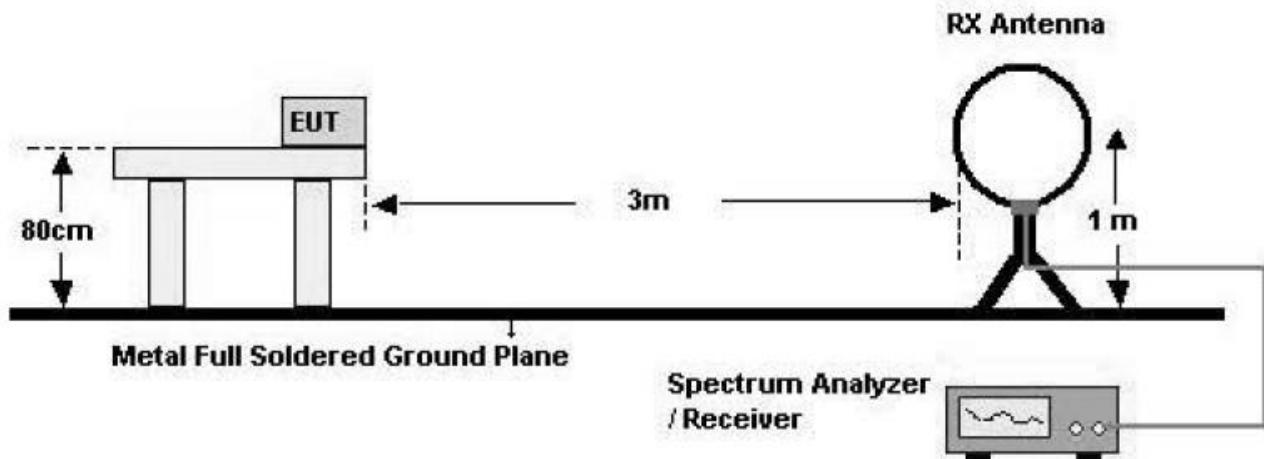


30 MHz - 1 GHz

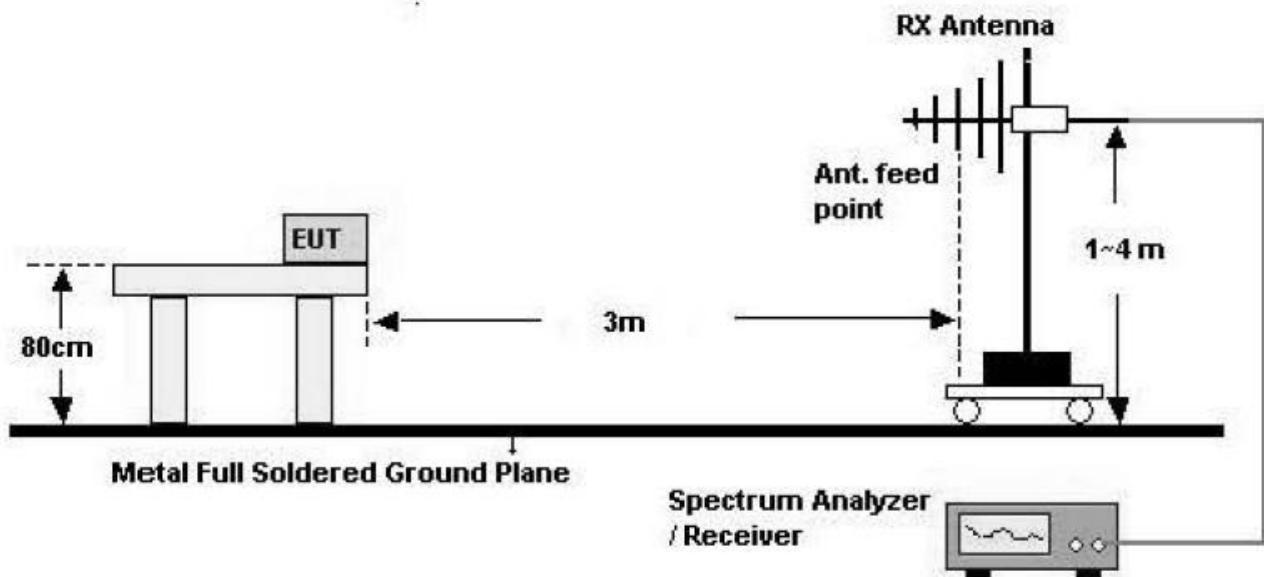

HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr	
Test Report No. HCT-R08-092	Test Dates: August 27, 2008	EUT Type: Cellular/PCS CDMA Wireless Gateway with WLAN		FCC ID: PH7MV440	Page 27	of 40

Above 1 GHz

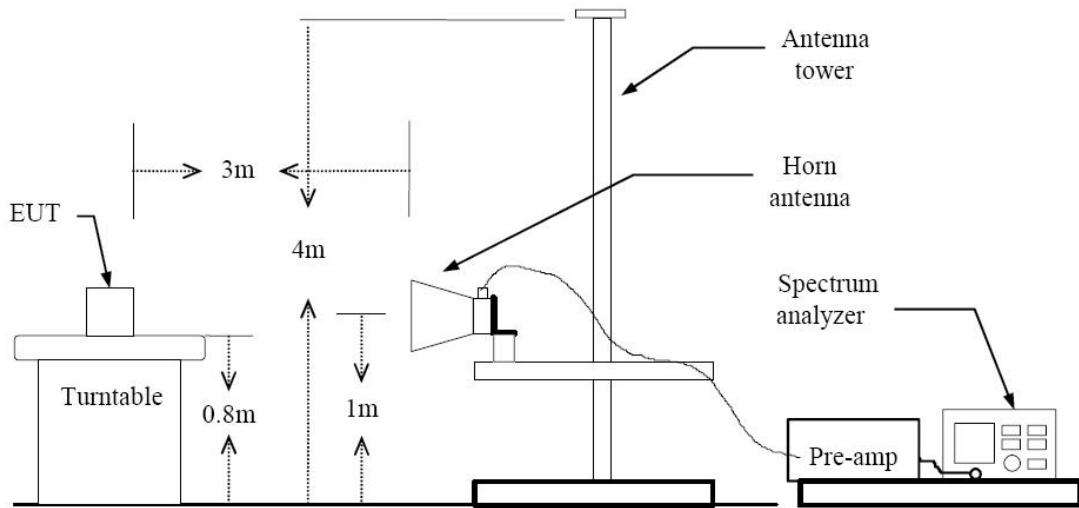

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-092	Test Dates: August 27, 2008	EUT Type: Cellular/PCS CDMA Wireless Gateway with WLAN	FCC ID: PH7MV440	Page 28	of 40



TEST RESULTS

9 kHz – 30MHz

Operation Mode: Normal Link

The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.

Notes:

1. Measuring frequencies from 9 kHz to the 30MHz.
2. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor

HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-092	Test Dates: August 27, 2008	EUT Type: Cellular/PCS CDMA Wireless Gateway with WLAN	FCC ID: PH7MV440	Page 29	of 40



TEST RESULTS

Below 1 GHz

Operation Mode: Normal Link

Frequency MHz	Reading dBuV	Ant. Factor dB	Cable Loss dB	ANT POL (H/V)	Total dBuV/m	Limit dBuV/m	Margin dB
55.9	14.2	13.0	1.7	H	28.9	40.0	11.1
55.9	17.1	13.0	1.7	V	31.8	40.0	8.2
108.8	17.0	9.4	2.5	H	28.9	43.5	14.6
499.0	7.8	17.1	5.3	H	30.2	46.0	15.8

Notes:

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Quasi peak detector mode.

HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No.	Test Dates:	EUT Type:		FCC ID:	Page 30 of 40
HCT-R08-092	August 27, 2008	Cellular/PCS CDMA Wireless Gateway with WLAN		PH7MV440	



Above 1 GHz

Operation Mode:	802.11 b
Transfer Rate:	11 Mbps
Operating Frequency	2412
Channel No.	01

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4824	43.56	-4.75	V	38.81	74	35.19	PK
4824	30.94	-4.75	V	26.19	54	27.81	AV
7236	46.40	1.31	V	47.71	74	26.29	PK
7236	34.85	1.31	V	36.16	54	17.84	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - b. AV Setting 1 GHz- 26 GHz, RBW = 1 MHz, VBW = 10 Hz.

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-092	Test Dates: August 27, 2008	EUT Type: Cellular/PCS CDMA Wireless Gateway with WLAN	FCC ID: PH7MV440	Page 31 of 40



Operation Mode:	802.11 b
Transfer Rate:	11 Mbps
Operating Frequency	2437
Channel No.	06

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4874	49.37	-4.62	V	44.75	74	29.25	PK
4874	36.49	-4.62	V	31.87	54	22.13	AV
7311	47.26	1.58	V	48.84	74	25.16	PK
7311	35.15	1.58	V	36.73	54	17.27	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - b. AV Setting 1 GHz- 26 GHz, RBW = 1 MHz, VBW = 10 Hz.

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-092	Test Dates: August 27, 2008	EUT Type: Cellular/PCS CDMA Wireless Gateway with WLAN	FCC ID: PH7MV440	Page 32 of 40



Operation Mode:	802.11 b
Transfer Rate:	11 Mbps
Operating Frequency	2462
Channel No.	11

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4924	56.49	-4.50	V	51.99	74	22.01	PK
4924	43.56	-4.50	V	39.06	54	14.94	AV
7386	55.27	1.85	V	57.12	74	16.88	PK
7386	43.44	1.85	V	45.29	54	8.71	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MH.
 - b. AV Setting 1 GHz- 26 GHz, RBW = 1 MHz, VBW = 10 Hz.

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No.	Test Dates:	EUT Type:	FCC ID:	Page 33 of 40
HCT-R08-092	August 27, 2008	Cellular/PCS CDMA Wireless Gateway with WLAN	PH7MV440	



7.5.2 Radiated Restricted Band Edge Measurements

Test Requirements and limit, §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (See section 15.205(c)).

Operation Mode:	802.11 g
Transfer Rate:	54 Mbps
Operating Frequency	2462
Channel No.	11

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2484.49	65.31	-9.76	V	55.55	74	18.45	PK
2484.49	42.93	-9.76	V	33.17	54	20.83	AV
2489.40	53.92	-9.74	V	44.18	74	29.82	PK
2489.40	42.93	-9.74	V	33.19	54	20.81	AV
2498.78	51.09	-9.70	V	41.39	74	32.61	PK
2498.78	39.47	-9.70	V	29.77	54	24.23	AV

Notes:

1. Spectrum setting:
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - b. AV Setting 1 GHz- 26 GHz, RBW = 1 MHz, VBW = 10 Hz.

HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No.	Test Dates:	EUT Type:	FCC ID:		Page 34 of 40
HCT-R08-092	August 27, 2008	Cellular/PCS CDMA Wireless Gateway with WLAN	PH7MV440		



7.7 POWERLINE CONDUCTED EMISSIONS

Test Requirements and limit, §15.247(d)

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference groundplane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.

HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No.	Test Dates:	EUT Type:	FCC ID:	Page 35 of 40	
HCT-R08-092	August 27, 2008	Cellular/PCS CDMA Wireless Gateway with WLAN	PH7MV440		

□ RESULT PLOTS


HCT

EMC TEST LAB.

EUT: MV440
 Manufacturer: AXESSTEL
 Operating Condition: WIFI MODE
 Test Site: SHIELD ROOM
 Operator: YH, LEE
 Test Specification: CISPR 22 CLASS B
 Comment: H

SCAN TABLE: "CISPR 22 Voltage"

CISPR 22 Voltage						
Start Frequency	Stop Frequency	Step Width	Detector	Meas.	IF Time	Transducer
150.1 kHz	500.0 kHz	2.5 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

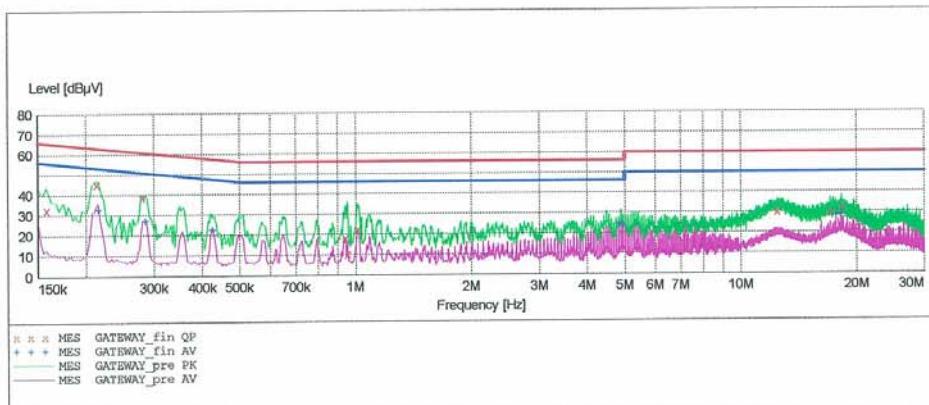

MEASUREMENT RESULT: "GATEWAY_fin_QP"

7/7/2008 10:19PM	Frequency	Level	Transd	Limit	Margin	Line	PE
	MHz	dB μ V	dB	dB μ V	dB		
	0.157600	32.70	10.0	66	32.9	---	---
	0.212600	45.20	10.0	63	17.9	---	---
	0.280100	38.80	10.0	61	22.0	---	---
	0.940000	18.30	10.1	56	37.7	---	---
	0.952000	10.30	10.1	56	45.7	---	---
	1.012000	22.40	10.1	56	33.6	---	---
	12.448000	30.30	11.5	60	29.7	---	---
	17.084000	29.90	12.1	60	30.1	---	---
	18.364000	32.50	12.2	60	27.5	---	---

HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No.	Test Dates:	EUT Type:	FCC ID:	Page 36 of 40	
HCT-R08-092	August 27, 2008	Cellular/PCS CDMA Wireless Gateway with WLAN	PH7MV440		



MEASUREMENT RESULT: "GATEWAY_fin AV"

7/7/2008 10:19PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
0.215100	32.90	10.0	53	20.1	---	---
0.285100	27.30	10.0	51	23.4	---	---
0.425100	22.70	10.0	47	24.7	---	---
4.824000	24.50	10.6	46	21.5	---	---
4.892000	24.60	10.6	46	21.4	---	---
4.956000	23.80	10.6	46	22.2	---	---
17.696000	28.40	12.2	50	21.6	---	---
18.244000	30.60	12.2	50	19.4	---	---
18.304000	29.00	12.2	50	21.0	---	---

HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-092	Test Dates: August 27, 2008	EUT Type: Cellular/PCS CDMA Wireless Gateway with WLAN	FCC ID: PH7MV440	Page 37 of 40	


HCT

EMC TEST LAB.

EUT: MV440
 Manufacturer: AXESSTEL
 Operating Condition: WIFI MODE
 Test Site: SHIELD ROOM
 Operator: YH, LEE
 Test Specification: CISPR 22 CLASS B
 Comment: N

SCAN TABLE: "CISPR 22 Voltage"

CISPR 22 Voltage						
Start Frequency	Stop Frequency	Step Width	Detector	Meas.	IF Time	Transducer
150.1 kHz	500.0 kHz	2.5 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

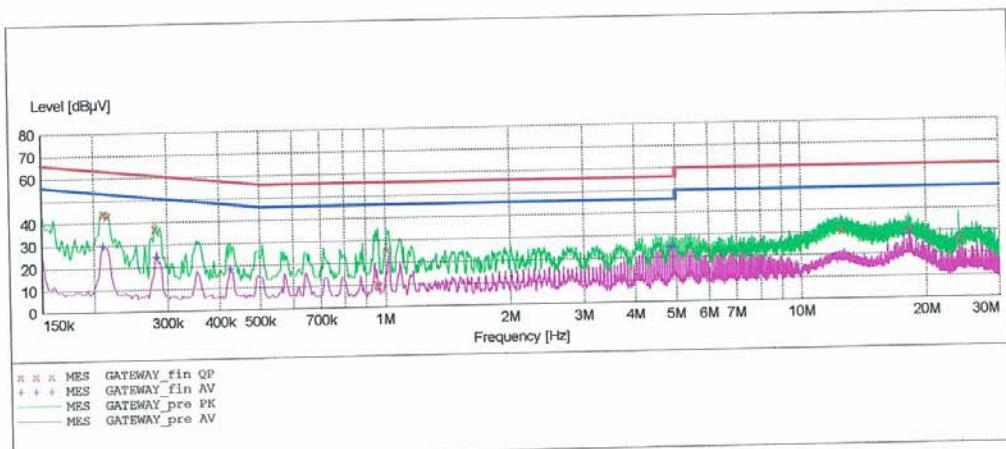

MEASUREMENT RESULT: "GATEWAY_fin_QP"

7/7/2008 10:59PM	Frequency	Level	Transd	Limit	Margin	Line	PE
	MHz	dB μ V	dB	dB μ V	dB		
	0.210100	44.20	10.0	63	19.0	----	----
	0.215100	43.40	10.0	63	19.6	----	----
	0.280100	37.40	10.0	61	23.4	----	----
	0.952000	10.40	10.1	56	45.6	----	----
	0.964000	9.80	10.1	56	46.2	----	----
	1.012000	25.80	10.1	56	30.2	----	----
	12.520000	30.90	11.5	60	29.1	----	----
	18.248000	30.70	12.2	60	29.3	----	----
	24.000000	26.50	12.6	60	33.5	----	----

HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No.	Test Dates:	EUT Type:	FCC ID:	Page 38 of 40	
HCT-R08-092	August 27, 2008	Cellular/PCS CDMA Wireless Gateway with WLAN	PH7MV440		



MEASUREMENT RESULT: "GATEWAY_fin AV"

7/7/2008 10:59PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
0.210100	30.10	10.0	53	23.1	---	---
0.282600	24.70	10.0	51	26.0	---	---
0.425100	18.90	10.0	47	28.4	---	---
4.824000	24.60	10.6	46	21.4	---	---
4.892000	25.10	10.6	46	20.9	---	---
4.960000	24.30	10.6	46	21.7	---	---
17.696000	28.60	12.2	50	21.4	---	---
18.244000	30.60	12.2	50	19.4	---	---
18.304000	28.90	12.2	50	21.1	---	---

HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-092	Test Dates: August 27, 2008	EUT Type: Cellular/PCS CDMA Wireless Gateway with WLAN	FCC ID: PH7MV440	Page 39 of 40	



8. LIST OF TEST EQUIPMENT

Manufacturer	Model / Equipment	Cal Interval	Calibration Due	Serial No.
Rohde & Schwarz	ESCI/ EMI Test Receiver	Annual	08/24/ 2009	100033
Rohde & Schwarz	ESH2-Z5/ LISN	Annual	04/20/2009	861741/013
Rohde & Schwarz	ESH3-Z6/ LISN	Annual	03/19/2009	100329
Schwarzbeck	VULB 9160/ TRILOG Antenna	Biennial	04/20/2009	9160-3150
HD	MA240/ Antenna Position Tower	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	12
Rohde & Schwarz	ESH3-Z2/ PULSE LIMITER	Annual	10/03/2008	375.8810.352
MITEQ	AMF-60-0010 1800-35-20P	Annual	01/15/2009	1200937
Schwarzbeck	BBHA 9120D/ Horn Antenna	Biennial	03/30/2009	147
Schwarzbeck	BBHA9170/ SHF-EHF Horn Antenna	Biennial	03/20/2009	BBHA9170342
Rohde & Schwarz	6502/Loop Antenna	Biennial	12/26/2009	9009-2536
Rohde & Schwarz	FSP30/Spectrum Analyzer	Annual	07/31/2009	839117/011
Agilent	E4440A/Spectrum Analyzer	Annual	01/08/2009	US45303008
Agilent	E4416A /Power Meter	Annual	01/22/2009	GB41291412
Wainwright Instrument	WHF3.3/18G-10EF / High Pass Filter	Annual	06/28/2009	1
Hewlett Packard	11636B/Power Divider	Annual	01/14/2009	11377
DIGITAL	EP-3010 /DC POWER SUPPLY	Annual	01/10/2009	3110117

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-092	Test Dates: August 27, 2008	EUT Type: Cellular/PCS CDMA Wireless Gateway with WLAN	FCC ID: PH7MV440	Page 40 of 40