



## Engineering Test Report No. 2203205-02 Rev A

Report Date	February 23, 2023	
Manufacturer Name	Industrial Scientific Corporation	
Manufacturer Address	1 Life Way Pittsburgh, PA 15205	
Test Item Name Model No.	Model Version: RGX-4G 1810-9509	
Date Received	January 18, 2023	
Test Date	January 18, 2023	
Specifications	FCC "Code of Federal Regulations" Title 47, Part 15, Subpart B FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.225 Innovation, Science, and Economic Development Canada, RSS-GEN Innovation, Science, and Economic Development Canada, RSS-210	
Test Facility	Elite Electronic Engineering, Inc. 1516 Centre Circle, Downers Grove, IL 60515	FCC Reg. Number: 269750 IC Reg. Number: 2987A CAB Identifier: US0107
Signature		
Tested by	Tylar Jozefczyk	
Signature		
Approved by	Raymond J. Klouda, Registered Professional Engineer of Illinois – 44894	
PO Number	400310313	
<p>This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.</p> <p>This report shall not be reproduced, except in full, without the written approval of Elite Electronic Engineering Inc.</p> <p>Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.225 and Innovation, Science, and Economic Development Canada, RSS-210 test specifications. The data presented in this test report pertains to the EUT on the test date specified. Any electrical or mechanical modifications made to the EUT subsequent to the specified test date will serve to invalidate the data and void this certification. This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the Federal Government.</p>		

## Table of Contents

1.	Report Revision History .....	3
2.	Introduction .....	4
2.1.	Scope of Tests .....	4
2.2.	Purpose .....	4
2.3.	Identification of the EUT.....	4
3.	Power Input .....	4
4.	Grounding .....	4
5.	Support Equipment .....	4
6.	Interconnect Leads.....	4
7.	Modifications Made to the EUT .....	4
8.	Mode of Operation .....	5
9.	Test Specifications .....	5
10.	Test Plan .....	5
11.	Deviations, Additions to, or Exclusions from Test Specifications .....	5
12.	Laboratory Conditions .....	5
13.	Summary .....	5
14.	Statement of Conformity .....	5
15.	Certification .....	6
16.	Photographs of EUT.....	7
17.	Equipment List .....	9
18.	Block Diagram of Test Setup .....	10
19.	Radiated Emissions .....	11
20.	Scope of Accreditation .....	18

**This report shall not be reproduced, except in full,  
without the written approval of Elite Electronic Engineering Inc.**

## 1. Report Revision History

Revision	Date	Description
–	27 FEB 2023	Initial Release of Engineering Test Report No.2203205-02
A	27 FEB 2023 By RK	<ul style="list-style-type: none"><li>- On the cover and throughout report: Added Rev A to the report number in the header of each page.</li><li>- Section 19, Page 12: Added RSS 210 limits.</li><li>- Corrected ISED data sheet.</li></ul>

## 2. Introduction

### 2.1. Scope of Tests

This document presents the results of a series of RF emissions tests that were performed on the Industrial Scientific Corporation RGX Gateway 4G (hereinafter referred to as the Equipment Under Test (EUT)). The EUT was manufactured and submitted for testing by Industrial Scientific Corporation located in Pittsburgh, PA.

### 2.2. Purpose

The test series was performed to determine if the Industrial Scientific Corporation RGX Gateway 4G meets the Class II Permissive Change requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, §15.225.

The test series was also performed to determine if the Industrial Scientific Corporation RGX Gateway 4G meets the Class II Permissive Change requirements of the Innovation, Science, and Economic Development Canada Radio Standards Specification RSS-Gen and RSS-210 for Transmitters.

The following modification has been made to the original equipment:

- A new 4G modem (Nimbelink / NL-SWLTE-TC1WWG, FCC ID RI7LE910CXWWX) was added to the EUT.

Testing was performed in accordance with ANSI C63.10-2013.

### 2.3. Identification of the EUT

The EUT was identified as follows:

EUT Identification	
Product Description	Model Version: RGX-4G
Model/Part No.	1810-9509
Serial No.	2211014-001
Size of EUT	11" x 9" x 6"
Software/Firmware Version	3.0.b05

The EUT listed above was used throughout the test series.

## 3. Power Input

The EUT obtained 120VAC 60Hz power via a 3-wire, 1-meter, unshielded power cord.

## 4. Grounding

The EUT was connected to ground through the third wire of its input power cord.

## 5. Support Equipment

The EUT was submitted for testing along with the following support equipment:

Description	Model #	S/N
Laptop	---	---

## 6. Interconnect Leads

No interconnect leads were used during the tests.

## 7. Modifications Made to the EUT

No modifications were made to the EUT during the testing.

## 8. Mode of Operation

The EUT was energized, and was programmed to transmit in the following mode:

Mode	Description
NFC	Transmits at 13.56MHz

## 9. Test Specifications

The tests were performed to selected portions of, and in accordance with, the test specifications.

- Federal Communications Commission "Code of Federal Regulations", Title 47, Chapter I, Subchapter A, Part 15, Subpart C, Section 225 – "Operation within the band 13.110-14.010 MHz"
- ANSI C63.10-2013 – "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices"
- Radio Standard Specification RSS-Gen Issue 5, Amendment 2, February 2021 – "General Requirements for Compliance of Radio Apparatus"
- Radio Standard Specification RSS-210 Issue 10, Amendment 2, April 2020 – "License-Exempt Radio Apparatus: Category I Equipment"

## 10. Test Plan

No test plan was provided. Instructions were provided by personnel from Industrial Scientific Corporation and used in conjunction with the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.225, Innovation, Science, and Economic Development Canada, RSS-210, and ANSI C63.10-2013 specifications.

## 11. Deviations, Additions to, or Exclusions from Test Specifications

There were no deviations, additions to, or exclusions from the test specifications during this test series.

## 12. Laboratory Conditions

The ambient parameters of the laboratory during testing were as follows:

Ambient Parameters	Value
Temperature	21.9°C
Relative Humidity	21%
Atmospheric Pressure	1003.5mb

## 13. Summary

The following EMC tests were performed, and the results are shown below:

Test Description	Requirements	Test Method	Results
Radiated Emissions	FCC 15.225 ISED RSS-210	ANSI C63.10:2013	Conforms

## 14. Statement of Conformity


The Industrial Scientific Corporation RGX Gateway 4G (Model No. 1810-9509, Serial No. 2211014-001) did fully conform to the selected requirements of FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.225 and Innovation, Science, and Economic Development Canada, RSS-210.

## 15. Certification

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.225 and Innovation, Science, and Economic Development Canada, RSS-210 test specifications. The data presented in this test report pertains to the EUT on the test date specified. Any electrical or mechanical modifications made to the EUT subsequent to the specified test date will serve to invalidate the data and void this certification.

## 16. Photographs of EUT



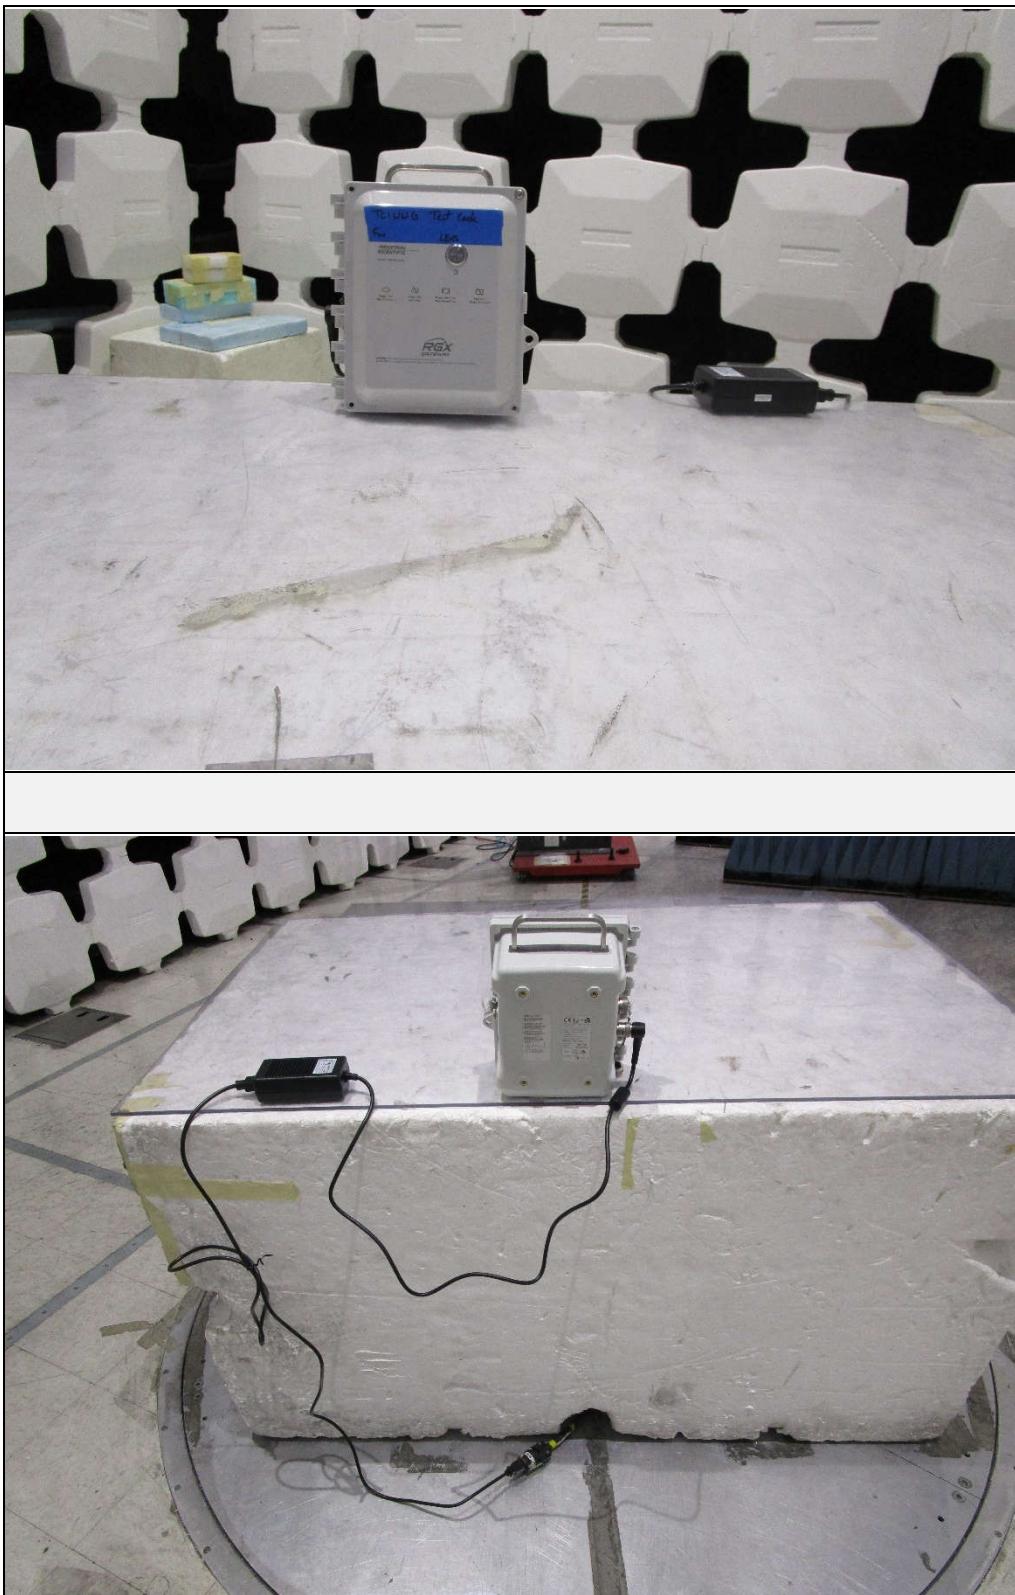

## 17. Equipment List

Eq ID	Equipment Description	Manufacturer	Model No.	Serial No.	Frequency Range	Cal Date	Due Date
CDZ3	LAB WORKSTATION	ELITE	LWS-10		WINDOWS 10	CNR	
NLS1	24" ACTIVE LOOP ANTENNA	EMCO	6502	8903-2329	0.01-30MHZ	8/31/2022	8/31/2024
NTA3	BILOG ANTENNA	TESEQ	6112D	32853	25-1000MHz	11/17/2022	11/17/2024
RBG2	EMI ANALYZER	ROHDE & SCHWARZ	ESW44	101591	2HZ-44GHZ	3/31/2022	3/31/2023
SAA1	AC POWER SOURCE/ANALYZER	HEWLETT PACKARD	6813A	3524A-00446	0-300VRMS, 1750VA	NOTE 1	
WKA1	SOFTWARE, UNIVERSAL RCV EMI	ELITE	UNIV_RCV_EMI	1	---	I/O	


N/A: Not Applicable

I/O: Initial Only

CNR: Calibration Not Required

NOTE 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.

## 18. Block Diagram of Test Setup

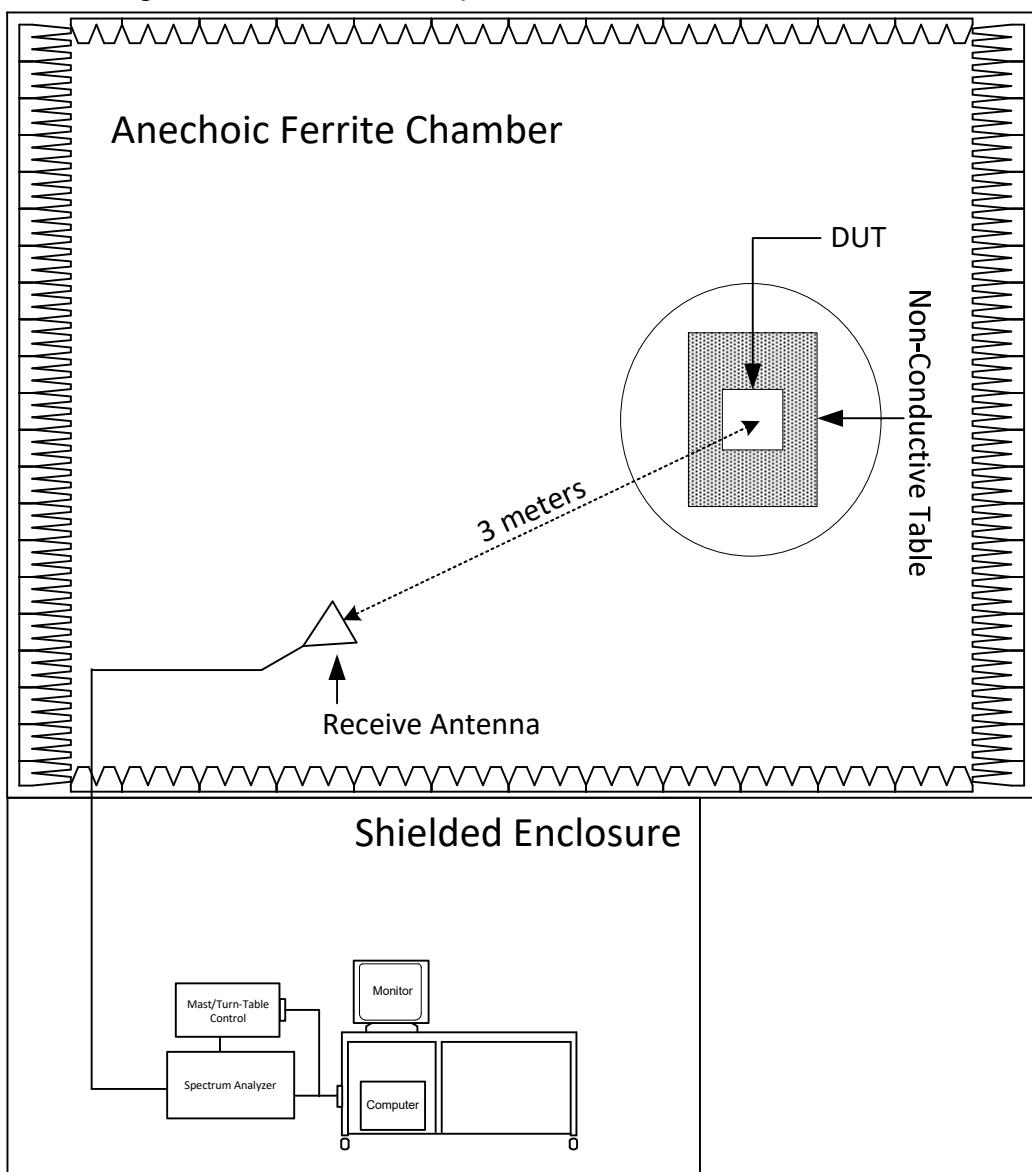

## Radiated Measurements Test Setup

## 19. Radiated Emissions

EUT Information	
Manufacturer	Industrial Scientific Corporation
Product	RGX Gateway 4G
Model No.	1810-9509
Serial No.	2211014-001
Mode	NFC

Test Setup Details	
Setup Format	Tabletop
Height of Support	N/A
Type of Test Site	Semi-Anechoic Chamber
Test Site Used	R29F
Type of Antennas Used	Below 30MHz: Loop (or equivalent) Below 1GHz: Bilog (or equivalent)
Notes	N/A

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3

Requirements	
The EUT must comply with the requirements of FCC "Code of Federal Regulations Title 47", Part 15, Subpart C, Section 15.225 and 15.209, as well as the requirements of the RSS-GEN Section 8.9.	

FCC 15.209 Emissions Limits		
Carrier Frequency (MHz)	Field Strength of Emissions ( $\mu$ V/m)	Measurement Distance (m)
0.009 – 0.490	2400/f(kHz)	300
0.490 – 1.705	24000/f(kHz)	30
1.705 – 30.0	30	3
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

FCC 15.225 Emissions Limits		
Carrier Frequency (MHz)	Field Strength of Emissions ( $\mu$ V/m)	Measurement Distance (m)
13.553 – 13.567	15848	30
13.410 – 13.553	334	30
13.567 – 13.710	334	30
13.110 – 13.410	106	30
13.710 – 14.010	106	30

RSS-Gen Table 5 – General Field Strength Limits at Frequencies Above 30 MHz	
Frequency (MHz)	Field Strength (µV/m at 3m)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500

RSS-Gen Table 6 – General Field Strength Limits at Frequencies Below 30 MHz		
Frequency	Field Strength of Emissions (µA/m)	Measurement Distance (m)
9 – 490kHz <sup>1</sup>	6.37/F (F in kHz)	300
490 – 1705kHz	63.7/F (F in kHz)	30
1.705 – 30MHz	0.08	30

Note 1: The emission limits for the ranges 9 – 90kHz and 110 – 490kHz are based on measurements employing a linear average detector.

RSS 210 Emissions Limits		
Carrier Frequency (MHz)	Field Strength of Emissions (µV/m)	Measurement Distance (m)
13.553 – 13.567	15848	30
13.410 – 13.553	334	30
13.567 – 13.710	334	30
13.110 – 13.410	106	30
13.710 – 14.010	106	30

Procedure
Radiated measurements were performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-tile/anechoic absorber lined test chamber. The walls and ceiling of the shielded chamber are lined with ferrite tiles, with anechoic absorber material is installed over the ferrite tiles. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4-2014 for site attenuation.
The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads.
A preliminary radiated emissions test was performed to determine the emission characteristics of the EUT. For the preliminary test, a broadband measuring antenna was positioned at a 3-meter distance from the EUT. The EUT was placed on an 80cm high non-conductive stand. The entire frequency range from 10kHz – 200MHz was investigated using a peak detector function. The data was then processed by the computer to calculate equivalent field intensity.
The final emission tests were then manually performed over the frequency range of 10kHz – 200MHz. Between 10 – 30MHz, a loop antenna was used as the pick-up device, with a peak detector with a resolution bandwidth of 10kHz used on the spectrum analyzer. Between 30 – 200MHz, a bi-log antenna was used, with a peak detector with a resolution bandwidth of 100kHz used on the spectrum analyzer.
The peak detected levels were converted to average levels using a duty cycle factor which was computed from the pulse train.
To ensure that maximum or worst case, emission levels were measured, the following steps were taken:
1) To ensure that maximum or worst case emission levels were measured, the following steps were taken when measuring the fundamental emissions and the spurious emissions:
a) The EUT was rotated so that all of its sides were exposed to the receiving antenna.
b) Since the measuring antenna is linearly polarized, both horizontal and vertical field components

were measured.


- c) The measuring antenna was raised and lowered for each antenna polarization to maximize the readings.
- d) In instances where it was necessary to use a shortened cable between the measuring antenna and the spectrum analyzer, the measuring antenna was not raised or lowered to ensure maximized readings. Instead, the EUT was rotated through all axis to ensure the maximum readings were recorded for the EUT.




Test Setup for Spurious Radiated Emissions, 10 – 30MHz – Antenna Polarization  
Horizontal



Test Setup for Spurious Radiated Emissions, 10 – 30MHz – Antenna Polarization  
Vertical

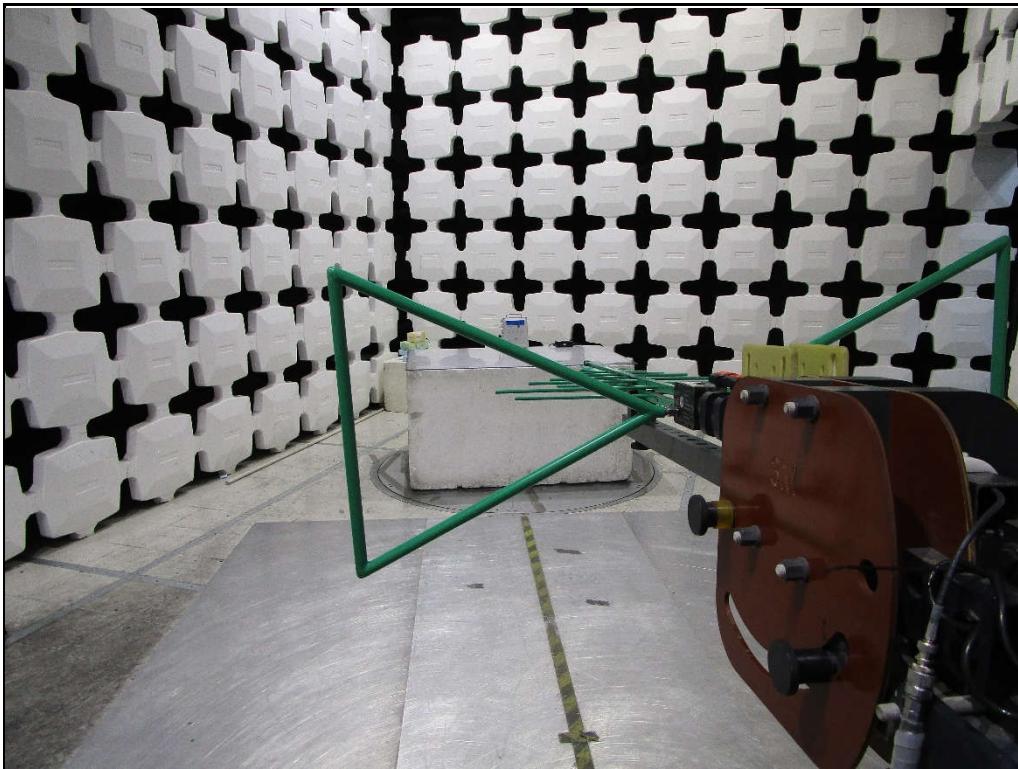

Test Setup for Spurious Radiated Emissions, 30MHz – 1GHz – Antenna  
Polarization Horizontal

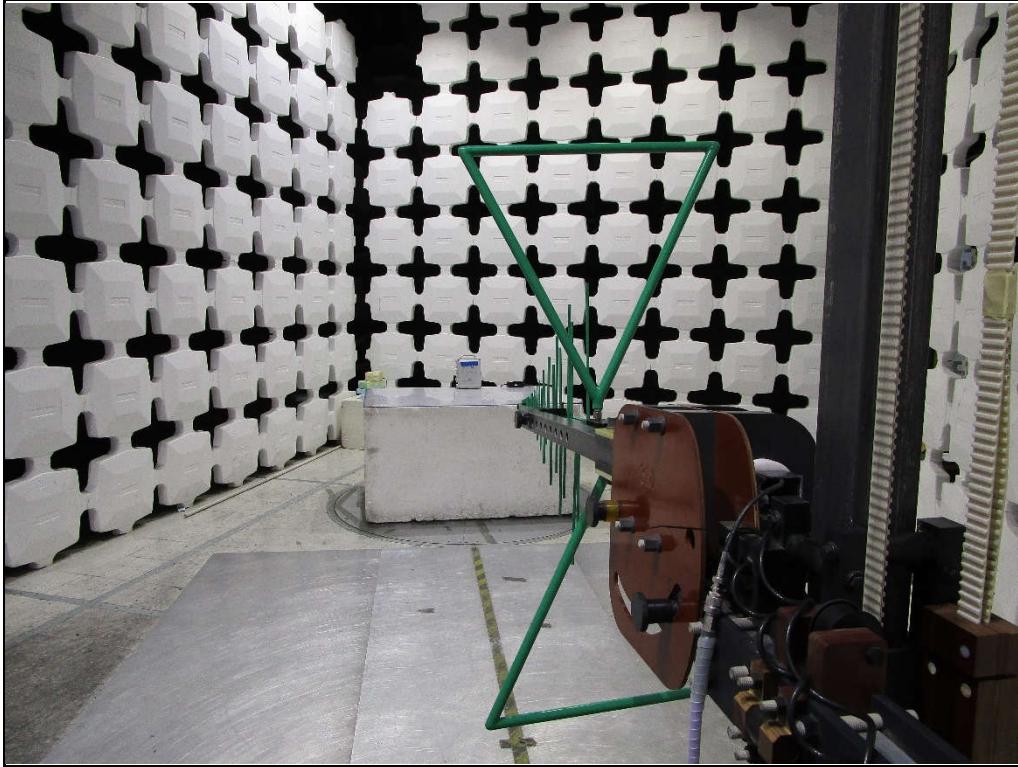

Test Setup for Spurious Radiated Emissions, 30MHz – 1GHz – Antenna  
Polarization Vertical

Test Details											
Manufacturer	Industrial Scientific Corporation										
EUT	RGX Gateway 4G										
Model No.	1810-9509										
Serial No.	2211014-001										
Mode	NFC										
Frequency Tested	13.556MHz										
Notes	FCC Limits										

Freq (MHz)	Ant Pol	Meter Reading (dB $\mu$ V)	Ambient	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Distance Correction (dB)	Total (dB $\mu$ V/m)	Total ( $\mu$ V/m)	Limit ( $\mu$ V/m)	Margin (dBm)
13.56	H	51.71		0.37	10.36	0.00	-40.00	22.44	13.24	15848.00	-61.56
	V	48.58		0.37	10.36	0.00	-40.00	19.31	9.24	15848.00	-64.69
27.11	H	12.18	Ambient	0.64	8.38	0.00	-40.00	-18.80	0.11	30.00	-48.34
	V	10.78	Ambient	0.64	8.38	0.00	-40.00	-20.20	0.10	30.00	-49.74
40.67	H	13.38	Ambient	0.80	18.57	0.00	0.00	32.74	43.36	100.00	-7.26
	V	13.74	Ambient	0.80	18.57	0.00	0.00	33.10	45.20	100.00	-6.90
54.22	H	11.73	Ambient	0.91	13.09	0.00	0.00	25.73	19.34	100.00	-14.27
	V	14.64	Ambient	0.91	13.09	0.00	0.00	28.64	27.03	100.00	-11.36
67.78	H	14.04	Ambient	0.99	12.28	0.00	0.00	27.32	23.22	100.00	-12.68
	V	15.27	Ambient	0.99	12.28	0.00	0.00	28.55	26.76	100.00	-11.45
81.34	H	12.20	Ambient	1.06	13.14	0.00	0.00	26.40	20.90	100.00	-13.60
	V	16.21	Ambient	1.06	13.14	0.00	0.00	30.41	33.16	100.00	-9.59
94.89	H	11.52	Ambient	1.12	15.92	0.00	0.00	28.56	26.80	150.00	-14.96
	V	14.79	Ambient	1.12	15.92	0.00	0.00	31.83	39.06	150.00	-11.69
108.45	H	13.01	Ambient	1.18	17.95	0.00	0.00	32.14	40.44	150.00	-11.39
	V	12.83	Ambient	1.18	17.95	0.00	0.00	31.96	39.61	150.00	-11.57
122.00	H	12.49	Ambient	1.25	18.30	0.00	0.00	32.03	39.97	150.00	-11.49
	V	11.99	Ambient	1.25	18.30	0.00	0.00	31.53	37.73	150.00	-11.99
135.56	H	12.20	Ambient	1.31	17.53	0.00	0.00	31.04	35.65	150.00	-12.48
	V	12.05	Ambient	1.31	17.53	0.00	0.00	30.89	35.04	150.00	-12.63

Test Details											
Manufacturer	Industrial Scientific Corporation										
EUT	RGX Gateway 4G										
Model No.	1810-9509										
Serial No.	2211014-001										
Mode	NFC										
Frequency Tested	13.556MHz										
Notes	RSS Limits										

Freq (MHz)	Ant Pol	Meter Reading (dB $\mu$ V)	Ambient	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Distance Correction (dB)	Total (dB $\mu$ A/m)	Total ( $\mu$ A/m)	Limit ( $\mu$ A/m)	Margin (dB)
27.11	H	12.18	Ambient	0.64	-43.14	0.00	-40.00	-70.32	0.00030	0.08	-48.38
	V	10.78	Ambient	0.64	-43.14	0.00	-40.00	-71.72	0.00026	0.08	-49.78

Freq (MHz)	Ant Pol	Meter Reading (dB $\mu$ V)	Ambient	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Distance Correction (dB)	Total (dB $\mu$ V/m)	Total ( $\mu$ V/m)	Limit ( $\mu$ V/m)	Margin (dBm)
13.56	H	51.71		0.37	10.36	0.00	-40.00	22.44	13.24	15848.00	-61.56
	V	48.58		0.37	10.36	0.00	-40.00	19.31	9.24	15848.00	-64.69
40.67	H	13.38	Ambient	0.80	18.57	0.00	0.00	32.74	43.36	100.00	-7.26
	V	13.74	Ambient	0.80	18.57	0.00	0.00	33.10	45.20	100.00	-6.90
54.22	H	11.73	Ambient	0.91	13.09	0.00	0.00	25.73	19.34	100.00	-14.27
	V	14.64	Ambient	0.91	13.09	0.00	0.00	28.64	27.03	100.00	-11.36
67.78	H	14.04	Ambient	0.99	12.28	0.00	0.00	27.32	23.22	100.00	-12.68
	V	15.27	Ambient	0.99	12.28	0.00	0.00	28.55	26.76	100.00	-11.45
81.34	H	12.20	Ambient	1.06	13.14	0.00	0.00	26.40	20.90	100.00	-13.60
	V	16.21	Ambient	1.06	13.14	0.00	0.00	30.41	33.16	100.00	-9.59
94.89	H	11.52	Ambient	1.12	15.92	0.00	0.00	28.56	26.80	150.00	-14.96
	V	14.79	Ambient	1.12	15.92	0.00	0.00	31.83	39.06	150.00	-11.69
108.45	H	13.01	Ambient	1.18	17.95	0.00	0.00	32.14	40.44	150.00	-11.39
	V	12.83	Ambient	1.18	17.95	0.00	0.00	31.96	39.61	150.00	-11.57
122.00	H	12.49	Ambient	1.25	18.30	0.00	0.00	32.03	39.97	150.00	-11.49
	V	11.99	Ambient	1.25	18.30	0.00	0.00	31.53	37.73	150.00	-11.99
135.56	H	12.20	Ambient	1.31	17.53	0.00	0.00	31.04	35.65	150.00	-12.48
	V	12.05	Ambient	1.31	17.53	0.00	0.00	30.89	35.04	150.00	-12.63

## 20. Scope of Accreditation

SCOPE OF ACCREDITATION TO ISO/IEC 17025:2017

ELITE ELECTRONIC ENGINEERING, INC.  
1516 Centre Circle  
Downers Grove, IL 60515  
Robert Bugielski (QA Manager) Phone: 630 495 9770 ext. 168  
Email: [rbugielski@elitetest.com](mailto:rbugielski@elitetest.com)  
Craig Fanning (EMC Lab Manager) Phone: 630 495 9770 ext. 112  
Email: [cfanning@elitetest.com](mailto:cfanning@elitetest.com)  
Brandon Lugo (Automotive Team Leader) Phone: 630 495 9770 ext. 163  
Email: [blugo@elitetest.com](mailto:blugo@elitetest.com)  
Richard King (FCC/Commercial Team Leader) Phone: 630 495 9770 ext. 123  
Email: [reking@elitetest.com](mailto:reking@elitetest.com)  
Website: [www.elitetest.com](http://www.elitetest.com)

## ELECTRICAL

Valid To: June 30, 2023

Certificate Number: 1786.01

In recognition of the successful completion of the A2LA Accreditation Program evaluation process, accreditation is granted to this laboratory to perform the following automotive electromagnetic compatibility and other electrical tests:

Test Technology:Test Method(s)<sup>1</sup>:*Transient Immunity*

ISO 7637-2 (including emissions); ISO 7637-3;  
ISO 16750-2:2012, Sections 4.6.3 and 4.6.4;  
CS-11979, Section 6.4; CS.00054, Section 5.9;  
EMC-CS-2009.1 (CI220); FMC1278 (CI220, CI221, CI222);  
GMW 3097, Section 3.5; SAE J1113-11; SAE J1113-12;  
ECE Regulation 10.06 Annex 10

*Electrostatic Discharge (ESD)*

ISO 10605 (2001, 2008);  
CS-11979 Section 7.0; CS.00054, Section 5.10;  
EMC-CS-2009.1 (CI 280); FMC1278 (CI280); SAE J1113-13;  
GMW 3097 Section 3.6

*Conducted Emissions*

CISPR 25 (2002, 2008), Sections 6.2 and 6.3;  
CISPR 25 (2016), Sections 6.3 and 6.4;  
CS-11979, Section 5.1; CS.00054, Sections 5.6.1 and 5.6.2;  
GMW 3097, Section 3.3.2;  
EMC-CS-2009.1 (CE 420); FMC1278 (CE420, CE421)

*Radiated Emissions Anechoic*

CISPR 25 (2002, 2008), Section 6.4;  
CISPR 25 (2016), Section 6.5;  
CS-11979, Section 5.3; CS.00054, Section 5.6.3;  
GMW 3097, Section 3.3.1;  
EMC-CS-2009.1 (RE 310); FMC1278 (RE310);  
ECE Regulation 10.06 Annex 7 (Broadband)  
ECE Regulation 10.06 Annex 8 (Narrowband)

(A2LA Cert. No. 1786.01) Revised 06/24/2021

 Page 1 of 8

<u>Test Technology:</u>	<u>Test Method(s)<sup>1</sup>:</u>
<i>Vehicle Radiated Emissions</i>	CISPR 12; CISPR 36; ICES-002; ECE Regulation 10.06 Annex 5
<i>Bulk Current Injection (BCI)</i>	ISO 11452-4; CS-11979, Section 6.1; CS.00054, Section 5.8.1; GMW 3097, Section 3.4.1; SAE J1113-4; EMC-CS-2009.1 (RI112); FMC1278 (RI112); ECE Regulation 10.06 Annex 9
<i>Radiated Immunity Anechoic (Including Radar Pulse)</i>	ISO 11452-2; ISO 11452-5; CS-11979, Section 6.2; CS.00054, Section 5.8.2; GMW 3097, Section 3.4.2; EMC-CS-2009.1 (RI114); FMC1278 (RI114); SAE J1113-21; ECE Regulation 10.06 Annex 9
<i>Radiated Immunity Magnetic Field</i>	ISO 11452-8
<i>Radiated Immunity Reverb</i>	ISO/IEC 61000-4-21; GMW 3097, Section 3.4.3; EMC-CS-2009.1 (RI114); FMC1278 (RI114); ISO 11452-11
<i>Radiated Immunity (Portable Transmitters)</i>	ISO 11452-9; EMC-CS-2009.1 (RI115); FMC1278 (RI115)
<i>Vehicle Radiated Immunity (ALSE)</i>	ISO 11451-2; ECE Regulation 10.06 Annex 6
<i>Vehicle Product Specific EMC Standards</i>	EN 14982; EN ISO 13309, ISO 13766; EN 50498; EC Regulation No. 2015/208; EN 55012
<i>Electrical Loads</i>	ISO 16750-2
<b>Emissions</b> Radiated and Conducted (3m Semi-anechoic chamber, up to 40 GHz)	47 CFR, FCC Part 15 B (using ANSI C63.4:2014); 47 CFR, FCC Part 18 (using FCC MP-5:1986); ICES-001; ICES-003; ICES-005; IEC/CISPR 11, Ed. 4.1 (2004-06); AS/NZS CISPR 11 (2004); IEC/CISPR 11 Ed 5 (2009-05) + A1 (2010); KN 11 (2008-5) with RRL Notice No. 2008-3 (May 20, 2008); CISPR 11; EN 55011; KS C 9811; CNS 13803 (1997, 2003); CISPR 14-1; EN 55014-1; AS/NZS CISPR 14.1; KS C 9814-1; KN 14-1; IEC/CISPR 22 (1997); EN 55022 (1998) + A1(2000); EN 55022 (1998) + A1(2000) + A2(2003); EN 55022 (2006); IEC/CISPR 22 (2008-09); AS/NZS CISPR 22 (2004); AS/NZS CISPR 22, 3rd Edition (2006); KN 22 (up to 6 GHz); CNS 13438 (up to 6 GHz); VCCI V-3 (up to 6 GHz); CISPR 32; EN 55032; KS C 9832; KN 32; ECE Regulation 10.06 Annex 14
Cellular Radiated Spurious Emissions	ETSI TS 151 010-1 GSM; 3GPP TS 51.010-1, Sec 12; ETSI TS 134 124 UMTS; 3GPP TS 34.124; ETSI TS 136 124 LTE; E-UTRA; 3GPP TS 36.124

<u>Test Technology:</u>	<u>Test Method(s)<sup>1</sup>:</u>
<b>Emissions (cont'd)</b>	
Current Harmonics	IEC 61000-3-2; EN 61000-3-2; KN 61000-3-2; KS C 9610-3-2; ECE Regulation 10.06 Annex 11
Flicker and Fluctuations	IEC 61000-3-3; EN 61000-3-3; KN 61000-3-3; KS C 9610-3-3; ECE Regulation 10.06 Annex 12
<b>Immunity</b>	
Electrostatic Discharge	IEC 61000-4-2, Ed. 1.2 (2001); IEC 61000-4-2 (1995) + A1(1998) + A2(2000); EN 61000-4-2 (1995); EN 61000-4-2 (2009-05); KN 61000-4-2 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); IEC 61000-4-2; EN 61000-4-2; KN 61000-4-2; KS C 9610-4-2; IEEE C37.90.3 2001
Radiated Immunity	IEC 61000-4-3 (1995) + A1(1998) + A2(2000); IEC 61000-4-3, Ed. 3.0 (2006-02); IEC 61000-4-3, Ed. 3.2 (2010); KN 61000-4-3 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); IEC 61000-4-3; EN 61000-4-3; KN 61000-4-3; KS C 9610-4-3; IEEE C37.90.2 2004
Electrical Fast Transient/Burst	IEC 61000-4-4, Ed. 2.0 (2004-07); IEC 61000-4-4, Ed. 2.1 (2011); IEC 61000-4-4 (1995) + A1(2000) + A2(2001); KN 61000-4-4 (2008-5); RRL Notice No. 2008-5 (May 20, 2008); IEC 61000-4-4; EN 61000-4-4; KN 61000-4-4; KS C 9610-4-4; ECE Regulation 10.06 Annex 15
Surge	IEC 61000-4-5 (1995) + A1(2000); IEC 61000-4-5, Ed 1.1 (2005-11); EN 61000-4-5 (1995) + A1(2001); KN 61000-4-5 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); IEC 61000-4-5; EN 61000-4-5; KN 61000-4-5; KS C 9610-4-5; IEEE C37.90.1 2012; IEEE STD C62.41.2 2002; ECE Regulation 10.06 Annex 16
Conducted Immunity	IEC 61000-4-6 (1996) + A1(2000); IEC 61000-4-6, Ed 2.0 (2006-05); IEC 61000-4-6 Ed. 3.0 (2008); KN 61000-4-6 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); EN 61000-4-6 (1996) + A1(2001); IEC 61000-4-6; EN 61000-4-6; KN 61000-4-6; KS C 9610-4-6

<u>Test Technology:</u>	<u>Test Method(s)<sup>1</sup>:</u>
<b>Immunity (cont'd)</b> Power Frequency Magnetic Field Immunity (Down to 3 A/m)	IEC 61000-4-8 (1993) + A1(2000); IEC 61000-4-8 (2009); EN 61000-4-8 (1994) + A1(2000); KN 61000-4-8 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); IEC 61000-4-8; EN 61000-4-8; KN 61000-4-8; KS C 9610-4-8
Voltage Dips, Short Interrupts, and Line Voltage Variations	IEC 61000-4-11, Ed. 2 (2004-03); KN 61000-4-11 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); IEC 61000-4-11; EN 61000-4-11; KN 61000-4-11; KS C 9610-4-11
Ring Wave	IEC 61000-4-12, Ed. 2 (2006-09); EN 61000-4-12:2006; IEC 61000-4-12; EN 61000-4-12; KN 61000-4-12; IEEE STD C62.41.2 2002
Generic and Product Specific EMC Standards	IEC/EN 61000-6-1; AS/NZS 61000-6-1; KN 61000-6-1; KS C 9610-6-1; IEC/EN 61000-6-2; AS/NZS 61000-6-2; KN 61000-6-2; KS C 9610-6-2; IEC/EN 61000-6-3; AS/NZS 61000-6-3; KN 61000-6-3; KS C 9610-6-3; IEC/EN 61000-6-4; AS/NZS 61000-6-4; KN 61000-6-4; KS C 9610-6-4; EN 50130-4; EN 61326-1; EN 50121-3-2; EN 12895; EN 50270; EN 50491-1; EN 50491-2; EN 50491-3; EN 55015; EN 60730-1; EN 60945; IEC 60533; EN 61326-2-6; EN 61800-3; IEC/CISPR 14-2; EN 55014-2; AS/NZS CISPR 14-2; KN 14-2; KS C 9814-2; IEC/CISPR 24; AS/NZS CISPR 24; EN 55024; KN 24; IEC/CISPR 35; AS/NZS CISPR 35; EN 55035; KN 35; KS C 9835; IEC 60601-1-2; JIS T0601-1-2
<b>TxRx EMC Requirements</b>	EN 301 489-1; EN 301 489-3; EN 301 489-9; EN 301 489-17; EN 301 489-19; EN 301 489-20
<b>European Radio Test Standards</b>	ETSI EN 300 086-1; ETSI EN 300 086-2; ETSI EN 300 113-1; ETSI EN 300 113-2; ETSI EN 300 220-1; ETSI EN 300 220-2; ETSI EN 300 220-3-1; ETSI EN 300 220-3-2; ETSI EN 300 330-1; ETSI EN 300 330-2; ETSI EN 300 440-1; ETSI EN 300 440-2; ETSI EN 300 422-1; ETSI EN 300 422-2; ETSI EN 300 328; ETSI EN 301 893; ETSI EN 301 511; ETSI EN 301 908-1; ETSI EN 908-2; ETSI EN 908-13; ETSI EN 303 413; ETSI EN 302 502; EN 303 340; EN 303 345-2; EN 303 345-3; EN 303 345-4

<u>Test Technology:</u>	<u>Test Method(s)<sup>1</sup>:</u>
<i>Canadian Radio Tests</i>	RSS-102 (RF Exposure Evaluation only); RSS-111; RSS-112; RSS-117; RSS-119; RSS-123; RSS-125; RSS-127; RSS-130; RSS-131; RSS-132; RSS-133; RSS-134; RSS-135; RSS-137; RSS-139; RSS-140; RSS-141; RSS-142; RSS-170; RSS-181; RSS-182; RSS-191; RSS-192; RSS-194; RSS-195; RSS-196; RSS-197; RSS-199; RSS-210; RSS-211; RSS-213; RSS-215; RSS-216; RSS-220; RSS-222; RSS-236; RSS-238; RSS-243; RSS-244; RSS-247; RSS-251; RSS-252; RSS-287; RSS-288; RSS-310; RSS-GEN
<i>Mexico Radio Tests</i>	IFT-008-2015; NOM-208-SCFI-2016
<i>Japan Radio Tests</i>	Radio Law No. 131, Ordinance of MPT No. 37, 1981, MIC Notification No. 88:2004, Table No. 22-11; ARIB STD-T66, Regulation 18
<i>Taiwan Radio Tests</i>	LP-0002 (July 15, 2020)
<i>Australia/New Zealand Radio Tests</i>	AS/NZS 4268; Radiocommunications (Short Range Devices) Standard (2014)
<i>Hong Kong Radio Tests</i>	HKCA 1039 Issue 6; HKCA 1042; HKCA 1033 Issue 7; HKCA 1061; HKCA 1008; HKCA 1043; HKCA 1057; HKCA 1073
<i>Korean Radio Test Standards</i>	KN 301 489-1; KN 301 489-3; KN 301 489-9; KN 301 489-17; KN 301 489-52; KS X 3124; KS X 3125; KS X 3130; KS X 3126; KS X 3129
<i>Vietnam Radio Test Standards</i>	QCVN 47:2015/BTTTT; QCVN 54:2020/BTTTT; QCVN 55:2011/BTTTT; QCVN 65:2013/BTTTT; QCVN 73:2013/BTTTT; QCVN 74:2020/BTTTT; QCVN 112:2017/BTTTT; QCVN 117:2020/BTTTT
<i>Vietnam EMC Test Standards</i>	QCVN 18:2014/BTTTT; QCVN 86:2019/BTTTT; QCVN 96:2015/BTTTT; QCVN 118:2018/BTTTT
<i>Unlicensed Radio Frequency Devices (3 Meter Semi-Anechoic Room)</i>	47 CFR FCC Part 15C, 15D, 15E, 15F, 15G, 15H (using ANSI C63.10:2013, ANSI C63.17:2013 and FCC KDB 905462 D02 (v02))
<i>Licensed Radio Service Equipment</i>	47 CFR FCC Parts 20, 22, 24, 25, 27, 30, 73, 74, 80, 87, 90, 95, 96, 97, 101 (using ANSI/TIA-603-E, TIA-102.CAAA-E, ANSI C63.26:2015)

Test Technology:

**OIA (Over the Air) Performance**  
 GSM, GPRS, EGPRS  
 UMTS (W-CDMA)  
 LTE including CAT M1  
 A-GPS for UMTS/GSM  
 LTS A-GPS, A-GLONASS,  
 SIB8/SIB16  
 Large Device/Laptop/Tablet Testing  
 Integrated Device Testing  
 WiFi 802.11 a/b/g/n/a

Test Method(s)<sup>1</sup>:

CTIA Test Plan for Wireless Device Over-the-Air Performance (Method for Measurement for Radiated Power and Receiver Performance) V3.8.2;  
 CTIA Test Plan for RF Performance Evaluation of WiFi Mobile Converged Devices V2.1.0

Electrical Measurements and Simulation
AC Voltage / Current

(1mV to 5kV) 60 Hz  
 (0.1V to 250V) up to 500 MHz  
 (1µA to 150A) 60 Hz

FAA AC 150/5345-10H  
 FAA AC 150/5345-43J  
 FAA AC 150/5345-44K

DC Voltage / Current

(1mV to 15-kV) / (1µA to 10A)

FAA AC 150/5345-46E  
 FAA AC 150/5345-47C

Power Factor / Efficiency / Crest Factor

(Power to 30kW)

FAA EB 67D

Resistance

(1mΩ to 4000MΩ)

Surge

(Up to 10 kV / 5 kA) (Combination Wave and Ring Wave)

On the following products and materials:

Telecommunications Terminal Equipment (TTE), Radio Equipment, Network Equipment, Information Technology Equipment (ITE), Automotive Electronic Equipment, Automotive Hybrid Electronic Devices, Maritime Navigation and Radio Communication Equipment and Systems, Vehicles, Boats and Internal Combustion Engine Driven Devices, Automotive, Aviation, and General Lighting Products, Medical Electrical Equipment, Motors, Industrial, Scientific and Medical (ISM) Radio-Frequency Equipment, Household Appliances, Electric Tools, Low-voltage Switchgear and Control gear, Programmable Controllers, Electrical Equipment for Measurement, Control and Laboratory Use, Base Materials, Power and Data Transmission Cables and Connectors

<sup>1</sup> When the date, edition, version, etc. is not identified in the scope of accreditation, laboratories may use the version that immediately precedes the current version for a period of one year from the date of publication of the standard measurement method, per part C., Section 1 of A2LA *R101 - General Requirements- Accreditation of ISO-IEC 17025 Laboratories*.

Testing Activities Performed in Support of FCC Certification in Accordance with 47 Code of Federal Regulations and FCC KDB 974614, Appendix A, Table A.1<sup>2</sup>

Rule Subpart/Technology	Test Method	Maximum Frequency (MHz)
<u>Unintentional Radiators</u> Part 15B	ANSI C63.4:2014	40000

Testing Activities Performed in Support of FCC Certification in Accordance with 47 Code of Federal Regulations and FCC KDB 974614, Appendix A, Table A.1<sup>2</sup>

Rule Subpart/Technology	Test Method	Maximum Frequency (MHz)
<u>Industrial, Scientific, and Medical Equipment</u> Part 18	FCC MP-5 (February 1986)	40000
<u>Intentional Radiators</u> Part 15C	ANSI C63.10:2013	40000
<u>Unlicensed Personal Communication Systems Devices</u> Part 15D	ANSI C63.17:2013	40000
<u>U-NII without DFS Intentional Radiators</u> Part 15E	ANSI C63.10:2013	40000
<u>U-NII with DFS Intentional Radiators</u> Part 15E	FCC KDB 905462 D02 (v02)	40000
<u>UWB Intentional Radiators</u> Part 15F	ANSI C63.10:2013	40000
<u>BPL Intentional Radiators</u> Part 15G	ANSI C63.10:2013	40000
<u>White Space Device Intentional Radiators</u> Part 15H	ANSI C63.10:2013	40000
<u>Commercial Mobile Services (FCC Licensed Radio Service Equipment)</u> Parts 22 (cellular), 24, 25 (below 3 GHz), and 27	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>General Mobile Radio Services (FCC Licensed Radio Service Equipment)</u> Parts 22 (non-cellular), 90 (below 3 GHz), 95, 97, and 101 (below 3 GHz)	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>Citizens Broadband Radio Services (FCC Licensed Radio Service Equipment)</u> Part 96	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000

Testing Activities Performed in Support of FCC Certification in Accordance with 47 Code of Federal Regulations and FCC KDB 974614, Appendix A, Table A.1<sup>2</sup>

Rule Subpart/Technology	Test Method	Maximum Frequency (MHz)
<u>Maritime and Aviation Radio Services</u> Parts 80 and 87	ANSI/TIA-603-E; ANSI C63.26:2015	40000
<u>Microwave and Millimeter Bands Radio Services</u> Parts 25, 30, 74, 90 (above 3 GHz), 97 (above 3 GHz), and 101	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>Broadcast Radio Services</u> Parts 73 and 74 (below 3 GHz)	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>Signal Boosters</u> Part 20 (Wideband Consumer Signal Boosters, Provider-specific signal boosters, and Industrial Signal Boosters) Section 90.219	ANSI C63.26:2015	40000

<sup>2</sup> Accreditation does not imply acceptance to the FCC equipment authorization program. Please see the FCC website (<https://apps.fcc.gov/oetcf/eas/>) for a listing of FCC approved laboratories.



## Accredited Laboratory

A2LA has accredited

### ELITE ELECTRONIC ENGINEERING INC.

Downers Grove, IL

for technical competence in the field of

#### Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 *General requirements for the competence of testing and calibration laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 19<sup>th</sup> day of May 2021.



Vice President, Accreditation Services  
For the Accreditation Council  
Certificate Number 1786.01  
Valid to June 30, 2023

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.