

TEST REPORT

ELETTRONIKA S. r. l. CAV5U TV TRANSMITTER

TECHNICAL REPORT

INTRODUCTION

The following information is provided to support the technical performance of the ELETTRONIKA S. r. l. CAV5U TV Transmitter. The information is supplied for broadcast TV service according to applicable portions of FCC rules contained in Part 2, Part 73, and Part 74.

1. Power Output Measurements as indicated by FCC Rule Part 2.1046.
2. Frequency Measurements as identified by FCC Rule Part 2.1055.
3. Visual Frequency response measurements of the transmitter to be within the window specified by FCC Rule Part 74.750.
4. Occupied BW of aural signal specified by FCC Rule Part 2.1079.
5. Aural frequency response as identified by FCC Rule Part 73.687
6. Measurement of conducted harmonics and spurs +/- 3 MHz outside of channel as specified by FCC Rule Part 74.750 and Part 2 Rule 2.1051.
7. Measurement of cabinet radiation of spurs and harmonics as specified in FCC Rule 2.1053 and 2.1057.
8. Measurements of voltage and current to final amp stage as outlined in FCC Rule 2.1033.

Measurements were conducted at transmitter visual power output levels of 5.0 watts peak of sync and 1.25 watts peak of sync and constitute the range of power for which type certification is sought. The corresponding aural power levels are 0.5 watts and 0.13 watts. Measurements were taken on a unit with visual carrier frequency of 753.25 MHz and an aural carrier frequency of 757.75 MHz.

All test equipment was calibrated prior to the use of the equipment by the supplier of the test equipment.

RF POWER OUTPUT

The equipment was configured as below shown in Figure 1. The loss through the RF output cable, and attenuator was calibrated at the frequency of 753.25 MHz. In this case, the Bird 4391 wattmeter was inserted before the attenuator to permit power measurements to be made. The video generator was configured to produce a signal with 0 IRE video and sync. The audio generator and aural carrier were not energized. The visual portion of the transmitter was energized and the power was increased to the desired output power. The power was read on the Bird wattmeter. The TV demodulator and VM-700 were used to verify that sync compression was not causing distortion of the measurement. The aural carrier was energized and its output level was then raised to meet the precise 10 dB Visual/aural power ratio as observed on the spectrum analyzer.

POWER OUTPUT

Bird Power Meter reading
at high power= 3.0 watts

Peak of sync power = 1.68 times
average power reading with a black
picture and "0" setup


Peak of sync power = 3.0×1.68
= 5.0 watts

Bird Power Meter reading
at low power= 0.75 watts


Peak of sync power = 1.68 times
average power reading with a black
picture and "0" setup

Peak of sync power = 0.75×1.68
= 1.26 watts


TEST EQUIPMENT CONFIGURATION

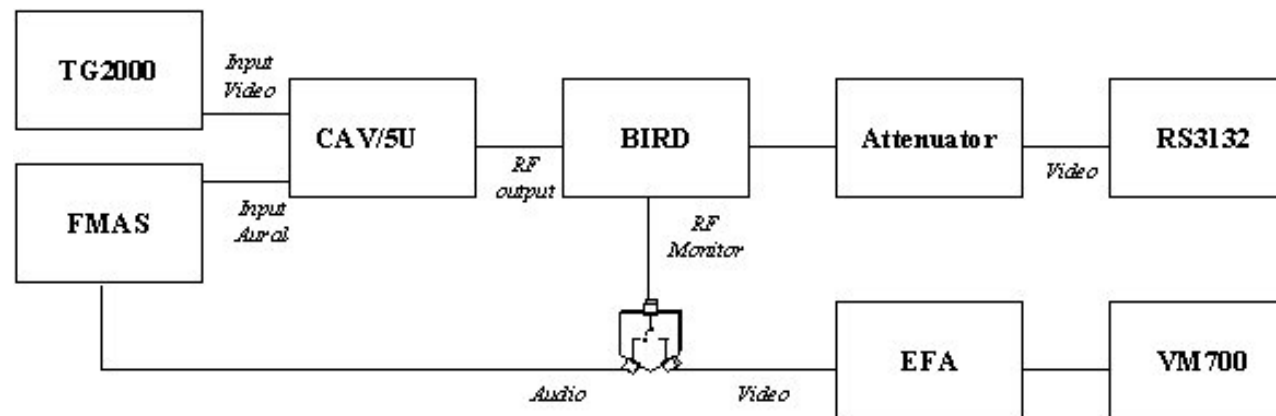

**TWO FIELDS SHOWING CORRECT MODULATION DEPTH FOR
REFERENCE WHITE & SYNC LEVELS AT 5.0 WATTS AND AT
1.25 WATTS**

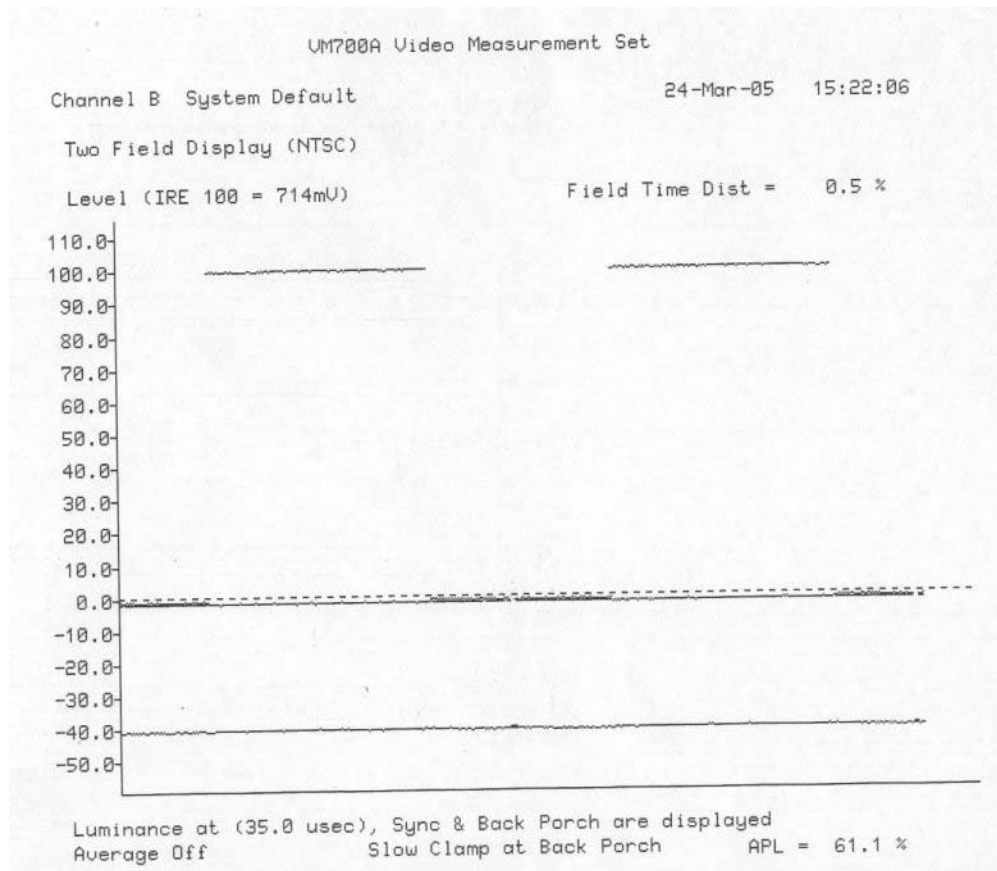

Power Output = 5.0 watts

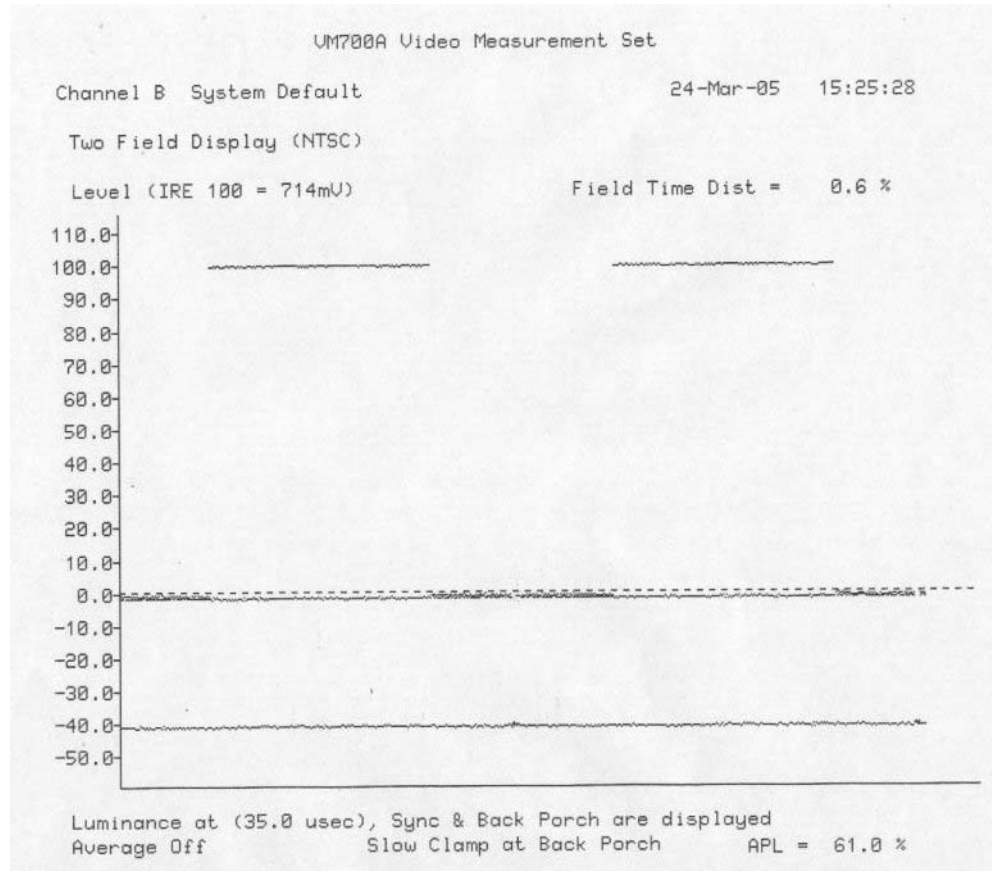

Power Output = 1.25 watts