



**CONFORMANCE TEST REPORT  
FOR  
FCC 47 CFR, Part 15 Subpart C  
and  
Canada RSS-210**

**Report No.: 09-06-MAS-244-02**

Client: Ezurio Limited.  
Product: Bluetooth Multi-Media Module  
Model: BTM521  
FCC ID: PI4520B  
IC ID: 1931B-BTM520  
Manufacturer/supplier: Aerocomm Inc

Date test item received: 2009/06/18

Date test campaign completed: 2009/06/18

Date of issue: 2009/08/27

**The test result only corresponds to the tested sample. It is not permitted to copy this report, in part or in full, without the permission of the test laboratory.**

*Total number of pages of this test report: 76 pages*

*Total number of pages of photos: External photos 1 pages*

*Internal photos 4 pages*

*Setup photos 2 pages*

Test Engineer	Checked By	Approved By
 Ivan Tsai	 James Cheng	 Joe Hsieh

ELECTRONICS TESTING CENTER, TAIWAN  
NO.8, LANE 29, WENMING RD.,  
LESHAN TSUEN, GUISHAN SHIANG,  
TAOYUAN COUNTY, TAIWAN 33383,  
R.O.C.TAIWAN, R.O.C.

TEL: (03) 3276170~4  
INT: +886-3-3276170~4  
FAX: (03) 3276188  
INT: +886-3-3276188



Client : Ezurio Limited.  
Address : Saturn House, Mercury Park, Wycombe Lane, Wooburn Green HP10 0HH UK  
Manufacturer : Aerocomm Inc  
Address : 11160 Thompson Ave Lenexa, KS 66219  
EUT : Bluetooth Multi-Media Module  
Trade name : EZURiO  
Model No. : BTM521  
Power Source : DC 4.2V (From Notebook PC to Test Jig)  
Regulations applied : FCC 47 CFR, Part 15 Subpart C (2008)

Canada RSS-210 Issue 7 (2007) / RSS-Gen Issue 2 (2007)

The testing described in this report has been carried out to the best of our knowledge and ability, and our responsibility is limited to the exercise of reasonable care. This certification is not intended to relieve the sellers from their legal and/or contractual obligations.

The compliance test is only certified for the test equipment and the results of the testing report relate only to the item tested. The compliance test of this report was conducted in accordance with the appropriate standards. It's not intention to assure the quality and performance of the product. This report shall not be reproduced except in full, without the approval of ETC. This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

Laboratory Introduction: Electronics Testing Center, Taiwan is recognized, filed and mutual recognition arrangement as following:

- ① ISO9001: TÜV Product Service
- ② ISO/IEC 17025: BSMI, CNLA, NCC, NVLAP, CCIBLAC, UL, Compliance
- ③ Filing: FCC, Industry Canada, VCCI
- ④ MRA: Australia, Hong Kong, New Zealand, Singapore, USA, Japan, Korea, China, APLAC through TAF
- ⑤ FCC Registration Number: 90588, 91094, 91095



NVLAP Lab Code 200133-0

## Table of Contents

	Page
<b>1 GENERAL INFORMATION .....</b>	<b>5</b>
1.1 Product Description.....	5
1.2 Characteristics of Device .....	5
1.3 Test Methodology .....	5
1.4 Modification List of EUT .....	5
1.5 Test Facility.....	5
1.6 Test Summary .....	5
<b>2 PROVISIONS APPLICABLE .....</b>	<b>6</b>
2.1 Definition .....	6
2.2 Requirement for Compliance .....	7
2.3 Restricted Bands of Operation .....	9
2.4 Labeling Requirement.....	9
2.5 User Information .....	10
<b>3. SYSTEM TEST CONFIGURATION .....</b>	<b>11</b>
3.1 Justification .....	11
3.2 Devices for Tested System.....	11
<b>4 RADIATED EMISSION MEASUREMENT .....</b>	<b>12</b>
4.1 Applicable Standard.....	12
4.2 Measurement Procedure.....	12
4.3 Measuring Instrument .....	14
4.4 Radiated Emission Data .....	15
4.5 Field Strength Calculation .....	21
<b>5 CONDUCTED EMISSION MEASUREMENT .....</b>	<b>22</b>
<b>6 ANTENNA REQUIREMENT .....</b>	<b>23</b>
6.1 Standard Applicable.....	23
6.2 Antenna Construction and Directional Gain.....	23
<b>7 20dB EMISSION BANDWIDTH MEASUREMENT .....</b>	<b>24</b>
7.1 Standard Applicable.....	24
7.2 Measurement Procedure.....	24
7.3 Measurement Equipment .....	24
7.4 Measurement Data .....	25
<b>8 OUTPUT POWER MEASUREMENT .....</b>	<b>33</b>
8.1 Standard Applicable.....	33
8.2 Measurement Procedure.....	33

8.3 Measurement Equipment .....	33
8.4 Measurement Data .....	34
<b>9 OUT-OF-BAND RF CONDUCTED SPURIOUS EMISSION MEASUREMENT .....</b>	<b>42</b>
9.1 Standard Applicable .....	42
9.2 Measurement Procedure .....	42
9.3 Measurement Equipment .....	42
9.4 Measurement Data .....	43
<b>10 NUMBER OF HOPPING CHANNELS.....</b>	<b>55</b>
10.1 Standard Applicable .....	55
10.2 Measurement Procedure .....	55
10.3 Measurement Equipment .....	55
10.4 Measurement Data .....	55
<b>11 HOPPING CHANNEL CARRIER FREQUENCY SEPARATED.....</b>	<b>63</b>
11.1 Standard Applicable .....	63
11.2 Measurement Procedure .....	63
11.3 Measurement Equipment .....	63
11.4 Measurement Data .....	64
<b>12 DWELL TIME.....</b>	<b>68</b>
12.1 Standard Applicable .....	68
12.2 Measurement Procedure .....	68
12.3 Measurement Equipment .....	68
12.4 Measurement Data .....	68

## 1 GENERAL INFORMATION

### 1.1 Product Description

- a) Type of EUT : Bluetooth Multi-Media Module
- b) Trade Name : EZURiO
- c) Model No. : BTM521

### 1.2 Characteristics of Device

The EUT is a Bluetooth Multi-Media Module based on the Bluetooth technology. Bluetooth is a short-range radio link intended to be a cable replacement between portable or fixed electronic devices. Bluetooth operates in the unlicensed ISM Band at 2.4GHz. In this band, 79 RF channels spaced 1MHz apart are defined. The rated output power is 3.68 dBm ( 2.33 mW).

### 1.3 Test Methodology

All testing were performed according to the procedures in ANSI C63.4 (2003) an FCC CFR 47 Part 2 and Part 15.

### 1.4 Modification List of EUT

N/A

### 1.5 Test Facility

The semi-anechoic chamber and conducted measurement facility used to collect the radiated and conducted data are located inside the Building at No.8, Lane 29, Wen-ming Road, Lo-shan Tsun, Kweishan Hsiang, Taoyuan, Taiwan, R.O.C.

This site has been accreditation as a FCC filing site.

### 1.6 Test Summary

Requirement	FCC Paragraph #	IC Paragraph #	Test Pass
Radiated Emission	15.247 (c)	RSS-210_2.2	<input checked="" type="checkbox"/>
Conducted Emission	15.207	RSS-Gen_7.2.2	N/A
Antenna Requirement	15.203	RSS-Gen_7.1.4	<input checked="" type="checkbox"/>
20dB Emission Bandwidth	15.247 (a)(1)	RSS-210_A8.1(a)	<input checked="" type="checkbox"/>
Output Power	15.247 (b)(1)	RSS-210_A8.4(2)	<input checked="" type="checkbox"/>
OUT-OF-BAND RF Conducted Spurious Emission	15.247 (c)	RSS-210_A8.5	<input checked="" type="checkbox"/>
Number of Hopping Channels	15.247 (b)(1)	RSS-210_A8.4(2)	<input checked="" type="checkbox"/>
Hopping Channel Carrier Frequency Separated	15.247 (a)(1)	RSS-210_A8.1(a)	<input checked="" type="checkbox"/>
Dwell Time	15.247 (a)(1)(iii)	RSS-210_A8.1(d)	<input checked="" type="checkbox"/>

## 2 PROVISIONS APPLICABLE

### 2.1 Definition

#### **Unintentional radiator:**

A device that intentionally generates and radio frequency energy for use within the device, or that sends radio frequency signals by conduction to associated equipment via connecting wiring, but which is not intended to emit RF energy by radiation or induction.

#### Class A Digital Device:

A digital device which is marketed for use in commercial or business environment; exclusive of a device which is market for use by the general public, or which is intended to be used in the home.

#### Class B Digital Device :

A digital device which is marketed for use in a residential environment notwithstanding use in a commercial, business or industrial environment. Example of such devices that are marketed for the general public.

Note : A manufacturer may also qualify a device intended to be marketed in a commercial, business, or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

#### **Intentional radiator:**

A device that intentionally generates and emits radio frequency energy by radiation or induction.

## 2.2 Requirement for Compliance

### (1) Conducted Emission Requirement

For unintentional device, according to §15.107(a) Line Conducted Emission Limits is as following:

Frequency MHz	Quasi Peak dB $\mu$ V	Average dB $\mu$ V
0.15 - 0.5	66-56*	56-46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

\*Decreases with the logarithm of the frequency.

For intentional device, according to §15.207(a) Line Conducted Emission Limits is same as above table.

### (2) Radiated Emission Requirement

For unintentional device, according to §15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency MHz	Distance Meters	Radiated dB $\mu$ V/m	Radiated $\mu$ V/m
30 - 88	3	40.0	100
88 - 216	3	43.5	150
216 - 960	3	46.0	200
above 960	3	54.0	500

For intentional device, according to §15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

### (3) Antenna Requirement

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

#### **(4) 20dB Bandwidth Requirement**

For frequency hopping systems, according to 15.247(a)(1), hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of hopping channel, whichever is greater.

#### **(5) Output Power Requirement**

For frequency hopping systems, according to 15.247(1), operating in the 2400-2483.5MHz band employing at least 75 hopping channels. The maximum peak output power of the transmitter shall not exceed 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **(6) 100 kHz Bandwidth of Frequency Band Edges Requirement**

According to 15.247(c), if any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in §15.209(a), whichever results in the lesser attenuation.

#### **(7) Number of Hopping Channels**

According to 15.247(b)(1), for frequency hopping systems, operating in the 2400-2483.5MHz band employing at least 75 hopping channels.

#### **(8) Channel Carrier Frequencies Separation**

According to 15.247(a)(1)(iii), the frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25kHz or the 20dB bandwidth of hopping channel, whichever is greater.

#### **(9) Dwell Time**

According to 15.247(a)(1)(iii), frequency hopping system in the 2400-2483.5MHz band employing at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 second multiplied by the number of hopping channels employed.

#### **(10) Power Spectral Density**

According to 15.247(d), for bluetooth device, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

## 2.3 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42-16.423	399.9-410	4.5-5.25
0.495 - 0.505 **	16.69475 - 16.69525	608-614	5.35-5.46
2.1735 - 2.1905	16.80425 - 16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475 - 156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

\*\* : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

## 2.4 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device :

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

## 2.5 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual.

The Federal Communications Commission Radio Frequency Interference Statement includes the following paragraph.

This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

To comply with the FCC RF exposure compliance requirement, this device and its antenna must not be co-located or operating to conjunction with any other antenna or transmitter.

### 3. SYSTEM TEST CONFIGURATION

#### 3.1 Justification


For the purposes of this test report ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT during the test. Notebook PC was used to control the RF channel under the highest, middle and lowest frequency and transmit the maximum RF power. Customer would not use it. But nevertheless ancillary equipment can influence the test results..

#### 3.2 Devices for Tested System

Device	Manufacture	Model	Cable Description
* Bluetooth Multi-Media Module	Aerocomm Inc	BTM521	----
Notebook PC	HP	nx6320	3.1m*1, Unshielded Power Line 1.8m*1, Unshielded Signal Line
Test Jig	N/A	N/A	1.5m Unshielded Signal Line/USB 1.2m Unshielded Signal Line/RS232

##### Remark

1. “\*” means equipment under test.

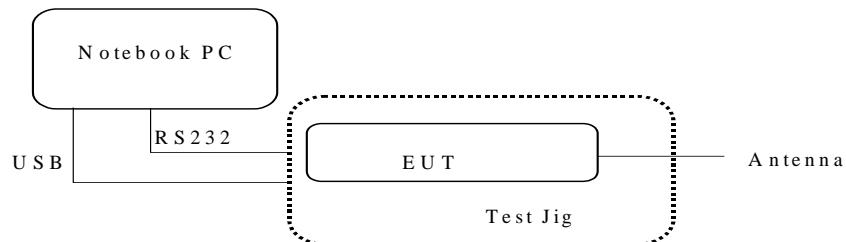

2. Software setting: Bluetest .exe
3. Power setting (Ext, Int): (255,58)

## 4 RADIATED EMISSION MEASUREMENT

### 4.1 Applicable Standard

For unintentional radiator, the radiated emission shall comply with §15.109(a).

For intentional radiators, according to §15.247 (a), operation under this provision is limited to frequency hopping and digitally modulated, and the out band emission shall be comply with § 15.247 (c)

### 4.2 Measurement Procedure

1. Setup the configuration per figure 1 and 2 for frequencies measured below and above 1 GHz respectively. Turn on EUT and make sure that it is in continuous operating function.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a semi-anechoic chamber to determine the accurate frequencies of higher emissions and then each selected frequency is precisely measured. As the same purpose, for emission measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission measured below and above 1 GHz, set the spectrum analyzer on a 120 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.

Figure 1 : Frequencies measured below 1 GHz configuration


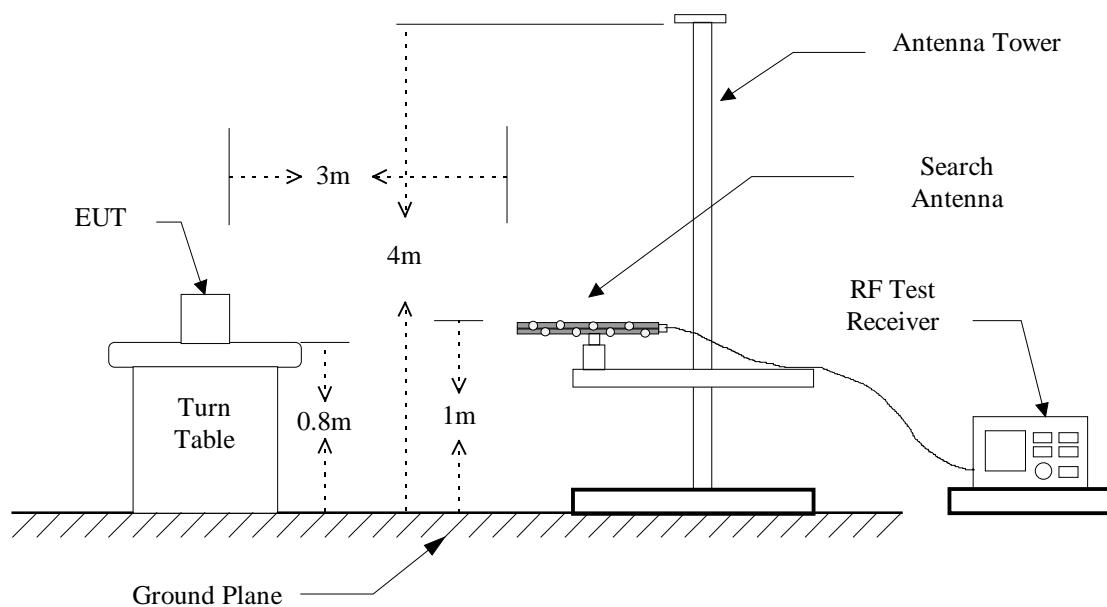


Figure 2 : Frequencies measured above 1 GHz configuration

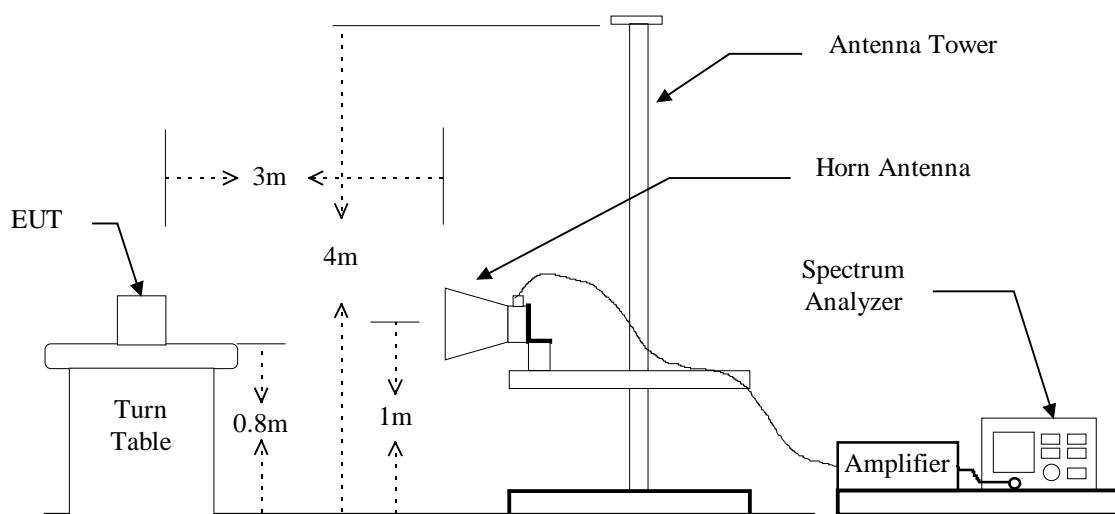

## 4.3 Measuring Instrument

The following instrument are used for radiated emissions measurement :

Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
EMI Receiver	R&S	ESIB7	13054414-001	07/19/2010
BiLog Antenna	Schaffner	CBL 6112B	2927	08/18/2010
Horn Antenna	EMCO	3115	9107-3729	12/07/2009
PRE-Amplifier	Agilent	8449B	3008A01648	10/08/2009
Spectrum Analyzer	R&S	FSU46	13040904-001	11/24/2009
Spectrum Analyzer	Agilent	8564EC	4123A00585	10/13/2009

Measuring instrument setup in measured frequency band when specified detector function is used :

Frequency Band (MHz)	Instrument	Function	Resolution Bandwidth	Video Bandwidth
30 to 1000	RF Test Receiver	Quasi-Peak	120 kHz	300 kHz
	RF Test Receiver	Peak	120 kHz	300 kHz
Above 1000	Spectrum Analyzer	Peak	1 MHz	1 MHz
	Spectrum Analyzer	Average	1 MHz	10 Hz

## 4.4 Radiated Emission Data

### 4.4.1 RF Portion

#### 4.4.1.1 Operation Mode: GFSK

##### a) Channel 0

Operation Mode : Transmitting

Fundamental Frequency : 2402 MHz

Test Date : Jun. 18, 2009      Temperature : 28°C      Humidity : 68%

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)	
	H		V			Peak	Ave	Peak	Ave
4804.000	---	---	---	---	0.6	---	---	74.0	54.0
7206.000	---	---	---	---	2.2	---	---	74.0	54.0
9608.000	---	---	---	---	2.6	---	---	74.0	54.0

##### b) Channel 39

Fundamental Frequency : 2441 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)	
	H		V			Peak	Ave	Peak	Ave
4882.000	---	---	---	---	0.5	---	---	74.0	54.0
7323.000	---	---	---	---	2.9	---	---	74.0	54.0
9764.000	---	---	---	---	4.2	---	---	74.0	54.0

##### c) Channel 78

Fundamental Frequency : 2480 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)	
	H		V			Peak	Ave	Peak	Ave
4960.000	---	---	---	---	0.5	---	---	74.0	54.0
7440.000	---	---	---	---	2.9	---	---	74.0	54.0
9920.000	---	---	---	---	4.2	---	---	74.0	54.0
14880.000	---	---	---	---	3.1	---	---	74.0	54.0
17360.000	---	---	---	---	6.3	---	---	74.0	54.0

Note :

1. Item of margin shown in above table refer to average limit.
2. Remark “---” means that the emissions level is too low to be measured.
3. Item “Margin” referred to Average limit while there is only peak result.
4. The radiation emissions have been measured to beyond the tenth harmonic of the fundamental frequency and show the significant frequencies, other means the value is too low to be detected.

#### 4.4.1.2 Operation Mode: 8DPSK

##### b) Channel 0

Operation Mode : Transmitting

Fundamental Frequency : 2402 MHz

Test Date : Jun. 18, 2009      Temperature : 28°C      Humidity : 68%

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)	
	H		V			Peak	Ave	Peak	Ave
4804.000	---	---	---	---	0.6	---	---	74.0	54.0
7206.000	---	---	---	---	2.2	---	---	74.0	54.0
9608.000	---	---	---	---	2.6	---	---	74.0	54.0

##### b) Channel 39

Fundamental Frequency : 2441 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)	
	H		V			Peak	Ave	Peak	Ave
4882.000	---	---	---	---	0.5	---	---	74.0	54.0
7323.000	---	---	---	---	2.9	---	---	74.0	54.0
9764.000	---	---	---	---	4.2	---	---	74.0	54.0

##### c) Channel 78

Fundamental Frequency : 2480 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)	
	H		V			Peak	Ave	Peak	Ave
4960.000	---	---	---	---	0.5	---	---	74.0	54.0
7440.000	---	---	---	---	2.9	---	---	74.0	54.0
9920.000	---	---	---	---	4.2	---	---	74.0	54.0
14880.000	---	---	---	---	3.1	---	---	74.0	54.0
17360.000	---	---	---	---	6.3	---	---	74.0	54.0


Note :

1. Item of margin shown in above table refer to average limit.
2. Remark “---” means that the emissions level is too low to be measured.
3. Item “Margin” referred to Average limit while there is only peak result.
4. The radiation emissions have been measured to beyond the tenth harmonic of the fundamental frequency and show the significant frequencies, other means the value is too low to be detected.

#### 4.4.2 Other Emission

##### A. below 1GHz

File: 520 Data: #35 Date: 2009/6/18 Temperature: 28 °C  
Time: PM 07:07:14 Humidity: 68 %

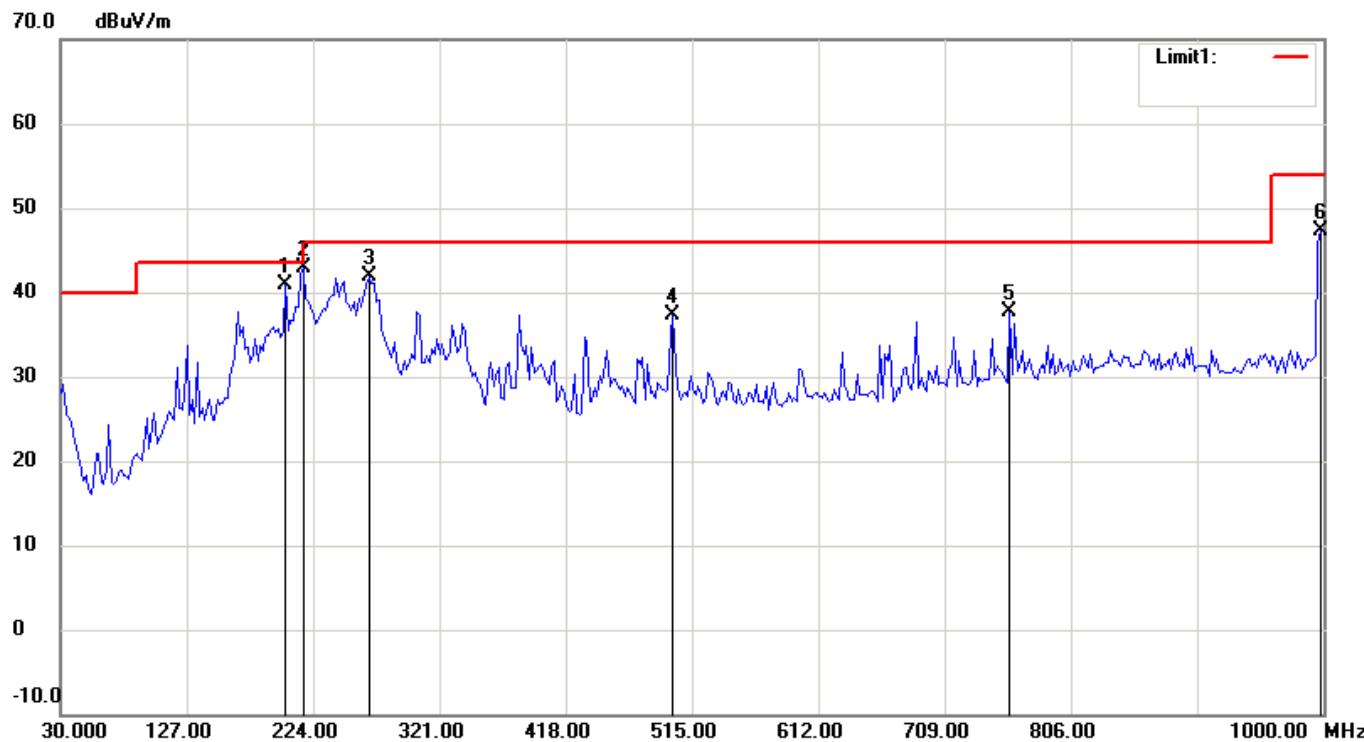

Condition: FCC Part 15B Class B Polarization: Horizontal

EUT: Distance: 3m

Model:

Test Mode:

No.	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Height	Degree
	(MHz)	(dBuV/m)		Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)
1	203.0060	26.05	peak	14.94	40.99	43.50	-2.51	254	330
2	216.6132	27.66	peak	15.23	42.89	46.00	-3.11	254	223
3	267.1543	23.70	peak	18.18	41.88	46.00	-4.12	254	325
4	500.4208	13.68	peak	23.66	37.34	46.00	-8.66	254	208
5	758.9579	11.30	peak	26.31	37.61	46.00	-8.39	254	77
6	998.0561	19.06	peak	28.29	47.35	54.00	-6.65	254	129

File: 520


Data: #36

Date: 2009/6/18

Temperature: 28 °C

Time: PM 07:08:47

Humidity: 68 %

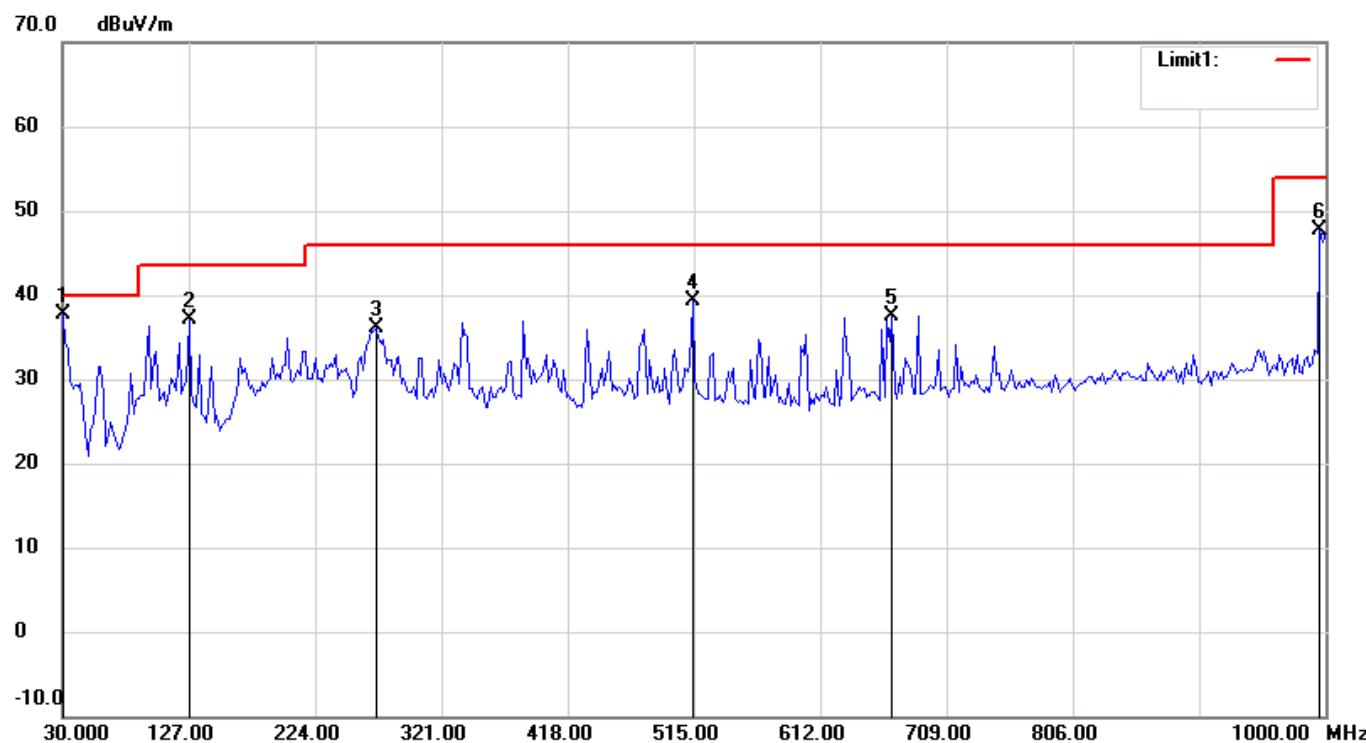

Condition: FCC Part 15B Class B

Polarization:

Vertical

EUT:

Distance:

3m

Model:

Test Mode:

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	30.0000	13.76	peak	23.97	37.73	40.00	-2.27	254	21
2	127.1944	19.28	peak	17.73	37.01	43.50	-6.49	254	37
3	271.0421	17.96	peak	18.19	36.15	46.00	-9.85	254	330
4	514.0281	15.56	peak	23.66	39.22	46.00	-6.78	254	39
5	667.5952	12.10	peak	25.41	37.51	46.00	-8.49	254	300
6	996.1122	19.40	peak	28.25	47.65	54.00	-6.35	254	333

**B. above 1GHz**

Frequency (MHz)	Ant Pol H / V	Reading (dBuV) Peak	Correct Factor (dB)	Duty Factor (dB)	Result @3m (dBuV/m) Peak AVG	Limit @3m (dBuV/m) Peak AVG	Margins (dB)
Radiated emission frequencies above 1 GHz to 12.5 GHz were too low to be measured.							

Note:

1. Place of Measurement: Measuring site of the ETC.
2. If the data table appeared symbol of "\*\*\*\*" means the value was too low to be measured.
3. The estimated measurement uncertainty of the result measurement is  
±4.6dB (30MHz≤f<300MHz).  
±4.4dB (300MHz≤f<1000MHz).  
±4.1dB (1GHz≤f≤18GHz).  
±4.4dB (18GHz<f≤40GHz).

4 Remark “---” means that the emissions level is too low to be measured.

#### 4.4.3 Radiated Measurement at Bandedge with Fundamental Frequencies

##### 4.4.3.1 Operation Mode: GFSK

(A)

Channel 0

Operation Mode : Transmitting

Fundamental Frequency : 2402 MHz

Test Date : Jun. 18, 2009      Temperature : 28°C      Humidity : 68%

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)			
	H		V			Peak	Ave	Peak	Ave	(H/V Max.)	Peak
2390.000	24.87	14.62	26.20	16.80	30.3	56.50	47.10	74.0	54.0		

Note:

The result is the highest value of radiated emission from restrict band of 2310 ~2390 MHz.

(B)

Channel 78

Operation Mode : Transmitting

Fundamental Frequency : 2480 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)			
	H		V			Peak	Ave	Peak	Ave	(H/V Max.)	Peak
2483.500	24.72	14.31	26.54	15.34	30.3	56.84	45.64	74.0	54.0		

Note:

The result is the highest value of radiated emission from restrict band of 2483.5 ~2500 MHz.

#### 4.4.3.2 Operation Mode: 8DPSK

(A)

Channel 0

Operation Mode : Transmitting

Fundamental Frequency : 2402 MHz

Test Date : Jun. 18, 2009

Temperature : 28°C

Humidity : 68%

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)	
	H		V			Peak	Ave	Peak	Ave.
2390.000	25.10	14.49	26.41	16.54	30.3	56.71	46.84	74.0	54.0

Note:

The result is the highest value of radiated emission from restrict band of 2310 ~2390 MHz.

(B)

Channel 78

Operation Mode : Transmitting

Fundamental Frequency : 2480 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)	
	H		V			Peak	Ave	Peak	Ave.
2483.500	24.91	14.65	26.33	15.31	30.3	56.63	45.61	74.0	54.0

Note:

The result is the highest value of radiated emission from restrict band of 2483.5 ~2500 MHz.

## 4.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, High Pass Filter Loss(if used) and Cable Loss, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

where

$$\text{Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

## 5 CONDUCTED EMISSION MEASUREMENT

This EUT is excused from investigation of conducted emission, for it is powered by battery only. According to §15.207 (d), measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

## 6 ANTENNA REQUIREMENT

### 6.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to §15.247 (b), if Receiving antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 6.2 Antenna Construction and Directional Gain

The antennas is a Bluetooth chip antenna. The peak gain of antenna used is 2 dBi.

## 7 20dB EMISSION BANDWIDTH MEASUREMENT


### 7.1 Standard Applicable

According to 15.247(a)(1), for frequency hopping systems, hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of hopping channel, whichever is greater.

### 7.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. The setup of the EUT as shown in figure 3. Turn on the EUT and connect it to measurement instrument. Then set it to any convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Figure 3: Emission bandwidth measurement configuration.

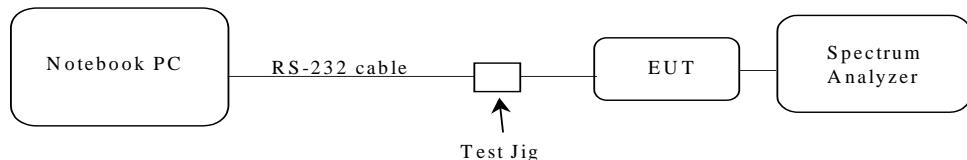

### 7.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	Agilent	E4446A	09/30/2009

## 7.4 Measurement Data

### 7.4.1 Operation Mode: GFSK

Test Date : Jun. 12, 2009

Temperature : 28°C

Humidity : 59%

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	Chart
0	2402	0.88	Page 26
39	2441	0.84	Page 27
78	2480	0.84	Page 28

*Note: Please refer to page 26 to page 28 for chart.*

File: BTM520 Data: #3 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 01:27:35 Humidity: 59 %




Condition: -17.93dBm Horizontal  
EUT: Bluetooth Module Sweep Time: 3.2ms Att.: 20dB  
Model: BTM521 RBW: 30 KHz VBW: 100 KHz  
Test Mode:  
Note: FCC-Bluetooth Channel 00-20dB EBW

No.	Frequency(MHz)	Level(dBm)
1	2401.5050	-18.07
2	2401.9850	2.07
3	2402.3850	-17.98

No.		△Frequency(MHz)	△Level(dB)
1	mk3-mk1	0.88	0.09

File: BTM520 Data: #17 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 01:48:48 Humidity: 59 %

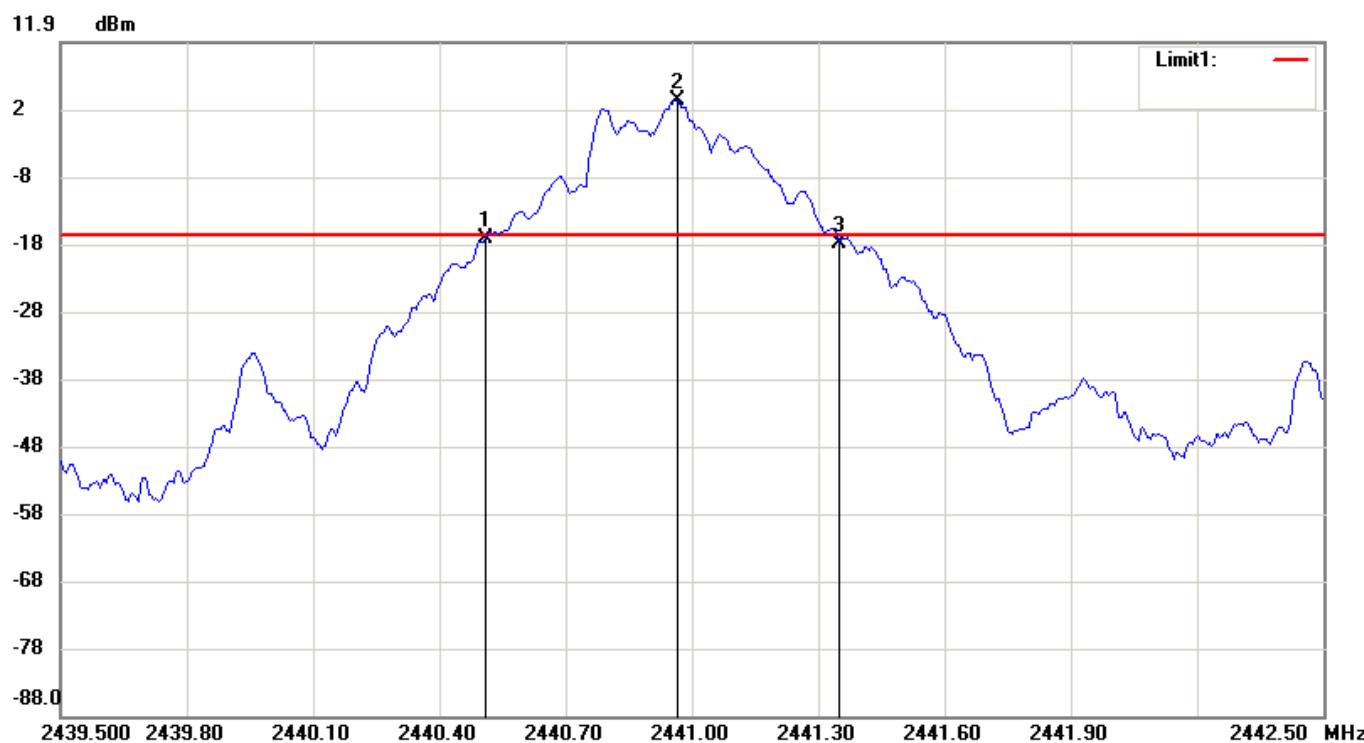


Condition: -16.63dBm Horizontal  
EUT: Bluetooth Module Sweep Time: 3.2ms Att.: 20dB  
Model: BTM521 RBW: 30 KHz VBW: 100 KHz  
Test Mode:  
Note: FCC-Bluetooth Channel 39-20dB EBW

No.	Frequency(MHz)	Level(dBm)
1	2440.5100	-17.11
2	2440.9650	3.37
3	2441.3500	-17.89

No.		△Frequency(MHz)	△Level(dB)
1	mk3-mk1	0.84	-0.78

File: BTM520 Data: #10 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 01:32:28 Humidity: 59 %

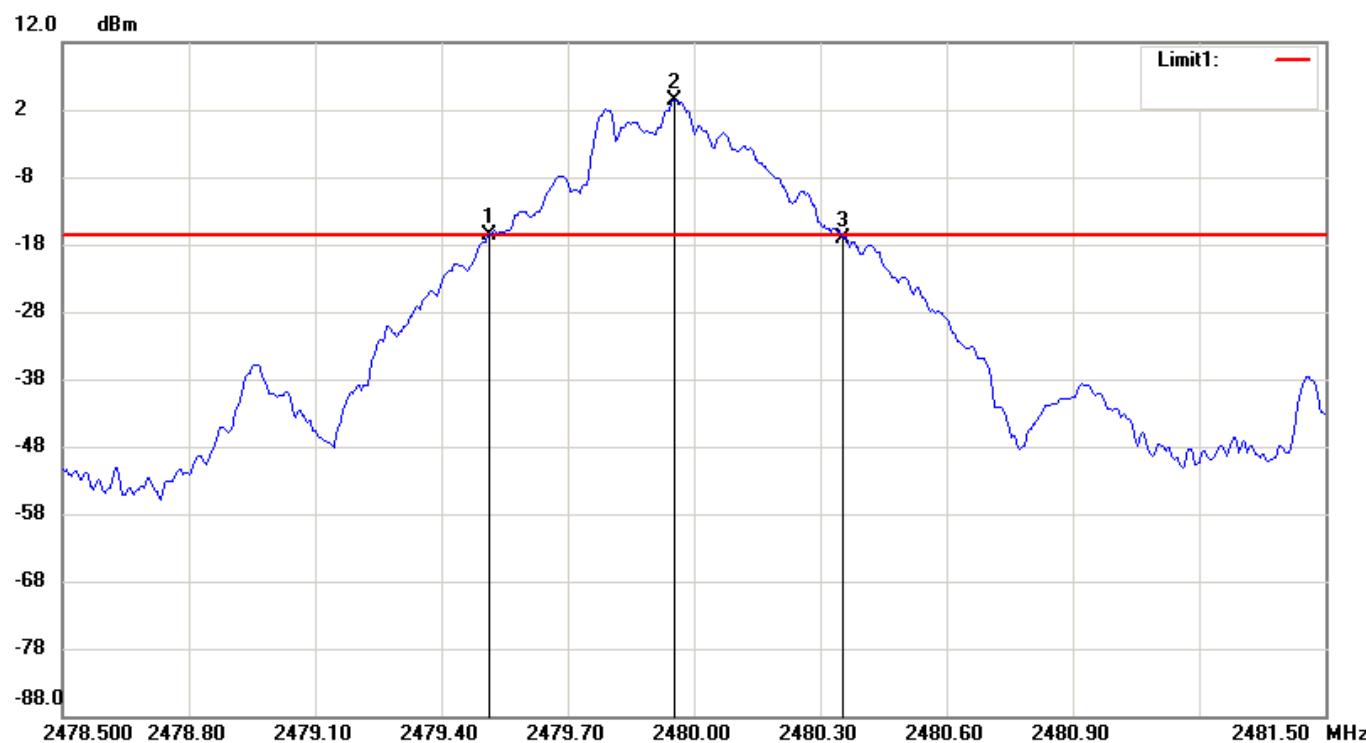

Condition: -16.64dBm Horizontal  
EUT: Bluetooth Module Sweep Time: 3.2ms Att.: 20dB  
Model: BTM521 RBW: 30 KHz VBW: 100 KHz  
Test Mode:  
Note: FCC-Bluetooth Channel 78-20dB EBW

No.	Frequency(MHz)	Level(dBm)
1	2479.5150	-16.67
2	2479.9550	3.36
3	2480.3550	-17.27

No.		△Frequency(MHz)	△Level(dB)
1	mk3-mk1	0.84	-0.6

#### 7.4.2 Operation Mode: 8DPSK

Test Date : Jun. 12, 2009


Temperature : 28°C

Humidity : 59%

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	Chart
0	2402	1.22	Page 30
39	2441	1.23	Page 31
78	2480	1.23	Page 32

*Note: Please refer to page 30 to page 32 for chart.*

File: BTM520 Data: #34 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 02:06:32 Humidity: 59 %

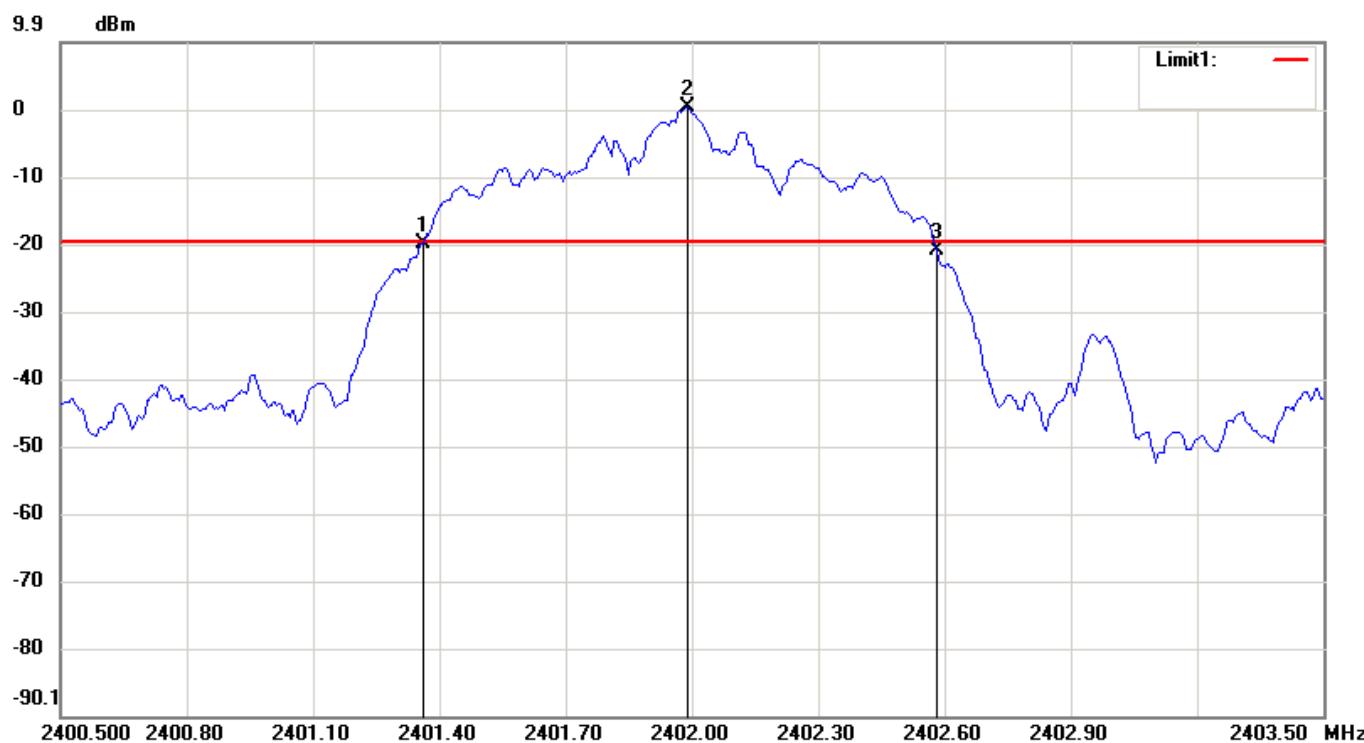


Condition: -19.85dBm Horizontal  
EUT: Bluetooth Module Sweep Time: 3.2ms Att.: 10dB  
Model: BTM521 RBW: 30 KHz VBW: 100 KHz  
Test Mode:  
Note: FCC-Bluetooth Channel 00-20dB EBW

No.	Frequency(MHz)	Level(dBm)
1	2401.3600	-19.91
2	2401.9900	0.15
3	2402.5800	-20.93

No.		△Frequency(MHz)	△Level(dB)
1	mk3-mk1	1.22	-1.02

File: BTM520 Data: #48 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 02:32:53 Humidity: 59 %

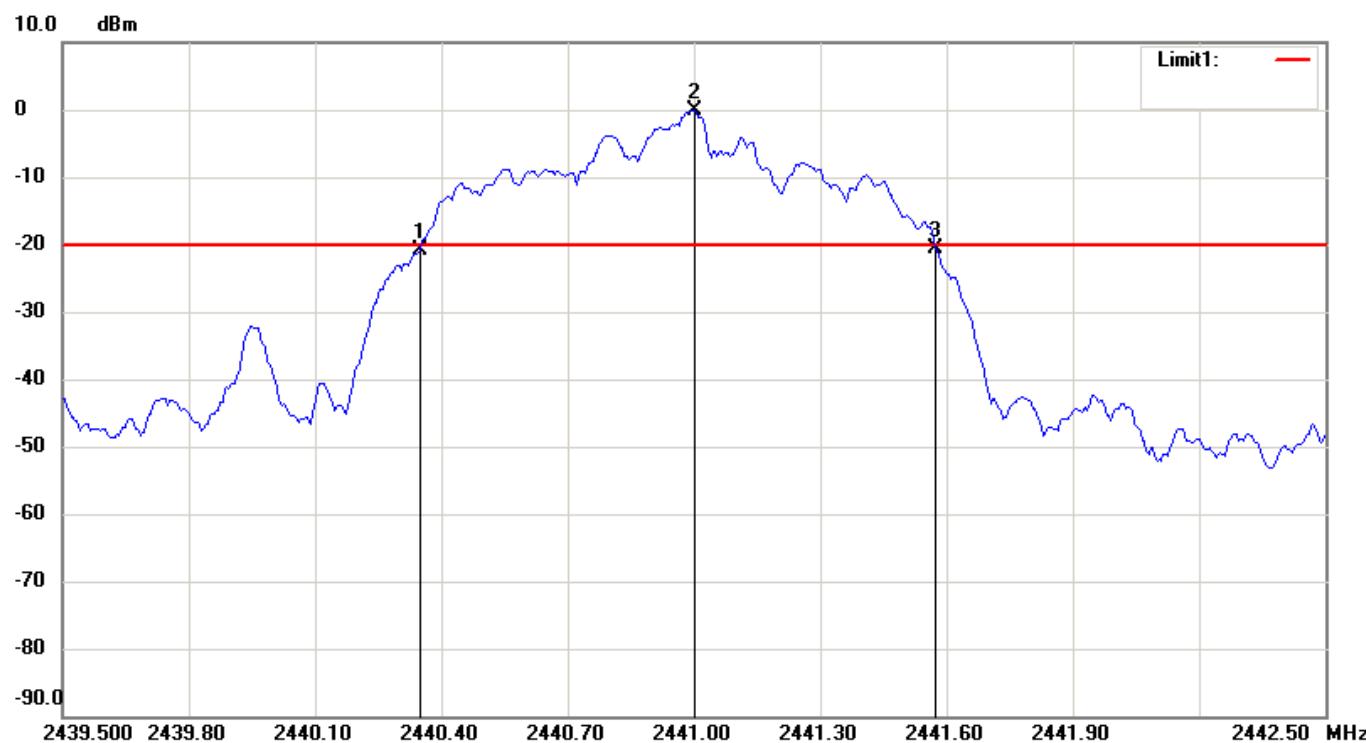


Condition: -20.01dBm Horizontal  
EUT: Bluetooth Module Sweep Time: 3.2ms Att.: 20dB  
Model: BTM521 RBW: 30 KHz VBW: 100 KHz  
Test Mode:  
Note: FCC-Bluetooth Channel 39-20dB EBW

No.	Frequency(MHz)	Level(dBm)
1	2440.3500	-20.90
2	2441.0000	-0.01
3	2441.5750	-20.51

No.		△Frequency(MHz)	△Level(dB)
1	mk3-mk1	1.225	0.39

File: BTM520 Data: #41 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 02:18:06 Humidity: 59 %

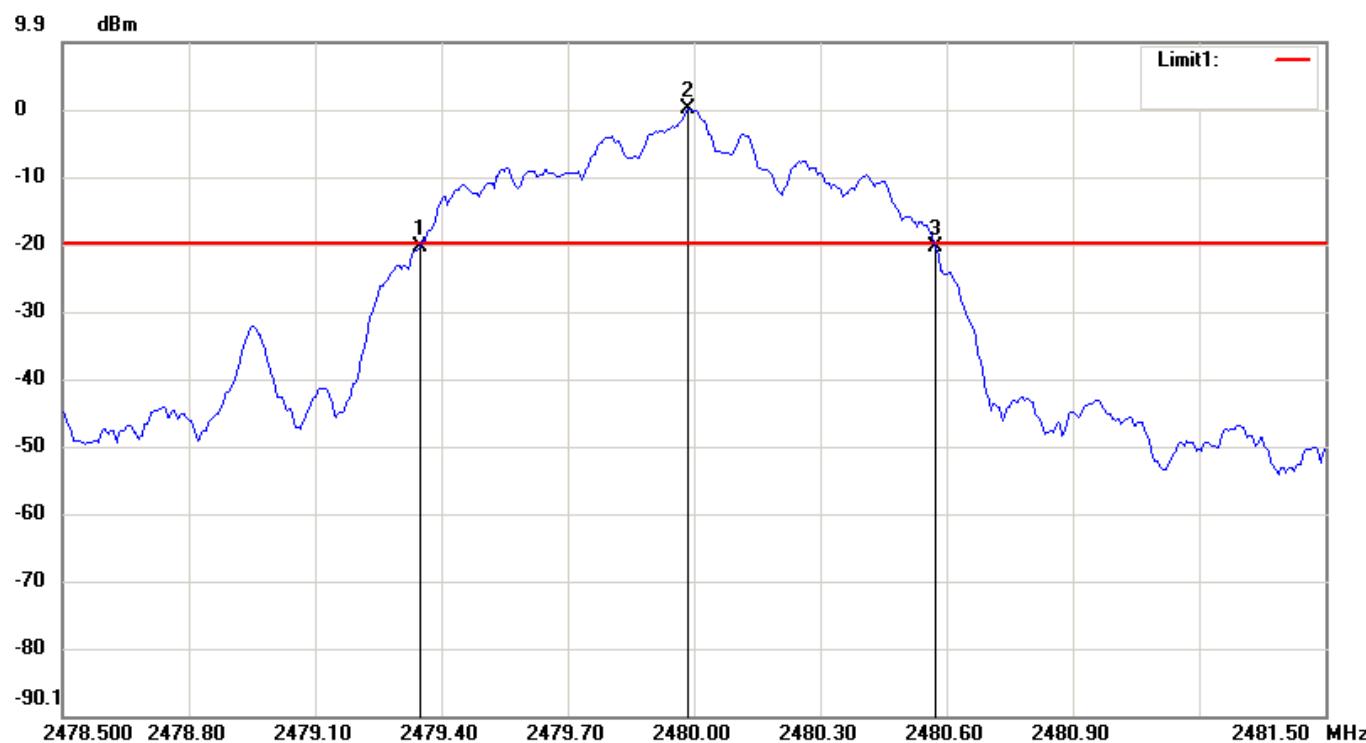

Condition: -20.05dBm Horizontal  
EUT: Bluetooth Module Sweep Time: 3.2ms Att.: 10dB  
Model: BTM521 RBW: 30 KHz VBW: 100 KHz  
Test Mode:  
Note: FCC-Bluetooth Channel 78-20dB EBW

No.	Frequency(MHz)	Level(dBm)
1	2479.3500	-20.53
2	2479.9850	-0.05
3	2480.5750	-20.49

No.		△Frequency(MHz)	△Level(dB)
1	mk3-mk1	1.225	0.04

## 8 OUTPUT POWER MEASUREMENT

### 8.1 Standard Applicable

For frequency hopping system, according to 15.247(b), the maximum peak output power of the transmitter shall not exceed 1 Watt. If Receiving antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 8.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. The setup of the EUT as shown in figure 3. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz and VBW to 3 MHz.
4. Measure the highest amplitude appearing on spectral display and record the level to calculate result data.
5. Repeat above procedures until all frequencies measured were complete.

### 8.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	Agilent	E4446A	09/30/2009

## 8.4 Measurement Data

### 8.4.1 Operation Mode: GFSK

Test Date : Jun. 12, 2009

Temperature : 28°C


Humidity : 59%

Channel	Frequency (MHz)	Maximum Peak Output Power (dBm)	Maximum Peak Output Power (mW)	FCC Limit (mW)	Chart
0	2402	2.26	1.68	1000	Page 35
39	2441	2.33	1.71	1000	Page 36
78	2480	2.30	1.70	1000	Page 37

*Note: 1. Please refer to page 34 to page 37 for chart.*

*2. Instrument have compensation for factor of result.*

File: BTM520 Data: #1 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 01:26:48 Humidity: 59 %

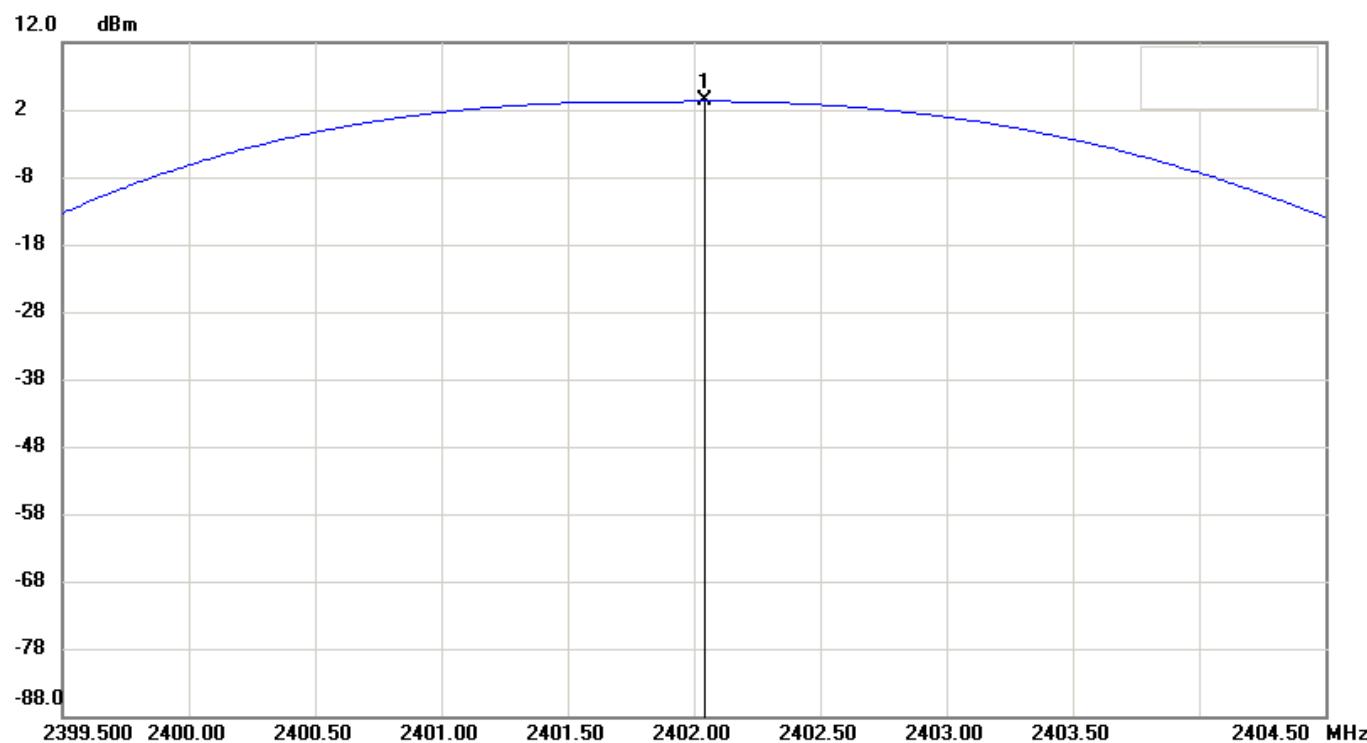

**Condition:**

**EUT:** Bluetooth Module

**Model:** BTM521

**Test Mode:**

**Note:** FCC Bluetooth CH00 Output Power


**Horizontal**

Sweep Time: 1ms Att.: 20dB

RBW: 2000 KHz VBW: 2000 KHz

No.	Frequency(MHz)	Level(dBm)
1	2402.0417	3.31


File: BTM520 Data: #15 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 01:48:05 Humidity: 59 %

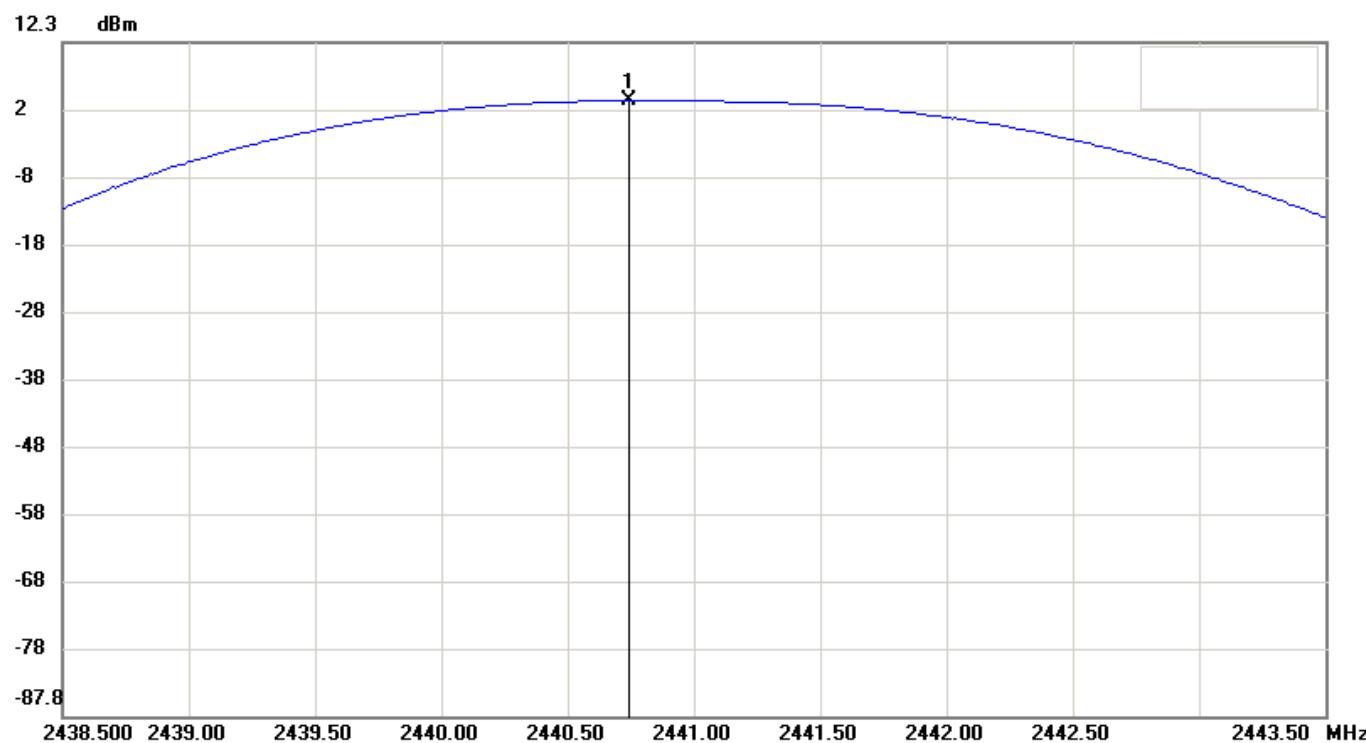

**Condition:** Horizontal  
**EUT:** Bluetooth Module **Sweep Time:** 1ms **Att.:** 20dB  
**Model:** BTM521 **RBW:** 2000 KHz **VBW:** 2000 KHz  
**Test Mode:**  
**Note:** FCC Bluetooth CH39 Output Power

No.	Frequency(MHz)	Level(dBm)
1	2440.7417	3.61

File: BTM520 Data: #8 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 01:31:44 Humidity: 59 %

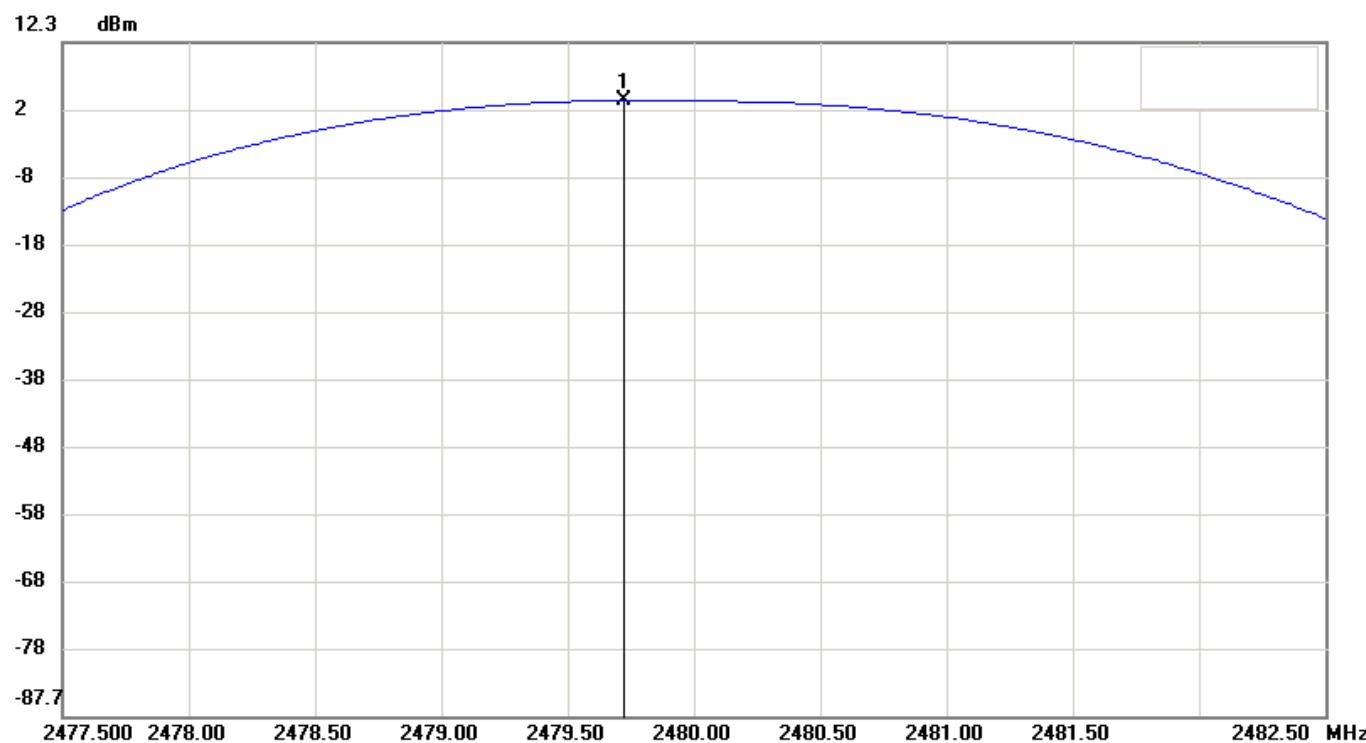

**Condition:** Horizontal  
**EUT:** Bluetooth Module      **Sweep Time:** 1ms   **Att.:** 20dB  
**Model:** BTM521      **RBW:** 2000 KHz      **VBW:** 2000 KHz  
**Test Mode:**  
**Note:** FCC Bluetooth CH78 Output Power

No.	Frequency(MHz)	Level(dBm)
1	2479.7250	3.68

#### 8.4.2 Operation Mode: 8DPSK

Test Date : Jun. 12, 2009

Temperature : 28°C


Humidity : 59%

Channel	Frequency (MHz)	Maximum Peak Output Power (dBm)	Maximum Peak Output Power (mW)	FCC Limit (mW)	Chart
0	2402	3.31	2.14	1000	Page 39
39	2441	3.61	2.30	1000	Page 40
78	2480	3.68	2.33	1000	Page 41

*Note: 1. Please refer to page 39 to page 41 for chart.*

*2. Instrument have compensation for factor of result.*


File: BTM520 Data: #32 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 02:05:44 Humidity: 59 %

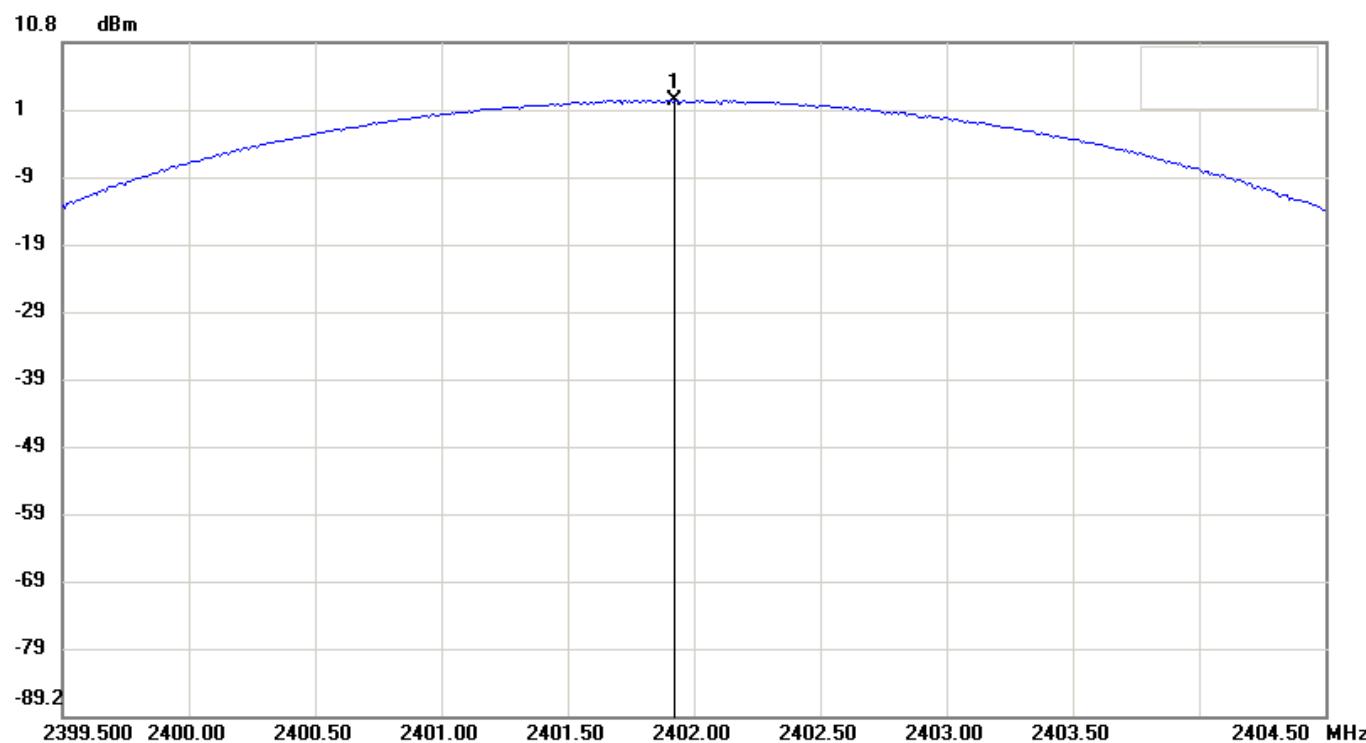

**Condition:** Horizontal  
**EUT:** Bluetooth Module      **Sweep Time:** 1ms   **Att.:** 20dB  
**Model:** BTM521      **RBW:** 2000 KHz      **VBW:** 2000 KHz  
**Test Mode:**  
**Note:** FCC Bluetooth CH00 Output Power

No.	Frequency(MHz)	Level(dBm)
1	2401.9250	2.26

File: BTM520 Data: #46 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 02:32:10 Humidity: 59 %

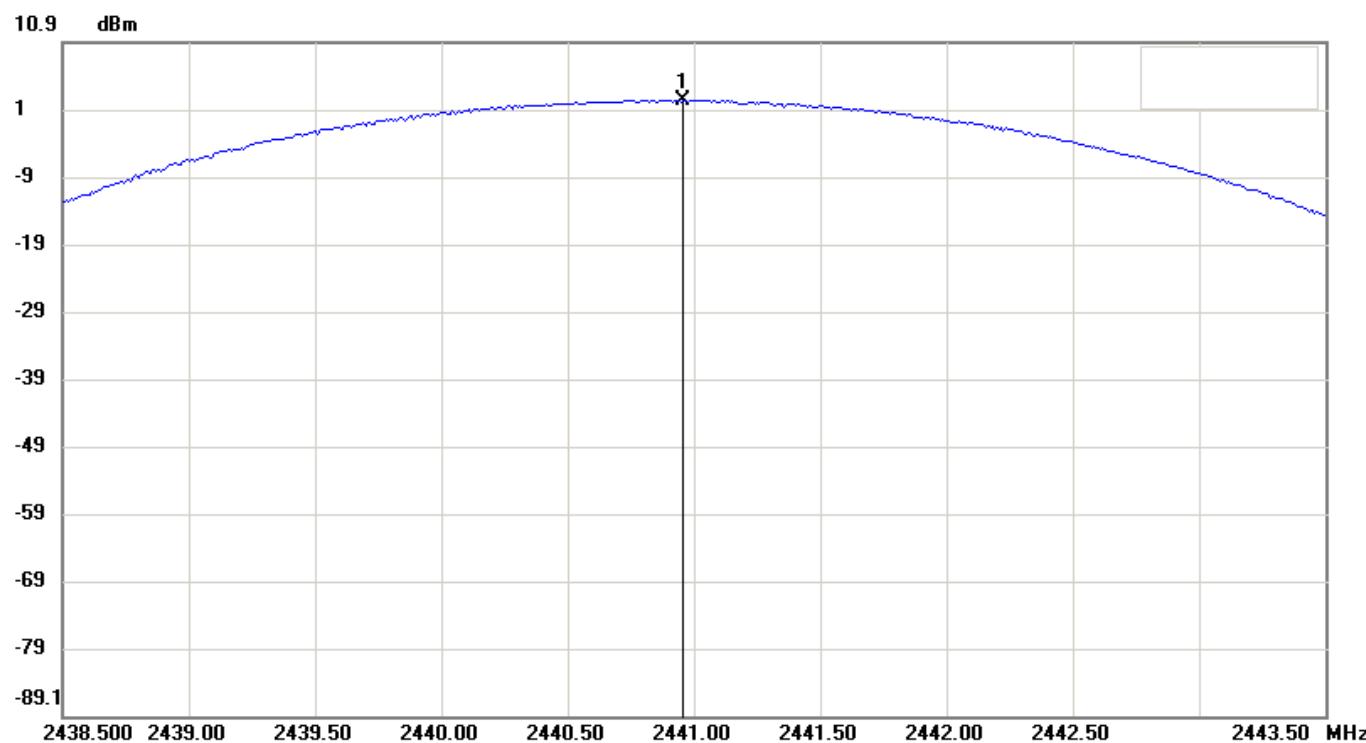

**Condition:**

**EUT:** Bluetooth Module

**Model:** BTM521

**Test Mode:**

**Note:** FCC Bluetooth CH39 Output Power


**Horizontal**

Sweep Time: 1ms Att.: 20dB

RBW: 2000 KHz VBW: 2000 KHz

No.	Frequency(MHz)	Level(dBm)
1	2440.9583	2.33

File: BTM520 Data: #39 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 02:17:22 Humidity: 59 %

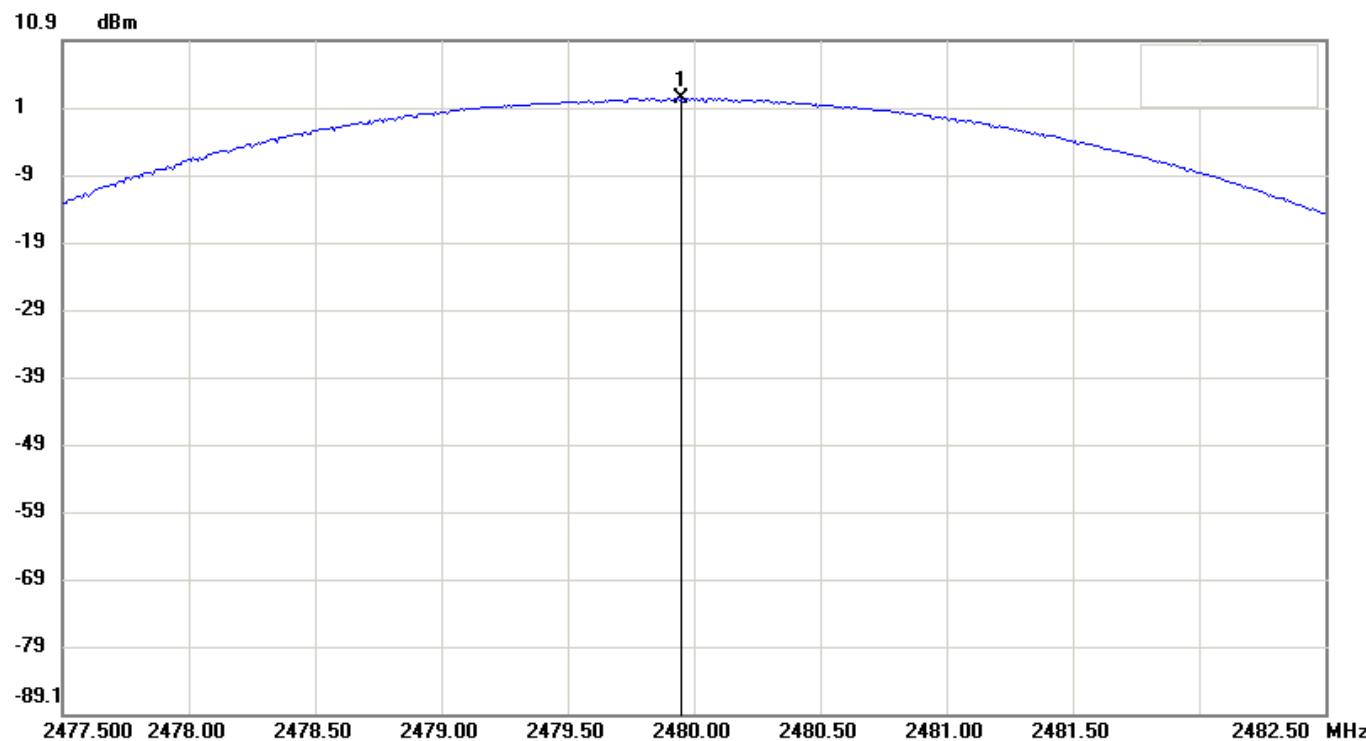

**Condition:** Horizontal  
**EUT:** Bluetooth Module      **Sweep Time:** 1ms   **Att.:** 20dB  
**Model:** BTM521      **RBW:** 2000 KHz      **VBW:** 2000 KHz  
**Test Mode:**  
**Note:** FCC Bluetooth CH78 Output Power

No.	Frequency(MHz)	Level(dBm)
1	2479.9500	2.30

## 9 OUT-OF-BAND RF CONDUCTED SPURIOUS EMISSION MEASUREMENT

### 9.1 Standard Applicable

According to 15.247(c), if any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in §15.209(a), whichever results in the lesser attenuation.

### 9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. The setup of the EUT as shown in figure 3. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### 9.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	Agilent	E4446A	09/30/2009

## 9.4 Measurement Data

### 9.4.1 Operation Mode: GFSK

Test Date : Jun. 12, 2009


Temperature : 28°C

Humidity : 59%

Channel	Test Frequency Range	Note	Chart
0	2350 MHz - 2450 MHz	Lower Band Edge	Page 44
78	2433.5 MHz - 2533.5 MHz	Upper Band Edge	Page 45
0	30 MHz - 25 GHz		Page 46
39	30 MHz - 25 GHz		Page 47
78	30 MHz - 25 GHz		Page 48

*Note: Please refer to page 44 to page 48 for chart.*

File: BTM520 Data: #6 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 01:28:57 Humidity: 59 %

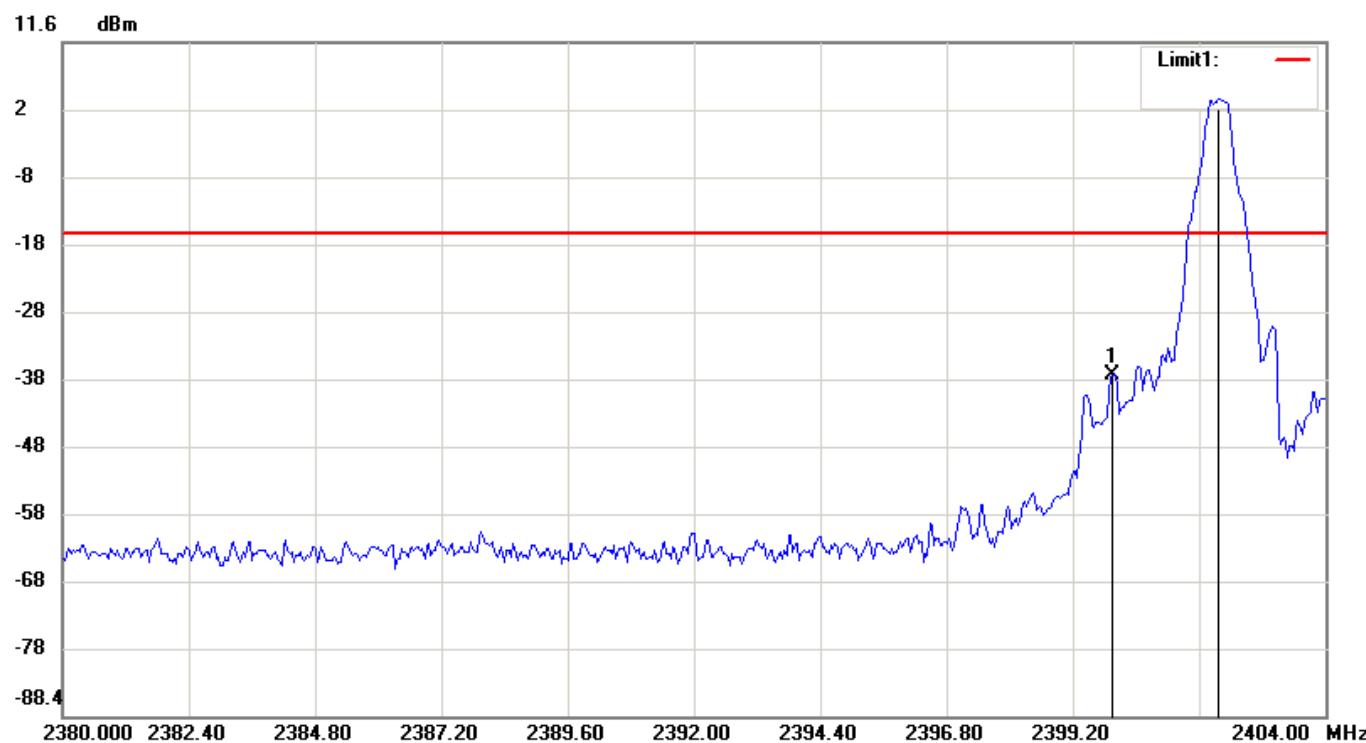

Condition: -16.7dBm Horizontal  
EUT: Bluetooth Module Sweep Time: 2.32ms Att.: 20dB  
Model: BTM521 RBW: 100 KHz VBW: 300 KHz  
Test Mode:  
Note: FCC-Bluetooth Channel 00-Bandedge (Fixed)

No.	Frequency(MHz)	Level(dBm)
1	2399.9600	-37.69
2	2401.9600	3.30


File: BTM520 Data: #13 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 01:33:51 Humidity: 59 %



Condition: -16.26dBm Horizontal  
EUT: Bluetooth Module Sweep Time: 2.12ms Att.: 20dB  
Model: BTM521 RBW: 100 KHz VBW: 300 KHz  
Test Mode:  
Note: FCC-Bluetooth Channel 78-Bandedge (Fixed)

No.	Frequency(MHz)	Level(dBm)
1	2479.9433	3.74
2	2483.5733	-57.67


File: BTM520 Data: #5 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 01:28:31 Humidity: 59 %

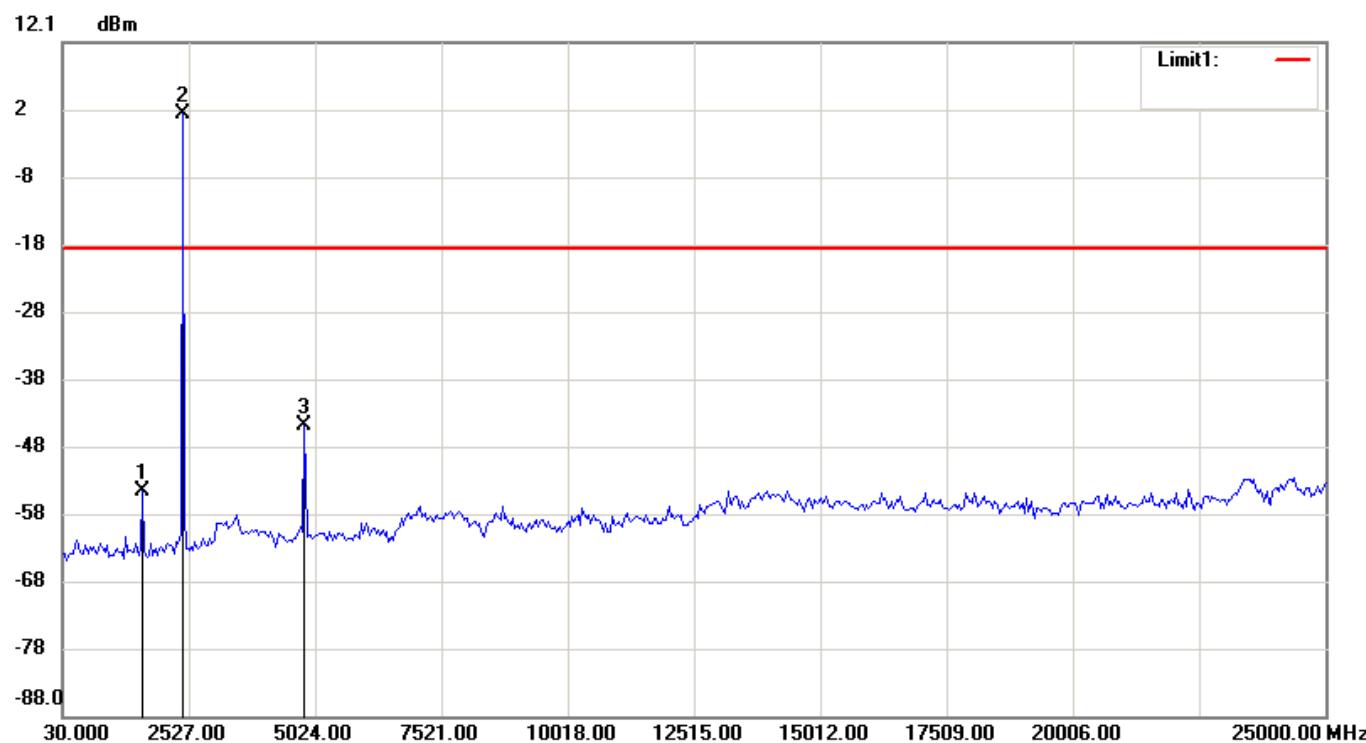

Condition: -18.46dBm Horizontal  
EUT: Bluetooth Module Sweep Time: 2386.4ms Att.: 20dB  
Model: BTM521 RBW: 100 KHz VBW: 300 KHz  
Test Mode:  
Note: FCC-BT Channel 00-Conducted Spurious

No.	Frequency(MHz)	Level(dBm)
1	1611.4333	-54.45
2	2402.1500	1.54
3	4815.9167	-44.89


File: BTM520 Data: #19 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 01:49:45 Humidity: 59 %

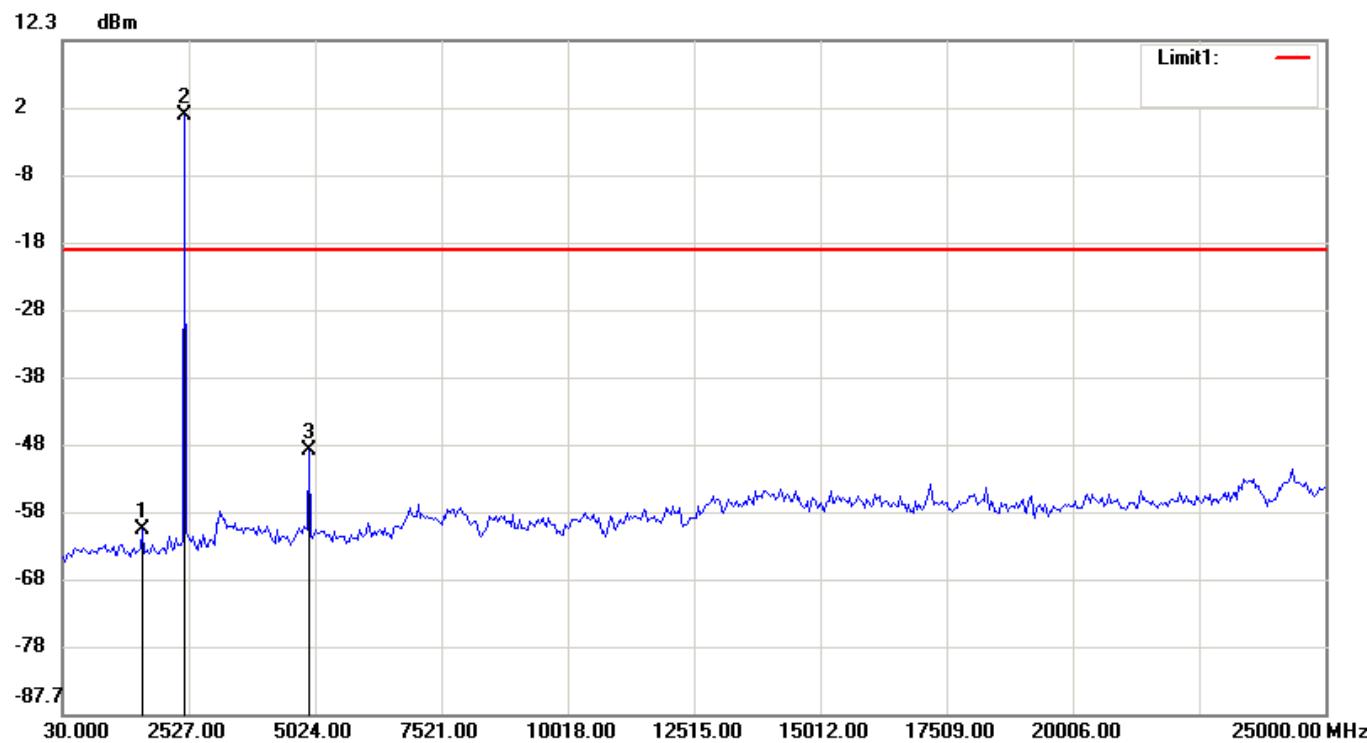

Condition: -18.83dBm Horizontal  
EUT: Bluetooth Module Sweep Time: 2386.4ms Att.: 20dB  
Model: BTM521 RBW: 100 KHz VBW: 300 KHz  
Test Mode:  
Note: FCC-BT Channel 39-Conducted Spurious

No.	Frequency(MHz)	Level(dBm)
1	1611.4333	-60.28
2	2443.7667	1.17
3	4899.1500	-48.52

File: BTM520 Data: #12 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 01:33:25 Humidity: 59 %

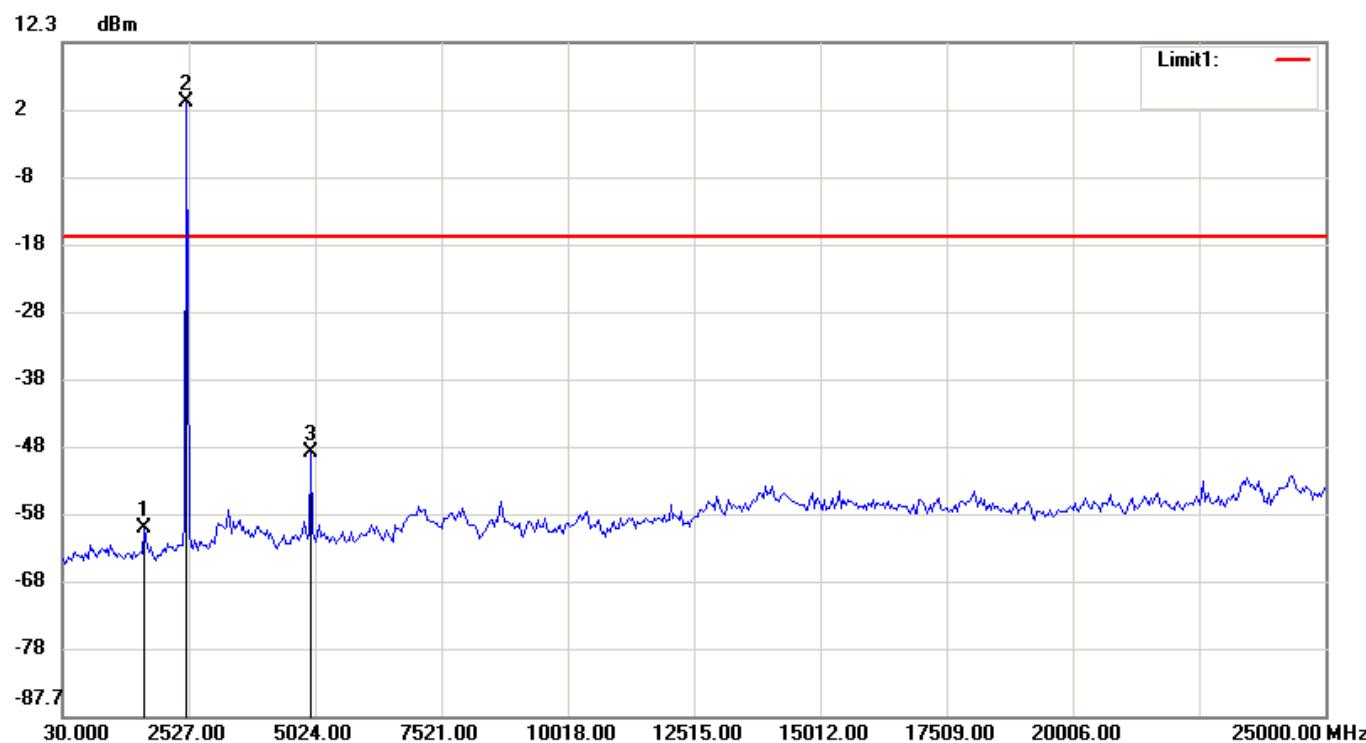

Condition: -16.65dBm Horizontal  
EUT: Bluetooth Module Sweep Time: 2386.4ms Att.: 20dB  
Model: BTM521 RBW: 100 KHz VBW: 300 KHz  
Test Mode:  
Note: FCC-BT Channel 78-Conducted Spurious

No.	Frequency(MHz)	Level(dBm)
1	1653.0500	-59.72
2	2485.3833	3.35
3	4940.7667	-48.56

#### 9.4.2 Operation Mode: 8DPSK

Test Date : Jun. 12, 2009


Temperature : 28°C

Humidity : 59%

Channel	Test Frequency Range	Note	Chart
0	2350 MHz - 2450 MHz	Lower Band Edge	Page 50
78	2433.5 MHz - 2533.5 MHz	Upper Band Edge	Page 51
0	30 MHz - 25 GHz		Page 52
39	30 MHz - 25 GHz		Page 53
78	30 MHz - 25 GHz		Page 54

*Note: Please refer to page 50 to page 54 for chart.*

File: BTM520 Data: #37 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 02:07:55 Humidity: 59 %

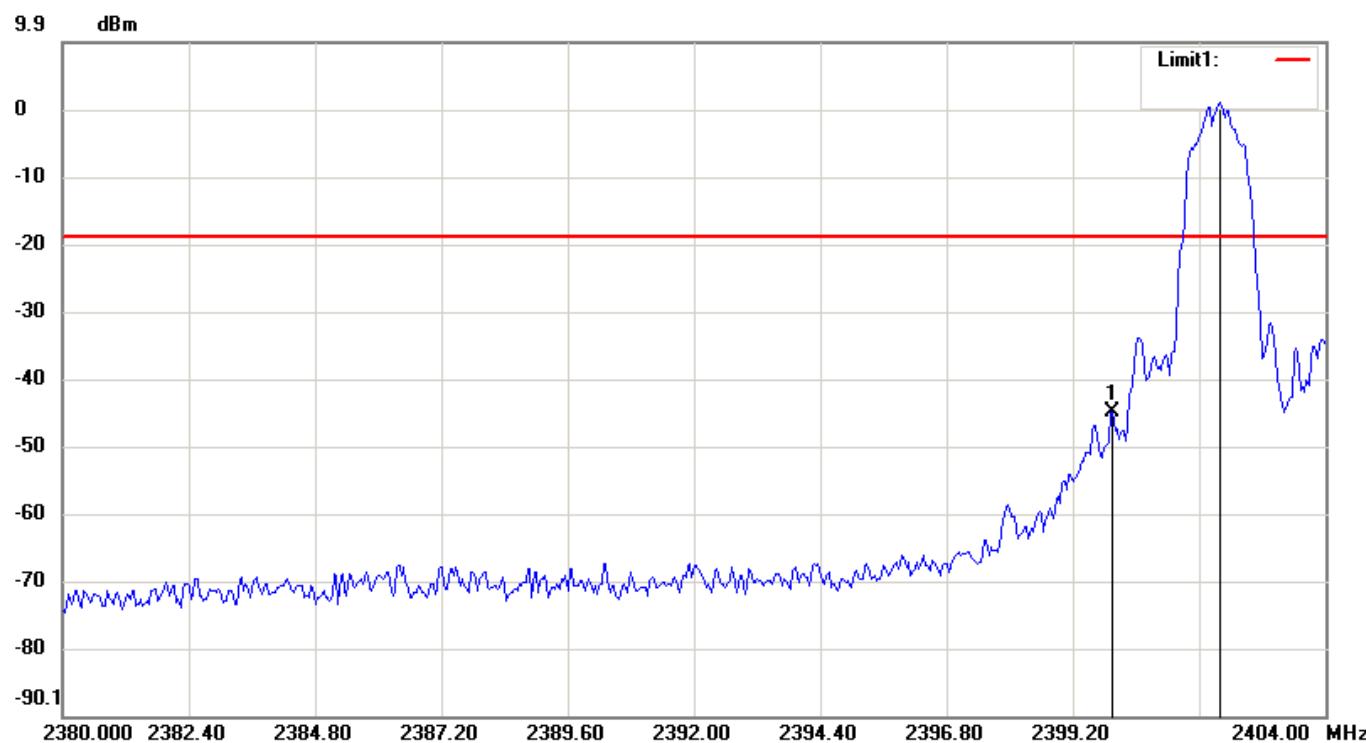

Condition: -18.92dBm Horizontal  
EUT: Bluetooth Module Sweep Time: 2.32ms Att.: 10dB  
Model: BTM521 RBW: 100 KHz VBW: 300 KHz  
Test Mode:  
Note: FCC-Bluetooth Channel 00-Bandedge (Fixed)

No.	Frequency(MHz)	Level(dBm)
1	2399.9600	-45.09
2	2402.0000	1.08


File: BTM520 Data: #44 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 02:19:29 Humidity: 59 %



Condition: -18.76dBm Horizontal  
EUT: Bluetooth Module Sweep Time: 2.12ms Att.: 10dB  
Model: BTM521 RBW: 100 KHz VBW: 300 KHz  
Test Mode:  
Note: FCC-Bluetooth Channel 78-Bandedge (Fixed)

No.	Frequency(MHz)	Level(dBm)
1	2479.9433	1.24
2	2483.5367	-59.15


File: BTM520 Data: #36 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 02:07:29 Humidity: 59 %

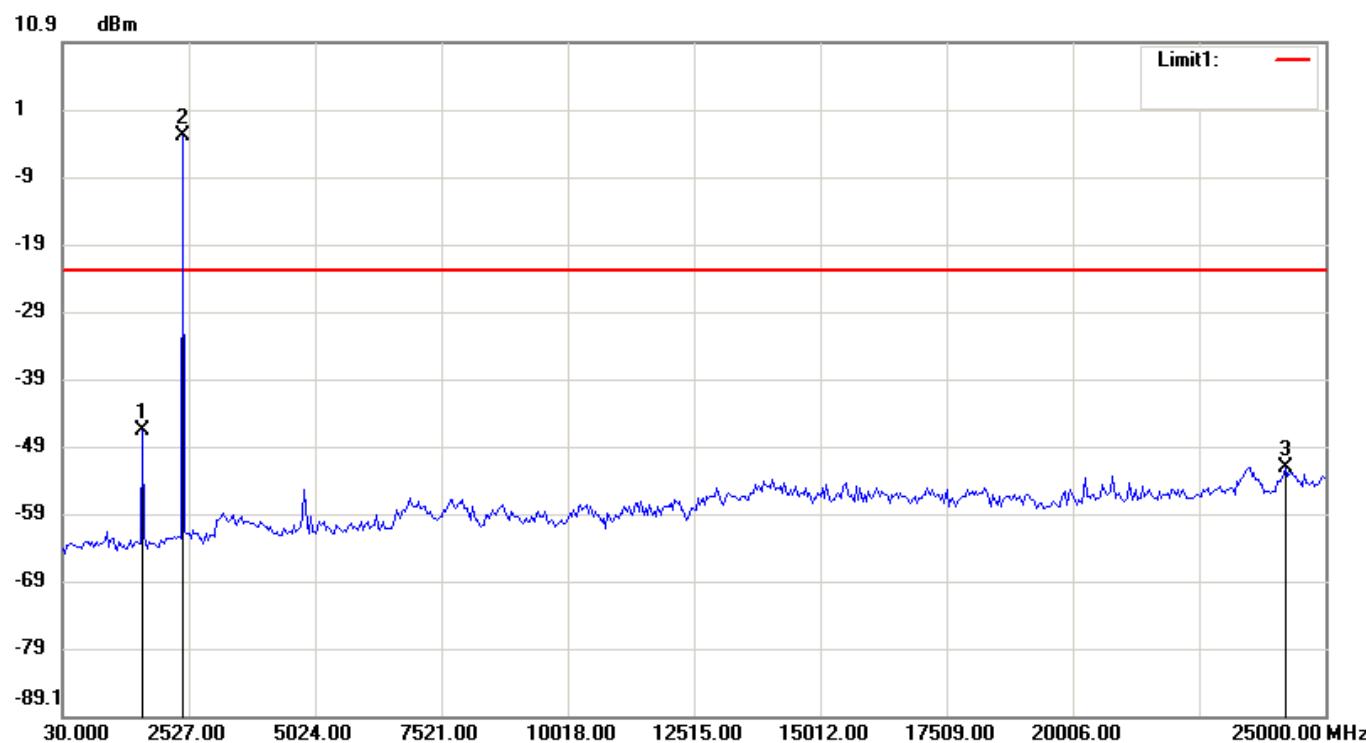

Condition: -23.05dBm Horizontal  
EUT: Bluetooth Module Sweep Time: 2386.4ms Att.: 20dB  
Model: BTM521 RBW: 100 KHz VBW: 300 KHz  
Test Mode:  
Note: FCC-BT Channel 00-Conducted Spurious

No.	Frequency(MHz)	Level(dBm)
1	1611.4333	-46.76
2	2402.1500	-3.05
3	24209.2833	-52.24


File: BTM520 Data: #50 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 02:33:49 Humidity: 59 %

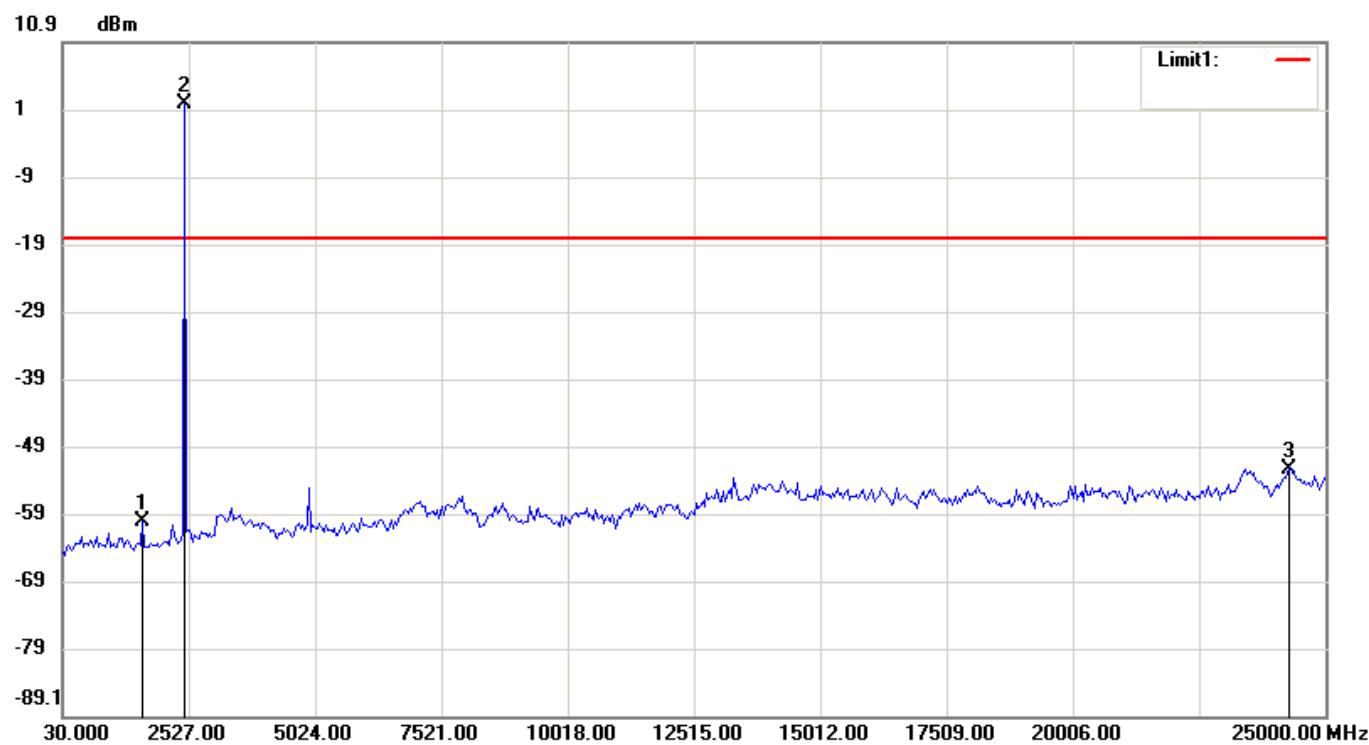

<b>Condition:</b>	<b>-18.35dBm</b>	<b>Horizontal</b>
<b>EUT:</b>	<b>Bluetooth Module</b>	<b>Sweep Time: 2386.4ms Att.: 20dB</b>
<b>Model:</b>	<b>BTM521</b>	<b>RBW: 100 KHz VBW: 300 KHz</b>
<b>Test Mode:</b>		
<b>Note:</b>	<b>FCC-BT Channel 39-Conducted Spurious</b>	

No.	Frequency(MHz)	Level(dBm)
1	1611.4333	-60.30
2	2443.7667	1.65
3	24292.5167	-52.36

File: BTM520 Data: #43 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 02:19:03 Humidity: 59 %

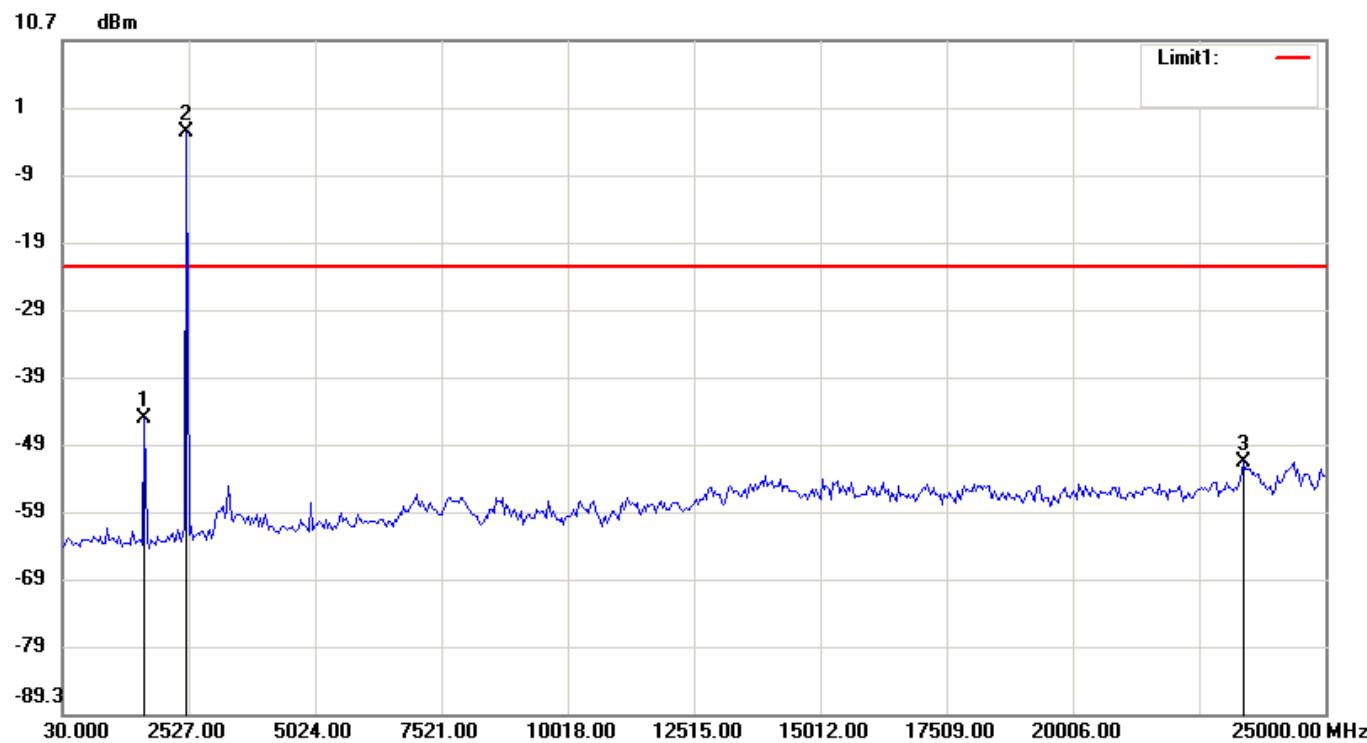

Condition: -22.97dBm Horizontal  
EUT: Bluetooth Module Sweep Time: 2386.4ms Att.: 20dB  
Model: BTM521 RBW: 100 KHz VBW: 300 KHz  
Test Mode:  
Note: FCC-BT Channel 78-Conducted Spurious

No.	Frequency(MHz)	Level(dBm)
1	1653.0500	-45.36
2	2485.3833	-2.97
3	23376.9500	-51.84

## 10 NUMBER of HOPPING CHANNELS

### 10.1 Standard Applicable

According to 15.247(b)(1), for frequency hopping systems, operating in the 2400-2483.5MHz band employing at least 75 hopping channels

### 10.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. The setup of the EUT as shown in figure 3. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set EUT to hopping operating mode and set spectrum analyzer maximum to measure the number of hopping channels.

### 10.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	Agilent	E4446A	09/30/2009

### 10.4 Measurement Data


#### 10.4.1 Operation Mode: GFSK

Test Date : Jun. 12, 2009      Temperature : 28°C      Humidity : 59%

Number of hopping channels = 79 channels


*Note: Please refer to page 56 to page 58 for chart.*

File: BTM520 Data: #29 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 01:59:57 Humidity: 59 %

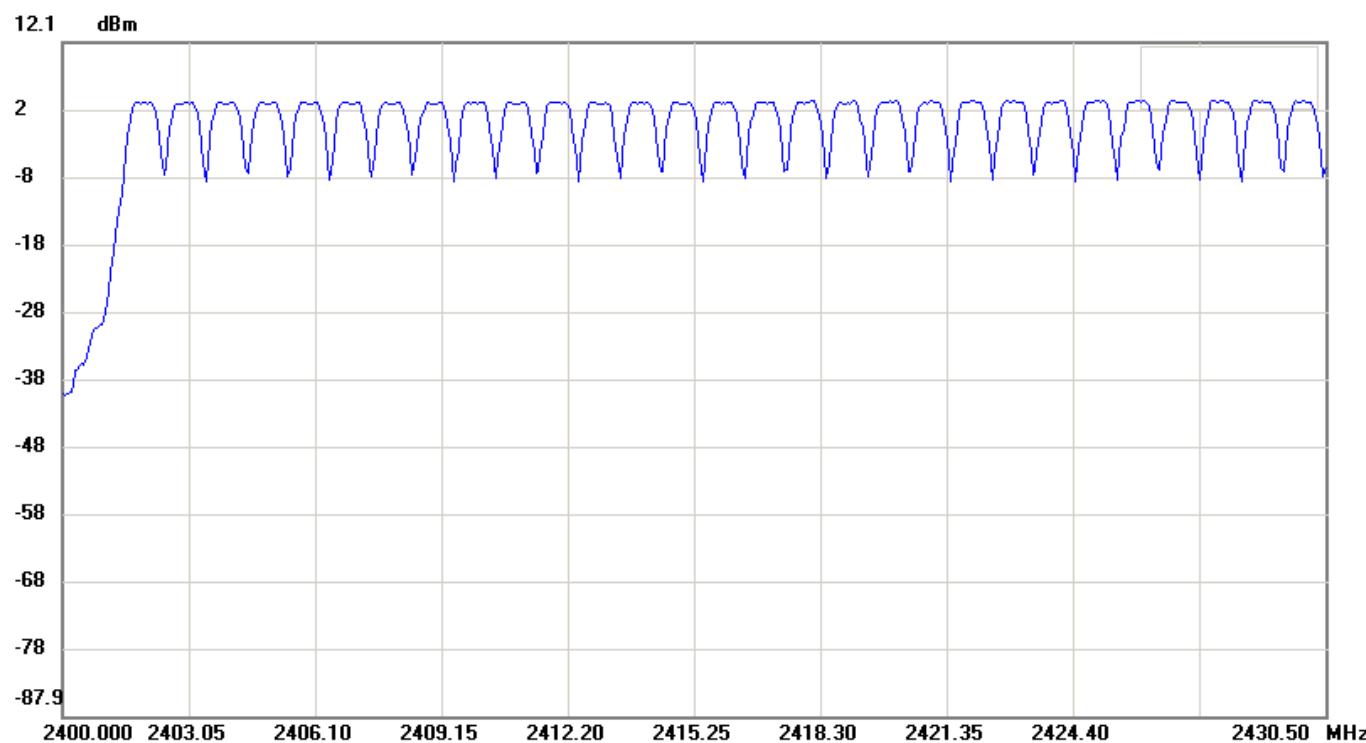


Condition:	Horizontal		
EUT:	Bluetooth Module	Sweep Time:	1ms Att.: 20dB
Model:	BTM521	RBW:	300 KHz VBW: 300 KHz
Test Mode:			
Note:	FCC-Bluetooth Number of Hopping Channels -Part1		

File: BTM520 Data: #30 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 02:01:48 Humidity: 59 %

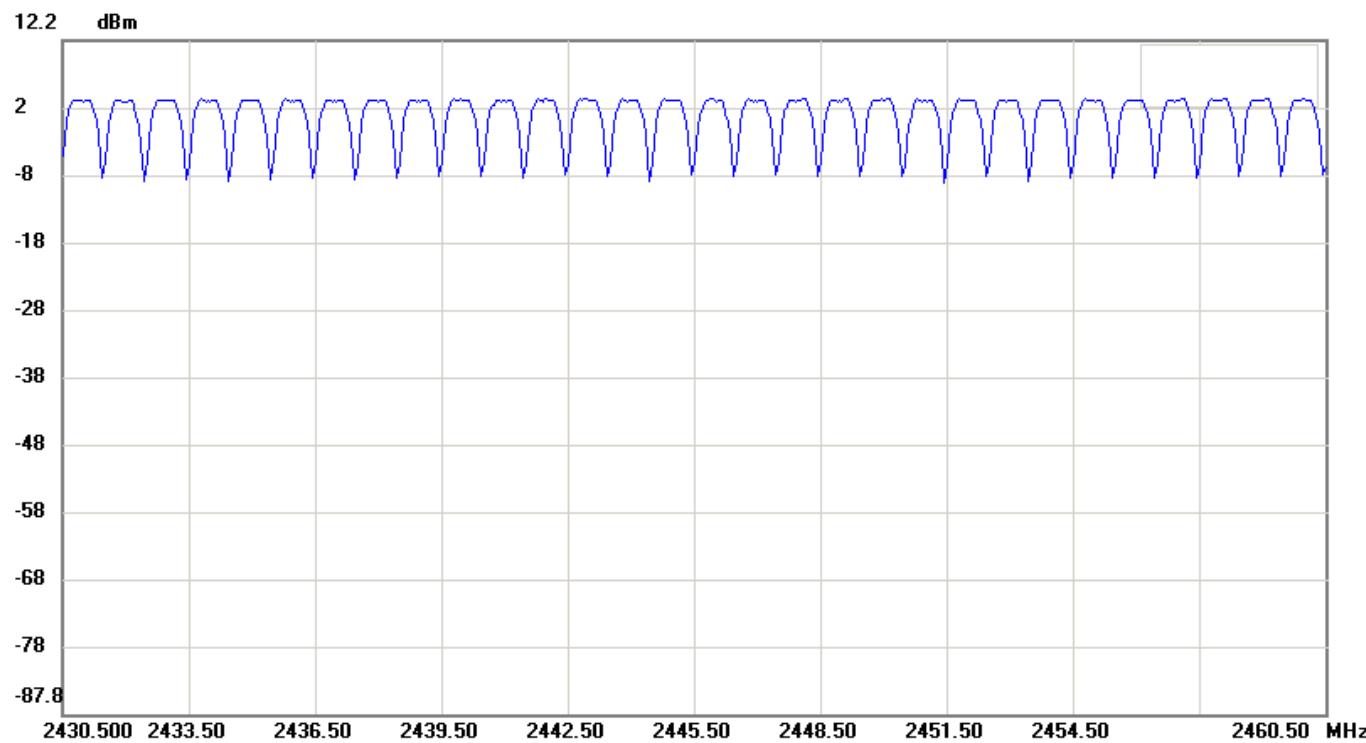

Condition: **Horizontal**  
EUT: **Bluetooth Module** Sweep Time: 1ms Att.: 20dB  
Model: **BTM521** RBW: 300 KHz VBW: 300 KHz  
Test Mode:  
Note: **FCC-Bluetooth Number of Hopping Channels -Part2**

File: BTM520 Data: #31 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 02:03:39 Humidity: 59 %

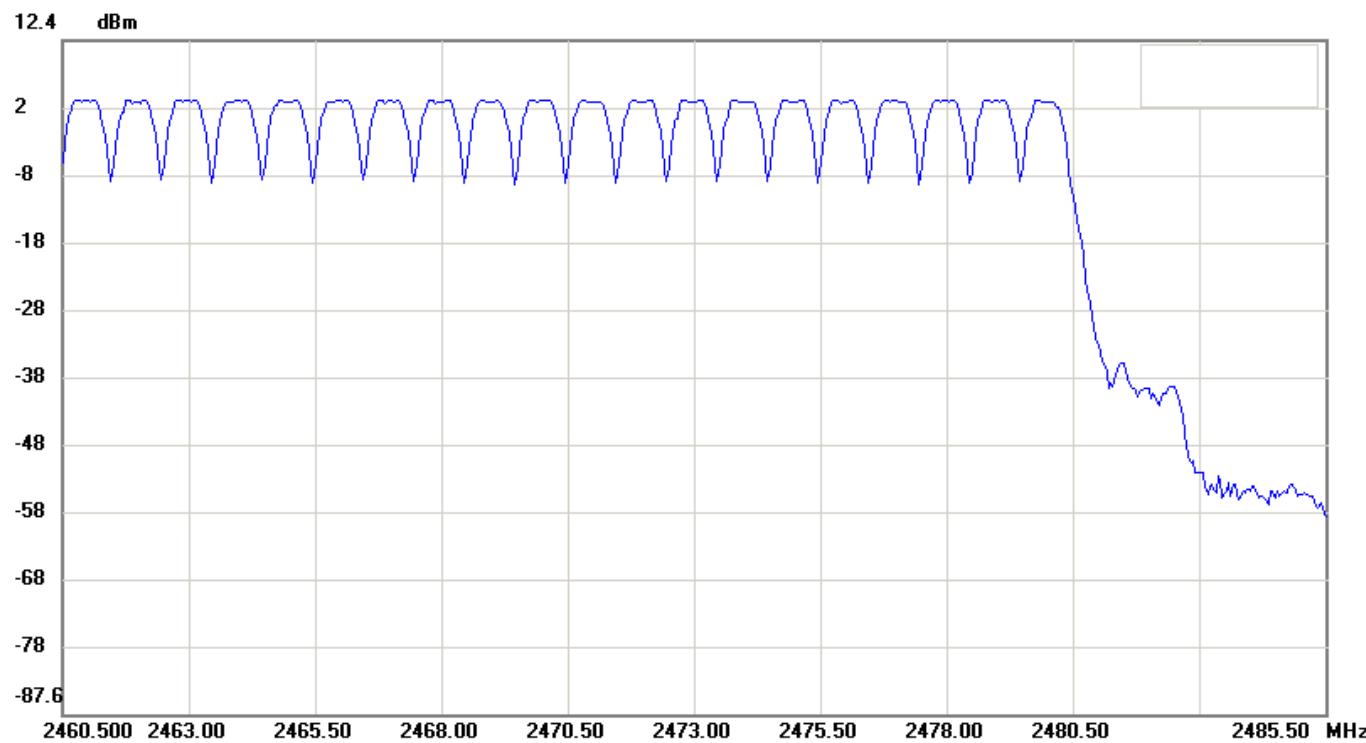

Condition:	Horizontal		
EUT:	Bluetooth Module	Sweep Time: 1ms	Att.: 20dB
Model:	BTM521	RBW: 300 KHz	VBW: 300 KHz
Test Mode:			
Note:	FCC-Bluetooth Number of Hopping Channels -Part3		


#### 10.4.2 Operation Mode: 8DPSK

Test Date : Jun. 12, 2009 Temperature : 28°C Humidity : 59%

Number of hopping channels = 79 channels


*Note: Please refer to page 60 to page 62 for chart.*

File: BTM520 Data: #60 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 02:50:10 Humidity: 59 %

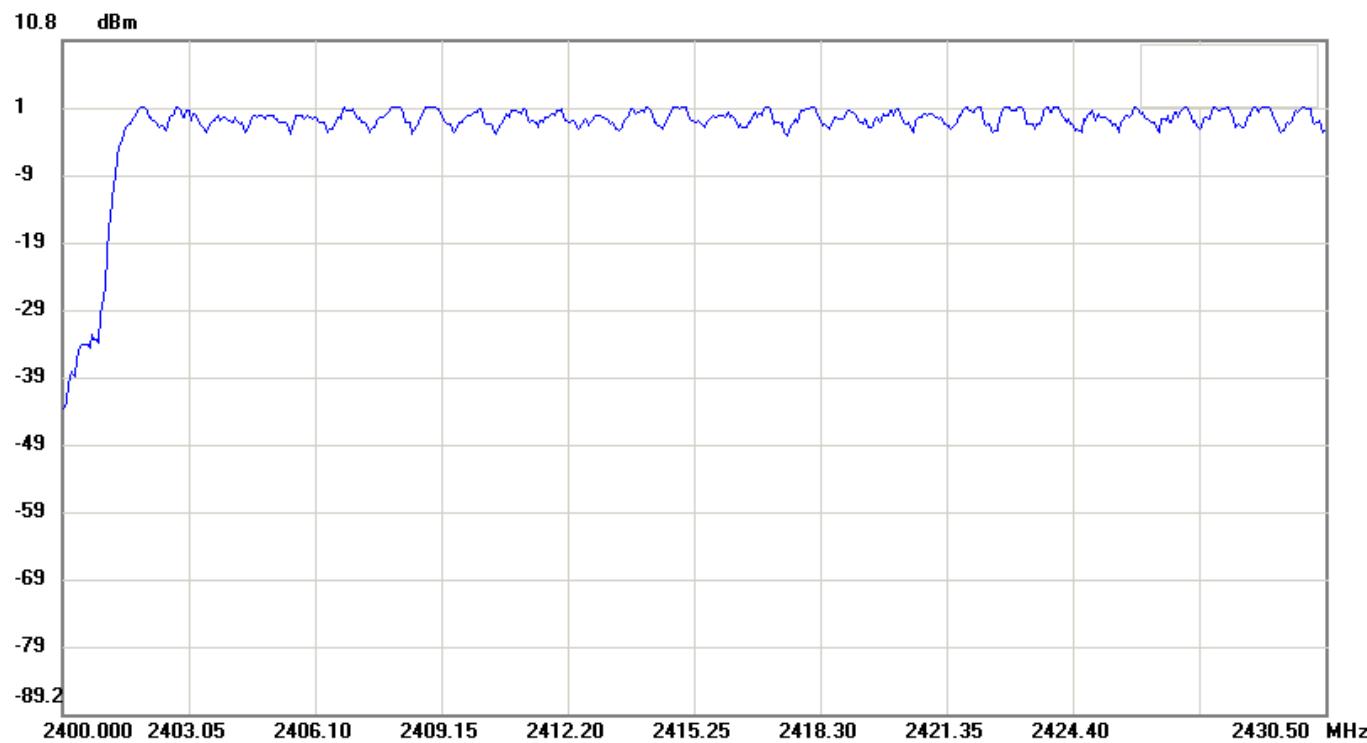


Condition: **Horizontal**  
EUT: **Bluetooth Module** Sweep Time: 1ms Att.: 20dB  
Model: **BTM521** RBW: 300 KHz VBW: 300 KHz  
Test Mode:  
Note: **FCC-Bluetooth Number of Hopping Channels -Part1**

File: BTM520 Data: #61 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 02:52:02 Humidity: 59 %

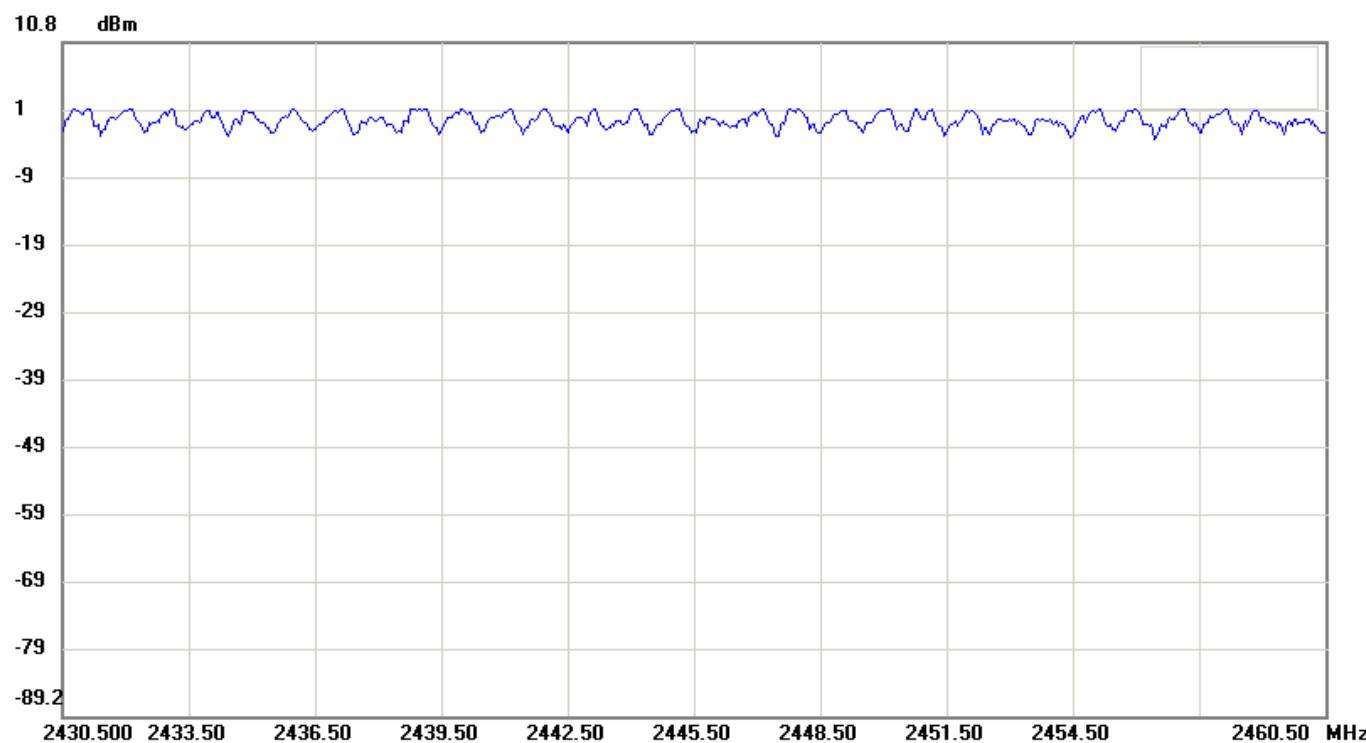

Condition: **Horizontal**  
EUT: **Bluetooth Module** Sweep Time: 1ms Att.: 20dB  
Model: **BTM521** RBW: 300 KHz VBW: 300 KHz  
Test Mode:  
Note: **FCC-Bluetooth Number of Hopping Channels -Part2**

File: BTM520 Data: #62 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 02:53:54 Humidity: 59 %

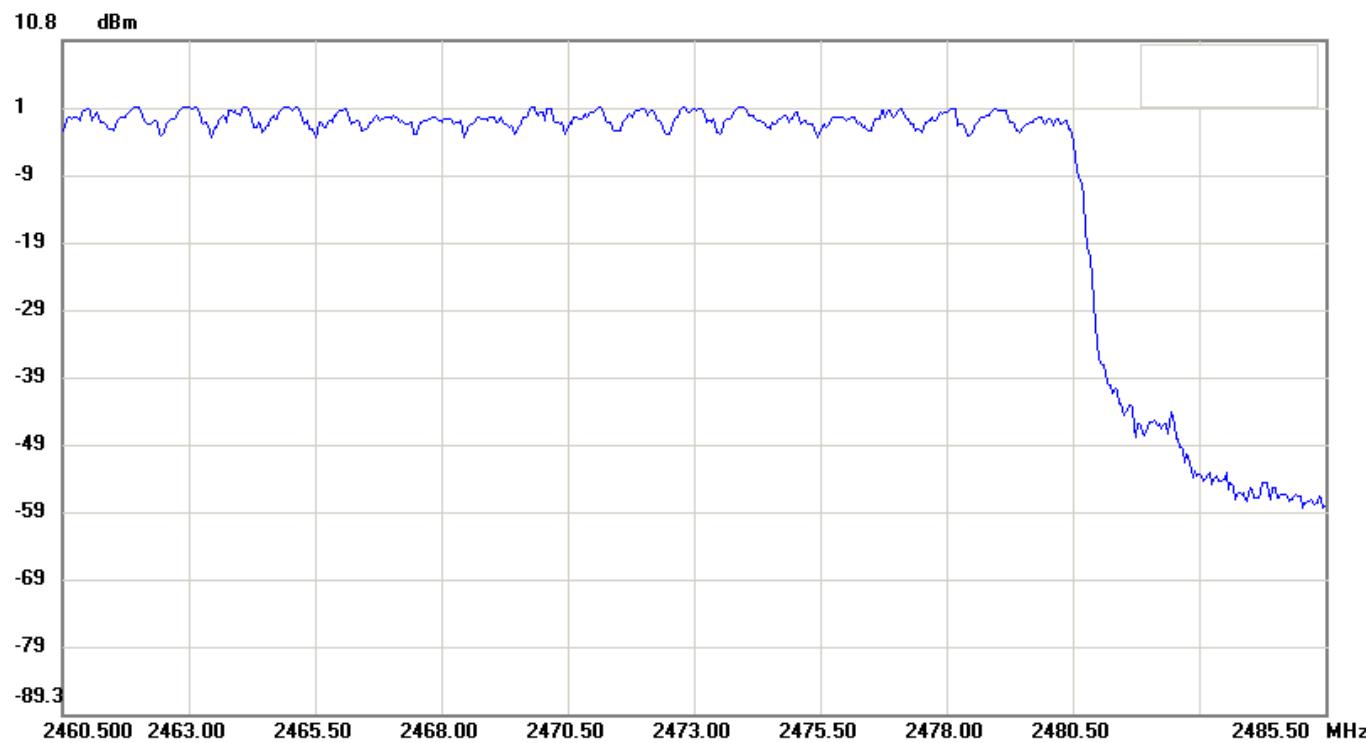

Condition: **Horizontal**  
EUT: **Bluetooth Module** Sweep Time: 1ms Att.: 20dB  
Model: **BTM521** RBW: 300 KHz VBW: 300 KHz  
Test Mode:  
Note: **FCC-Bluetooth Number of Hopping Channels -Part3**

## 11 HOPPING CHANNEL CARRIER FREQUENCY SEPARATED

### 11.1 Standard Applicable

According to 15.247(a)(1), the frequency hopping system shall have hopping channel carrier frequencies separated by minimum of 25kHz or the 20dB bandwidth of hopping channel, whichever is greater.

### 11.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. The setup of the EUT as shown in figure 3. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any measurement frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set spectrum analyzer maximum hold to measure channel carrier frequency , then adjust channel carrier frequency to adjacent channel.
4. Repeat above procedure until all measured frequencies were complete.

### 11.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	Agilent	E4446A	09/30/2009

## 11.4 Measurement Data


### 11.4.1 Operation Mode: GFSK

Test Date : Jun. 12, 2009      Temperature : 28°C      Humidity : 59%

Channel	Frequency (MHz)	Hopping Channel Carrier Frequency Separated (MHz)	Chart
39	2441	1.025	Page 65

*Note: Please refer to page 65 for chart.*

File: BTM520 Data: #26 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 01:56:04 Humidity: 59 %

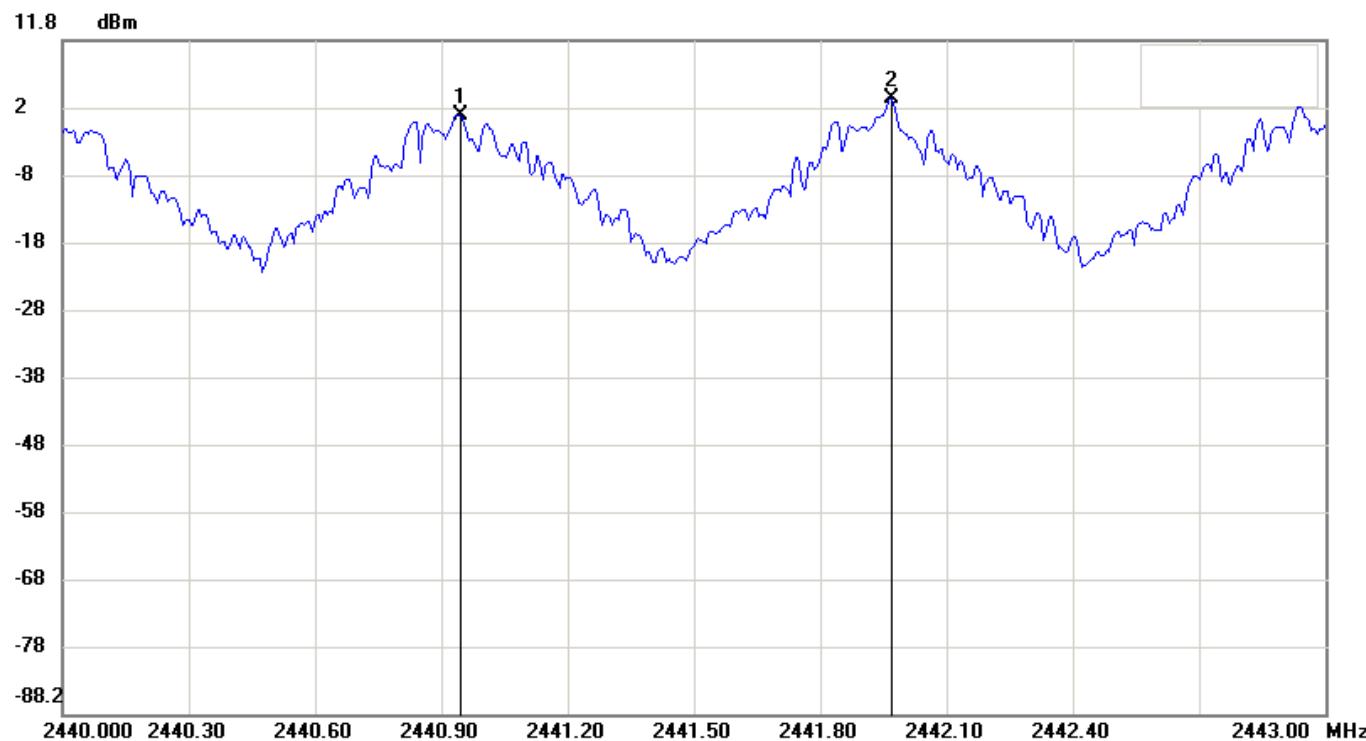

**Condition:** Horizontal  
**EUT:** Bluetooth Module **Sweep Time:** 3.2ms **Att.:** 20dB  
**Model:** BTM521 **RBW:** 30 KHz **VBW:** 100 KHz  
**Test Mode:**  
**Note:** FCC-Bluetooth Carrier Frequency Separation

No.	Frequency(MHz)	Level(dBm)
1	2440.9450	0.63
2	2441.9700	3.12

No.		△Frequency(MHz)	△Level(dB)
1	mk2-mk1	1.025	2.49


#### 11.4.2 Operation Mode: 8DPSK

Test Date : Jun. 12, 2009      Temperature : 28°C      Humidity : 59%

Channel	Frequency (MHz)	Hopping Channel Carrier Frequency Separated (MHz)	Chart
39	2441	1.070	Page 67

*Note: Please refer to page 67 for chart.*

File: BTM520 Data: #57 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 02:46:18 Humidity: 59 %

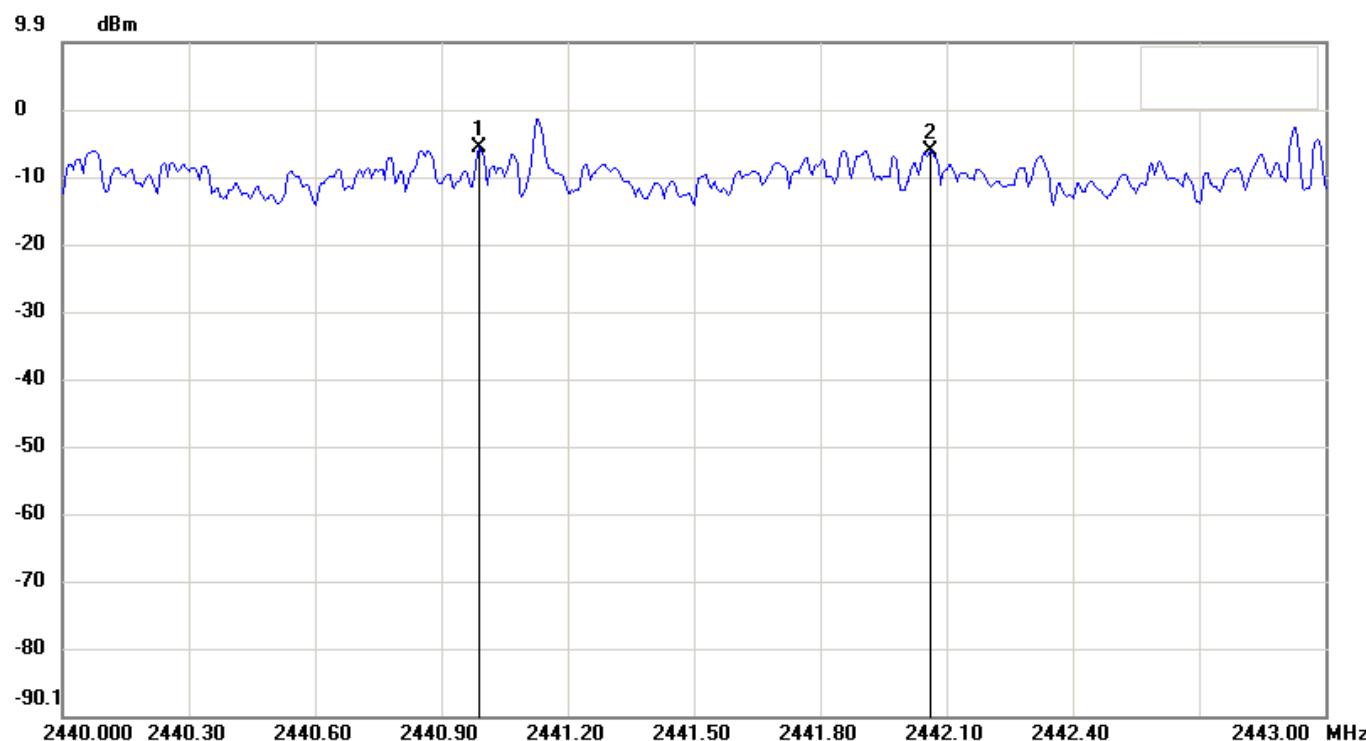

**Condition:** Horizontal  
**EUT:** Bluetooth Module **Sweep Time:** 3.2ms **Att.:** 10dB  
**Model:** BTM521 **RBW:** 30 KHz **VBW:** 100 KHz  
**Test Mode:**  
**Note:** FCC-Bluetooth Carrier Frequency Separation

No.	Frequency(MHz)	Level(dBm)
1	2440.9900	-5.83
2	2442.0600	-6.27

No.		△Frequency(MHz)	△Level(dB)
1	mk2-mk1	1.07	-0.44

## 12 Dwell Time

### 12.1 Standard Applicable

According to 15.247(a)(1)(iii), frequency hopping system in the 2400-2483.5MHz band employing at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 second multiplied by the number of hopping channels employed.

### 12.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. The setup of the EUT as shown in figure 3.

### 12.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	Agilent	E4446A	09/30/2009

### 12.4 Measurement Data

Test Date : Jun. 12, 2009      Temperature : 28°C      Humidity : 59%


#### 12.4.1 DH1

Test period=0.4(second/channel)  $\times$  79 channel=31.6sec

2402MHz dwell time= 415.0 us  $\times$  340 = 141.1 ms

**Note:** Please refer to page 69 to page 70 for chart.

File: BTM520 Data: #52 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 02:38:36 Humidity: 59 %

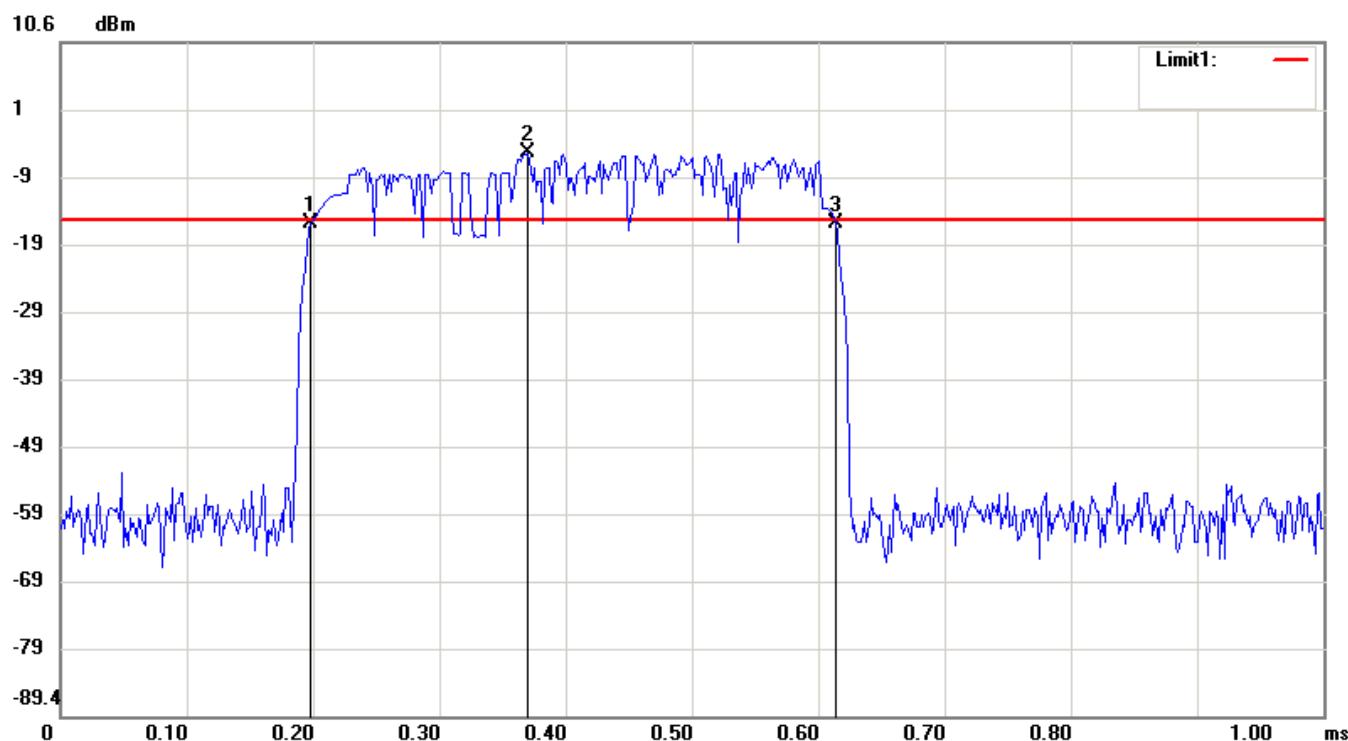


Condition: -15.76dBm Horizontal  
EUT: Bluetooth Module Sweep Time: 1ms Att.: 20dB  
Model: BTM521 RBW: 1000 KHz VBW: 1000 KHz  
Test Mode:  
Note: DH1 pulse width

No.	Sweep time(ms)	Level(dBm)
1	0.1983	-16.24
2	0.3700	-5.76
3	0.6133	-16.11

No.		ΔTime(ms)	ΔLevel(dB)
1	mk3-mk1	0.415	0.13

File: BTM520 Data: #51 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 02:38:19 Humidity: 59 %

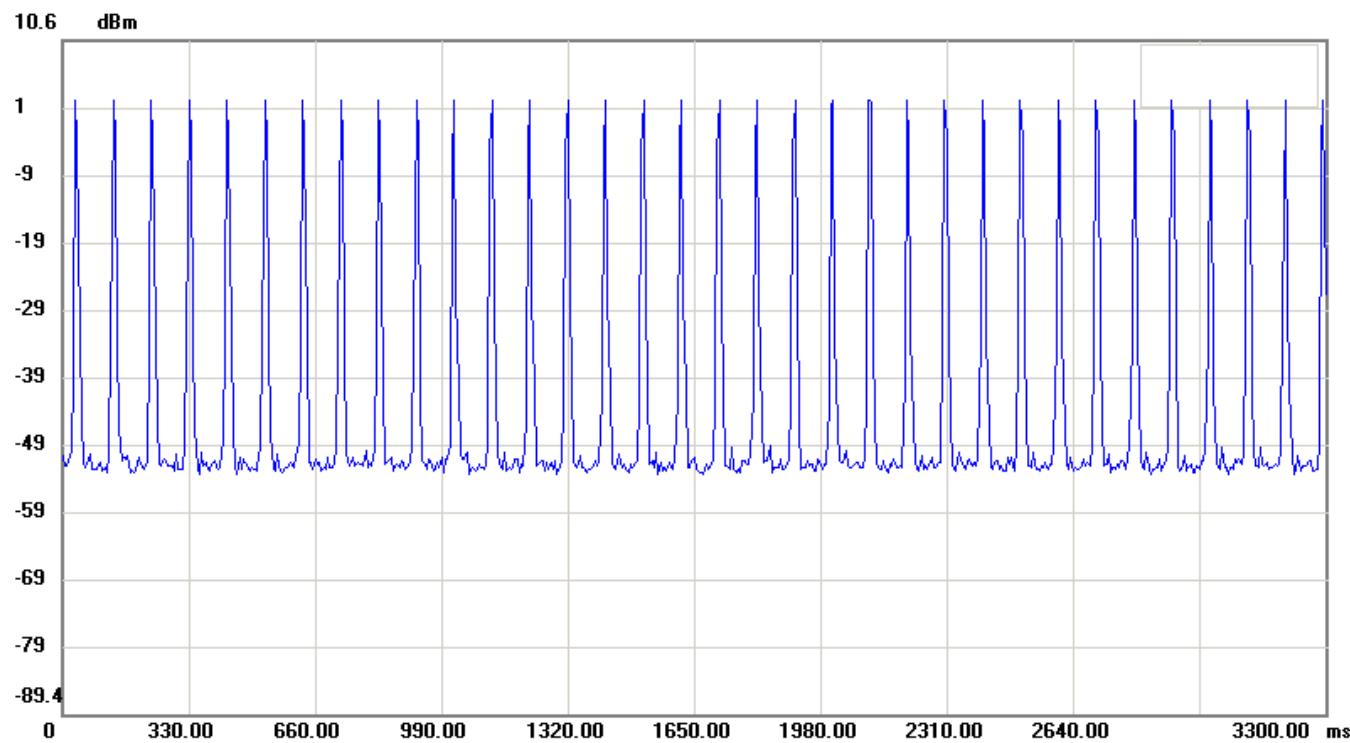

**Condition:**

**EUT:** Bluetooth Module

**Model:** BTM521

**Test Mode:**

**Note:** DH1 Hops per 3.16 seconds

**Horizontal**

**Sweep Time:** 3300ms **Att.:** 20dB

**RBW:** 1000 KHz **VBW:** 1000 KHz


### 12.4.2 DH3

Test period=0.4(second/channel)  $\times$  79 channel=31.6sec

2441MHz dwell time= 1.670 ms  $\times$  170 = 283.9 ms

***Note: Please refer to page 72 to page 73 for chart.***

File: BTM520 Data: #54 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 02:39:52 Humidity: 59 %

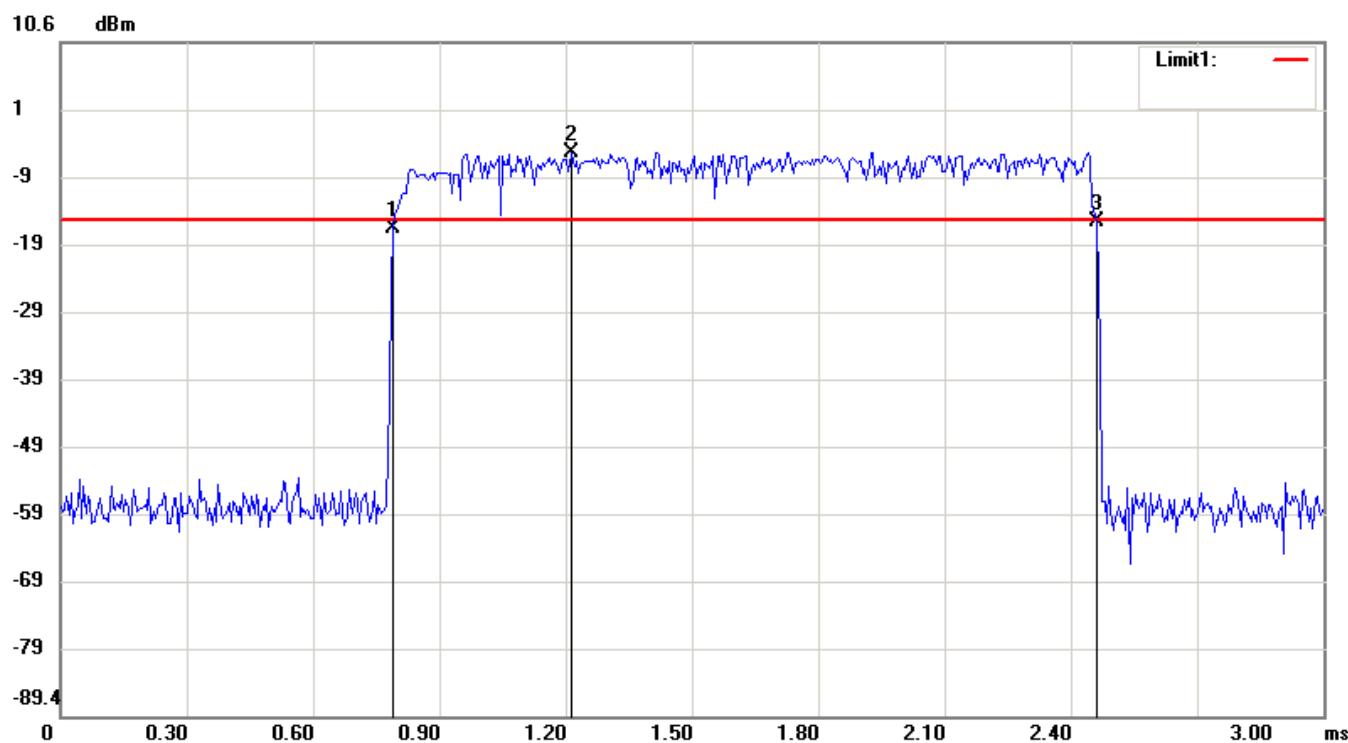


Condition: -15.73dBm Horizontal  
EUT: Bluetooth Module Sweep Time: 3ms Att.: 20dB  
Model: BTM521 RBW: 1000 KHz VBW: 1000 KHz  
Test Mode:  
Note: DH3 pulse width

No.	Sweep time(ms)	Level(dBm)
1	0.7900	-17.07
2	1.2150	-5.73
3	2.4600	-16.09

No.		ΔTime(ms)	ΔLevel(dB)
1	mk3-mk1	1.67	0.98

File: BTM520 Data: #53 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 02:39:35 Humidity: 59 %

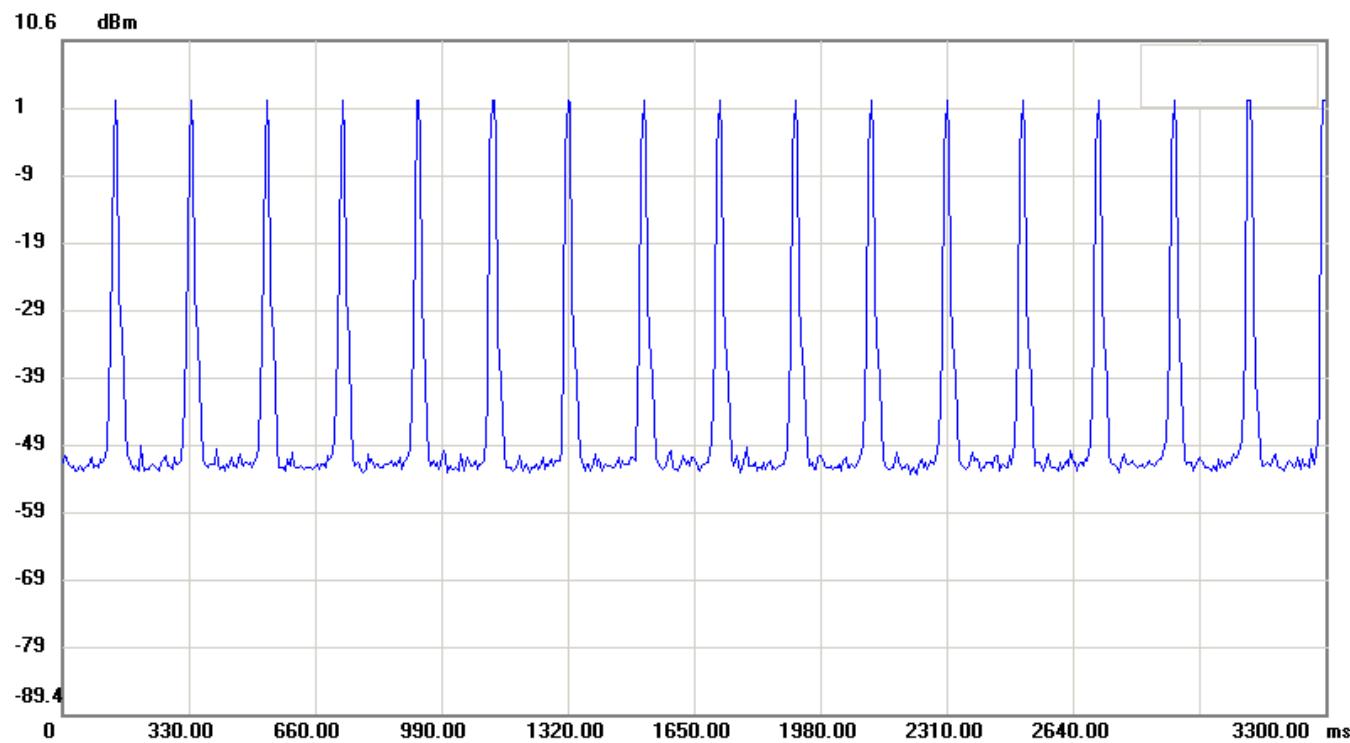

**Condition:**

**EUT:** Bluetooth Module

**Model:** BTM521

**Test Mode:**

**Note:** DH3 Hops per 3.16 seconds

**Horizontal**

**Sweep Time:** 3300ms **Att.:** 20dB

**RBW:** 1000 KHz **VBW:** 1000 KHz


### 12.4.3 DH5

Test period=0.4(second/channel)  $\times$  79 channel=31.6sec

2480MHz dwell time=  $2.925 \text{ ms} \times 110 = 321.8 \text{ ms}$

*Note: Please refer to page 75 to page 76 for chart.*

File: BTM520 Data: #25 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 01:55:04 Humidity: 59 %

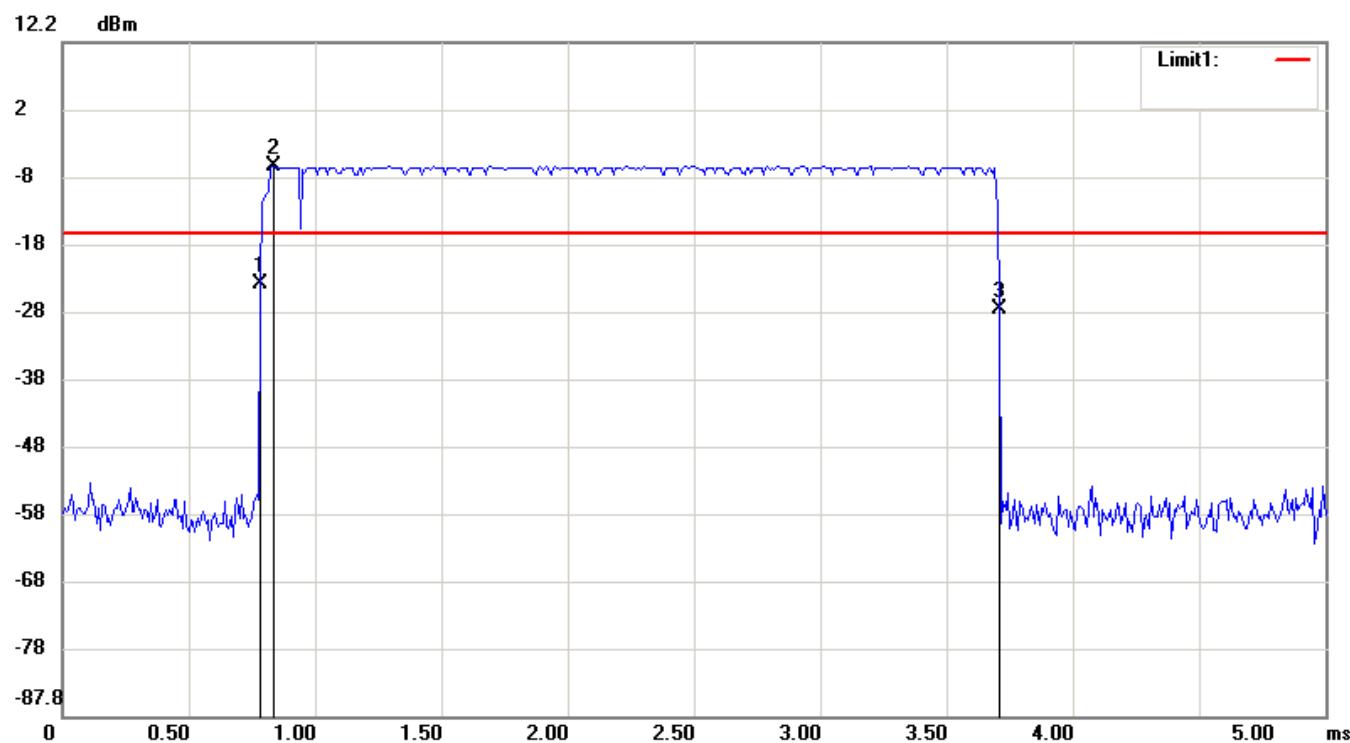


Condition: -16.22dBm Horizontal  
EUT: Bluetooth Module Sweep Time: 5ms Att.: 20dB  
Model: BTM521 RBW: 1000 KHz VBW: 1000 KHz  
Test Mode:  
Note: DH5 pulse width

No.	Sweep time(ms)	Level(dBm)
1	0.7833	-23.56
2	0.8333	-6.22
3	3.7083	-27.34

No.		ΔTime(ms)	ΔLevel(dB)
1	mk3-mk1	2.925	-3.78

File: BTM520 Data: #24 Date: 2009/6/12 Temperature: 28 °C  
Time: PM 01:54:46 Humidity: 59 %

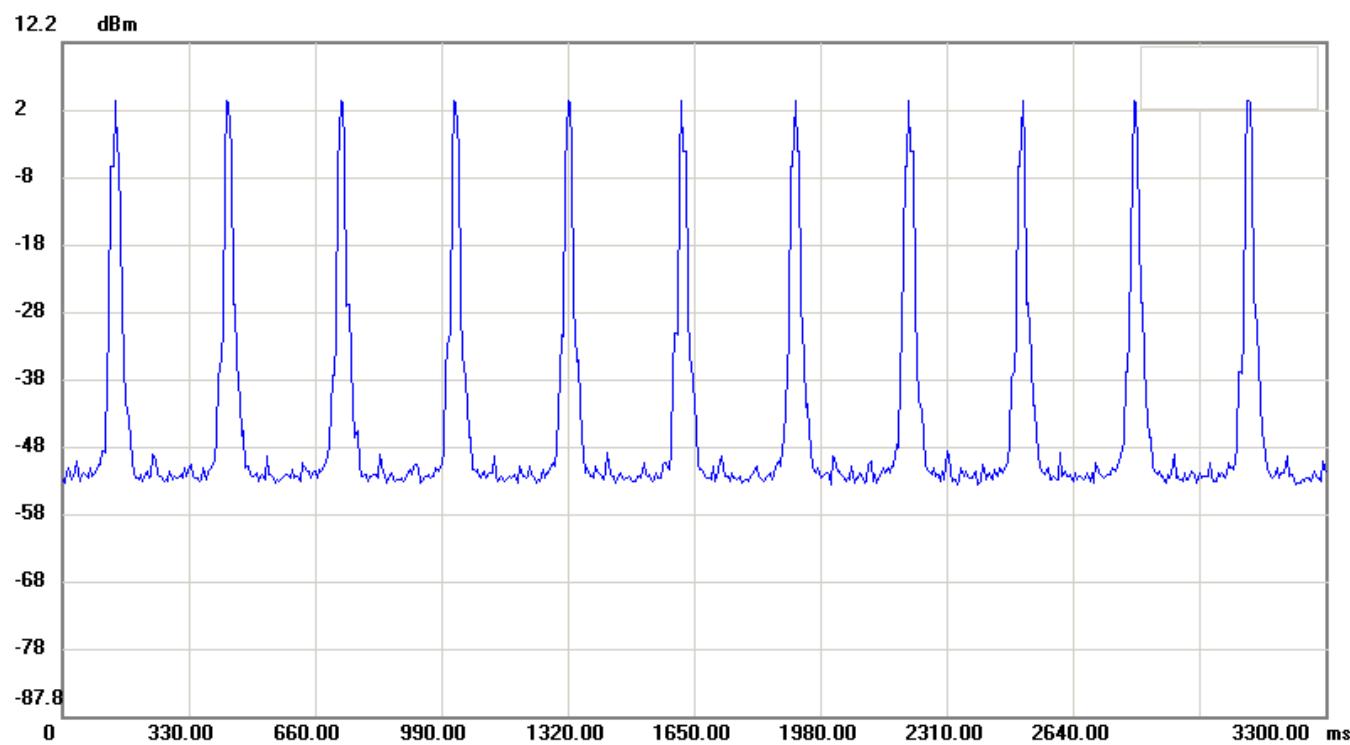

**Condition:**

**EUT:** Bluetooth Module

**Model:** BTM521

**Test Mode:**

**Note:** DH5 Hops per 3.16 seconds

**Horizontal**

**Sweep Time:** 3300ms **Att.:** 20dB

**RBW:** 1000 KHz **VBW:** 1000 KHz