

TEST REPORT

ACCORDING TO: FCC 47CFR part 96

FOR:

Airspan Networks Inc.

5G NR Base Station

Model: AirSpeed 2900, 5G, 3.55-3.7GHz (n48)

FCC ID: PIDAS2900

This report is in conformity with ISO/IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details	3
5	Tests summary	4
6	EUT description	5
6.1	General information	5
6.2	Ports and lines	5
6.3	Support and test equipment	5
6.4	Changes made in the EUT	5
6.5	Test configuration	6
6.6	Transmitter characteristics	7
7	Transmitter tests according to 47CFR part 96	8
7.1	Peak output power test	8
7.2	Peak-to-average power ratio (PAPR) test	37
7.3	Occupied bandwidth test	49
7.4	Emission mask test	64
7.5	Radiated spurious emission measurements	94
7.6	Spurious emissions at RF antenna connector test	106
7.7	Frequency stability test	162
8	APPENDIX A Test equipment and ancillaries used for tests	164
9	APPENDIX B Test equipment correction factors	166
10	APPENDIX C Measurement uncertainties	172
11	APPENDIX D Test laboratory description	173
12	APPENDIX E Specification references	173
13	APPENDIX F Abbreviations and acronyms	174

1 Applicant information

Client name: Airspan Networks Inc.
Address: 777 Yamato, Road Suite 310 Boca Raton, FL 33431, USA
Telephone: +1 561 893 8670
Fax: +1 561 893 8671
E-mail: zlevi@airspan.com
Contact name: Mr. Zion Levi

2 Equipment under test attributes

Product name: 5G NR Base Station
Product type: Transceiver
Model(s): AirSpeed 2900, 5G, 3.55-3.7GHz (n48)
Serial number: ED0A5A0163BE
Hardware version: 08
Software release: SR19.00
Receipt date 28-Oct-21

3 Manufacturer information

Manufacturer name: Airspan Networks Inc.
Address: 777 Yamato, Road Suite 310 Boca Raton, FL 33431, USA
Telephone: +1 561 893 8670
Fax: +1 561 893 8671
E-Mail: zlevi@airspan.com
Contact name: Mr. Zion Levi

4 Test details

Project ID: 44746
Location: Hermon Laboratories Ltd. P.O. Box 23, Binyamina 3055001, Israel
Test started: 01-Nov-21
Test completed: 21-Nov-21
Test specification(s): FCC 47CFR part 96

5 Tests summary

Test	Status
Transmitter characteristics	
Section 96.41(b), Maximum EIRP and maximum power spectral density	Pass
Section 96.41(g), Peak-to- average power ratio	Pass
Section 2.1049, Occupied bandwidth	Pass
Section 96.41(e), Emission mask	Pass
Section 96.41(e)(2), Radiated spurious emissions	Pass
Section 96.41(e)(3), Conducted spurious emissions	Pass
Section 2.1055, Frequency stability	Pass

This test report supersedes the previously issued test report identified by Doc ID: AIRRAD_FCC.44746

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mr. A. Morozov, test engineer, EMC & Radio	01-Nov-21 – 21-Nov-21	
Reviewed by:	Mrs. S. Peysahov Sheynin, test engineer, EMC & Radio	24-Nov-21	
Approved by:	Mr. S. Samokha, technical manager, EMC & Radio	24-Nov-21	

6 EUT description

Note: The following data in this clause is provided by the customer and represents his sole responsibility

6.1 General information

EUT is a Mobile Digital station, AirSpeed 2900 3550-3700MHz (N48), is part of a 5G broadband fixed cellular wireless access system. The system provides a radio link between an end-user (a subscriber) and a network to give high-speed data access. The AirSpeed 2900's transceiver/receiver (Up to 256 QAM modulation, data rate up to 190 Mbps) equipped with a 17dBi External antenna. Advanced Antenna Techniques 2x2 MIMO are supported. The maximum RF output power (not including antenna gain) is 33.00 dBm for 17dBi and it can be reduced by software.

The AirSpeed is installed outdoors. The Subscriber transmits and receives traffic to and from the base station respectively. The transceiver provides subscribers with "always-on" Internet, high speed data only, or data and voice (VoIP) services and is configured with a unique base station reference number, preventing the 5G UE from relocating to another subscriber premises without authorization.

Note: AirSpeed 2900 equipment defined as Category B CBSD (Citizens Broadband Radio Service Device) per FCC part 96 section 96.3(2).

Antennas 1/2 arrange one sector while antenna 1 is cross polarized to antenna 2 and antennas 3/4 arrange another sector while antenna 3 is cross polarized to antenna 4. The transmitter output signals are completely uncorrelated.

The sectors are either non overlapping by operation on different frequency channels or by different sectors coverage without overlapping of antenna beams."

6.2 Ports and lines

Port type	Port description	Connected from	Connected to	Qty.	Cable type	Cable length, m
Power	DC power	EUT	AC/DC adapter	1	Unshielded	20
Signal	Ethernet	EUT	Laptop	1	Shielded	20
Signal*	Serial*	Not connected	Not connected	1	NA	NA
Signal	Optic Port	EUT	Laptop	1	Unshielded	20
Signal	GPS	EUT	NA	1	NA	NA

*for maintenance only


6.3 Support and test equipment

Description	Manufacturer	Model number	Serial number
Laptop	Dell	E7450	8TYRP32
USB to RS-232 convertor	ATEN	UC2324	NA
AC/DC adapter	MW	PSP-600-48	NA
SFP adapter	Finisar	FTLF1318P3BTL	NSE0AQC
GPS antenna	Tallysman	32-3010-0	01252012

6.4 Changes made in the EUT

No changes were implemented in the EUT during testing.

6.5 Test configuration

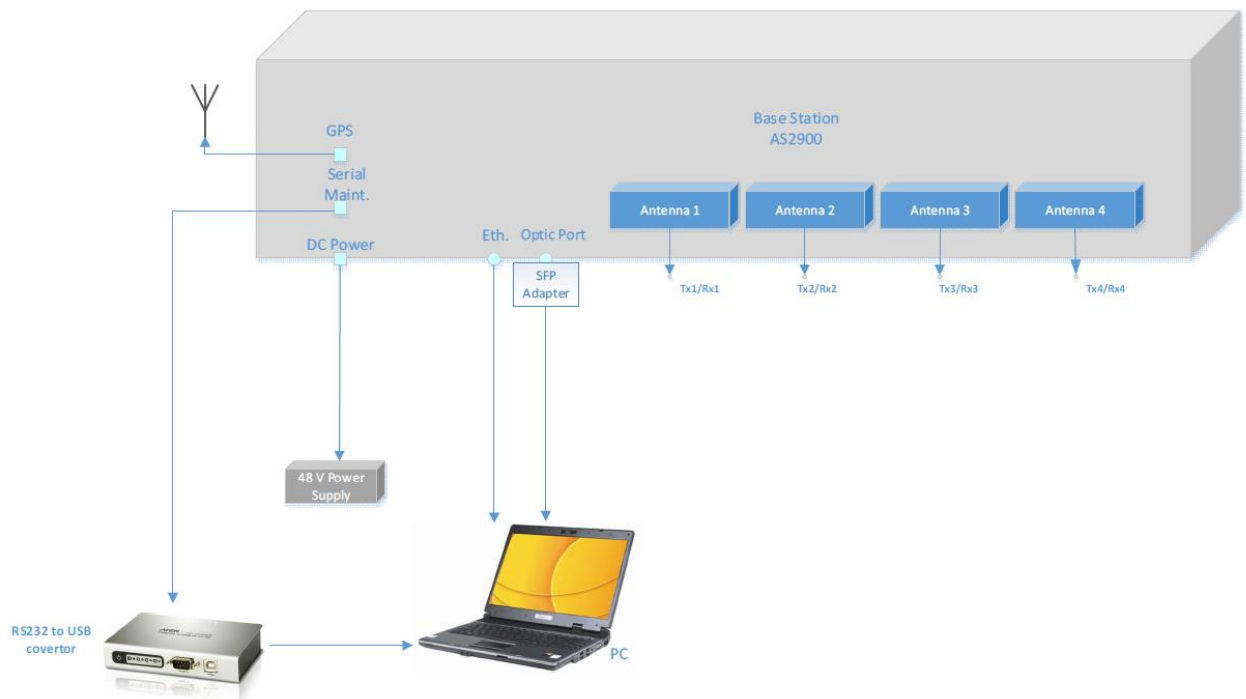

6.6 Transmitter characteristics

Type of equipment					
V	Stand-alone (Equipment with or without its own control provisions)				
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)				
	Plug-in card (Equipment intended for a variety of host systems)				
Intended use		Condition of use			
V	fixed	Always at a distance more than 2 m from all people			
	mobile	Always at a distance more than 20 cm from all people			
	portable	May operate at a distance closer than 20 cm to human body			
Assigned frequency range		3550.0 – 3700.0 MHz			
Operating frequency (full bands)		3560.0 – 3690.0 MHz			
RF channel spacing		20 MHz, 40 MHz			
Maximum rated output power		At transmitter 50 Ω RF output connector (per port)		33.00 dBm	
Is transmitter output power variable?		No			
		V	Yes	continuous variable	
				stepped variable with step size	0.25 dB
				minimum RF power	-30 dBm
		maximum RF power at antenna connector			dBm
Antenna connection					
unique coupling	V	standard connector	Integral	V with temporary RF connector without temporary RF connector	
Antenna/s technical characteristics					
Type	Manufacturer		Model number	Gain	
External	ALPHA		AN1003-R2	17 dBi	
Transmitter aggregate data rate/s, Mbps					
Transmitter 26dBc power bandwidth		Type of modulation			
		QPSK	16QAM	64QAM	256QAM
20 MHz		23.4	45.4	95.0	143.0
40 MHz		46.8	90.8	190.0	285.0
Type of multiplexing		TDD			
Modulating test signal (baseband)		PRBS			
Maximum transmitter duty cycle in normal use		0.74			
Transmitter power source					
		Nominal rated voltage		Battery type	
V	DC	Nominal rated voltage	48 VDC		
	AC mains	Nominal rated voltage		Frequency	
Common power source for transmitter and receiver		V	yes		no



Test specification:		Section 96.41(b), Maximum EIRP and maximum power spectral density	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

7 Transmitter tests according to 47CFR part 96

7.1 Peak output power test

7.1.1 General

This test was performed to measure the maximum EIRP and maximum spectral power density at the transmitter RF antenna connector. Specification test limits are given in Table 7.1.1, Table 7.1.2.

Table 7.1.1 Maximum EIRP limits

Assigned frequency range, MHz	EIRP
	dBm/10 MHz
3550 - 3700	47.0

Table 7.1.2 Peak spectral power density limits

Assigned frequency range, MHz	Measurement bandwidth, MHz	Peak spectral power density, dBm
3550 - 3700	1.0	37.0

7.1.2 Test procedure


7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.

7.1.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.1.2.3 The frequency span of spectrum analyzer was set to capture the entire 6 dB band of the transmitter, in average mode with resolution bandwidth set to 1.0 MHz, video bandwidth wider than resolution bandwidth, sweep time and sufficient number of sweeps was allowed for trace stabilization.

7.1.2.4 Spectrum analyzer was set in average mode, sufficient number of sweeps was allowed for trace stabilization and peak spectral power density was measured as provided in Table 7.1.3, Table 7.1.4 and the associated plots.

Figure 7.1.1 Peak output power test setup

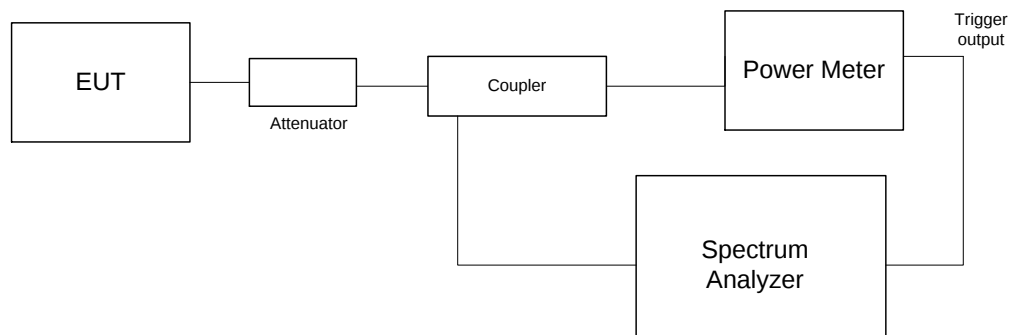



Test specification:		Section 96.41(b), Maximum EIRP and maximum power spectral density	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Table 7.1.3 Peak output power test results

ASSIGNED FREQUENCY RANGE:

3550.0 – 3700.0 MHz

DETECTOR USED:

Average (gated)

VIDEO BANDWIDTH:

≥ Resolution bandwidth

CHANNEL SPACING:

20 MHz

Frequency , MHz	RF Output power				Antenna gain, dBi	EIRP*, dBm/20 MHz	EIRP*, dBm/10 MHz	Limit, dBm/10 MHz	Margin, dB**	Verdict
	Chain RF#1, dBm	Chain RF#2, dBm	Chain RF#3, dBm	Chain RF#4, dBm						
Modulation QPSK										
3560.0	31.35	31.73	32.23	31.78	17.00	49.23	46.63	47.0	-0.37	Pass
3625.0	31.31	31.87	31.43	32.15	17.00	49.15	46.55	47.0	-0.45	Pass
3690.0	30.61	31.29	30.62	31.19	17.00	48.29	45.69	47.0	-1.31	Pass
Modulation 16QAM										
3560.0	31.25	31.48	32.19	31.75	17.00	49.19	46.59	47.0	-0.41	Pass
3625.0	31.62	31.55	31.71	31.63	17.00	48.71	46.11	47.0	-0.89	Pass
3690.0	30.75	31.19	31.10	31.09	17.00	48.19	45.59	47.0	-1.41	Pass
Modulation 64QAM										
3560.0	31.38	31.41	32.10	31.81	17.00	49.10	46.50	47.0	-0.50	Pass
3625.0	31.60	31.53	31.96	31.32	17.00	48.96	46.36	47.0	-0.64	Pass
3690.0	30.76	31.10	31.07	30.88	17.00	48.10	45.50	47.0	-1.50	Pass
Modulation 256QAM										
3560.0	31.25	31.96	32.13	31.82	17.00	49.13	46.53	47.0	-0.47	Pass
3625.0	31.32	31.41	31.90	31.12	17.00	48.90	46.30	47.0	-0.70	Pass
3690.0	30.70	30.96	30.71	30.65	17.00	47.96	45.36	47.0	-1.64	Pass

* - EIRP = Max SA reading (Chains #1&2 and #3&4) - 10*log[OBW(MHz) / 10 MHz] + Antenna gain =
Max SA reading – 2.6 dB + Antenna gain: The transmitter output signal are completely uncorrelated, antennas 1/2 is one sector and antennas 3/4 is another sector.

** - Margin = EIRP, dBm – specification limit.



Test specification:		Section 96.41(b), Maximum EIRP and maximum power spectral density	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Table 7.1.4 Peak output power test results

ASSIGNED FREQUENCY RANGE:

3550.0 – 3700.0 MHz

DETECTOR USED:

Average (gated)

VIDEO BANDWIDTH:

≥ Resolution bandwidth

CHANNEL SPACING:

40 MHz

Frequency , MHz	RF Output power				Antenna gain, dBi	EIRP*, dBm/40 MHz	EIRP*, dBm/10 MHz	Limit, dBm/10 MHz	Margin, dB**	Verdict
	Chain RF#1, dBm	Chain RF#2, dBm	Chain RF#3, dBm	Chain RF#4, dBm						
Modulation QPSK										
3570.0	32.44	32.78	32.40	33.00	17.0	50.00	44.23	47.0	-2.77	Pass
3625.0	32.40	32.37	32.48	32.80	17.0	49.80	44.03	47.0	-2.97	Pass
3680.0	31.10	31.60	31.27	31.60	17.0	48.60	42.83	47.0	-4.17	Pass
Modulation 16QAM										
3570.0	32.14	32.39	32.60	32.97	17.0	49.97	44.20	47.0	-2.80	Pass
3625.0	32.02	32.36	32.45	32.91	17.0	49.91	44.14	47.0	-2.86	Pass
3680.0	30.89	31.28	31.06	31.76	17.0	48.76	42.99	47.0	-4.01	Pass
Modulation 64QAM										
3570.0	32.18	32.73	32.21	32.97	17.0	49.70	43.93	47.0	-3.07	Pass
3625.0	32.15	32.35	32.49	32.89	17.0	49.89	44.12	47.0	-2.88	Pass
3680.0	30.80	31.73	31.06	31.72	17.0	48.73	42.96	47.0	-4.04	Pass
Modulation 256QAM										
3570.0	32.19	32.76	31.94	33.00	17.0	50.00	43.93	47.0	-3.07	Pass
3625.0	32.23	32.35	32.70	32.89	17.0	49.89	44.12	47.0	-2.88	Pass
3680.0	30.79	31.58	30.99	31.99	17.0	48.99	42.96	47.0	-4.04	Pass

*- EIRP = Max SA reading (Chains #1&2 and #3&4) - $10 \cdot \log[\text{OBW}(\text{MHz}) / 10 \text{ MHz}]$ + Antenna gain =

Max SA reading – 5.77 dB + Antenna gain: The transmitter output signal are completely uncorrelated, antennas 1/2 is one sector and antennas 3/4 is another sector.

** - Margin = EIRP, dBm – specification limit.



HERMON LABORATORIES

Report ID: AIRRAD_FCC.44746_Rev1

Date of Issue: 24-Nov-21

Test specification:		Section 96.41(b), Maximum EIRP and maximum power spectral density	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Table 7.1.5 Peak spectral power density test results

ASSIGNED FREQUENCY RANGE:

3550.0 – 3700.0 MHz

DETECTOR USED:

Average (gated)

VIDEO BANDWIDTH:

≥ Resolution bandwidth

NUMBER OF CHAINS:

4

Frequency, MHz	SA Reading, dBm/MHz				Antenna gain, dBi	Total PSD*, dBm/ MHz	Limit, dBm/MHz	Margin , dB	Verdi ct
	Chain RF#1,	Chain RF#2,	Chain RF#3,	Chain RF#4,					
Channel spacing 20 MHz									
Modulation QPSK									
3560.0	18.10	18.52	18.93	18.60	17.00	35.93	37.0	-1.07	Pass
3625.0	17.98	18.66	18.17	18.80	17.00	35.80	37.0	-1.20	Pass
3690.0	17.37	17.86	17.46	18.06	17.00	35.06	37.0	-1.94	Pass
Modulation 16QAM									
3560.0	18.08	18.34	18.98	18.59	17.00	35.98	37.0	-1.02	Pass
3625.0	18.43	18.37	18.51	18.41	17.00	35.51	37.0	-1.49	Pass
3690.0	17.53	18.01	17.92	18.14	17.00	35.14	37.0	-1.86	Pass
Modulation 64QAM									
3560.0	18.21	18.31	19.02	18.78	17.00	36.02	37.0	-0.98	Pass
3625.0	18.32	18.32	18.75	18.08	17.00	35.75	37.0	-1.25	Pass
3690.0	17.56	17.87	17.98	18.14	17.00	35.14	37.0	-1.86	Pass
Modulation 256QAM									
3560.0	18.08	18.85	18.90	18.67	17.00	35.90	37.0	-1.10	Pass
3625.0	18.06	18.20	18.74	17.95	17.00	35.74	37.0	-1.26	Pass
3690.0	17.40	17.71	17.60	17.99	17.00	34.99	37.0	-2.01	Pass

* - Total PSD = Max SA reading (Chains #1&2 or chains #3&4) + Antenna Gain: The transmitter output signal are completely uncorrelated, antennas 1/2 is one sector and antennas 3/4 is another sector.

** - Margin = Total PSD, dBm – specification limit.



HERMON LABORATORIES

Report ID: AIRRAD_FCC.44746_Rev1

Date of Issue: 24-Nov-21

Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Table 7.1.6 Peak spectral power density test results

ASSIGNED FREQUENCY RANGE:

3550.0 – 3700.0 MHz

DETECTOR USED:

Average (gated)

VIDEO BANDWIDTH:

≥ Resolution bandwidth

NUMBER OF CHAINS:

4

NUMBER OF CHAINS: 4

Frequency, MHz	SA Reading, dBm/MHz				Antenna gain, dBi	Total PSD*, dBm/ MHz	Limit, dBm/MHz	Margin , dB	Verdi ct
	Chain RF#1,	Chain RF#2,	Chain RF#3,	Chain RF#4,					
Channel spacing 40 MHz									
Modulation QPSK									
3570.0	16.33	16.60	16.69	15.93	17.0	33.69	37.0	-3.31	Pass
3625.0	16.16	16.37	16.45	16.51	17.0	33.51	37.0	-3.49	Pass
3680.0	14.30	15.09	14.76	15.07	17.0	32.09	37.0	-4.91	Pass
Modulation 16QAM									
3570.0	16.27	16.40	16.50	17.08	17.0	34.08	37.0	-2.92	Pass
3625.0	16.00	16.51	16.56	16.74	17.0	33.74	37.0	-3.26	Pass
3680.0	14.09	14.84	14.70	15.34	17.0	32.34	37.0	-4.66	Pass
Modulation 64QAM									
3570.0	16.30	16.84	16.12	17.15	17.0	34.15	37.0	-2.85	Pass
3625.0	16.14	16.47	16.58	16.75	17.0	33.75	37.0	-3.25	Pass
3680.0	14.10	15.38	14.69	15.33	17.0	32.38	37.0	-4.62	Pass
Modulation 256QAM									
3570.0	16.34	16.88	15.85	17.13	17.0	34.13	37.0	-2.87	Pass
3625.0	16.20	16.37	16.72	16.71	17.0	33.72	37.0	-3.28	Pass
3680.0	14.18	15.24	14.65	15.60	17.0	32.60	37.0	-4.40	Pass

* - Total PSD = Max SA reading (Chains #1&2 or chains #3&4) + Antenna Gain: The transmitter output signal are completely uncorrelated, antennas 1/2 is one sector and antennas 3/4 is another sector.

** - Margin = Total PSD, dBm – specification limit.

Reference numbers of test equipment used

HL 3301	HL 4355	HL 4366	HL 5643	HL 5409	HL 5636	HL 5637	HL 5642
---------	---------	---------	---------	---------	---------	---------	---------

Full description is given in Appendix A.



HERMON LABORATORIES

Report ID: AIRRAD_FCC.44746_Rev1

Date of Issue: 24-Nov-21

Test specification:		Section 96.41(b), Maximum EIRP and maximum power spectral density	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.1 Peak spectral power density at low frequency

CHANNEL SPACING:



ANTENNA CHAIN:

Modulation: QPSK


20 MHz

1


Modulation: 16QAM

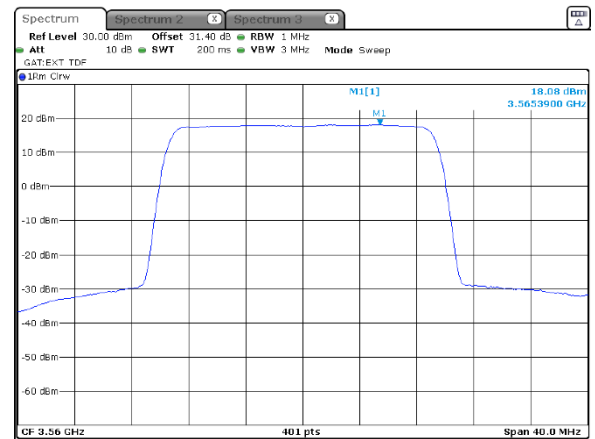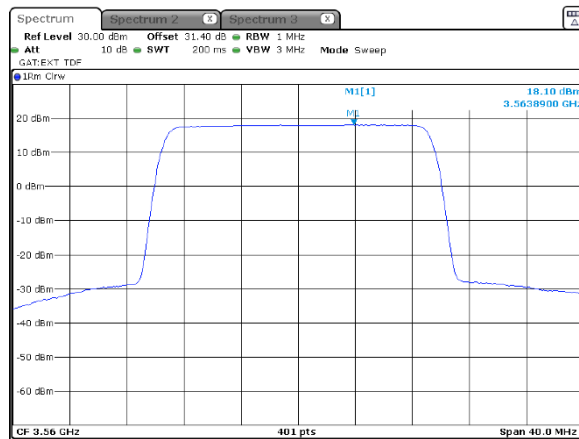

Modulation: 64QAM

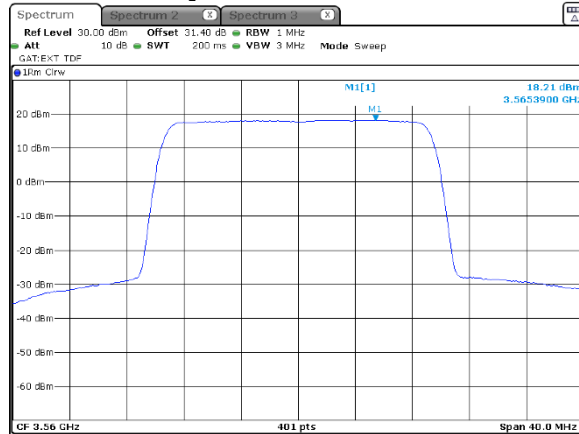

Modulation: 256QAM

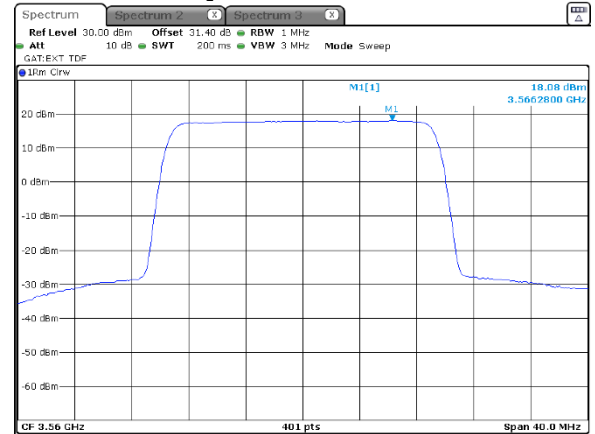



HERMON LABORATORIES

Report ID: AIRRAD_FCC.44746_Rev1

Date of Issue: 24-Nov-21


Test specification:		Section 96.41(b), Maximum EIRP and maximum power spectral density	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.2 Peak spectral power density at low frequency

CHANNEL SPACING:

ANTENNA CHAIN:


Modulation: QPSK

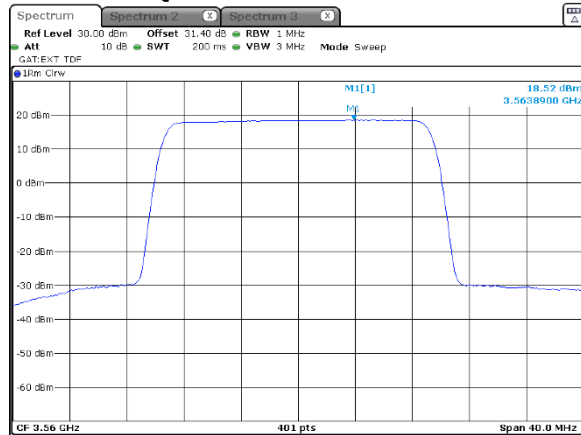


20 MHz

2


Modulation: 16QAM

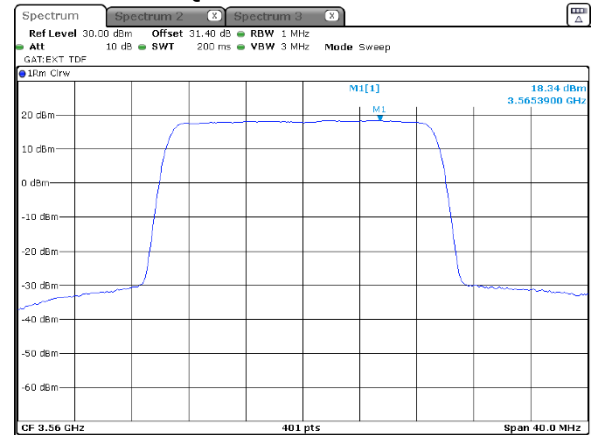

Modulation: 64QAM

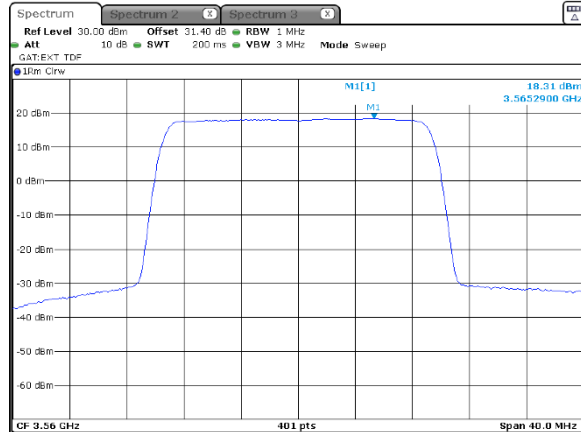

Modulation: 256QAM

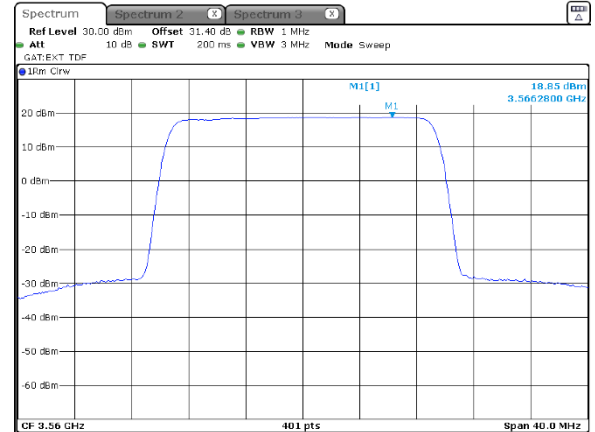



HERMON LABORATORIES

Report ID: AIRRAD_FCC.44746_Rev1

Date of Issue: 24-Nov-21


Test specification:		Section 96.41(b), Maximum EIRP and maximum power spectral density	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.3 Peak spectral power density at low frequency

CHANNEL SPACING:

ANTENNA CHAIN:


Modulation: QPSK

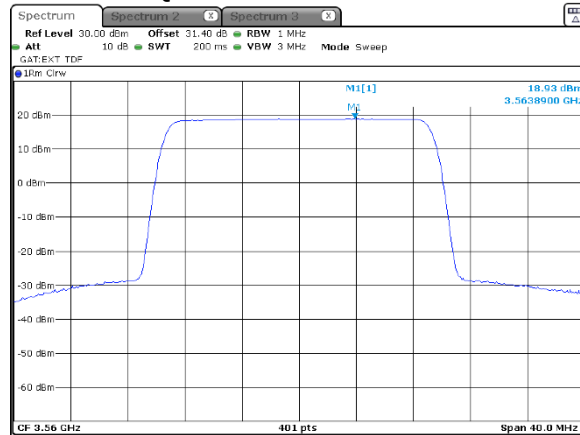


20 MHz

3


Modulation: 16QAM

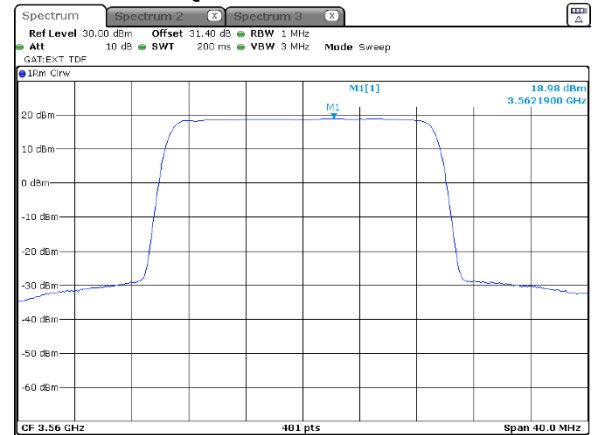

Modulation: 64QAM

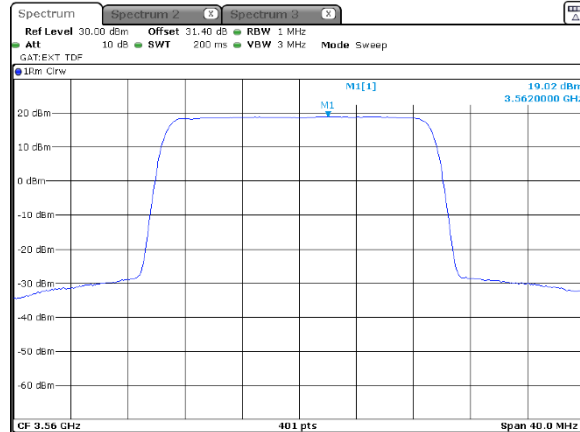

Modulation: 256QAM

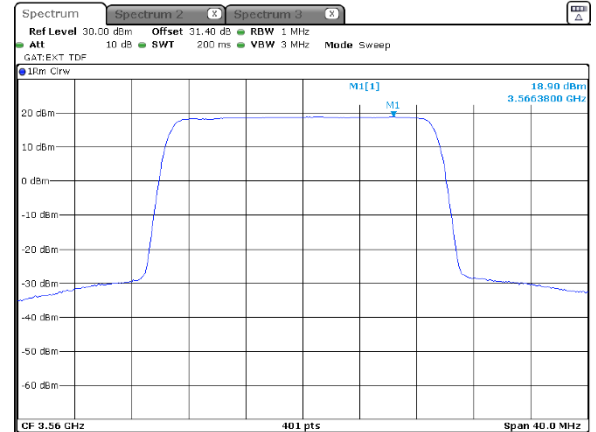



HERMON LABORATORIES

Report ID: AIRRAD_FCC.44746_Rev1

Date of Issue: 24-Nov-21


Test specification:		Section 96.41(b), Maximum EIRP and maximum power spectral density	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.4 Peak spectral power density at low frequency

CHANNEL SPACING:

ANTENNA CHAIN:


Modulation: QPSK

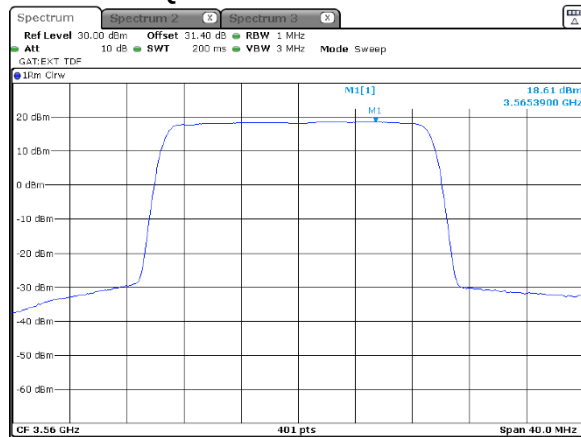


20 MHz

4


Modulation: 16QAM

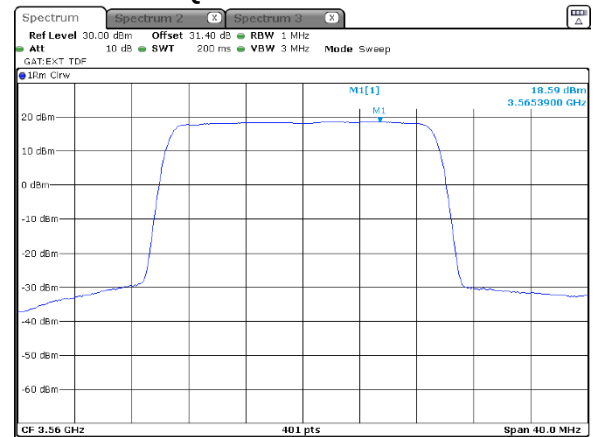

Modulation: 64QAM

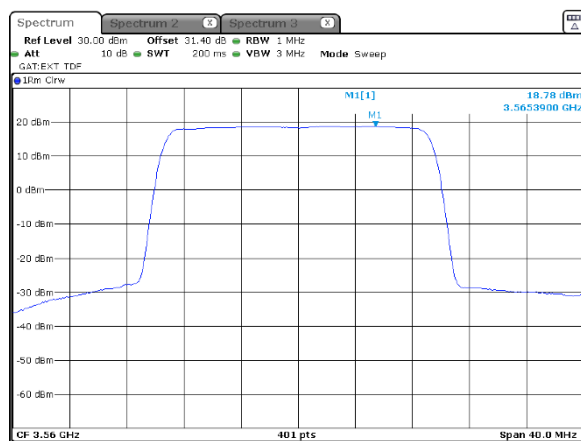

Modulation: 256QAM

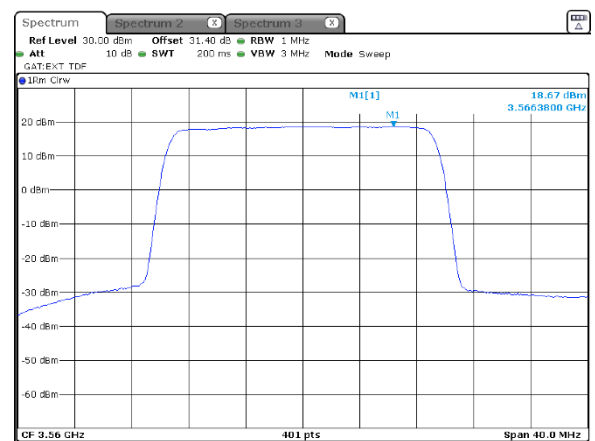




HERMON LABORATORIES

Report ID: AIRRAD_FCC.44746_Rev1
Date of Issue: 24-Nov-21


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.5 Peak spectral power density at mid frequency


CHANNEL SPACING:
ANTENNA CHAIN:
Modulation: QPSK

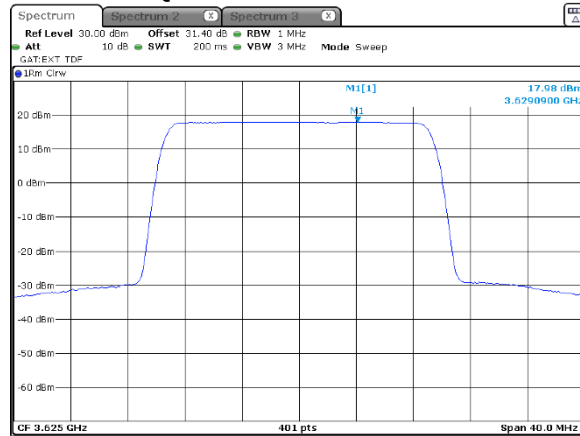


Modulation: 64QAM

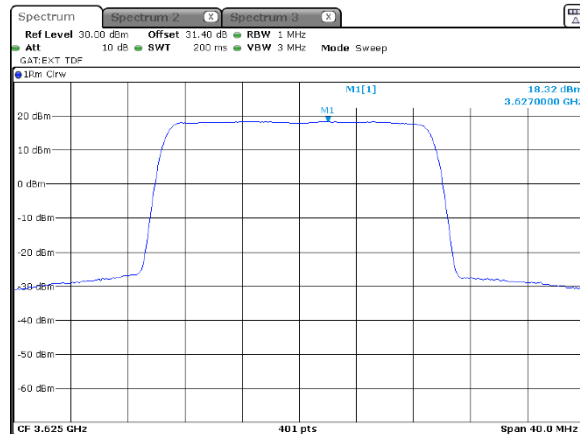

20 MHz
1
Modulation: 16QAM

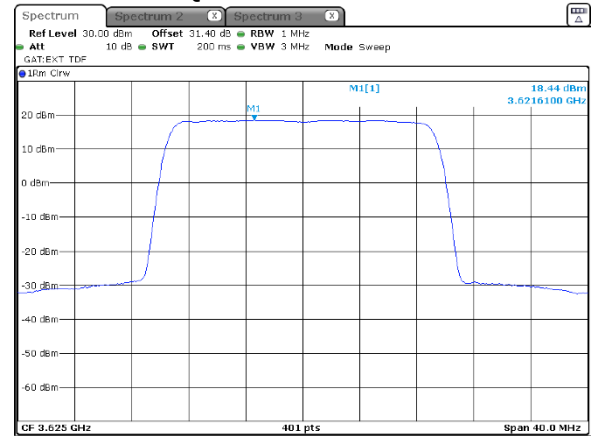

Modulation: 256QAM

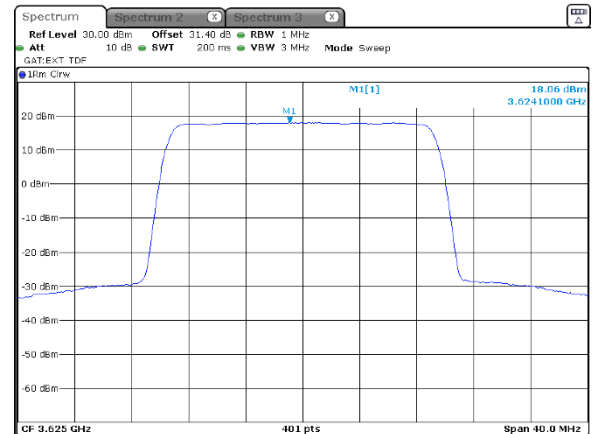




HERMON LABORATORIES

Report ID: AIRRAD_FCC.44746_Rev1
Date of Issue: 24-Nov-21


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.6 Peak spectral power density at mid frequency


CHANNEL SPACING:
ANTENNA CHAIN:
Modulation: QPSK

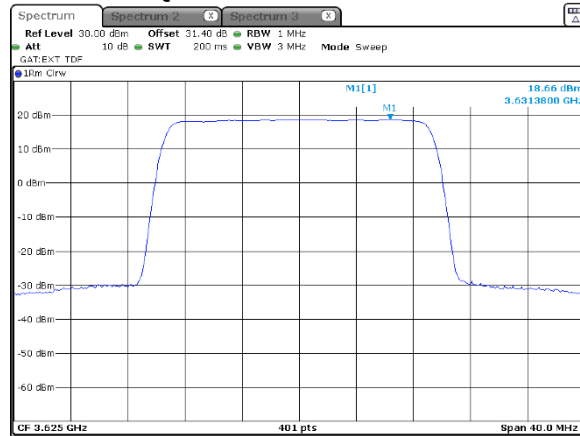


Modulation: 64QAM

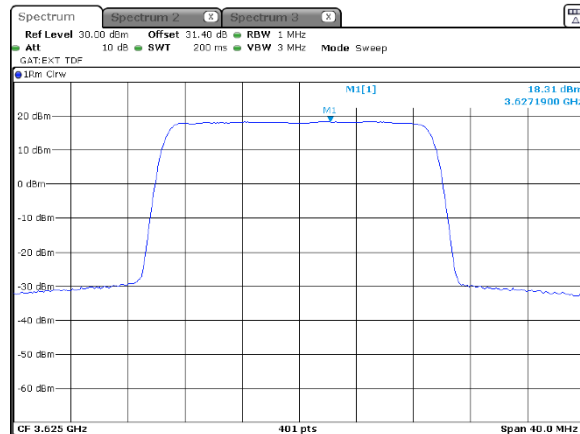

20 MHz
2
Modulation: 16QAM

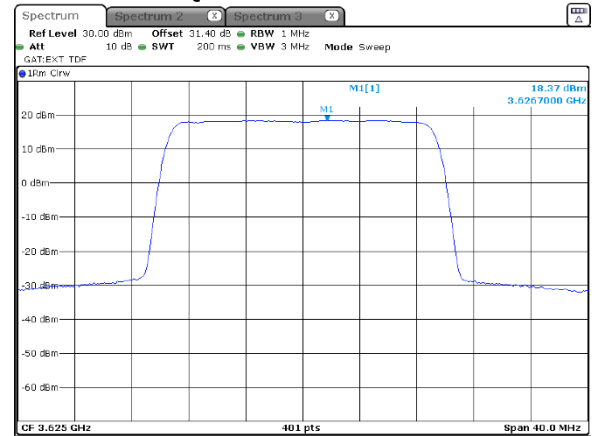

Modulation: 256QAM

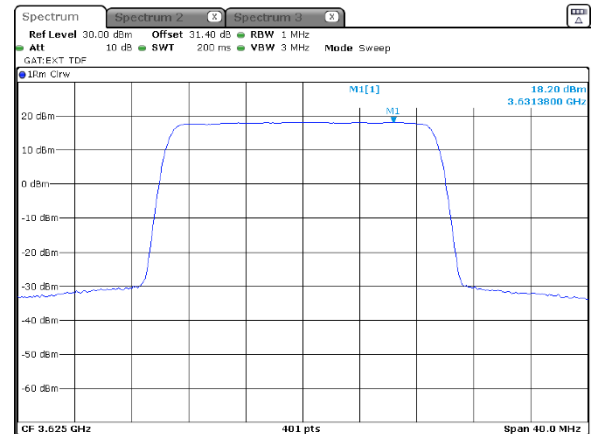



HERMON LABORATORIES

Report ID: AIRRAD_FCC.44746_Rev1
Date of Issue: 24-Nov-21


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.7 Peak spectral power density at mid frequency


CHANNEL SPACING:

ANTENNA CHAIN:

Modulation: QPSK

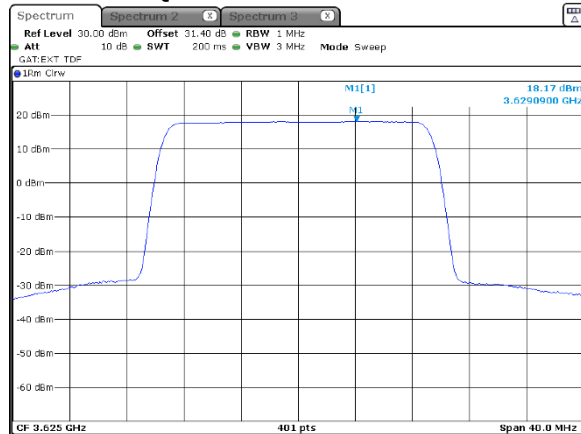


Modulation: 64QAM

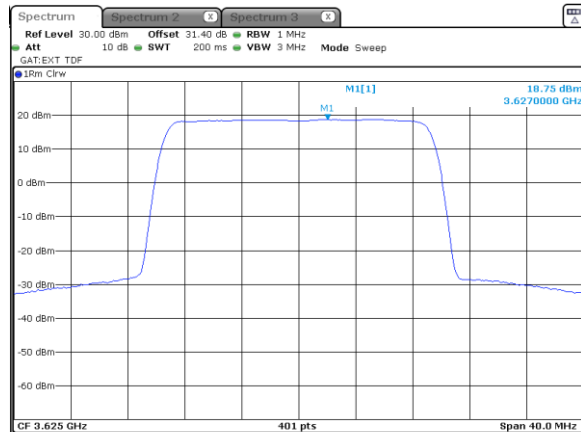


20 MHz

3

Modulation: 16QAM

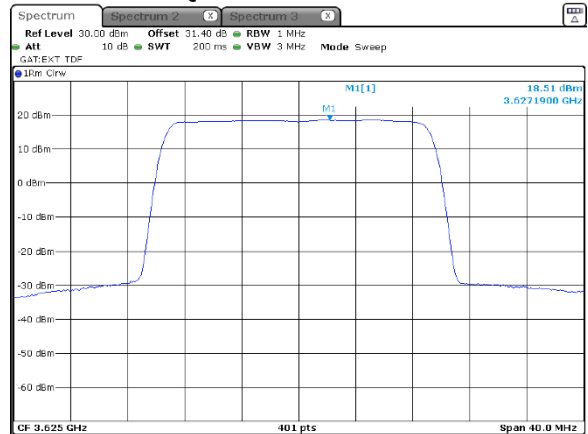

Modulation: 256QAM

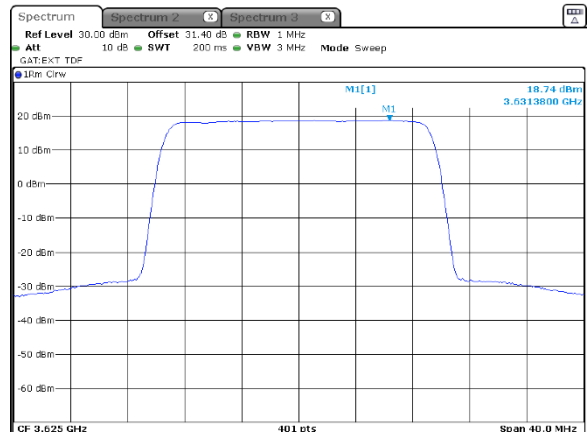



HERMON LABORATORIES

Report ID: AIRRAD_FCC.44746_Rev1

Date of Issue: 24-Nov-21


Test specification:		Section 96.41(b), Maximum EIRP and maximum power spectral density	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.8 Peak spectral power density at mid frequency


CHANNEL SPACING:

ANTENNA CHAIN:

Modulation: QPSK

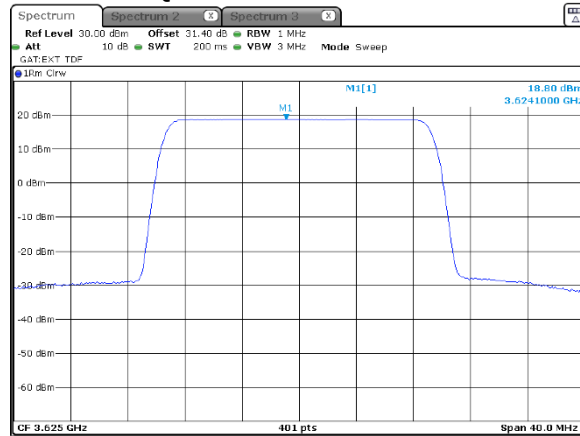


Modulation: 64QAM

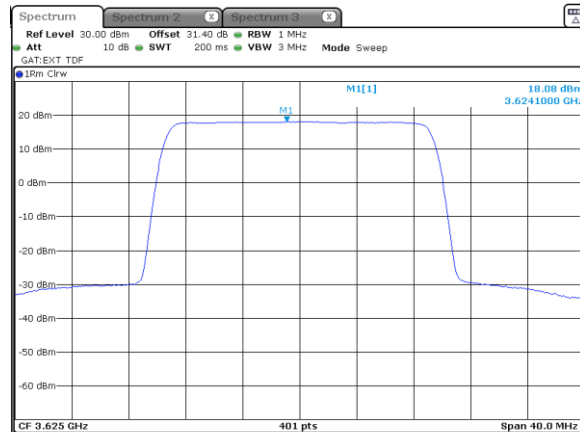


20 MHz

4

Modulation: 16QAM

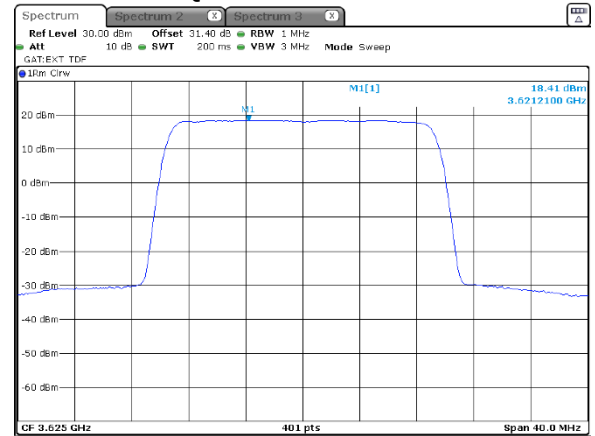

Modulation: 256QAM

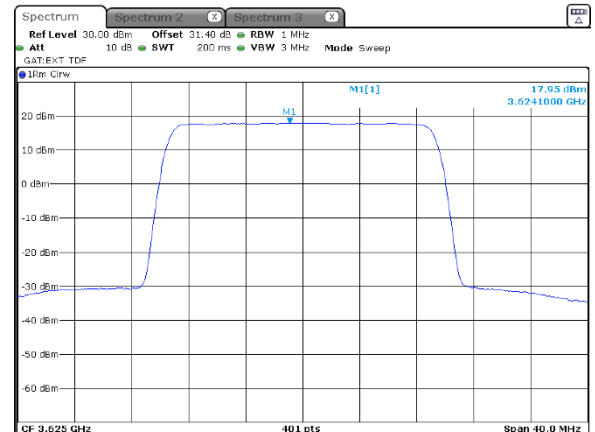



HERMON LABORATORIES


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.9 Peak spectral power density at high frequency

CHANNEL SPACING:

ANTENNA CHAIN:


Modulation: QPSK

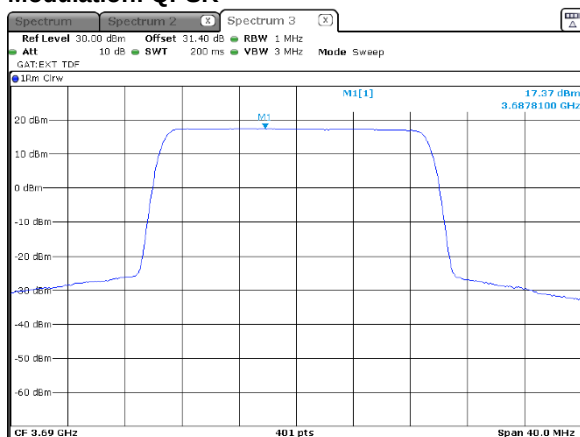


20 MHz

1


Modulation: 16QAM

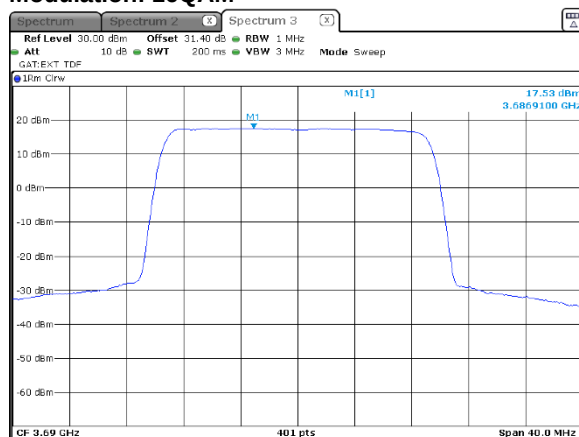

Modulation: 64QAM

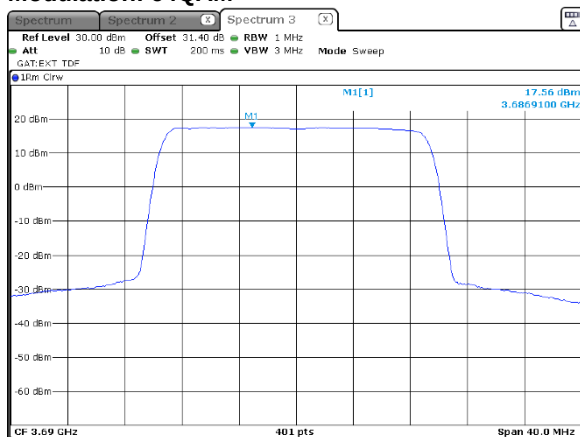

Modulation: 256QAM

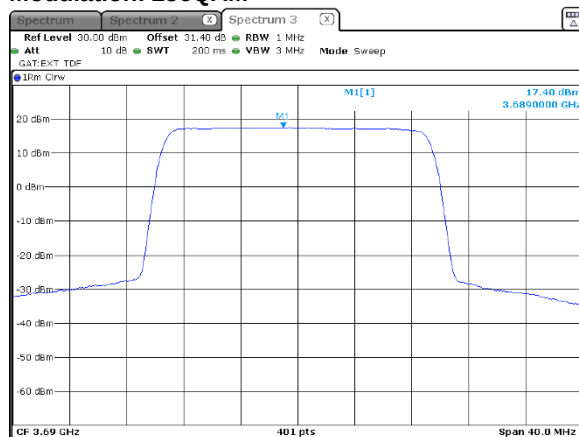



HERMON LABORATORIES

Report ID: AIRRAD_FCC.44746_Rev1

Date of Issue: 24-Nov-21


Test specification:		Section 96.41(b), Maximum EIRP and maximum power spectral density	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.10 Peak spectral power density at high frequency

CHANNEL SPACING:

ANTENNA CHAIN:


Modulation: QPSK

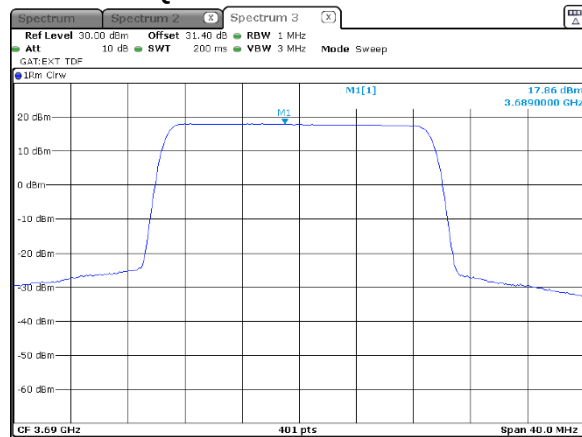


20 MHz

2


Modulation: 16QAM

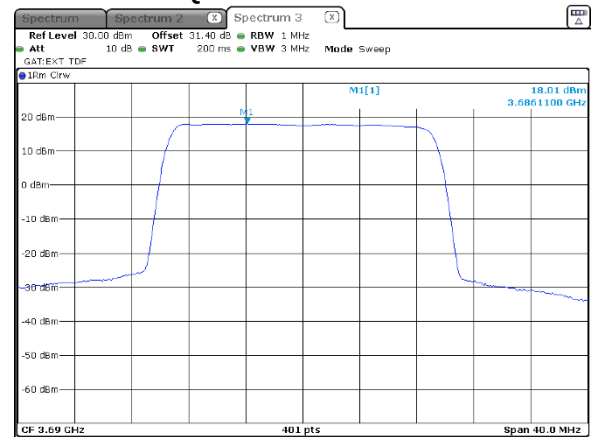

Modulation: 64QAM

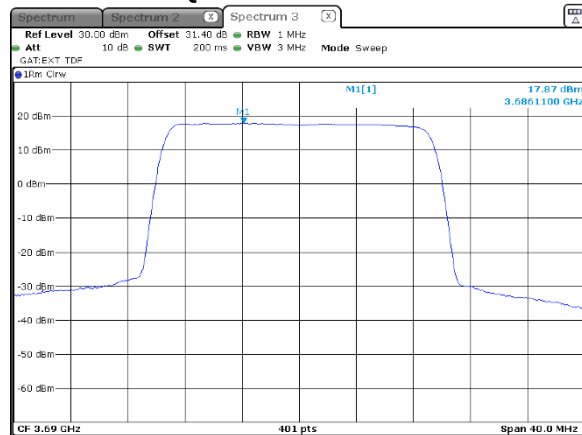

Modulation: 256QAM

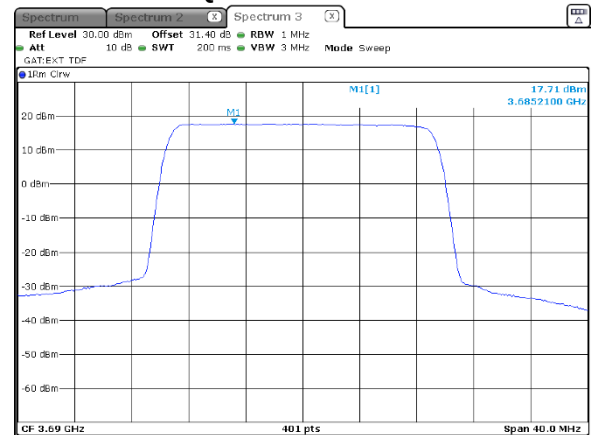




HERMON LABORATORIES


Test specification:		Section 96.41(b), Maximum EIRP and maximum power spectral density	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.11 Peak spectral power density at high frequency


CHANNEL SPACING:
ANTENNA CHAIN:
Modulation: QPSK

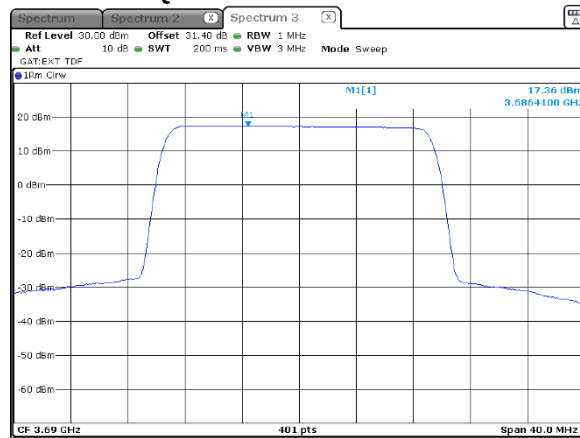


Modulation: 64QAM

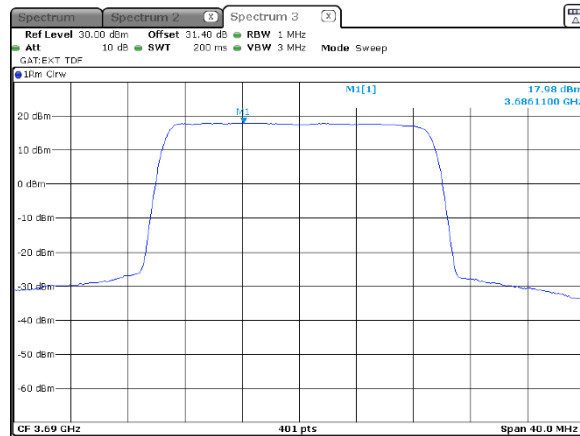

20 MHz
3
Modulation: 16QAM

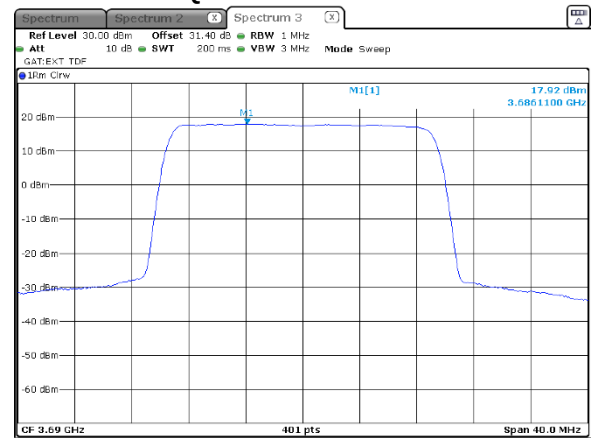

Modulation: 256QAM

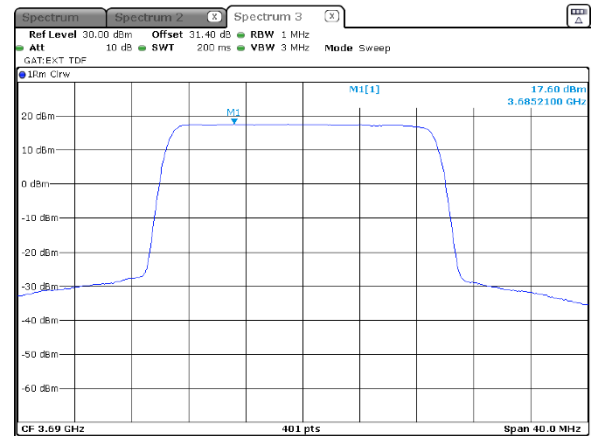




HERMON LABORATORIES


Test specification:		Section 96.41(b), Maximum EIRP and maximum power spectral density	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.12 Peak spectral power density at high frequency


CHANNEL SPACING:
ANTENNA CHAIN:
Modulation: QPSK

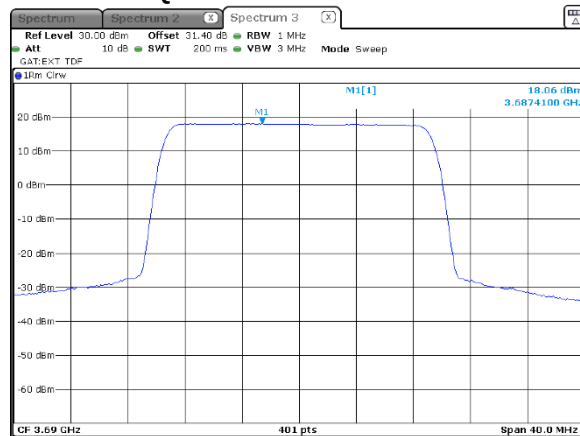


20 MHz
4
Modulation: 16QAM

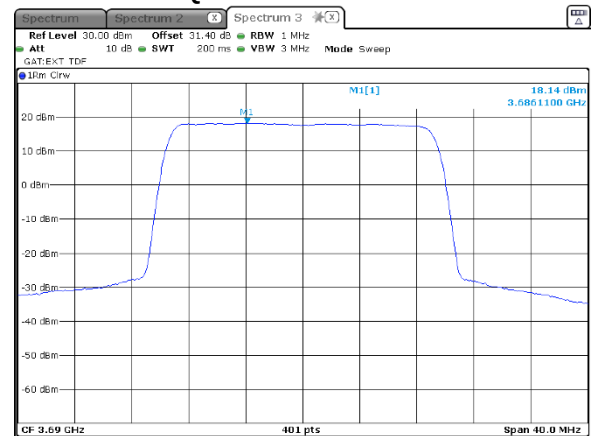

Modulation: 64QAM

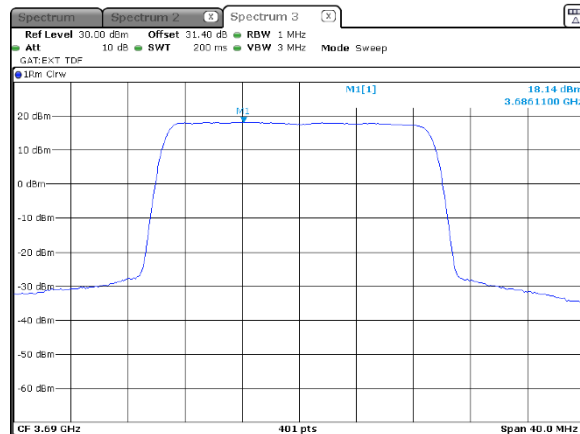

Modulation: 256QAM

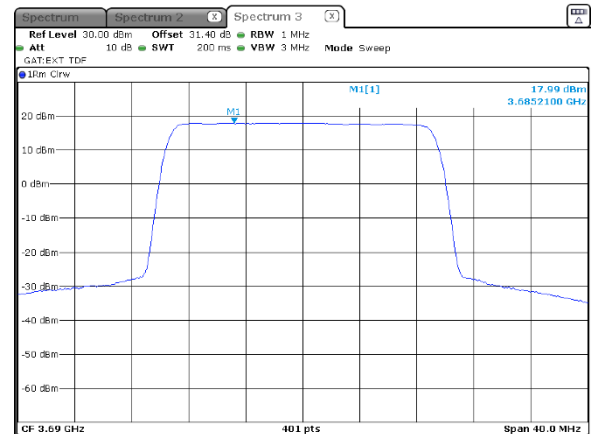



HERMON LABORATORIES

Report ID: AIRRAD_FCC.44746_Rev1

Date of Issue: 24-Nov-21


Test specification:		Section 96.41(b), Maximum EIRP and maximum power spectral density	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.13 Peak spectral power density at low frequency

CHANNEL SPACING:

ANTENNA CHAIN:


Modulation: QPSK

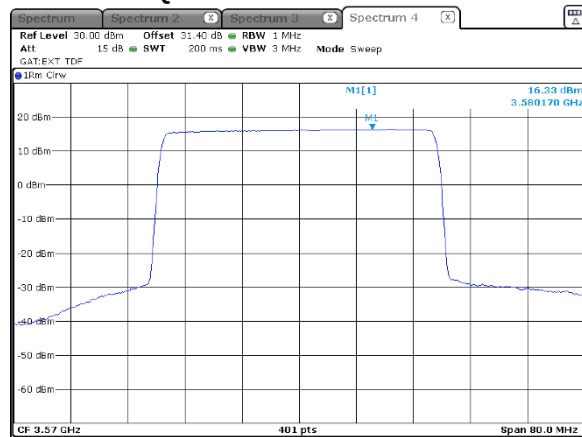


40 MHz

1


Modulation: 16QAM

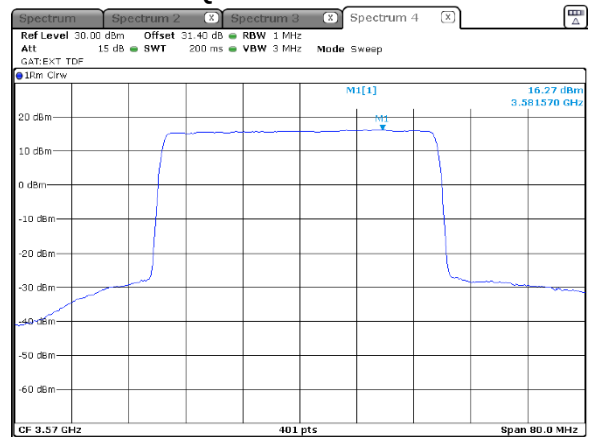

Modulation: 64QAM

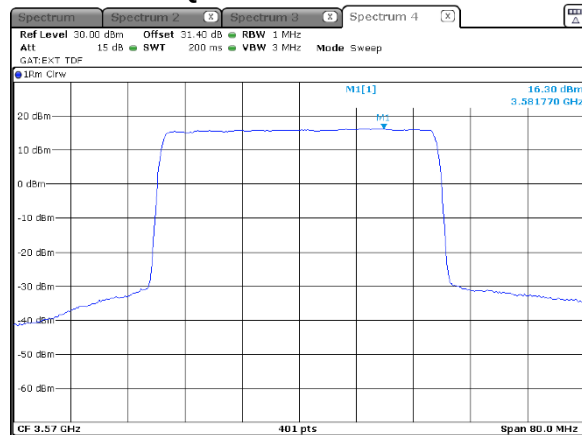

Modulation: 256QAM

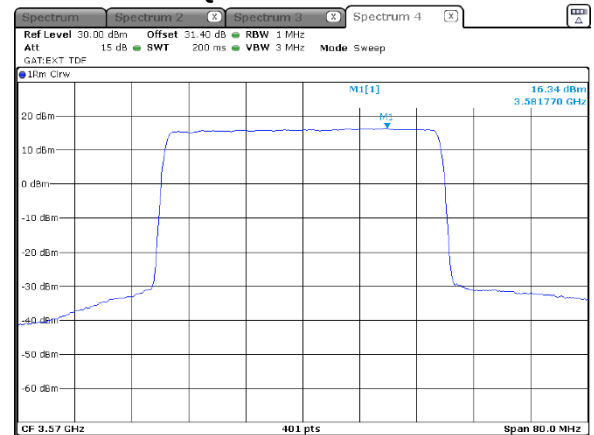



HERMON LABORATORIES

Report ID: AIRRAD_FCC.44746_Rev1

Date of Issue: 24-Nov-21


Test specification:		Section 96.41(b), Maximum EIRP and maximum power spectral density	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.14 Peak spectral power density at low frequency

CHANNEL SPACING:

ANTENNA CHAIN:


Modulation: QPSK

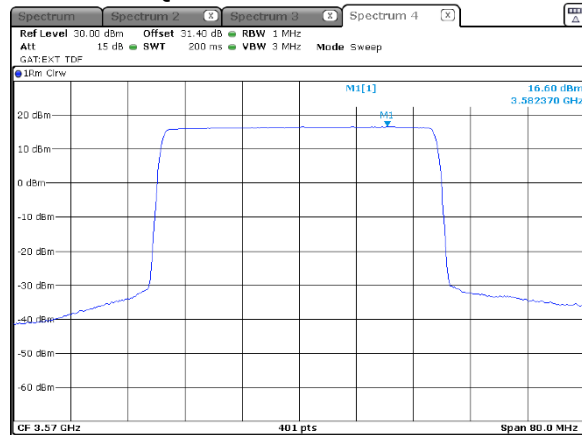


40 MHz

2


Modulation: 16QAM

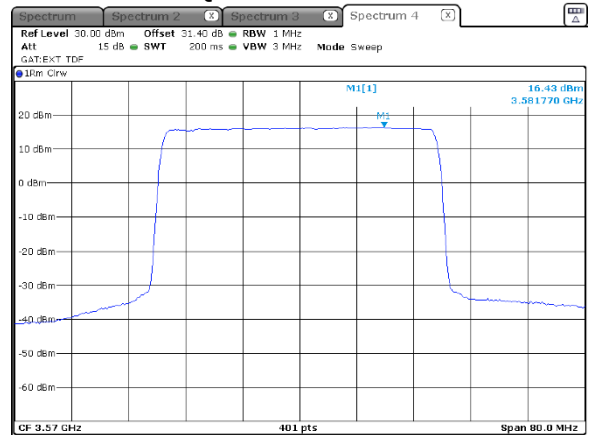

Modulation: 64QAM

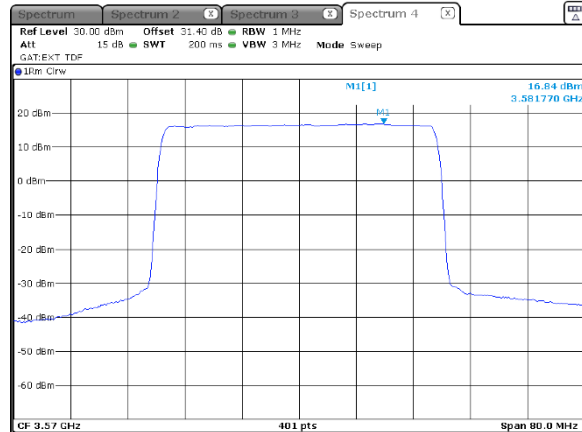

Modulation: 256QAM

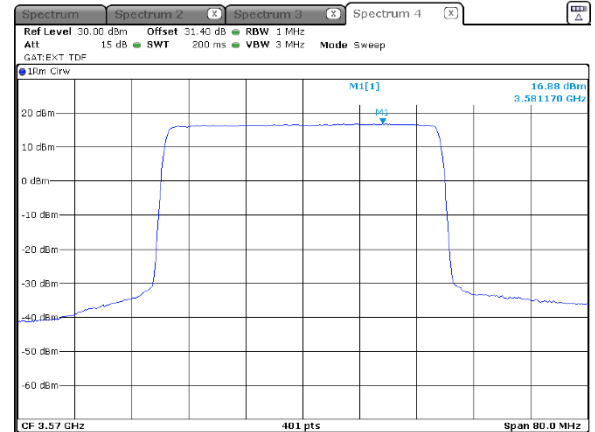



HERMON LABORATORIES

Report ID: AIRRAD_FCC.44746_Rev1

Date of Issue: 24-Nov-21


Test specification:		Section 96.41(b), Maximum EIRP and maximum power spectral density	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.15 Peak spectral power density at low frequency

CHANNEL SPACING:

ANTENNA CHAIN:


Modulation: QPSK

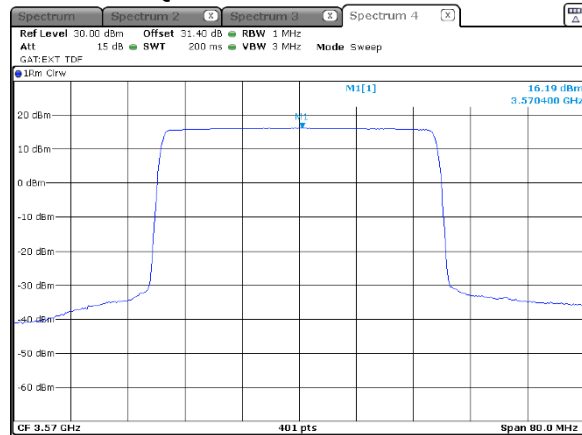


40 MHz

3


Modulation: 16QAM

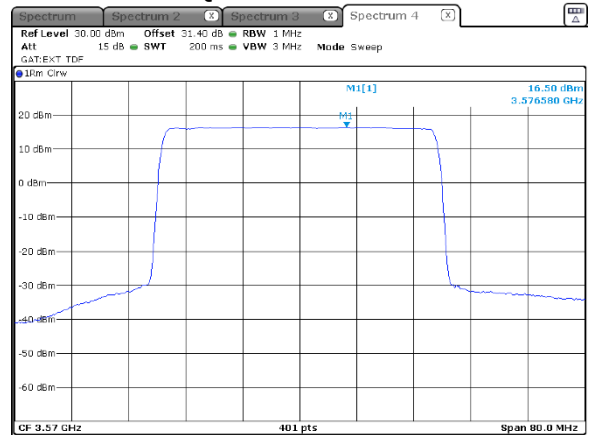

Modulation: 64QAM

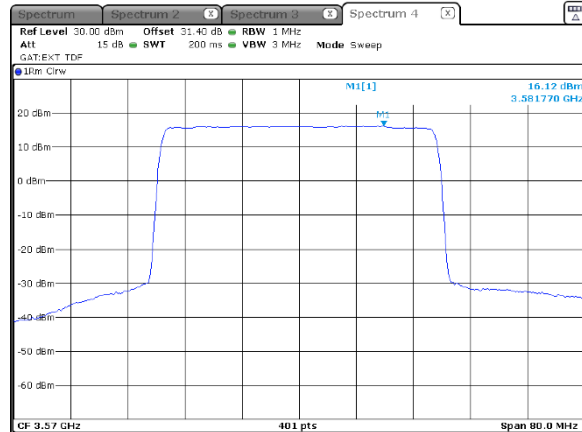

Modulation: 256QAM

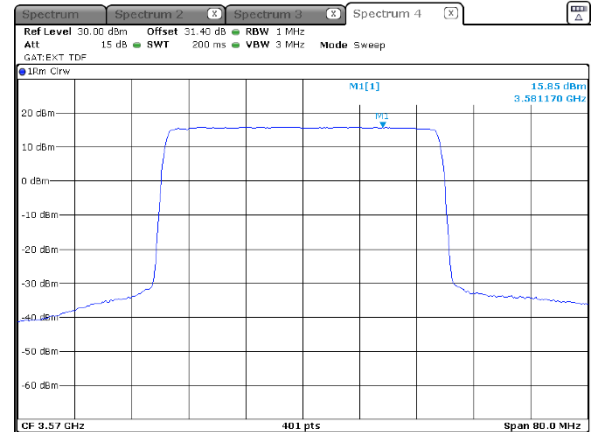



HERMON LABORATORIES

Report ID: AIRRAD_FCC.44746_Rev1

Date of Issue: 24-Nov-21


Test specification:		Section 96.41(b), Maximum EIRP and maximum power spectral density	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.16 Peak spectral power density at low frequency

CHANNEL SPACING:

ANTENNA CHAIN:


Modulation: QPSK

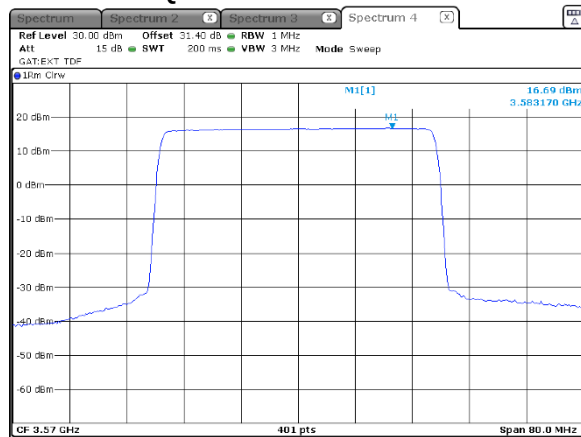


40 MHz

4


Modulation: 16QAM

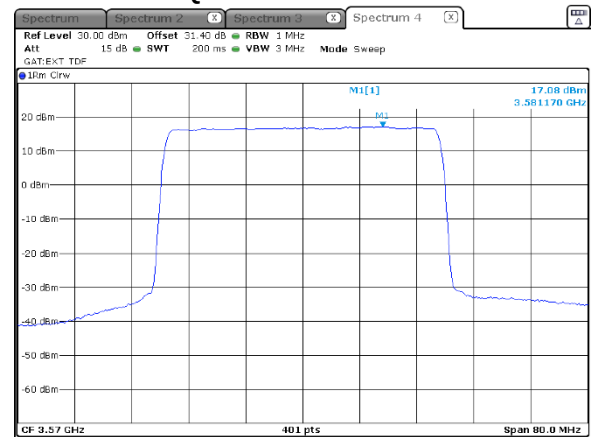

Modulation: 64QAM

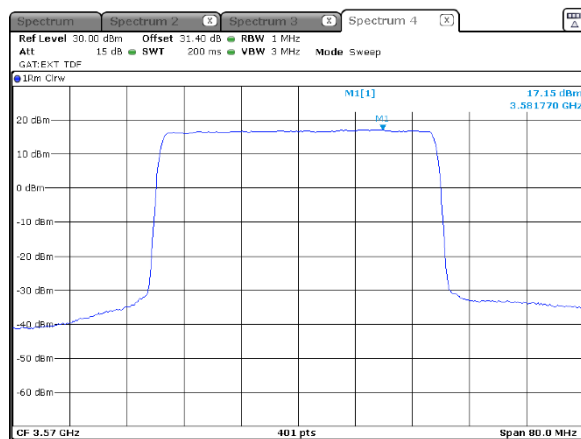

Modulation: 256QAM

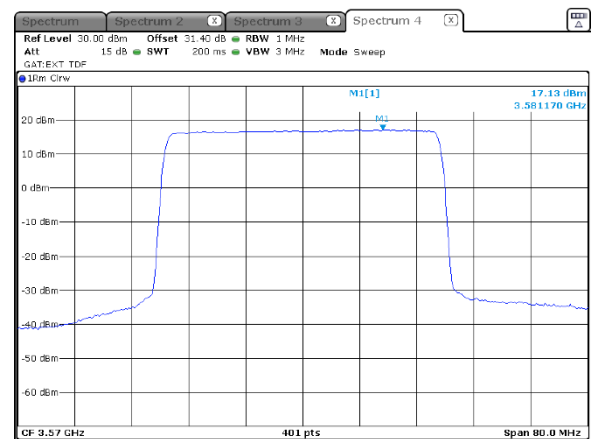



HERMON LABORATORIES


Test specification:		Section 96.41(b), Maximum EIRP and maximum power spectral density	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.17 Peak spectral power density at mid frequency

CHANNEL SPACING:

ANTENNA CHAIN:


Modulation: QPSK

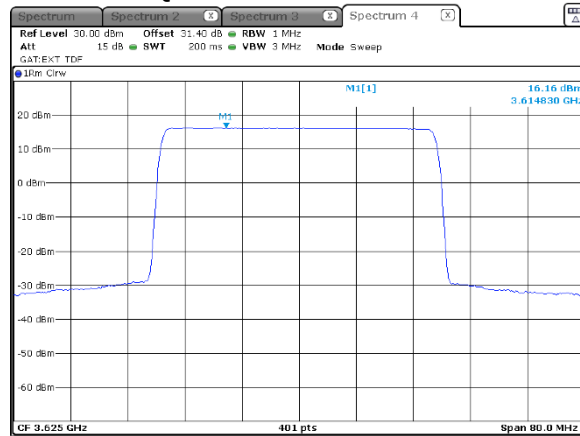


40 MHz

1


Modulation: 16QAM

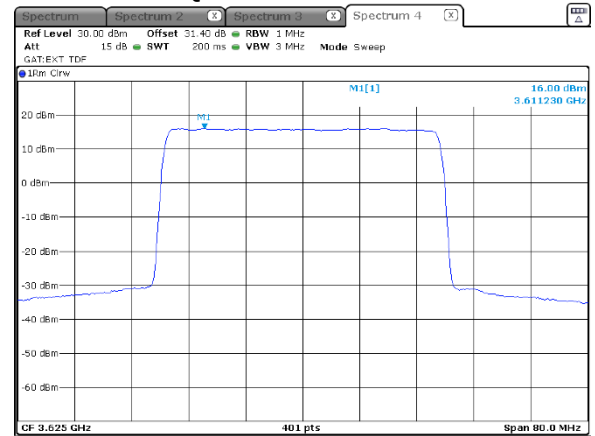

Modulation: 64QAM

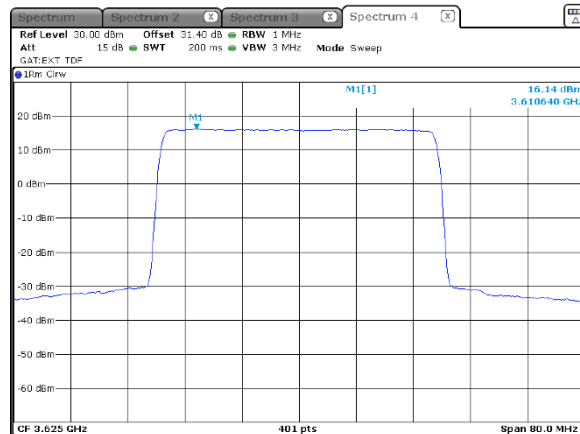

Modulation: 256QAM

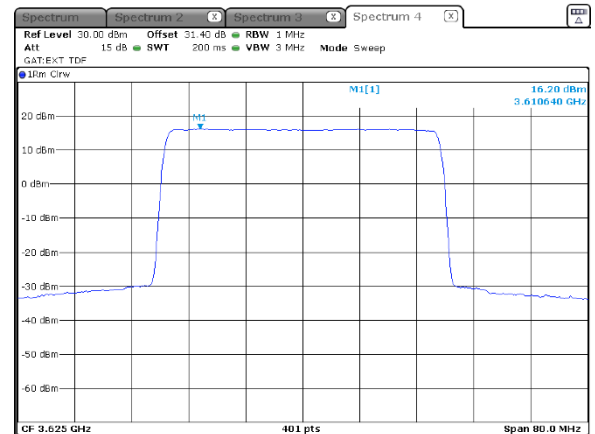



HERMON LABORATORIES

Report ID: AIRRAD_FCC.44746_Rev1

Date of Issue: 24-Nov-21


Test specification:		Section 96.41(b), Maximum EIRP and maximum power spectral density	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.18 Peak spectral power density at mid frequency


CHANNEL SPACING:

ANTENNA CHAIN:

Modulation: QPSK

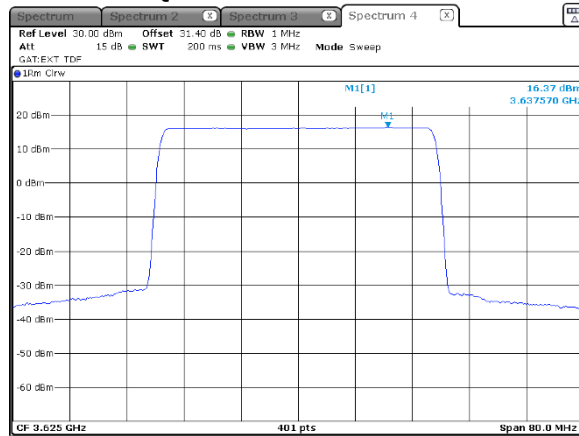


Modulation: 64QAM

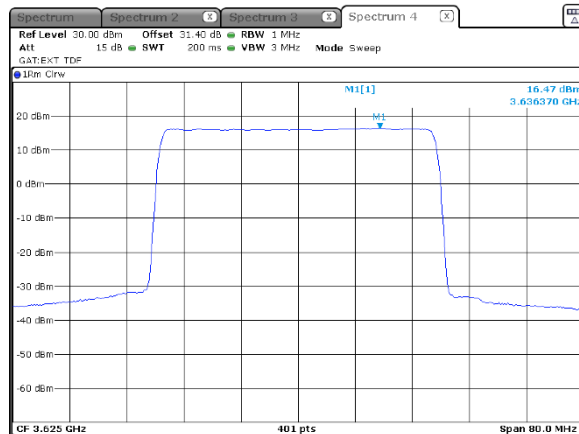


40 MHz

2

Modulation: 16QAM

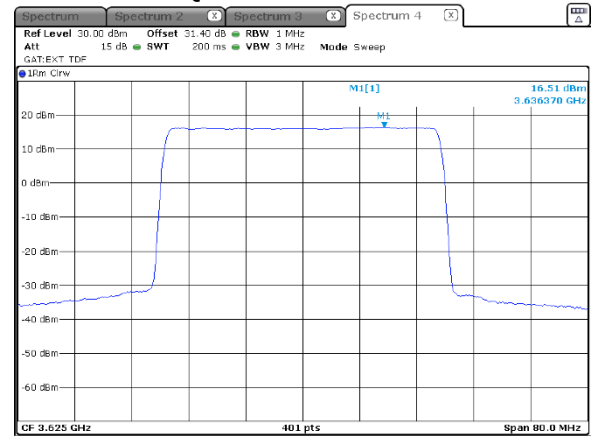

Modulation: 256QAM

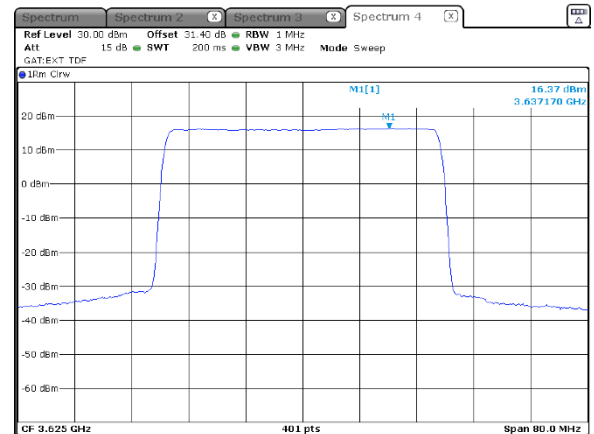



HERMON LABORATORIES


Test specification:		Section 96.41(b), Maximum EIRP and maximum power spectral density	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.19 Peak spectral power density at mid frequency

CHANNEL SPACING:

ANTENNA CHAIN:


Modulation: QPSK

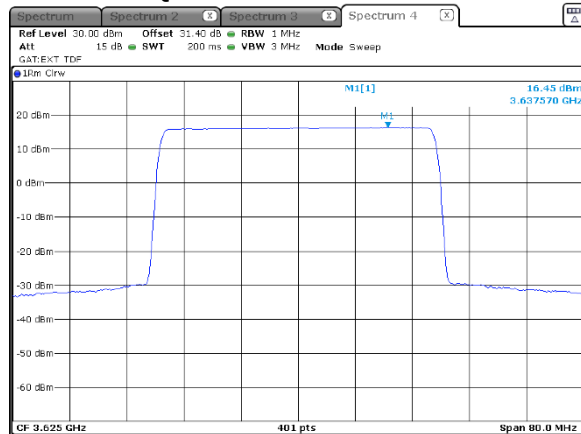


40 MHz

3


Modulation: 16QAM

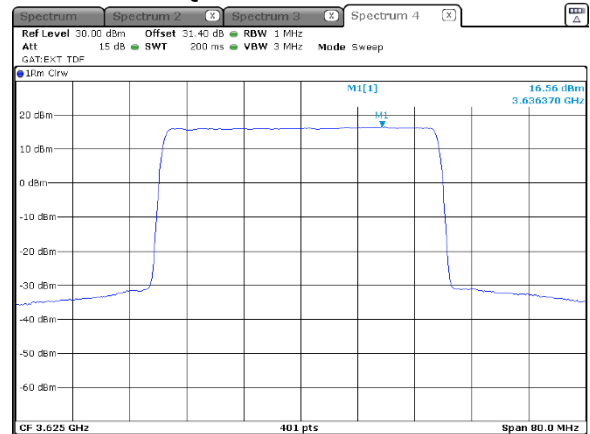

Modulation: 64QAM

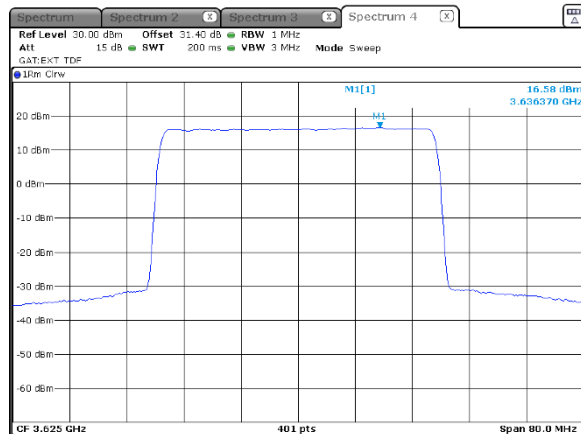

Modulation: 256QAM

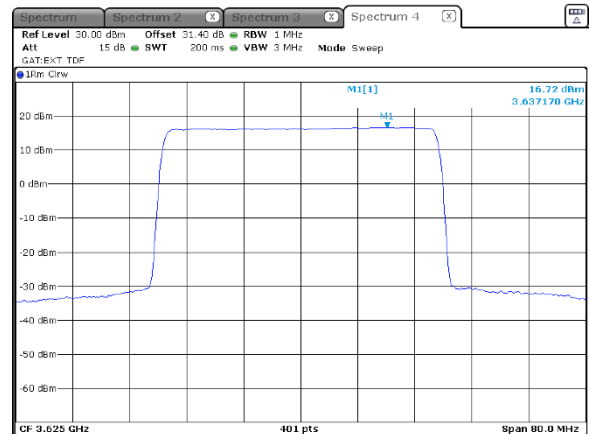



HERMON LABORATORIES

Report ID: AIRRAD_FCC.44746_Rev1

Date of Issue: 24-Nov-21


Test specification:		Section 96.41(b), Maximum EIRP and maximum power spectral density	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.20 Peak spectral power density at mid frequency

CHANNEL SPACING:

ANTENNA CHAIN:


Modulation: QPSK

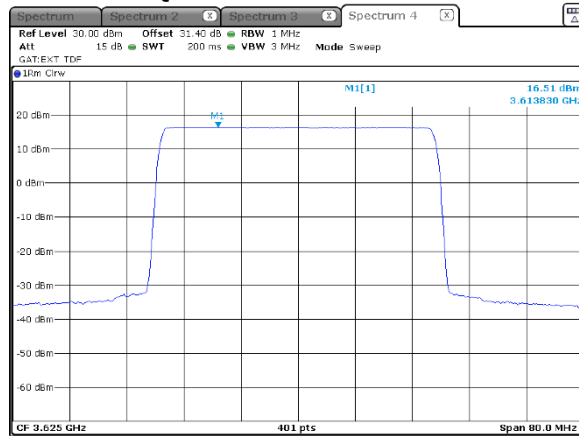


40 MHz

4


Modulation: 16QAM

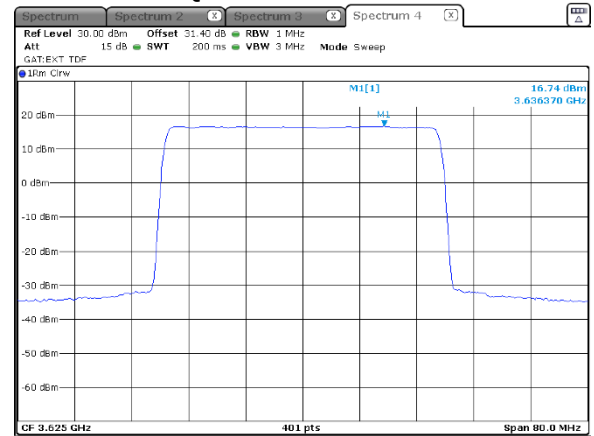

Modulation: 64QAM

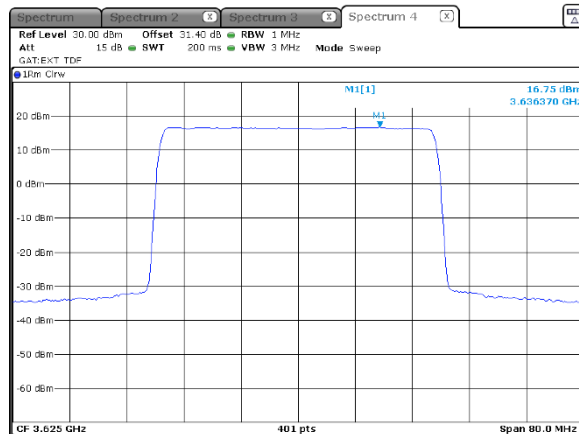

Modulation: 256QAM

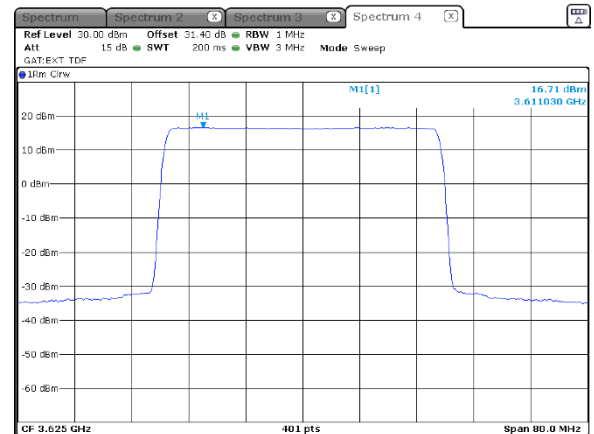



HERMON LABORATORIES

Report ID: AIRRAD_FCC.44746_Rev1

Date of Issue: 24-Nov-21


Test specification:		Section 96.41(b), Maximum EIRP and maximum power spectral density	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.21 Peak spectral power density at high frequency

CHANNEL SPACING:

ANTENNA CHAIN:


Modulation: QPSK

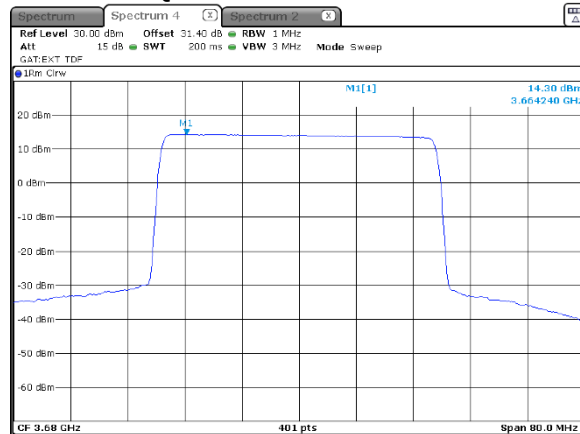


40 MHz

1


Modulation: 16QAM

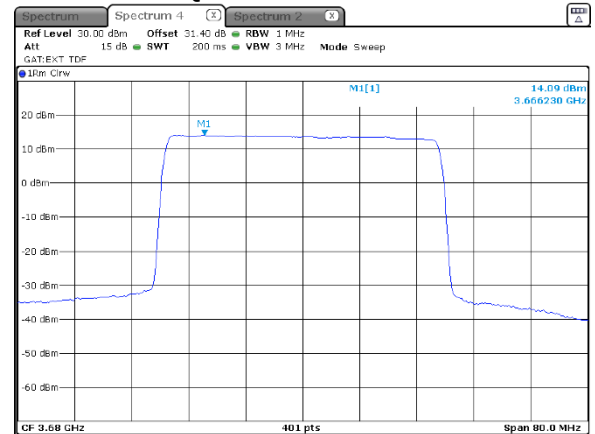

Modulation: 64QAM

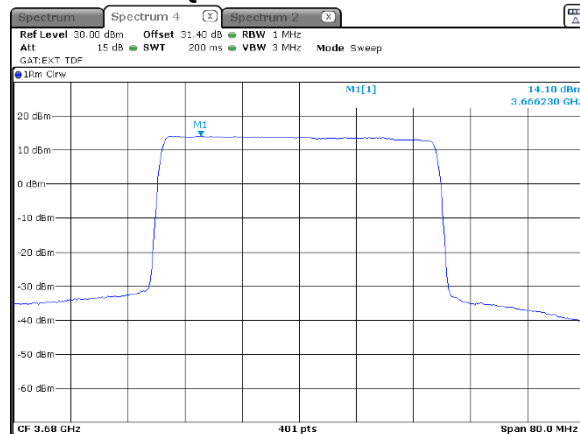

Modulation: 256QAM

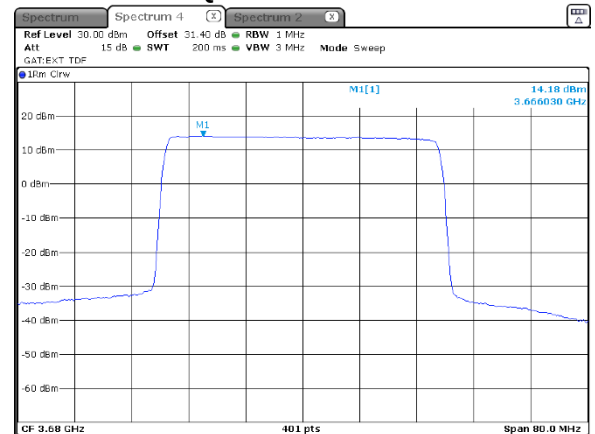



HERMON LABORATORIES

Report ID: AIRRAD_FCC.44746_Rev1

Date of Issue: 24-Nov-21


Test specification:		Section 96.41(b), Maximum EIRP and maximum power spectral density	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.22 Peak spectral power density at high frequency

CHANNEL SPACING:

ANTENNA CHAIN:


Modulation: QPSK

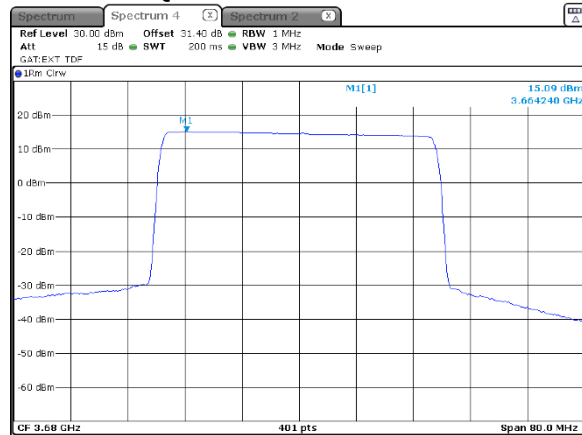


40 MHz

2


Modulation: 16QAM

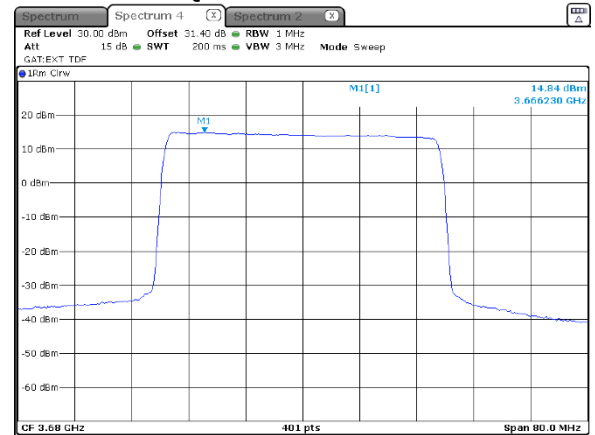

Modulation: 64QAM

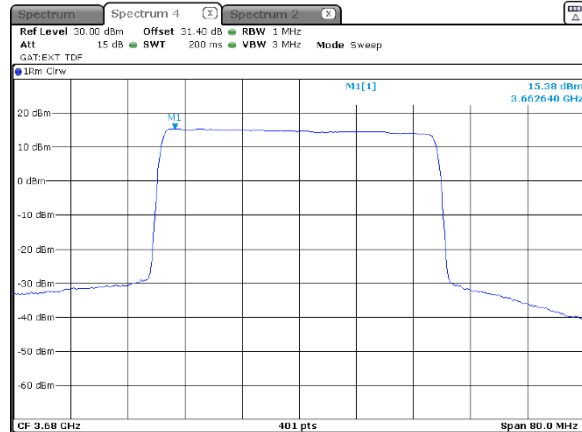

Modulation: 256QAM

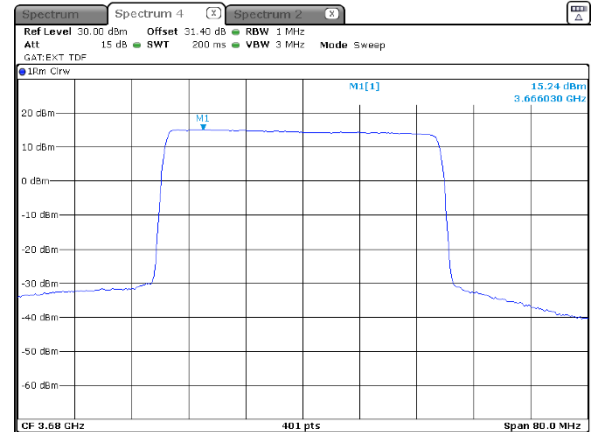




HERMON LABORATORIES


Test specification:		Section 96.41(b), Maximum EIRP and maximum power spectral density	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.23 Peak spectral power density at high frequency


CHANNEL SPACING:
ANTENNA CHAIN:
Modulation: QPSK

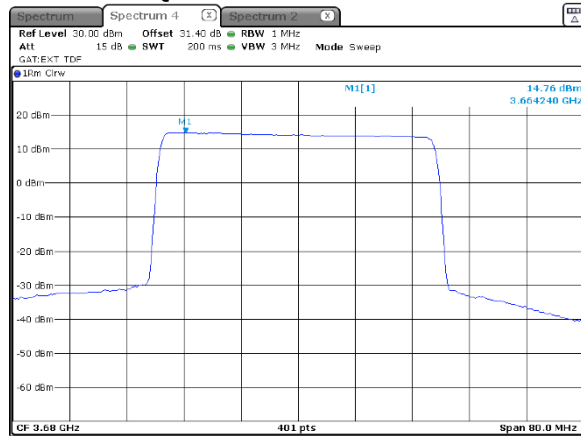


Modulation: 64QAM

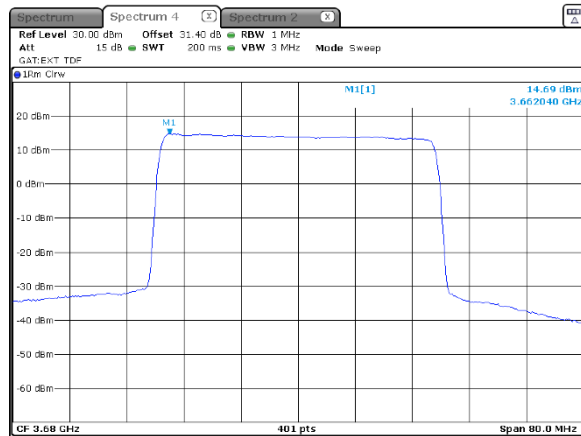

40 MHz
3
Modulation: 16QAM

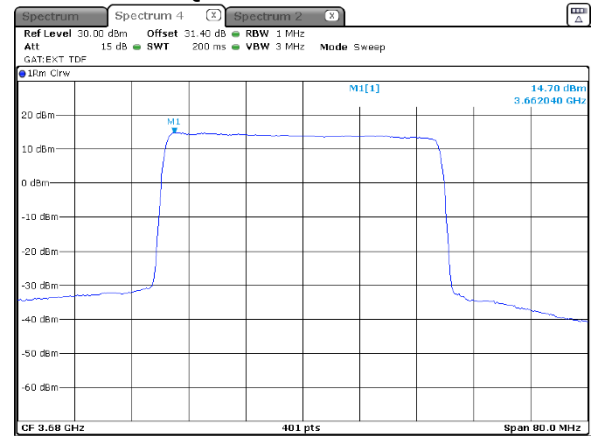

Modulation: 256QAM

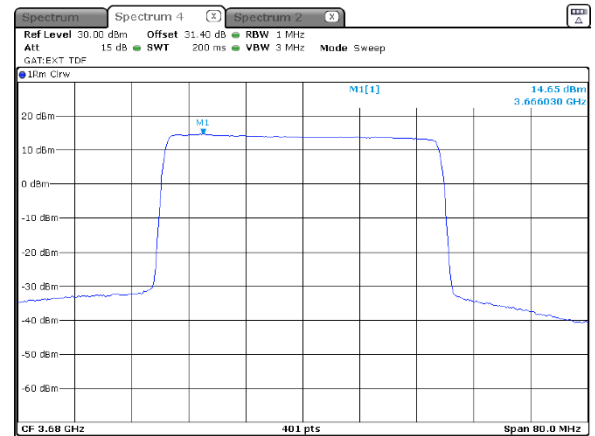



HERMON LABORATORIES


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.24 Peak spectral power density at high frequency


CHANNEL SPACING:
ANTENNA CHAIN:
Modulation: QPSK




40 MHz
4
Modulation: 16QAM

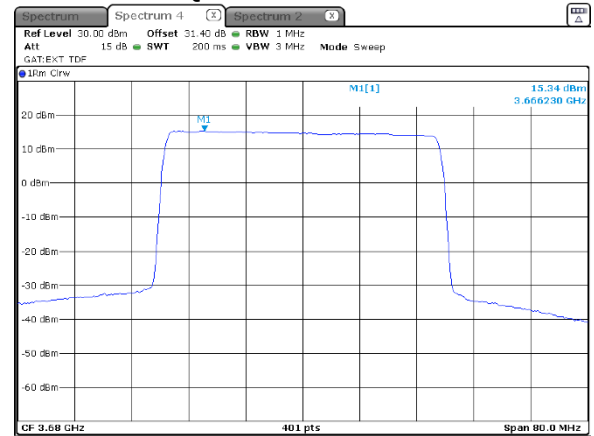

Modulation: 64QAM

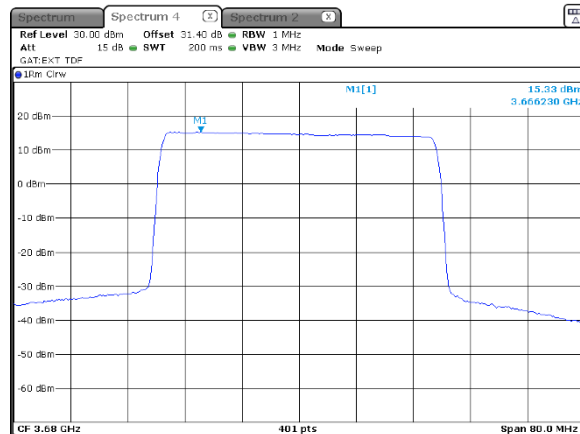

Modulation: 256QAM

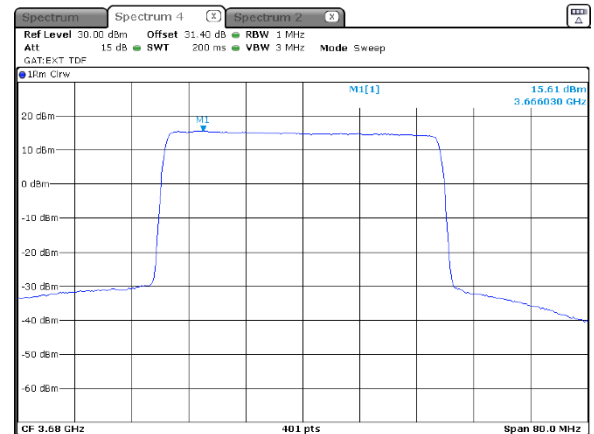



Test specification:		Section 96.41(g), Peak-to- average power ratio	
Test procedure:		Section 96.41(g)	
Test mode:		Verdict: PASS	
Date(s):			
07-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1011 hPa	Power: 48 VDC
Remarks:			

7.2 Peak-to-average power ratio (PAPR) test

7.2.1 General

This test was performed to measure the peak to average power ratio at RF antenna connector. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Peak-to-average power ratio limits

Assigned frequency range, MHz	Peak to average power ratio limit	
	Probability, %	dB
3550.0 – 3700.0	0.1	13.0


7.2.2 Test procedure

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and its proper operation was checked.

7.2.2.2 The EUT was adjusted to produce maximum available to the end user RF output power.

7.2.2.3 The peak to average power ratio was measured with power meter as provided in Table 7.2.2 and the associated plots.

Figure 7.2.1 Peak-to-average power ratio test setup

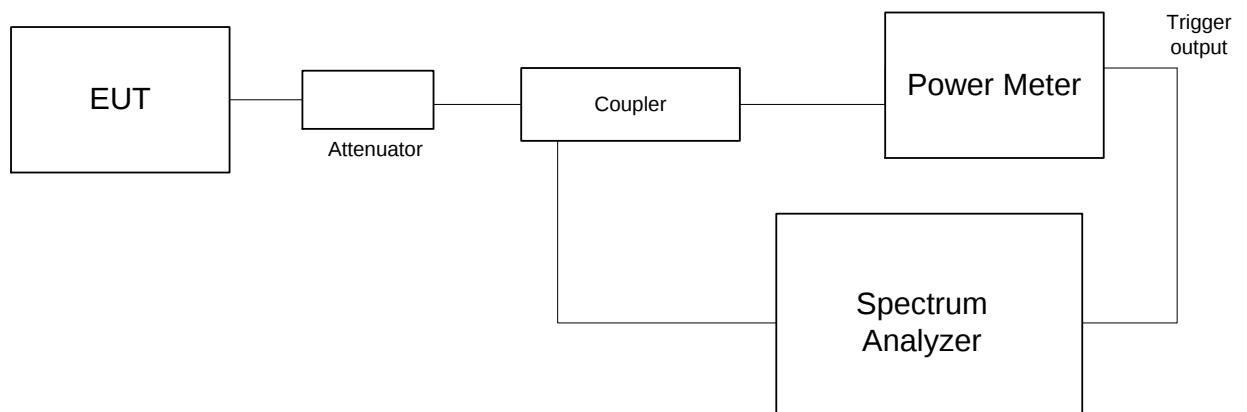



HERMON LABORATORIES

Report ID: AIRRAD_FCC.44746_Rev1

Date of Issue: 24-Nov-21

Test specification:		Section 96.41(g), Peak-to- average power ratio	
Test procedure:		Section 96.41(g)	
Test mode:		Verdict: PASS	
Date(s):			
07-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1011 hPa	Power: 48 VDC
Remarks:			

Table 7.2.2 Peak-to-average power ratio test results

OPERATING FREQUENCY RANGE:

3550 – 3700 MHz

DETECTOR USED:

Peak/Average

MODULATING SIGNAL:

PRBS

TRANSMITTER OUTPUT POWER SETTINGS:

Maximum

Carrier frequency, MHz	Peak to average ratio, dB	Limit, dBm	Margin, dB	Verdict
Channel spacing 20 MHz				
Modulation QPSK				
3560.0	8.32	13.0	-4.68	Pass
3625.0	8.20	13.0	-4.80	Pass
3690.0	8.70	13.0	-4.30	Pass
Modulation 16QAM				
3560.0	8.29	13.0	-4.71	Pass
3625.0	8.14	13.0	-4.86	Pass
3690.0	8.41	13.0	-4.59	Pass
Modulation 64QAM				
3560.0	8.29	13.0	-4.71	Pass
3625.0	8.12	13.0	-4.88	Pass
3690.0	8.35	13.0	-4.65	Pass
Modulation 256QAM				
3560.0	8.38	13.0	-4.62	Pass
3625.0	8.14	13.0	-4.86	Pass
3690.0	8.58	13.0	-4.42	Pass



Test specification:		Section 96.41(g), Peak-to- average power ratio	
Test procedure:		Section 96.41(g)	
Test mode:		Verdict: PASS	
Date(s):			
07-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1011 hPa	Power: 48 VDC
Remarks:			

Table 7.2.3 Peak-to-average power ratio test results

OPERATING FREQUENCY RANGE: 3550 – 3700 MHz
DETECTOR USED: Peak/Average
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Carrier frequency, MHz	Peak to average ratio, dB	Limit, dBm	Margin, dB	Verdict
Channel spacing 40 MHz				
Modulation QPSK				
3570.0	9.44	13.0	-3.56	Pass
3625.0	9.62	13.0	-3.38	Pass
3680.0	9.60	13.0	-3.40	Pass
Modulation 16QAM				
3570.0	9.41	13.0	-3.59	Pass
3625.0	9.45	13.0	-3.55	Pass
3680.0	9.39	13.0	-3.61	Pass
Modulation 64QAM				
3570.0	9.45	13.0	-3.55	Pass
3625.0	9.43	13.0	-3.57	Pass
3680.0	9.39	13.0	-3.61	Pass
Modulation 256QAM				
3570.0	9.43	13.0	-3.57	Pass
3625.0	9.38	13.0	-3.62	Pass
3680.0	9.39	13.0	-3.61	Pass

Reference numbers of test equipment used

HL 3301	HL 4355	HL 5409					
---------	---------	---------	--	--	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES


Test specification: Section 96.41(g), Peak-to- average power ratio			
Test procedure: Section 96.41(g)			
Test mode: Compliance		Verdict: PASS	
Date(s): 07-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1011 hPa	Power: 48 VDC
Remarks:			

Plot 7.2.1 Peak-to-average power ratio test results at low frequency

CHANNEL SPACING:

ANTENNA PORT:


Modulation: QPSK

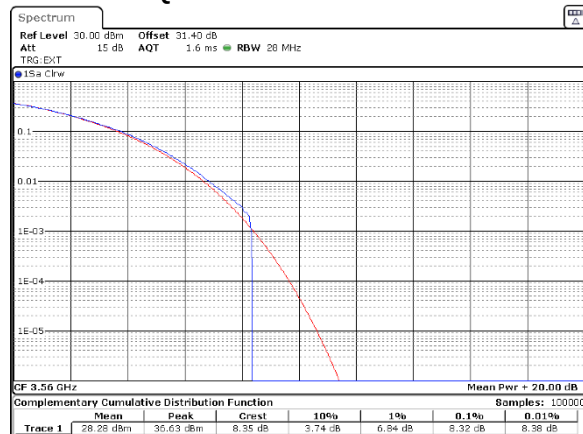


20 MHz

4

Modulation: 16QAM

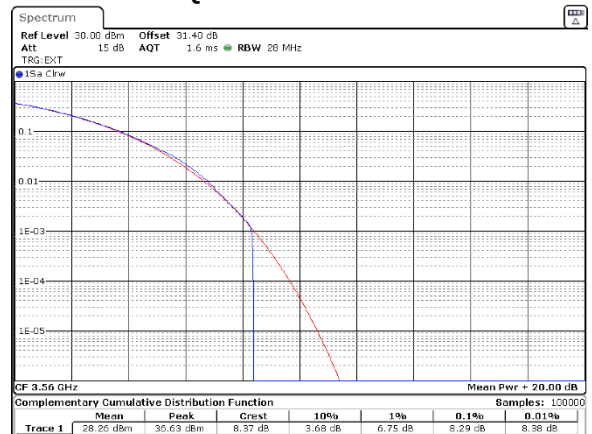

Modulation: 64QAM

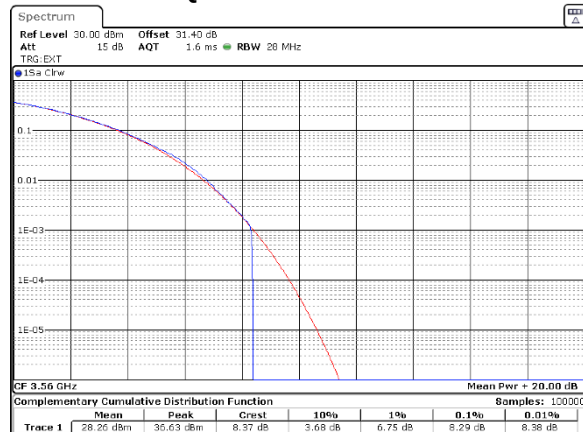

Modulation: 256QAM





HERMON LABORATORIES


Test specification:		Section 96.41(g), Peak-to- average power ratio	
Test procedure:		Section 96.41(g)	
Test mode:		Verdict: PASS	
Date(s):			
07-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1011 hPa	Power: 48 VDC
Remarks:			

Plot 7.2.2 Peak-to-average power ratio test results at mid frequency

CHANNEL SPACING:

ANTENNA PORT:


Modulation: QPSK

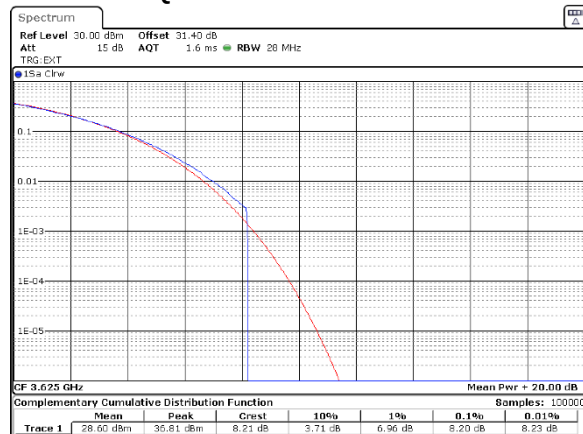


20 MHz

4

Modulation: 16QAM

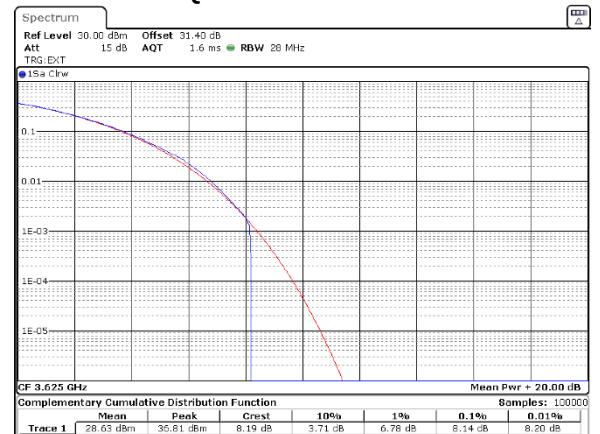

Modulation: 64QAM

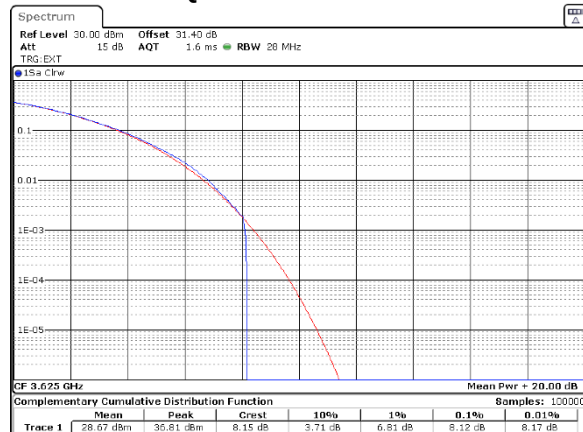

Modulation: 256QAM

