



FCC TEST REPORT

(PART 27)

REPORT NO.: RF110616C18

MODEL NO.: M-PRO-V72-235I

FCC ID: PIDASMAX2300

RECEIVED: Jun. 16, 2011

TESTED: Jul. 06 ~ Aug. 15, 2011

(excluding 16QAM test)

Oct. 26, 2011 (16QAM test)

ISSUED: Oct. 27, 2011

APPLICANT: Airspan Networks Inc.

ADDRESS: 777 Yamato Rd Suite 310, Boca Raton, Florida,
United States, 33431

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.)
Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist., New
Taipei City, Taiwan (R.O.C)

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 55 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agency. The test results in the report only apply to the tested sample.





A D T

TABLE OF CONTENTS

| | |
|---|----|
| RELEASE CONTROL RECORD | 4 |
| 1 CERTIFICATION..... | 5 |
| 2 SUMMARY OF TEST RESULTS | 6 |
| 2.1 MEASUREMENT UNCERTAINTY..... | 6 |
| 3 GENERAL INFORMATION..... | 7 |
| 3.1 GENERAL DESCRIPTION OF EUT | 7 |
| 3.2 DESCRIPTION OF TEST MODES | 8 |
| 3.2.1 CONFIGURATION OF SYSTEM UNDER TEST | 8 |
| 3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL | 9 |
| 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS | 12 |
| 3.4 DESCRIPTION OF SUPPORT UNITS | 12 |
| 4 TEST TYPES AND RESULTS | 13 |
| 4.1 OUTPUT POWER MEASUREMENT | 13 |
| 4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT | 13 |
| 4.1.2 TEST INSTRUMENTS..... | 13 |
| 4.1.3 TEST PROCEDURES | 14 |
| 4.1.4 TEST SETUP | 14 |
| 4.1.5 EUT OPERATING CONDITIONS | 14 |
| 4.1.6 TEST RESULTS | 15 |
| 4.2 FREQUENCY STABILITY MEASUREMENT..... | 16 |
| 4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT | 16 |
| 4.2.2 TEST INSTRUMENTS..... | 16 |
| 4.2.3 TEST PROCEDURE | 17 |
| 4.2.4 TEST SETUP | 17 |
| 4.2.5 EUT OPERATING CONDITIONS | 17 |
| 4.2.6 TEST RESULTS | 18 |
| 4.3 EMISSION BANDWIDTH MEASUREMENT | 19 |
| 4.3.1 LIMITS OF EMISSION BANDWIDTH MEASUREMENT | 19 |
| 4.3.2 TEST INSTRUMENTS..... | 19 |
| 4.3.3 TEST PROCEDURE | 19 |
| 4.3.4 TEST SETUP | 20 |
| 4.3.5 EUT OPERATING CONDITIONS | 20 |
| 4.3.6 TEST RESULTS | 21 |
| 4.4 PEAK TO AVERAGE RATIO..... | 25 |
| 4.4.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT | 25 |
| 4.4.2 TEST INSTRUMENTS..... | 25 |



A D T

| | | |
|-------|--|----|
| 4.4.3 | TEST PROCEDURES | 25 |
| 4.4.4 | TEST SETUP | 25 |
| 4.4.5 | EUT OPERATING CONDITION | 25 |
| 4.4.6 | TEST RESULTS | 26 |
| 4.5 | BAND EDGE MEASUREMENT | 28 |
| 4.5.1 | LIMITS OF BAND EDGE MEASUREMENT | 28 |
| 4.5.2 | TEST INSTRUMENTS | 28 |
| 4.5.3 | TEST SETUP | 29 |
| 4.5.4 | TEST PROCEDURES | 29 |
| 4.5.5 | EUT OPERATING CONDITION | 29 |
| 4.5.6 | TEST RESULTS | 30 |
| 4.6 | CONDUCTED SPURIOUS EMISSIONS | 38 |
| 4.6.1 | LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT | 38 |
| 4.6.2 | TEST INSTRUMENTS | 38 |
| 4.6.3 | TEST PROCEDURE | 39 |
| 4.6.4 | TEST SETUP | 39 |
| 4.6.5 | EUT OPERATING CONDITIONS | 39 |
| 4.6.6 | TEST RESULTS | 40 |
| 4.7 | RADIATED EMISSION MEASUREMENT (BELOW 1GHz) | 42 |
| 4.7.1 | LIMITS OF RADIATED EMISSION MEASUREMENT | 42 |
| 4.7.2 | TEST INSTRUMENTS | 43 |
| 4.7.3 | TEST PROCEDURES | 44 |
| 4.7.4 | DEVIATION FROM TEST STANDARD | 44 |
| 4.7.5 | TEST SETUP | 45 |
| 4.7.6 | EUT OPERATING CONDITIONS | 45 |
| 4.7.7 | TEST RESULTS | 46 |
| 4.8 | RADIATED EMISSION MEASUREMENT (ABOVE 1GHz) | 50 |
| 4.8.1 | LIMITS OF RADIATED EMISSION MEASUREMENT | 50 |
| 4.8.2 | TEST INSTRUMENTS | 50 |
| 4.8.3 | TEST PROCEDURES | 50 |
| 4.8.4 | DEVIATION FROM TEST STANDARD | 51 |
| 4.8.5 | TEST SETUP | 51 |
| 4.8.6 | EUT OPERATING CONDITIONS | 51 |
| 4.8.7 | TEST RESULTS | 52 |
| 5 | PHOTOGRAPHS OF THE TEST CONFIGURATION | 54 |
| 6 | INFORMATION ON THE TESTING LABORATORIES | 55 |



A D T

RELEASE CONTROL RECORD

| ISSUE NO. | REASON FOR CHANGE | DATE ISSUED |
|------------------|-------------------|---------------|
| Original release | N/A | Oct. 27, 2011 |



1 CERTIFICATION

PRODUCT: WiMAX ODU CPE

MODEL: M-PRO-V72-235I

BRAND: Airspan

APPLICANT: Airspan Networks Inc.

TESTED: Jul. 06 ~ Aug. 15, 2011 (excluding 16QAM test)

Oct. 26, 2011 (16QAM test)

TEST SAMPLE: ENGINEERING SAMPLE

TEST STANDARDS: FCC Part 27, Subpart C & D

The above equipment (Model: M-PRO-V72-235I) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : , DATE : Oct. 27, 2011

Pettie Chen / Specialist

APPROVED BY : , DATE : Oct. 27, 2011

Gary Chang / Technical Manager



2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

| STANDARD SECTION | TEST TYPE AND LIMIT | RESULT | REMARK |
|--------------------------|---|--------|--|
| FCC Part 27 & Part 2 | | | |
| 2.1046 27.50(h)(2) | Maximum Peak Output Power Limit: max. 20 Watt | PASS | Meet the requirement of limit. Minimum passing margin is 37.22dBm at 2348.25MHz. |
| 2.1055 27.54 | Frequency Stability Stay with the authorized bands of operation | PASS | Meet the requirement of limit. |
| 2.1049 27.53(m)(6) | Emission Bandwidth | PASS | Meet the requirement of limit. |
| 27.50(d)(5) | Peak to Average Ratio | PASS | Meet the requirement of limit. |
| 2.1051 27.53(m)(4)(6) | Band Edge Measurements | PASS | Meet the requirement of limit. |
| 2.1051 27.53(m)(4)(6) | Conducted Spurious Emissions | PASS | Meet the requirement of limit. |
| 2.1053 27.53(m)(4)(6) | Radiated Spurious Emissions | PASS | Meet the requirement of limit. Minimum passing margin is -1.1dB at 6950.25MHz. |

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| MEASUREMENT | FREQUENCY | UNCERTAINTY |
|---------------------|-----------------|-------------|
| Conducted emissions | 9kHz~30MHz | 2.44 dB |
| Radiated emissions | 30MHz ~ 200MHz | 3.19 dB |
| | 200MHz ~1000MHz | 3.21 dB |
| | 1GHz ~ 18GHz | 2.26 dB |
| | 18GHz ~ 40GHz | 1.94 dB |

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

| | |
|---|---|
| EUT | WiMAX ODU CPE |
| MODEL NO. | M-PRO-V72-235I |
| FCC ID | PIDASMAX2300 |
| NOMINAL VOLTAGE | 48Vdc |
| CODED TYPE/MODULATION/ CODING RATE | <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>UL</p> <p>QPSK: 1/2, 3/4</p> <p>16QAM: 1/2, 3/4</p> </div> <div style="text-align: center;"> <p>DL</p> <p>QPSK: 1/2, 3/4</p> <p>16QAM: 1/2, 3/4</p> <p>64QAM: 1/2, 2/3, 3/4, 5/6</p> </div> </div> |
| MODULATION TECHNOLOGY | OFDMA |
| DUPLEX METHOD | TDD |
| OPERATING RANGE | 2305MHz ~ 2320MHz, 2345MHz ~ 2360MHz |
| CHANNEL BANDWIDTH | 3.5MHz |
| MAX. CODUCTED POWER | 24.22dBm (0.2642W) |
| EIRP | 37.22dBm (5.272W) |
| ANTENNA TYPE | Patch antenna with 13dBi gain |
| ANTENNA CONNECTOR | NA |
| OPERATION TEMPERATURE RANGE | -40°C ~ 70°C |
| DATA CABLE | 1.7m shielded RJ45 cable without core |
| I/O PORTS | Refer to user's manual |
| ACCESSORY DEVICES | POE, Filter |

NOTE:

1. The EUT consumes power from the following POEs.

| POE 1 | |
|----------------|---------------------------|
| BRAND: | PowerDsine™ 3001 |
| MODEL: | PD-3001/AC |
| INPUT: | 100-250Vac, 50/60Hz, 0.5A |
| OUTPUT: | 48Vdc, 0.35A |

| POE 2 | |
|----------------|---------------------------|
| BRAND: | PHIHONG |
| MODEL: | POE16U-480 |
| INPUT: | 100-240Vac, 50/60Hz, 0.4A |
| OUTPUT: | 48Vdc, 0.32A |

2. The EUT can supports different UL / DL ratio, max transmit ratio is up to 16 (UL): 31 (DL). After pretesting of output power and spurious emission, 16 (UL): 31 (DL) was found to be worst case and was selected for the final test configuration.


3. For the EUT with modulation type and coding rate, after pre-testing in test items of output power and spurious emissions, QPSK 1/2 was found to be worst case and was selected for the final test configuration.
4. The above EUT information is declared by manufacturer and for more detailed feature description please refers to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Two channels of each channel bandwidth had been tested.

| CHANNEL BANDWIDTH: 3.5 MHz |
|----------------------------|
| Frequency (MHz) |
| 2316.75MHz |
| 2348.25MHz |

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

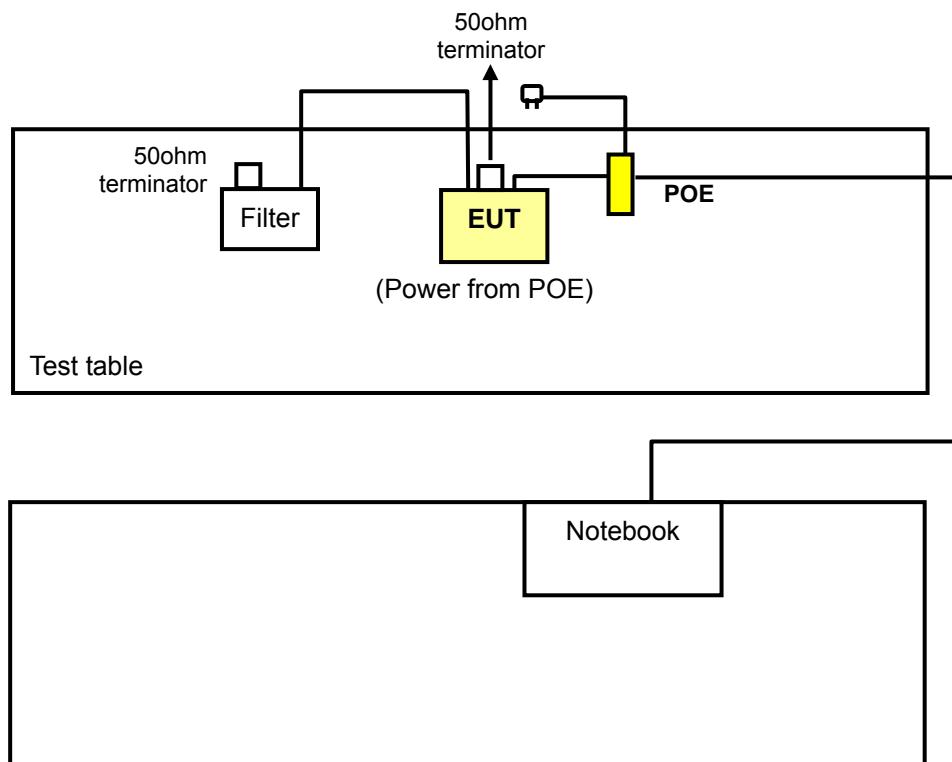



A D T

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

| EUT CONFIGURE MODE | APPLICABLE TO | | | | | | | | DESCRIPTION |
|--------------------------|---------------|----|----|----|----|-----|-------|-------|------------------|
| | OP | FS | EB | PA | BE | CSE | RE<1G | RE≥1G | |
| A | √ | √ | √ | √ | √ | √ | √ | √ | Power from PoE 1 |
| B | - | - | - | - | - | - | √ | - | Power from PoE 2 |

Where

OP: Output power

FS: Frequency stability

EB: Emission bandwidth

PA: Peak to Average Ratio

BE: Band edge

CSE: Conducted spurious emissions

RE<1G: Radiated emission below 1GHz **RE≥1G:** Radiated emission above 1GHz

NOTE: “-”: Means no effect.

OUTPUT POWER MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | TESTED CHAN. FREQ. (MHz) | MODULATION TECHNOLOGY | CHANNEL BANDWIDTH | MODULATION TYPE | CODING RATE |
|-----------------------|-----------------------------|--------------------------|----------------------|--------------------|----------------|
| A | 2316.75 | OFDMA | 3.5MHz | QPSK | 1/2 |
| A | 2348.25 | OFDMA | 3.5MHz | QPSK | 1/2 |

FREQUENCY STABILITY MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, coding rate, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | TESTED CHAN. FREQ. (MHz) | MODULATION TECHNOLOGY | CHANNEL BANDWIDTH | MODULATION TYPE | CODING RATE |
|-----------------------|-----------------------------|--------------------------|----------------------|--------------------|----------------|
| A | 2348.25 | OFDMA | 3.5MHz | QPSK | 1/2 |

EMISSION BANDWIDTH MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, coding rate, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | TESTED CHAN. FREQ. (MHz) | MODULATION TECHNOLOGY | CHANNEL BANDWIDTH | MODULATION TYPE | CODING RATE |
|-----------------------|-----------------------------|--------------------------|----------------------|--------------------|----------------|
| A | 2316.75 | OFDMA | 3.5MHz | QPSK/16QAM | 1/2 |
| A | 2348.25 | OFDMA | 3.5MHz | QPSK/16QAM | 1/2 |



PEAK TO AVERAGE RATIO:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, coding rate, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | TESTED CHANNEL (MHz) | MODULATION TECHNOLOGY | CHANNEL BANDWIDTH | MODULATION TYPE | CODING RATE |
|--------------------|----------------------|-----------------------|-------------------|-----------------|-------------|
| A | 2316.75 | OFDMA | 3.5MHz | QPSK/16QAM | 1/2 |
| A | 2348.25 | OFDMA | 3.5MHz | QPSK/16QAM | 1/2 |

BAND EDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, coding rate, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | TESTED CHAN. FREQ. (MHz) | MODULATION TECHNOLOGY | CHANNEL BANDWIDTH | MODULATION TYPE | CODING RATE |
|--------------------|--------------------------|-----------------------|-------------------|-----------------|-------------|
| A | 2316.75 | OFDMA | 3.5MHz | QPSK/16QAM | 1/2 |
| A | 2348.25 | OFDMA | 3.5MHz | QPSK/16QAM | 1/2 |

CONDUCTED SPURIOUS EMISSIONS MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, coding rate, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | TESTED CHAN. FREQ. (MHz) | MODULATION TECHNOLOGY | CHANNEL BANDWIDTH | MODULATION TYPE | CODING RATE |
|--------------------|--------------------------|-----------------------|-------------------|-----------------|-------------|
| A | 2316.75 | OFDMA | 3.5MHz | QPSK | 1/2 |
| A | 2348.25 | OFDMA | 3.5MHz | QPSK | 1/2 |

RADIATED EMISSION MEASUREMENT (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, coding rate, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | TESTED CHAN. FREQ. (MHz) | MODULATION TECHNOLOGY | CHANNEL BANDWIDTH | MODULATION TYPE | CODING RATE |
|--------------------|--------------------------|-----------------------|-------------------|-----------------|-------------|
| A, B | 2316.75 | OFDMA | 3.5MHz | QPSK | 1/2 |
| A, B | 2348.25 | OFDMA | 3.5MHz | QPSK | 1/2 |



A D T

RADIATED EMISSION MEASUREMENT (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | TESTED CHAN. FREQ. (MHz) | MODULATION TECHNOLOGY | CHANNEL BANDWIDTH | MODULATION TYPE | CODING RATE |
|--------------------|--------------------------|-----------------------|-------------------|-----------------|-------------|
| A | 2316.75 | OFDMA | 3.5MHz | QPSK | 1/2 |
| A | 2348.25 | OFDMA | 3.5MHz | QPSK | 1/2 |

TEST CONDITION:

| APPLICABLE TO | ENVIRONMENTAL CONDITIONS | INPUT POWER | TESTED BY |
|---------------|--------------------------|--------------|-----------|
| OP | 27deg. C, 67%RH | 120Vac, 60Hz | Long Chen |
| FS | 27deg. C, 67%RH | 120Vac, 60Hz | Long Chen |
| EB | 27deg. C, 67%RH | 120Vac, 60Hz | Long Chen |
| BE | 27deg. C, 67%RH | 120Vac, 60Hz | Long Chen |
| CSE | 27deg. C, 67%RH | 120Vac, 60Hz | Long Chen |
| RE \geq 1G | 26deg. C, 65%RH | 120Vac, 60Hz | Sun Lin |
| RE<1G | 26deg. C, 65%RH | 120Vac, 60Hz | Sun Lin |



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a WiMAX product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

ANSI/TIA/EIA-603-C-2004

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| NO. | PRODUCT | BRAND | MODEL NO. | SERIAL NO. | FCC ID |
|-----|----------|-------|-----------|------------|-----------|
| 1 | NOTEBOOK | HP | NC6000 | CNU4110Y6Q | E2K24CLNS |

| NO. | SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS |
|-----|---|
| 1 | 10m RJ45 cable |

NOTE:

1. All power cords of the above support units are non shielded (1.8m).
2. Item 1 act as a communication partner to transfer data.



4 TEST TYPES AND RESULTS

4.1 OUTPUT POWER MEASUREMENT

4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

For fixed customer premises equipment (CPE) stations transmitting in the 2305–2320 MHz band or in the 2345–2360 MHz band, the peak EIRP must not exceed 20 watts within any 5 megahertz of authorized bandwidth. For WCS CPE using TDD technology, the duty cycle must not exceed 38 percent”

4.1.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|----------------------------|-----------|------------|---------------------|-------------------------|
| Spectrum analyzer | E4446A | MY43360128 | Jul. 14, 2011 | Jul. 13, 2012 |

NOTE:


1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1.3 TEST PROCEDURES

OUTPUT POWER

1. Connect the DUT transmitter output to the spectrum analyzer via coaxial cable while ensuring proper impedance matching.
2. Tune the analyzer to the nominal center frequency of the emission bandwidth (EBW).
3. Set the span to twice the nominal EBW (span = 2 x EBW).
4. Set the resolution bandwidth (RBW) to approximately 1% of EBW.
5. Set the video bandwidth (VBW) to 3 x RBW.
6. Select the average power (RMS) display detector.
7. Set the number of measurement points to ≥ 601 .
8. Use auto-coupled sweep time.
9. Perform measurement over an interval of time when the transmission is continuous and at its maximum power level.
10. Use the Band/Channel Power function to determine the integrated power over the full EBW.
11. Record the band power level.
12. Adjust the recorded level by applying appropriate correction factors for the measurement set-up.
13. Determine the EIRP by adding the effective antenna gain to the adjusted power level.

4.1.4 TEST SETUP

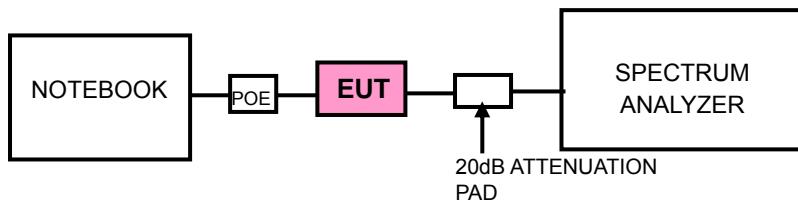

4.1.5 EUT OPERATING CONDITIONS

Executes telnet program to send commands via RJ45 cable to control EUT to transmit at specific modulation, coding rate, frequency and output power level.



A D T

4.1.6 TEST RESULTS

CONDUCTED POWER


| CHANNEL BANDWIDTH: 3.5MHz | | | | |
|---------------------------|------------------------------|----------|-------------|-------|
| FREQ. (MHz) | POWER METER READING (dBm) | C.F (dB) | TOTAL POWER | |
| | | | dBm | W |
| 2316.75 | 2.0 | 21.0 | 23.88 | 0.244 |
| 2348.25 | 3.2 | 21.0 | 24.22 | 0.264 |

REMARKS: 1. Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Cable Loss (dB) + 20dB Attenuator.

EIRP

| CHANNEL BANDWIDTH: 3.5MHz | | | | |
|---------------------------|-------------------------------|-----------------|---------------|--------------|
| FREQ. (MHz) | AVERAGE OUTPUT POWER (dBm) | Ant. Gain (dBi) | EIRP (dBm) | EIRP (W) |
| 2316.75 | 23.88 | 13 | 36.88 | 4.875 |
| 2348.25 | 24.22 | 13 | 37.22 | 5.272 |

CONDUCTED POWER

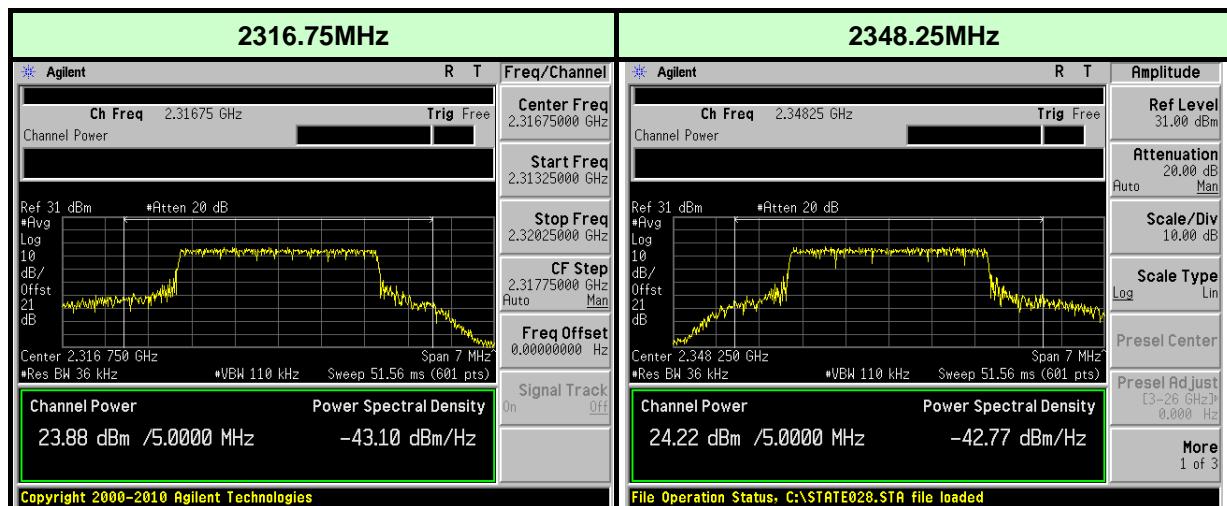



4.2 FREQUENCY STABILITY MEASUREMENT

4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

According to the FCC part 2.1055 shall be tested the frequency stability. The rule is defined that "The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block." The test extreme voltage is according to the 2.1055(d)(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with specification of EUT -40°C ~ 70°C.

4.2.2 TEST INSTRUMENTS


| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|--|-----------------|------------|---------------------|-------------------------|
| Spectrum Analyzer Agilent | E4446A | MY44360124 | Dec. 29, 2010 | Dec. 28, 2011 |
| RF cable | SUCOFLEX 104 | 274403/4 | Aug. 20, 2010 | Aug. 19, 2011 |
| WIT Standard Temperature & Humidity Chamber | TH-4S-C | W981030 | Jun. 15, 2011 | Jun. 14, 2012 |

NOTE: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.2.3 TEST PROCEDURE

- a. Power must be removed when changing from one temperature to another or one voltage to another voltage. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the AC input power. The various Volts from the minimum 93.5 Volts to 126.5 Volts. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing.
- d. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

4.2.4 TEST SETUP

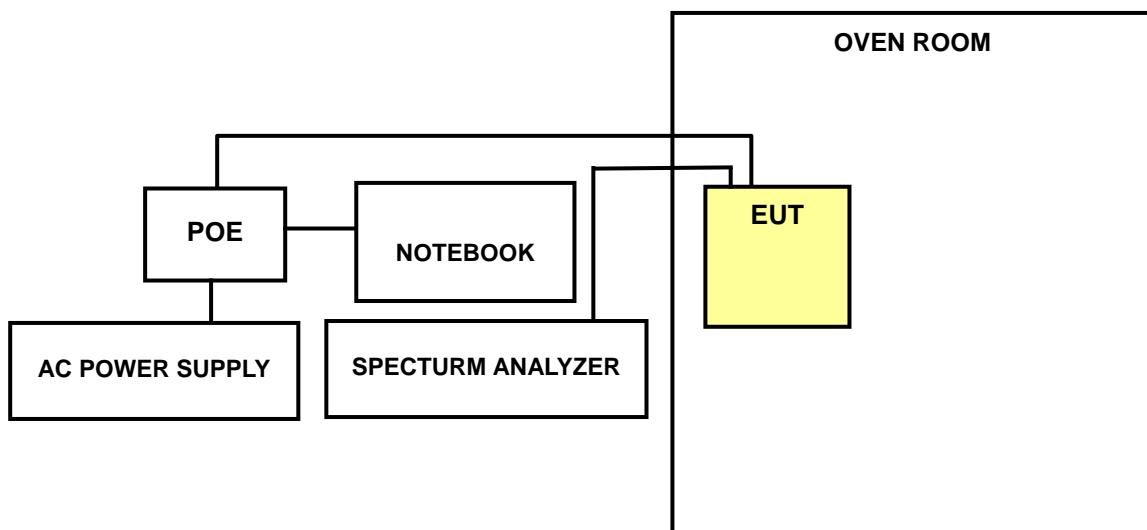

4.2.5 EUT OPERATING CONDITIONS

Same as 4.1.5



A D T

4.2.6 TEST RESULTS

| CHANNEL BANDWIDTH: 3.5MHz | | | |
|---------------------------------|------------|-----------------|-----------------------|
| AFC FREQUENCY ERROR VS. VOLTAGE | | | |
| VOLTAGE (Volts) | TEMP. (°C) | FREQUENCY (MHz) | FREQUENCY ERROR (ppm) |
| 93.5 | 20 | 2348.250862 | 0.367 |
| 110.0 | 20 | 2348.250684 | 0.291 |
| 126.5 | 20 | 2348.250805 | 0.343 |

| AFC FREQUENCY ERROR VS. TEMP. | | | |
|-------------------------------|------------|-----------------|-----------------------|
| VOLTAGE (Volts) | TEMP. (°C) | FREQUENCY (MHz) | FREQUENCY ERROR (ppm) |
| 110.0 | 70 | 2348.250897 | 0.382 |
| 110.0 | 60 | 2348.251497 | 0.637 |
| 110.0 | 50 | 2348.250687 | 0.293 |
| 110.0 | 40 | 2348.251072 | 0.457 |
| 110.0 | 30 | 2348.250774 | 0.330 |
| 110.0 | 20 | 2348.250684 | 0.291 |
| 110.0 | 10 | 2348.251435 | 0.611 |
| 110.0 | 0 | 2348.250743 | 0.316 |
| 110.0 | -10 | 2348.251346 | 0.573 |
| 110.0 | -20 | 2348.250376 | 0.160 |
| 110.0 | -30 | 2348.250867 | 0.369 |
| 110.0 | -40 | 2348.250806 | 0.343 |

| | |
|--------------------|------------|
| CARRIER FREQUENCY: | 2348.25MHz |
|--------------------|------------|



4.3 EMISSION BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF EMISSION BANDWIDTH MEASUREMENT

According to FCC 27.53(m)(6) specified that emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

4.3.2 TEST INSTRUMENTS

For QPSK modulation

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|--|--------------|------------|---------------------|-------------------------|
| Spectrum Analyzer Agilent | E4446A | MY44360124 | Dec. 29, 2010 | Dec. 28, 2011 |
| RF cable | SUCOFLEX 104 | 274403/4 | Aug. 20, 2010 | Aug. 19, 2011 |
| DC-6GHz 20dB 50W Fixed attenuator Woken | MDC9331N-20 | 0724 | May 13, 2011 | May 12, 2012 |

For 16QAM modulation


| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|--|--------------|------------|---------------------|-------------------------|
| Spectrum Analyzer Agilent | E4446A | MY44360124 | Dec. 29, 2010 | Dec. 28, 2011 |
| RF cable | SUCOFLEX 104 | 329751/4 | Jan. 27, 2011 | Jan. 26, 2012 |
| DC-6GHz 20dB 50W Fixed attenuator Woken | MDC9331N-20 | 0724 | May 13, 2011 | May 12, 2012 |

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW = 36kHz, VBW = 110kHz. The 26dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 26dB.

4.3.4 TEST SETUP

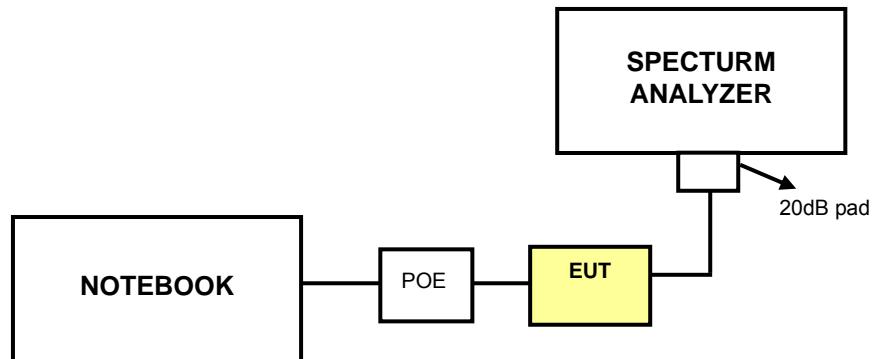

4.3.5 EUT OPERATING CONDITIONS

Same as 4.1.5




A D T


4.3.6 TEST RESULTS

| MODULATION: QPSK | |
|----------------------------------|------------------------|
| CHANNEL BANDWIDTH: 3.5MHz | |
| FREQ. (MHz) | -26dBc BANDWIDTH (MHz) |
| 2316.75 | 3.471 |
| 2348.25 | 3.486 |

2316.75MHz

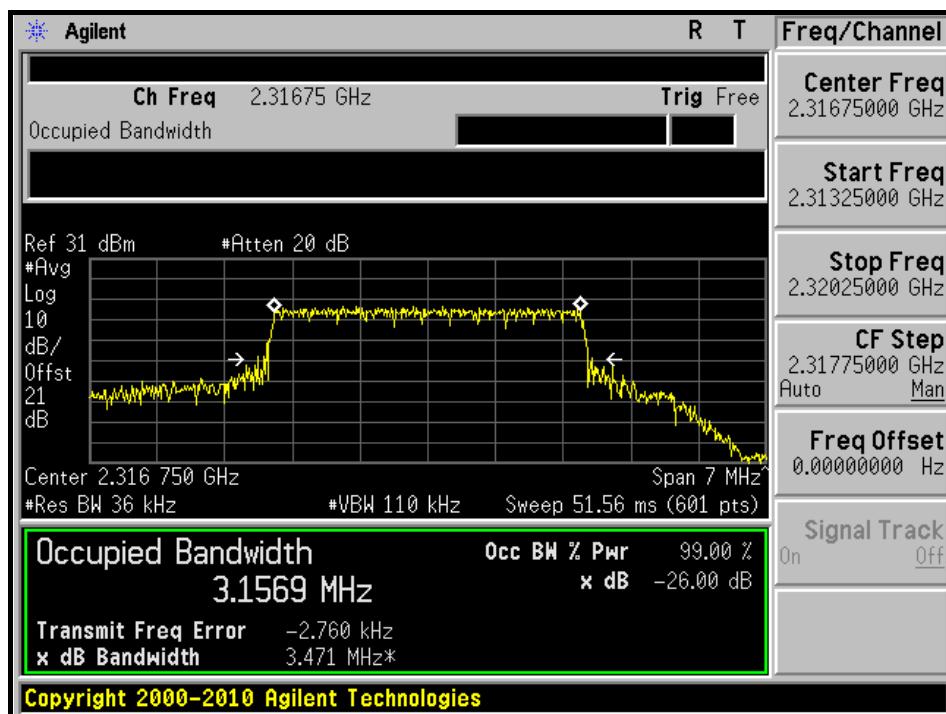

2348.25MHz

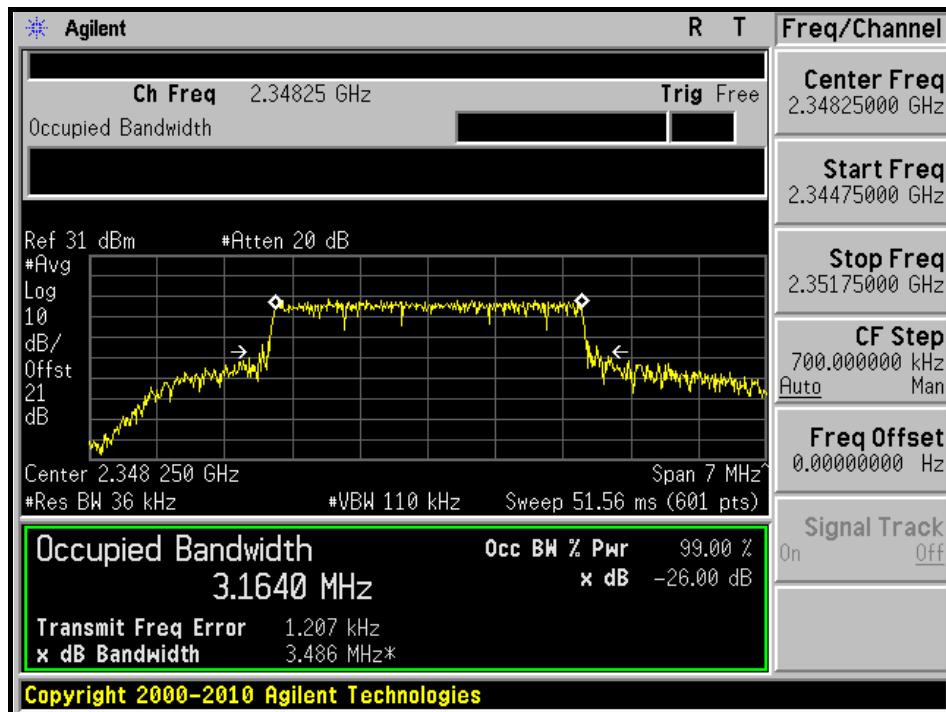





A D T

| MODULATION: 16QAM | |
|----------------------------------|-------------------------------|
| CHANNEL BANDWIDTH: 3.5MHz | |
| FREQ. (MHz) | -26dBc BANDWIDTH (MHz) |
| 2316.75 | 3.412 |
| 2348.25 | 3.411 |

2316.75MHz

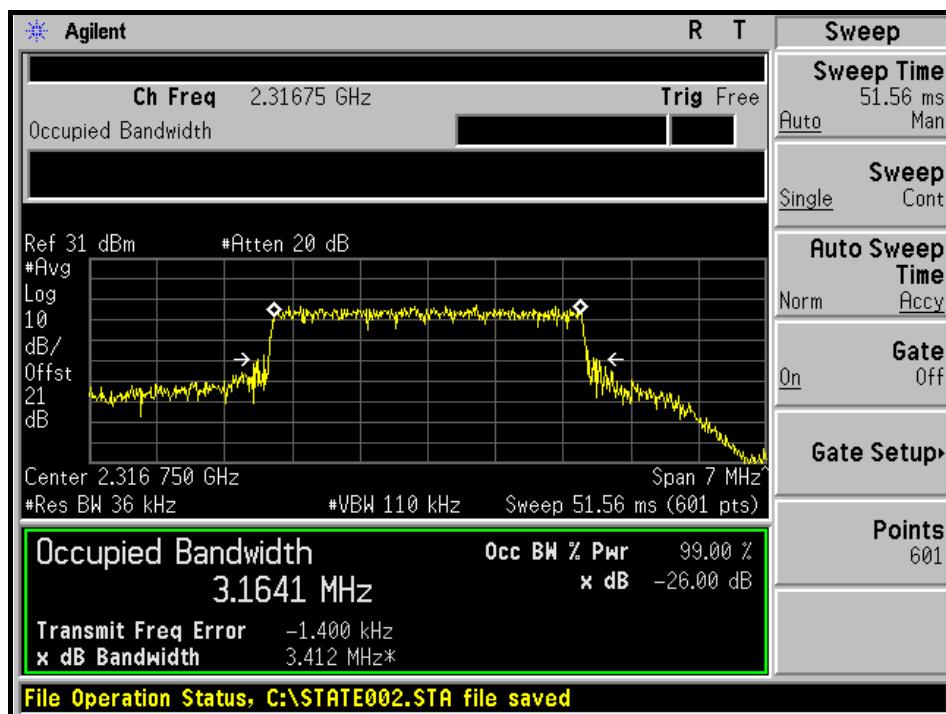

2348.25MHz

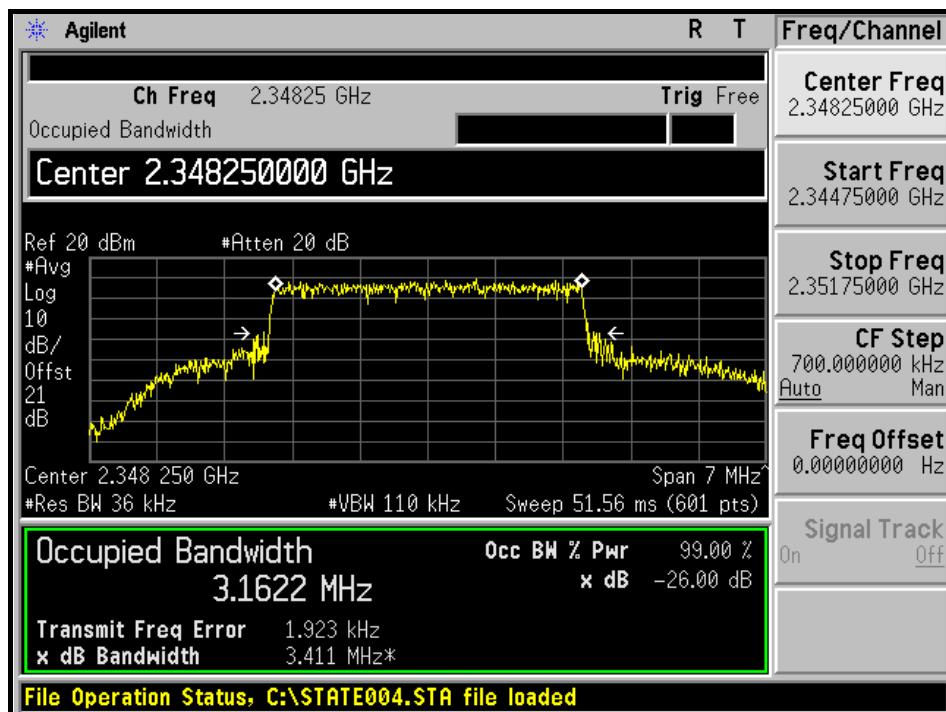



4.4 PEAK TO AVERAGE RATIO

4.4.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

The peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.4.2 TEST INSTRUMENTS

For QPSK modulation

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|----------------------------|--------------|------------|---------------------|-------------------------|
| JFW 20dB attenuation | 50HF-020-SMA | NA | NA | NA |
| RF cable | SUCOFLEX 104 | 274403/4 | Aug. 20, 2010 | Aug. 19, 2011 |
| R&S Spectrum Analyzer | FSP40 | 100039 | Feb. 23, 2011 | Feb. 22, 2012 |

For 16QAM modulation

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|----------------------------|--------------|------------|---------------------|-------------------------|
| JFW 20dB attenuation | 50HF-020-SMA | NA | NA | NA |
| RF cable | SUCOFLEX 104 | 329751/4 | Jan. 27, 2011 | Jan. 26, 2012 |
| R&S Spectrum Analyzer | FSP40 | 100039 | Feb. 23, 2011 | Feb. 22, 2012 |

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

4.4.4 TEST SETUP

Same as Item 4.2.4 (Conducted Power Setup)


4.4.5 EUT OPERATING CONDITION

Same as Item 4.1.5

4.4.6 TEST RESULTS


| MODULATION: QPSK | |
|---------------------------|----------------------------|
| CHANNEL BANDWIDTH: 3.5MHz | |
| CHANNEL FREQUENCY (MHz) | PEAK TO AVERAGE RATIO (dB) |
| 2316.75 | 8.02 |
| 2348.25 | 7.76 |

THE SPECTRUM PLOT OF WORST VALUE:

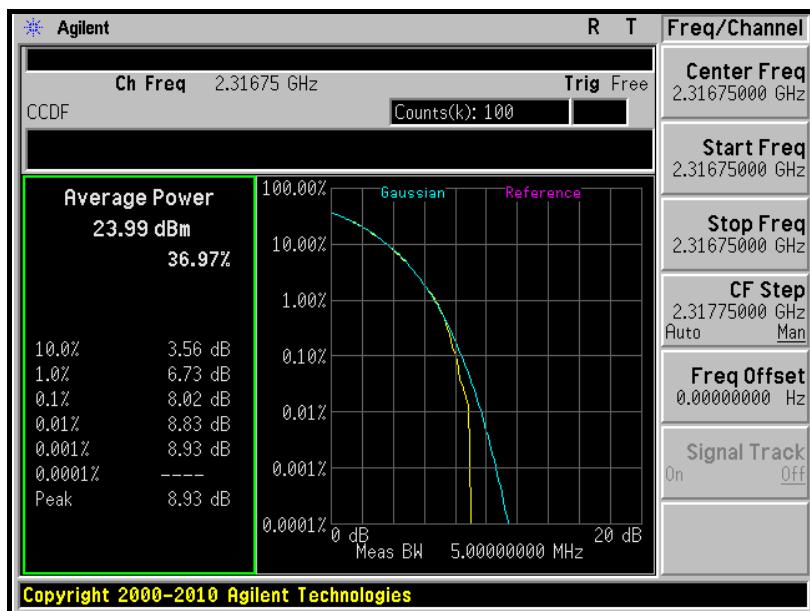

| | |
|---------------------------|----------------------------|
| MODULATION: 16QAM | |
| CHANNEL BANDWIDTH: 3.5MHz | |
| CHANNEL FREQUENCY (MHz) | PEAK TO AVERAGE RATIO (dB) |
| 2316.75 | 7.92 |
| 2348.25 | 7.52 |

THE SPECTRUM PLOT OF WORST VALUE:

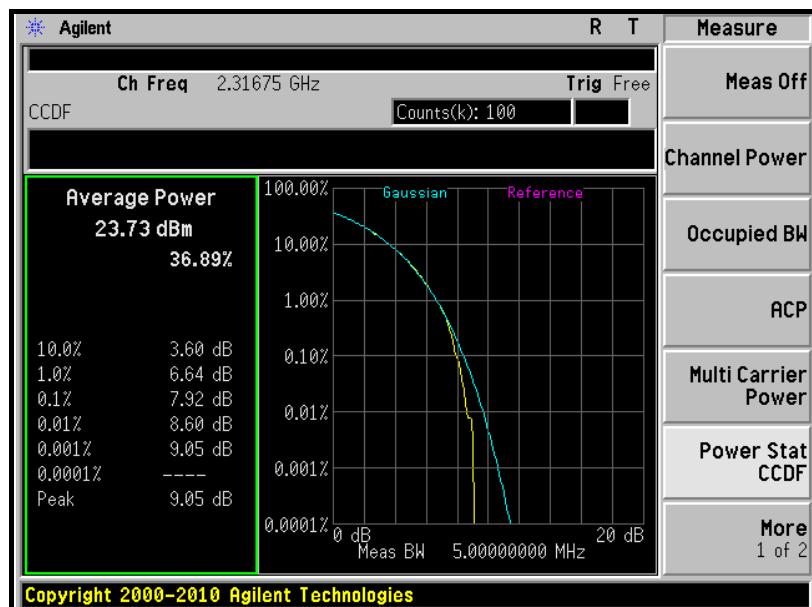



A D T

4.5 BAND EDGE MEASUREMENT

4.5.1 LIMITS OF BAND EDGE MEASUREMENT

For fixed customer premises equipment (CPE) stations operating in the 2305–2320 MHz band and the 2345–2360 MHz band transmitting with more than 2 watts per 5 megahertz average EIRP:

- (i) By a factor of not less than: $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band of operation, and not less than $75 + 10 \log (P)$ dB on all frequencies between 2320 and 2345 MHz.
- (ii) By a factor of not less than: 43 + 10 log (P) dB at 2305 MHz, 70 + 10 log (P) dB at 2300 MHz, 72 + 10 log (P) dB at 2287.5 MHz, and 75 + 10 log (P) dB below 2285 MHz;
- (iii) By a factor of not less than: 43 + 10 log (P) dB at 2360 MHz, 55 + 10 log (P) dB at 2362.5 MHz, 70 + 10 log (P) dB at 2365 MHz, 72 + 10 log (P) dB at 2367.5 MHz, and 75 + 10 log (P) dB above 2370 MHz.



A D T

4.5.2 TEST INSTRUMENTS

For QPSK modulation

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|--|--------------|------------|---------------------|-------------------------|
| Spectrum Analyzer Agilent | E4446A | MY44360124 | Dec. 29, 2010 | Dec. 28, 2011 |
| RF cable | SUCOFLEX 104 | 274403/4 | Aug. 20, 2010 | Aug. 19, 2011 |
| WIT Standard Temperature & Humidity Chamber | TH-4S-C | W981030 | Jun. 15, 2011 | Jun. 14, 2012 |

For 16QAM modulation

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|--|--------------|------------|---------------------|-------------------------|
| Spectrum Analyzer Agilent | E4446A | MY44360124 | Dec. 29, 2010 | Dec. 28, 2011 |
| RF cable | SUCOFLEX 104 | 329751/4 | Jan. 27, 2011 | Jan. 26, 2012 |
| WIT Standard Temperature & Humidity Chamber | TH-4S-C | W981030 | Jun. 15, 2011 | Jun. 14, 2012 |

NOTE: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST SETUP

Same as Item 4.3.4

4.5.4 TEST PROCEDURES

- a. The EUT was set up for the rated peak power. The power was measured with Spectrum Analyzer. All measurements were done at 2 channels: 2316.75MHz & 2348.25MHz operational frequency.
- b. The center frequency of spectrum is the band edge frequency and span is 1.5MHz. RBW of the spectrum is 36kHz. VBW of the spectrum is 110kHz.
- c. Record the max trace plot into the test report.

4.5.5 EUT OPERATING CONDITION


Same as 4.1.5

4.5.6 TEST RESULTS


MODULATION: QPSK

TEST FREQUENCY: 2316.75MHz

Frequency range: 2280~2320MHz

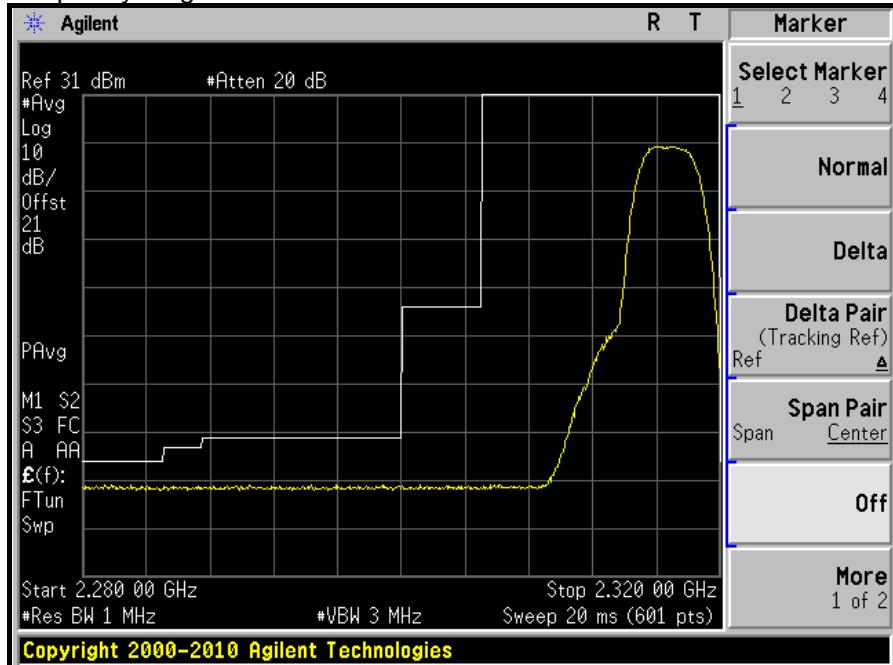

Frequency range: 2320~2321MHz

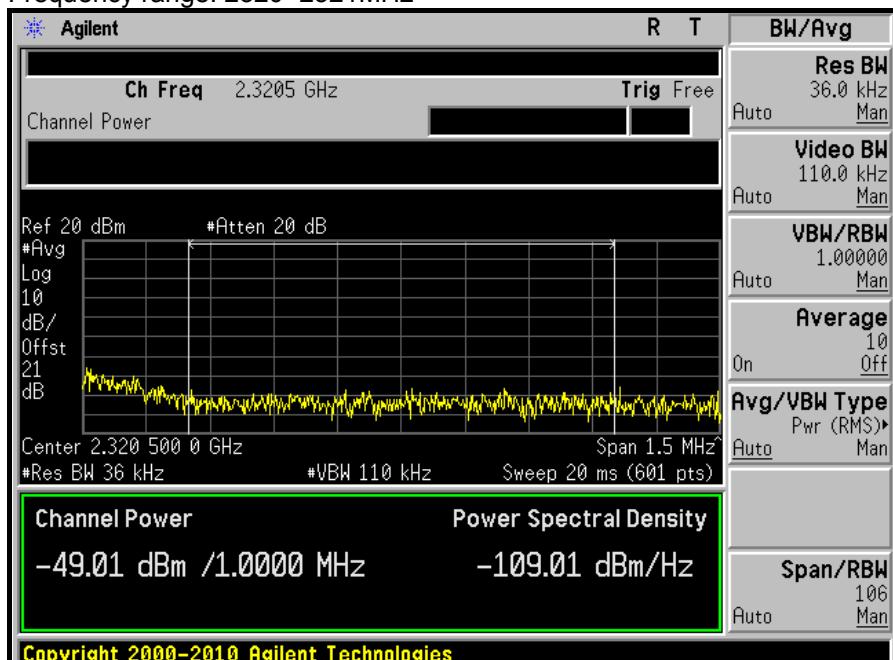


NOTE: Due to instrument noise floor limitation, the full investigating range is subdivided into 3 to 4 plots




A D T

Frequency range: 2321~2380MHz

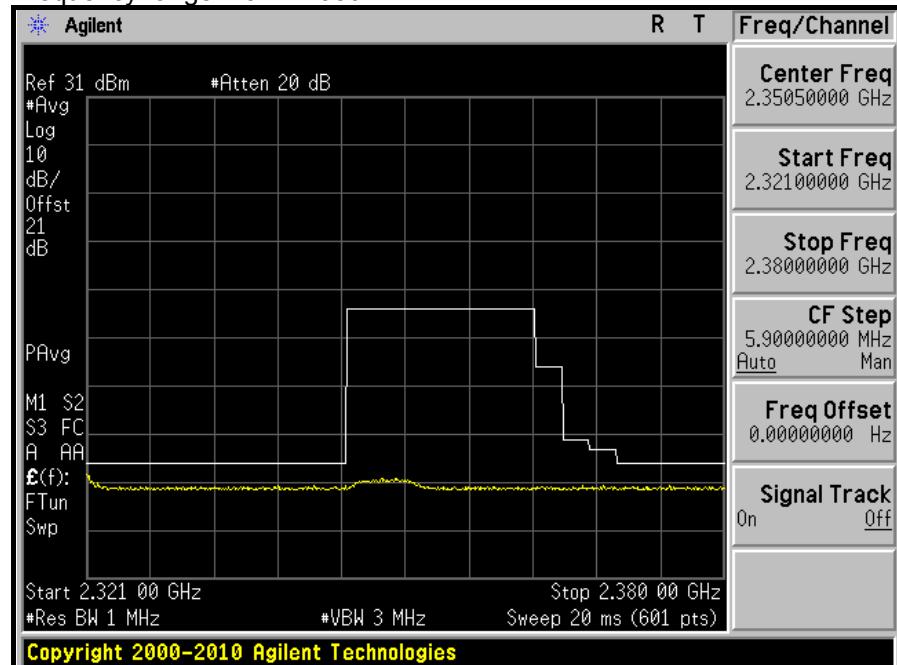


MODULATION: QPSK
TEST FREQUENCY: 2348.25MHz


Frequency range: 2280~2343MHz

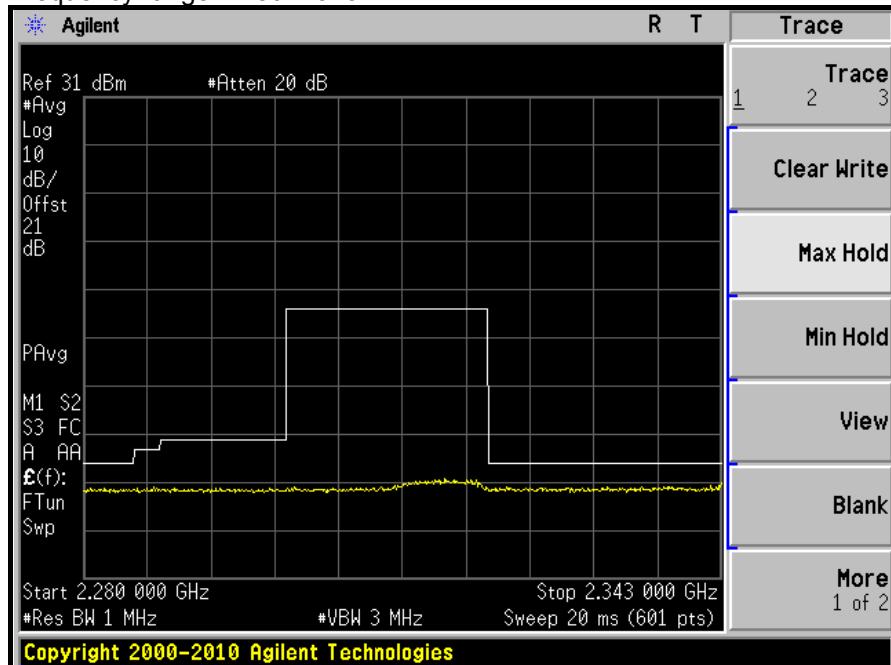


Frequency range: 2343~2344MHz

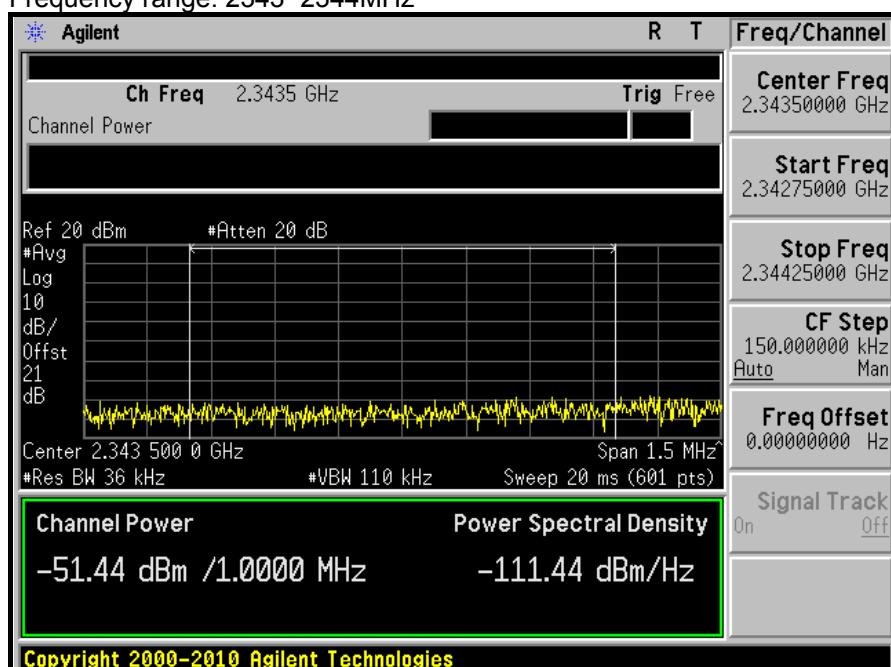

Frequency range: 2344~2345MHz

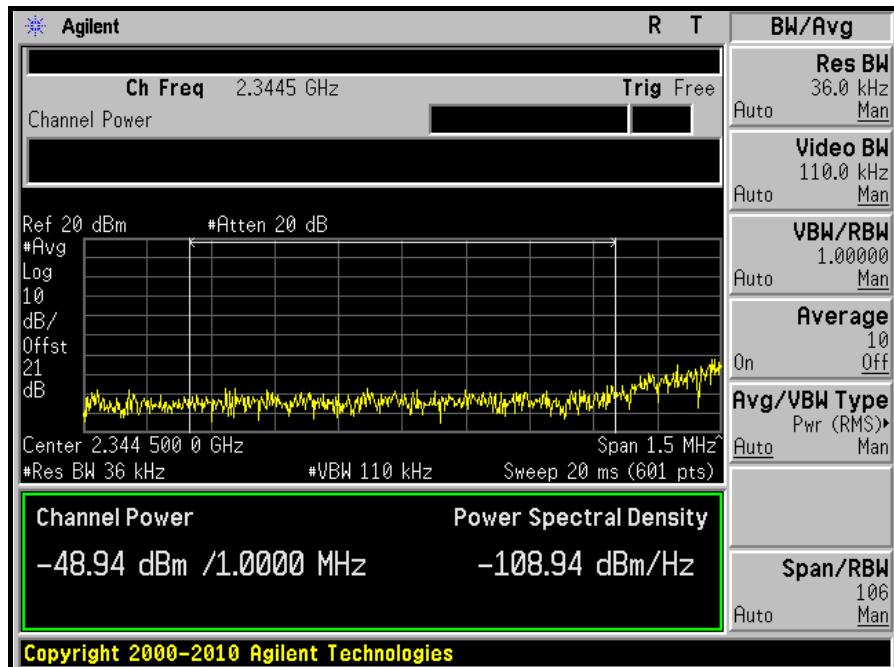


Frequency range: 2345~2380MHz

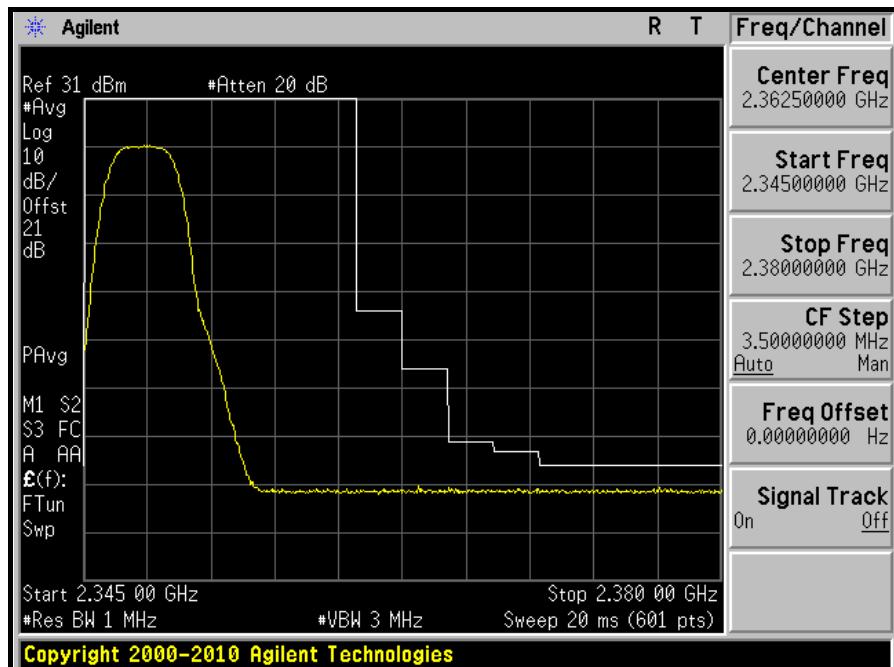


MODULATION: 16QAM
TEST FREQUENCY: 2316.75MHz


Frequency range: 2280~2320MHz

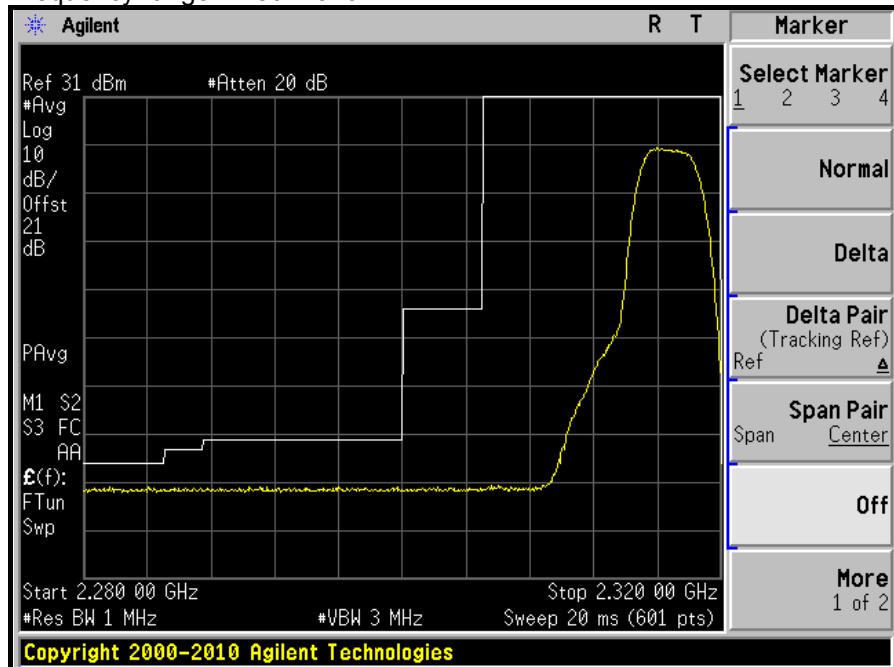

Frequency range: 2320~2321MHz

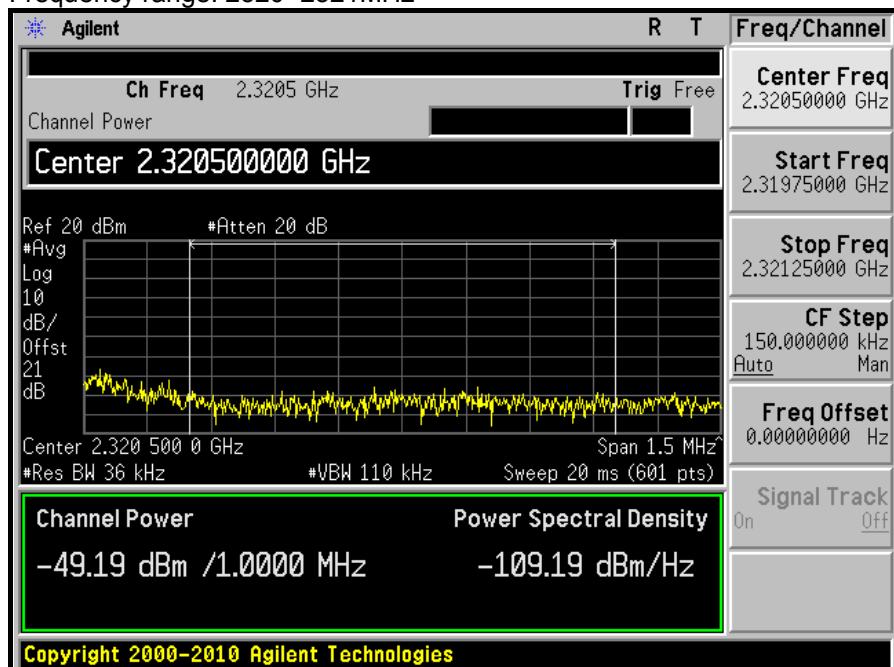


Frequency range: 2321~2380MHz

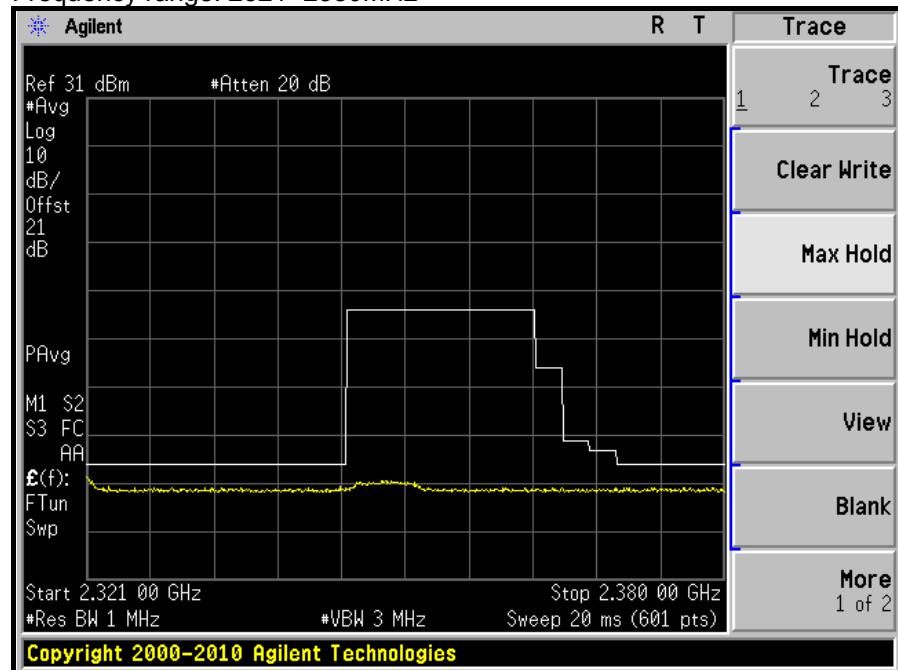


MODULATION: 16QAM

TEST FREQUENCY: 2348.25MHz


Frequency range: 2280~2343MHz

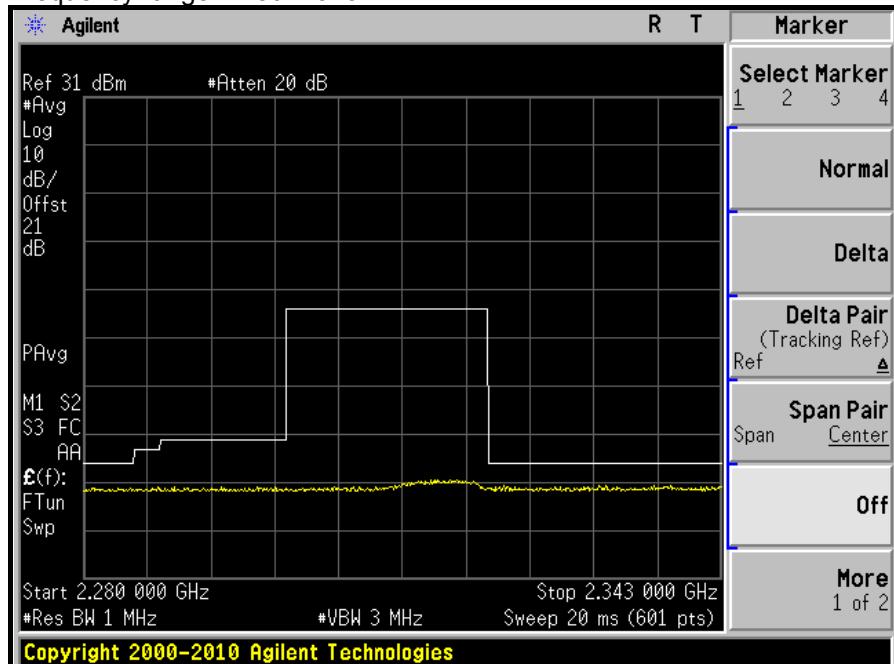


Frequency range: 2343~2344MHz

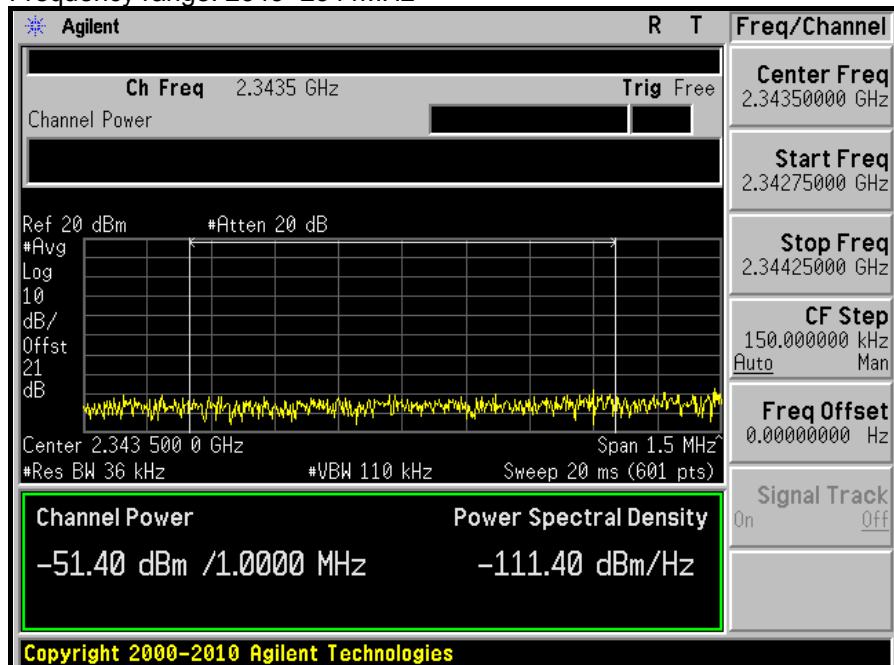

Frequency range: 2344~2345MHz

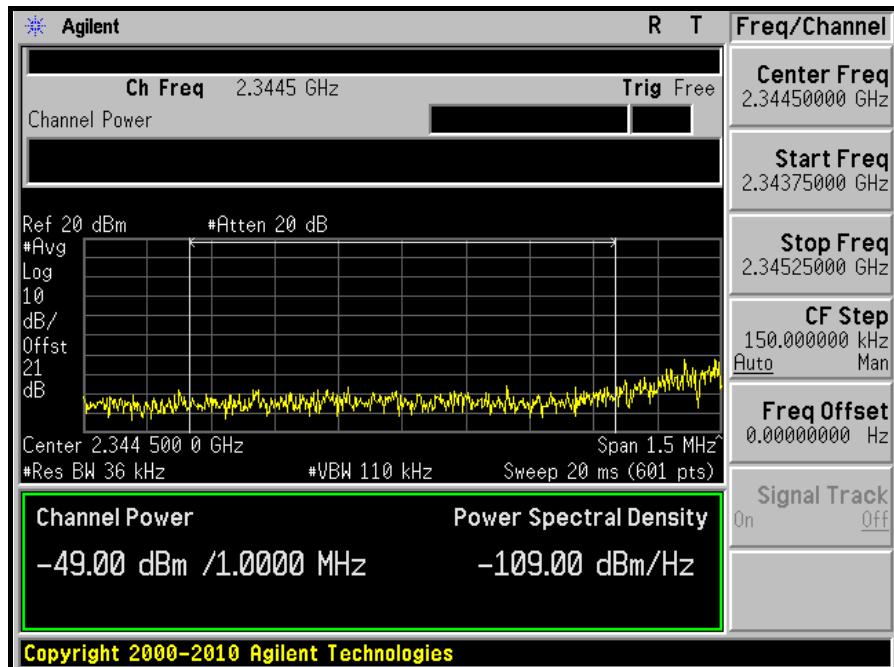

Frequency range: 2345~2380MHz

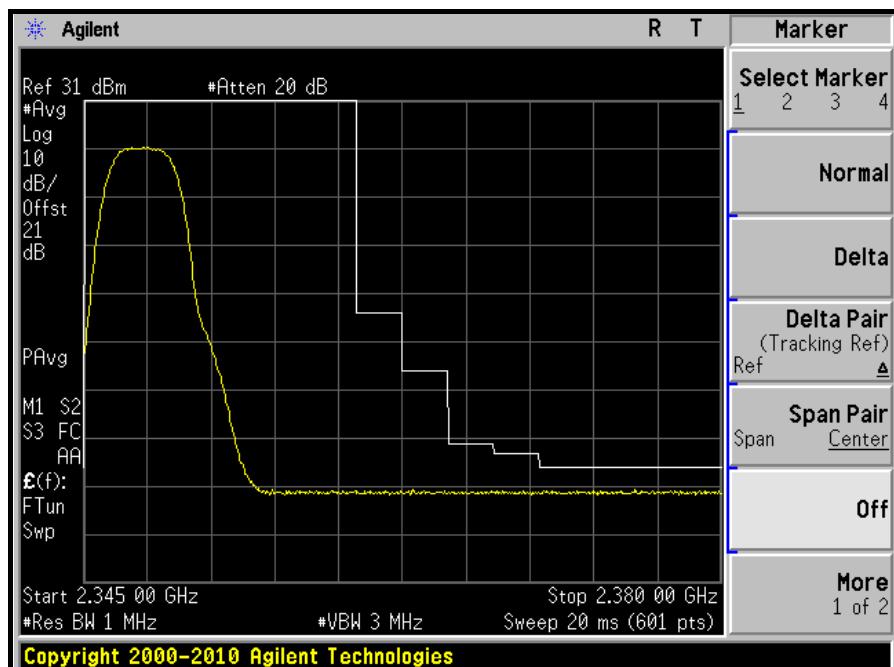



4.6 CONDUCTED SPURIOUS EMISSIONS

4.6.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

In the FCC 27.53(m)(4), On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $55 + 10 \log (P)$ dB. The limit of emission equal to -25 dBm.

4.6.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|--|----------------------|------------|---------------------|-------------------------|
| Spectrum Analyzer Agilent | E4446A | MY44360124 | Dec. 29, 2010 | Dec. 28, 2011 |
| RF cable | SUCOFLEX 104 | 329751/4 | Jan. 27, 2011 | Jan. 26, 2012 |
| DC-6GHz 20dB 50W Fixed attenuator Woken | MDC9331N-20 | 0724 | May 13, 2011 | May 12, 2012 |
| Wainwright Instruments High Pass Filter | WHKX4.5/18G-10S S | NA | NA | NA |

NOTE: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.



A D T

4.6.3 TEST PROCEDURE

- a. All measurements were done at 2 channels: 2316.75MHz & 2348.25MHz operational frequency.
- b. When the spectrum scanned from 30MHz to 24GHz, it shall be connected to the 20dB pad attenuated the carried frequency. The spectrum set RB = 1MHz, VB = 3MHz.

4.6.4 TEST SETUP

Same as 4.3.4

4.6.5 EUT OPERATING CONDITIONS

Same as 4.1.5




A D T

4.6.6 TEST RESULTS

CHANNEL BANDWIDTH: 3.5MHz



2316.75MHz

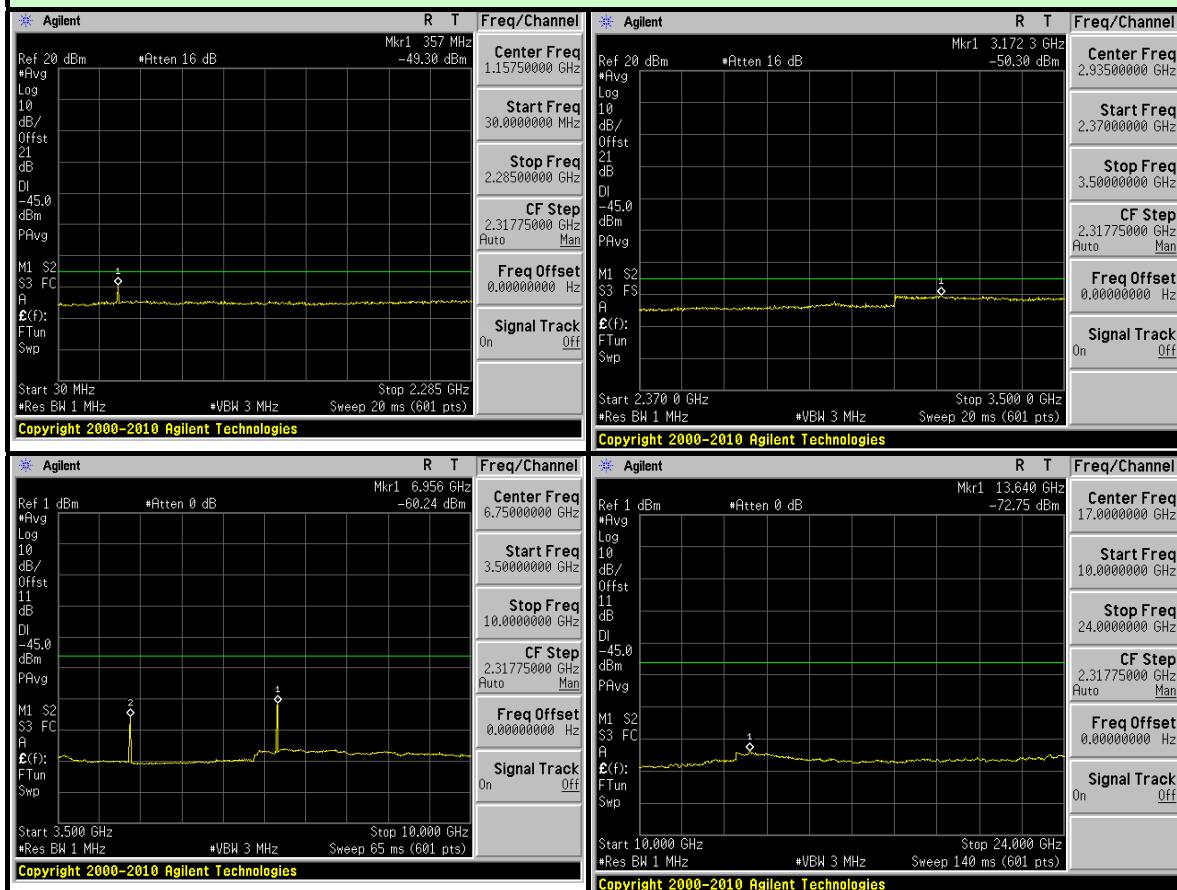



A D T

2348.25MHz

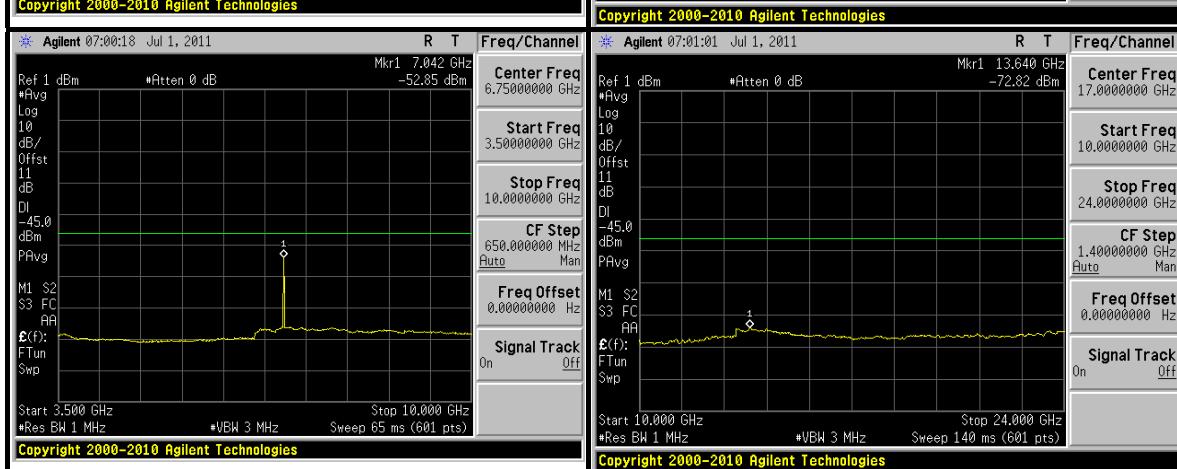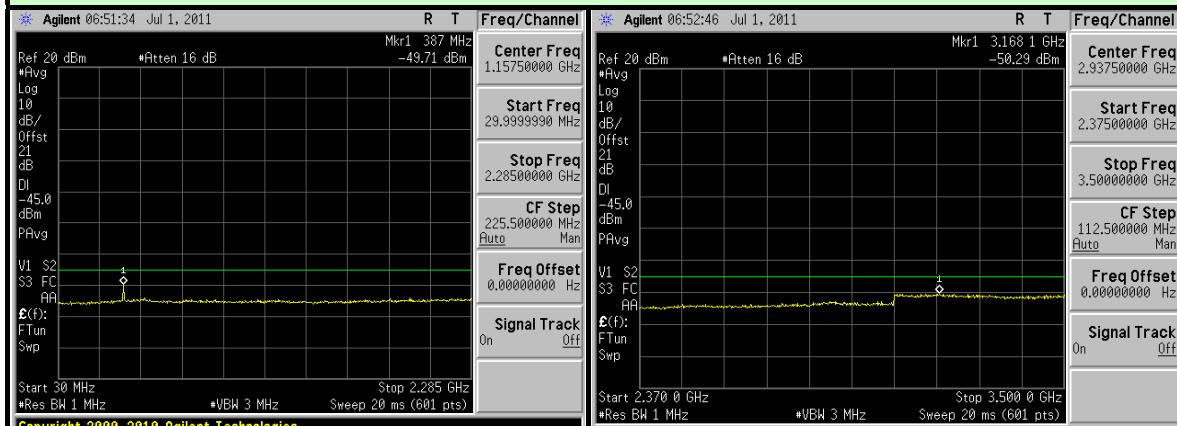



4.7 RADIATED EMISSION MEASUREMENT (BELOW 1GHz)

4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

In the FCC 27.53(m) (4), On any frequency outside a licensee's frequency block the power of any emission shall be attenuated below the transmitter power (P) by at least $55 + 10 \log (P)$ dB. The limit of emission equal to -45 dBm.

NOTE: The following formula is used to convert the equipment radiated power to field strength.

$$E = [1000000 \sqrt{30P}] / 3 \text{ uV/m, where P is Watts.}$$



4.7.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | DATE OF CALIBRATION | DUe DATE OF CALIBRATION |
|---|--------------------------|-------------|---------------------|-------------------------|
| Test Receiver ROHDE & SCHWARZ | ESI7 | 838496/016 | Dec. 27, 2010 | Dec. 26, 2011 |
| Spectrum Analyzer ROHDE & SCHWARZ | FSP40 | 100039 | Feb. 23, 2011 | Feb. 22, 2012 |
| BILOG Antenna SCHWARZBECK | VULB9168 | 9168-155 | Apr. 12, 2011 | Apr. 11, 2012 |
| HORN Antenna SCHWARZBECK | BBHA 9120D | 9120D-408 | Jan. 06, 2011 | Jan. 05, 2012 |
| HORN Antenna SCHWARZBECK | BBHA 9170 | BBHA9170243 | Dec. 27, 2010 | Dec. 26, 2011 |
| Preamplifier Agilent | 8449B | 3008A01961 | Nov. 02, 2010 | Nov. 01, 2011 |
| Preamplifier Agilent | 8447D | 2944A10738 | Nov. 02, 2010 | Nov. 01, 2011 |
| RF signal cable HUBER+SUHNNER | SUCOFLEX 104 | 250792/4 | Aug. 19, 2011 | Aug. 18, 2012 |
| RF signal cable HUBER+SUHNNER | SUCOFLEX 104 | 283397/4 | Aug. 19, 2011 | Aug. 18, 2012 |
| RF signal cable HUBER+SUHNNER | SUCOFLEX 104 | 295012/4 | Aug. 19, 2011 | Aug. 18, 2012 |
| Software ADT. | ADT_Radiated_V7.6.15.9.2 | NA | NA | NA |
| Antenna Tower inn-co GmbH | MA 4000 | 010303 | NA | NA |
| Antenna Tower Controller inn-co GmbH | CO2000 | 019303 | NA | NA |
| Turn Table ADT. | TT100. | TT93021704 | NA | NA |
| Turn Table Controller ADT. | SC100. | SC93021704 | NA | NA |

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 4.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 988962.
5. The IC Site Registration No. is IC7450F-4.



4.7.3 TEST PROCEDURES


- a. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels (2316.75MHz & 2348.25MHz operational frequency)
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution antenna.}$

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP

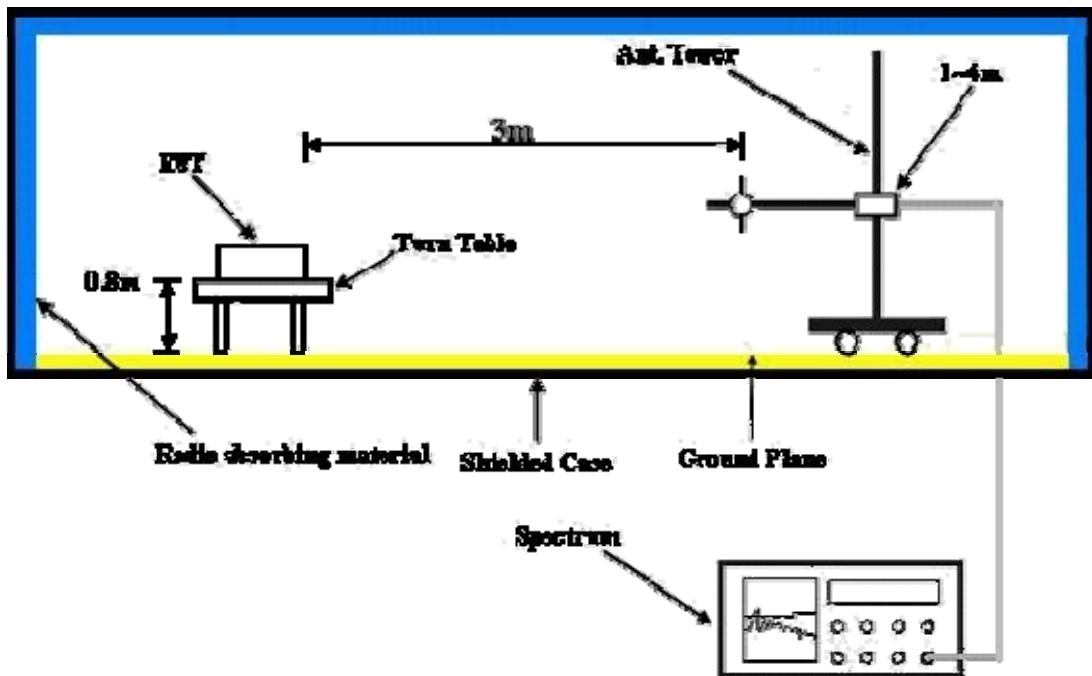

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.7.6 EUT OPERATING CONDITIONS

Same as 4.1.5



A D T

4.7.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA

| | | | |
|-----------|------------|-------------------|--------|
| FREQUENCY | 2316.75MHz | CHANNEL BANDWIDTH | 3.5MHz |
| TEST MODE | A | | |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV) | LIMIT (dBm) | S.G POWER VALUE (dBm) | CORRECTION FACTOR (dB) | POWER VALUE (dBm) |
|-----|-------------|-----------------------|-------------|-----------------------|------------------------|-------------------|
| 1 | 43.61 | 33.6 | -45.0 | -53.2 | -7.7 | -60.9 |
| 2 | 72.77 | 36.5 | -45.0 | -50.3 | -7.7 | -58.0 |
| 3 | 103.87 | 38.4 | -45.0 | -48.5 | -7.7 | -56.2 |
| 4 | 164.13 | 34.7 | -45.0 | -52.3 | -7.7 | -60.0 |
| 5 | 249.66 | 26.9 | -45.0 | -60.1 | -7.7 | -67.8 |
| 6 | 280.76 | 33.8 | -45.0 | -53.3 | -7.7 | -61.0 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV) | LIMIT (dBm) | S.G POWER VALUE (dBm) | CORRECTION FACTOR (dB) | POWER VALUE (dBm) |
|-----|-------------|-----------------------|-------------|-----------------------|------------------------|-------------------|
| 1 | 41.66 | 43.0 | -45.0 | -43.9 | -7.7 | -51.6 |
| 2 | 53.33 | 43.9 | -45.0 | -42.5 | -7.7 | -50.2 |
| 3 | 101.92 | 41.3 | -45.0 | -45.5 | -7.7 | -53.2 |
| 4 | 140.80 | 29.4 | -45.0 | -57.6 | -7.7 | -65.3 |
| 5 | 280.76 | 27.6 | -45.0 | -59.2 | -7.7 | -66.9 |
| 6 | 459.60 | 26.1 | -45.0 | -60.3 | -7.8 | -68.1 |

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

| | | | |
|-----------|------------|-------------------|--------|
| FREQUENCY | 2348.25MHz | CHANNEL BANDWIDTH | 3.5MHz |
| TEST MODE | A | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m | | | | | | |
|---|-------------|-----------------------|-------------|-----------------------|------------------------|-------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV) | LIMIT (dBm) | S.G POWER VALUE (dBm) | CORRECTION FACTOR (dB) | POWER VALUE (dBm) |
| 1 | 41.66 | 35.8 | -45.0 | -51.3 | -7.7 | -59.0 |
| 2 | 72.77 | 36.3 | -45.0 | -50.0 | -7.7 | -57.7 |
| 3 | 105.81 | 37.8 | -45.0 | -48.8 | -7.7 | -56.5 |
| 4 | 164.13 | 34.8 | -45.0 | -51.5 | -7.7 | -59.2 |
| 5 | 183.57 | 33.9 | -45.0 | -52.8 | -7.7 | -60.5 |
| 6 | 292.42 | 35.2 | -45.0 | -51.5 | -7.7 | -59.2 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m | | | | | | |
|---|-------------|-----------------------|-------------|-----------------------|------------------------|-------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV) | LIMIT (dBm) | S.G POWER VALUE (dBm) | CORRECTION FACTOR (dB) | POWER VALUE (dBm) |
| 1 | 51.38 | 44.7 | -45.0 | -42.2 | -7.7 | -49.9 |
| 2 | 72.77 | 41.5 | -45.0 | -45.5 | -7.7 | -53.2 |
| 3 | 101.92 | 41.9 | -45.0 | -45.2 | -7.7 | -52.9 |
| 4 | 144.69 | 28.5 | -45.0 | -57.8 | -7.7 | -65.5 |
| 5 | 288.54 | 28.2 | -45.0 | -58.5 | -7.7 | -66.2 |
| 6 | 350.74 | 26.1 | -45.0 | -60.9 | -7.8 | -68.7 |

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

| | | | |
|-----------|------------|-------------------|--------|
| FREQUENCY | 2316.75MHz | CHANNEL BANDWIDTH | 3.5MHz |
| TEST MODE | B | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m | | | | | | |
|---|-------------|-----------------------|-------------|-----------------------|------------------------|-------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV) | LIMIT (dBm) | S.G POWER VALUE (dBm) | CORRECTION FACTOR (dB) | POWER VALUE (dBm) |
| 1 | 51.38 | 33.7 | -45.0 | -52.8 | -7.7 | -60.5 |
| 2 | 70.82 | 34.9 | -45.0 | -51.7 | -7.7 | -59.4 |
| 3 | 103.87 | 40.6 | -45.0 | -46.6 | -7.7 | -54.3 |
| 4 | 160.24 | 34.0 | -45.0 | -53.2 | -7.7 | -60.9 |
| 5 | 290.48 | 32.7 | -45.0 | -53.8 | -7.7 | -61.5 |
| 6 | 424.61 | 24.7 | -45.0 | -62.4 | -7.8 | -70.2 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m | | | | | | |
|---|-------------|-----------------------|-------------|-----------------------|------------------------|-------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV) | LIMIT (dBm) | S.G POWER VALUE (dBm) | CORRECTION FACTOR (dB) | POWER VALUE (dBm) |
| 1 | 53.33 | 44.2 | -45.0 | -42.5 | -7.7 | -50.2 |
| 2 | 72.77 | 40.7 | -45.0 | -45.9 | -7.7 | -53.6 |
| 3 | 98.04 | 42.5 | -45.0 | -44.0 | -7.7 | -51.7 |
| 4 | 140.8 | 29.3 | -45.0 | -57.3 | -7.7 | -65.0 |
| 5 | 160.24 | 28.7 | -45.0 | -58.3 | -7.7 | -66.0 |
| 6 | 290.48 | 30.4 | -45.0 | -55.9 | -7.7 | -63.6 |

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

| | | | |
|-----------|------------|-------------------|--------|
| FREQUENCY | 2348.25MHz | CHANNEL BANDWIDTH | 3.5MHz |
| TEST MODE | B | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m | | | | | | |
|---|-------------|-----------------------|-------------|-----------------------|------------------------|-------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV) | LIMIT (dBm) | S.G POWER VALUE (dBm) | CORRECTION FACTOR (dB) | POWER VALUE (dBm) |
| 1 | 51.38 | 34.3 | -45.0 | -52.1 | -7.7 | -59.8 |
| 2 | 72.77 | 36.0 | -45.0 | -50.9 | -7.7 | -58.6 |
| 3 | 101.92 | 41.8 | -45.0 | -44.7 | -7.7 | -52.4 |
| 4 | 181.62 | 34.1 | -45.0 | -52.6 | -7.7 | -60.3 |
| 5 | 292.42 | 34.5 | -45.0 | -51.6 | -7.7 | -59.3 |
| 6 | 350.74 | 26.1 | -45.0 | -60.6 | -7.8 | -68.4 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m | | | | | | |
|---|-------------|-----------------------|-------------|-----------------------|------------------------|-------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV) | LIMIT (dBm) | S.G POWER VALUE (dBm) | CORRECTION FACTOR (dB) | POWER VALUE (dBm) |
| 1 | 51.38 | 45.0 | -45.0 | -41.8 | -7.7 | -49.5 |
| 2 | 101.92 | 43.2 | -45.0 | -43.1 | -7.7 | -50.8 |
| 3 | 160.24 | 29.2 | -45.0 | -58.2 | -7.7 | -65.9 |
| 4 | 249.66 | 25.3 | -45.0 | -61.1 | -7.7 | -68.8 |
| 5 | 292.42 | 30.0 | -45.0 | -57.1 | -7.7 | -64.8 |
| 6 | 350.74 | 25.3 | -45.0 | -61.2 | -7.8 | -69.0 |

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



4.8 RADIATED EMISSION MEASUREMENT (ABOVE 1GHz)

4.8.1 LIMITS OF RADIATED EMISSION MEASUREMENT

In the FCC 27.53(m) (4), On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $55 + 10 \log (P)$ dB. The limit of emission equal to -45dBm.

4.8.2 TEST INSTRUMENTS

Same as 4.6.2

4.8.3 TEST PROCEDURES


- a. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels (2316.75MHz & 2348.25MHz operational frequency)
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution antenna.}$

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz

4.8.4 DEVIATION FROM TEST STANDARD

No deviation

4.8.5 TEST SETUP

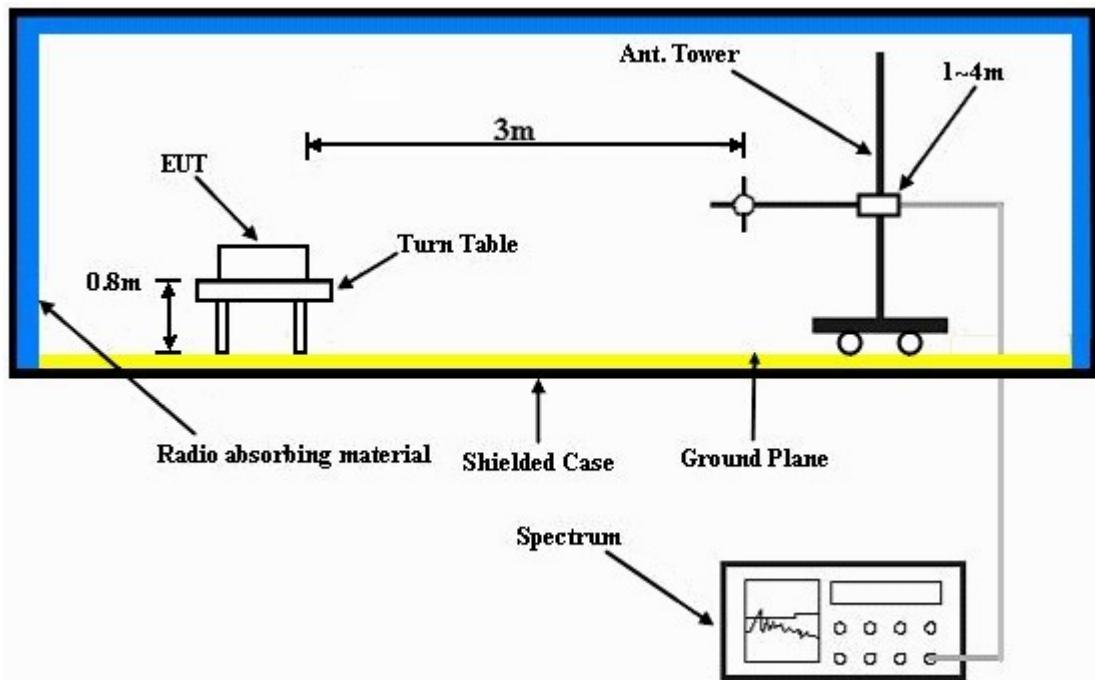

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.8.6 EUT OPERATING CONDITIONS

Same as 4.6.6.



A D T

4.8.7 TEST RESULTS

ABOVE 1GHz DATA

| | | | |
|-----------|------------|-------------------|--------|
| FREQUENCY | 2316.75MHz | CHANNEL BANDWIDTH | 3.5MHz |
| TEST MODE | A | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m | | | | | | |
|---|----------------|-----------------------|--------------|-----------------------|------------------------|-------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV) | LIMIT (dBm) | S.G POWER VALUE (dBm) | CORRECTION FACTOR (dB) | POWER VALUE (dBm) |
| 1 | 4633.50 | 38.1 | -45.0 | -66.4 | 9.6 | -56.8 |
| 2 | 6950.25 | 48.7 | -45.0 | -54.1 | 8.0 | -46.1 |
| 3 | 9267.00 | 48.9 | -45.0 | -54.0 | 7.5 | -46.5 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m | | | | | | |
|---|-------------|-----------------------|-------------|-----------------------|------------------------|-------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV) | LIMIT (dBm) | S.G POWER VALUE (dBm) | CORRECTION FACTOR (dB) | POWER VALUE (dBm) |
| 1 | 4633.50 | 40.6 | -45.0 | -63.9 | 9.6 | -54.3 |
| 2 | 6950.25 | 48.3 | -45.0 | -54.5 | 8.0 | -46.5 |
| 3 | 9267.00 | 48.8 | -45.0 | -54.1 | 7.5 | -46.6 |

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

| | | | |
|------------------|------------|--------------------------|--------|
| FREQUENCY | 2348.25MHz | CHANNEL BANDWIDTH | 3.5MHz |
| TEST MODE | A | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m | | | | | | |
|---|-------------|-----------------------|-------------|-----------------------|------------------------|-------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV) | LIMIT (dBm) | S.G POWER VALUE (dBm) | CORRECTION FACTOR (dB) | POWER VALUE (dBm) |
| 1 | 4696.50 | 37.8 | -45.0 | -66.6 | 9.6 | -57.0 |
| 2 | 7044.75 | 48.2 | -45.0 | -54.5 | 8.0 | -46.5 |
| 3 | 9393.00 | 49.0 | -45.0 | -53.9 | 7.5 | -46.4 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m | | | | | | |
|---|-------------|-----------------------|-------------|-----------------------|------------------------|-------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV) | LIMIT (dBm) | S.G POWER VALUE (dBm) | CORRECTION FACTOR (dB) | POWER VALUE (dBm) |
| 1 | 4696.50 | 41.3 | -45.0 | -63.1 | 9.6 | -53.5 |
| 2 | 7044.75 | 47.7 | -45.0 | -55.0 | 8.0 | -47.0 |
| 3 | 9393.00 | 49.1 | -45.0 | -53.8 | 7.5 | -46.3 |

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



A D T

6 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation and authorization certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5.phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232
Fax: 886-3-3185050

Email: service.adt@tw.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

---END---