

TEST REPORT

ACCORDING TO: FCC 47CFR part 27

FOR:

Airspan Networks Inc.

Base station

Model: MacroMAXe 2510H 2.62-2.69G

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details	3
5	Tests summary	4
6	EUT description	5
6.1	General information	5
6.2	Ports and lines	5
6.3	Support and test equipment	5
6.4	Changes made in the EUT	5
6.5	Test configuration	6
6.6	Transmitter characteristics	7
7	Transmitter tests according to 47CFR part 27	8
7.1	Occupied bandwidth test	8
7.2	Peak output power test.....	23
7.3	Conducted spurious emissions at the band edges (emission mask)	59
7.4	Radiated spurious emission measurements	93
7.5	Spurious emissions at RF antenna connector test	107
7.6	Frequency stability test.....	123
8	APPENDIX A Test equipment and ancillaries used for tests.....	126
9	APPENDIX B Measurement uncertainties	128
10	APPENDIX C Test laboratory description.....	129
11	APPENDIX D Specification references	129
12	APPENDIX E Test equipment correction factors.....	130
13	APPENDIX F Abbreviations and acronyms	143

1 Applicant information

Client name: Airspan Networks Inc.
Address: 777 Yamato Rd, Suite 310, Boca Raton 33431, Florida, USA
Telephone: +1 561 893 8686
Fax: +1 561 893 8671
E-mail: zlevi@airspan.com
Contact name: Mr. Zion Levi

2 Equipment under test attributes

Product name: Base station
Model(s): MacroMAXe 2510H 2.62-2.69G
Serial number: 51E1A71519DE
Hardware version: A5
Software release: 13_9_50_015
Receipt date: 12/02/2010

3 Manufacturer information

Manufacturer name: Airspan Networks Inc.
Address: 777 Yamato Rd, Suite 310, Boca Raton 33431, Florida, USA
Telephone: +1 561 893 8686
Fax: +1 561 893 8671
E-Mail: zlevi@airspan.com
Contact name: Mr. Zion Levi

4 Test details

Project ID: 21484
Location: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Test started: 12/02/2010
Test completed: 12/07/2010
Test specification(s): FCC 47CFR part 27

5 Tests summary

Test	Status
Transmitter characteristics	
Section 27.50(h), Peak output power at RF antenna connector	Pass
Section 27.50(h)(4), Spectral power density	Pass
Section 2.1091, 27.52, RF safety	Pass, exhibit provided in Application for certification
Section 27.53(m)(2), Spurious emissions at RF antenna connector	Pass
Section 27.53(m)(2), Band edge emissions at RF antenna connector	Pass
Section 27.53(m)(2), Radiated spurious emissions	Pass
Section 27.54, Frequency stability	Pass
Section 2.1049, Occupied bandwidth	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.
The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mr. S. Samokha, test engineer	December 7, 2010	
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	December 9, 2010	
Approved by:	Mr. M. Nikishin, EMC and Radio group manager	December 14, 2010	

6 EUT description

6.1 General information

A base station radio, MacroMAXe 2510H 2.62-2.69G, is part of a WiMAX broadband fixed cellular wireless access system. The system provides a radio link between an end-user (a subscriber) and a network to give high-speed data access. The MacroMAXe's transceiver/receiver (up to 64 QAM modulation, data rate up to 46 Mbps) uses OFDM and operating in TDD duplexing mode, equipped with a 18 dBi external antenna.

The MacroMAXe is installed outdoors and typically is mounted on a pole. The Subscriber transmits and receives traffic to and from the base station respectively. The transceiver provides subscribers with "always-on" Internet, high speed data only, or data and voice (VoIP) services and is configured with a unique base station reference number, preventing the ProST Subscriber from relocating to another subscriber premises without authorization.

6.2 Ports and lines

Port type	Port description	Conn. from	Conn. to	Qty.	Cable type	Cable length	Indoor / outdoor
Power	DC power	DC power supply	EUT	1	Unshielded	10	Outdoor
Signal	Ethernet	ETH2 port	ETH3 port	1	Shielded	1.5	Outdoor
Signal	Ethernet	ETH1 port	PC laptop	1	Shielded	10	Outdoor
Signal	Antenna	EUT	GPS external antenna	1	Coax	5	Outdoor
RF	Antenna	EUT	Termination 50 Ohm	4	Coax	NA	Outdoor
Signal	RS-232	EUT	Laptop	1	Unshielded	2	For maintenance only


6.3 Support and test equipment

Description	Manufacturer	Model number	Serial number
DC power supply	Horizon Electronics	DHR3655D	767469
Laptop	IBM	X31	99-TXWYC
GPS Antenna	Trimble	P/N 57861-00	01880177

6.4 Changes made in the EUT

No changes were implemented.

6.5 Test configuration

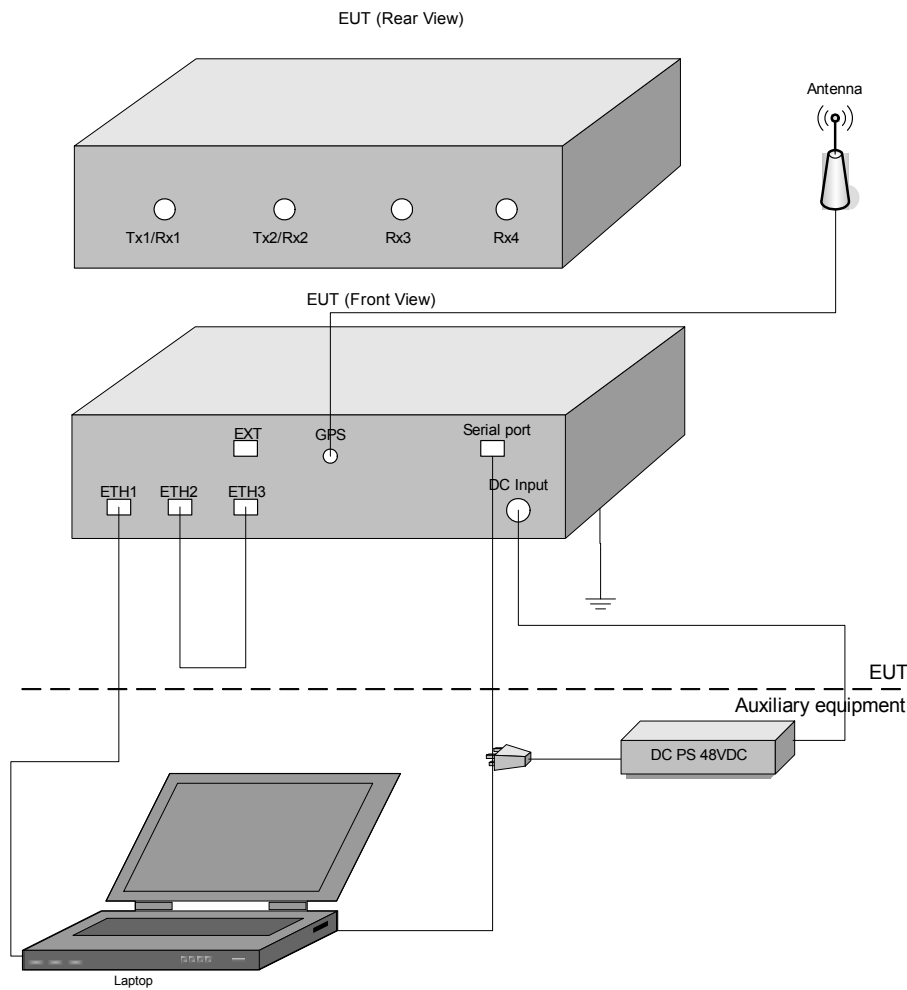

6.6 Transmitter characteristics

Type of equipment				
V	Stand-alone (Equipment with or without its own control provisions)			
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)			
	Plug-in card (Equipment intended for a variety of host systems)			
Intended use		Condition of use		
V	fixed	Always at a distance more than 2 m from all people		
	mobile	Always at a distance more than 20 cm from all people		
	portable	May operate at a distance closer than 20 cm to human body		
Assigned frequency range		2620.0 – 2690.0 MHz		
Operating frequency range		2623.0 – 2683.0 MHz for 3.5 MHz OBW and 5 MHz OBW 2626.0 – 2680.0 MHz for 7 MHz OBW and 10 MHz OBW		
RF channel spacing		3.5, 5, 7, 10 MHz		
Maximum rated output power		At transmitter 50 Ω RF output connector (aggregate power of both RF chains)		
		43.42 dBm – 3.5 MHz OBW 43.21 dBm – 5 MHz OBW 43.04 dBm – 7 MHz OBW 43.15 dBm – 10 MHz OBW		
		EIRP density dBm / MHz (aggregate power of both RF chains) with maximum declared antenna gain		
		47.99 dBm – 3.5 MHz OBW 45.33 dBm – 5 MHz OBW 44.79 dBm – 7 MHz OBW 42.73 dBm – 10 MHz OBW		
Is transmitter output power variable?		No		
		V	Yes	
			continuous variable	
			stepped variable with stepsize	0.5 dB
		minimum RF power	0 dBm	
		maximum RF power	43.28 dBm	
Antenna connection				
unique coupling	V	standard connector	Integral	
		with temporary RF connector		
		without temporary RF connector		
Antenna/s technical characteristics				
Type	Manufacturer	Model number	Gain	
Dual Polarized 65° Sector Antenna, Fixed Tilt	Alpha Wireless	AW3007	18 dBi	
Dual Polarized 90° Sector Antenna, Fixed Tilt	Alpha Wireless	AW3008	17 dBi	
Transmitter aggregate data rate/s, Mbps				
Transmitter 99% power bandwidth	Type of modulation			
	QPSK	16QAM	64QAM	
	3.5 MHz	4	9	14
	5 MHz	7	14	23
	7 MHz	8	17	28
10 MHz	13	27	46	
Type of multiplexing		OFDMA/TDD		
Modulating test signal (baseband)		PRBS		
Maximum transmitter duty cycle in normal use		75%		
Transmitter power source				
V	DC	Nominal rated voltage	48 VDC via DC power supply	
Common power source for transmitter and receiver		V	yes no	

Test specification:		Section 2.1049, Occupied bandwidth	
Test procedure:		47 CFR, Section 2.1049	
Test mode:		Compliance	Verdict: PASS
Date:		12/2/2010	
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

7 Transmitter tests according to 47CFR part 27

7.1 Occupied bandwidth test

7.1.1 General

This test was performed to measure transmitter occupied bandwidth. Specification test limits are given in Table 7.1.1.

Table 7.1.1 Occupied bandwidth limits


Assigned frequency, MHz	Modulation envelope reference points*, dBc	Maximum allowed bandwidth, kHz
2620.0 – 2686.0 MHz	26	NA

* - Modulation envelope reference points are provided in terms of attenuation below the unmodulated carrier.

7.1.2 Test procedure

- 7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.
- 7.1.2.2 The EUT was set to transmit the unmodulated carrier and the reference peak power level was measured.
- 7.1.2.3 The EUT was set to transmit the normally modulated carrier.
- 7.1.2.4 The transmitter occupied bandwidth was measured with spectrum analyzer as a frequency delta between the reference points on modulation envelope and provided in Table 7.1.2 and the associated plots.

Figure 7.1.1 Occupied bandwidth test setup



Test specification:		Section 2.1049, Occupied bandwidth	
Test procedure:		47 CFR, Section 2.1049	
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Table 7.1.2 Occupied bandwidth test results

DETECTOR USED: Average
RESOLUTION BANDWIDTH: 36 kHz
VIDEO BANDWIDTH: 110 kHz
MODULATION ENVELOPE REFERENCE POINTS: 26 dBc
MODULATING SIGNAL: PRBS
EBW: 3.5 MHz

Carrier frequency, MHz	Occupied bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
QPSK 4 Mbps				
2623.000	3244.2	NA	NA	Pass
2653.000	3238.4	NA	NA	Pass
2683.000	3244.3	NA	NA	Pass
64QAM 14 Mbps				
2623.000	3240.5	NA	NA	Pass
2653.000	3240.5	NA	NA	Pass
2683.000	3239.6	NA	NA	Pass

DETECTOR USED: Average
RESOLUTION BANDWIDTH: 51 kHz
VIDEO BANDWIDTH: 150 kHz
MODULATION ENVELOPE REFERENCE POINTS: 26 dBc
MODULATING SIGNAL: PRBS
EBW: 5 MHz

Carrier frequency, MHz	Occupied bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
QPSK 7 Mbps				
2623.000	4547.2	NA	NA	Pass
2653.000	4547.1	NA	NA	Pass
2683.000	4538.9	NA	NA	Pass
64QAM 23 Mbps				
2623.000	4539.6	NA	NA	Pass
2653.000	4540.0	NA	NA	Pass
2683.000	4547.5	NA	NA	Pass

Test specification:		Section 2.1049, Occupied bandwidth	
Test procedure:		47 CFR, Section 2.1049	
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Table 7.1.2 Occupied bandwidth test results (continued)

DETECTOR USED: Average
RESOLUTION BANDWIDTH: 75 kHz
VIDEO BANDWIDTH: 300 kHz
MODULATION ENVELOPE REFERENCE POINTS: 26 dBc
MODULATING SIGNAL: PRBS
EBW: 7 MHz

Carrier frequency, MHz	Occupied bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
QPSK 8 Mbps				
2626.000	6482.0	NA	NA	Pass
2656.000	6482.7	NA	NA	Pass
2680.000	6470.0	NA	NA	Pass
64QAM 28 Mbps				
2626.000	6468.3	NA	NA	Pass
2656.000	6469.7	NA	NA	Pass
2680.000	6487.0	NA	NA	Pass

DETECTOR USED: Average
RESOLUTION BANDWIDTH: 100 kHz
VIDEO BANDWIDTH: 300 kHz
MODULATION ENVELOPE REFERENCE POINTS: 26 dBc
MODULATING SIGNAL: PRBS
EBW: 10 MHz

Carrier frequency, MHz	Occupied bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
QPSK 13 Mbps				
2626.000	9070.5	NA	NA	Pass
2656.000	9113.0	NA	NA	Pass
2680.000	9071.4	NA	NA	Pass
64QAM 46 Mbps				
2626.000	9111.7	NA	NA	Pass
2656.000	9111.8	NA	NA	Pass
2680.000	9112.1	NA	NA	Pass


Reference numbers of test equipment used

HL 2953	HL 3818						
---------	---------	--	--	--	--	--	--


Full description is given in Appendix A.

Test specification: Section 2.1049, Occupied bandwidth			
Test procedure: 47 CFR, Section 2.1049			
Test mode: Compliance		Verdict: PASS	
Date: 12/2/2010			
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.1.1 Occupied bandwidth test results at mid frequency, 3.5 MHz EBW, QPSK

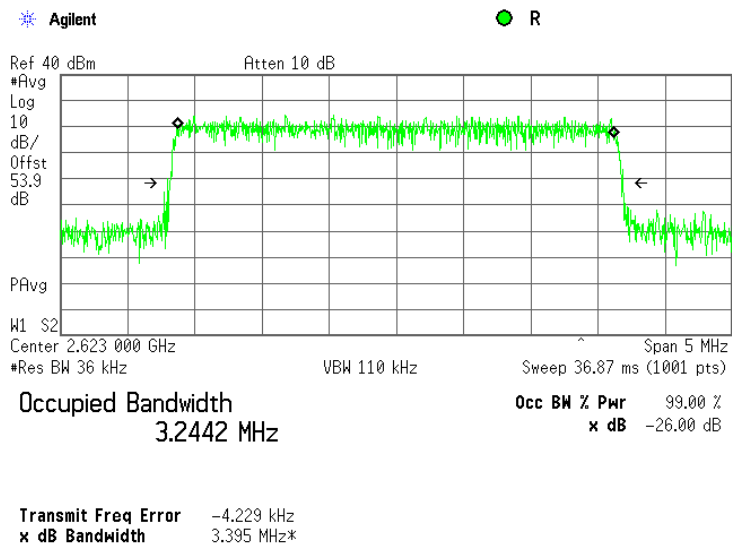


Plot 7.1.2 Occupied bandwidth test results at mid frequency, 3.5 MHz EBW, QPSK

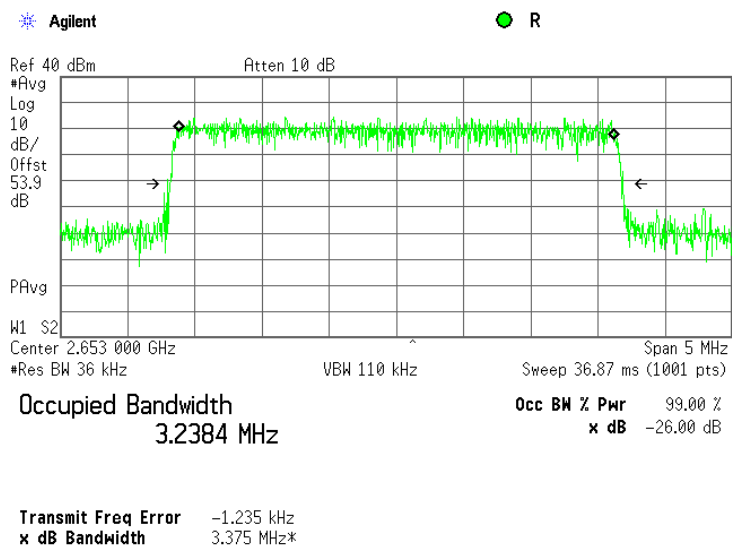


Test specification:		Section 2.1049, Occupied bandwidth	
Test procedure:		47 CFR, Section 2.1049	
Test mode:		Compliance	Verdict: PASS
Date:		12/2/2010	
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.1.3 Occupied bandwidth test results at high frequency, 3.5 MHz EBW, QPSK

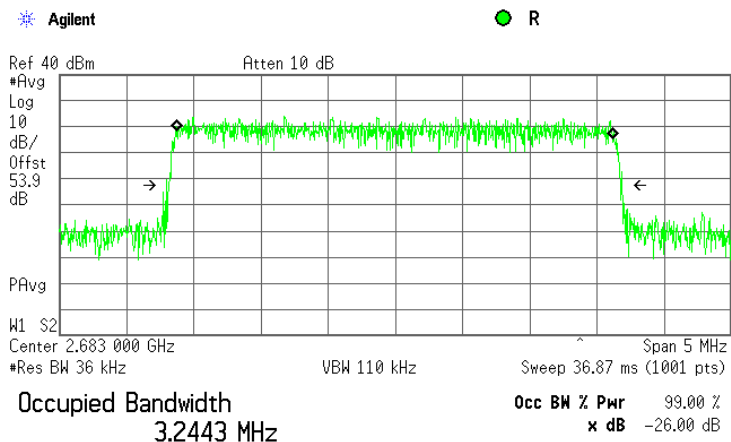

Transmit Freq Error -4.493 kHz
x dB Bandwidth 3.396 MHz*


Plot 7.1.4 Occupied bandwidth test results at low frequency, 3.5 MHz EBW, 64QAM

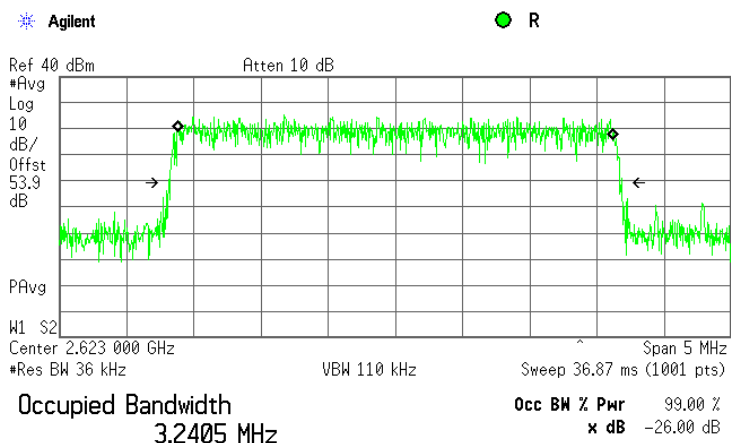

Transmit Freq Error 109.879 Hz
x dB Bandwidth 3.373 MHz*


Test specification:		Section 2.1049, Occupied bandwidth	
Test procedure:		47 CFR, Section 2.1049	
Test mode:		Compliance	Verdict: PASS
Date:		12/2/2010	
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.1.5 Occupied bandwidth test results at mid frequency, 3.5 MHz EBW, 64QAM

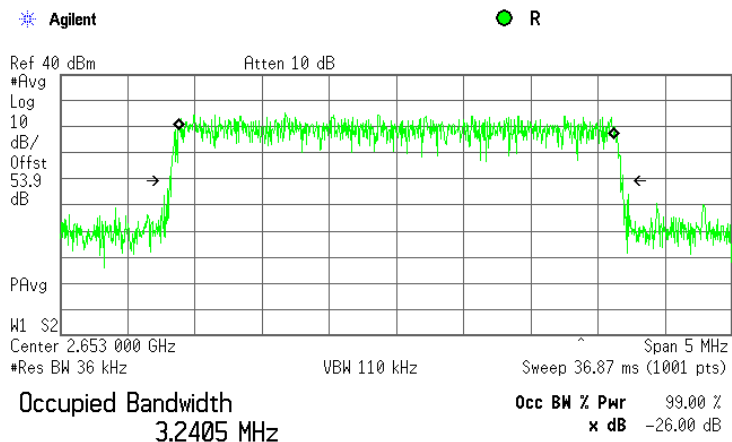

Transmit Freq Error -229.123 Hz
x dB Bandwidth 3.374 MHz*


Plot 7.1.6 Occupied bandwidth test results at high frequency, 3.5 MHz EBW, 64QAM

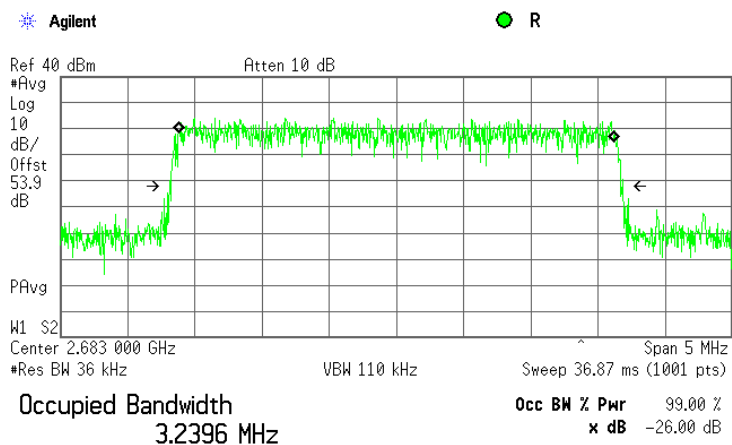

Transmit Freq Error -529.589 Hz
x dB Bandwidth 3.374 MHz*


Test specification: Section 2.1049, Occupied bandwidth			
Test procedure: 47 CFR, Section 2.1049			
Test mode: Compliance	Verdict: PASS		
Date: 12/2/2010			
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.1.7 Occupied bandwidth test results at low frequency, 5 MHz EBW, QPSK

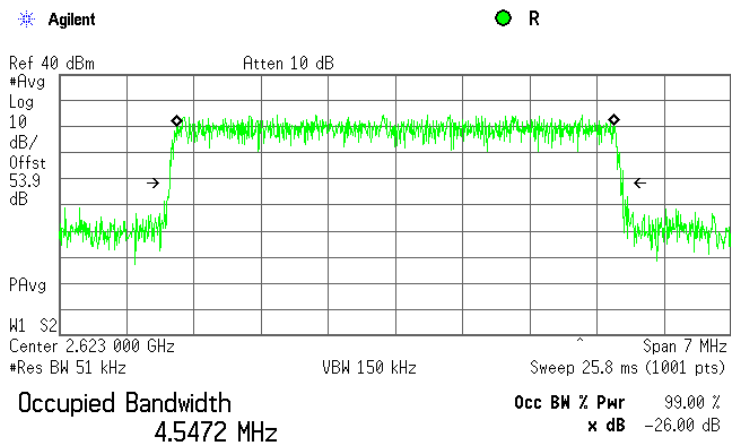

Transmit Freq Error -187.178 Hz
x dB Bandwidth 4.724 MHz*


Plot 7.1.8 Occupied bandwidth test results at mid frequency, 5 MHz EBW, QPSK

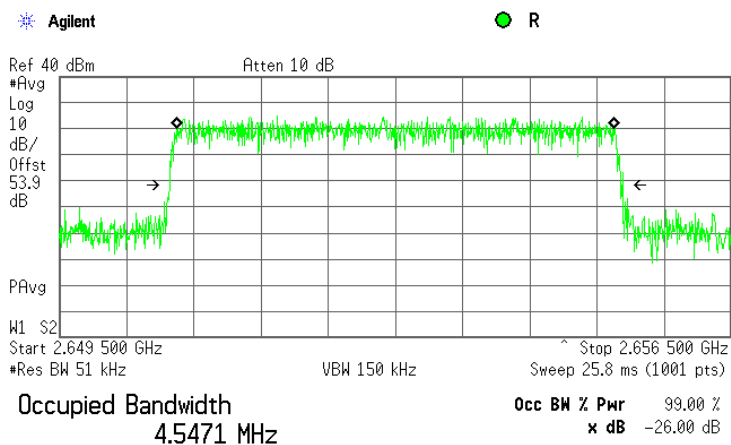

Transmit Freq Error -583.783 Hz
x dB Bandwidth 4.725 MHz*


Test specification:	Section 2.1049, Occupied bandwidth		
Test procedure:	47 CFR, Section 2.1049		
Test mode:	Compliance	Verdict: PASS	
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.1.9 Occupied bandwidth test results at high frequency, 5 MHz EBW, QPSK

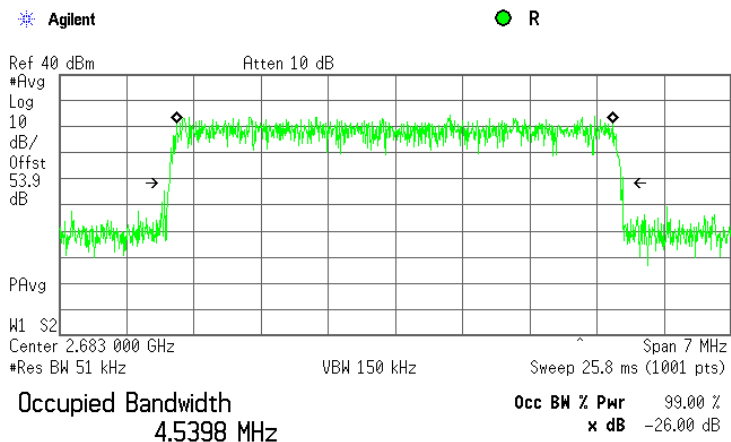

Transmit Freq Error -8.587 kHz
x dB Bandwidth 4.725 MHz*


Plot 7.1.10 Occupied bandwidth test results at low frequency, 5 MHz EBW, 64QAM

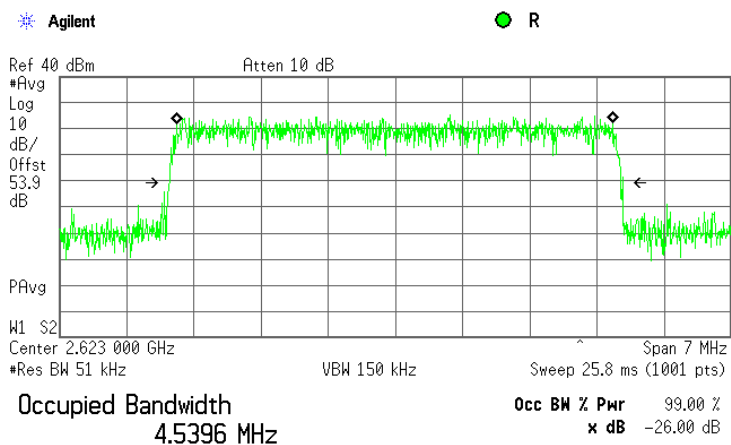


Transmit Freq Error -8.291 kHz
x dB Bandwidth 4.725 MHz*

Test specification:		Section 2.1049, Occupied bandwidth	
Test procedure:		47 CFR, Section 2.1049	
Test mode:		Compliance	Verdict: PASS
Date:		12/2/2010	
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.1.11 Occupied bandwidth test results at mid frequency, 5 MHz EBW, 64QAM

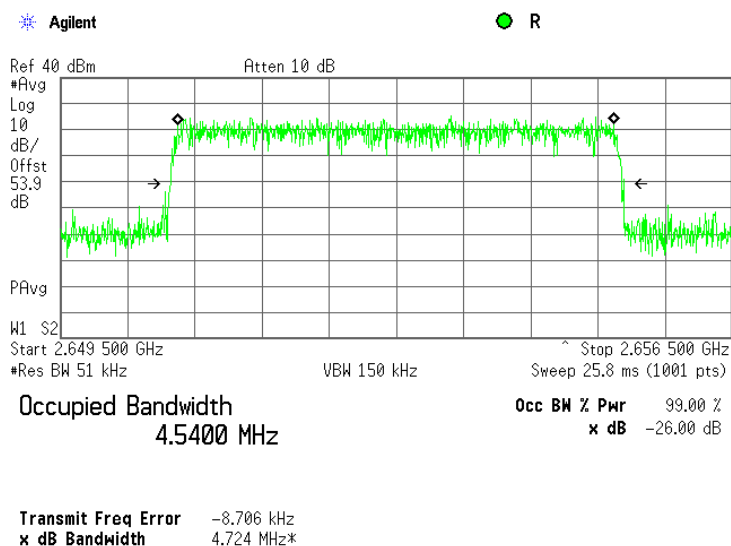


Plot 7.1.12 Occupied bandwidth test results at high frequency, 5 MHz EBW, 64QAM

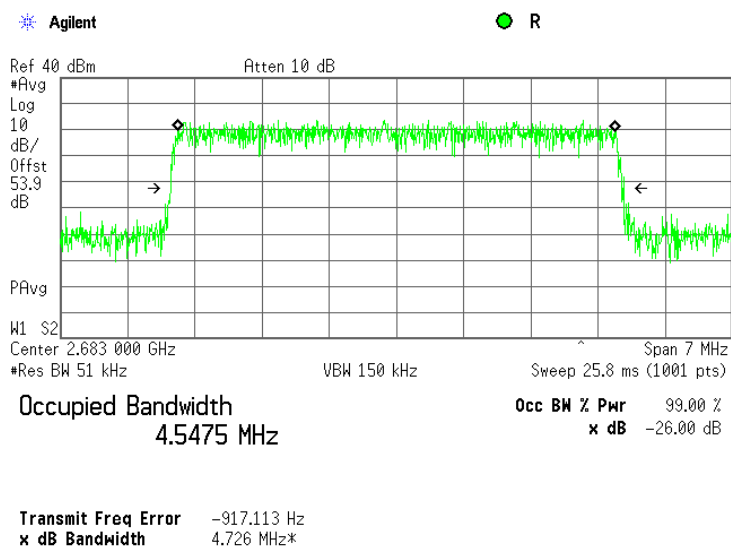


Test specification: Section 2.1049, Occupied bandwidth			
Test procedure: 47 CFR, Section 2.1049			
Test mode: Compliance		Verdict: PASS	
Date: 12/2/2010			
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.1.13 Occupied bandwidth test results at low frequency, 7 MHz EBW, QPSK

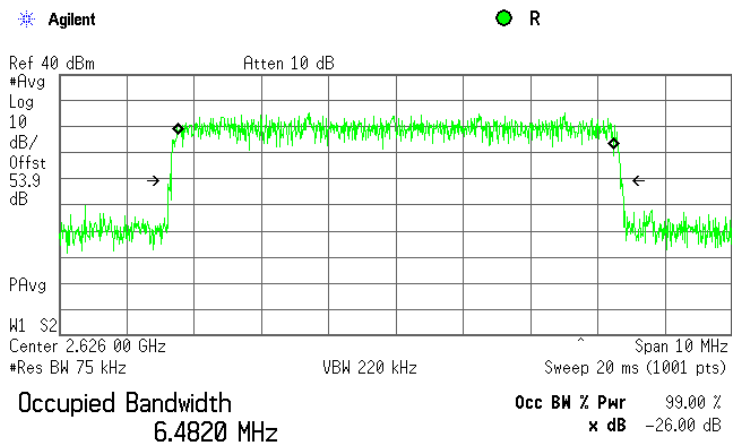

Transmit Freq Error 991.386 Hz
x dB Bandwidth 6.718 MHz*


Plot 7.1.14 Occupied bandwidth test results at mid frequency, 7 MHz EBW, QPSK

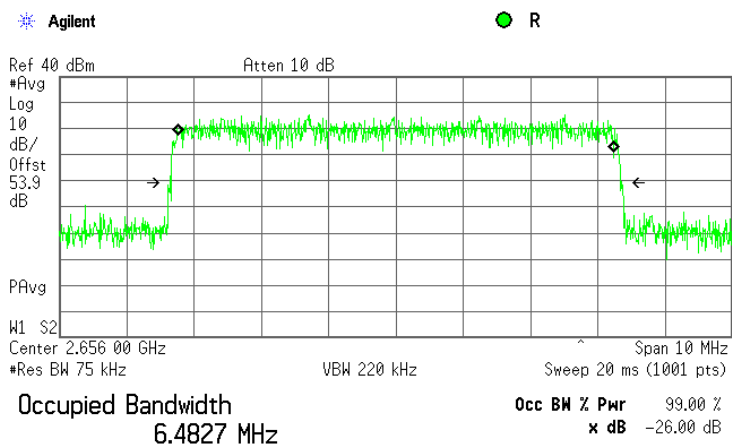

Transmit Freq Error 442.944 Hz
x dB Bandwidth 6.718 MHz*


Test specification:	Section 2.1049, Occupied bandwidth		
Test procedure:	47 CFR, Section 2.1049		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.1.15 Occupied bandwidth test results at high frequency, 7 MHz EBW, QPSK

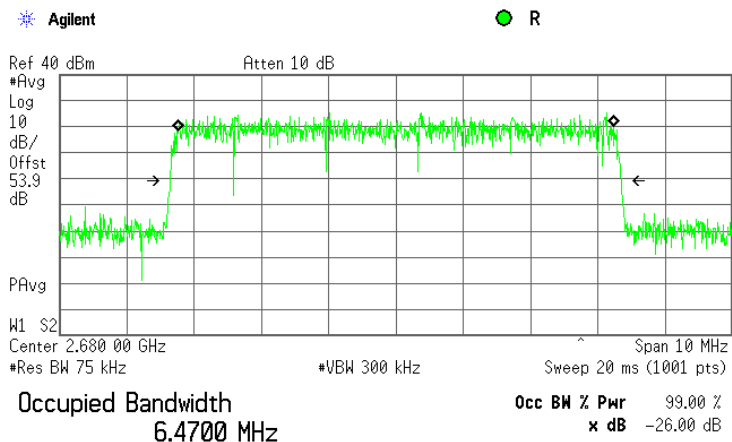

Transmit Freq Error -4.295 kHz
x dB Bandwidth 6.698 MHz*


Plot 7.1.16 Occupied bandwidth test results at low frequency, 7 MHz EBW, 64QAM

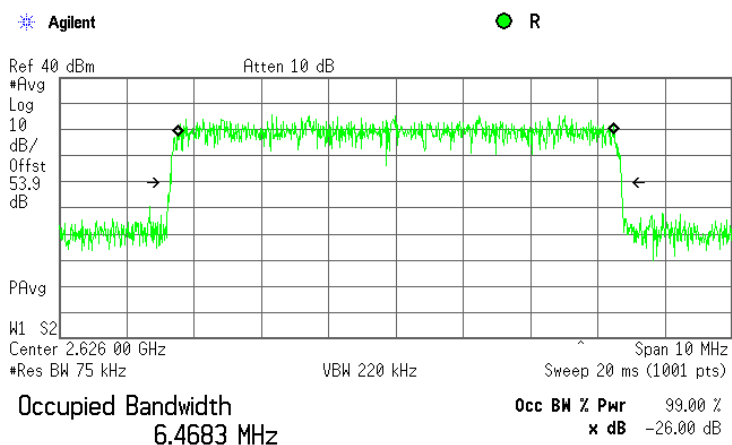


Transmit Freq Error -940.226 Hz
x dB Bandwidth 6.714 MHz*

Test specification: Section 2.1049, Occupied bandwidth			
Test procedure: 47 CFR, Section 2.1049			
Test mode: Compliance	Verdict: PASS		
Date: 12/2/2010			
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.1.17 Occupied bandwidth test results at mid frequency, 7 MHz EBW, 64QAM

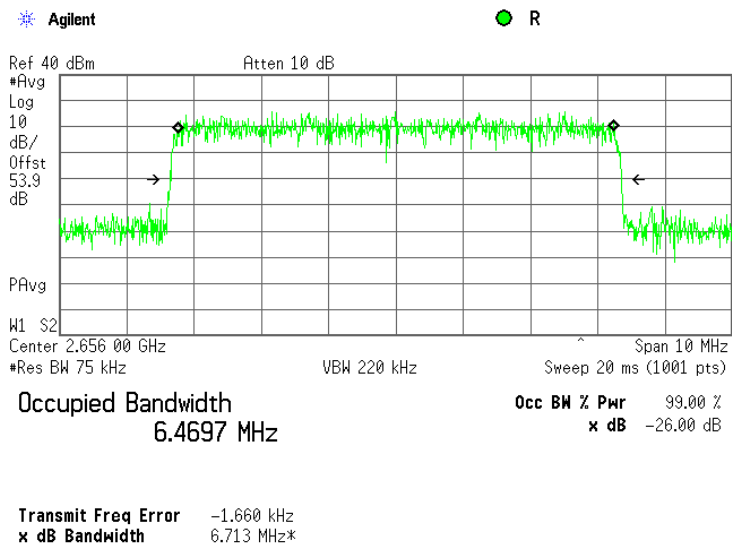


Plot 7.1.18 Occupied bandwidth test results at high frequency, 7 MHz EBW, 64QAM

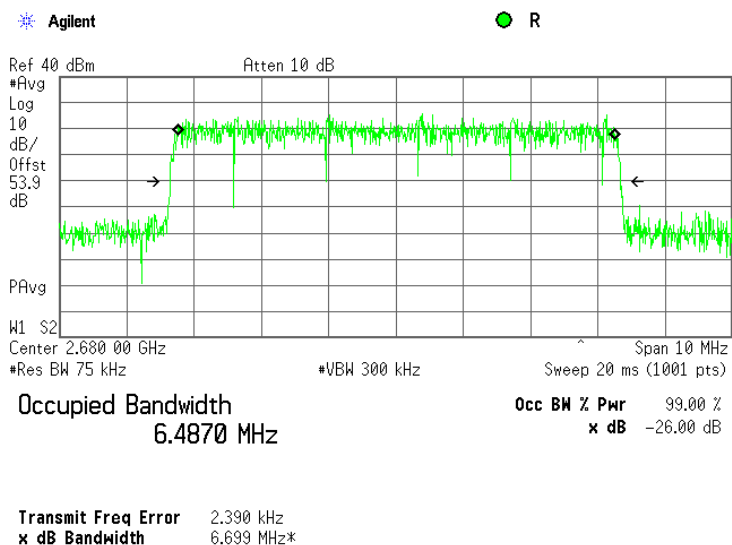


Test specification: Section 2.1049, Occupied bandwidth			
Test procedure: 47 CFR, Section 2.1049			
Test mode: Compliance		Verdict: PASS	
Date: 12/2/2010			
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.1.19 Occupied bandwidth test results at low frequency, 10 MHz EBW, QPSK

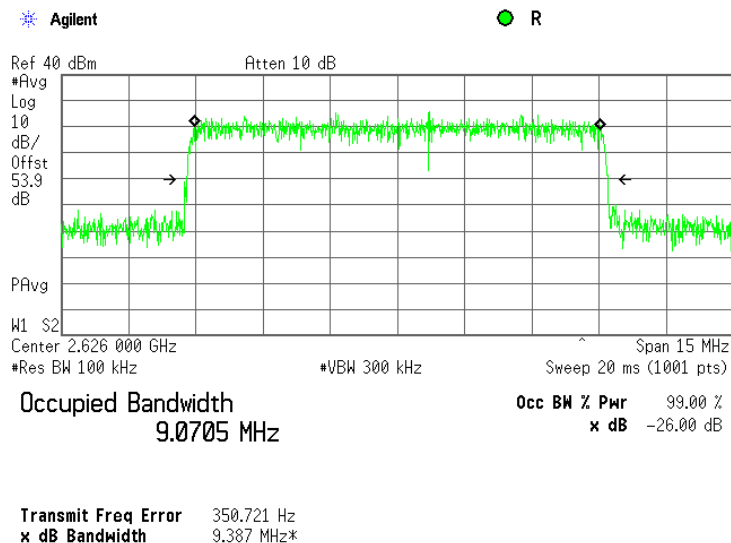


Plot 7.1.20 Occupied bandwidth test results at mid frequency, 10 MHz EBW, QPSK

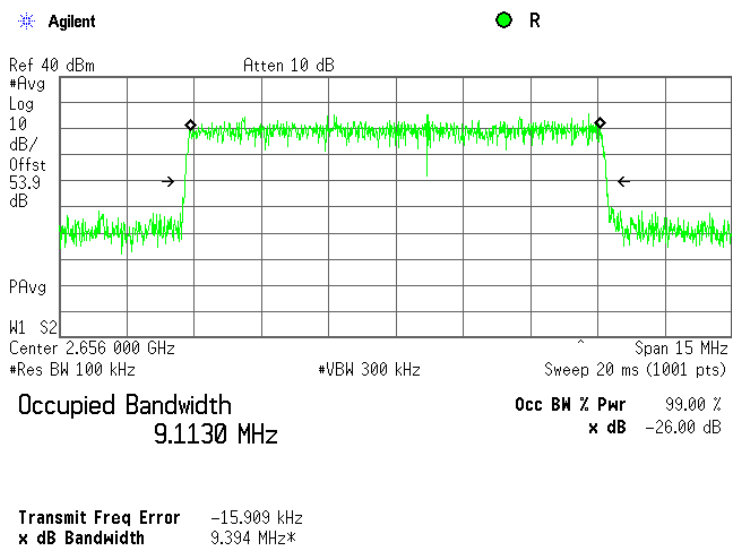


Test specification:	Section 2.1049, Occupied bandwidth		
Test procedure:	47 CFR, Section 2.1049		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.1.21 Occupied bandwidth test results at high frequency, 10 MHz EBW, QPSK

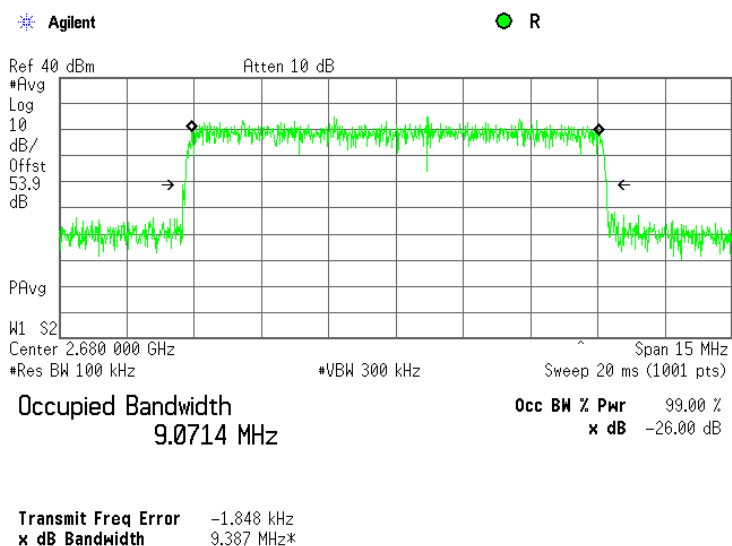


Plot 7.1.22 Occupied bandwidth test results at low frequency, 10 MHz EBW, 64QAM

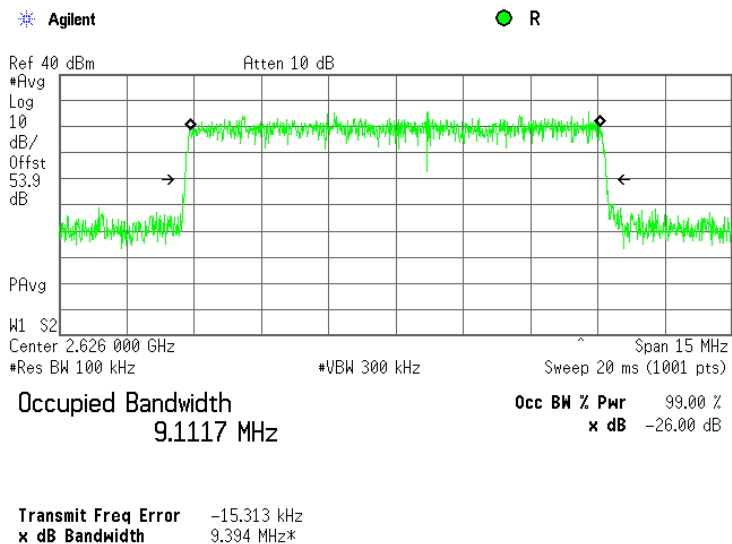


Test specification: Section 2.1049, Occupied bandwidth			
Test procedure: 47 CFR, Section 2.1049			
Test mode: Compliance	Verdict: PASS		
Date: 12/2/2010			
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.1.23 Occupied bandwidth test results at mid frequency, 10 MHz EBW, 64QAM

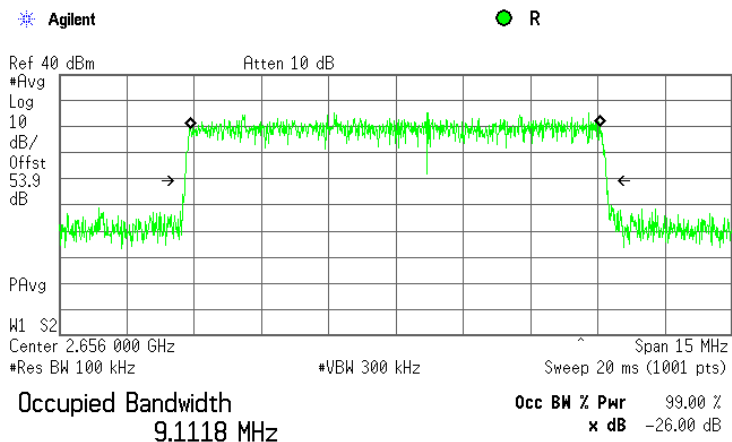

Transmit Freq Error -16.229 kHz
x dB Bandwidth 9.394 MHz*

Plot 7.1.24 Occupied bandwidth test results at high frequency, 10 MHz EBW, 64QAM

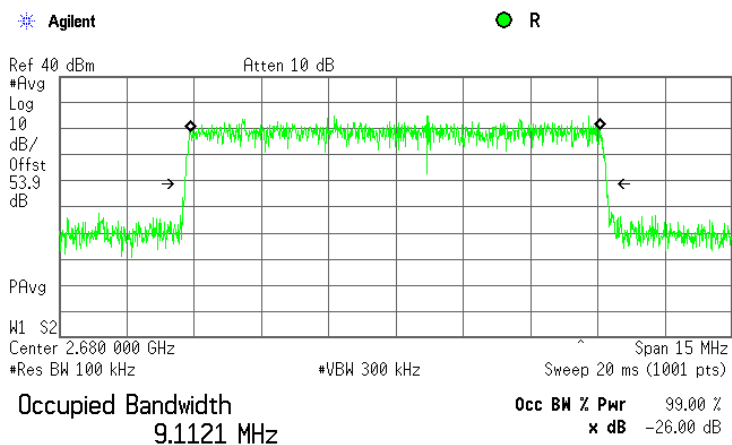

Transmit Freq Error -16.810 kHz
x dB Bandwidth 9.395 MHz*

Test specification:		Section 27.50(h), Peak output power	
Test procedure:		Section 27.50(h)	
Test mode:		Compliance	Verdict: PASS
Date:		12/2/2010	
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

7.2 Peak output power test

7.2.1 General

This test was performed to measure the peak output power at RF antenna connector. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Peak output power limits

Assigned frequency range, MHz	Maximum peak output power dBm
2620.0 – 2690.0	$63 + 10\log(X/Y) + 10\log(360/\text{beamwidth})$
	Maximum peak power density dBm/100 kHz
	$\text{EIRP} + 10\log(0.1/Y)$

*- X is the actual channel width in MHz, Y is either

- 1) 6 MHz if prior to transition or the station is in the MBS following transition or
- 2) 5.5 MHz if the station is in the LBS and UBS following transition, and
- 3) beamwidth is the total horizontal plane beam width of the individual transmitting antenna for the station or any sector measured at the half-power points.

7.2.2 Test procedure


7.2.2.1 The EUT was set up as shown in **Error! Reference source not found.**, energized and its proper operation was checked.

7.2.2.2 The EUT was adjusted to produce maximum available to the end user RF output power.

7.2.2.3 The peak output power was measured with power meter as provided in Table 7.2.2 to Table 7.2.5.

7.2.2.4 The power spectral density was measured with spectrum analyzer as provided in Table 7.2.6 to Table 7.2.9 and the associated plots.

Figure 7.2.1 Peak output power test setup



Test specification:		Section 27.50(h), Peak output power	
Test procedure:		Section 27.50(h)	
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Table 7.2.2 Peak output power test results

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATING SIGNAL: PRBS
TRANSMITTER OUTPUT POWER SETTINGS: Maximum
DUTY CYCLE: 59%
EBW: 3.5 MHz
TRANSMITTER OUTPUT POWER SETTINGS: 40 dBm
MAXIMUM ANTENNA GAIN: 18 dBi

Carrier frequency, MHz	Power Meter reading RF#1, dBm	Power Meter reading RF#2, dBm	Total RF power**, dBm	Antenna gain, dBi	Total EIRP*, dBm	Limit***, dBm	Margin, dB	Verdict
QPSK 4 Mbps								
2623.00	39.95	40.35	43.16	18.0	61.16	67.76	-6.59	Pass
2653.00	40.39	40.37	43.39	18.0	61.39	67.76	-6.37	Pass
2683.00	39.89	39.56	42.74	18.0	60.74	67.76	-7.02	Pass
64QAM 14 Mbps								
2623.00	39.96	40.37	43.18	18.0	61.20	67.76	-6.56	Pass
2653.00	40.44	40.38	43.42	18.0	61.42	67.76	-6.34	Pass
2683.00	40.32	39.58	42.98	18.0	60.99	67.76	-6.77	Pass

* - EIRP total, dBm = Total RF power**, dBm + Antenna Gain, dBi

** - Total RF power, dBm = $10 \log\{10^{[P(\text{dBm}, \text{RF}\#1)/10]} + 10^{[P(\text{dBm}, \text{RF}\#2)/10]}\}$

*** - See Table 7.2.11

MAXIMUM ANTENNA GAIN: 17 dBi

Carrier frequency, MHz	Power Meter reading RF#1, dBm	Power Meter reading RF#2, dBm	Total RF power**, dBm	Antenna gain, dBi	Total EIRP*, dBm	Limit***, dBm	Margin, dB	Verdict
QPSK 4 Mbps								
2623.00	39.95	40.35	43.16	17.0	60.16	66.35	-6.18	Pass
2653.00	40.39	40.37	43.39	17.0	60.39	66.34	-5.95	Pass
2683.00	39.89	39.56	42.74	17.0	59.74	66.34	-6.61	Pass
64QAM 14 Mbps								
2623.00	39.96	40.37	43.18	17.0	60.20	66.35	-6.15	Pass
2653.00	40.44	40.38	43.42	17.0	60.42	66.34	-5.92	Pass
2683.00	40.32	39.58	42.98	17.0	59.99	66.34	-6.35	Pass

* - EIRP total, dBm = Total RF power**, dBm + Antenna Gain, dBi

** - Total RF power, dBm = $10 \log\{10^{[P(\text{dBm}, \text{RF}\#1)/10]} + 10^{[P(\text{dBm}, \text{RF}\#2)/10]}\}$

*** - See Table 7.2.11

Test specification:	Section 27.50(h), Peak output power		
Test procedure:	Section 27.50(h)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Table 7.2.3 Peak output power test results

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATING SIGNAL: PRBS
TRANSMITTER OUTPUT POWER SETTINGS: Maximum
DUTY CYCLE: 59%
EBW: 5 MHz
TRANSMITTER OUTPUT POWER SETTINGS: 40 dBm
MAXIMUM ANTENNA GAIN: 18 dBi

Carrier frequency, MHz	Power Meter reading RF#1, dBm	Power Meter reading RF#2, dBm	Total RF power**, dBm	Antenna gain, dBi	Total EIRP*, dBm	Limit***, dBm	Margin, dB	Verdict
QPSK 7 Mbps								
2623.00	39.51	40.30	42.93	18.0	60.93	69.22	-8.29	Pass
2653.00	39.93	40.36	43.16	18.0	61.18	69.22	-8.04	Pass
2683.00	39.78	39.76	42.78	18.0	60.78	69.22	-8.44	Pass
64QAM 23 Mbps								
2623.00	39.56	40.32	42.97	18.0	60.98	69.22	-8.24	Pass
2653.00	39.96	40.42	43.21	18.0	61.21	69.22	-8.01	Pass
2683.00	39.84	40.28	43.08	18.0	61.09	69.22	-8.13	Pass

* - EIRP total, dBm = Total RF power**, dBm + Antenna Gain, dBi

** - Total RF power , dBm = $10 \log\{10^{[P(\text{dBm}, \text{RF}\#1)/10]} + 10^{[P(\text{dBm}, \text{RF}\#2)/10]}\}$

*** - See Table 7.2.11

MAXIMUM ANTENNA GAIN: 17 dBi

Carrier frequency, MHz	Power Meter reading RF#1, dBm	Power Meter reading RF#2, dBm	Total RF power**, dBm	Antenna gain, dBi	Total EIRP*, dBm	Limit***, dBm	Margin, dB	Verdict
QPSK 7 Mbps								
2623.00	39.51	40.3	42.93	17.0	59.93	67.81	-7.88	Pass
2653.00	39.93	40.36	43.16	17.0	60.18	67.81	-7.63	Pass
2683.00	39.78	39.76	42.78	17.0	59.78	67.81	-8.03	Pass
64QAM 23 Mbps								
2623.00	39.56	40.32	42.97	17.0	59.98	67.81	-7.83	Pass
2653.00	39.96	40.42	43.21	17.0	60.21	67.81	-7.60	Pass
2683.00	39.84	40.28	43.08	17.0	60.09	67.81	-7.72	Pass

* - EIRP total, dBm = Total RF power**, dBm + Antenna Gain, dBi

** - Total RF power , dBm = $10 \log\{10^{[P(\text{dBm}, \text{RF}\#1)/10]} + 10^{[P(\text{dBm}, \text{RF}\#2)/10]}\}$

*** - See Table 7.2.11

Test specification:		Section 27.50(h), Peak output power	
Test procedure:		Section 27.50(h)	
Test mode:		Verdict: PASS	
Date:			
12/2/2010			
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Table 7.2.4 Peak output power test results

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATING SIGNAL: PRBS
TRANSMITTER OUTPUT POWER SETTINGS: Maximum
DUTY CYCLE: 59%
EBW: 7 MHz
TRANSMITTER OUTPUT POWER SETTINGS: 40 dBm
MAXIMUM ANTENNA GAIN: 18 dBi

- Carrier frequency, MHz	Power Meter reading RF#1, dBm	Power Meter reading RF#2, dBm	Total RF power**, dBm	Antenna gain, dBi	Total EIRP*, dBm	Limit***, dBm	Margin, dB	Verdict
QPSK 8 Mbps								
2626.00	39.23	40.25	42.78	18.0	60.78	67.75	-6.97	Pass
2656.00	39.64	40.23	42.96	18.0	60.97	67.75	-6.78	Pass
2680.00	39.70	39.66	42.69	18.0	60.69	67.75	-7.06	Pass
64QAM 28 Mbps								
2626.00	39.64	40.39	43.04	18.0	61.06	67.75	-6.69	Pass
2656.00	39.73	40.29	43.03	18.0	61.03	67.75	-6.72	Pass
2680.00	39.68	39.67	42.69	18.0	60.70	67.75	-7.05	Pass

* - EIRP total, dBm = Total RF power**, dBm + Antenna Gain, dBi

** - Total RF power, dBm = $10 \log\{10^{[P(\text{dBm}, \text{RF}\#1)/10]} + 10^{[P(\text{dBm}, \text{RF}\#2)/10]}\}$

*** - See Table 7.2.11

MAXIMUM ANTENNA GAIN: 17 dBi

- Carrier frequency, MHz	Power Meter reading RF#1, dBm	Power Meter reading RF#2, dBm	Total RF power**, dBm	Antenna gain, dBi	Total EIRP*, dBm	Limit***, dBm	Margin, dB	Verdict
QPSK 8 Mbps								
2626.00	39.23	40.25	42.78	17.0	59.78	66.34	-6.56	Pass
2656.00	39.64	40.23	42.96	17.0	59.97	66.34	-6.37	Pass
2680.00	39.70	39.66	42.69	17.0	59.69	66.34	-6.65	Pass
64QAM 28 Mbps								
2626.00	39.64	40.39	43.04	17.0	60.06	66.34	-6.28	Pass
2656.00	39.73	40.29	43.03	17.0	60.03	66.34	-6.31	Pass
2680.00	39.68	39.67	42.69	17.0	59.70	66.34	-6.64	Pass

* - EIRP total, dBm = Total RF power**, dBm + Antenna Gain, dBi

** - Total RF power, dBm = $10 \log\{10^{[P(\text{dBm}, \text{RF}\#1)/10]} + 10^{[P(\text{dBm}, \text{RF}\#2)/10]}\}$

*** - See Table 7.2.11

Test specification:		Section 27.50(h), Peak output power	
Test procedure:		Section 27.50(h)	
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Table 7.2.5 Peak output power test results

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATING SIGNAL: PRBS
TRANSMITTER OUTPUT POWER SETTINGS: Maximum
DUTY CYCLE: 59%
EBW: 10 MHz
MAXIMUM ANTENNA GAIN: 18 dBi

- Carrier frequency, MHz	Power Meter reading RF#1, dBm	Power Meter reading RF#2, dBm	Total RF power**, dBm	Antenna gain, dBi	Total EIRP*, dBm	Limit***, dBm	Margin, dB	Verdict
QPSK 13 Mbps								
2626.00	39.32	40.52	42.97	18.0	60.97	69.21	-8.24	Pass
2656.00	39.74	40.51	43.15	18.0	61.17	69.23	-8.07	Pass
2680.00	39.65	39.74	42.71	18.0	60.71	69.21	-8.51	Pass
64QAM 46 Mbps								
2626.00	39.55	40.48	43.05	18.0	61.07	69.21	-8.15	Pass
2656.00	39.71	40.52	43.14	18.0	61.14	69.23	-8.09	Pass
2680.00	39.62	39.95	42.80	18.0	60.81	69.21	-8.40	Pass

* - EIRP total, dBm = Total RF power**, dBm + Antenna Gain, dBi

** - Total RF power, dBm = $10 \log\{10^{[P(\text{dBm}, \text{RF}\#1)/10]} + 10^{[P(\text{dBm}, \text{RF}\#2)/10]}\}$

*** - See Table 7.2.11

MAXIMUM ANTENNA GAIN: 17 dBi

- Carrier frequency, MHz	Power Meter reading RF#1, dBm	Power Meter reading RF#2, dBm	Total RF power**, dBm	Antenna gain, dBi	Total EIRP*, dBm	Limit***, dBm	Margin, dB	Verdict
QPSK 13 Mbps								
2626.00	39.32	40.52	42.97	17.0	59.97	67.81	-7.83	Pass
2656.00	39.74	40.51	43.15	17.0	60.17	67.82	-7.66	Pass
2680.00	39.65	39.74	42.71	17.0	59.71	67.81	-8.10	Pass
64QAM 46 Mbps								
2626.00	39.55	40.48	43.05	17.0	60.07	67.81	-7.74	Pass
2656.00	39.71	40.52	43.14	17.0	60.14	67.82	-7.68	Pass
2680.00	39.62	39.95	42.80	17.0	59.81	67.81	-7.99	Pass

* - EIRP total, dBm = Total RF power**, dBm + Antenna Gain, dBi

** - Total RF power, dBm = $10 \log\{10^{[P(\text{dBm}, \text{RF}\#1)/10]} + 10^{[P(\text{dBm}, \text{RF}\#2)/10]}\}$

*** - See Table 7.2.11

Reference numbers of test equipment used

HL 3301	HL 3302	HL 3768					
---------	---------	---------	--	--	--	--	--

Full description is given in Appendix A.

Test specification:		Section 27.50(h), Peak output power	
Test procedure:		Section 27.50(h)	
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Table 7.2.6 Power spectral density test results

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
RESOLUTION BANDWIDTH: 100 kHz
VIDEO BANDWIDTH: 1000 kHz
MODULATING SIGNAL: PRBS
CHANNEL BANDWIDTH: 3.5 MHz
TRANSMITTER OUTPUT POWER SETTINGS: 40 dBm
DUTY CYCLE: 100%
MAXIMUM ANTENNA GAIN: 18 dBi

- Carrier frequency, MHz	SA reading, RF #1 dBm/100kHz	SA reading, RF #2 dBm/100kHz	SA reading PSD**, dBm/100kHz	Antenna gain, dBi	Total PSD*, dBm/100kHz	Limit***, dBm	Margin, dB	Verdict
QPSK 4 Mbps								
2623.00	25.78	26.67	29.26	18.0	47.26	49.98	-2.72	Pass
2653.00	26.23	26.65	29.46	18.0	47.46	49.97	-2.52	Pass
2683.00	26.27	26.00	29.15	18.0	47.15	49.98	-2.83	Pass
64QAM 14 Mbps								
2623.00	26.24	27.16	29.73	18.0	47.75	49.98	-2.23	Pass
2653.00	26.81	27.14	29.99	18.0	47.99	49.97	-1.99	Pass
2683.00	26.71	26.33	29.53	18.0	47.55	49.98	-2.43	Pass

* - Total PSD, dBm/100kHz = SA reading***, dBm/100kHz + Antenna Gain, dBi

** - SA reading, dBm/100kHz = $10 \log\{10^{[P(\text{dBm}, \text{RF}\#1)/10]} + 10^{[P(\text{dBm}, \text{RF}\#2)/10]}\}$

*** - See Table 7.2.12

MAXIMUM ANTENNA GAIN: 17 dBi

- Carrier frequency, MHz	SA reading, RF #1 dBm/100kHz	SA reading, RF #2 dBm/100kHz	SA reading PSD**, dBm/100kHz	Antenna gain, dBi	Total PSD*, dBm/100kHz	Limit***, dBm	Margin, dB	Verdict
QPSK 4 Mbps								
2623.00	25.78	26.67	29.26	17.0	46.26	48.56	-2.31	Pass
2653.00	26.23	26.65	29.46	17.0	46.46	48.56	-2.11	Pass
2683.00	26.27	26.00	29.15	17.0	46.15	48.56	-2.42	Pass
64QAM 14 Mbps								
2623.00	26.24	27.16	29.73	17.0	46.75	48.56	-1.81	Pass
2653.00	26.81	27.14	29.99	17.0	46.99	48.56	-1.57	Pass
2683.00	26.71	26.33	29.53	17.0	46.55	48.56	-2.01	Pass

* - Total PSD, dBm/100kHz = SA reading***, dBm/100kHz + Antenna Gain, dBi

** - SA reading, dBm/100kHz = $10 \log\{10^{[P(\text{dBm}, \text{RF}\#1)/10]} + 10^{[P(\text{dBm}, \text{RF}\#2)/10]}\}$

*** - See Table 7.2.12

Test specification:	Section 27.50(h), Peak output power		
Test procedure:	Section 27.50(h)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Table 7.2.7 Power spectral density test results

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 1000 kHz
 MODULATING SIGNAL: PRBS
 CHANNEL BANDWIDTH: 5 MHz
 TRANSMITTER OUTPUT POWER SETTINGS: 40 dBm
 DUTY CYCLE: 100%
 MAXIMUM ANTENNA GAIN: 18 dBi

- Carrier frequency, MHz	SA reading, RF #1 dBm/100kHz	SA reading, RF #2 dBm/100kHz	SA reading PSD**, dBm/100kHz	Antenna gain, dBi	Total PSD*, dBm/100kHz	Limit***, dBm	Margin, dB	Verdict
QPSK 7 Mbps								
2623.00	23.64	24.31	27.00	18.0	45.00	51.44	-6.44	Pass
2653.00	24.12	24.42	27.28	18.0	45.30	51.44	-6.14	Pass
2683.00	23.86	23.82	26.85	18.0	44.85	51.44	-6.59	Pass
64QAM 23 Mbps								
2623.00	23.83	24.46	27.17	18.0	45.18	51.44	-6.25	Pass
2653.00	24.10	24.53	27.33	18.0	45.33	51.44	-6.11	Pass
2683.00	24.05	23.76	26.92	18.0	44.93	51.44	-6.50	Pass

* - Total PSD, dBm/100kHz = SA reading***, dBm/100kHz + Antenna Gain, dBi

** - SA reading, dBm/100kHz = $10 \log\{10^{[P(\text{dBm}, \text{RF}\#1)/10]} + 10^{[P(\text{dBm}, \text{RF}\#2)/10]}\}$

*** - See Table 7.2.12

MAXIMUM ANTENNA GAIN: 17 dBi

- Carrier frequency, MHz	SA reading, RF #1 dBm/100kHz	SA reading, RF #2 dBm/100kHz	SA reading PSD**, dBm/100kHz	Antenna gain, dBi	Total PSD*, dBm/100kHz	Limit***, dBm	Margin, dB	Verdict
QPSK 7 Mbps								
2623.00	27.00	27.00	27.00	17.0	44.00	50.03	-6.03	Pass
2653.00	27.28	27.28	27.28	17.0	44.30	50.03	-5.73	Pass
2683.00	26.85	26.85	26.85	17.0	43.85	50.03	-6.18	Pass
64QAM 23 Mbps								
2623.00	23.83	24.46	27.17	17.0	44.18	50.03	-5.85	Pass
2653.00	24.1	24.53	27.33	17.0	44.33	50.03	-5.70	Pass
2683.00	24.05	23.76	26.92	17.0	43.93	50.03	-6.09	Pass

* - Total PSD, dBm/100kHz = SA reading***, dBm/100kHz + Antenna Gain, dBi

** - SA reading, dBm/100kHz = $10 \log\{10^{[P(\text{dBm}, \text{RF}\#1)/10]} + 10^{[P(\text{dBm}, \text{RF}\#2)/10]}\}$

*** - See Table 7.2.12

Test specification:	Section 27.50(h), Peak output power		
Test procedure:	Section 27.50(h)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Table 7.2.8 Power spectral density test results

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 1000 kHz
 MODULATING SIGNAL: PRBS
 CHANNEL BANDWIDTH: 7 MHz
 TRANSMITTER OUTPUT POWER SETTINGS: 40 dBm
 DUTY CYCLE: 100%
 MAXIMUM ANTENNA GAIN: 18 dBi

- Carrier frequency, MHz	SA reading, RF #1 dBm/100kHz	SA reading, RF #2 dBm/100kHz	SA reading PSD**, dBm/100kHz	Antenna gain, dBi	Total PSD*, dBm/100kHz	Limit***, dBm	Margin, dB	Verdict
QPSK 8 Mbps								
2626.00	23.14	23.97	26.59	18.0	44.59	46.95	-2.37	Pass
2656.00	23.58	23.94	26.77	18.0	44.79	46.96	-2.17	Pass
2680.00	23.52	23.19	26.37	18.0	44.37	46.96	-2.59	Pass
64QAM 28 Mbps								
2626.00	23.02	23.94	26.51	18.0	44.53	46.95	-2.42	Pass
2656.00	23.53	23.81	26.68	18.0	44.68	46.96	-2.27	Pass
2680.00	23.41	23.34	26.39	18.0	44.40	46.96	-2.55	Pass

* - Total PSD, dBm/100kHz = SA reading***, dBm/100kHz + Antenna Gain, dBi

** - SA reading, dBm/100kHz = $10 \log\{10^{[P(\text{dBm}, \text{RF}\#1)/10]} + 10^{[P(\text{dBm}, \text{RF}\#2)/10]}\}$

*** - See Table 7.2.12

MAXIMUM ANTENNA GAIN: 17 dBi

- Carrier frequency, MHz	SA reading, RF #1 dBm/100kHz	SA reading, RF #2 dBm/100kHz	SA reading PSD**, dBm/100kHz	Antenna gain, dBi	Total PSD*, dBm/100kHz	Limit***, dBm	Margin, dB	Verdict
QPSK 8 Mbps								
2626.00	23.14	23.97	26.59	17.0	43.59	45.54	-1.96	Pass
2656.00	23.58	23.94	26.77	17.0	43.79	45.55	-1.76	Pass
2680.00	23.52	23.19	26.37	17.0	43.37	45.55	-2.18	Pass
64QAM 28 Mbps								
2626.00	23.02	23.94	26.51	17.0	43.53	45.54	-2.01	Pass
2656.00	23.53	23.81	26.68	17.0	43.68	45.55	-1.86	Pass
2680.00	23.41	23.34	26.39	17.0	43.40	45.55	-2.14	Pass

* - Total PSD, dBm/100kHz = SA reading***, dBm/100kHz + Antenna Gain, dBi

** - SA reading, dBm/100kHz = $10 \log\{10^{[P(\text{dBm}, \text{RF}\#1)/10]} + 10^{[P(\text{dBm}, \text{RF}\#2)/10]}\}$

*** - See Table 7.2.12

Test specification:	Section 27.50(h), Peak output power		
Test procedure:	Section 27.50(h)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Table 7.2.9 Power spectral density test results

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
RESOLUTION BANDWIDTH: 100 kHz
VIDEO BANDWIDTH: 300 kHz
MODULATING SIGNAL: PRBS
CHANNEL BANDWIDTH: 10 MHz
TRANSMITTER OUTPUT POWER SETTINGS: 40 dBm
DUTY CYCLE: 100%
MAXIMUM ANTENNA GAIN: 18 dBi

- Carrier frequency, MHz	SA reading, RF #1 dBm/100kHz	SA reading, RF #2 dBm/100kHz	SA reading PSD**, dBm/100kHz	Antenna gain, dBi	Total PSD*, dBm/100kHz	Limit***, dBm	Margin, dB	Verdict
QPSK 14 Mbps								
2626.00	21.31	21.86	24.60	18.0	42.60	48.42	-5.82	Pass
2656.00	21.75	21.66	24.72	18.0	42.73	48.44	-5.71	Pass
2680.00	21.57	21.33	24.46	18.0	42.46	48.42	-5.96	Pass
64QAM 46 Mbps								
2626.00	21.24	21.71	24.49	18.0	42.51	48.42	-5.92	Pass
2656.00	21.65	21.73	24.70	18.0	42.70	48.44	-5.74	Pass
2680.00	21.41	21.02	24.23	18.0	42.25	48.42	-6.18	Pass

* - Total PSD, dBm/100kHz = SA reading***, dBm/100kHz + Antenna Gain, dBi

** - SA reading, dBm/100kHz = $10 \log\{10^{[P(\text{dBm}, \text{RF}\#1)/10]} + 10^{[P(\text{dBm}, \text{RF}\#2)/10]}\}$

*** - See Table 7.2.12

MAXIMUM ANTENNA GAIN: 17 dBi

- Carrier frequency, MHz	SA reading, RF #1 dBm/100kHz	SA reading, RF #2 dBm/100kHz	SA reading PSD**, dBm/100kHz	Antenna gain, dBi	Total PSD*, dBm/100kHz	Limit***, dBm	Margin, dB	Verdict
QPSK 14 Mbps								
2626.00	21.31	21.86	24.60	17.0	41.60	47.01	-5.41	Pass
2656.00	21.75	21.66	24.72	17.0	41.73	47.03	-5.30	Pass
2680.00	21.57	21.33	24.46	17.0	41.46	47.01	-5.55	Pass
64QAM 46 Mbps								
2626.00	21.24	21.71	24.49	17.0	41.51	47.01	-5.51	Pass
2656.00	21.65	21.73	24.70	17.0	41.70	47.03	-5.33	Pass
2680.00	21.41	21.02	24.23	17.0	41.25	47.01	-5.77	Pass

* - Total PSD, dBm/100kHz = SA reading***, dBm/100kHz + Antenna Gain, dBi

** - SA reading, dBm/100kHz = $10 \log\{10^{[P(\text{dBm}, \text{RF}\#1)/10]} + 10^{[P(\text{dBm}, \text{RF}\#2)/10]}\}$

*** - See Table 7.2.12

Reference numbers of test equipment used

HL 2909	HL 3437	HL 3442	HL 3559				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.

Test specification:		Section 27.50(h), Peak output power	
Test procedure:		Section 27.50(h)	
Test mode:	Compliance	Verdict: PASS	
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Table 7.2.10 Pre-transition frequency channels assignment

Channel	Channel BW, MHz	Peak power limit, dBm	Power density limit, dBm/100kHz
3.5 MHz Single Channel			
2623 MHz: BRS Ch. E3	3234.7	$63+10\log(\text{OBW}/6.0)+10\log(360/\text{beamwidth})$	$\text{EIRP}+10\log(0.1/6.0)$
2653.0 MHz: BRS Ch. H1	3234.6	$63+10\log(\text{OBW}/6.0)+10\log(360/\text{beamwidth})$	$\text{EIRP}+10\log(0.1/6.0)$
2683 MHz: EBS Ch. G4	3234.4	$63+10\log(\text{OBW}/6.0)+10\log(360/\text{beamwidth})$	$\text{EIRP}+10\log(0.1/6.0)$
5 MHz Single Channel			
2623 MHz: BRS Ch. E3	4551.8	$63+10\log(\text{OBW}/6.0)+10\log(360/\text{beamwidth})$	$\text{EIRP}+10\log(0.1/6.0)$
2653.0 MHz: BRS Ch. H1	4551.0	$63+10\log(\text{OBW}/6.0)+10\log(360/\text{beamwidth})$	$\text{EIRP}+10\log(0.1/6.0)$
2683 MHz: EBS Ch. G4	4551.9	$63+10\log(\text{OBW}/6.0)+10\log(360/\text{beamwidth})$	$\text{EIRP}+10\log(0.1/6.0)$
7 MHz Dual Channel			
2626.0 MHz BRS Ch.E3+ BRS Ch. F3	6421.9	$63+10\log(\text{OBW}/12.0)+10\log(360/\text{beamwidth})$	$\text{EIRP}+10\log(0.1/12.0)$
2656.0 MHz BRS Ch.H1+ EBS Ch. G2	6423.2	$63+10\log(\text{OBW}/12.0)+10\log(360/\text{beamwidth})$	$\text{EIRP}+10\log(0.1/12.0)$
2680.0 MHz BRS Ch.H3+ EBS Ch. G4	6422.1	$63+10\log(\text{OBW}/12.0)+10\log(360/\text{beamwidth})$	$\text{EIRP}+10\log(0.1/12.0)$
10 MHz Dual Channel			
2626.0 MHz BRS Ch.E3+ BRS Ch. F3	9084.1	$63+10\log(\text{OBW}/12.0)+10\log(360/\text{beamwidth})$	$\text{EIRP}+10\log(0.1/12.0)$
2656.0 MHz BRS Ch.H1+ EBS Ch. G2	9034.2	$63+10\log(\text{OBW}/12.0)+10\log(360/\text{beamwidth})$	$\text{EIRP}+10\log(0.1/12.0)$
2680.0 MHz BRS Ch.H3+ EBS Ch. G4	9033.2	$63+10\log(\text{OBW}/12.0)+10\log(360/\text{beamwidth})$	$\text{EIRP}+10\log(0.1/12.0)$

Test specification:	Section 27.50(h), Peak output power		
Test procedure:	Section 27.50(h)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Table 7.2.11 EIRP limits

Channel	Channel BW, MHz	Peak power limit, dBm	
		17 dBi, 90° beamwidth	18 dBi, 65°beamwidth
3.5 MHz Single Channel			
2623 MHz: BRS Ch. E3	6.0	66.34	67.75
2653.0 MHz: BRS Ch. H1	6.0	66.34	67.75
2683 MHz: EBS Ch. G4	6.0	66.34	67.75
5 MHz Single Channel			
2623 MHz: BRS Ch. E3	6.0	67.82	69.23
2653.0 MHz: BRS Ch. H1	6.0	67.82	69.23
2683 MHz: EBS Ch. G4	6.0	67.82	69.23
7 MHz Dual Channel			
2626.0 MHz BRS Ch.E3+ BRS Ch. F3	12.0	66.31	67.71
2656.0 MHz BRS Ch.H1+ EBS Ch. G2	12.0	66.31	67.72
2680.0 MHz BRS Ch.H3+ EBS Ch. G4	12.0	66.31	67.71
10 MHz Dual Channel			
2626.0 MHz BRS Ch.E3+ BRS Ch. F3	12.0	67.81	69.22
2656.0 MHz BRS Ch.H1+ EBS Ch. G2	12.0	67.79	69.20
2680.0 MHz BRS Ch.H3+ EBS Ch. G4	12.0	67.79	69.20


Test specification:		Section 27.50(h), Peak output power	
Test procedure:		Section 27.50(h)	
Test mode:	Compliance	Verdict: PASS	
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Table 7.2.12 Peak power density limits


Channel	Channel BW, MHz	Peak power density, dBm/100kHz	
		17 dBi, 90° beamwidth	18 dBi, 65°beamwidth
3.5 MHz Single Channel			
2623 MHz: BRS Ch. E3	6.0	48.56	49.97
2653.0 MHz: BRS Ch. H1	6.0	48.56	49.97
2683 MHz: EBS Ch. G4	6.0	48.56	49.97
5 MHz Single Channel			
2623 MHz: BRS Ch. E3	6.0	50.04	51.45
2653.0 MHz: BRS Ch. H1	6.0	50.04	51.45
2683 MHz: EBS Ch. G4	6.0	50.04	51.45
7 MHz Dual Channel			
2626.0 MHz BRS Ch.E3+ BRS Ch. F3	12.0	45.51	46.92
2656.0 MHz BRS Ch.H1+ EBS Ch. G2	12.0	45.51	46.92
2680.0 MHz BRS Ch.H3+ EBS Ch. G4	12.0	45.51	46.92
10 MHz Dual Channel			
2626.0 MHz BRS Ch.E3+ BRS Ch. F3	12.0	47.02	48.43
2656.0 MHz BRS Ch.H1+ EBS Ch. G2	12.0	47.00	48.41
2680.0 MHz BRS Ch.H3+ EBS Ch. G4	12.0	47.00	48.40

Test specification: Section 27.50(h), Peak output power			
Test procedure: Section 27.50(h)			
Test mode: Compliance	Verdict: PASS		
Date: 12/2/2010			
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.2.1 Power spectral density test results at low frequency, QPSK, 3.5 MHz EBW, Antenna 1

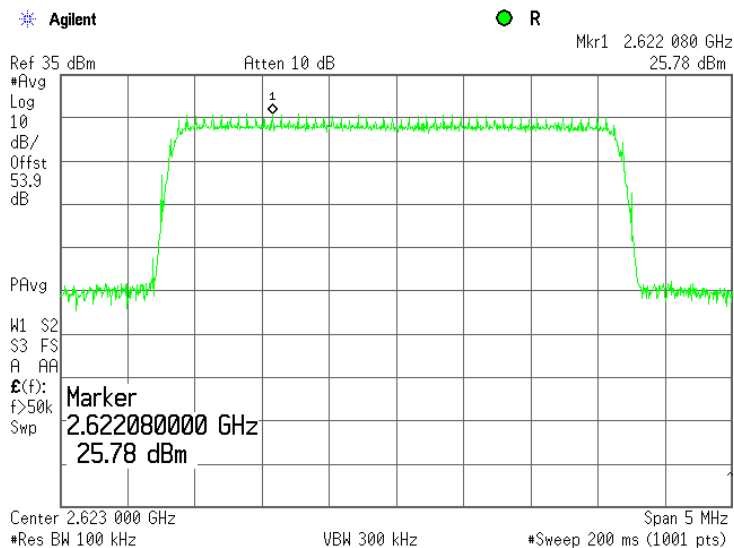


Plot 7.2.2 Power spectral density test results at mid frequency, QPSK, 3.5 MHz EBW

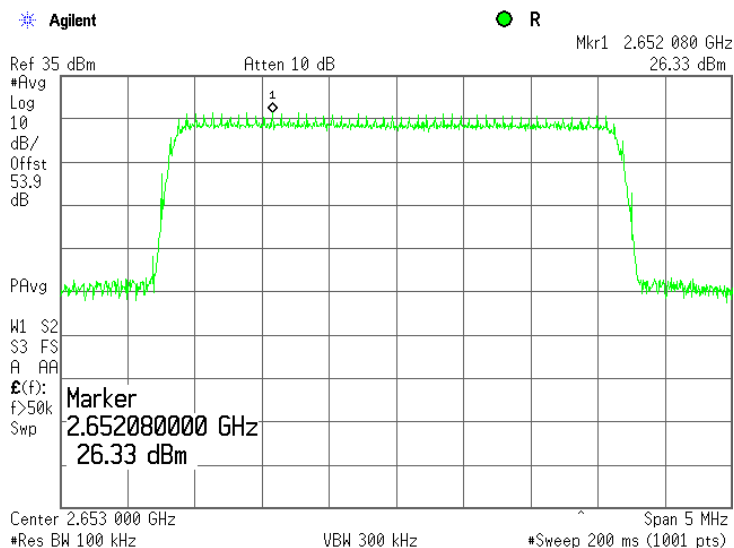


Test specification: Section 27.50(h), Peak output power			
Test procedure: Section 27.50(h)			
Test mode: Compliance		Verdict: PASS	
Date: 12/2/2010			
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.2.3 Power spectral density test results at high frequency, QPSK, 3.5 MHz EBW

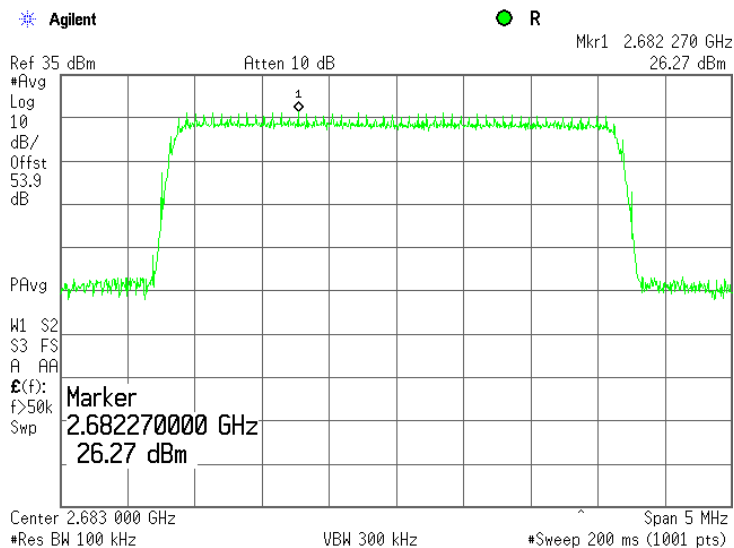


Plot 7.2.4 Power spectral density test results at low frequency, 64QAM, 3.5 MHz EBW

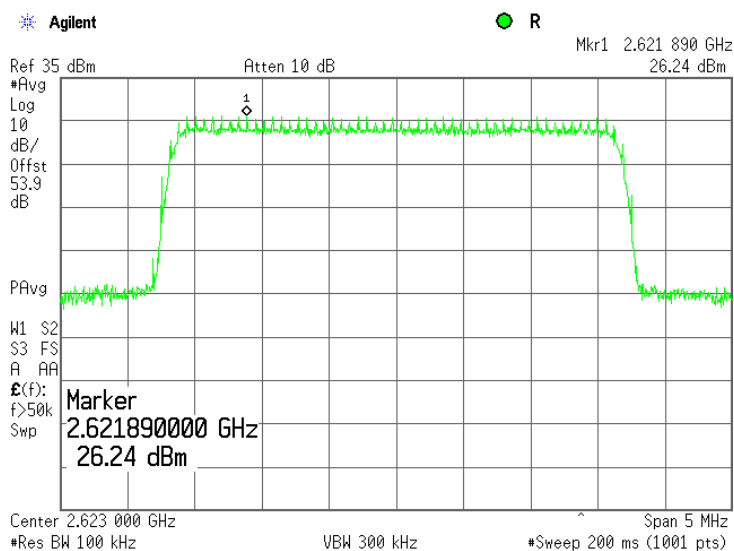


Test specification:		Section 27.50(h), Peak output power	
Test procedure:		Section 27.50(h)	
Test mode:	Compliance	Verdict: PASS	
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.2.5 Power spectral density test results at mid frequency, 64QAM, 3.5 MHz EBW

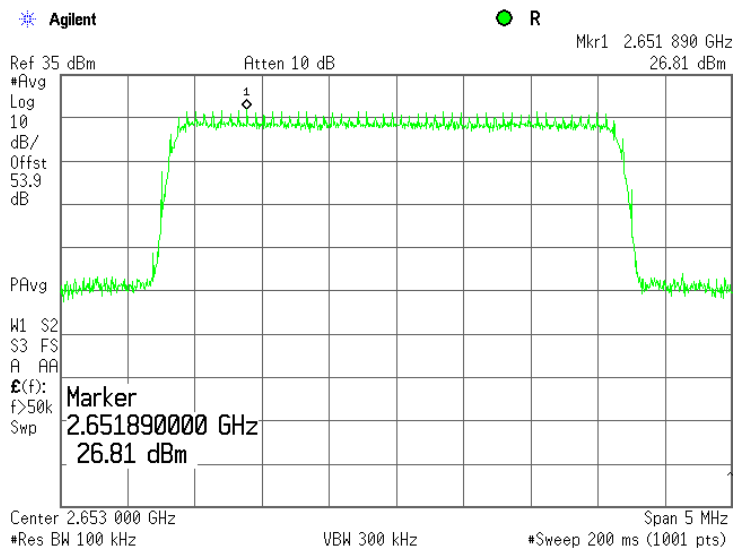


Plot 7.2.6 Power spectral density test results at high frequency, 64QAM, 3.5 MHz EBW

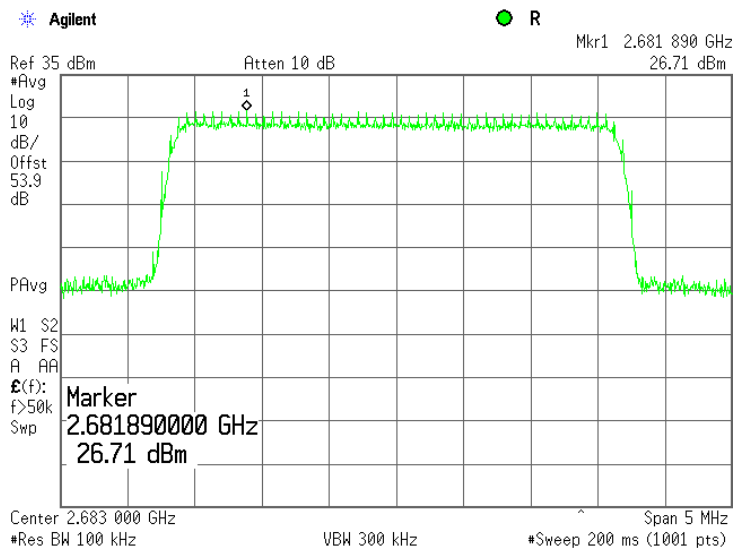


Test specification: Section 27.50(h), Peak output power			
Test procedure: Section 27.50(h)			
Test mode: Compliance		Verdict: PASS	
Date: 12/2/2010			
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.2.7 Power spectral density test results at low frequency, QPSK, 3.5 MHz EBW, Antenna 2

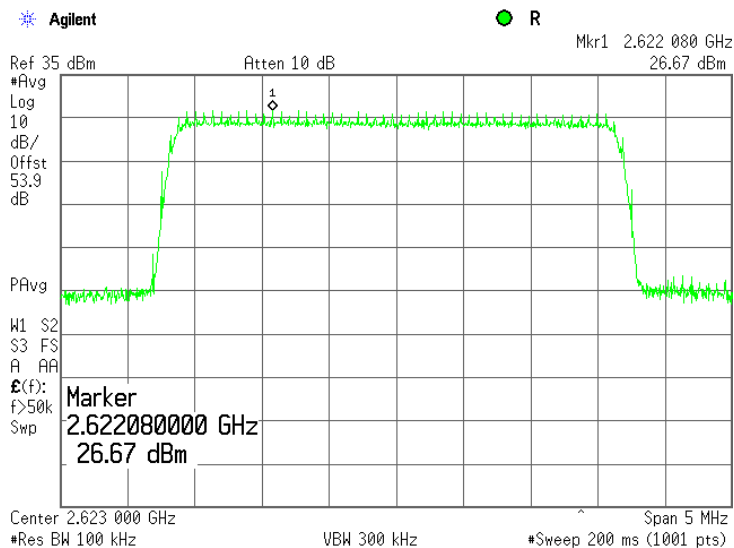


Plot 7.2.8 Power spectral density test results at mid frequency, QPSK, 3.5 MHz EBW, Antenna 2

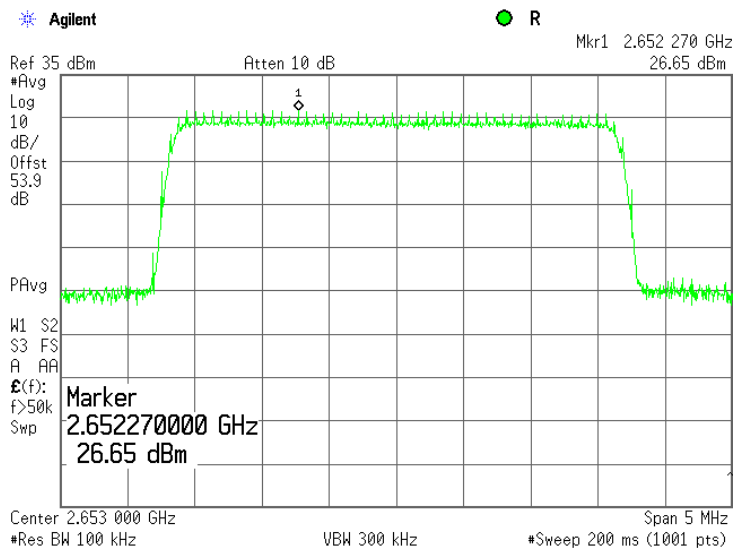


Test specification: Section 27.50(h), Peak output power			
Test procedure: Section 27.50(h)			
Test mode: Compliance		Verdict: PASS	
Date: 12/2/2010			
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.2.9 Power spectral density test results at high frequency, QPSK, 3.5 MHz EBW, Antenna 2

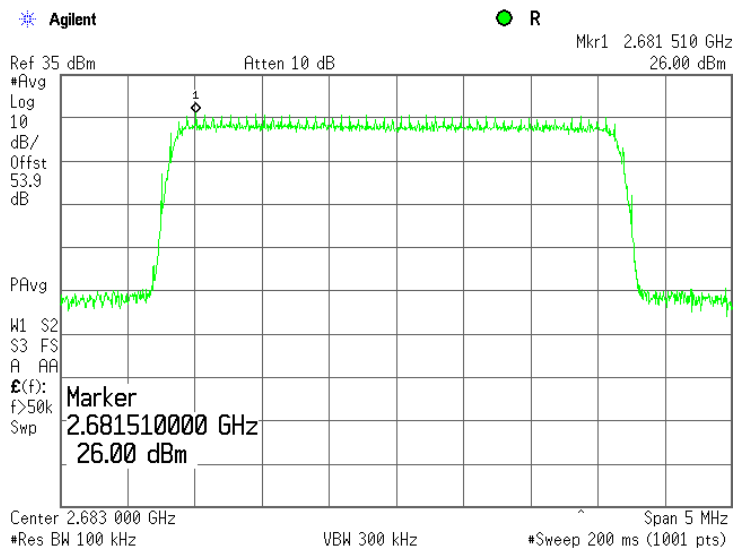


Plot 7.2.10 Power spectral density test results at low frequency, 64QAM, 3.5 MHz EBW, Antenna 2

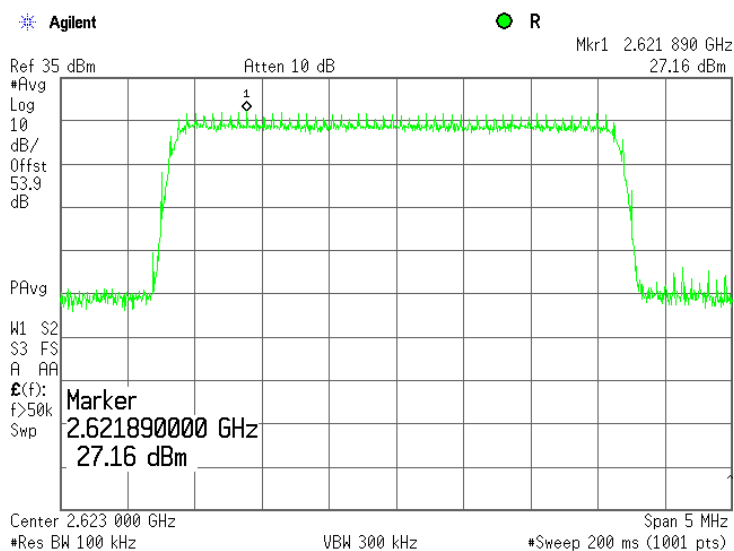


Test specification:		Section 27.50(h), Peak output power	
Test procedure:		Section 27.50(h)	
Test mode:	Compliance	Verdict: PASS	
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.2.11 Power spectral density test results at mid frequency, 64QAM, 3.5 MHz EBW, Antenna 2

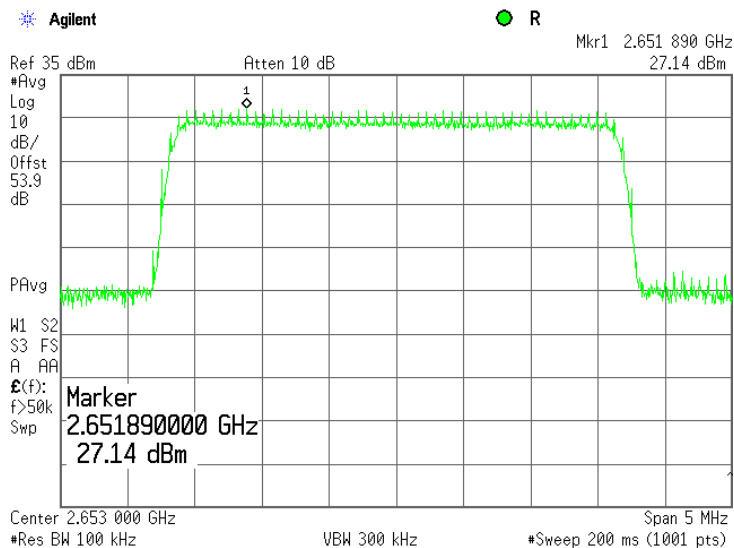


Plot 7.2.12 Power spectral density test results at high frequency, 64QAM, 3.5 MHz EBW, Antenna 2

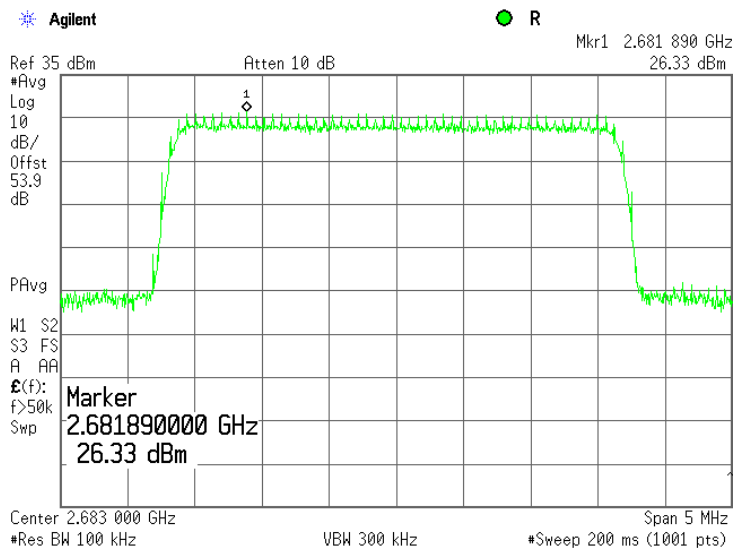


Test specification:		Section 27.50(h), Peak output power	
Test procedure:		Section 27.50(h)	
Test mode:	Compliance	Verdict: PASS	
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.2.13 Power spectral density test results at low frequency, QPSK, 5 MHz EBW, Antenna 1

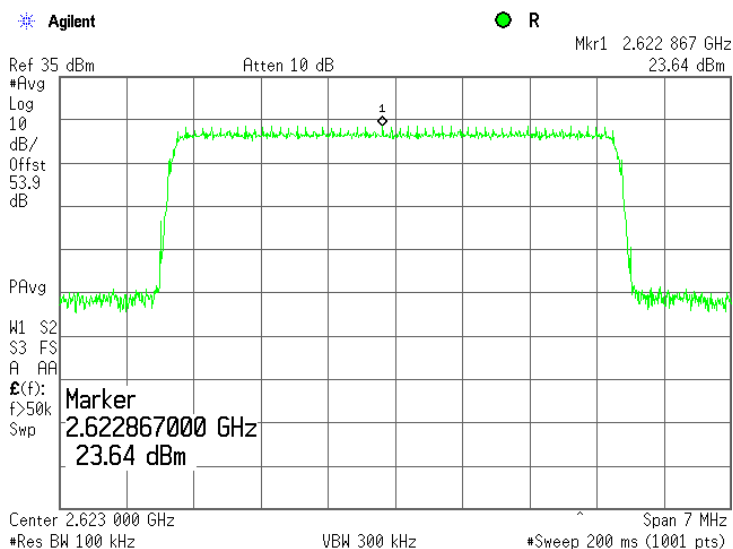


Plot 7.2.14 Power spectral density test results at mid frequency, QPSK, 5 MHz EBW, Antenna 1

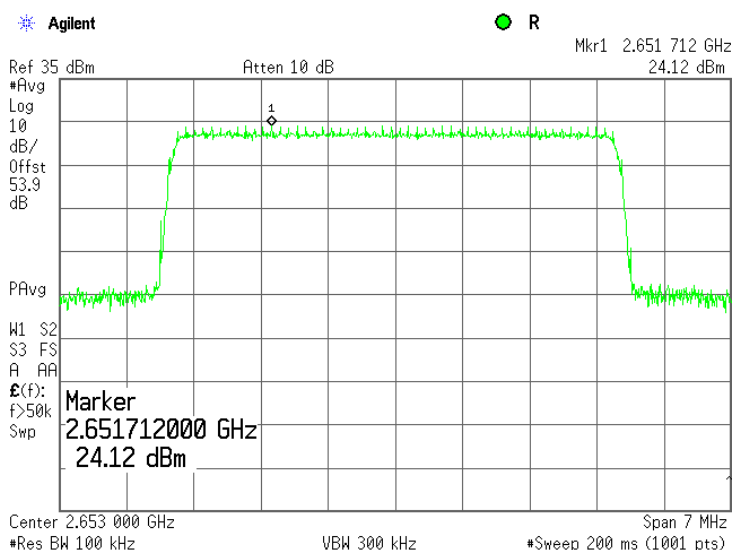


Test specification:		Section 27.50(h), Peak output power	
Test procedure:		Section 27.50(h)	
Test mode:	Compliance	Verdict: PASS	
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.2.15 Power spectral density test results at high frequency, QPSK, 5 MHz EBW, Antenna 1

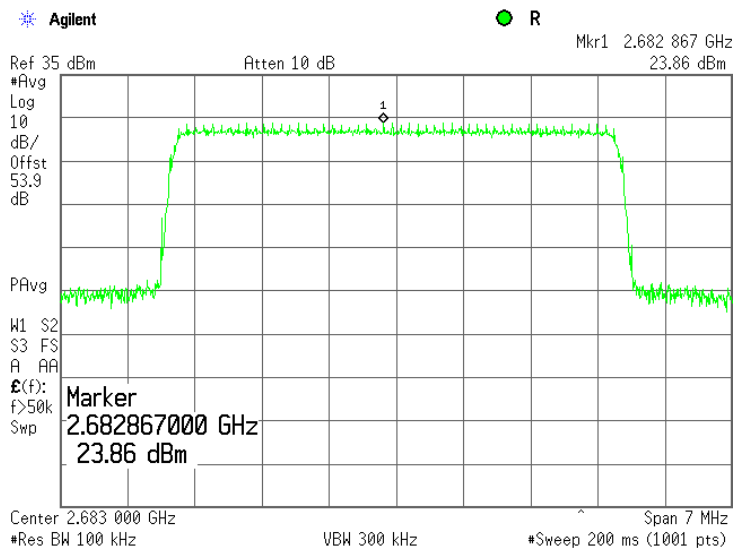


Plot 7.2.16 Power spectral density test results at low frequency, 64QAM, 5 MHz EBW, Antenna 1

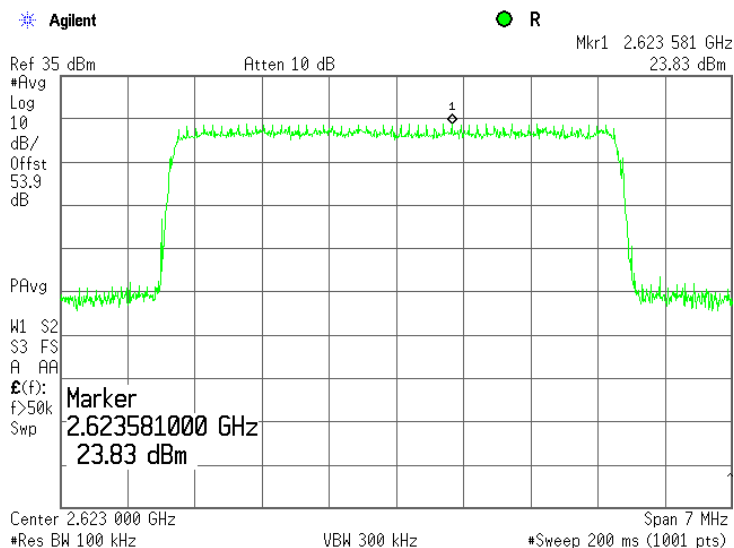


Test specification: Section 27.50(h), Peak output power			
Test procedure: Section 27.50(h)			
Test mode: Compliance	Verdict: PASS		
Date: 12/2/2010			
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.2.17 Power spectral density test results at mid frequency, 64QAM, 5 MHz EBW, Antenna 1

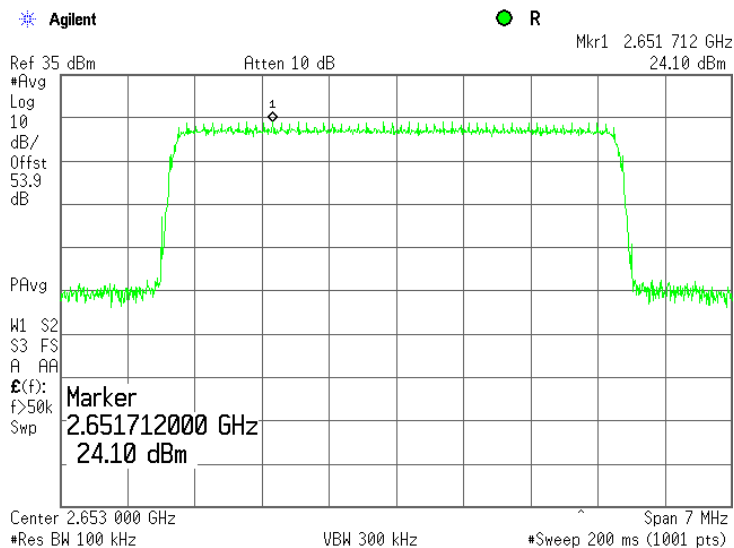


Plot 7.2.18 Power spectral density test results at high frequency, 64QAM, 5 MHz EBW, Antenna 1

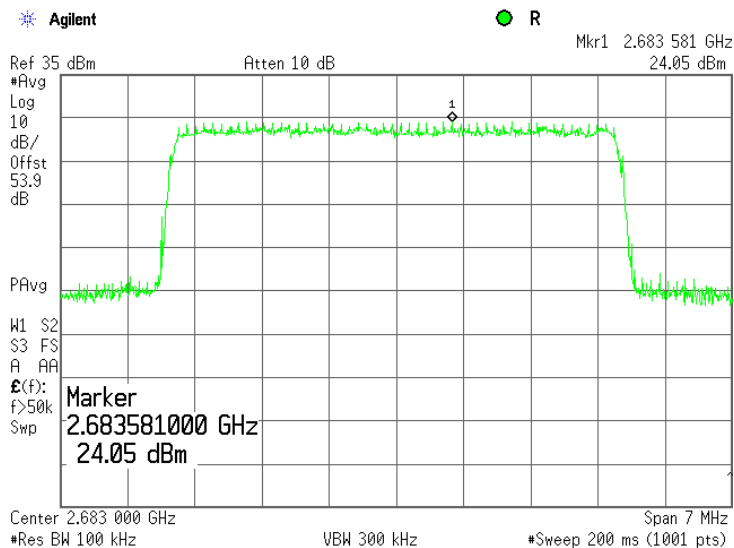


Test specification:		Section 27.50(h), Peak output power	
Test procedure:		Section 27.50(h)	
Test mode:	Compliance	Verdict: PASS	
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.2.19 Power spectral density test results at low frequency, QPSK, 5 MHz EBW, Antenna 2

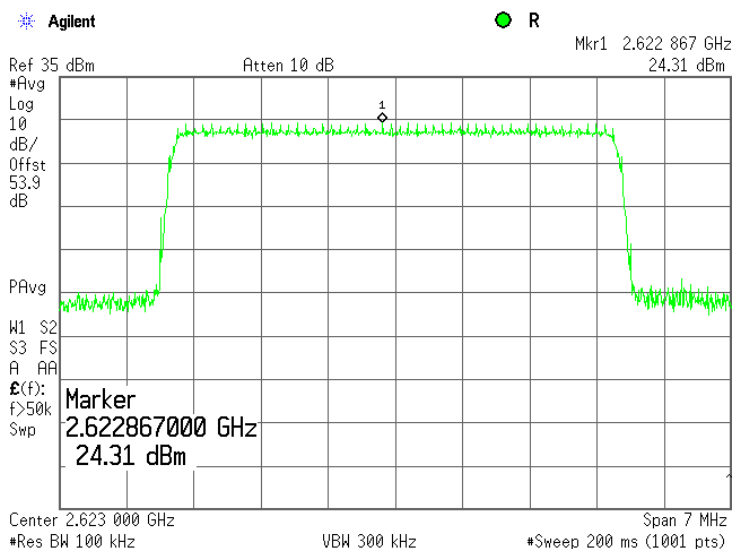


Plot 7.2.20 Power spectral density test results at mid frequency, QPSK, 5 MHz EBW, Antenna 2

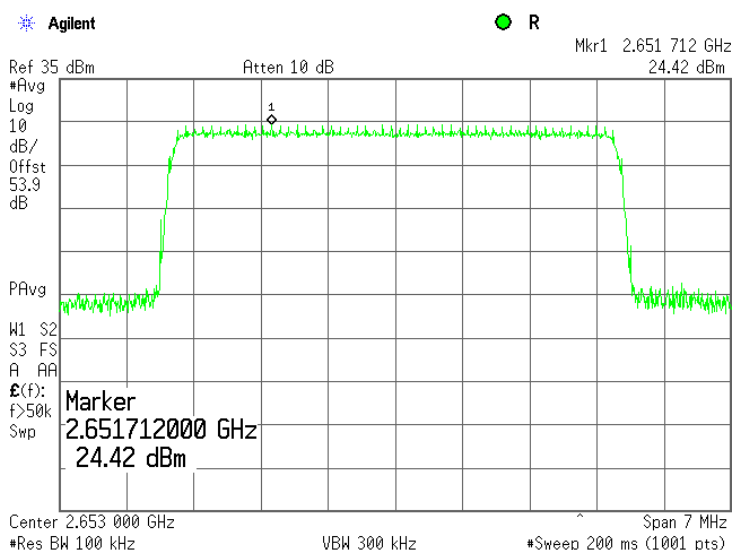


Test specification:		Section 27.50(h), Peak output power	
Test procedure:		Section 27.50(h)	
Test mode:	Compliance	Verdict: PASS	
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.2.21 Power spectral density test results at high frequency, QPSK, 5 MHz EBW, Antenna 2

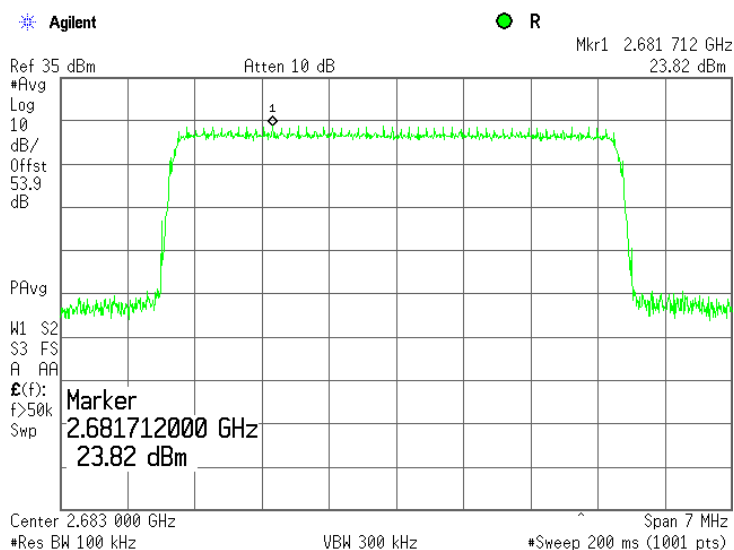


Plot 7.2.22 Power spectral density test results at low frequency, 64QAM, 5 MHz EBW, Antenna 2

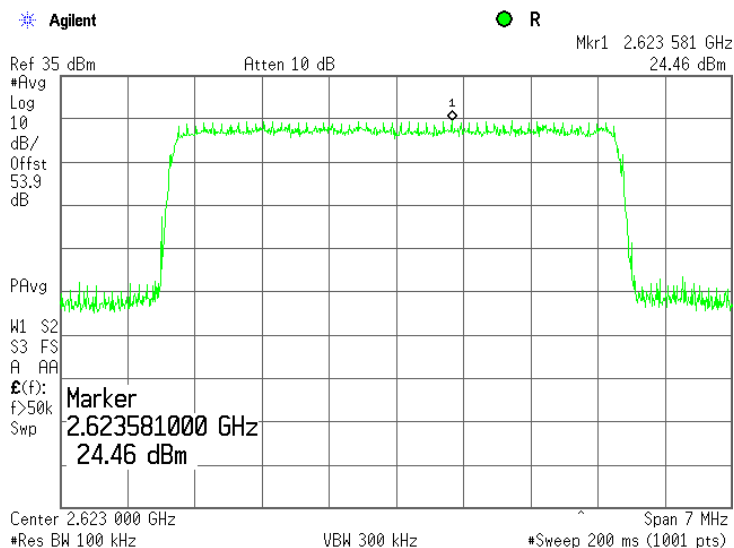


Test specification: Section 27.50(h), Peak output power			
Test procedure: Section 27.50(h)			
Test mode: Compliance	Verdict: PASS		
Date: 12/2/2010			
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.2.23 Power spectral density test results at mid frequency, 64QAM, 5 MHz EBW, Antenna 2

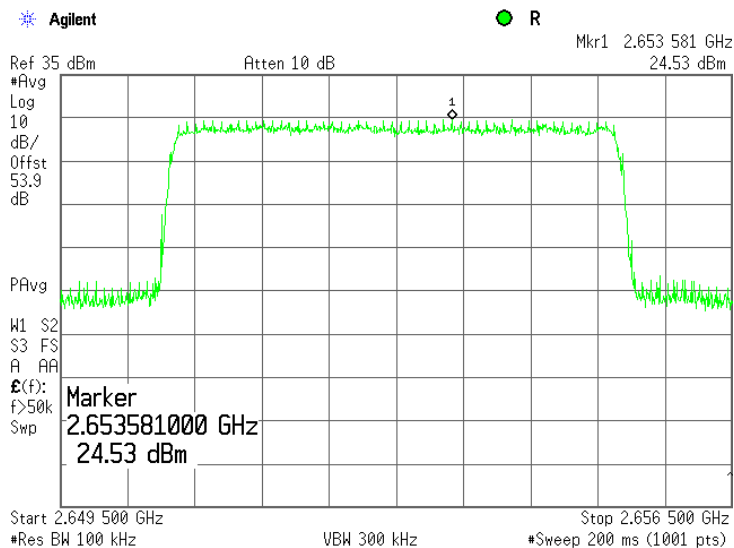


Plot 7.2.24 Power spectral density test results at high frequency, 64QAM, 5 MHz EBW, Antenna 2

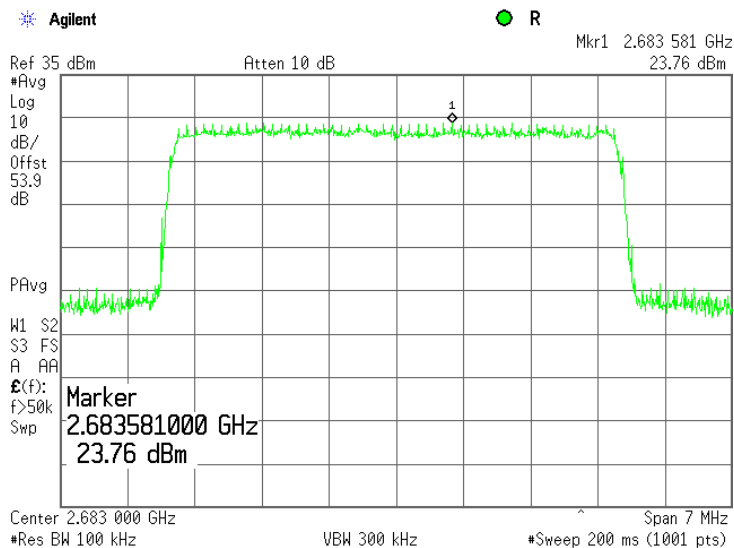


Test specification:		Section 27.50(h), Peak output power	
Test procedure:		Section 27.50(h)	
Test mode:	Compliance	Verdict: PASS	
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.2.25 Power spectral density test results at low frequency, QPSK, 7 MHz EBW, Antenna 1

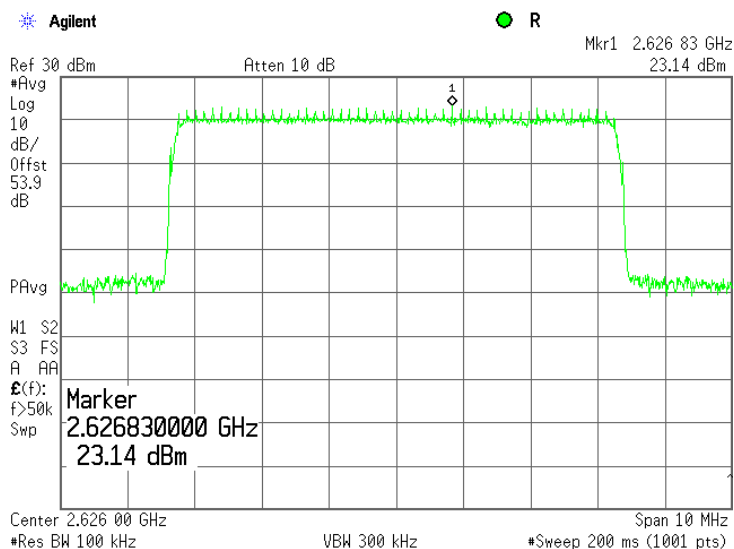


Plot 7.2.26 Power spectral density test results at mid frequency, QPSK, 7 MHz EBW, Antenna 1

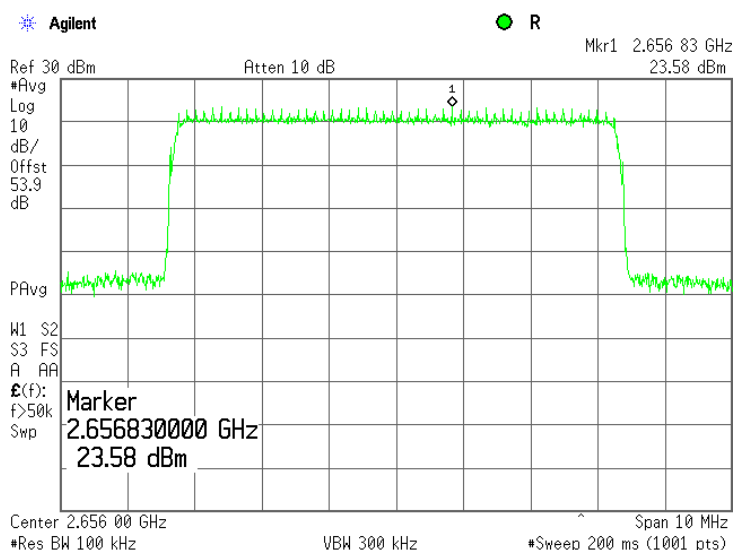


Test specification:		Section 27.50(h), Peak output power	
Test procedure:		Section 27.50(h)	
Test mode:	Compliance	Verdict: PASS	
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.2.27 Power spectral density test results at high frequency, QPSK, 7 MHz EBW, Antenna 1

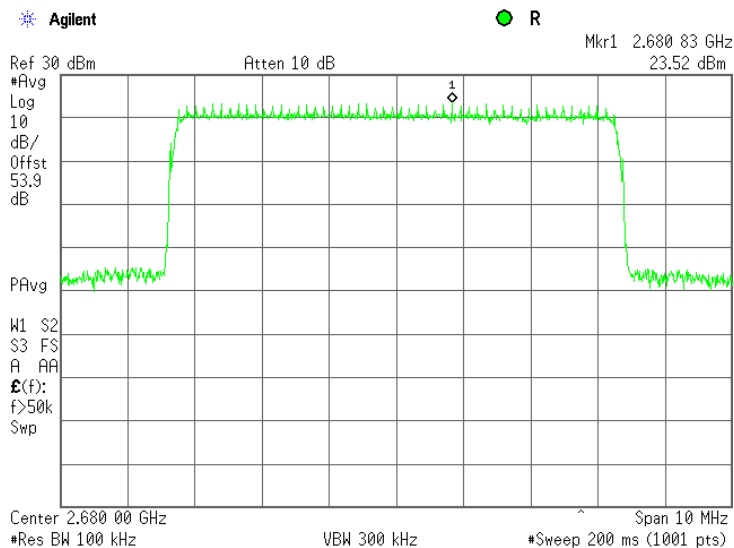


Plot 7.2.28 Power spectral density test results at low frequency, 64QAM, 7 MHz EBW, Antenna 1

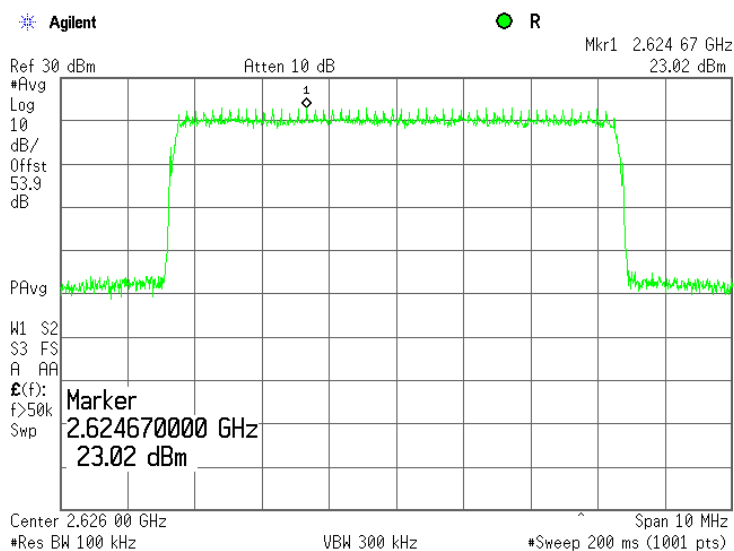


Test specification:		Section 27.50(h), Peak output power	
Test procedure:		Section 27.50(h)	
Test mode:	Compliance	Verdict: PASS	
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.2.29 Power spectral density test results at mid frequency, 64QAM, 7 MHz EBW, Antenna 1

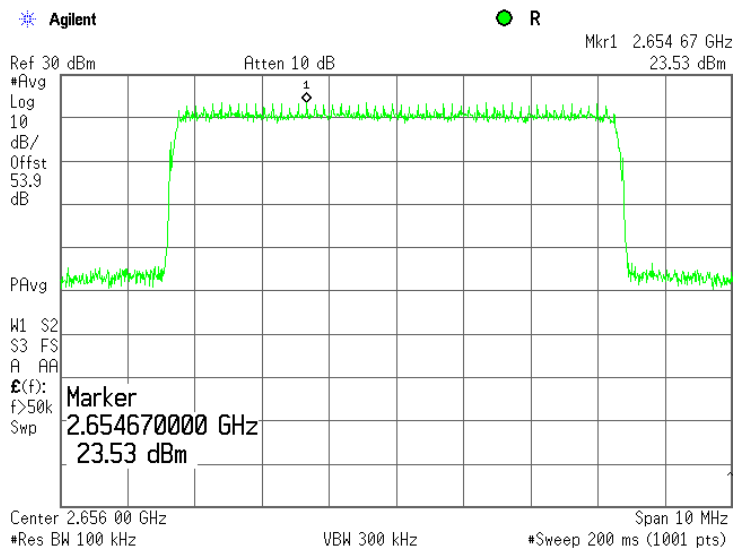


Plot 7.2.30 Power spectral density test results at high frequency, 64QAM, 7 MHz EBW, Antenna 1

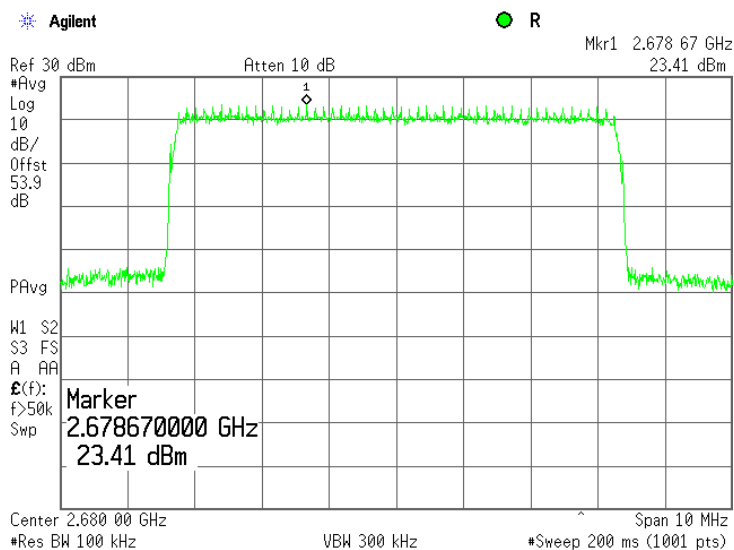


Test specification:		Section 27.50(h), Peak output power	
Test procedure:		Section 27.50(h)	
Test mode:	Compliance	Verdict: PASS	
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.2.31 Power spectral density test results at low frequency, QPSK, 7 MHz EBW, Antenna 2

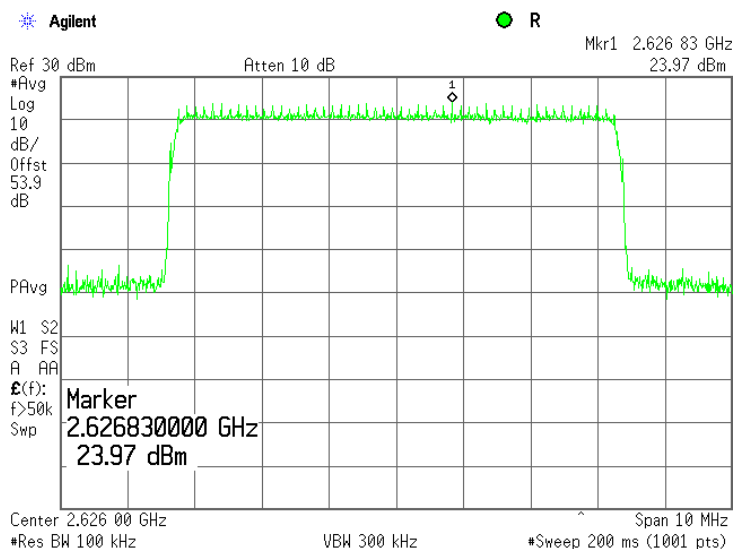


Plot 7.2.32 Power spectral density test results at mid frequency, QPSK, 7 MHz EBW, Antenna 2

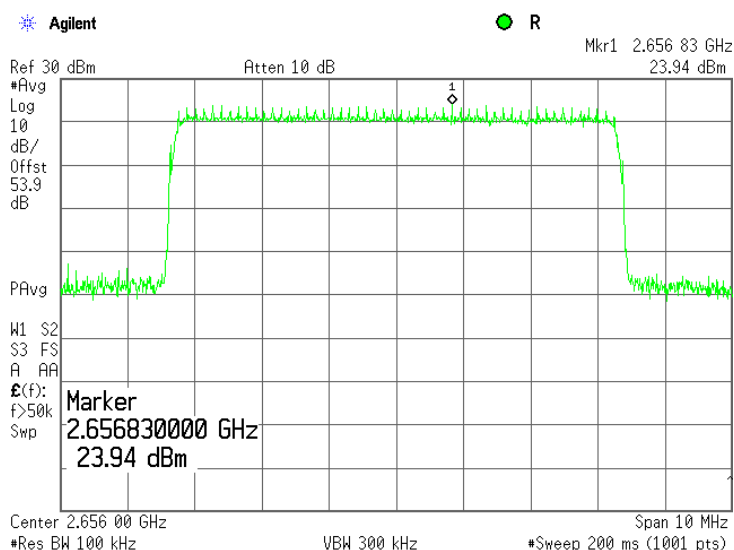


Test specification: Section 27.50(h), Peak output power			
Test procedure: Section 27.50(h)			
Test mode: Compliance		Verdict: PASS	
Date: 12/2/2010			
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.2.33 Power spectral density test results at high frequency, QPSK, 7 MHz EBW, Antenna 2

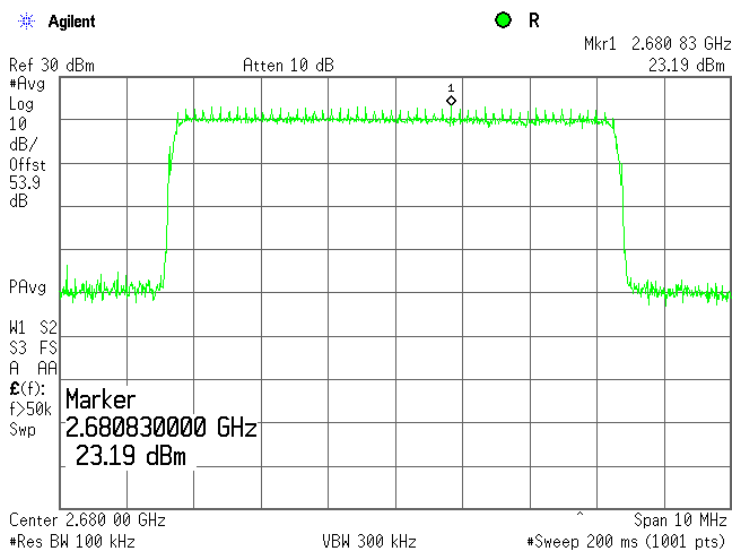


Plot 7.2.34 Power spectral density test results at low frequency, 64QAM, 7 MHz EBW, Antenna 2

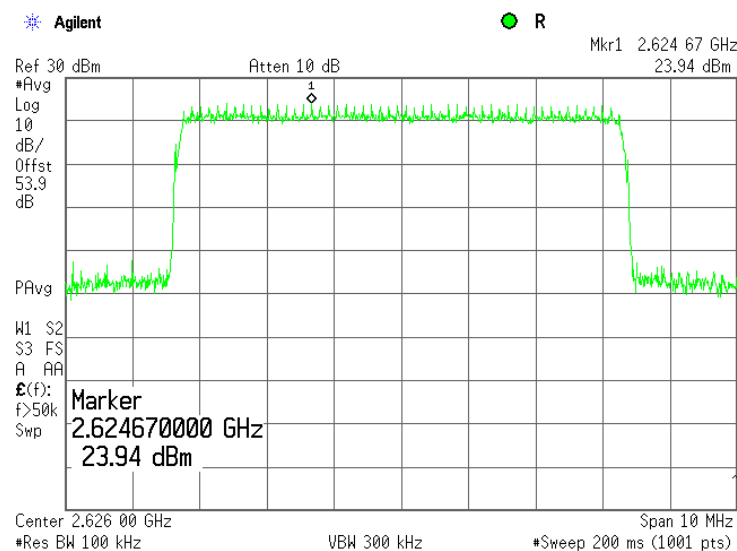


Test specification:		Section 27.50(h), Peak output power	
Test procedure:		Section 27.50(h)	
Test mode:		Compliance	Verdict: PASS
Date:		12/2/2010	
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.2.35 Power spectral density test results at mid frequency, 64QAM, 7 MHz EBW, Antenna 2

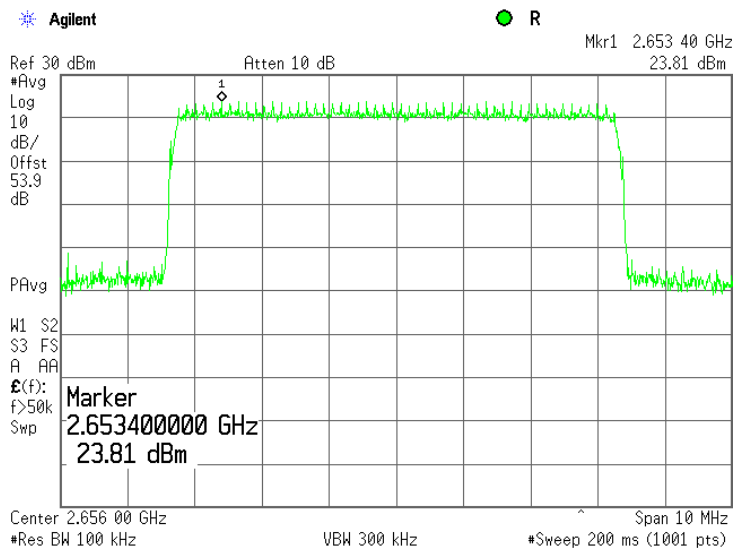


Plot 7.2.36 Power spectral density test results at high frequency, 64QAM, 7 MHz EBW, Antenna 2

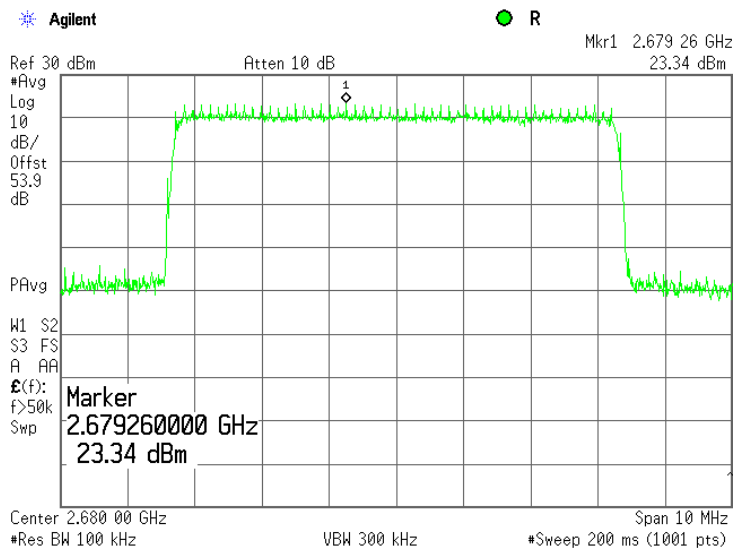


Test specification:		Section 27.50(h), Peak output power	
Test procedure:		Section 27.50(h)	
Test mode:	Compliance	Verdict: PASS	
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.2.37 Power spectral density test results at low frequency, QPSK, 10 MHz EBW, Antenna 1

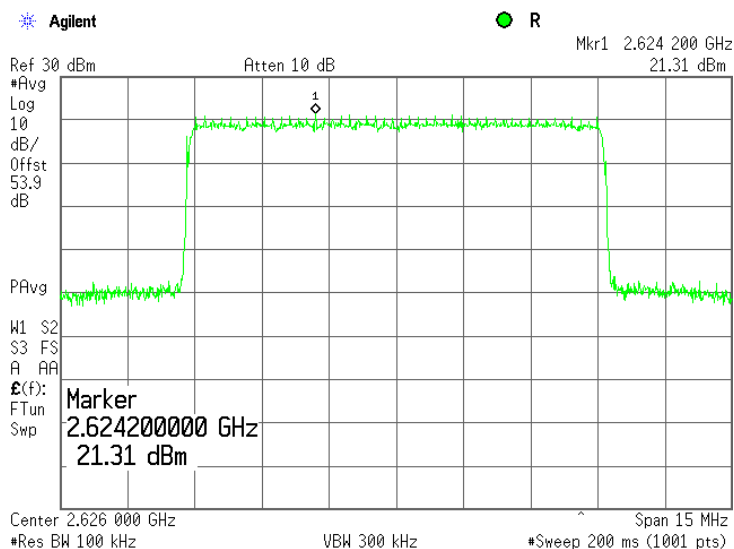


Plot 7.2.38 Power spectral density test results at mid frequency, QPSK, 10 MHz EBW, Antenna 1

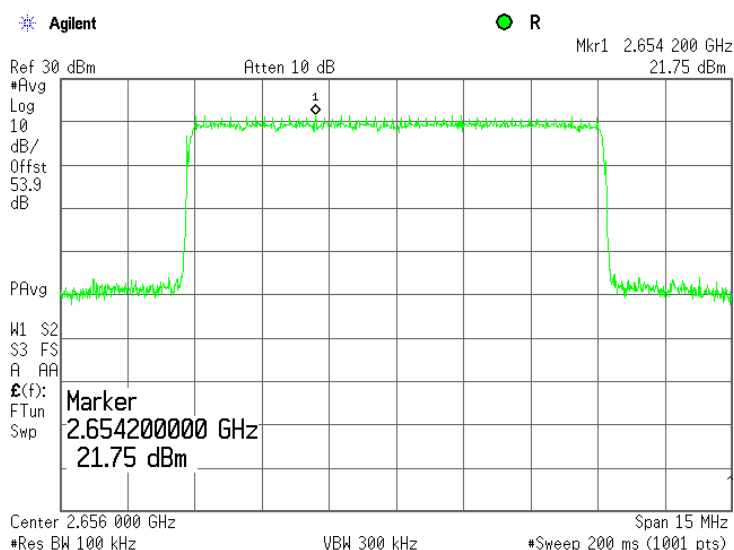


Test specification: Section 27.50(h), Peak output power			
Test procedure: Section 27.50(h)			
Test mode: Compliance		Verdict: PASS	
Date: 12/2/2010			
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.2.39 Power spectral density test results at high frequency, QPSK, 10 MHz EBW, Antenna 1

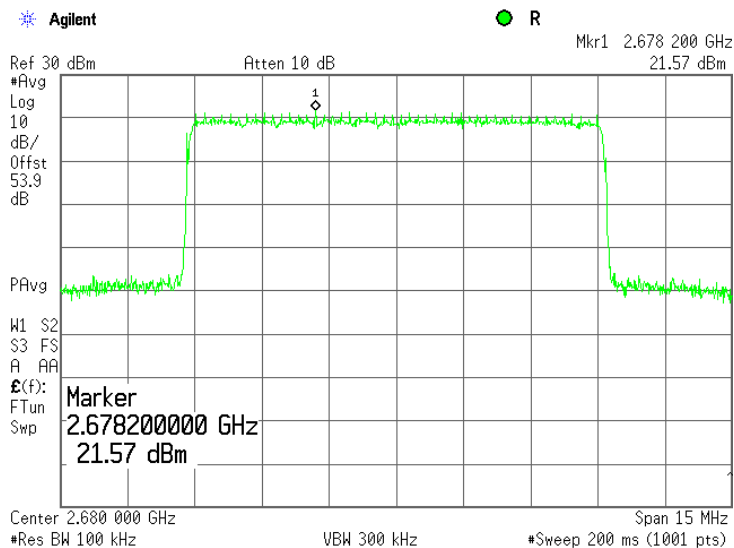


Plot 7.2.40 Power spectral density test results at low frequency, 64QAM, 10 MHz EBW, Antenna 1

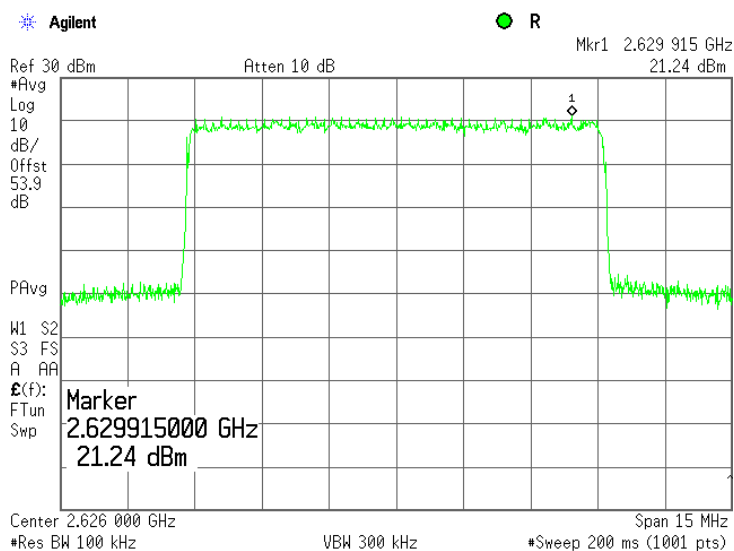


Test specification:		Section 27.50(h), Peak output power	
Test procedure:		Section 27.50(h)	
Test mode:	Compliance	Verdict: PASS	
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.2.41 Power spectral density test results at mid frequency, 64QAM, 10 MHz EBW, Antenna 1

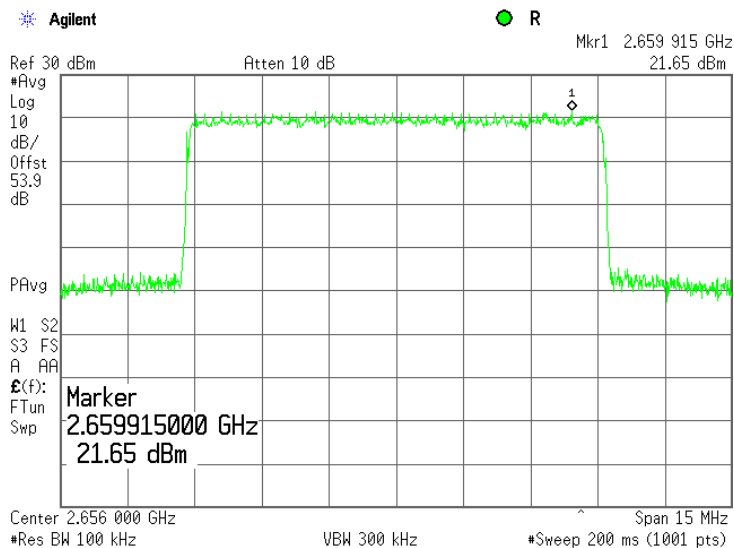


Plot 7.2.42 Power spectral density test results at high frequency, 64QAM, 10 MHz EBW, Antenna 1

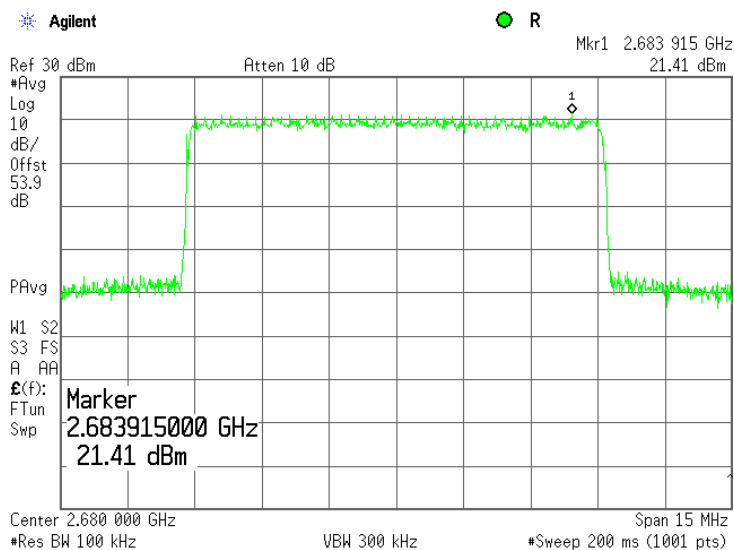


Test specification:		Section 27.50(h), Peak output power	
Test procedure:		Section 27.50(h)	
Test mode:	Compliance	Verdict: PASS	
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.2.43 Power spectral density test results at low frequency, QPSK, 10 MHz EBW, Antenna 2

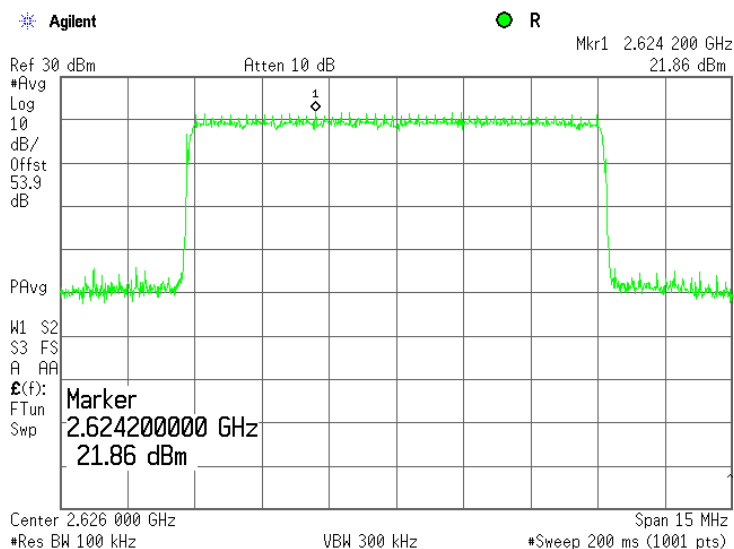


Plot 7.2.44 Power spectral density test results at mid frequency, QPSK, 10 MHz EBW, Antenna 2

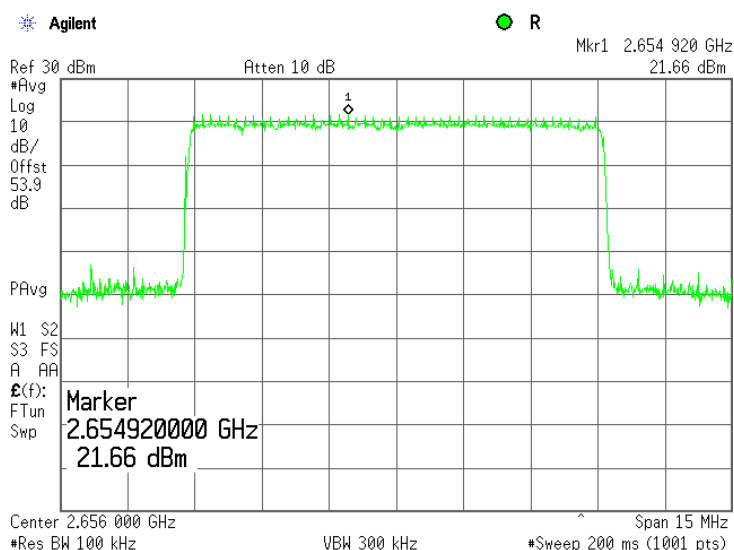


Test specification:	Section 27.50(h), Peak output power		
Test procedure:	Section 27.50(h)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.2.45 Power spectral density test results at high frequency, QPSK, 10 MHz EBW, Antenna 2

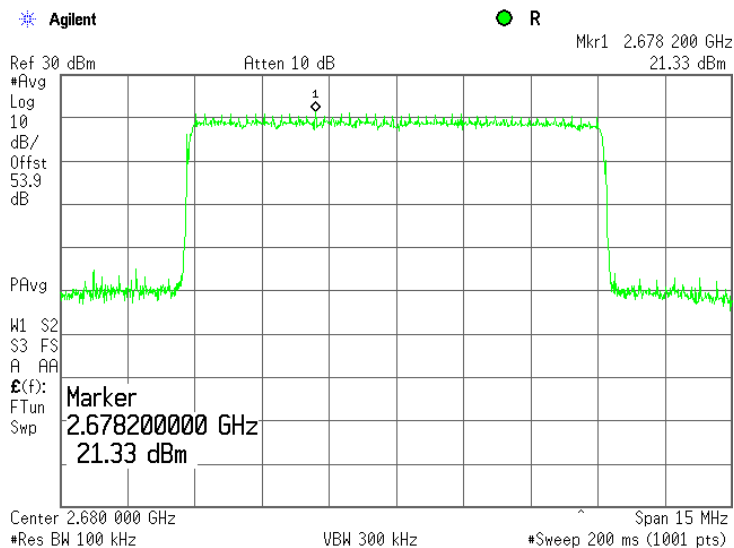


Plot 7.2.46 Power spectral density test results at low frequency, 64QAM, 10 MHz EBW, Antenna 2

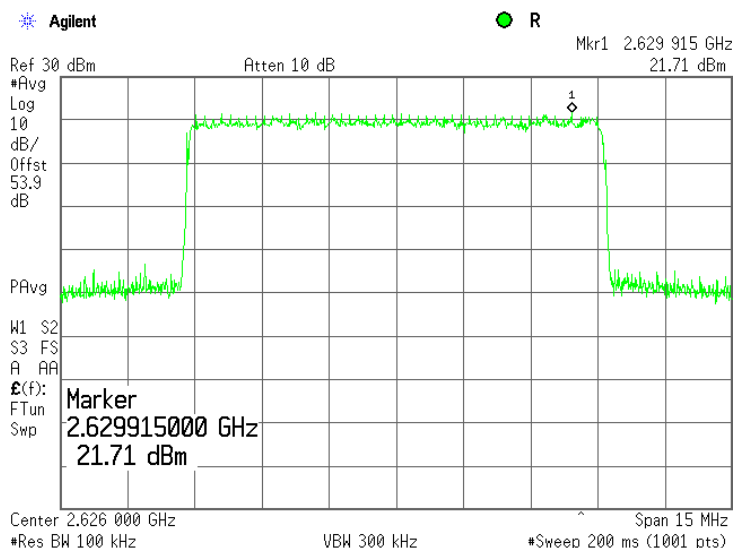


Test specification:		Section 27.50(h), Peak output power	
Test procedure:		Section 27.50(h)	
Test mode:		Compliance	Verdict: PASS
Date:		12/2/2010	
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.2.47 Power spectral density test results at mid frequency, 64QAM, 10 MHz EBW, Antenna 2

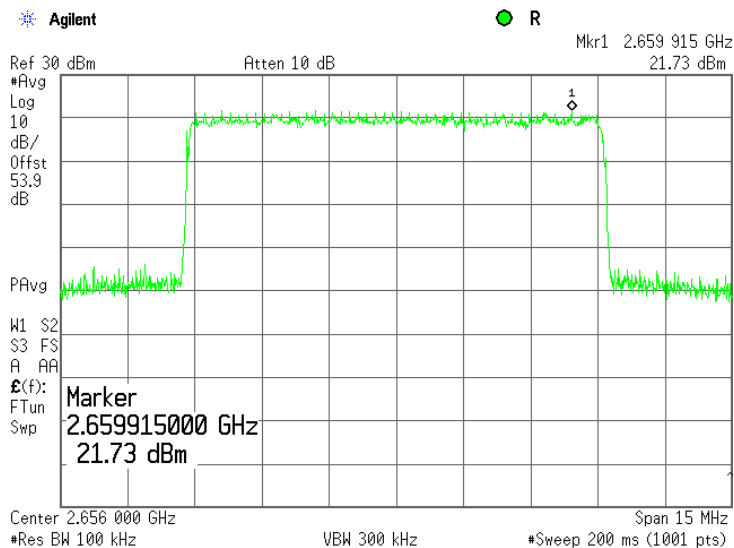

Plot 7.2.48 Power spectral density test results at high frequency, 64QAM, 10 MHz EBW, Antenna 2

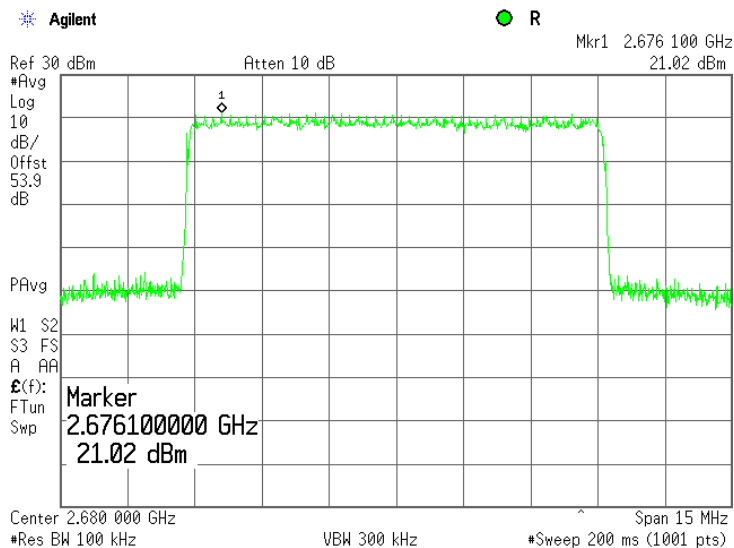

Test specification: Section 27.53(m)(2), Conducted spurious emissions at the band edges			
Test procedure: Section 27.53(m)(2)			
Test mode: Compliance		Verdict: PASS	
Date: 12/2/2010			
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

7.3 Conducted spurious emissions at the band edges (emission mask)

7.3.1 General

This test was performed to measure emission mask at RF antenna connector. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Spurious emission limits

Channel	Frequency range	Attenuation below carrier, dBc	Limit, dBm
Channel bandwidth 3.5 MHz			
2623.0	2614.0 – 2620.0 2626.0 – 2632.0	43+ 10*Log (P*)	-13.0
2653.0	2644.0 – 2650.0 2656.0 – 2662.0	43+ 10*Log (P*)	-13.0
2683.0	2674.0 – 2680.0 2686.0 – 2692.0	43+ 10*Log (P*)	-13.0
Channel bandwidth 5 MHz			
2623.0	2614.0 – 2620.0 2626.0 – 2632.0	43+ 10*Log (P*)	-13.0
2653.0	2644.0 – 2650.0 2656.0 – 2662.0	43+ 10*Log (P*)	-13.0
2683.0	2674.0 – 2680.0 2686.0 – 2692.0	43+ 10*Log (P*)	-13.0
Channel bandwidth 7 MHz			
2626.0	2614.0 – 2620.0 2632.0 – 2638.0	43+ 10*Log (P*)	-13.0
2656.0	2644.0 – 2650.0 2662.0 – 2668.0	43+ 10*Log (P*)	-13.0
2680.0	2668.0 – 2674.0 2686.0 – 2692.0	43+ 10*Log (P*)	-13.0
Channel bandwidth 10 MHz			
2626.0	2614.0 – 2620.0 2632.0 – 2638.0	43+ 10*Log (P*)	-13.0
2656.0	2644.0 – 2650.0 2662.0 – 2668.0	43+ 10*Log (P*)	-13.0
2680.0	2668.0 – 2674.0 2686.0 – 2692.0	43+ 10*Log (P*)	-13.0

* - P is transmitter output power in Watts

7.3.2 Test procedure

7.3.2.1 The EUT was set up as shown in Figure 7.3.1 or Figure 7.3.2, energized and its proper operation was checked.

7.3.2.2 The spurious emissions were measured with spectrum analyzer as provided in the associated plots.

7.3.2.3 The worst case results are provided in the associated tables and shown in the associated plots.

Test specification:	Section 27.53(m)(2), Conducted spurious emissions at the band edges		
Test procedure:	Section 27.53(m)(2)		
Test mode:	Compliance	Verdict: PASS	
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Figure 7.3.1 Spurious emission test setup for single output





Figure 7.3.2 Spurious emission test setup for combined outputs



Test specification:	Section 27.53(m)(2), Conducted spurious emissions at the band edges			
Test procedure:	Section 27.53(m)(2)			
Test mode:	Compliance	Verdict:		PASS
Date:	12/2/2010			
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC	
Remarks:				

Table 7.3.2 Spurious emission at the band edges test results (combined output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 INVESTIGATED FREQUENCY RANGE: See Table 7.3.1
 RBW: 100 kHz
 DETECTOR USED: Average
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 MODULATING SIGNAL: PRBS
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Frequency offset, ± MHz	SA reading, dBm low range	SA reading, dBm high range	RBW, kHz	Integration BW, kHz	Limit, dBm	Verdict
3.5MHz EBW						
Low carrier frequency 2623.0 MHz QPSK (Output power = 40.62 dBm)						
3.5	-17.79	-15.28	100	1000	-13.0	Pass
4.5	-19.62	-21.25	100	1000	-13.0	
5.5	-26.85	-27.50	100	1000	-13.0	
6.5	-29.07	-30.33	100	1000	-13.0	
Low carrier frequency 2623.0 MHz 64QAM (Output power = 40.59 dBm)						
3.5	-14.51	-13.36	100	1000	-13.0	Pass
4.5	-16.63	-17.56	100	1000	-13.0	
5.5	-23.52	-24.53	100	1000	-13.0	
6.5	-26.70	-27.67	100	1000	-13.0	
Mid carrier frequency 2653.0 MHz QPSK (Output power = 40.92 dBm)						
3.5	-18.27	-15.84	100	1000	-13.0	Pass
4.5	-19.62	-22.27	100	1000	-13.0	
5.5	-28.45	-29.67	100	1000	-13.0	
6.5	-30.98	-30.73	100	1000	-13.0	
Mid carrier frequency 2653.0 MHz 64QAM (Output power = 40.83 dBm)						
3.5	-17.23	-17.02	100	1000	-13.0	Pass
4.5	-20.14	-21.18	100	1000	-13.0	
5.5	-28.17	-28.51	100	1000	-13.0	
6.5	-28.86	-31.06	100	1000	-13.0	
High carrier frequency 2683.0 MHz QPSK (Output power = 40.58 dBm)						
3.5	-16.67	-19.11	100	1000	-13.0	Pass
4.5	-20.10	-24.31	100	1000	-13.0	
5.5	-29.44	-29.66	100	1000	-13.0	
6.5	-30.73	-31.31	100	1000	-13.0	
High carrier frequency 2683.0 MHz 64QAM (Output power = 40.32 dBm)						
3.5	-17.54	-20.17	100	1000	-13.0	Pass
4.5	-21.83	-24.25	100	1000	-13.0	
5.5	-28.92	-30.12	100	1000	-13.0	
6.5	-29.65	-31.53	100	1000	-13.0	

Test specification:	Section 27.53(m)(2), Conducted spurious emissions at the band edges			
Test procedure:	Section 27.53(m)(2)			
Test mode:	Compliance	Verdict:		PASS
Date:	12/2/2010			
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC	
Remarks:				

Table 7.3.3 Spurious emission at the band edges test results (combined output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 INVESTIGATED FREQUENCY RANGE: See Table 7.3.1
 RBW: 100 kHz
 DETECTOR USED: Average
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 MODULATING SIGNAL: PRBS
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Frequency offset, ± MHz	SA reading, dBm low range	SA reading, dBm high range	RBW, kHz	Integration BW, kHz	Limit, dBm	Verdict
5MHz EBW						
Low carrier frequency 2563.0 MHz QPSK (Output power = 41.56dBm)						
3.5	-22.93	-19.62	100	1000	-13.0	Pass
4.5	-19.69	-17.36	100	1000	-13.0	
5.5	-19.48	-18.69	100	1000	-13.0	
6.5	-22.38	-24.45	100	1000	-13.0	
Low carrier frequency 2563.0 MHz 64QAM (Output power = 41.57 dBm)						
3.5	-21.56	-20.45	100	1000	-13.0	Pass
4.5	-18.67	-18.96	100	1000	-13.0	
5.5	-21.87	-18.45	100	1000	-13.0	
6.5	-22.34	-24.11	100	1000	-13.0	
Mid carrier frequency 2593.0 MHz QPSK (Output power = 41.86 dBm)						
3.5	-22.12	-20.84	100	1000	-13.0	Pass
4.5	-17.57	-18.55	100	1000	-13.0	
5.5	-18.31	-18.52	100	1000	-13.0	
6.5	-20.38	-22.92	100	1000	-13.0	
Mid carrier frequency 2593.0 MHz 64QAM (Output power = 41.89 dBm)						
3.5	-20.14	-17.99	100	1000	-13.0	Pass
4.5	-16.89	-17.34	100	1000	-13.0	
5.5	-18.77	-18.53	100	1000	-13.0	
6.5	-20.45	-22.54	100	1000	-13.0	
High carrier frequency 2629.0 MHz QPSK (Output power = 41.51 dBm)						
3.5	-19.47	-14.69	100	1000	-13.0	Pass
4.5	-14.68	-14.13	100	1000	-13.0	
5.5	-15.18	-15.64	100	1000	-13.0	
6.5	-18.53	-20.48	100	1000	-13.0	
High carrier frequency 2629.0 MHz 64QAM (Output power = 41.45 dBm)						
3.5	-18.21	-17.33	100	1000	-13.0	Pass
4.5	-14.50	-14.94	100	1000	-13.0	
5.5	-14.86	-13.60	100	1000	-13.0	
6.5	-17.07	-17.87	100	1000	-13.0	

Test specification:		Section 27.53(m)(2), Conducted spurious emissions at the band edges	
Test procedure:		Section 27.53(m)(2)	
Test mode:	Compliance	Verdict: PASS	
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Table 7.3.4 Spurious emission at the band edges test results (combined output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 INVESTIGATED FREQUENCY RANGE: See Table 7.3.1
 RBW: 100 kHz
 DETECTOR USED: Average
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 MODULATING SIGNAL: PRBS
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Frequency offset, ± MHz	SA reading, dBm low range	SA reading, dBm high range	RBW, kHz	Integration BW, kHz	Limit, dBm	Verdict
7 MHz EBW						
Low carrier frequency 2566.0 MHz QPSK (Output power = 41.70 dBm)						
6.5	-16.27	-18.19	100	1000	-13.0	Pass
7.5	-16.02	-18.21	100	1000	-13.0	
8.5	-17.16	-18.32	100	1000	-13.0	
9.5	-21.34	-20.79	100	1000	-13.0	
Low carrier frequency 2566.0 MHz 64QAM (Output power = 41.68 dBm)						
6.5	-14.73	-17.47	100	1000	-13.0	Pass
7.5	-15.56	-16.53	100	1000	-13.0	
8.5	-16.72	-17.63	100	1000	-13.0	
9.5	-21.03	-21.31	100	1000	-13.0	
Mid carrier frequency 2596.0 MHz QPSK (Output power = 41.96dBm)						
6.5	-14.46	-15.73	100	1000	-13.0	Pass
7.5	-14.75	-15.57	100	1000	-13.0	
8.5	-15.73	-18.32	100	1000	-13.0	
9.5	-19.95	-20.67	100	1000	-13.0	
Mid carrier frequency 2596.0 MHz 64QAM (Output power = 41.92 dBm)						
6.5	-13.81	-16.59	100	1000	-13.0	Pass
7.5	-14.38	-15.17	100	1000	-13.0	
8.5	-15.34	-17.16	100	1000	-13.0	
9.5	-19.96	-21.23	100	1000	-13.0	
High carrier frequency 2626.0 MHz QPSK (Output power = 41.53 dBm)						
6.5	-17.47	-18.14	100	1000	-13.0	Pass
7.5	-17.87	-17.94	100	1000	-13.0	
8.5	-18.52	-20.88	100	1000	-13.0	
9.5	-21.79	-23.39	100	1000	-13.0	
High carrier frequency 2626.0 MHz 64QAM (Output power = 41.48 dBm)						
6.5	-18.44	-19.77	100	1000	-13.0	Pass
7.5	-19.07	-20.29	100	1000	-13.0	
8.5	-18.89	-20.16	100	1000	-13.0	
9.5	-23.26	-24.47	100	1000	-13.0	

NOTE: For the rest test results please see Error! Reference source not found.- Plot 7.3.36

Test specification:	Section 27.53(m)(2), Conducted spurious emissions at the band edges			
Test procedure:	Section 27.53(m)(2)			
Test mode:	Compliance	Verdict:		PASS
Date:	12/2/2010			
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC	
Remarks:				

Table 7.3.5 Spurious emission at the band edges test results (combined output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 INVESTIGATED FREQUENCY RANGE: See Table 7.3.1
 RBW: 100 kHz
 DETECTOR USED: Average
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 MODULATING SIGNAL: PRBS
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Frequency offset, ± MHz	SA reading, dBm low range	SA reading, dBm high range	RBW, kHz	Integration BW, kHz	Limit, dBm	Verdict
10 MHz EBW						
Low carrier frequency 2566.0 MHz QPSK (Output power = 41.84 dBm)						
6.5	-23.43	-23.70	100	1000	-13.0	Pass
7.5	-21.92	-20.74	100	1000	-13.0	
8.5	-19.17	-21.64	100	1000	-13.0	
9.5	-17.25	-19.88	100	1000	-13.0	
Low carrier frequency 2566.0 MHz 64QAM (Output power = 41.99 dBm)						
6.5	-22.05	-24.49	100	1000	-13.0	Pass
7.5	-18.04	-20.28	100	1000	-13.0	
8.5	-17.62	-20.65	100	1000	-13.0	
9.5	-16.32	-18.65	100	1000	-13.0	
Mid carrier frequency 2596.0 MHz QPSK (Output power = 42.36 dBm)						
6.5	-23.75	-22.94	100	1000	-13.0	Pass
7.5	-20.20	-19.57	100	1000	-13.0	
8.5	-18.01	-19.44	100	1000	-13.0	
9.5	-16.43	-18.46	100	1000	-13.0	
Mid carrier frequency 2596.0 MHz 64QAM (Output power = 42.29 dBm)						
6.5	-23.42	-24.03	100	1000	-13.0	Pass
7.5	-19.59	-20.38	100	1000	-13.0	
8.5	-17.65	-20.25	100	1000	-13.0	
9.5	-16.36	-18.76	100	1000	-13.0	
High carrier frequency 2626.0 MHz QPSK (Output power = 42.01 dBm)						
6.5	-24.36	-25.60	100	1000	-13.0	Pass
7.5	-21.15	-21.89	100	1000	-13.0	
8.5	-18.75	-23.58	100	1000	-13.0	
9.5	-16.56	-22.57	100	1000	-13.0	
High carrier frequency 2626.0 MHz 64QAM (Output power = 42.06 dBm)						
6.5	-24.44	-24.45	100	1000	-13.0	Pass
7.5	-19.61	-20.43	100	1000	-13.0	
8.5	-16.61	-19.36	100	1000	-13.0	
9.5	-16.64	-19.39	100	1000	-13.0	

Reference numbers of test equipment used

HL 1906	HL 2013	HL 2953	HL 3472	HL 3473	HL 3474	HL 3818	
---------	---------	---------	---------	---------	---------	---------	--

Full description is given in Appendix A.

Test specification:	Section 27.53(m)(2), Conducted spurious emissions at the band edges		
Test procedure:	Section 27.53(m)(2)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Table 7.3.6 Spurious emission at the band edges test results (single output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 INVESTIGATED FREQUENCY RANGE: See Table 7.3.1
 RBW: 100 kHz
 DETECTOR USED: Average
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 MODULATING SIGNAL: PRBS
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Frequency offset, ± MHz	SA reading, dBm low range	SA reading, dBm high range	RBW, kHz	Integration BW, kHz	Limit, dBm	Verdict
3.5 MHz EBW						
Low carrier frequency 2563.0 MHz QPSK (Output power = 38.61 dBm)						
3.5	-18.63	-17.97	100	1000	-13.0	Pass
4.5	-21.78	-24.17	100	1000	-13.0	
5.5	-26.51	-26.38	100	1000	-13.0	
6.5	-27.16	-28.30	100	1000	-13.0	
Low carrier frequency 2563.0 MHz 64QAM (Output power = 38.53 dBm)						
3.5	-18.74	-28.58	100	1000	-13.0	Pass
4.5	-22.96	-24.26	100	1000	-13.0	
5.5	-25.66	-26.73	100	1000	-13.0	
6.5	-27.65	-29.08	100	1000	-13.0	
Mid carrier frequency 2593.0 MHz QPSK (Output power = 38.67 dBm)						
3.5	-16.01	-18.07	100	1000	-13.0	Pass
4.5	-20.69	-24.05	100	1000	-13.0	
5.5	-26.82	-26.31	100	1000	-13.0	
6.5	-27.13	-29.49	100	1000	-13.0	
Mid carrier frequency 2593.0 MHz 64QAM (Output power = 38.61 dBm)						
3.5	-16.07	-17.52	100	1000	-13.0	Pass
4.5	-20.76	-23.30	100	1000	-13.0	
5.5	-25.97	-26.02	100	1000	-13.0	
6.5	-27.42	-29.29	100	1000	-13.0	
High carrier frequency 2629.0 MHz QPSK (Output power = 37.26 dBm)						
3.5	-19.45	-20.32	100	1000	-13.0	Pass
4.5	-22.59	-24.71	100	1000	-13.0	
5.5	-25.87	-26.38	100	1000	-13.0	
6.5	-27.29	-28.13	100	1000	-13.0	
High carrier frequency 2629.0 MHz 64QAM (Output power = 37.78 dBm)						
3.5	-18.11	-19.06	100	1000	-13.0	Pass
4.5	-21.89	-24.02	100	1000	-13.0	
5.5	-24.66	-26.35	100	1000	-13.0	
6.5	-26.35	-28.47	100	1000	-13.0	

Test specification:	Section 27.53(m)(2), Conducted spurious emissions at the band edges		
Test procedure:	Section 27.53(m)(2)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Table 7.3.7 Spurious emission at the band edges test results (single output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 INVESTIGATED FREQUENCY RANGE: See Table 7.3.1
 RBW: 100 kHz
 DETECTOR USED: Average
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 MODULATING SIGNAL: PRBS
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Frequency offset, ± MHz	SA reading, dBm low range	SA reading, dBm high range	RBW, kHz	Integration BW, kHz	Limit, dBm	Verdict
5MHz EBW						
Low carrier frequency 2563.0 MHz QPSK (Output power = 38.56 dBm)						
3.5	-17.64	-15.33	100	1000	-13.0	Pass
4.5	-17.71	-19.09	100	1000	-13.0	
5.5	-20.94	-21.57	100	1000	-13.0	
6.5	-23.68	-24.56	100	1000	-13.0	
Low carrier frequency 2563.0 MHz 64QAM (Output power = 38.55 dBm)						
3.5	-17.37	-16.56	100	1000	-13.0	Pass
4.5	-18.37	-20.69	100	1000	-13.0	
5.5	-23.64	-23.83	100	1000	-13.0	
6.5	-24.44	-27.79	100	1000	-13.0	
Mid carrier frequency 2593.0 MHz QPSK (Output power = 38.62 dBm)						
3.5	-14.71	-13.63	100	1000	-13.0	Pass
4.5	-15.12	-17.65	100	1000	-13.0	
5.5	-19.39	-20.41	100	1000	-13.0	
6.5	22.21	-24.44	100	1000	-13.0	
Mid carrier frequency 2593.0 MHz 64QAM (Output power = 38.56 dBm)						
3.5	-16.65	-16.27	100	1000	-13.0	Pass
4.5	-16.66	-20.20	100	1000	-13.0	
5.5	-22.41	-22.62	100	1000	-13.0	
6.5	-23.44	-27.70	100	1000	-13.0	
High carrier frequency 2629.0 MHz QPSK (Output power = 37.79 dBm)						
3.5	-18.75	-20.53	100	1000	-13.0	Pass
4.5	-19.23	-23.52	100	1000	-13.0	
5.5	-22.53	-24.96	100	1000	-13.0	
6.5	-23.76	-26.81	100	1000	-13.0	
High carrier frequency 2629.0 MHz 64QAM (Output power = 37.76 dBm)						
3.5	-18.40	-19.98	100	1000	-13.0	Pass
4.5	-19.05	-23.01	100	1000	-13.0	
5.5	-23.28	-24.79	100	1000	-13.0	
6.5	-24.13	-27.23	100	1000	-13.0	

Test specification: Section 27.53(m)(2), Conducted spurious emissions at the band edges			
Test procedure: Section 27.53(m)(2)			
Test mode: Compliance		Verdict: PASS	
Date: 12/2/2010			
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Table 7.3.8 Spurious emission at the band edges test results (single output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 INVESTIGATED FREQUENCY RANGE: See Table 7.3.1
 RBW: 100 kHz
 DETECTOR USED: Average
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 MODULATING SIGNAL: PRBS
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Frequency offset, ± MHz	SA reading, dBm low range	SA reading, dBm high range	RBW, kHz	Integration BW, kHz	Limit, dBm	Verdict
7 MHz EBW						
Low carrier frequency 2566.0 MHz QPSK (Output power = 38.69 dBm)						
6.5	-23.49	-22.08	100	1000	-13.0	Pass
7.5	-26.06	-22.54	100	1000	-13.0	
8.5	-25.29	-26.89	100	1000	-13.0	
9.5	-26.68	-26.69	100	1000	-13.0	
Low carrier frequency 2566.0 MHz 64QAM (Output power = 38.67 dBm)						
6.5	-23.02	-21.96	100	1000	-13.0	Pass
7.5	-24.21	-24.91	100	1000	-13.0	
8.5	-23.74	-25.48	100	1000	-13.0	
9.5	-27.97	-26.94	100	1000	-13.0	
Mid carrier frequency 2596.-27.030 MHz QPSK (Output power = 38.69 dBm)						
6.5	-18.32	-20.61	100	1000	-13.0	Pass
7.5	-20.49	-20.36	100	1000	-13.0	
8.5	-21.13	-23.79	100	1000	-13.0	
9.5	-23.62	-25.84	100	1000	-13.0	
Mid carrier frequency 2596.0 MHz 64QAM (Output power = 38.65 dBm)						
6.5	-18.85	-22.16	100	1000	-13.0	Pass
7.5	-21.74	-21.61	100	1000	-13.0	
8.5	-21.49	-22.96	100	1000	-13.0	
9.5	-25.01	-26.84	100	1000	-13.0	
High carrier frequency 2626.0 MHz QPSK (Output power = 38.11 dBm)						
6.5	-19.62	-19.63	100	1000	-13.0	Pass
7.5	-21.62	-19.27	100	1000	-13.0	
8.5	-21.57	-23.36	100	1000	-13.0	
9.5	-24.00	-23.83	100	1000	-13.0	
High carrier frequency 2626.0 MHz 64QAM (Output power = 38.13 dBm)						
6.5	-19.93	-19.57	100	1000	-13.0	Pass
7.5	-21.63	-19.34	100	1000	-13.0	
8.5	-20.17	-21.99	100	1000	-13.0	
9.5	-24.78	-23.66	100	1000	-13.0	

NOTE: For the rest test results please see Error! Reference source not found.- Plot 7.3.36

Test specification:	Section 27.53(m)(2), Conducted spurious emissions at the band edges			
Test procedure:	Section 27.53(m)(2)			
Test mode:	Compliance	Verdict:		PASS
Date:	12/2/2010			
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC	
Remarks:				

Table 7.3.9 Spurious emission at the band edges test results (single output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 INVESTIGATED FREQUENCY RANGE: See Table 7.3.1
 RBW: 100 kHz
 DETECTOR USED: Average
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 MODULATING SIGNAL: PRBS
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Frequency offset, ± MHz	SA reading, dBm low range	SA reading, dBm high range	RBW, kHz	Integration BW, kHz	Limit, dBm	Verdict
10 MHz EBW						
Low carrier frequency 2566.0 MHz QPSK (Output power = 38.64 dBm)						
6.5	-16.92	-18.22	100	1000	-13.0	Pass
7.5	-19.48	-19.93	100	1000	-13.0	
8.5	-20.02	-23.74	100	1000	-13.0	
9.5	-20.14	-26.32	100	1000	-13.0	
Low carrier frequency 2566.0 MHz 64QAM (Output power = 38.63 dBm)						
6.5	-17.25	-18.36	100	1000	-13.0	Pass
7.5	-18.86	-19.21	100	1000	-13.0	
8.5	-18.62	-21.76	100	1000	-13.0	
9.5	-20.10	-22.72	100	1000	-13.0	
Mid carrier frequency 2596.0 MHz QPSK (Output power = 38.65 dBm)						
6.5	-14.26	-17.35	100	1000	-13.0	Pass
7.5	-16.94	-18.01	100	1000	-13.0	
8.5	-19.00	-21.94	100	1000	-13.0	
9.5	-18.72	-21.13	100	1000	-13.0	
Mid carrier frequency 2596.0 MHz 64QAM (Output power = 38.63 dBm)						
6.5	-19.16	-20.01	100	1000	-13.0	Pass
7.5	-18.31	-17.87	100	1000	-13.0	
8.5	-19.03	-20.45	100	1000	-13.0	
9.5	-22.82	-20.99	100	1000	-13.0	
High carrier frequency 2626.0 MHz QPSK (Output power = 38.01 dBm)						
6.5	-16.89	-20.55	300	1000	-13.0	Pass
7.5	-18.38	-21.79	300	1000	-13.0	
8.5	-21.39	-24.95	300	1000	-13.0	
9.5	-21.59	-24.29	300	1000	-13.0	
High carrier frequency 2626.0 MHz 64QAM (Output power = 39.68 dBm)						
6.5	-17.02	-20.47	100	1000	-13.0	Pass
7.5	-18.42	-21.63	100	1000	-13.0	
8.5	-21.07	-24.59	100	1000	-13.0	
9.5	-21.52	-23.96	100	1000	-13.0	

Reference numbers of test equipment used


HL 1906	HL 2015	HL 2254	HL 2953	HL 3433	HL 3434	HL 3818
---------	---------	---------	---------	---------	---------	---------

Full description is given in Appendix A.

Test specification:	Section 27.53(m)(2), Conducted spurious emissions at the band edges		
Test procedure:	Section 27.53(m)(2)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			


Plot 7.3.1 Emission mask test results at low carrier frequency, 3.5 MHz EBW (combined output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: QPSK
MODULATING SIGNAL: PRBS
BIT RATE: 4 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

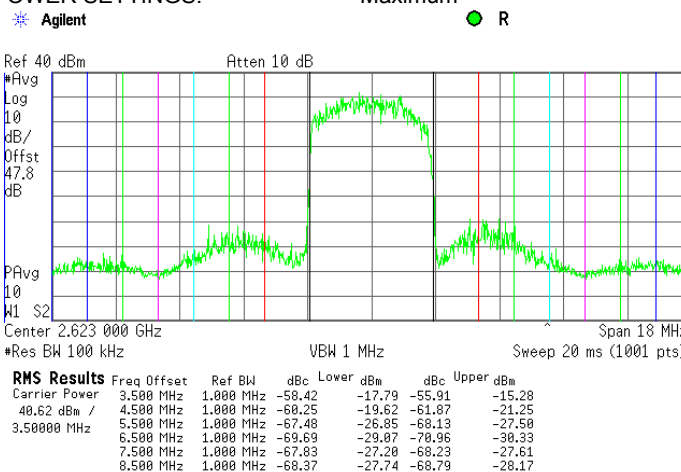

Plot 7.3.2 Emission mask test results at mid carrier frequency, 3.5 MHz EBW (combined output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: QPSK
MODULATING SIGNAL: PRBS
BIT RATE: 4 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

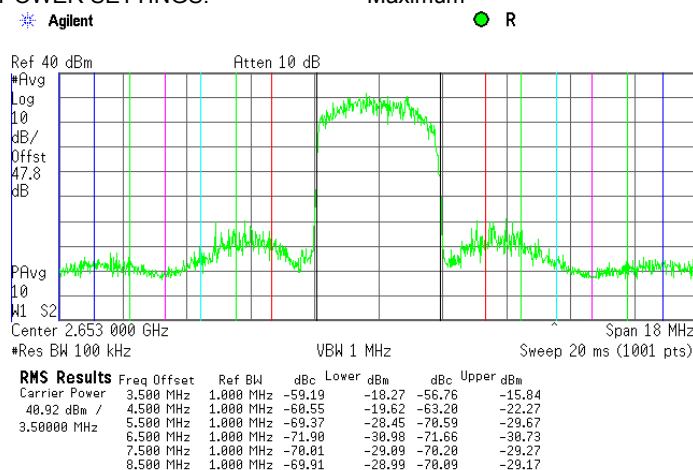

Test specification:	Section 27.53(m)(2), Conducted spurious emissions at the band edges		
Test procedure:	Section 27.53(m)(2)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			


Plot 7.3.3 Emission mask test results at high carrier frequency, 3.5 MHz EBW (combined output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: QPSK
MODULATING SIGNAL: PRBS
BIT RATE: 4 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

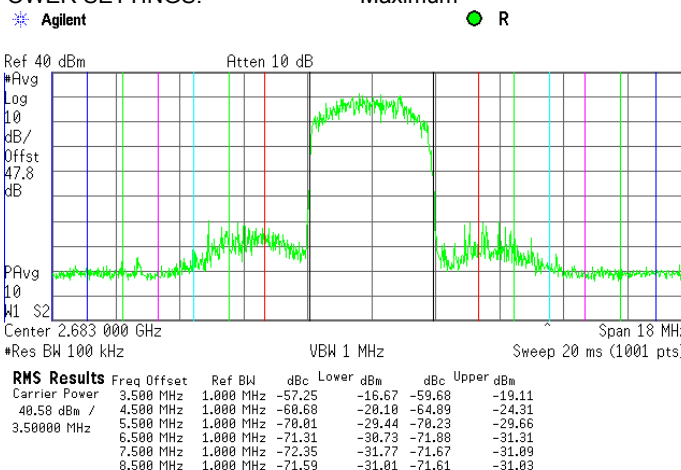

Plot 7.3.4 Emission mask test results at low carrier frequency, 3.5 MHz EBW (combined output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 14 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

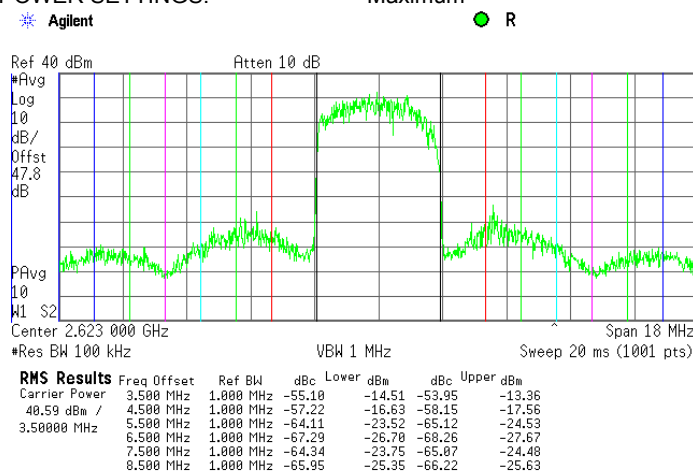

Test specification:	Section 27.53(m)(2), Conducted spurious emissions at the band edges		
Test procedure:	Section 27.53(m)(2)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			


Plot 7.3.5 Emission mask test results at mid carrier frequency, 3.5 MHz EBW (combined output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 14 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

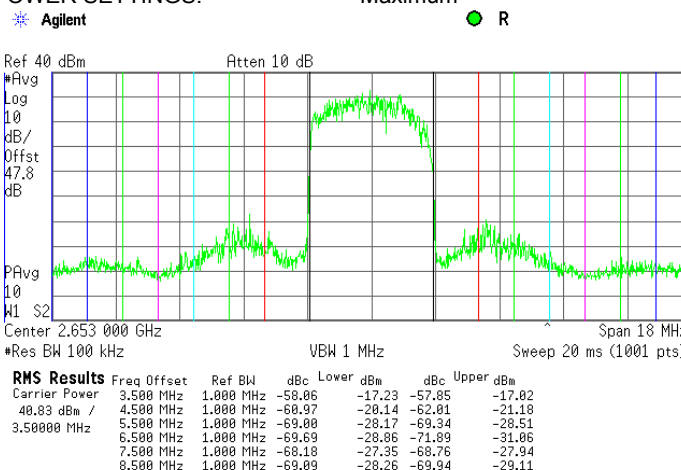

Plot 7.3.6 Emission mask test results at high carrier frequency, 3.5 MHz EBW (combined output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 14 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

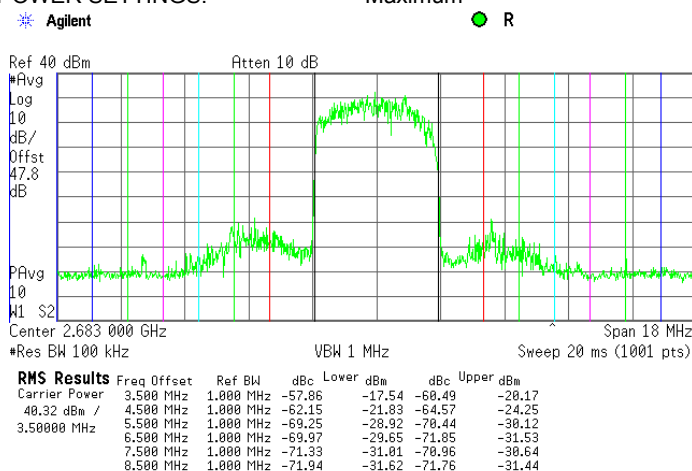

Test specification:	Section 27.53(m)(2), Conducted spurious emissions at the band edges		
Test procedure:	Section 27.53(m)(2)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			


Plot 7.3.7 Emission mask test results at low carrier frequency, 5 MHz EBW (combined output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: QPSK
MODULATING SIGNAL: PRBS
BIT RATE: 7 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

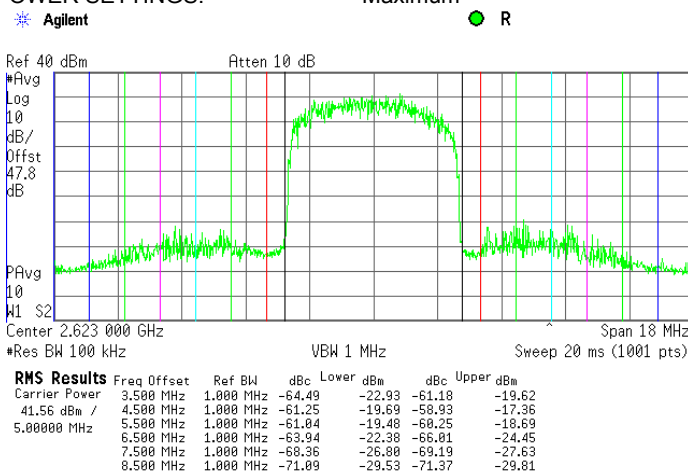

Plot 7.3.8 Emission mask test results at mid carrier frequency, 5 MHz EBW (combined output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: QPSK
MODULATING SIGNAL: PRBS
BIT RATE: 7 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

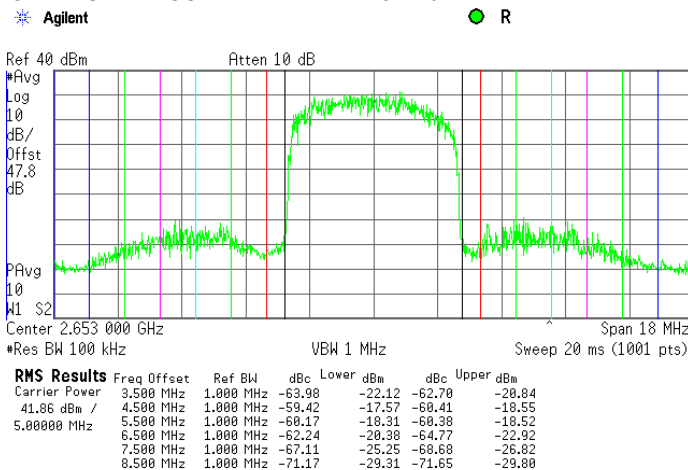

Test specification:	Section 27.53(m)(2), Conducted spurious emissions at the band edges		
Test procedure:	Section 27.53(m)(2)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			


Plot 7.3.9 Emission mask test results at high carrier frequency, 5 MHz EBW (combined output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: QPSK
MODULATING SIGNAL: PRBS
BIT RATE: 7 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

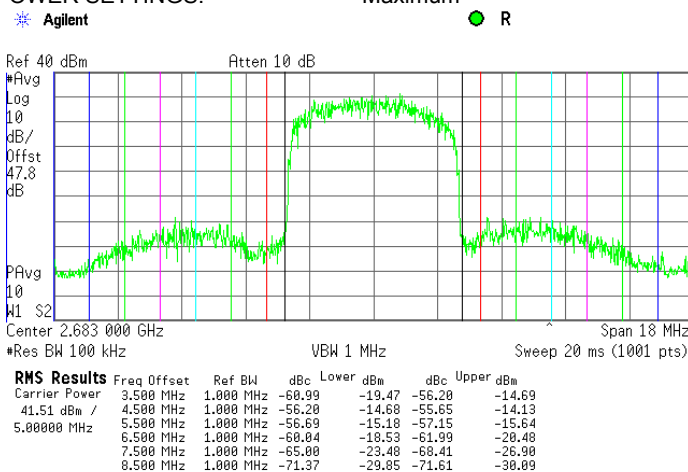

Plot 7.3.10 Emission mask test results at low carrier frequency, 5 MHz EBW (combined output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 23 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

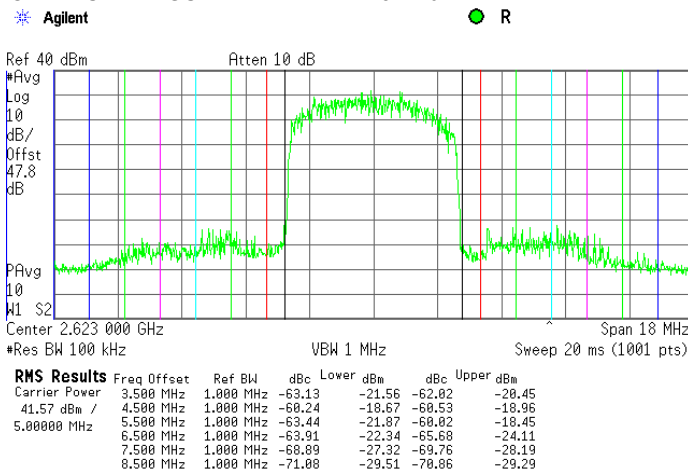

Test specification:	Section 27.53(m)(2), Conducted spurious emissions at the band edges		
Test procedure:	Section 27.53(m)(2)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			


Plot 7.3.11 Emission mask test results at mid carrier frequency, 5 MHz EBW (combined output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 23 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

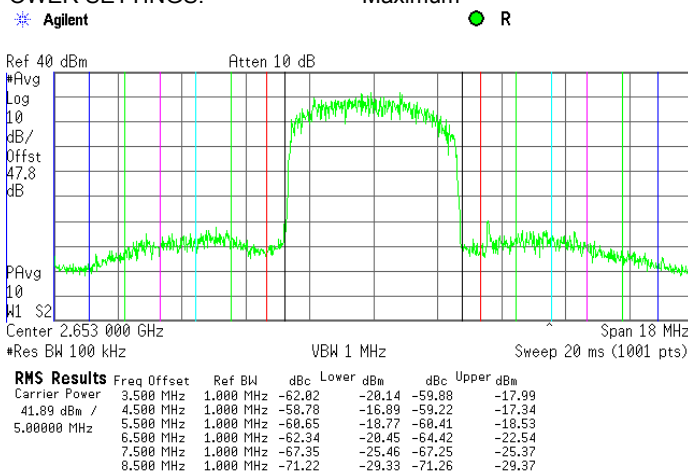

Plot 7.3.12 Emission mask test results at high carrier frequency 5 MHz EBW (combined output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 23 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

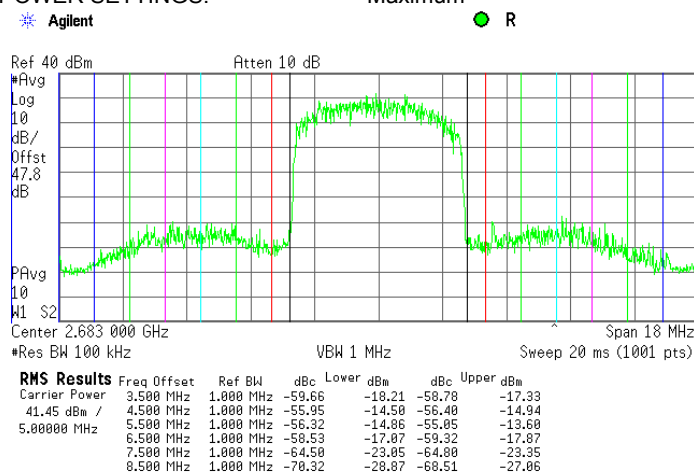

Test specification:	Section 27.53(m)(2), Conducted spurious emissions at the band edges		
Test procedure:	Section 27.53(m)(2)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			


Plot 7.3.13 Emission mask test results at low carrier frequency, 7 MHz EBW (combined output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: QPSK
MODULATING SIGNAL: PRBS
BIT RATE: 8 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

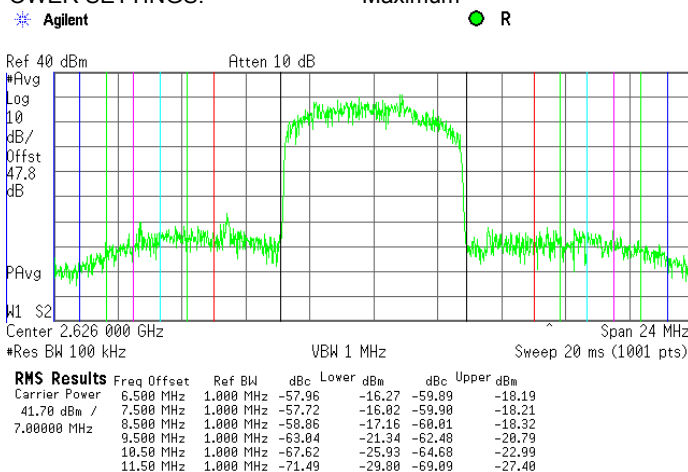

Plot 7.3.14 Emission mask test results at mid carrier frequency, 7 MHz EBW (combined output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: QPSK
MODULATING SIGNAL: PRBS
BIT RATE: 8 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

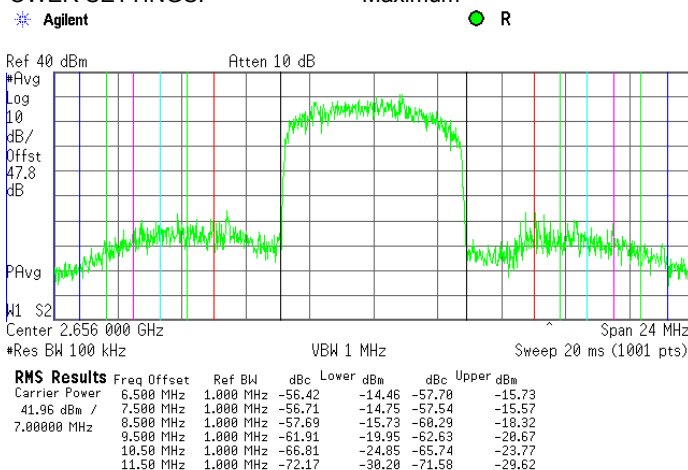

Test specification:	Section 27.53(m)(2), Conducted spurious emissions at the band edges		
Test procedure:	Section 27.53(m)(2)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			


Plot 7.3.15 Emission mask test results at high carrier frequency, 7 MHz EBW (combined output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: QPSK
MODULATING SIGNAL: PRBS
BIT RATE: 8 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

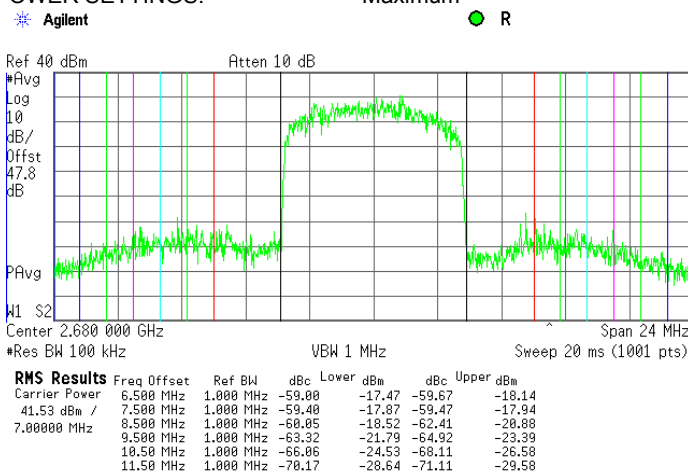

Plot 7.3.16 Emission mask test results at low carrier frequency, 7 MHz EBW (combined output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 28 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

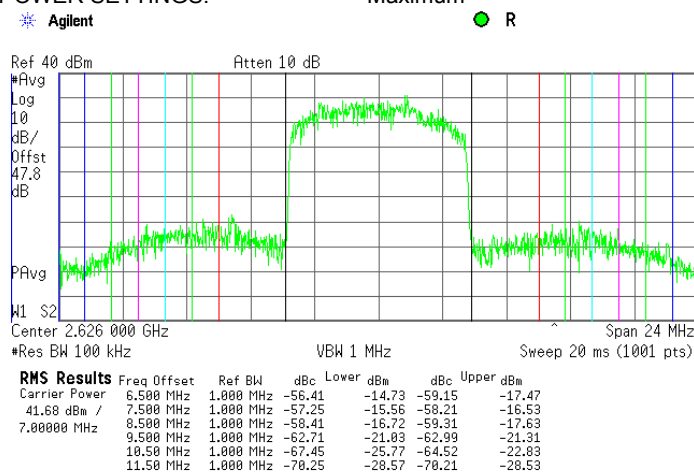

Test specification:	Section 27.53(m)(2), Conducted spurious emissions at the band edges		
Test procedure:	Section 27.53(m)(2)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			


Plot 7.3.17 Emission mask test results at mid carrier frequency, 7 MHz EBW (combined output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 28 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

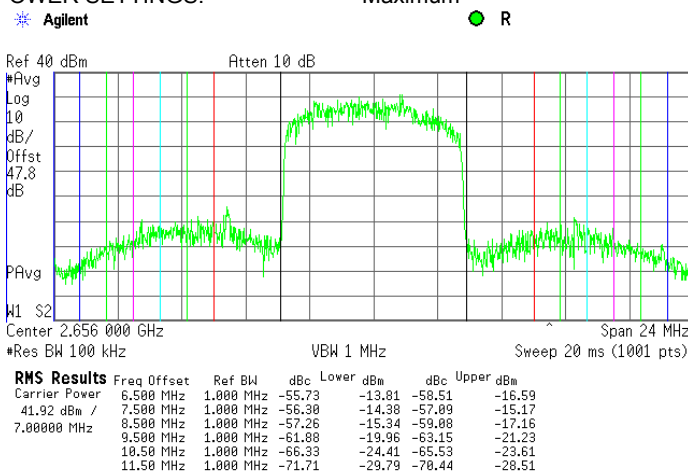

Plot 7.3.18 Emission mask test results at high carrier frequency, 10 MHz EBW (combined output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 28 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

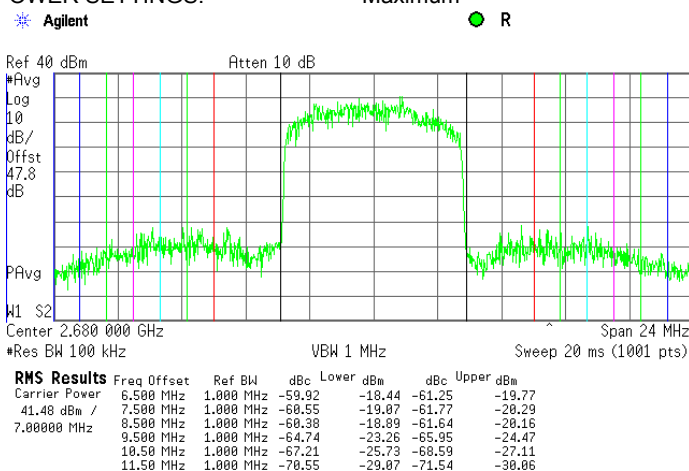

Test specification:	Section 27.53(m)(2), Conducted spurious emissions at the band edges		
Test procedure:	Section 27.53(m)(2)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			


Plot 7.3.19 Emission mask test results at low carrier frequency, 10 MHz EBW (combined output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: QPSK
MODULATING SIGNAL: PRBS
BIT RATE: 13 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

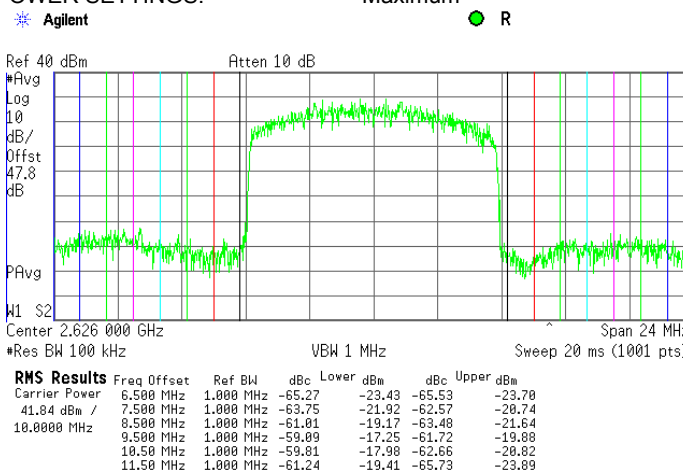

Plot 7.3.20 Emission mask test results at mid carrier frequency, 10 MHz EBW (combined output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: QPSK
MODULATING SIGNAL: PRBS
BIT RATE: 13 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

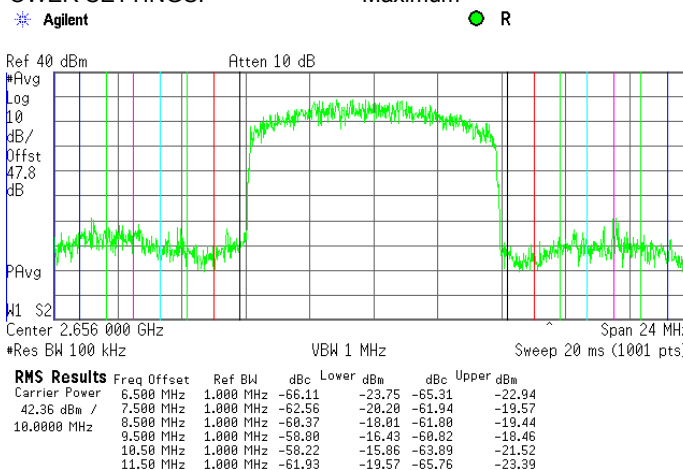

Test specification:	Section 27.53(m)(2), Conducted spurious emissions at the band edges		
Test procedure:	Section 27.53(m)(2)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			


Plot 7.3.21 Emission mask test results at high carrier frequency, 10 MHz EBW (combined output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: QPSK
MODULATING SIGNAL: PRBS
BIT RATE: 13 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

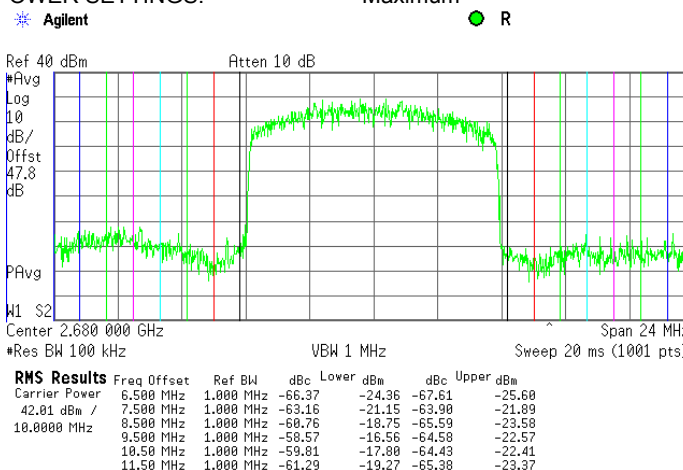

Plot 7.3.22 Emission mask test results at low carrier frequency, 10 MHz EBW (combined output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 46 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

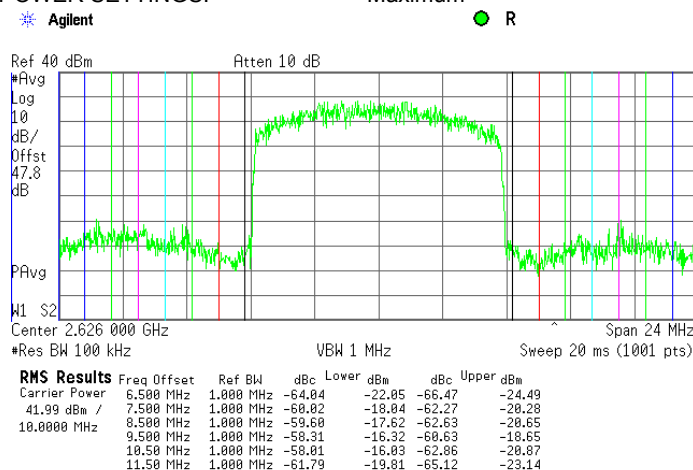

Test specification:	Section 27.53(m)(2), Conducted spurious emissions at the band edges		
Test procedure:	Section 27.53(m)(2)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			


Plot 7.3.23 Emission mask test results at mid carrier frequency, 10 MHz EBW (combined output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 46 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

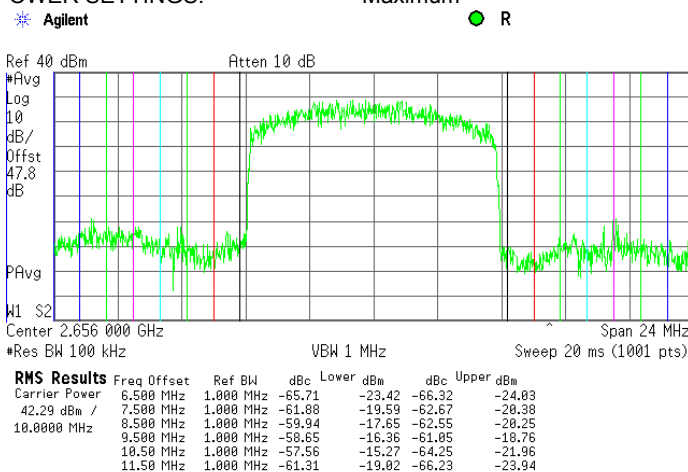

Plot 7.3.24 Emission mask test results at high carrier frequency, 10 MHz EBW (combined output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 46 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

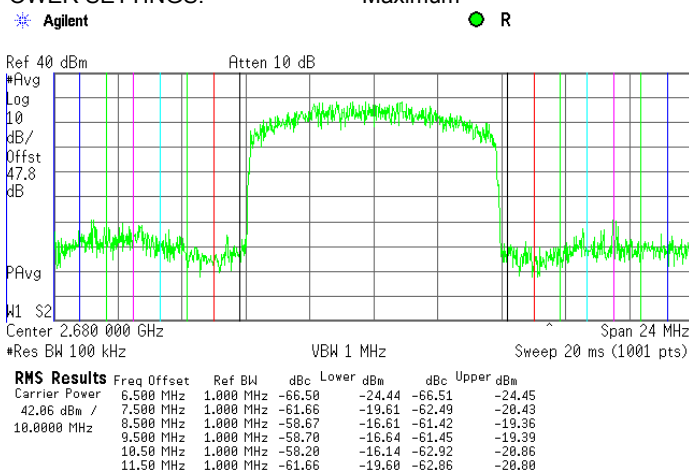

Test specification:	Section 27.53(m)(2), Conducted spurious emissions at the band edges		
Test procedure:	Section 27.53(m)(2)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			


Plot 7.3.25 Emission mask test results at low carrier frequency, 3.5 MHz EBW (single output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: QPSK
MODULATING SIGNAL: PRBS
BIT RATE: 4 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

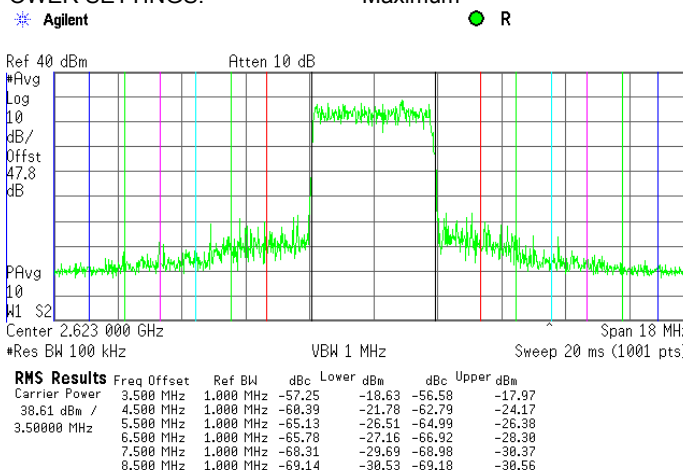

Plot 7.3.26 Emission mask test results at mid carrier frequency, 3.5 MHz EBW (single output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: QPSK
MODULATING SIGNAL: PRBS
BIT RATE: 4 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

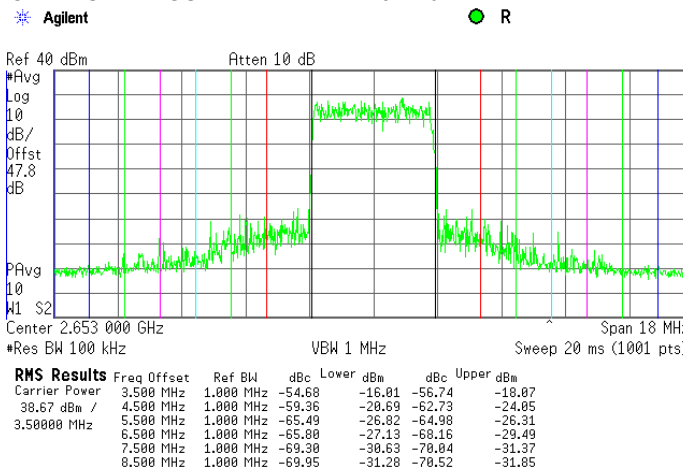

Test specification:	Section 27.53(m)(2), Conducted spurious emissions at the band edges		
Test procedure:	Section 27.53(m)(2)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			


Plot 7.3.27 Emission mask test results at high carrier frequency, 3.5 MHz EBW (single output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: QPSK
MODULATING SIGNAL: PRBS
BIT RATE: 4 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

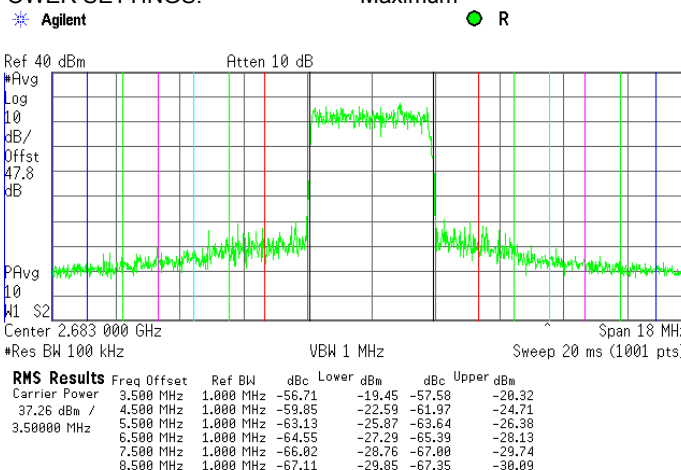

Plot 7.3.28 Emission mask test results at low carrier frequency, 3.5 MHz EBW (single output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 14 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

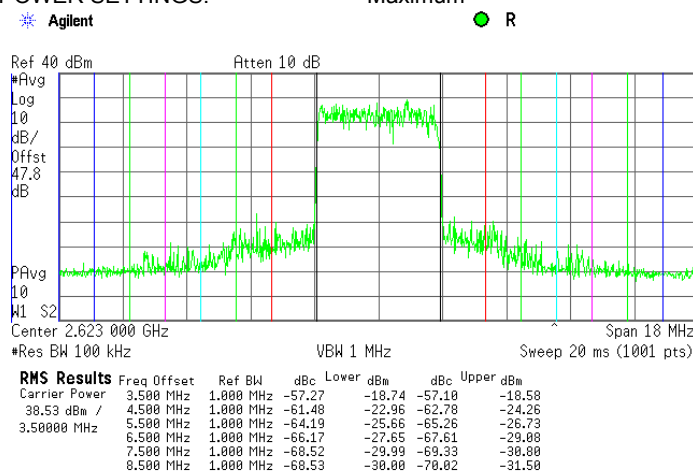

Test specification:	Section 27.53(m)(2), Conducted spurious emissions at the band edges		
Test procedure:	Section 27.53(m)(2)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			


Plot 7.3.29 Emission mask test results at mid carrier frequency, 3.5 MHz EBW (single output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 14 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

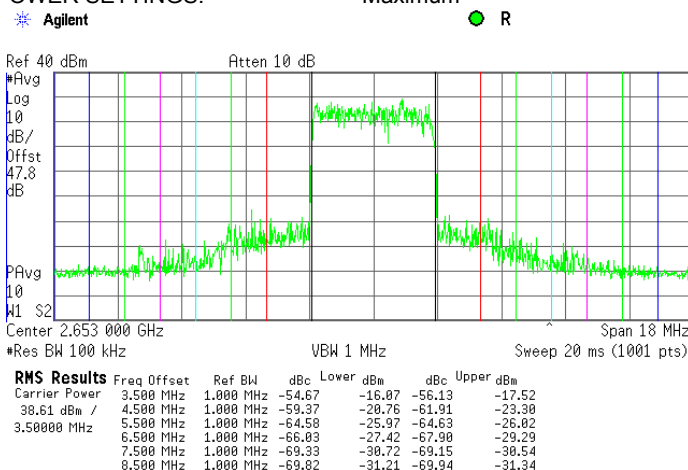

Plot 7.3.30 Emission mask test results at high carrier frequency, 3.5 MHz EBW (single output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 14 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

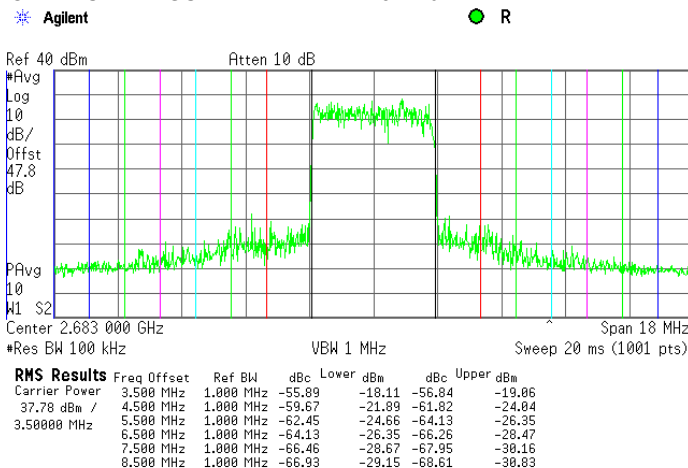

Test specification:	Section 27.53(m)(2), Conducted spurious emissions at the band edges		
Test procedure:	Section 27.53(m)(2)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			


Plot 7.3.31 Emission mask test results at low carrier frequency, 5 MHz EBW (single output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: QPSK
MODULATING SIGNAL: PRBS
BIT RATE: 7 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

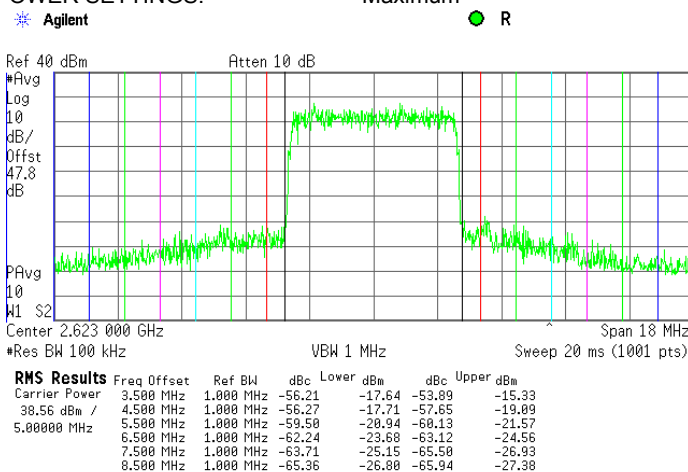

Plot 7.3.32 Emission mask test results at mid carrier frequency, 5 MHz EBW (single output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: QPSK
MODULATING SIGNAL: PRBS
BIT RATE: 7 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

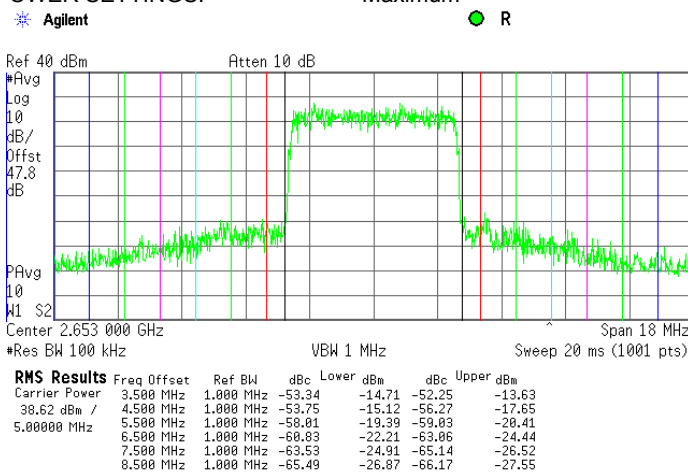

Test specification:	Section 27.53(m)(2), Conducted spurious emissions at the band edges		
Test procedure:	Section 27.53(m)(2)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			


Plot 7.3.33 Emission mask test results at high carrier frequency, 5 MHz EBW (single output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: QPSK
MODULATING SIGNAL: PRBS
BIT RATE: 7 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

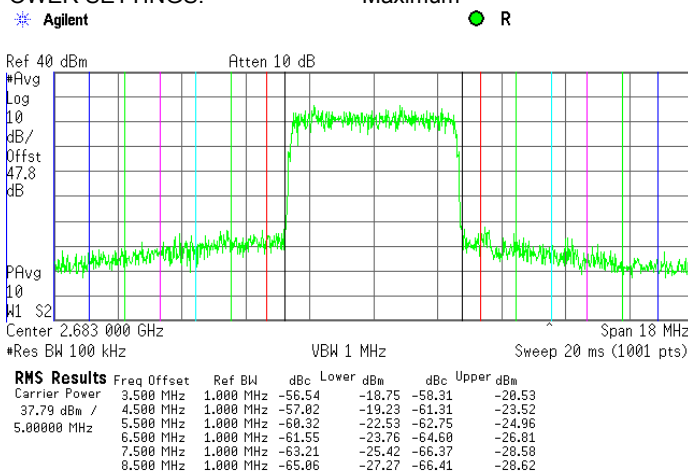

Plot 7.3.34 Emission mask test results at low carrier frequency, 5 MHz EBW (single output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 23 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

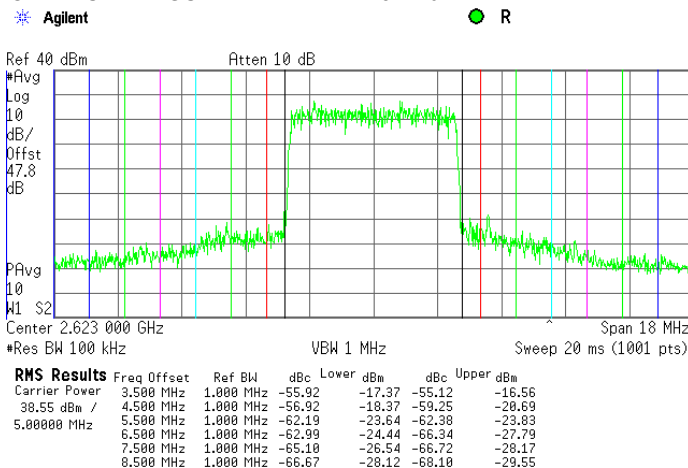

Test specification:	Section 27.53(m)(2), Conducted spurious emissions at the band edges		
Test procedure:	Section 27.53(m)(2)		
Test mode:	Compliance	Verdict: PASS	
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			


Plot 7.3.35 Emission mask test results at mid carrier frequency, 5 MHz EBW (single output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 23 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

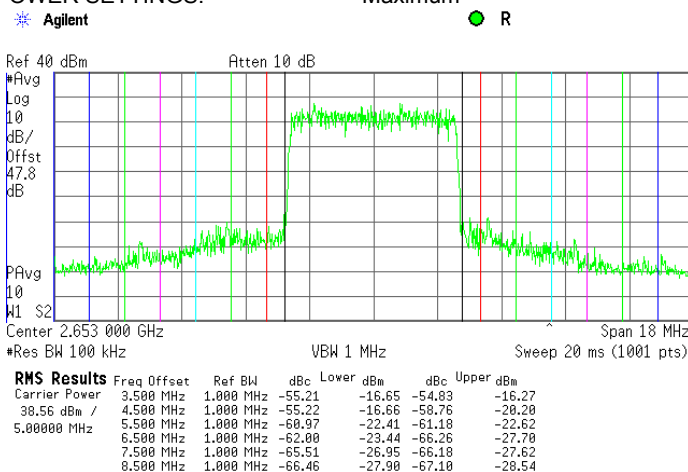

Plot 7.3.36 Emission mask test results at high carrier frequency 5 MHz EBW (single output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 23 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

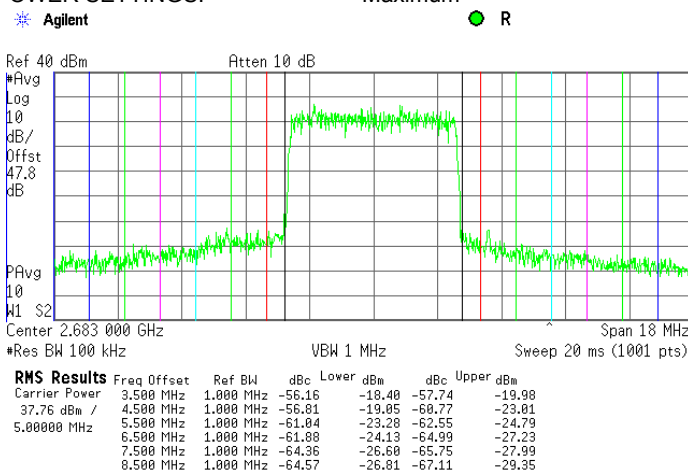

Test specification:	Section 27.53(m)(2), Conducted spurious emissions at the band edges		
Test procedure:	Section 27.53(m)(2)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			


Plot 7.3.37 Emission mask test results at low carrier frequency, 7 MHz EBW (single output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: QPSK
MODULATING SIGNAL: PRBS
BIT RATE: 8 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

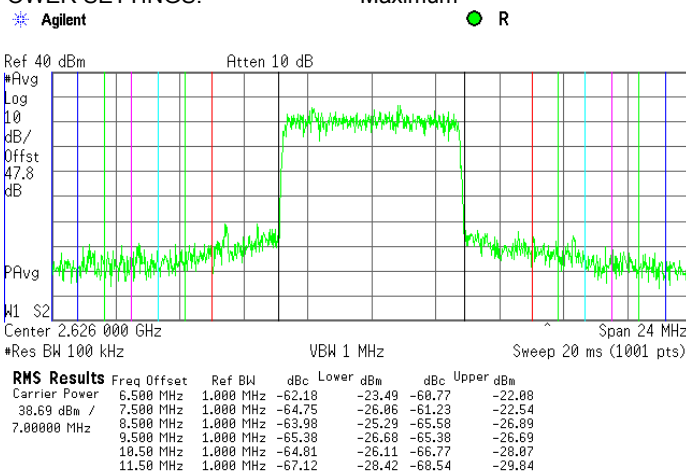

Plot 7.3.38 Emission mask test results at mid carrier frequency, 7 MHz EBW (single output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: QPSK
MODULATING SIGNAL: PRBS
BIT RATE: 8 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

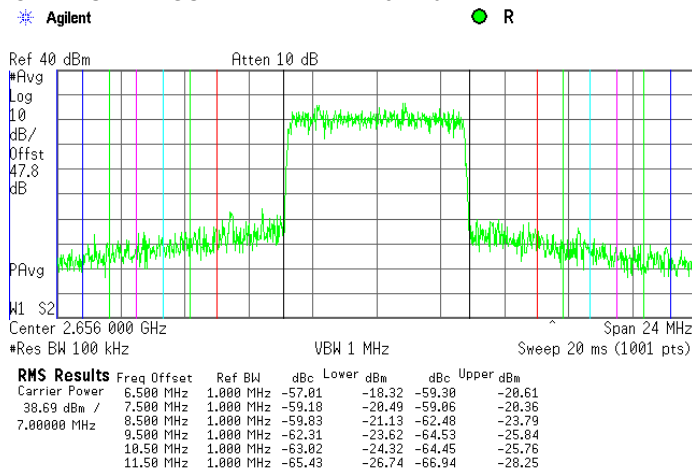

Test specification:	Section 27.53(m)(2), Conducted spurious emissions at the band edges		
Test procedure:	Section 27.53(m)(2)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			


Plot 7.3.39 Emission mask test results at high carrier frequency, 7 MHz EBW (single output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: QPSK
MODULATING SIGNAL: PRBS
BIT RATE: 8 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

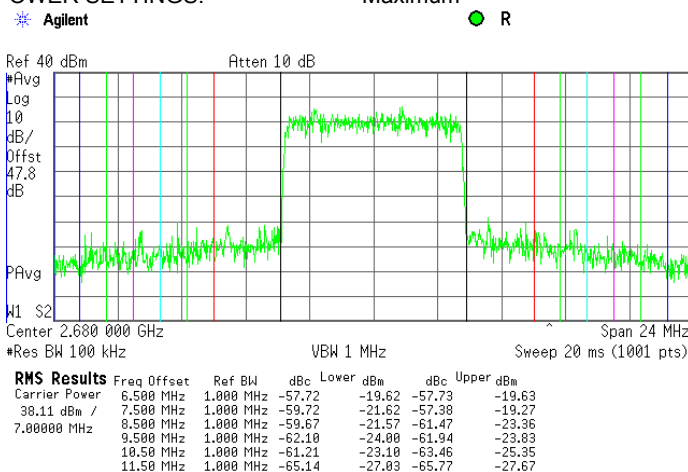

Plot 7.3.40 Emission mask test results at low carrier frequency, 7 MHz EBW (single output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 28 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

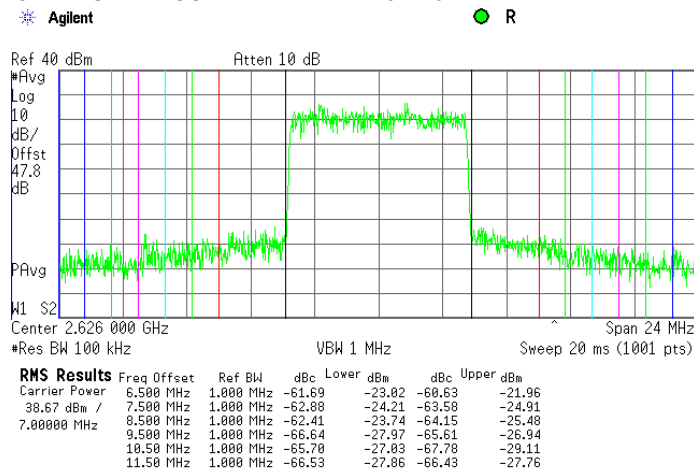

Test specification:	Section 27.53(m)(2), Conducted spurious emissions at the band edges		
Test procedure:	Section 27.53(m)(2)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			


Plot 7.3.41 Emission mask test results at mid carrier frequency, 7 MHz EBW (single output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 28 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

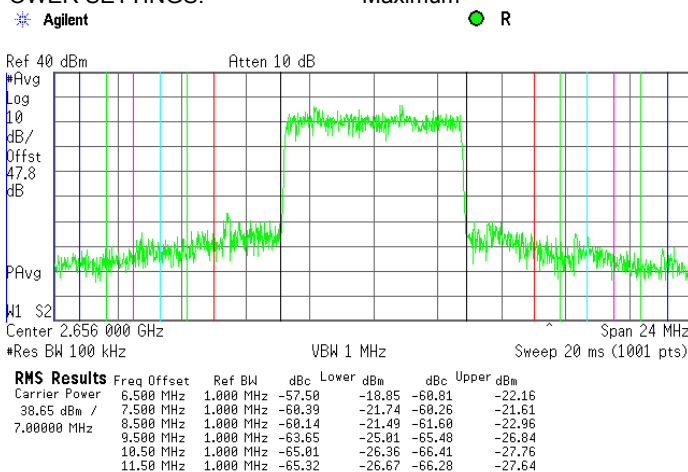

Plot 7.3.42 Emission mask test results at high carrier frequency, 7 MHz EBW (single output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 28 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

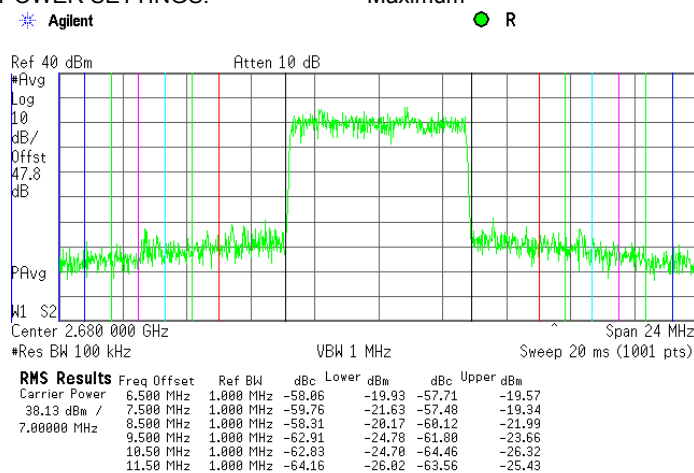

Test specification:	Section 27.53(m)(2), Conducted spurious emissions at the band edges		
Test procedure:	Section 27.53(m)(2)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			


Plot 7.3.43 Emission mask test results at low carrier frequency, 10 MHz EBW (single output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: QPSK
MODULATING SIGNAL: PRBS
BIT RATE: 13 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

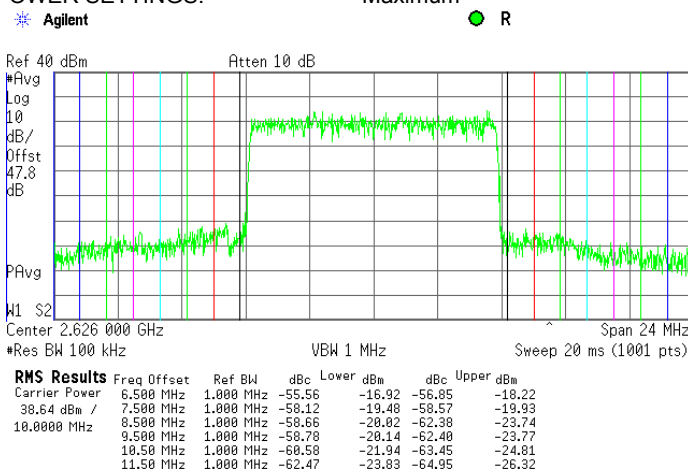

Plot 7.3.44 Emission mask test results at mid carrier frequency, 10 MHz EBW (single output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: QPSK
MODULATING SIGNAL: PRBS
BIT RATE: 13 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

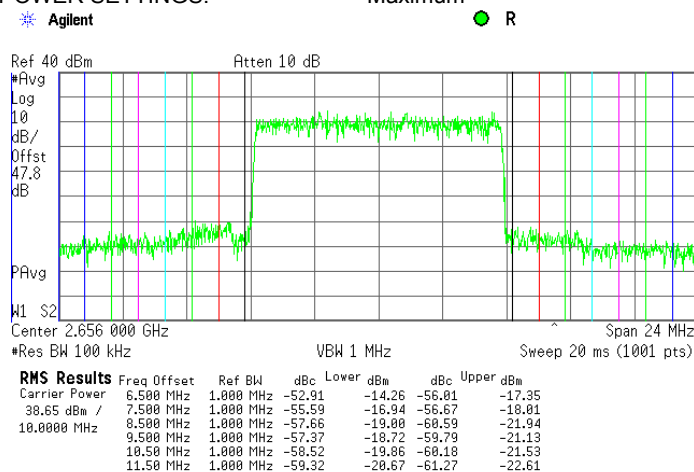

Test specification:	Section 27.53(m)(2), Conducted spurious emissions at the band edges		
Test procedure:	Section 27.53(m)(2)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			


Plot 7.3.45 Emission mask test results at high carrier frequency, 10 MHz EBW (single output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: QPSK
MODULATING SIGNAL: PRBS
BIT RATE: 13 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

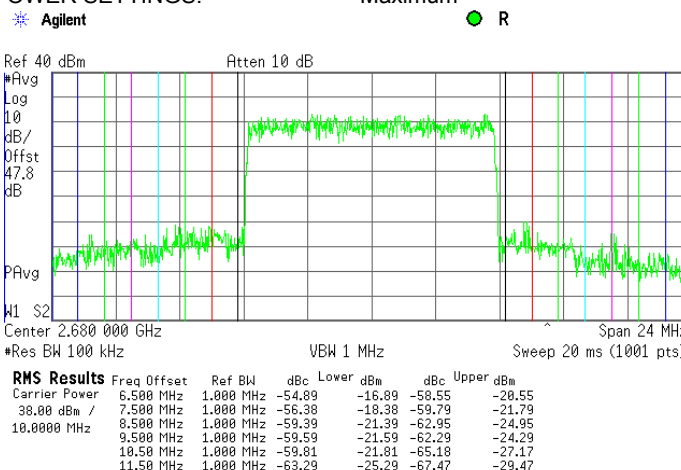

Plot 7.3.46 Emission mask test results at low carrier frequency, 10 MHz EBW (single output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 46 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

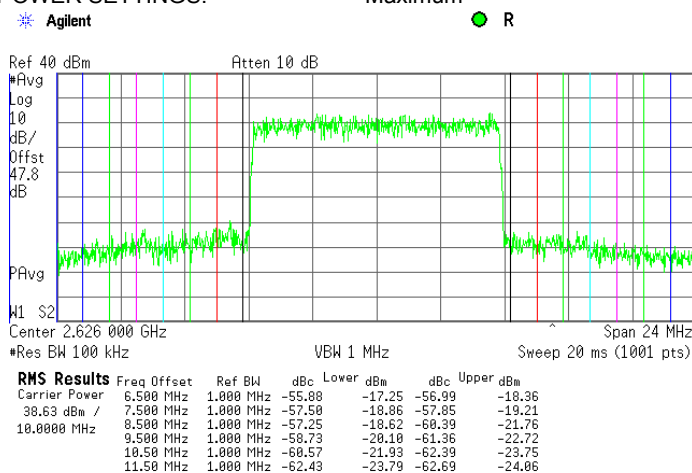

Test specification:	Section 27.53(m)(2), Conducted spurious emissions at the band edges		
Test procedure:	Section 27.53(m)(2)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			


Plot 7.3.47 Emission mask test results at mid carrier frequency, 10 MHz EBW (single output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 46 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

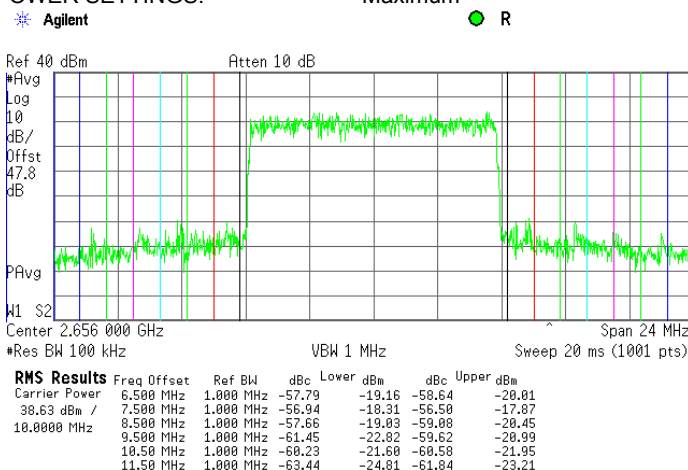

Plot 7.3.48 Emission mask test results at high carrier frequency, 10 MHz EBW (single output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 46 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

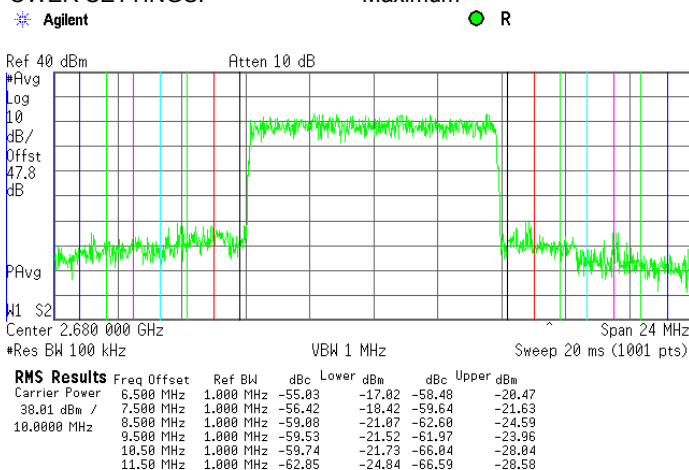

Test specification:		Section 27.53(m)(2), Radiated spurious emissions	
Test procedure:		Section 27.53(m)(2)	
Test mode:		Compliance	Verdict: PASS
Date:		12/5/2010	
Temperature: 23.7 °C	Air Pressure: 1015 hPa	Relative Humidity: 36 %	Power Supply: 448VDC
Remarks:			

7.4 Radiated spurious emission measurements

7.4.1 General

This test was performed to measure radiated spurious emissions from the EUT. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Radiated spurious emission test limits

Frequency, MHz	Attenuation below carrier, dBc	ERP of spurious, dBm	Equivalent field strength limit @ 3m, dB(μV/m)***
0.009 – 10 th harmonic*	43+10logP**	-13	84.4

* - Excluding the in band emission within ± 250 % of the authorized bandwidth from the carrier

** - P is transmitter output power in Watts

*** - Equivalent field strength limit was calculated from maximum allowed ERP of spurious as follows:
 $E = \sqrt{30 \times P \times 1.64} / r$, where P is ERP in Watts, 1.64 is numeric gain of ideal dipole and r is antenna to EUT distance in meters

7.4.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized and the performance check was conducted.

7.4.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.4.2.3 The worst test results (the lowest margins) were recorded in Table 7.4.2 and shown in the associated plots.

7.4.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.4.3.1 The EUT was set up as shown in Figure 7.4.2, energized and the performance check was conducted.

7.4.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept from 1 to 4 m in both, vertical and horizontal, polarizations.

7.4.3.3 The worst test results (the lowest margins) were recorded in Table 7.4.2 and shown in the associated plots.

Test specification: Section 27.53(m)(2), Radiated spurious emissions			
Test procedure: Section 27.53(m)(2)			
Test mode: Compliance		Verdict: PASS	
Date: 12/5/2010			
Temperature: 23.7 °C	Air Pressure: 1015 hPa	Relative Humidity: 36 %	Power Supply: 448VDC
Remarks:			

Figure 7.4.1 Setup for spurious emission field strength measurements in 9 kHz to 30 MHz band


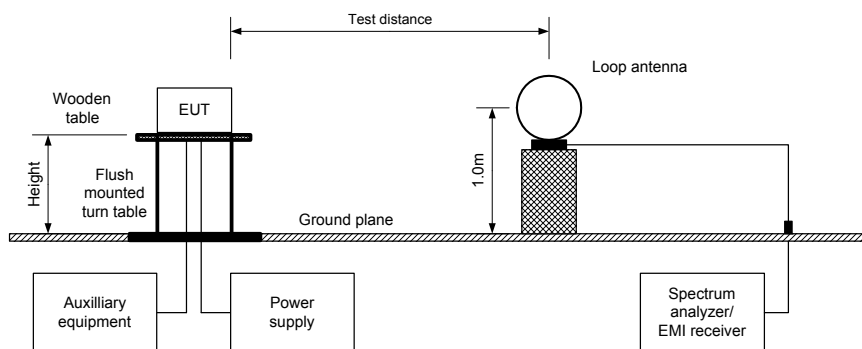


Figure 7.4.2 Setup for spurious emission field strength measurements above 30 MHz

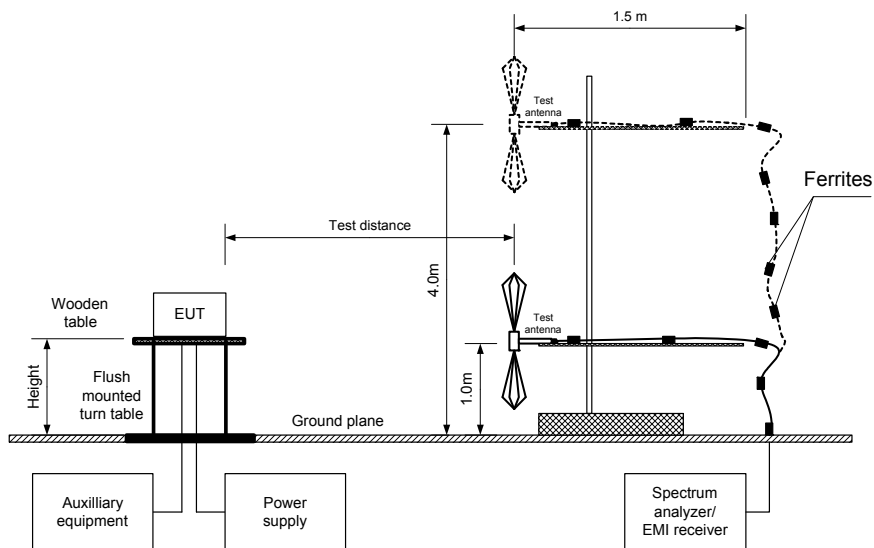

Test specification:		Section 27.53(m)(2), Radiated spurious emissions	
Test procedure:		Section 27.53(m)(2)	
Test mode:	Compliance	Verdict:	PASS
Date:	12/5/2010		
Temperature: 23.7 °C	Air Pressure: 1015 hPa	Relative Humidity: 36 %	Power Supply: 448VDC
Remarks:			

Table 7.4.2 Spurious emission field strength test results

ASSIGNED FREQUENCY RANGE: 2620 - 2690 MHz
 TEST DISTANCE: 3 m
 TEST SITE: Semi anechoic chamber
 EUT HEIGHT: 0.8 m
 INVESTIGATED FREQUENCY RANGE: 0.009 – 27000 MHz
 DETECTOR USED: Peak
 VIDEO BANDWIDTH: > Resolution bandwidth
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)
 Double ridged guide (above 1000 MHz)
 MODULATION: 64QAM
 MODULATING SIGNAL: PRBS
 BIT RATE: 14 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Frequency, MHz	Field strength, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*	RBW, kHz	Antenna polarization	Antenna height, m	Turn-table position**, degrees
Low carrier frequency 2563 MHz							
All spurious were found at least 20 dB below the specified limit							
Mid carrier frequency 2593 MHz							
All spurious were found at least 20 dB below the specified limit							
High carrier frequency 2629 MHz							
All spurious were found at least 20 dB below the specified limit							

*- Margin = Field strength of spurious – calculated field strength limit.

**-. EUT front panel refers to 0 degrees position of turntable.

Reference numbers of test equipment used


HL 0446	HL 0521	HL 0604	HL 0768	HL 1424	HL 1984	HL 2870	HL 2871
HL 3534	HL 3535	HL 3622					

Full description is given in Appendix A.

Test specification:		Section 27.53(m)(2), Radiated spurious emissions	
Test procedure:		Section 27.53(m)(2)	
Test mode:		Compliance	Verdict: PASS
Date:		12/5/2010	
Temperature: 23.7 °C	Air Pressure: 1015 hPa	Relative Humidity: 36 %	Power Supply: 448VDC
Remarks:			


Plot 7.4.1 Radiated emission measurements in 9 - 150 kHz range

TEST SITE: Semi anechoic chamber
CARRIER FREQUENCY: Low
ANTENNA POLARIZATION: Vertical and Horizontal
TEST DISTANCE: 3 m

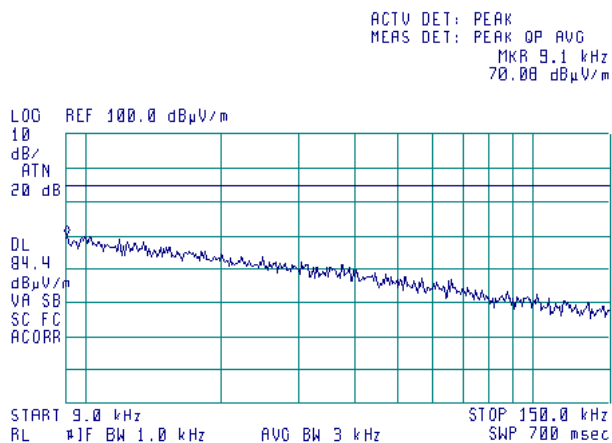

Plot 7.4.2 Radiated emission measurements in 9 - 150 kHz range

TEST SITE: Semi anechoic chamber
CARRIER FREQUENCY: Mid
ANTENNA POLARIZATION: Vertical and Horizontal
TEST DISTANCE: 3 m

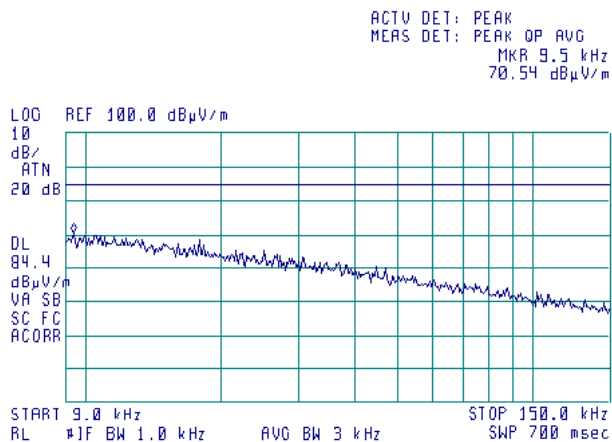


Test specification:		Section 27.53(m)(2), Radiated spurious emissions	
Test procedure:		Section 27.53(m)(2)	
Test mode:		Compliance	Verdict: PASS
Date:		12/5/2010	
Temperature: 23.7 °C	Air Pressure: 1015 hPa	Relative Humidity: 36 %	Power Supply: 448VDC
Remarks:			

Plot 7.4.3 Radiated emission measurements in 9 - 150 kHz range

TEST SITE: Semi anechoic chamber
CARRIER FREQUENCY: High
ANTENNA POLARIZATION: Vertical and Horizontal
TEST DISTANCE: 3 m



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 10.5 kHz
70.71 dBμV/m

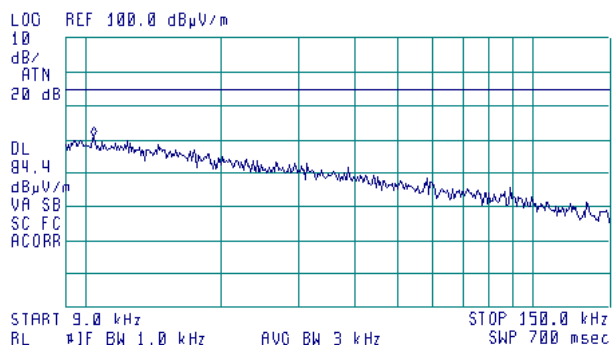


Plot 7.4.4 Radiated emission measurements in 0.15 - 30 MHz range

TEST SITE: Semi anechoic chamber
CARRIER FREQUENCY: Low
ANTENNA POLARIZATION: Vertical and Horizontal
TEST DISTANCE: 3 m



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 190 kHz
59.07 dBμV/m

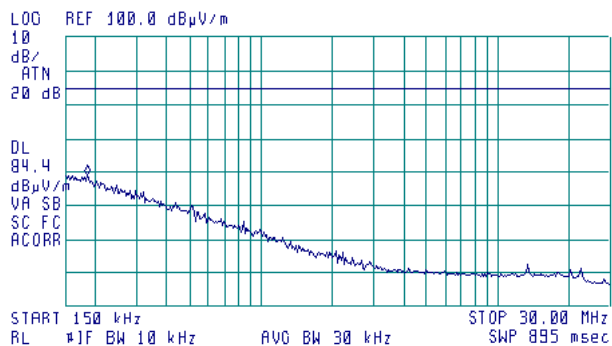


Test specification:		Section 27.53(m)(2), Radiated spurious emissions	
Test procedure:		Section 27.53(m)(2)	
Test mode:		Compliance	Verdict: PASS
Date:		12/5/2010	
Temperature: 23.7 °C	Air Pressure: 1015 hPa	Relative Humidity: 36 %	Power Supply: 448VDC
Remarks:			

Plot 7.4.5 Radiated emission measurements in 0.15 - 30 MHz range

TEST SITE: Semi anechoic chamber
CARRIER FREQUENCY: Mid
ANTENNA POLARIZATION: Vertical and Horizontal
TEST DISTANCE: 3 m



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 170 kHz
58.78 dBμV/m

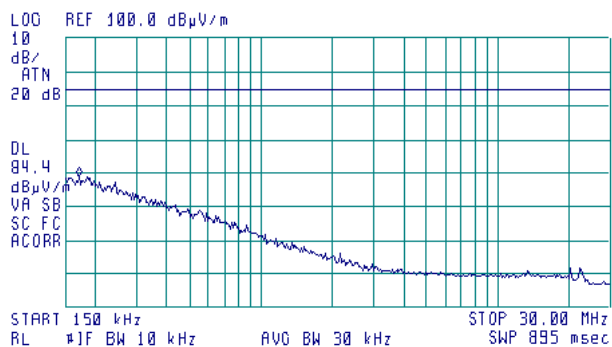


Plot 7.4.6 Radiated emission measurements in 0.15 - 30 MHz range

TEST SITE: Semi anechoic chamber
CARRIER FREQUENCY: High
ANTENNA POLARIZATION: Vertical and Horizontal
TEST DISTANCE: 3 m



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 150 kHz
59.43 dBμV/m

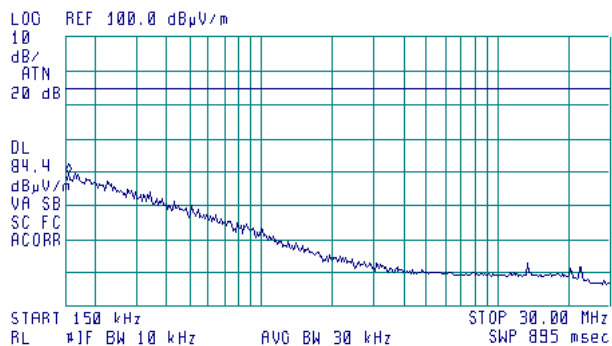


Test specification:		Section 27.53(m)(2), Radiated spurious emissions	
Test procedure:		Section 27.53(m)(2)	
Test mode:		Compliance	Verdict: PASS
Date:		12/5/2010	
Temperature: 23.7 °C	Air Pressure: 1015 hPa	Relative Humidity: 36 %	Power Supply: 448VDC
Remarks:			

Plot 7.4.7 Radiated emission measurements in 30 - 1000 MHz range

TEST SITE: Semi anechoic chamber
CARRIER FREQUENCY: Low
ANTENNA POLARIZATION: Vertical and Horizontal
TEST DISTANCE: 3 m



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 980.9 MHz
54.82 dBμV/m

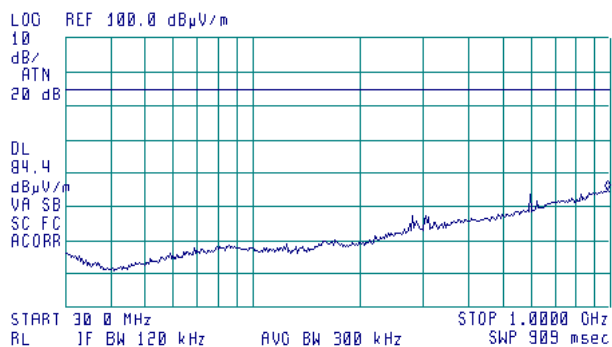


Plot 7.4.8 Radiated emission measurements in 30 - 1000 MHz range

TEST SITE: Semi anechoic chamber
CARRIER FREQUENCY: Mid
ANTENNA POLARIZATION: Vertical and Horizontal
TEST DISTANCE: 3 m




ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 971.4 MHz
54.72 dBμV/m

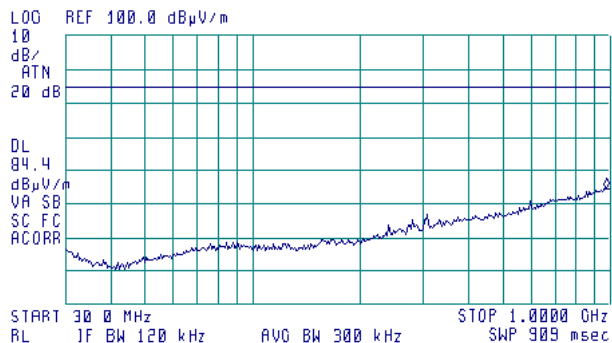

Test specification:		Section 27.53(m)(2), Radiated spurious emissions	
Test procedure:		Section 27.53(m)(2)	
Test mode:		Compliance	Verdict: PASS
Date:		12/5/2010	
Temperature: 23.7 °C	Air Pressure: 1015 hPa	Relative Humidity: 36 %	Power Supply: 448VDC
Remarks:			


Plot 7.4.9 Radiated emission measurements in 30 - 1000 MHz range

TEST SITE: Semi anechoic chamber
CARRIER FREQUENCY: High
ANTENNA POLARIZATION: Vertical and Horizontal
TEST DISTANCE: 3 m

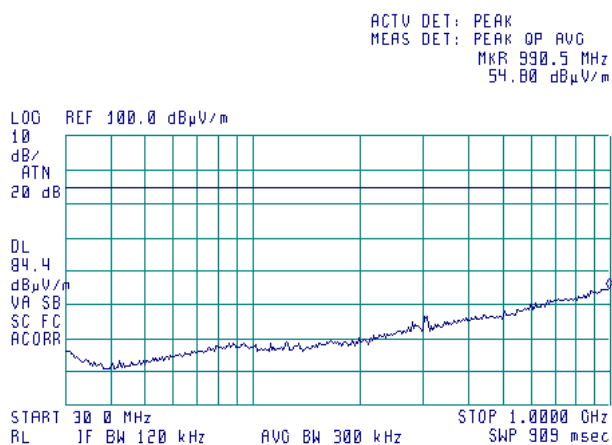

Plot 7.4.10 Radiated emission measurements in 1000 – 6000 MHz range


TEST SITE: Semi anechoic chamber
CARRIER FREQUENCY: Low
ANTENNA POLARIZATION: Vertical and Horizontal
TEST DISTANCE: 3 m

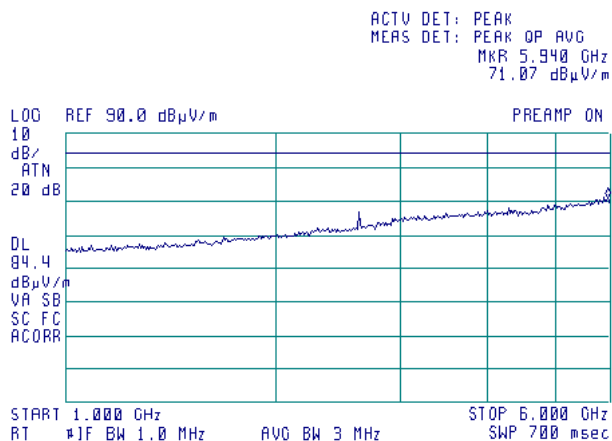

Test specification:		Section 27.53(m)(2), Radiated spurious emissions	
Test procedure:		Section 27.53(m)(2)	
Test mode:		Compliance	Verdict: PASS
Date:		12/5/2010	
Temperature: 23.7 °C	Air Pressure: 1015 hPa	Relative Humidity: 36 %	Power Supply: 448VDC
Remarks:			


Plot 7.4.11 Radiated emission measurements in 1000 – 6000 MHz range

TEST SITE: Semi anechoic chamber
CARRIER FREQUENCY: Mid
ANTENNA POLARIZATION: Vertical and Horizontal
TEST DISTANCE: 3 m

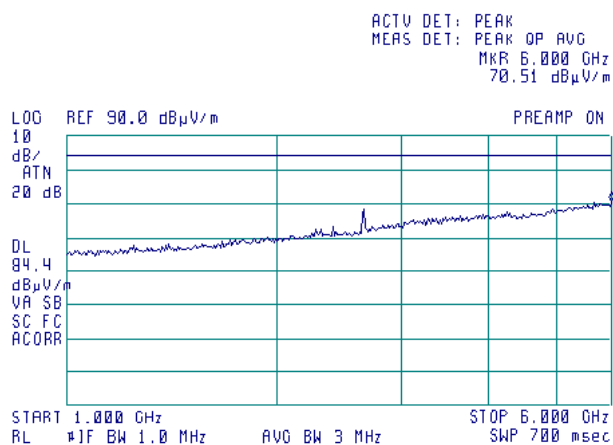

Plot 7.4.12 Radiated emission measurements in 1000 – 6000 MHz range


TEST SITE: Semi anechoic chamber
CARRIER FREQUENCY: High
ANTENNA POLARIZATION: Vertical and Horizontal
TEST DISTANCE: 3 m

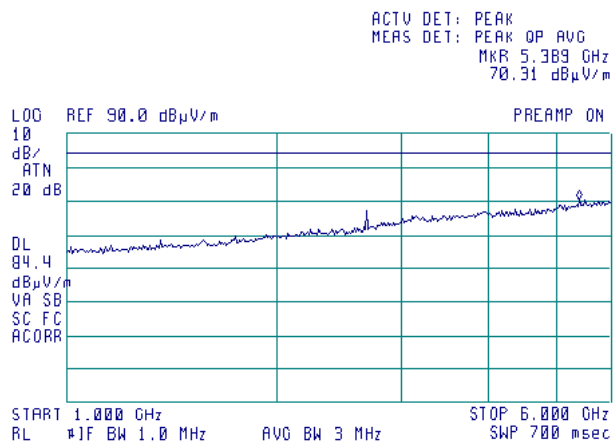

Test specification:		Section 27.53(m)(2), Radiated spurious emissions	
Test procedure:		Section 27.53(m)(2)	
Test mode:		Compliance	Verdict: PASS
Date:		12/5/2010	
Temperature: 23.7 °C	Air Pressure: 1015 hPa	Relative Humidity: 36 %	Power Supply: 448VDC
Remarks:			


Plot 7.4.13 Radiated emission measurements in 6000 – 18000 MHz range

TEST SITE: Semi anechoic chamber
CARRIER FREQUENCY: Low
ANTENNA POLARIZATION: Vertical and Horizontal
TEST DISTANCE: 3 m

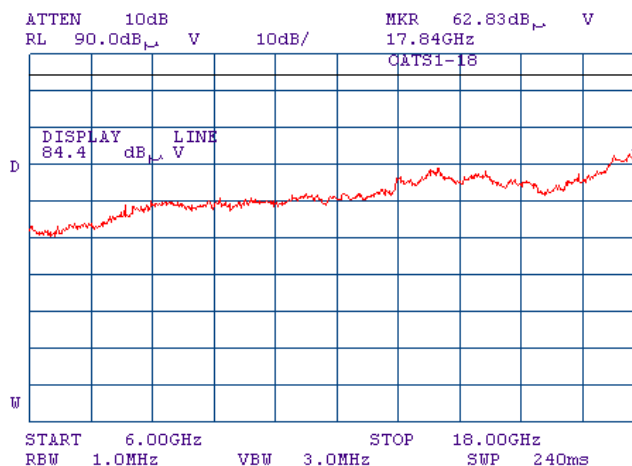

Plot 7.4.14 Radiated emission measurements in 6000 – 18000 MHz range


TEST SITE: Semi anechoic chamber
CARRIER FREQUENCY: Mid
ANTENNA POLARIZATION: Vertical and Horizontal
TEST DISTANCE: 3 m

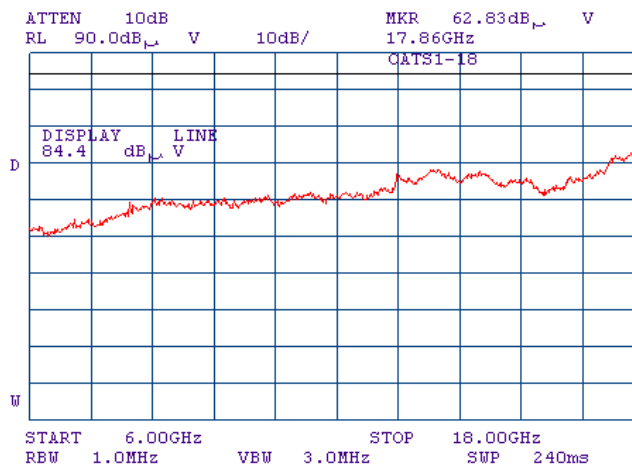

Test specification:		Section 27.53(m)(2), Radiated spurious emissions	
Test procedure:		Section 27.53(m)(2)	
Test mode:		Compliance	Verdict: PASS
Date:		12/5/2010	
Temperature: 23.7 °C	Air Pressure: 1015 hPa	Relative Humidity: 36 %	Power Supply: 448VDC
Remarks:			


Plot 7.4.15 Radiated emission measurements in 6000 – 18000 MHz range

TEST SITE: Semi anechoic chamber
CARRIER FREQUENCY: High
ANTENNA POLARIZATION: Vertical and Horizontal
TEST DISTANCE: 3 m

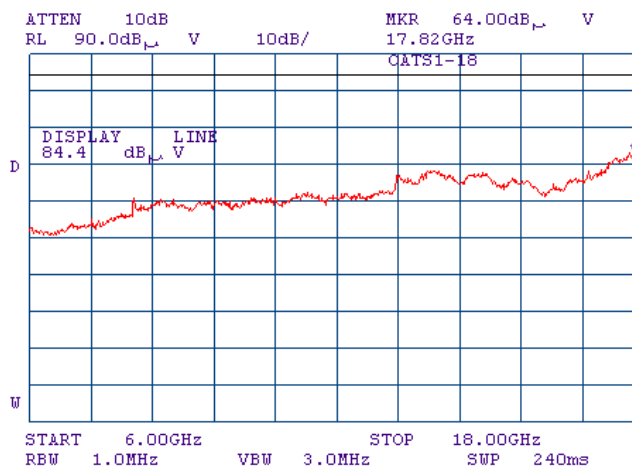

Plot 7.4.16 Radiated emission measurements in 18000 – 26500 MHz range


TEST SITE: OATS
CARRIER FREQUENCY: Low
ANTENNA POLARIZATION: Vertical and Horizontal
TEST DISTANCE: 3 m

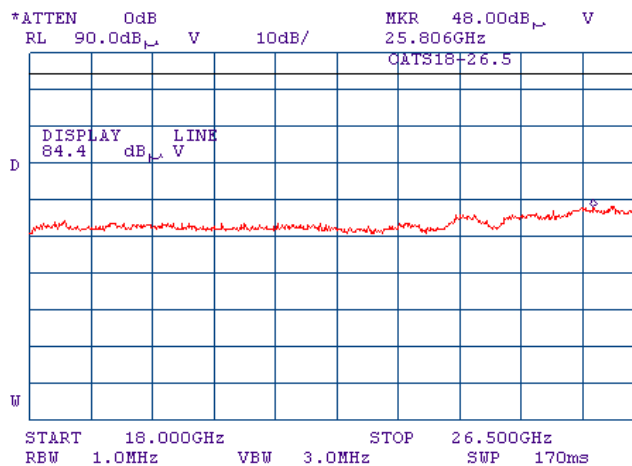

Test specification:		Section 27.53(m)(2), Radiated spurious emissions	
Test procedure:		Section 27.53(m)(2)	
Test mode:		Compliance	Verdict: PASS
Date:		12/5/2010	
Temperature: 23.7 °C	Air Pressure: 1015 hPa	Relative Humidity: 36 %	Power Supply: 448VDC
Remarks:			


Plot 7.4.17 Radiated emission measurements in 18000 – 26500 MHz range

TEST SITE: OATS
CARRIER FREQUENCY: Mid
ANTENNA POLARIZATION: Vertical and Horizontal
TEST DISTANCE: 3 m

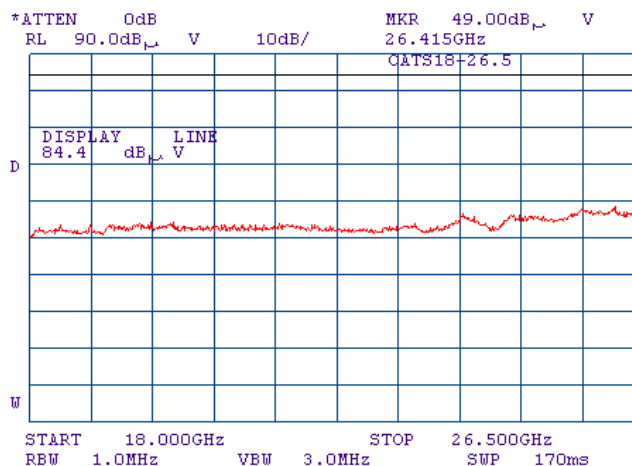

Plot 7.4.18 Radiated emission measurements in 18000 – 26500 MHz range


TEST SITE: OATS
CARRIER FREQUENCY: High
ANTENNA POLARIZATION: Vertical and Horizontal
TEST DISTANCE: 3 m

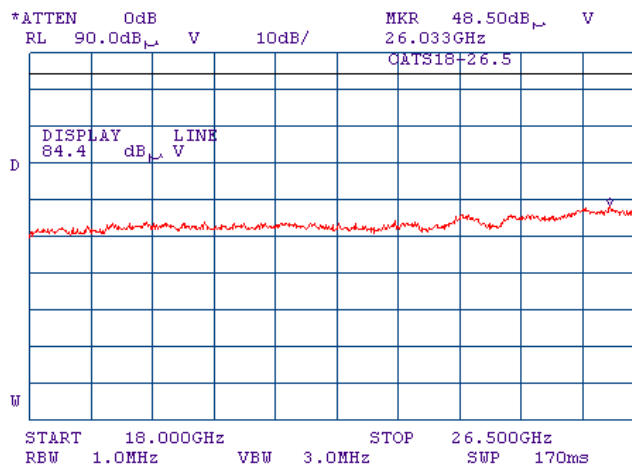

Test specification:		Section 27.53(m)(2), Radiated spurious emissions	
Test procedure:		Section 27.53(m)(2)	
Test mode:		Compliance	Verdict: PASS
Date:		12/5/2010	
Temperature: 23.7 °C	Air Pressure: 1015 hPa	Relative Humidity: 36 %	Power Supply: 448VDC
Remarks:			

Plot 7.4.19 Radiated emission measurements in 26500 – 27000 MHz range


TEST SITE: OATS
CARRIER FREQUENCY: Low
ANTENNA POLARIZATION: Vertical and Horizontal
TEST DISTANCE: 3 m

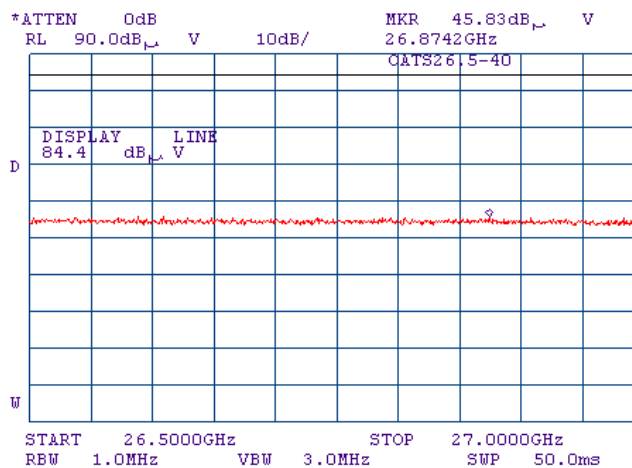

Test specification:		Section 27.53(m)(2), Radiated spurious emissions	
Test procedure:		Section 27.53(m)(2)	
Test mode:		Compliance	Verdict: PASS
Date:		12/5/2010	
Temperature: 23.7 °C	Air Pressure: 1015 hPa	Relative Humidity: 36 %	Power Supply: 448VDC
Remarks:			


Plot 7.4.20 Radiated emission measurements in 26500 – 27000 MHz range

TEST SITE: OATS
CARRIER FREQUENCY: Mid
ANTENNA POLARIZATION: Vertical and Horizontal
TEST DISTANCE: 3 m

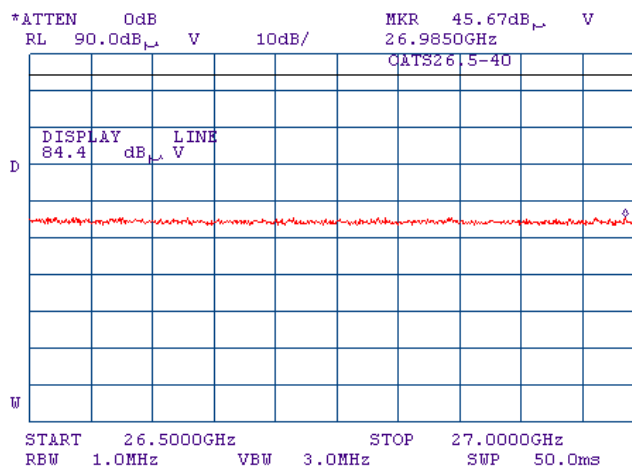

Plot 7.4.21 Radiated emission measurements in 26500 – 27000 MHz range

TEST SITE: OATS
CARRIER FREQUENCY: High
ANTENNA POLARIZATION: Vertical and Horizontal
TEST DISTANCE: 3 m

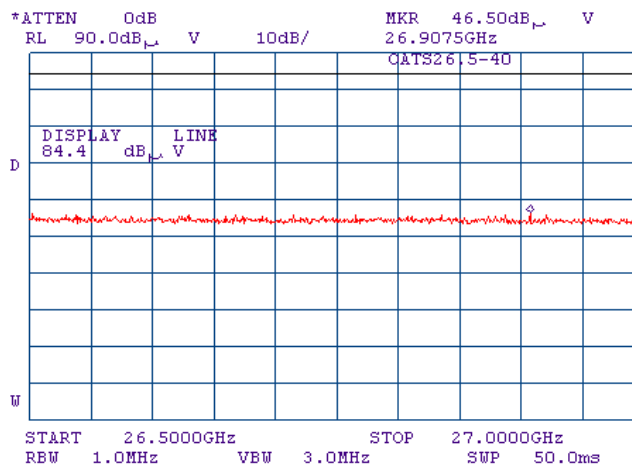

Test specification:		Section 27.53(m)(2), Conducted spurious emissions	
Test procedure:		Section 27.53(m)(2)	
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

7.5 Spurious emissions at RF antenna connector test

7.5.1 General

This test was performed to measure spurious emissions at RF antenna connector. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Spurious emission limits

Frequency, MHz	Attenuation below carrier, dBc	ERP of spurious, dBm
0.009 – 10th harmonic*	$43 + 10\log P^*$	-13.0

* - P is transmitter output power in Watts

7.5.2 Test procedure

7.5.2.1 The EUT was set up as shown in Figure 7.5.1 or Figure 7.5.2, energized and its proper operation was checked.

7.5.2.2 The EUT was adjusted to produce maximum available for end user RF output power.

7.5.2.3 The spurious emission was measured with spectrum analyzer as provided in Table 7.5.2 and the associated plots.

Figure 7.5.1 Spurious emission test setup, single output





Figure 7.5.2 Spurious emission test setup, combined output



Test specification:	Section 27.53(m)(2), Conducted spurious emissions		
Test procedure:	Section 27.53(m)(2)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Table 7.5.2 Spurious emission test results

ASSIGNED FREQUENCY RANGE: 2620 - 2690 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 – 27000 MHz
 DETECTOR USED: Peak
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 MODULATION: 64QAM
 MODULATING SIGNAL: PRBS
 BIT RATE: 14 Mbps
 TRANSMITTER OUTPUT POWER: Maximum

Frequency, MHz	SA reading, dBm	Attenuator, dB	Cable loss, dB	RBW, kHz	Spurious emission, dBm	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
Low carrier frequency									
All spurious were found at least 20 dB below the specified limit									Pass
Mid carrier frequency									
All spurious were found at least 20 dB below the specified limit									Pass
High carrier frequency									
All spurious were found at least 20 dB below the specified limit									Pass

*- Margin = Spurious emission – specification limit.


Reference numbers of test equipment used

HL 0446	HL 0521	HL 0604	HL 0768	HL 1424	HL 1984	HL 2870	HL 2871
HL 3534	HL 3535	HL 3622					


Full description is given in Appendix A.

Test specification:	Section 27.53(m)(2), Conducted spurious emissions		
Test procedure:	Section 27.53(m)(2)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.5.1 Spurious emission measurements in 9 - 150 kHz range at low carrier frequency, single output

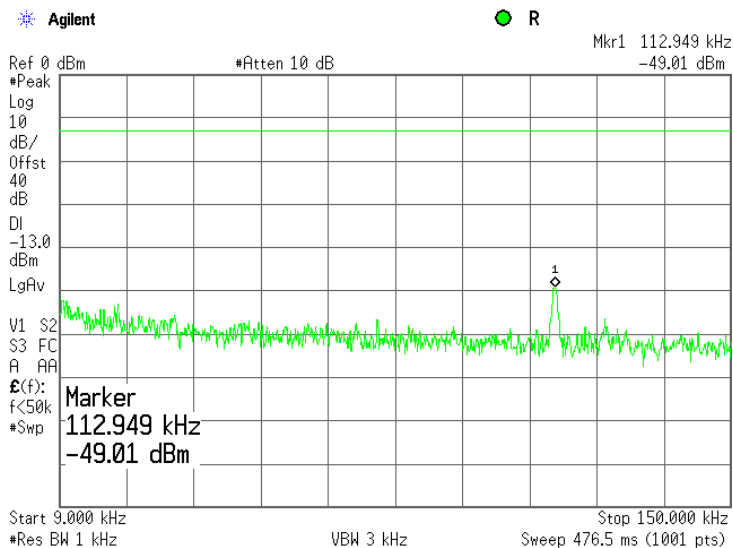


Plot 7.5.2 Spurious emission measurements in 9 - 150 kHz range at mid carrier frequency, single output

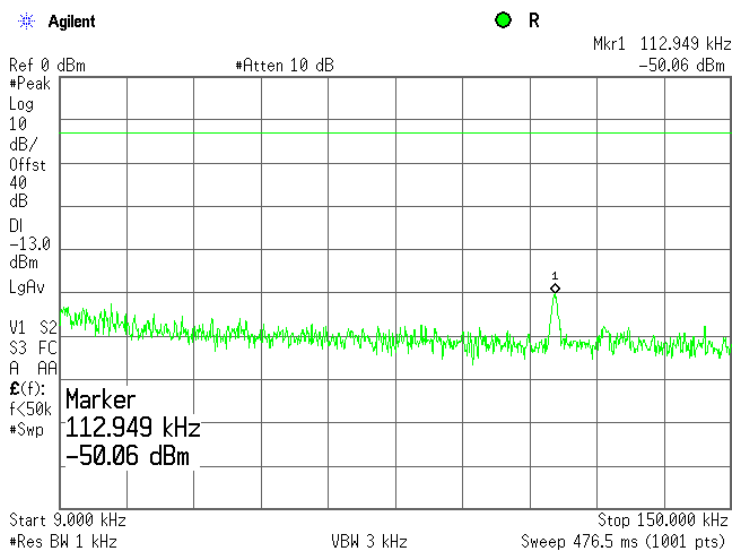


Test specification:		Section 27.53(m)(2), Conducted spurious emissions	
Test procedure:		Section 27.53(m)(2)	
Test mode:		Compliance	Verdict: PASS
Date:		12/2/2010	
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.5.3 Spurious emission measurements in 9 - 150 kHz range at high carrier frequency, single output

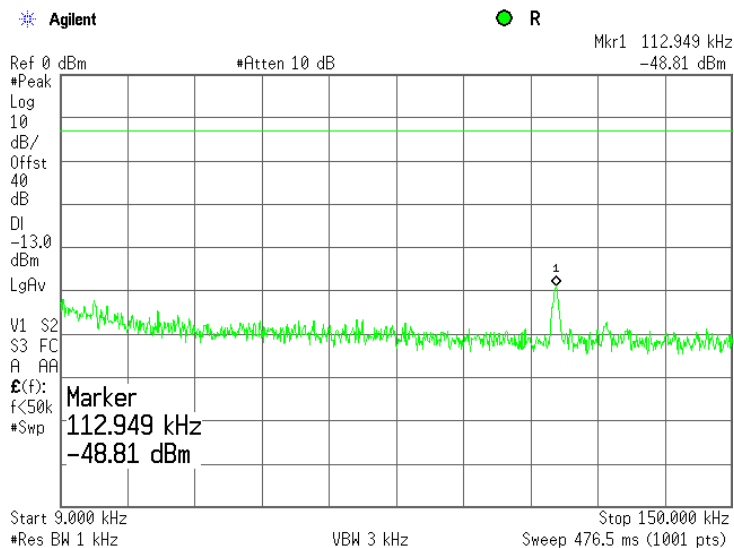


Plot 7.5.4 Spurious emission measurements in 0.15 - 30.0 MHz range at low carrier frequency, single output

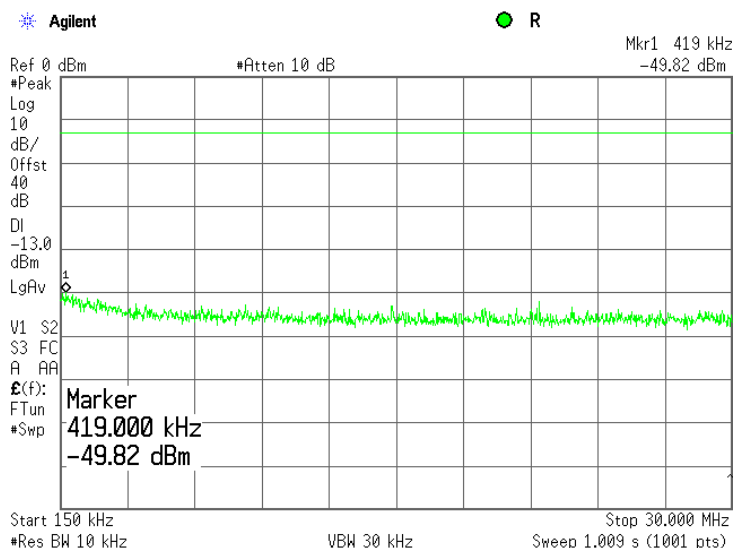


Test specification:		Section 27.53(m)(2), Conducted spurious emissions	
Test procedure:		Section 27.53(m)(2)	
Test mode:		Compliance	Verdict: PASS
Date:		12/2/2010	
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.5.5 Spurious emission measurements in 0.15 - 30.0 MHz range at mid carrier frequency, single output

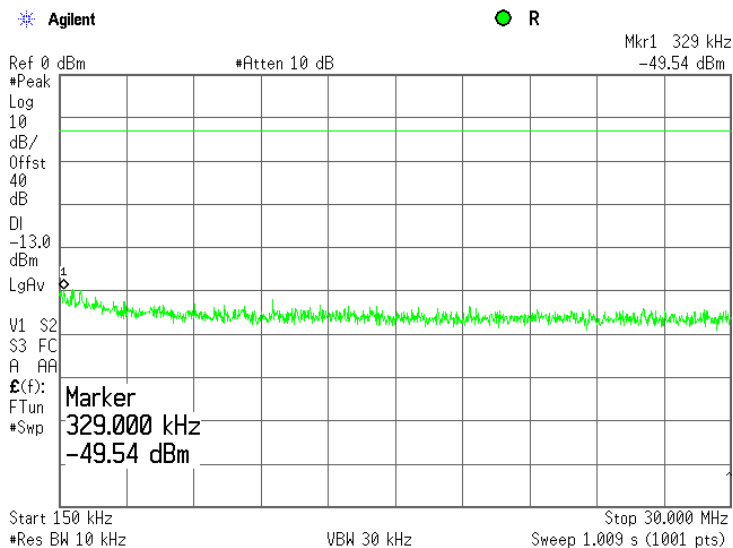


Plot 7.5.6 Spurious emission measurements in 0.15 - 30.0 MHz range at high carrier frequency, single output

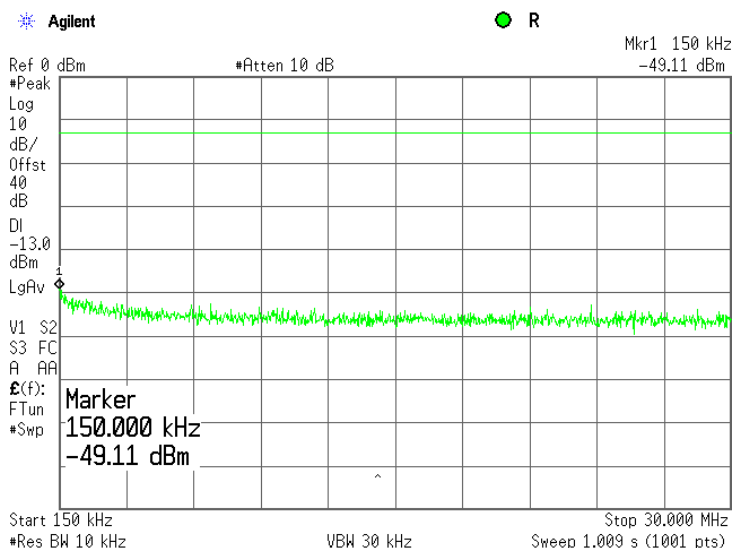


Test specification:	Section 27.53(m)(2), Conducted spurious emissions		
Test procedure:	Section 27.53(m)(2)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.5.7 Spurious emission measurements in 30.0 – 1000.0 MHz range at low carrier frequency, single output

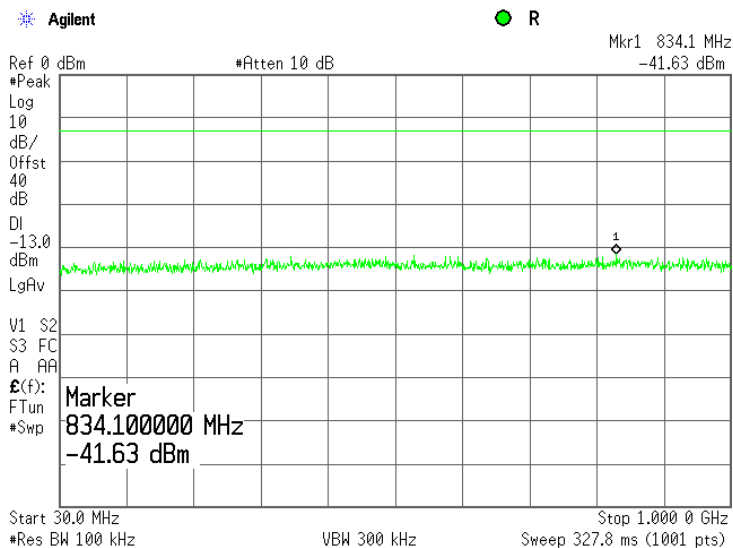


Plot 7.5.8 Spurious emission measurements in 30.0 – 1000.0 MHz range at mid carrier frequency, single output

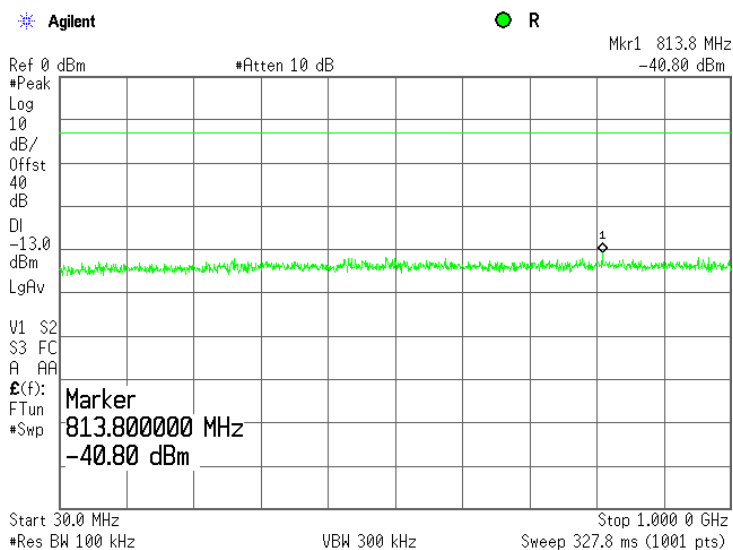


Test specification:		Section 27.53(m)(2), Conducted spurious emissions	
Test procedure:		Section 27.53(m)(2)	
Test mode:		Compliance	Verdict: PASS
Date:		12/2/2010	
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.5.9 Spurious emission measurements in 30.0 – 1000.0 MHz range at high carrier frequency, single output

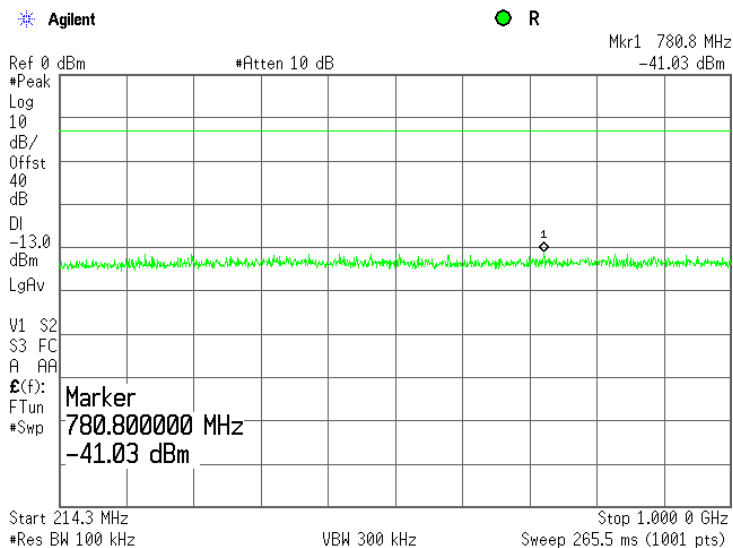


Plot 7.5.10 Spurious emission measurements in 1000.0 – 3000.0 MHz range at low carrier frequency, single output

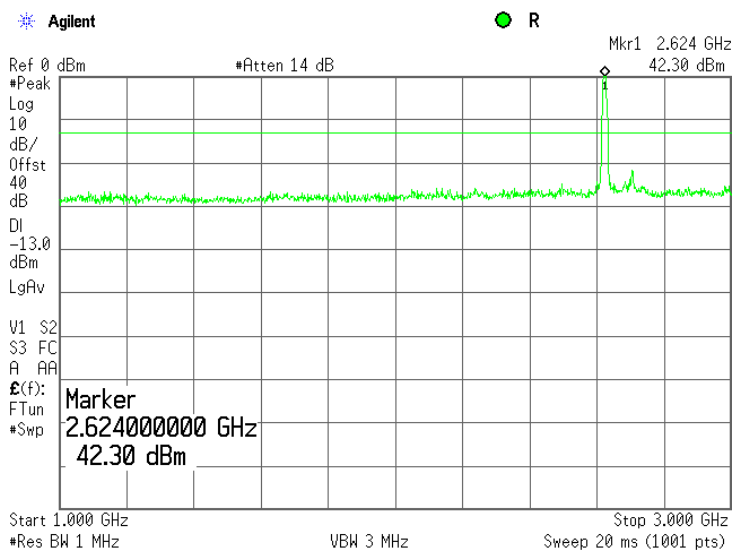


Test specification:		Section 27.53(m)(2), Conducted spurious emissions	
Test procedure:		Section 27.53(m)(2)	
Test mode:		Compliance	Verdict: PASS
Date:		12/2/2010	
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.5.11 Spurious emission measurements in 1000.0 – 3000.0 MHz range at mid carrier frequency, single output

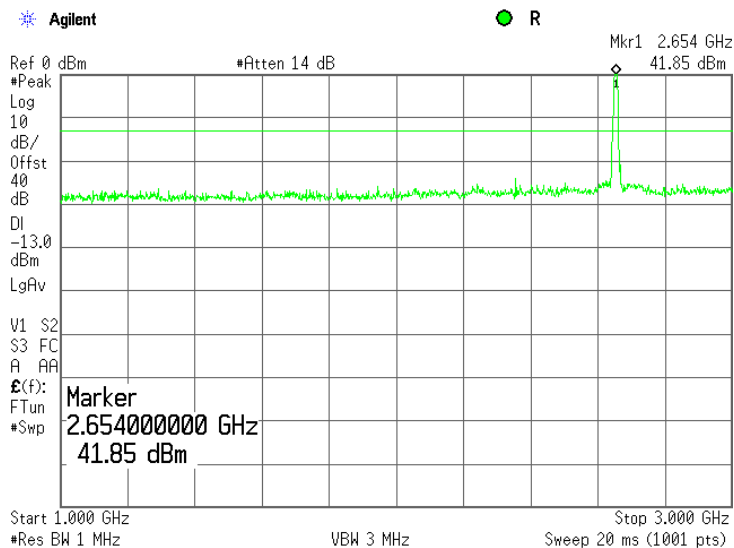


Plot 7.5.12 Spurious emission measurements in 1000.0 – 3000.0 MHz at high carrier frequency, single output

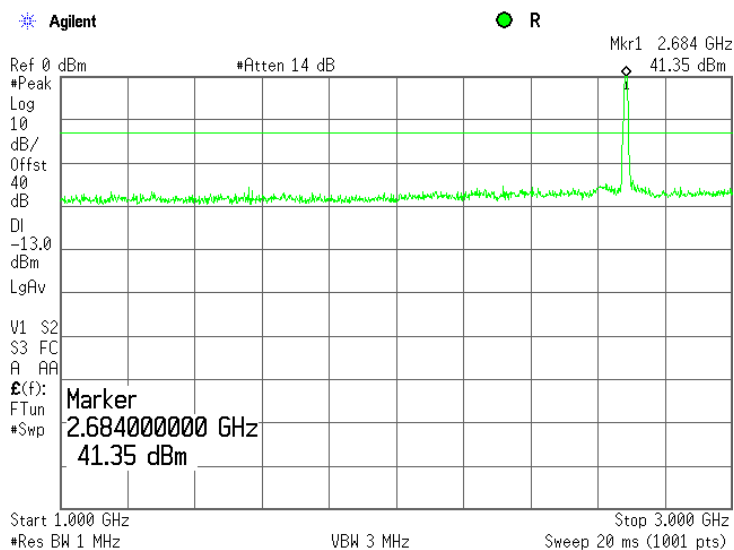


Test specification:		Section 27.53(m)(2), Conducted spurious emissions	
Test procedure:		Section 27.53(m)(2)	
Test mode:		Compliance	Verdict: PASS
Date:		12/2/2010	
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.5.13 Spurious emission measurements in 3000 – 18000 MHz range at low carrier frequency, single output

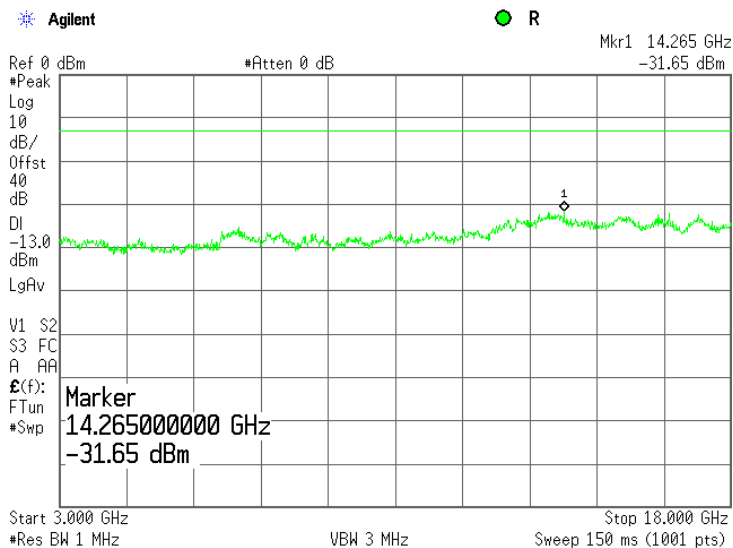


Plot 7.5.14 Spurious emission measurements in 3000 – 18000 MHz range at mid carrier frequency, single output

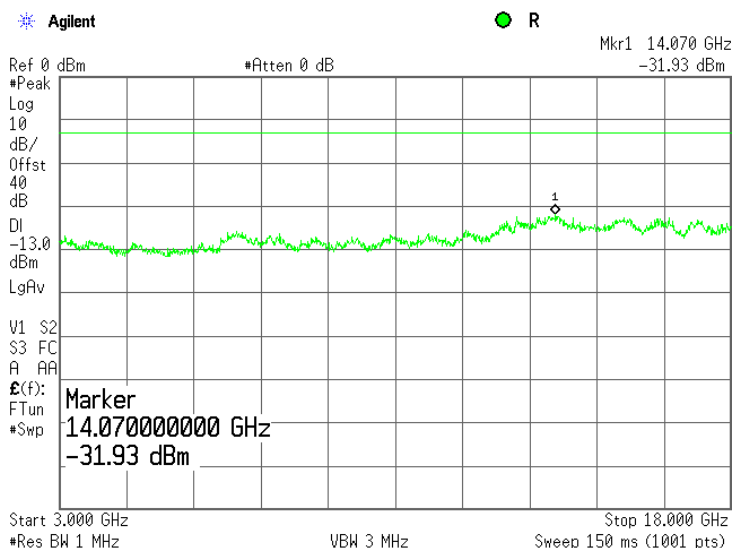


Test specification:		Section 27.53(m)(2), Conducted spurious emissions	
Test procedure:		Section 27.53(m)(2)	
Test mode:		Compliance	Verdict: PASS
Date:		12/2/2010	
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.5.15 Spurious emission measurements in 3000 – 18000 MHz range at high carrier frequency, single output

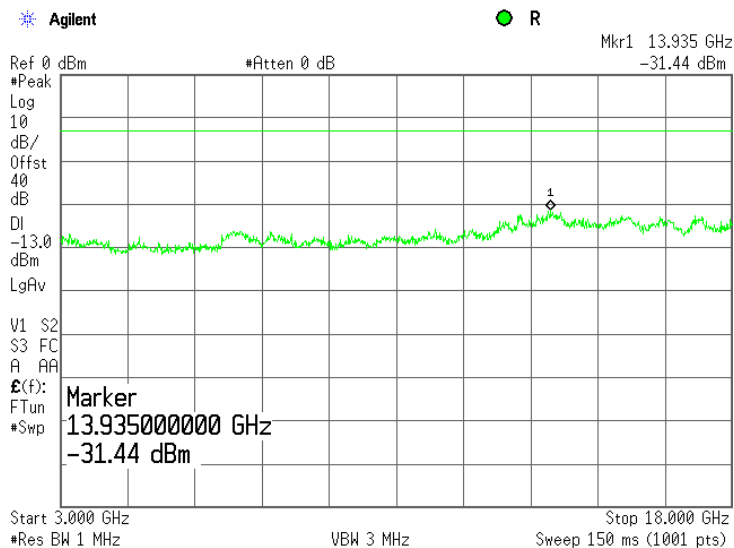


Plot 7.5.16 Spurious emission measurements in 18000 – 25000 MHz range at low carrier frequency, single outputs

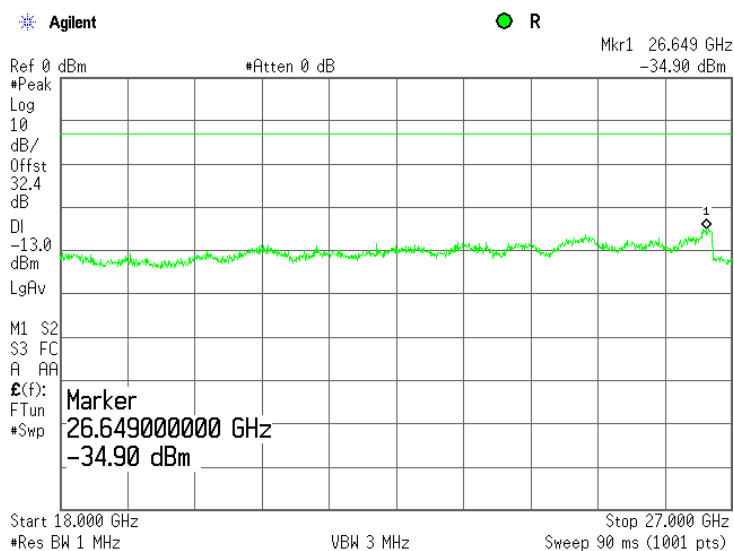


Test specification:	Section 27.53(m)(2), Conducted spurious emissions		
Test procedure:	Section 27.53(m)(2)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.5.17 Spurious emission measurements in 18000 – 25000 MHz range at mid carrier frequency, single outputs

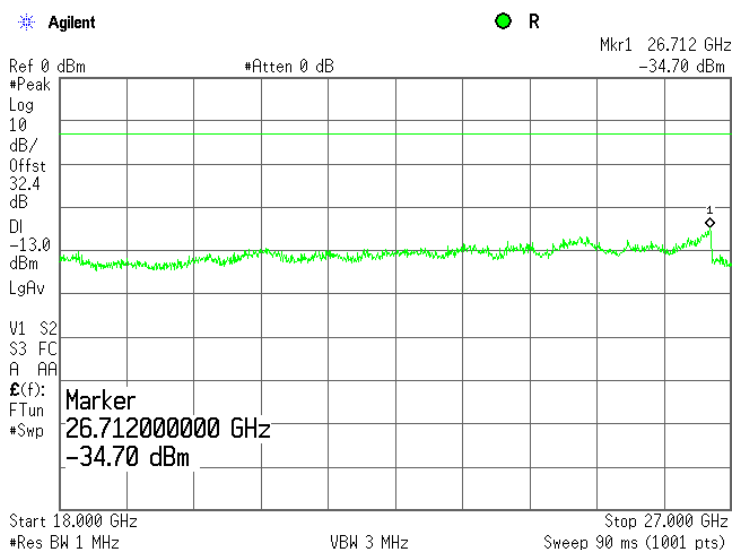


Plot 7.5.18 Spurious emission measurements in 18000 – 25000 MHz range at high carrier frequency, single outputs

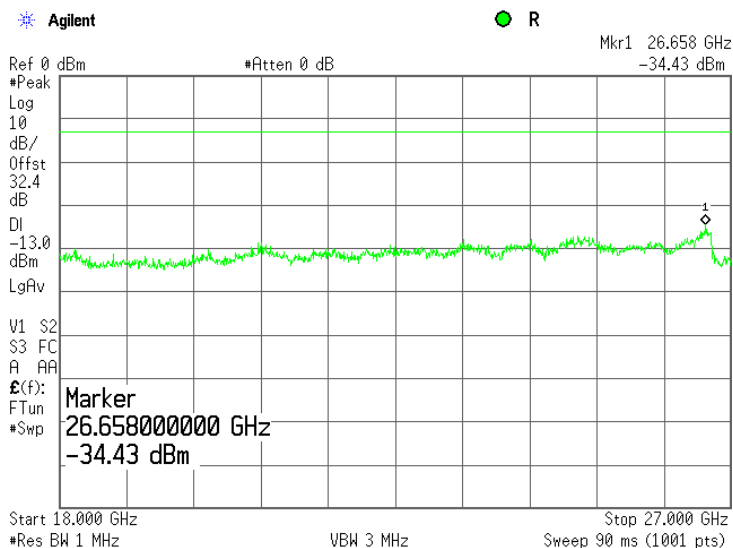


Test specification:		Section 27.53(m)(2), Conducted spurious emissions	
Test procedure:		Section 27.53(m)(2)	
Test mode:		Compliance	Verdict: PASS
Date:		12/2/2010	
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.5.19 Spurious emission measurements in 500.0 – 1000.0 MHz range at low carrier frequency, combined outputs

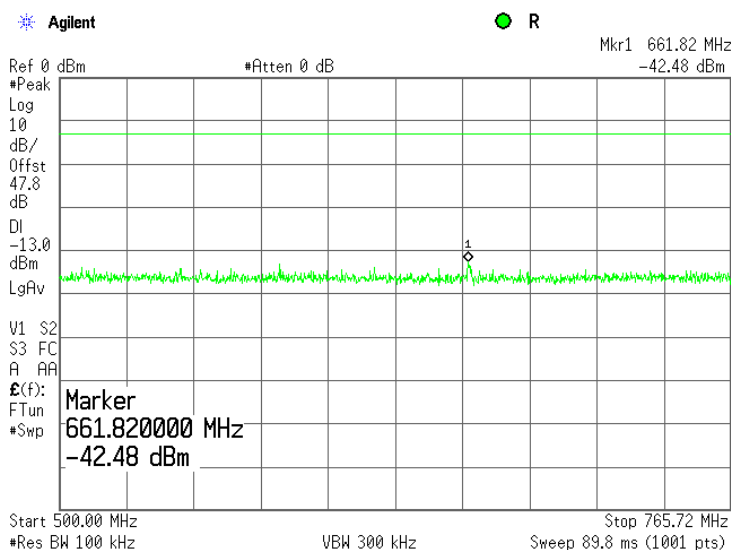


Plot 7.5.20 Spurious emission measurements in 500.0 – 1000.0 MHz range at mid carrier frequency, combined outputs

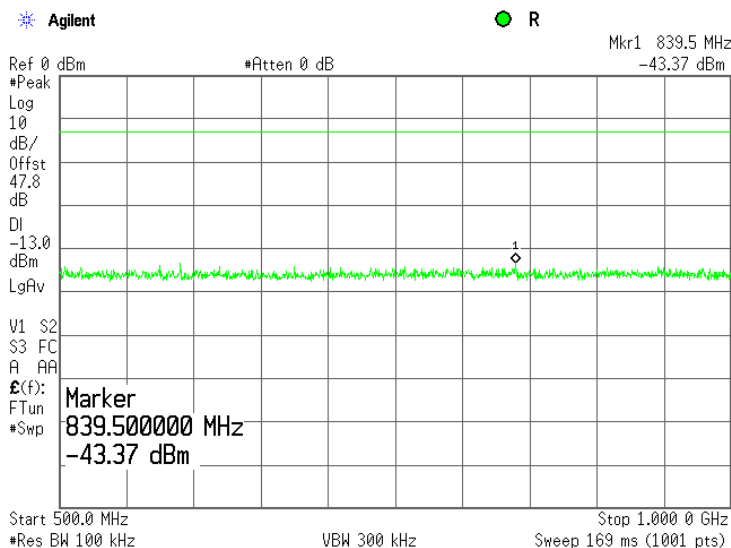


Test specification:	Section 27.53(m)(2), Conducted spurious emissions		
Test procedure:	Section 27.53(m)(2)		
Test mode:	Compliance	Verdict:	PASS
Date:	12/2/2010		
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.5.21 Spurious emission measurements in 500.0 – 1000.0 MHz range at high carrier frequency, combined outputs

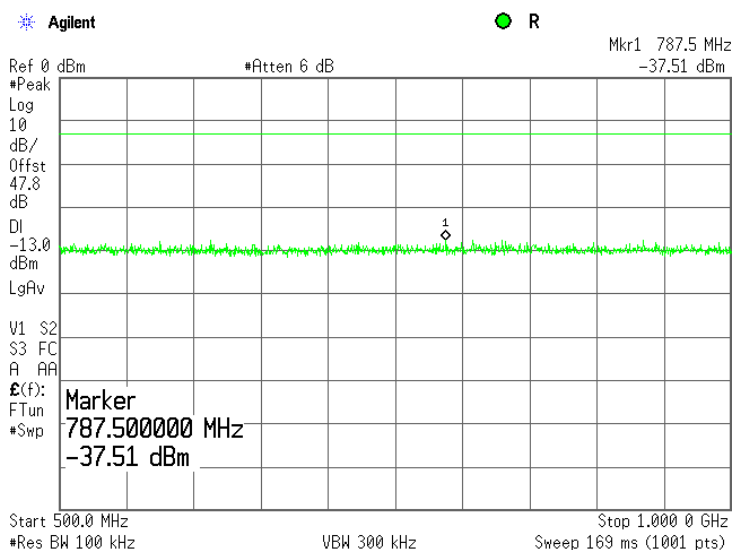


Plot 7.5.22 Spurious emission measurements in 1000.0 – 3000.0 MHz range at low carrier frequency, combined outputs

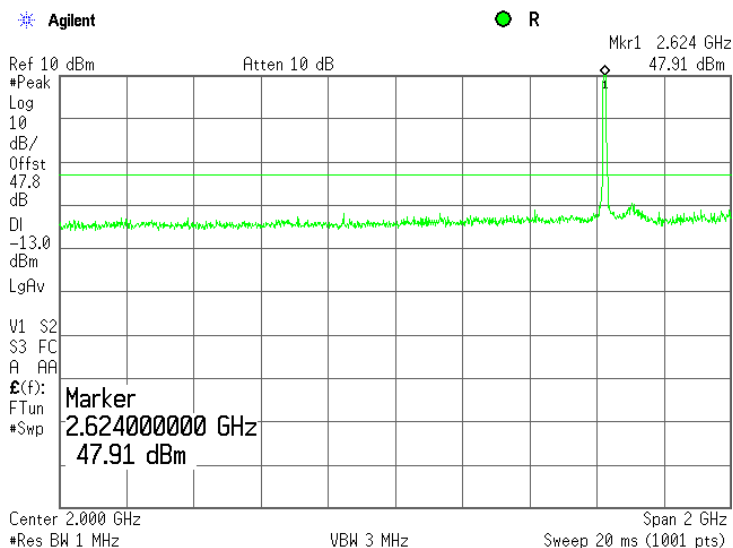


Test specification:		Section 27.53(m)(2), Conducted spurious emissions	
Test procedure:		Section 27.53(m)(2)	
Test mode:		Compliance	Verdict: PASS
Date:		12/2/2010	
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.5.23 Spurious emission measurements in 1000.0 – 3000.0 MHz range at mid carrier frequency, combined outputs

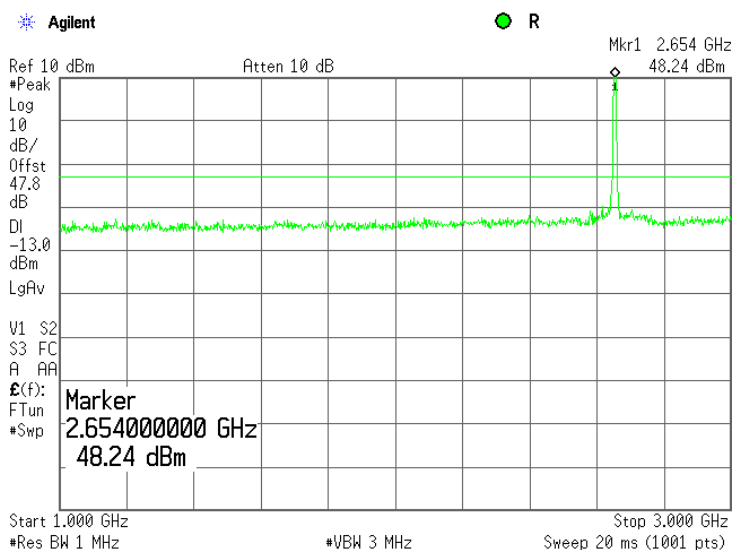


Plot 7.5.24 Spurious emission measurements in 1000.0 – 3000.0 MHz range at high carrier frequency, combined outputs

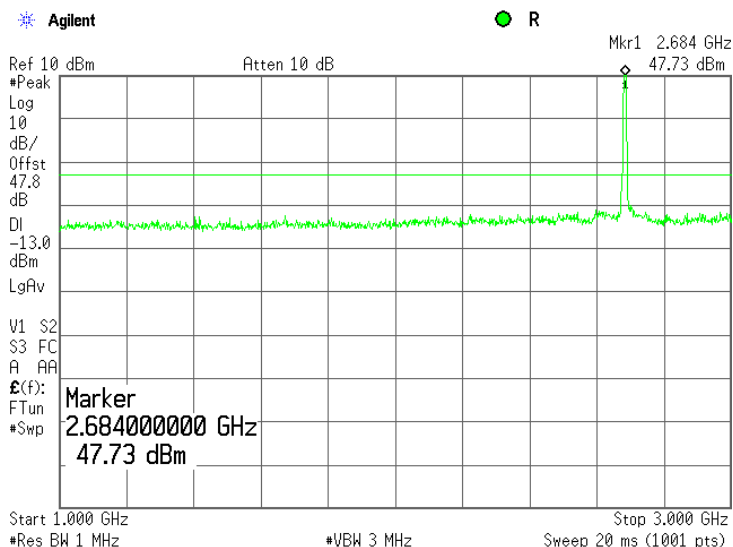


Test specification:		Section 27.53(m)(2), Conducted spurious emissions	
Test procedure:		Section 27.53(m)(2)	
Test mode:		Compliance	Verdict: PASS
Date:		12/2/2010	
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.5.25 Spurious emission measurements in 3000 – 18000 MHz range at low carrier frequency, combined outputs

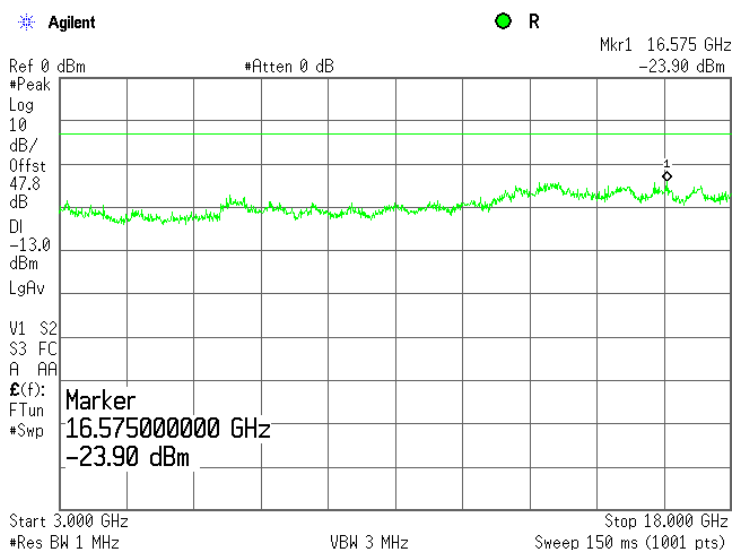


Plot 7.5.26 Spurious emission measurements in 3000 – 18000 MHz range at mid carrier frequency, combined outputs

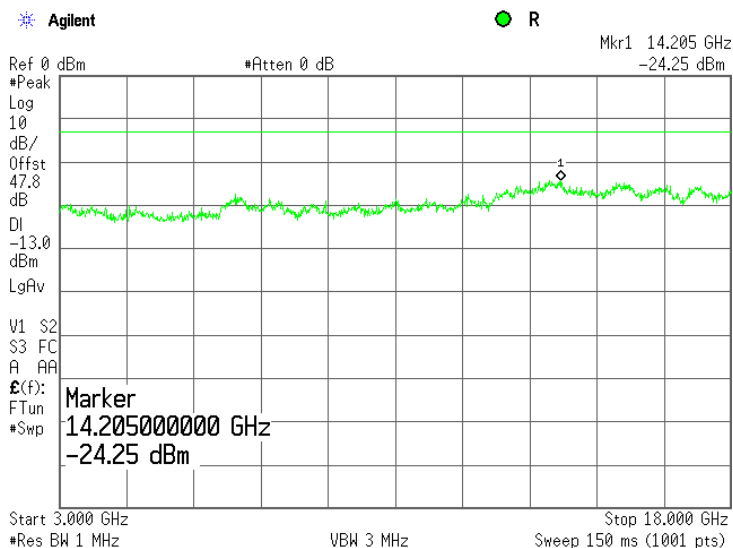

Test specification:		Section 27.53(m)(2), Conducted spurious emissions	
Test procedure:		Section 27.53(m)(2)	
Test mode:		Compliance	Verdict: PASS
Date:		12/2/2010	
Temperature: 23.7 °C	Air Pressure: 1020 hPa	Relative Humidity: 39 %	Power Supply: 48VDC
Remarks:			

Plot 7.5.27 Spurious emission measurements in 3000 – 18000 MHz range at high carrier frequency, combined outputs

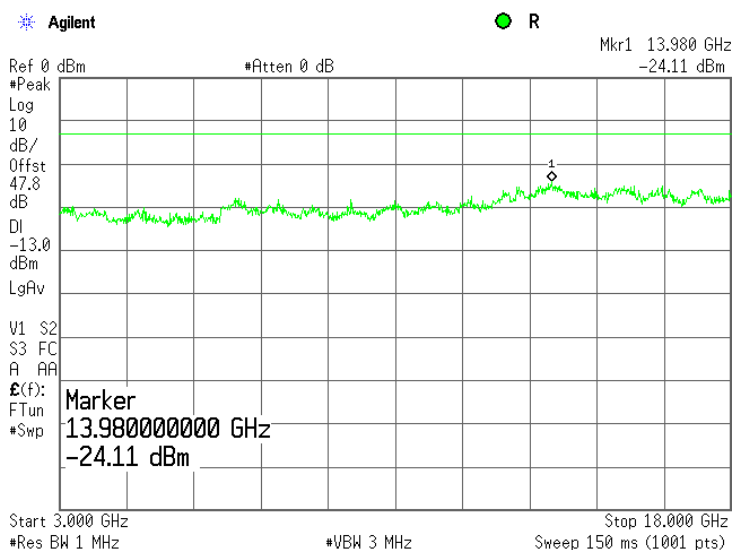

Test specification:		Section 27.54, Frequency stability	
Test procedure:		47 CFR, Section 2.1055	
Test mode:		Compliance	Verdict: PASS
Date:		12/6/2010	
Temperature: 23.2 °C	Air Pressure: 1012 hPa	Relative Humidity: 41 %	Power Supply: 48VDC
Remarks:			

7.6 Frequency stability test

7.6.1 General

This test was performed to measure frequency stability of transmitter RF carrier. Specification test limits are given in Table 7.6.1.


Table 7.6.1 Frequency stability limits

Assigned frequency, MHz	Maximum allowed frequency displacement
2620.0 – 2690.0	The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation

7.6.2 Test procedure

- 7.6.2.1 The EUT was set up as shown in Figure 7.6.1, energized and its proper operation was checked.
- 7.6.2.2 The EUT power was turned off. Temperature within test chamber was set to +30°C and a period of time sufficient to stabilize all of the oscillator circuit components was allowed.
- 7.6.2.3 The EUT was powered on and carrier frequency was measured at start up moment and then every minute until frequency had been stabilized or 10 minutes elapsed whichever reached the last. The EUT was powered off.
- 7.6.2.4 The above procedure was repeated at 0°C and at the lowest test temperature.
- 7.6.2.5 The EUT was powered on and carrier frequency was measured at start up moment and at the end of stabilization period at the rest of test temperatures and voltages. The EUT was powered off.
- 7.6.2.6 Frequency displacement was calculated and compared with the limit as provided in Table 7.6.2 to Table 7.6.4.

Figure 7.6.1 Frequency stability test setup

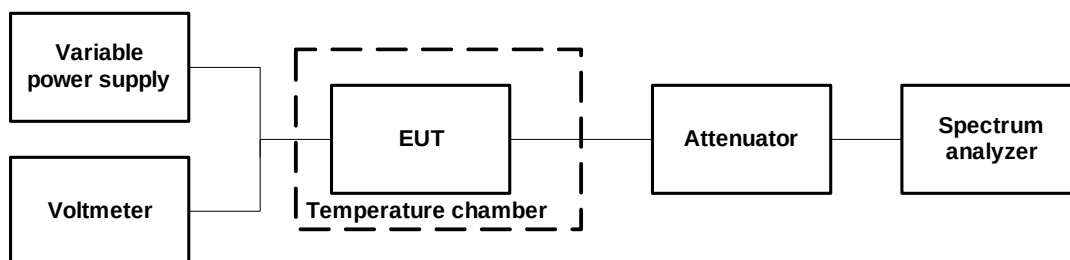

Test specification:		Section 27.54, Frequency stability			
Test procedure:		47 CFR, Section 2.1055			
Test mode:		Compliance		Verdict: PASS	
Date:		12/6/2010			
Temperature: 23.2 °C		Air Pressure: 1012 hPa		Relative Humidity: 41 %	Power Supply: 48VDC
Remarks:					

Table 7.6.2 Frequency stability test results

ASSIGNED FREQUENCY: 2620.0 – 2686.0 MHz
 NOMINAL POWER VOLTAGE: 48 VDC
 TEMPERATURE STABILIZATION PERIOD: 20 min
 POWER DURING TEMPERATURE TRANSITION: Off
 SPECTRUM ANALYZER MODE: Counter
 RESOLUTION BANDWIDTH: 3kHz
 VIDEO BANDWIDTH: 9.1 kHz
 MODULATION: Unmodulated

T, °C	Voltage, V	Frequency, MHz							Max frequency drift Hz	
		Start up	1 st min	2 nd min	3 rd min	4 th min	5 th min	10 th min	Positive	Negative
Low carrier frequency 2623.0 MHz										
-30	nominal	2623.000565	2623.000362	2622.999866	2622.999716	2622.999647	2622.999697	2622.999801	1276	0
-20	nominal	2623.000453	NA	NA	NA	NA	NA	2623.000493	1204	0
-10	nominal	2622.999676	NA	NA	NA	NA	NA	2623.000339	1050	0
0	nominal	2623.000212	2623.000182	2623.000175	2623.000165	2623.000166	2623.000144	2623.000106	923	0
10	nominal	2622.999495	NA	NA	NA	NA	NA	2622.999295	206	0
20	-15%	2622.998927	NA	NA	NA	NA	NA	2622.998913	0	-362
20	nominal	2622.999499	NA	NA	NA	NA	NA	2622.999289*	210	0
20	-15%	2622.998913	NA	NA	NA	NA	NA	2622.998929	0	-360
30	nominal	2622.999111	2622.999119	2622.999103	2622.999119	2622.999124	2622.999126	2622.999183	0	-106
40	nominal	2622.999292	NA	NA	NA	NA	NA	2622.999346	57	0
50	nominal	2622.999531	NA	NA	NA	NA	NA	2622.999119	242	0
Mid carrier frequency 2653.0 MHz										
-30	nominal	2652.999837	2652.999858	2652.999888	2652.999898	2652.999912	2652.999923	2653.000146	1375	0
-20	nominal	2653.000349	NA	NA	NA	NA	NA	2653.000457	1686	0
-10	nominal	2653.000353	NA	NA	NA	NA	NA	2653.000337	1582	0
0	nominal	2652.999998	2653.000133	2653.000228	2653.000421	2653.000406	2653.000357	2653.000253	1650	0
10	nominal	2652.999304	NA	NA	NA	NA	NA	2652.999245	533	0
20	-15%	2652.998886	NA	NA	NA	NA	NA	2652.998895	124	0
20	nominal	2652.999244	NA	NA	NA	NA	NA	2652.998771*	473	0
20	-15%	2652.998907	NA	NA	NA	NA	NA	2652.998932	161	0
30	nominal	2652.999019	2652.999029	2652.999037	2652.999027	2652.999046	2652.999047	2652.999095	324	0
40	nominal	2652.999393	NA	NA	NA	NA	NA	2652.999758	987	0
50	nominal	2652.999977	NA	NA	NA	NA	NA	2652.999558	1206	0
High carrier frequency 2683.0 MHz										
-30	nominal	2683.000151	2683.000256	2683.000318	2683.000352	2683.000371	2683.000392	2683.000439	1821	0
-20	nominal	2682.998872	NA	NA	NA	NA	NA	2683.000291	1673	0
-10	nominal	2683.000354	NA	NA	NA	NA	NA	2683.000313	1736	0
0	nominal	2683.000612	2682.999742	2682.999825	2682.999769	2682.999888	2682.999874	2682.999827	1994	0
10	nominal	2682.999266	NA	NA	NA	NA	NA	2682.999245	648	0
20	-15%	2682.998879	NA	NA	NA	NA	NA	2682.998864	261	0
20	nominal	2682.998727	NA	NA	NA	NA	NA	2682.998618*	109	0
20	-15%	2682.998887	NA	NA	NA	NA	NA	2682.998871	269	0
30	nominal	2682.999006	2682.999015	2682.998972	2682.998963	2682.998969	2682.998978	2682.999028	410	0
40	nominal	2682.999795	NA	NA	NA	NA	NA	2683.000008	1390	0
50	nominal	2682.999140	NA	NA	NA	NA	NA	2683.000029	1411	0

* - Reference frequency

Table 7.6.3 Maximum frequency displacement

Channel	Maximum frequency displacement			
	ppm		Hz	
	Negative	Positive	Negative	Positive
Low (2623.0 MHz)	0.138	0.486	362	1276
Mid (2653.0 MHz)	0	0.636	0	1686
High (2683.0 MHz)	0	0.679	0	1994

Test specification:		Section 27.54, Frequency stability			
Test procedure:		47 CFR, Section 2.1055			
Test mode:		Compliance		Verdict: PASS	
Date:		12/6/2010			
Temperature: 23.2 °C		Air Pressure: 1012 hPa		Relative Humidity: 41 %	Power Supply: 48VDC
Remarks:					

Table 7.6.4 Transmission occupied bandwidth with frequency drift test results

Lower measured* band edge, MHz	Upper measured* band edge, MHz	Lower calculated** band edge, MHz	Upper calculated** band edge, MHz	Lower specified band edge, MHz	Upper specified band edge, MHz	Lower margin***, MHz	Upper margin***, MHz	Verdict
3.5 MHz BW								
QPSK								
2621.295000	2624.690000	2621.294638	2624.691276	2560.000000	2566.000000	61.294638	58.691276	Pass
2651.295000	2654.675000	2651.295000	2654.676686	2590.000000	2596.000000	61.295000	58.676686	Pass
2681.300000	2684.670000	2681.300000	2684.671821	2626.000000	2632.000000	55.300000	52.671821	Pass
64QAM								
2621.295000	2624.675000	2621.294638	2624.676276	2560.000000	2566.000000	61.294638	58.676276	Pass
2651.310000	2654.685000	2651.310000	2654.686686	2590.000000	2596.000000	61.310000	58.686686	Pass
2681.295000	2684.670000	2681.295000	2684.671821	2626.000000	2632.000000	55.295000	52.671821	Pass
5 MHz BW								
QPSK								
2620.613000	2625.338000	2620.612638	2625.339276	2560.000000	2566.000000	60.612638	59.339276	Pass
2650.613000	2655.338000	2650.613000	2655.339686	2590.000000	2596.000000	60.613000	59.339686	Pass
2680.613000	2685.338000	2680.613000	2685.339821	2626.000000	2632.000000	54.613000	53.339821	Pass
64QAM								
2620.613000	2625.331000	2620.612638	2625.332276	2560.000000	2566.000000	60.612638	59.332276	Pass
2650.613000	2655.338000	2650.613000	2655.339686	2590.000000	2596.000000	60.613000	59.339686	Pass
2680.613000	2685.338000	2680.613000	2685.339821	2626.000000	2632.000000	54.613000	53.339821	Pass
7 MHz BW								
QPSK								
2622.610000	2629.340000	2622.609638	2629.341276	2560.000000	2572.000000	62.609638	57.341276	Pass
2652.640000	2659.340000	2652.640000	2659.341686	2590.000000	2602.000000	62.640000	57.341686	Pass
2676.670000	2683.330000	2676.670000	2683.331821	2620.000000	2632.000000	56.670000	51.331821	Pass
64QAM								
2622.670000	2629.340000	2622.669638	2629.341276	2560.000000	2572.000000	62.669638	57.341276	Pass
2652.670000	2659.370000	2652.670000	2659.371686	2590.000000	2602.000000	62.670000	57.371686	Pass
2676.670000	2683.330000	2676.670000	2683.331821	2620.000000	2632.000000	56.670000	51.331821	Pass
10 MHz BW								
QPSK								
2621.365000	2630.650000	2621.364638	2630.651276	2560.000000	2572.000000	61.364638	58.651276	Pass
2651.350000	2660.650000	2651.350000	2660.651686	2590.000000	2602.000000	61.350000	58.651686	Pass
2675.365000	2684.650000	2675.365000	2684.651821	2620.000000	2632.000000	55.365000	52.651821	Pass
64QAM								
2621.365000	2630.695000	2621.364638	2630.696276	2560.000000	2572.000000	61.364638	58.696276	Pass
2651.350000	2660.695000	2651.350000	2660.696686	2590.000000	2602.000000	61.350000	58.696686	Pass
2675.290000	2684.680000	2675.290000	2684.681821	2620.000000	2632.000000	55.290000	52.681821	Pass

* - Measured under normal test conditions at 26 dBc points

** - Measured band edge with proper drift addition

*** - Margin = Calculated band edge – specified band edge

Reference numbers of test equipment used

HL 1424	HL 1480	HL 3767				
---------	---------	---------	--	--	--	--

Full description is given in Appendix A.

8 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal.	Due Cal.
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	29-Jun-10	29-Jun-11
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	25-Aug-10	25-Aug-11
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	11-Jan-10	11-Jan-11
0768	Antenna Standard Gain Horn, 18-26.5 GHz, WR-42, 25 dB gain	Quinstar Technology	QWH-4200-BA	110	23-Dec-08	23-Dec-11
1424	Spectrum Analyzer, 30 Hz- 40 GHz	Agilent Technologies	8564EC	3946A002 19	31-Aug-10	31-Aug-11
1480	Cable, 1 m	Harbour Industries	MIL 17/60-RG142	1480	01-Sep-10	01-Sep-11
1906	Power Divider, 0.5-18.0 GHz, 80 W	Omni Spectra	2090-6204-00	1906	01-Dec-10	01-Dec-12
1984	Antenna, Double-Ridged Waveguide Horn, 1-18 GHz, 300 W	EMC Test Systems	3115	9911-5964	11-Jun-10	11-Jun-11
2013	Power Divider, 0.5-18.0 GHz, 80 W	Omni Spectra	2090-6204-00	2013	01-Dec-10	01-Dec-12
2015	Power Divider, 0.5-18.0 GHz, 80 W	Omni Spectra	2090-6204-00	2015	01-Dec-10	01-Dec-12
2254	Cable 40 GHz, 0.8 m, blue	Rhophase Microwave Limited	KPS-1503A-800-KPS	W4907	13-Jun-10	13-Jun-11
2870	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA	Huber-Suhner	198-9155-00	2870	04-Aug-10	04-Aug-11
2871	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA	Huber-Suhner	198-8155-00	2871	14-Sep-10	14-Sep-11
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY414447 62	07-May-10	07-May-11
2953	Cable, RF, 18 GHz, 1.2 m, SMA-SMA	Gore	10020014	NA	04-Oct-10	04-Oct-11
3301	Power Meter, P-series, 50 MHz to 40 GHz	Agilent Technologies	N1911A	MY451010 57	14-Dec-09	14-Dec-10
3302	Power sensor, P-Series, 50 MHz to 40 GHz, -35/30 to 20 dBm	Agilent Technologies	N1922A	MY452405 86	14-Dec-09	14-Dec-10
3433	Test Cable , DC-18 GHz, 1.5 m, SMA - SMA	Mini-Circuits	CBL-5FT-SMSM+	25679	07-Mar-10	07-Mar-11
3434	Test Cable , DC-18 GHz, 1.5 m, SMA - SMA	Mini-Circuits	CBL-5FT-SMSM+	25683	07-Mar-10	07-Mar-11
3437	Precision Fixed Attenuator, 50 Ohm, 5 W, 10 dB, DC to 18 GHz	Mini-Circuits	BW-S10W5+	NA	07-Mar-10	07-Mar-11
3442	Precision Fixed Attenuator, 50 Ohm, 5 W, 20 dB, DC to 18 GHz	Mini-Circuits	BW-S20W5+	NA	07-Mar-10	07-Mar-11
3472	Cable, Coax, Microwave, DC-18 GHz, SMA-SMA, 1.0 m	Gore	GORE 65474	1003478	09-May-10	09-May-11

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal.	Due Cal.
3473	Cable, Coax, Microwave, DC-18 GHz, SMA-SMA, 0.6 m	Gore	GORE 65474	1003478	09-May-10	09-May-11
3474	Cable, Coax, Microwave, DC-18 GHz, SMA-SMA, 0.6 m	Gore	GORE 65475	1640102	09-May-10	09-May-11
3534	Amplifier, low noise, 6 to 18 GHz	Quinstar Technology	QLJ-06184040-J0	111590010 02	06-Dec-10	06-Dec-11
3535	Amplifier, low noise, 18 to 40 GHz	Quinstar Technology	QLJ-18404537-J0	111590030 01	06-Dec-10	06-Dec-11
3559	Cable 40 GHz, SMA-SMA, 0.95 m, Blue	Gore	PHASEFL EX	03771245	13-Jun-10	13-Jun-11
3622	Cable RF, 6.0 m, N type-N type, DC-6.5 GHz	Alpha Wire	RG 214/U	NA	27-May-10	27-May-11
3767	Attenuator, N-type, 20 dB, DC to 18 GHz, 5 W	Mini-Circuits	BW-N20W5+	NA	31-Aug-10	31-Aug-11
3768	Attenuator, N-type, 20 dB, DC to 18 GHz, 5 W	Mini-Circuits	BW-N20W5+	NA	31-Aug-10	31-Aug-11
3818	PSA Series Spectrum Analyzer, 3 Hz- 44 GHz	Agilent Technologies	E4446A	MY482502 88	26-Sep-10	26-Sep-11

9 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Transmitter tests	
Carrier power conducted at antenna connector	± 1.7 dB
Carrier power radiated (substitution method)	± 4.5 dB
Occupied bandwidth	$\pm 8\%$
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Spurious emissions radiated 30 MHz – 40 GHz (substitution method)	± 4.5 dB
Frequency error	30 – 300 MHz: ± 50.5 Hz (1.68 ppm) 300 – 1000 MHz: ± 168 Hz (0.56 ppm)
Transient frequency behaviour	187 Hz $\pm 13.9\%$
Duty cycle, timing (Tx ON / OFF) and average factor measurements	$\pm 1.0\%$

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

10 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS, IC 2186A-2 for anechoic chamber, IC 2186A-3 for full-anechoic chamber for RE measurements above 1 GHz), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-27 for full-anechoic chamber for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is US1003.

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

11 APPENDIX D Specification references

FCC 47CFR part 27: 2009	Miscellaneous wireless communications services
FCC 47CFR part 1: 2009	Practice and procedure
FCC 47CFR part 2: 2009	Frequency allocations and radio treaty matters; general rules and regulations
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications.
ANSI C63.4: 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

12 APPENDIX E Test equipment correction factors

Antenna Factor
Active Loop Antenna
EMC Test Systems, model 6502, S/N 2857, HL 0446

Frequency, MHz	Magnetic Antenna Factor, dB(S/m)	Electric Antenna Factor, dB(1/m)
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.7
0.750	-41.9	9.6
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.1
4.000	-41.4	10.1
5.000	-41.5	10.0
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(S/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ A/m).
Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Standard gain horn antenna
Quinstar Technology
Model QWH
Ser.No.110, HL 0768

Frequency min, GHz	Frequency max, GHz	Antenna factor, dB(1/m)
18.000	26.500	32.01
26.500	40.000	35.48
40.000	60.000	39.03
60.000	90.000	42.55
90.000	140.000	46.23
140.000	220.000	50.11

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Biconilog antenna EMCO Model 3141
Ser.No.1011, HL 0604

Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)
26	7.8	580	20.6	1320	27.8
28	7.8	600	21.3	1340	28.3
30	7.8	620	21.5	1360	28.2
40	7.2	640	21.2	1380	27.9
60	7.1	660	21.4	1400	27.9
70	8.5	680	21.9	1420	27.9
80	9.4	700	22.2	1440	27.8
90	9.8	720	22.2	1460	27.8
100	9.7	740	22.1	1480	28.0
110	9.3	760	22.3	1500	28.5
120	8.8	780	22.6	1520	28.9
130	8.7	800	22.7	1540	29.6
140	9.2	820	22.9	1560	29.8
150	9.8	840	23.1	1580	29.6
160	10.2	860	23.4	1600	29.5
170	10.4	880	23.8	1620	29.3
180	10.4	900	24.1	1640	29.2
190	10.3	920	24.1	1660	29.4
200	10.6	940	24.0	1680	29.6
220	11.6	960	24.1	1700	29.8
240	12.4	980	24.5	1720	30.3
260	12.8	1000	24.9	1740	30.8
280	13.7	1020	25.0	1760	31.1
300	14.7	1040	25.2	1780	31.0
320	15.2	1060	25.4	1800	30.9
340	15.4	1080	25.6	1820	30.7
360	16.1	1100	25.7	1840	30.6
380	16.4	1120	26.0	1860	30.6
400	16.6	1140	26.4	1880	30.6
420	16.7	1160	27.0	1900	30.6
440	17.0	1180	27.0	1920	30.7
460	17.7	1200	26.7	1940	30.9
480	18.1	1220	26.5	1960	31.2
500	18.5	1240	26.5	1980	31.6
520	19.1	1260	26.5	2000	32.0
540	19.5	1280	26.6		
560	19.8	1300	27.0		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Double-ridged wave guide horn antenna
Model 3115, S/N 9911-5964, HL1984

Frequency, MHz	Antenna factor, dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.6
2500.0	28.9
3000.0	31.2
3500.0	32.0
4000.0	32.5
4500.0	32.7
5000.0	33.6
5500.0	35.1
6000.0	35.4
6500.0	34.9
7000.0	36.1
7500.0	37.8
8000.0	38.0
8500.0	38.1
9000.0	39.1
9500.0	38.3
10000.0	38.6
10500.0	38.2
11000.0	38.7
11500.0	39.5
12000.0	40.0
12500.0	40.4
13000.0	40.5
13500.0	41.1
14000.0	41.6
14500.0	41.7
15000.0	38.7
15500.0	38.2
16000.0	38.8
16500.0	40.5
17000.0	42.5
17500.0	45.9
18000.0	49.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Cable loss
Cable 40 GHz, 0.8 m, blue, model: KPS-1503A-800-KPS, S/N W4907, HL 2254

Frequency, GHz	Cable loss, dB	Frequency, GHz	Cable loss, dB	Frequency, GHz	Cable loss, dB
0.03	0.04	5.10	0.80	15.00	1.49
0.05	0.07	5.30	0.83	15.50	1.49
0.10	0.09	5.50	0.83	16.00	1.46
0.20	0.15	5.70	0.84	16.50	1.47
0.30	0.19	5.90	0.87	17.00	1.50
0.40	0.25	6.10	0.86	17.50	1.57
0.50	0.29	6.30	0.89	18.00	1.63
0.60	0.33	6.50	0.90	18.50	1.57
0.70	0.37	6.70	0.89	19.00	1.63
0.80	0.41	6.90	0.93	19.50	1.65
0.90	0.44	7.10	0.92	20.00	1.64
1.00	0.45	7.30	0.95	20.50	1.75
1.10	0.48	7.50	0.96	21.00	1.72
1.20	0.51	7.70	0.97	21.50	1.78
1.30	0.53	7.90	1.01	22.00	1.76
1.40	0.54	8.10	1.00	22.50	1.72
1.50	0.57	8.30	1.05	23.00	1.83
1.60	0.59	8.50	1.04	23.50	1.80
1.70	0.04	8.70	1.07	24.00	1.90
1.80	0.07	8.90	1.11	24.50	1.81
1.90	0.09	9.10	1.09	25.00	1.98
2.00	0.15	9.30	1.14	25.50	1.91
2.10	0.19	9.50	1.12	26.00	2.02
2.20	0.25	9.70	1.15	26.50	1.92
2.30	0.29	9.90	1.16	27.00	1.97
2.40	0.33	10.10	1.16	28.00	2.02
2.50	0.37	10.30	1.19	29.00	1.95
2.60	0.41	10.50	1.14	30.00	1.94
2.70	0.44	10.70	1.19	31.00	2.11
2.80	0.45	10.90	1.17	32.00	2.17
2.90	0.48	11.10	1.13	33.00	2.27
3.10	0.61	11.30	1.20	34.00	2.27
3.30	0.64	11.50	1.13	35.00	2.29
3.50	0.65	11.70	1.20	36.00	2.35
3.70	0.68	11.90	1.18	37.00	2.37
3.90	0.69	12.10	1.14	38.00	2.40
4.10	0.71	12.40	1.19	39.00	2.57
4.30	0.73	13.00	1.34	40.00	2.36
4.50	0.75	13.50	1.33		
4.70	0.77	14.00	1.48		
4.90	0.79	14.50	1.45		

Cable loss
Cable coaxial, Huber-Suhner, 18 GHz, 6.4 m, SMA - SMA, model 198-9155-00,
HL 2870

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.09	5750	2.49	12000	3.71
30	0.17	6000	2.53	12250	3.81
100	0.32	6250	2.58	12500	3.84
250	0.49	6500	2.64	12750	3.88
500	0.70	6750	2.69	13000	3.92
750	0.86	7000	2.75	13250	3.96
1000	1.00	7250	2.80	13500	3.98
1250	1.11	7500	2.87	13750	4.01
1500	1.23	7750	2.93	14000	4.03
1750	1.34	8000	2.94	14250	4.09
2000	1.41	8250	3.00	14500	4.08
2250	1.51	8500	3.04	14750	4.10
2500	1.59	8750	3.08	15000	4.15
2750	1.68	9000	3.14	15250	4.22
3000	1.76	9250	3.16	15500	4.31
3250	1.83	9500	3.22	15750	4.42
3500	1.91	9750	3.26	16000	4.48
3750	1.97	10000	3.36	16250	4.54
4000	2.05	10250	3.41	16500	4.56
4250	2.11	10500	3.46	16750	4.57
4500	2.18	10750	3.50	17000	4.59
4750	2.24	11000	3.54	17250	4.66
5000	2.30	11250	3.58	17500	4.70
5250	2.36	11500	3.63	17750	4.76
5500	2.43	11750	3.66	18000	4.72

Cable loss
Cable coaxial, Huber-Suhner, 18 GHz, 6.4 m, SMA - SMA, model 198-8155-00,
HL 2871

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.12	5750	2.34	12000	3.55
30	0.14	6000	2.39	12250	3.61
100	0.27	6250	2.46	12500	3.67
250	0.45	6500	2.52	12750	3.74
500	0.63	6750	2.58	13000	3.79
750	0.76	7000	2.64	13250	3.82
1000	0.89	7250	2.68	13500	3.83
1250	1.01	7500	2.73	13750	3.83
1500	1.12	7750	2.78	14000	3.88
1750	1.23	8000	2.83	14250	3.93
2000	1.32	8250	2.88	14500	3.96
2250	1.41	8500	2.94	14750	4.01
2500	1.49	8750	2.97	15000	4.00
2750	1.58	9000	3.02	15250	4.01
3000	1.66	9250	3.07	15500	4.00
3250	1.73	9500	3.13	15750	4.13
3500	1.80	9750	3.18	16000	4.22
3750	1.87	10000	3.21	16250	4.29
4000	1.93	10250	3.26	16500	4.29
4250	2.01	10500	3.30	16750	4.32
4500	2.06	10750	3.36	17000	4.37
4750	2.12	11000	3.39	17250	4.45
5000	2.17	11250	3.44	17500	4.49
5250	2.24	11500	3.48	17750	4.53
5500	2.29	11750	3.52	18000	4.55

Cable loss
Cable coaxial, Gore, 25.5 GHz, 1.2 m, SMA-SMA, S/N 10020014
HL 2953

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.06	8750	1.28	18000	1.84
30	0.06	9000	1.30	18250	1.91
100	0.12	9250	1.35	18500	1.94
250	0.19	9500	1.34	18750	1.92
500	0.27	9750	1.36	19000	1.95
750	0.34	10000	1.33	19250	2.00
1000	0.40	10250	1.38	19500	1.96
1250	0.45	10500	1.39	19750	2.02
1500	0.50	10750	1.39	20000	1.92
1750	0.54	11000	1.43	20250	2.04
2000	0.57	11250	1.42	20500	2.00
2250	0.60	11500	1.48	20750	2.09
2500	0.64	11750	1.49	21000	2.01
2750	0.67	12000	1.59	21250	2.07
3000	0.70	12250	1.50	21500	2.20
3250	0.74	12500	1.55	21750	2.10
3500	0.76	12750	1.55	22000	2.24
3750	0.80	13000	1.61	22250	2.25
4000	0.83	13250	1.62	22500	2.12
4250	0.85	13500	1.56	22750	2.05
4500	0.87	13750	1.61	23000	2.10
4750	0.91	14000	1.57	23250	2.03
5000	0.92	14250	1.66	23500	2.08
5250	0.96	14500	1.58	23750	2.14
5500	0.99	14750	1.69	24000	2.16
5750	0.99	15000	1.71	24250	2.25
6000	1.03	15250	1.74	24500	2.17
6250	1.05	15500	1.75	24750	2.32
6500	1.07	15750	1.72	25000	2.32
6750	1.08	16000	1.89	25250	2.32
7000	1.12	16250	1.79	25500	2.41
7250	1.13	16500	1.84	25750	2.31
7500	1.15	16750	1.82	26000	2.28
7750	1.20	17000	1.79	26250	2.32
8000	1.20	17250	1.78	26500	2.29
8250	1.23	17500	1.85		
8500	1.27	17750	1.83		

Cable loss

**Test Cable, Mini-Circuits, CBL-5FT-SMSM+, SMA-SMA, 18 GHz, 1.5 m, S/N 25679
Mini-Circuits, HL 3433**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10.0	0.06	9000	2.01
100	0.17	9500	2.06
500	0.41	10000	2.05
1000	0.58	10500	2.18
1500	0.72	11000	2.26
2000	0.86	11500	2.28
2500	0.96	12000	2.43
3000	1.04	12500	2.53
3500	1.13	13000	2.52
4000	1.23	13500	2.56
4500	1.31	14000	2.60
5000	1.41	14500	2.59
5500	1.49	15000	2.67
6000	1.55	15500	2.76
6500	1.63	16000	2.86
7000	1.71	16500	2.91
7500	1.78	17000	2.95
8000	1.86	17500	3.02
8500	1.92	18000	3.07

Cable loss

**Test Cable, Mini-Circuits, CBL-5FT-SMSM+, SMA-SMA, 18 GHz, 1.5 m, S/N 25683
Mini-Circuits, HL 3434**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10.0	0.06	9000	1.96
100	0.16	9500	2.01
500	0.40	10000	2.01
1000	0.57	10500	2.14
1500	0.72	11000	2.21
2000	0.85	11500	2.24
2500	0.95	12000	2.36
3000	1.03	12500	2.47
3500	1.11	13000	2.46
4000	1.21	13500	2.50
4500	1.29	14000	2.53
5000	1.39	14500	2.53
5500	1.46	15000	2.62
6000	1.52	15500	2.70
6500	1.60	16000	2.80
7000	1.68	16500	2.86
7500	1.75	17000	2.88
8000	1.83	17500	2.94
8500	1.88	18000	3.00

Cable loss
Cable coaxial, Microwave, SMA-SMA, 18 GHz, 1.0 m
Gore, HL 3472

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.01	5000	0.47	10200	0.72	15500	0.75
30	0.03	5100	0.47	10300	0.67	15600	0.89
50	0.04	5200	0.47	10400	0.77	15700	0.82
100	0.04	5300	0.47	10500	0.67	15800	0.89
200	0.08	5400	0.49	10600	0.74	15900	0.89
300	0.11	5500	0.48	10700	0.81	16000	0.93
400	0.11	5600	0.49	10800	0.77	16100	0.90
500	0.12	5700	0.49	10900	0.82	16200	0.92
600	0.14	5800	0.51	11000	0.86	16300	0.90
700	0.15	5900	0.50	11100	0.78	16400	0.94
800	0.16	6000	0.51	11200	0.82	16500	0.93
900	0.18	6100	0.53	11300	0.77	16600	0.95
1000	0.17	6200	0.52	11400	0.84	16700	0.98
1100	0.19	6300	0.53	11500	0.74	16800	1.00
1200	0.22	6400	0.54	11600	0.81	16900	0.94
1300	0.21	6500	0.55	11700	0.73	17000	1.00
1400	0.22	6600	0.54	11800	0.75	17100	0.93
1500	0.23	6700	0.57	11900	0.73	17200	1.00
1600	0.24	6800	0.54	12000	0.75	17300	0.93
1700	0.24	6900	0.58	12100	0.66	17400	0.93
1800	0.25	7000	0.58	12200	0.66	17500	0.96
1900	0.26	7100	0.58	12300	0.72	17600	0.94
2000	0.28	7200	0.61	12400	0.64	17700	0.99
2100	0.27	7300	0.59	12500	0.75	17800	0.97
2200	0.29	7400	0.55	12600	0.67	17900	0.90
2300	0.29	7500	0.63	12700	0.75	18000	0.78
2400	0.30	7600	0.60	12800	0.66		
2500	0.30	7700	0.61	12900	0.81		
2600	0.32	7800	0.64	13000	0.75		
2700	0.32	7900	0.60	13100	0.80		
2800	0.33	8000	0.58	13200	0.80		
2900	0.34	8100	0.61	13300	0.81		
3000	0.34	8200	0.62	13400	0.88		
3100	0.35	8300	0.62	13500	0.82		
3200	0.35	8400	0.68	13600	1.00		
3300	0.36	8500	0.63	13700	0.93		
3400	0.37	8600	0.61	13800	0.86		
3500	0.38	8700	0.63	13900	0.84		
3600	0.38	8800	0.62	14000	1.00		
3700	0.40	8900	0.64	14100	0.86		
3800	0.40	9000	0.62	14200	0.98		
3900	0.40	9100	0.64	14300	0.99		
4000	0.40	9200	0.62	14400	0.82		
4100	0.43	9300	0.62	14600	0.89		
4200	0.43	9400	0.62	14700	0.84		
4300	0.43	9500	0.63	14800	0.90		
4400	0.44	9600	0.64	14900	0.89		
4500	0.45	9700	0.60	15000	0.89		
4600	0.45	9800	0.65	15100	0.86		
4700	0.46	9900	0.60	15200	0.87		
4800	0.46	10000	0.67	15300	0.86		
4900	0.46	10100	0.69	15400	0.87		

Cable loss
Cable coaxial, Microwave, SMA-SMA, 18 GHz, 0.6 m
Gore, HL 3473

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.01	5000	0.48	10200	0.72	15500	0.85
30	0.03	5100	0.48	10300	0.70	15600	0.93
50	0.04	5200	0.48	10400	0.75	15700	0.87
100	0.04	5300	0.48	10500	0.68	15800	0.88
200	0.08	5400	0.50	10600	0.77	15900	0.94
300	0.11	5500	0.48	10700	0.80	16000	0.94
400	0.12	5600	0.50	10800	0.77	16100	0.99
500	0.13	5700	0.50	10900	0.85	16200	0.96
600	0.15	5800	0.52	11000	0.83	16300	0.96
700	0.15	5900	0.51	11100	0.79	16400	0.94
800	0.17	6000	0.52	11200	0.82	16500	0.94
900	0.19	6100	0.54	11300	0.79	16600	1.03
1000	0.18	6200	0.53	11400	0.81	16700	1.04
1100	0.20	6300	0.54	11500	0.76	16800	1.07
1200	0.22	6400	0.55	11600	0.78	16900	0.94
1300	0.22	6500	0.56	11700	0.74	17000	1.05
1400	0.23	6600	0.56	11800	0.76	17100	0.96
1500	0.24	6700	0.60	11900	0.79	17200	1.07
1600	0.25	6800	0.55	12000	0.74	17300	0.98
1700	0.25	6900	0.60	12100	0.69	17400	1.16
1800	0.26	7000	0.59	12200	0.69	17500	1.05
1900	0.27	7100	0.60	12300	0.75	17600	1.13
2000	0.29	7200	0.61	12400	0.66	17700	1.05
2100	0.28	7300	0.60	12500	0.76	17800	1.22
2200	0.30	7400	0.57	12600	0.70	17900	1.02
2300	0.30	7500	0.63	12700	0.77	18000	1.04
2400	0.31	7600	0.60	12800	0.69		
2500	0.31	7700	0.63	12900	0.79		
2600	0.33	7800	0.66	13000	0.81		
2700	0.33	7900	0.61	13100	0.83		
2800	0.35	8000	0.58	13200	0.80		
2900	0.35	8100	0.62	13300	0.82		
3000	0.35	8200	0.62	13400	0.90		
3100	0.35	8300	0.63	13500	0.85		
3200	0.36	8400	0.67	13600	1.04		
3300	0.38	8500	0.63	13700	0.93		
3400	0.38	8600	0.61	13800	0.91		
3500	0.40	8700	0.64	13900	0.89		
3600	0.40	8800	0.62	14000	0.96		
3700	0.40	8900	0.64	14100	0.88		
3800	0.41	9000	0.64	14200	1.01		
3900	0.41	9100	0.64	14300	0.99		
4000	0.41	9200	0.63	14400	0.83		
4100	0.45	9300	0.63	14600	0.88		
4200	0.43	9400	0.63	14700	0.91		
4300	0.46	9500	0.64	14800	0.91		
4400	0.44	9600	0.65	14900	0.88		
4500	0.47	9700	0.62	15000	0.89		
4600	0.46	9800	0.66	15100	0.91		
4700	0.47	9900	0.61	15200	0.88		
4800	0.47	10000	0.70	15300	0.94		
4900	0.48	10100	0.70	15400	0.91		

Cable loss
Cable coaxial, Microwave, SMA-SMA, 18 GHz, 0.6 m
Gore, HL 3474

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.00	5000	0.44	10200	0.72	15500	0.84
30	0.02	5100	0.44	10300	0.68	15600	0.95
50	0.03	5200	0.44	10400	0.75	15700	0.82
100	0.03	5300	0.44	10500	0.64	15800	0.94
200	0.07	5400	0.46	10600	0.75	15900	0.91
300	0.10	5500	0.45	10700	0.80	16000	0.91
400	0.11	5600	0.46	10800	0.77	16100	0.86
500	0.12	5700	0.47	10900	0.80	16200	0.86
600	0.14	5800	0.48	11000	0.79	16300	0.86
700	0.14	5900	0.48	11100	0.70	16400	0.84
800	0.15	6000	0.49	11200	0.76	16500	0.83
900	0.18	6100	0.51	11300	0.70	16600	0.87
1000	0.17	6200	0.50	11400	0.73	16700	0.90
1100	0.18	6300	0.50	11500	0.67	16800	0.91
1200	0.21	6400	0.51	11600	0.74	16900	0.90
1300	0.20	6500	0.51	11700	0.64	17000	0.97
1400	0.21	6600	0.52	11800	0.68	17100	0.94
1500	0.22	6700	0.54	11900	0.67	17200	1.01
1600	0.23	6800	0.51	12000	0.71	17300	0.97
1700	0.23	6900	0.55	12100	0.64	17400	1.02
1800	0.24	7000	0.54	12200	0.64	17500	1.06
1900	0.25	7100	0.55	12300	0.71	17600	1.01
2000	0.27	7200	0.55	12400	0.62	17700	1.10
2100	0.26	7300	0.54	12500	0.80	17800	1.16
2200	0.28	7400	0.52	12600	0.69	17900	1.12
2300	0.28	7500	0.58	12700	0.85	18000	1.00
2400	0.28	7600	0.56	12800	0.67		
2500	0.29	7700	0.57	12900	0.84		
2600	0.30	7800	0.62	13000	0.76		
2700	0.31	7900	0.57	13100	0.85		
2800	0.32	8000	0.55	13200	0.77		
2900	0.32	8100	0.59	13300	0.82		
3000	0.32	8200	0.59	13400	0.79		
3100	0.33	8300	0.60	13500	0.82		
3200	0.33	8400	0.66	13600	0.91		
3300	0.35	8500	0.60	13700	0.81		
3400	0.35	8600	0.59	13800	0.76		
3500	0.36	8700	0.59	13900	0.75		
3600	0.36	8800	0.58	14000	0.81		
3700	0.37	8900	0.60	14100	0.77		
3800	0.38	9000	0.60	14200	0.89		
3900	0.38	9100	0.60	14300	0.92		
4000	0.38	9200	0.57	14400	0.78		
4100	0.41	9300	0.57	14600	0.85		
4200	0.40	9400	0.58	14700	0.83		
4300	0.41	9500	0.60	14800	0.95		
4400	0.42	9600	0.62	14900	0.89		
4500	0.43	9700	0.58	15000	0.96		
4600	0.42	9800	0.63	15100	0.90		
4700	0.44	9900	0.58	15200	0.96		
4800	0.43	10000	0.67	15300	0.90		
4900	0.44	10100	0.69	15400	0.95		

Cable loss
Cable coaxial, GORE, PHASEFLEX, 40 GHz, 0.95 m, SMA-SMA, S/N 03771245
HL 3559

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss,dB
30	0.08	10000	0.96	20500	1.59	31000	2.24
100	0.10	10500	0.99	21000	1.63	31500	2.71
500	0.22	11000	1.02	21500	1.70	32000	2.47
1000	0.32	11500	1.07	22000	1.71	32500	2.37
1500	0.40	12000	1.13	22500	1.60	33000	2.35
2000	0.41	12500	1.16	23000	1.58	33500	2.34
2500	0.44	13000	1.26	23500	1.64	34000	2.31
3000	0.53	13500	1.26	24000	1.68	34500	2.43
3500	0.54	14000	1.22	24500	1.79	35000	2.45
4000	0.62	14500	1.26	25000	1.86	35500	2.48
4500	0.62	15000	1.27	25500	1.77	36000	3.60
5000	0.67	15500	1.29	26000	1.78	36500	2.62
5500	0.70	16000	1.39	26500	1.83	37000	2.45
6000	0.72	16500	1.50	27000	1.87	37500	2.47
6500	0.76	17000	1.49	27500	1.97	38000	2.38
7000	0.83	17500	1.37	28000	2.69	38500	2.41
7500	0.85	18000	1.40	28500	1.94	39000	2.56
8000	0.89	18500	1.41	29000	2.02	39500	2.71
8500	0.91	19000	1.48	29500	2.05	40000	2.69
9000	0.95	19500	1.61	30000	2.11		
9500	0.96	20000	1.59	30500	2.11		

Cable loss
Cable coaxial, RG-214/U, N type-N type, 6 m
Alpha Wire, HL 3622

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.13	2100	2.95	4400	4.99
30	0.24	2200	2.99	4500	5.00
50	0.32	2300	3.11	4600	5.17
100	0.47	2400	3.16	4700	5.18
200	0.70	2500	3.31	4800	5.33
300	0.88	2600	3.36	4900	5.34
400	1.05	2700	3.46	5000	5.50
500	1.21	2800	3.52	5100	5.56
600	1.36	2900	3.65	5200	5.76
700	1.49	3000	3.70	5300	5.76
800	1.63	3100	3.82	5400	5.85
900	1.72	3200	3.88	5500	5.88
1000	1.84	3300	3.99	5600	5.96
1100	1.96	3400	4.08	5700	6.02
1200	2.06	3500	4.19	5800	6.06
1300	2.15	3600	4.28	5900	6.14
1400	2.28	3700	4.42	6000	6.17
1500	2.35	3800	4.40	6100	6.28
1600	2.43	3900	4.51	6200	6.36
1700	2.57	4000	4.62	6300	6.47
1800	2.62	4100	4.70	6400	6.51
1900	2.75	4200	4.78	6500	6.65
2000	2.80	4300	4.83		

13 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
CBW	channel bandwidth
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
DC	direct current
EBW	emission bandwidth
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
QP	quasi-peak
PM	pulse modulation
PS	power supply
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
VA	volt-ampere

END OF DOCUMENT