



390 Bora-ri, Giheung-eup, Yongin-si, Gyeunggi-do, Republic of Korea (Zip Code:449-904)

TEL : (82)31-286-5881 FAX : (82)31-286-2661

<http://www.koreaemc.co.kr> [mscho@koreaemc.com](mailto:mscho@koreaemc.com)

## CERTIFICATE OF COMPLIANCE

### (CLASS B)

**CERTIFICATION OF COMPLIANCE** is hereby issued to the named Applicant and is **VALID ONLY** for the equipment identified below:

**Date of Tested :** June. 13. 2005

**Applicant's Name :** **Hyundai Autonet Co., Ltd.**

**Applicant's Address :** San 136-1, Ami-ri, Bubal-eub, Ichon-si, Kyoungki-do,  
467-701 Korea

**Manufacturer's Name :** **Hyundai Autonet Co., Ltd.**

**Manufacturer's Address :** San 136-1, Ami-ri, Bubal-eub, Ichon-si, Kyoungki-do,  
467-701 Korea

**Declares that the product**

**Product Description :** PNP

**Brand Name :** Hyundai

**Model Number :** PNAV-3550

**FCC ID :** PIN-PNAV3550

Conforms to FCC Rules and Regulations Part 15 Subpart B requirements.

This product herewith complies with the requirements of the FCC Rules and Regulations as listed below:

Part 15.107: Conducted Emissions.

Part 15.109: Radiated Spurious Emissions.

TESTED and CERTIFIED by:


### KOREA EMC LABORATORY

390 Bora-ri, Giheung-eup,  
Yongin-si, Gyeunggi-do,  
Republic of Korea (Zip Code:449-904)

**Date :** June. 17. 2005

**Report No :** KEL05-F05060

**Authorized Signature :**

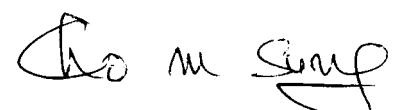

**M. S. CHO / President**

## TABLE OF CONTENTS

<b>DESCRIPTION</b>	<b>Page</b>
0. VERIFICATION OF COMPLIANCE	3
1. GENERAL INFORMATION	
1.1 Product Description	4
1.2 Related Submittal(s)/Grant(s)	4
1.3 Tested System Details	4
1.4 System Configuration	4
1.5 General Setup of the test Shield room	5
1.6 Test Facility	5
2. Measurement Procedure	
2.1 System test configuration	6
2.1.1 Video mode Justification	6
2.1.2 EUT Exercise S/W	6
2.2 Special Accessories	6
2.3 Equipment Modification	6
2.4 Connected Cable	6
2.5 System Configuration Diagram	6
2.6 Preliminary testing	7
2.7 Shielded Enclosure	7
2.8 Data Reporting Format	7
2.9 Operating Condition	7
2.10 Conditioning of the EUT	7
2.11 Power Line Conducted Emissions	8
2.12 Open field Radiated Emissions Tests	8
3. Measurement Data	
3.1 Conducted Emission Data	9
3.2 Conducted Emission Graph	10-11
3.3 Radiated Emission Data	12
3.4 Summary	13
4. Labeling Requirement	14

### Appendix

- A : Test set-up Photographs (Conducted and Radiated)
- B : External Photographs of E.U.T
- C : Internal Photographs of E.U.T
- D : FCC ID label location information and sample
- E : Block Diagram
- F : User's Manual

## 0 . VERIFICATION OF COMPLIANCE

Equipment Under Test : PNP

Model Number : PNAV-3550

Serial Number : Representative manufacturing sample

Manufacturer : Hyundai Autonet Co., Ltd.  
San 136-1, Ami-ri, Bubal-eub, Ichon-si, Kyoungki-do,  
467-701 Korea

Type of Test : FCC CLASS B

Report Number : KEL05-F05060

Date Tested : June. 13. 2005

Tested By : W.S.CHOI

The results show that the sample equipment tested as described in this reports is in compliance with the CLASS B conducted and radiated emission limits of FCC Rules Part 15, Subpart B.

## 1. GENERAL INFORMATION

### 1.1 PRODUCT DESCRIPTION

The PNAV-3550 is a PNP made by Hyundai Autonet Co., Ltd. in Korea. Refer to the user's manual for more information.

ITEM	SPECIFICATION
OS	Window CE 4.2 .NET
Flash memory	64 MB
Display	3.5" TFT (Touch Screen)
Dimension	123 x 77 x 32 mm
* E.U.T uses 7.3728 MHz Clock.	

### 1.2 Related Submittal(s)/Grant(s)

N/A

### 1.3 Tested System Details

Type	Model Name	FCC ID	Serial NO	Manufacturer
PNP	PNAV-3550	PIN-PNAV3550	Representative manufacturing sample	Hyundai Autonet Co., Ltd.
Adapter	DSA-0101F-05KA1	Verification	NONE	DVE
Earphone	-	-	NONE	Hyundai Autonet Co., Ltd.
Desk Book	TGIC-NP2400PA	DoC	3070279	SAMBO
Adapter	ADP-150BB B	Verification	VBT0316007783	Delta Electronics Inc.
Monitor	L665	DoC	27729072 B	EIZO
CRT Monitor	VA242NV	DoC	NONE	Pu Won Co., Ltd.
Printer	2225C+	DSI6XU2225	3119S96116	HP
Adapter	PW118	Verification	KA0502F53	AULT INC.
MIC	RM-1000	-	KEM-A-SI01	HANIL
USB Keyboard	Y-BE22	DoC	MCT20700643	Logitech
Serial Mouse	M-CE15-9F	DZLMCE15	LT292R00295	HP
PS/2 Mouse	H3003	DoC	NONE	HP

### 1.4 System Configuration

Type	Model Name	Serial NO	Manufacturer	Remark
BATTERY	HAP-3550E-2400	NONE	Hyundai Autonet Co., Ltd.	Korea
ANTENNA	-	NONE	Hyundai Autonet Co., Ltd.	Korea
KEYPAD B/D	PNAV3550-KEY	NONE	Hyundai Autonet Co., Ltd.	Korea
HDD	HTC426020G7CE10	NONE	Hitachi Global Storage Technologies	Philippines
LCD	LTV350QV-F04-00S	NONE	Hyundai Autonet Co., Ltd.	Korea
MAIN B/D	PNAV3550	NONE	Hyundai Autonet Co., Ltd.	Korea

## 1.5 General Set-up of the Test Shielded Room

The EUT was set up in accordance with the suggested configuration given in FCC measurement Procedure ANSI C63.4-2003. The measurement are performed in the shielded room which dimension is 3.0\*7.0\*2.5(m). The EUT was placed on a non conductive table which is 1.0\*1.5(m), 80 cm above an earthed ground plane and is kept at least 1m from any other earthed ground plane except the rear of table top being removed 40 cm from a vertical conducting plane.

Power to the EUT was provided through the LISN(NSLK8128, SCHWARZBECK) which has the Impedance vs Frequency Characteristic in accordance with the conducted setup photographs in Appendix-A Impedance Characteristic of LISN. Peripheral equipment required to provide a functional system(support equipment) for EUT testing was powered through another LISN(KNW-407, KYORITSU).

Power to the LISN was filtered to eliminate ambient signal interference. A coaxial type connector which provides a 50 Ohm terminating impedance was provided for the test instrument. The excess length of the power cord was wrapped in the two non metallic pegs attached to the top of the LISN. The two pegs are 9 cm high, approximately 2.0 cm in diameter and that are spaced 6 cm on the center apart.

## 1.6 Test Facility

Location: Korea EMC Laboratory

390 Bora-ri, Giheung-eup,  
Yongin-si, Gyeunggi-do,  
Republic of Korea (Zip Code:449-904)

Site : - 3 m/10 m Open Area Testing Site No.1  
- 3 m Semi-Anechoic Chamber No.1  
- Shielded Room No.1

The Open Field Radiated and Indoor Line Conducted sites are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4-2003. Korea EMC Lab. was refiled in FCC in April. 13. 2005.

Description	Model	Manufacturer	Serial No	Due Cal.
TESTRECEIVER	ESVS10	Rohde & Schwarz	825120/006	2005.10.15
TESTRECEIVER	ESCS30	Rohde & Schwarz	100054	2005.11.25
BI-LOG	VULB9160	SCHWARZBECK	3121	2005.11.30
LISN(for E.U.T.)	NSLK 8128	SCHWARZBECK	8128144	2005.11.04
AMPLIFIER	87405A	Hewlett-Packard	2944A06481	2005.07.18
LISN(for Peripheral)	KNW-407	KYORITSU	8-8833-14	2005.12.11
Attenuator	8491A	Hewlett-Packard	30907	-

The calibration of the measuring instruments, including any accessories that may effect such calibration, are checked frequently to assure their accuracy. Adjustments are made and correction factors are applied in accordance with instruments contained in the manual for the measuring instrument.

## 2. MEASUREMENT PROCEDURES

### 2.1 System Test Configuration

#### 2.1.1 Video mode Justification

N/A

#### 2.1.2 EUT Exercise Software

1. Measure executing animation Data stored to Keyboard after connect Keyboard with Desk Book and peripheral device in Desk Book.
2. Measure executing animation in Keyboard.

#### 2.2 Special Accessories


#### 2.3 Equipment Modifications

No equipment modifications were performed during testing.

#### 2.4 Connected cable

Beginning device		Last device		Standard of cable	
Type	I/O Port	Type	I/O Port	length (m)	shielding
PNP	USB	Desk Book	USB	1.5	Shielded(Core)
PC	Earphone	Earphone		1.0	Shielded
"	Video out	CRT Monitor		1.5	Shielded
"	Power	Adapter		1.5	Core
Desk Book	MIC	MIC		1.5	Shielded
"	USB	USB Keyboard		1.5	Shielded
"	PS/2	PS2 Mouse		1.5	Shielded
"	RS-232	Serial Mouse		1.5	
"	Parallel	Printer		1.5	Shielded(Core)
"	Power	Adpater		1.5	Shielded(Core)
Printer	Power	Adapter		1.5	

#### 2.5 System Configuration Diagram

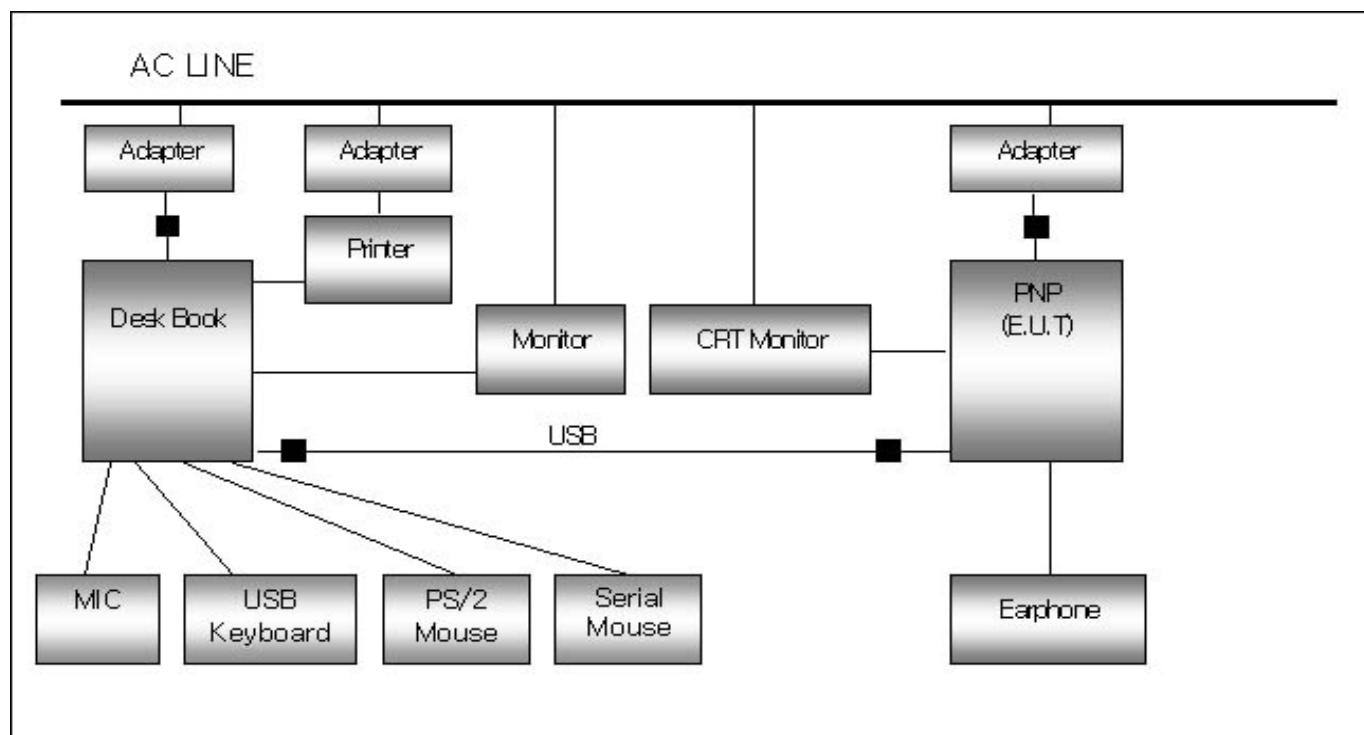

## 2.6 PRELIMINARY TESTING

It is often valuable to performing preliminary radiated measurements at a closer distance than specified for compliance to determine the emission characteristics of the EUT. At close-in distance, it is easier to determine the spectrum signature of EUT, and if applicable, the EUT configuration that emanate the maximum level of emissions. The data may not be precisely correlatable results.

## 2.7 SHIELDED ENCLOSURE

To search the Radiated frequency outline of an EUT a shielded screen room may be used. If the shielded room is used for radiated data, the data page will state that the EUT was in a shielded enclosure. All data collected in a screen room for radiated emissions is for frequency outline only. If an EUT is placed in screen room for Line Conducted Data, the data page will show that a screen room was used and data frequencies and levels will be correct and used for test data.

## 2.8 DATA REPORTING FORMAT

The measurement results expressed in accordance with C63.4 and specified limits where applicable are presented in tabular or graphical form, or alternatively as recorder charts or photographs of a spectrum analyzer display, showing the level vs. frequency.

## 2.9 OPERATING CONDITIONS

The EUT was operated at the specified load conditions(mechanical and/or electrical)for which it was designed.

## 2.10 CONDITIONING OF THE EUT

The EUT was operated for a sufficient period of time to approximate normal operating conditions.

## 2.11 Power line Conducted Emissions

The EUT is set up in accordance with the suggested configuration given in FCC Measurement Procedure ANSI C63.4-2003. The measurements are performed in a 3m x 6m x 2.5m shielded room. A wooden table which height is 80 cm is located at the center of the shielded room; desktop EUTs are placed on top of this table. The rear of the EUT and table are placed 40 cm apart from the shielded room wall. All items on the table (or test-table) were placed at least 10 cm apart each other. Excess EUT power cord is folded back and forth to form a 30 cm by 40 cm bundle. Interconnecting cables which hang closer than 40 cm to the ground plane are folded back and forth to form a 30 cm by 40 cm long bundle, hanging approximately in the middle between the ground plane and table. The EUT power cord was plugged into a LISN 80 cm away, while all other devices were plugged into a second LISN, also 80 cm away.

The highest emissions were also analyzed in detail by operating the spectrum analyzer in fixed tuned mode to determine the precise amplitude of the emissions. On the other hand, the interconnecting cables were moved around the table to maximize the emissions, and the position of the peripheral devices were interchanged to check whether there is any changes in emissions.

NOTE : The resolution bandwidth and video bandwidth of test receiver is 10 kHz for Quasi-peak detection (QP) at frequency below 30 MHz. Q.P value A.V limit when do over by A.V mode conversion after measure .

## 2.12 Open field Radiated Emissions Tests

The EUT and support equipment are set up on the turntable in an open field site. Desktop EUTs are set up on a wooden stand (test-table), 80 cm above the ground plane. All items on the table were placed at least 10 cm apart each other. Interconnecting cables which hang closer than 40 cm to the ground plane are folded back and forth to form a 30 cm by 40 cm long bundle, hanging approximately between the ground plane and table. The highest emissions were also analyzed, in detail, with the tuned aerial to search the precise amplitude of the emissions. On the other hand, the interconnecting cables were moved around the table and if the highest amplitudes is observed, the EUT is rotated in the horizontal plane while changing the antenna polarization to the vertical plane to maximize the field strength. Once the maximum field strength is obtained, the antenna elevation and polarization will be varied between specified limits to maximize the readings. The position of the peripheral devices are interchanged to check for any changes in emissions. In rare instances, the maximum field strength may occur with the antenna polarized between vertical and horizontal.

NOTE : The resolution bandwidth and video bandwidth of test receiver is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz

### 3. Measurement Data

#### 3.1 CONDUCTED EMISSION DATA

TEST : PNP ; PNAV-3550

DATE : June. 13. 2005

Freq. (MHz)	EUT State	Polarity (H/N)	Level (Q.P/A.V) dB(uV)	LIMIT (Q.P/A.V) dB(uV)	Margin for(Q.P/A.V) dB
0.151	Refer to Note	L2	48.8	66.0	17.2
0.222		L1	36.2	63.9	27.7
0.302		L1	28.1	61.7	33.6
0.376		L1	26.9	59.5	32.6
0.457		L1	24.8	57.2	32.4
0.511		L1	22.0	56.0	34.0
0.606		L2	24.0	56.0	32.0
1.043		L1	24.4	56.0	31.6
2.014		L1	24.1	56.0	31.9
3.420		L1	28.7	56.0	27.3
4.832		L1	30.7	56.0	25.3
5.172		L1	30.5	60.0	29.5
6.179		L1	25.1	60.0	34.9
6.979		L1	23.3	60.0	36.7
8.189		L1	23.0	60.0	37.0
10.182		L1	21.5	60.0	38.5
12.761		L2	20.2	60.0	39.8

Notes: The test is implemented in a shielded room in accordance with ANSI C63.4

L1 : HOT LINE , L2 : NEUTRAL LINE

Test Engineer.

Reviewed by.

3122

S. G. Moon

### 3.2 Conducted Emission Graph

#### Korea EMC Laboratory

#### Conducted Emission

EUT:

Manuf:


Op. Cond:

Operator:

Test Spec:

Comment: L1

Scan Settings	(f: Range)	Receiver Settings
Start	150-Hz	Stop
	30MHz	0.2%
		IF BW
		5kHz
		Detector
		PK+AV
		M-Time
		20msed
		Attenu
		10 dB
		Presens
		OFF
		Op/Off
		60dB

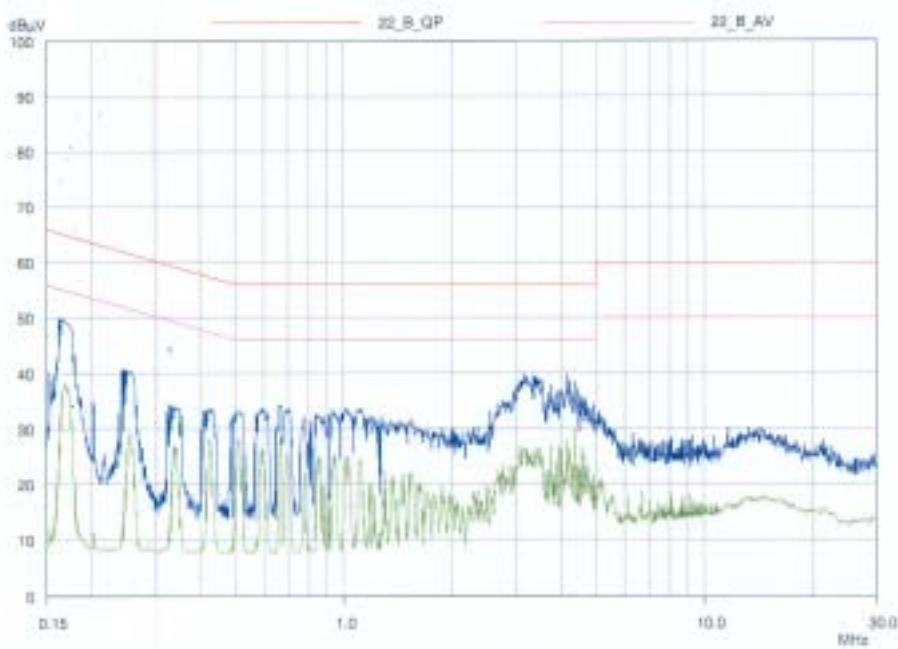


Red : Blue, Black: Green  
LINE EMISSION GRAPH(L1)

Korea EMC Laboratory  
Conducted Emission

EUT:  
Manuf:  
Op. Cond:  
Operator:  
Test Spec:  
Comment:  
L2:

Scan Settings: [1 Range]  
Frequencies: Start 150kHz, Stop 30MHz, Step 0.2%, IF BW 9kHz, Detector PK-AV, Receiver Settings M-Time 20ms, Atten 10dB, Preamp OFF, OptFlg 60dB

First Measurement: Detector: X GP / + AV, Meas. Time: 2sec, Peaks: 8, Acc Margin: 0dB

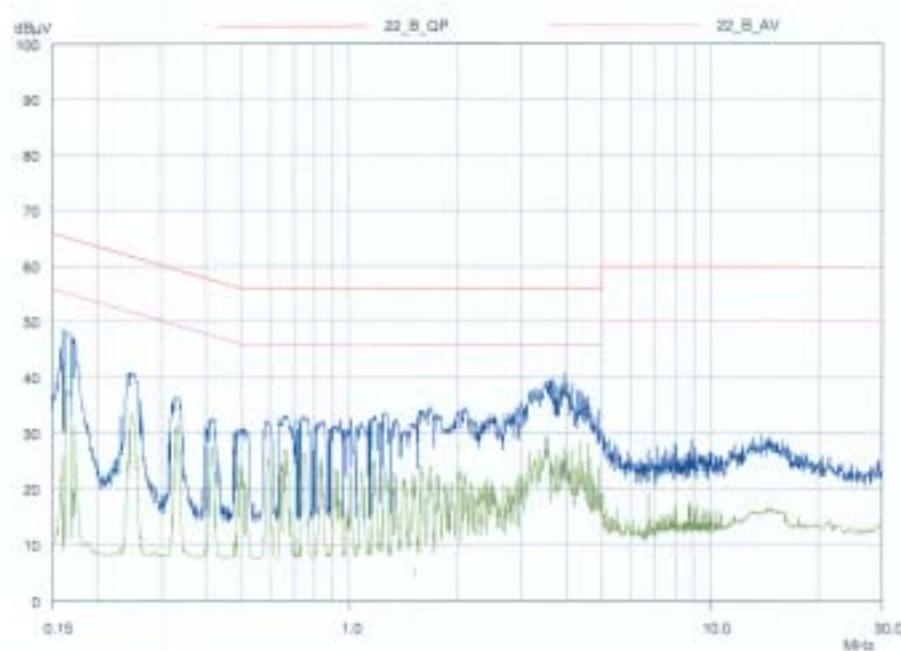


Red : Blue, Black: Green  
LINE EMISSION GRAPH(L2)

### 3.2 RADIATED EMISSION DATA

TEST : PNP : PNAV-3550

DATE : June. 13. 2005

Freq. (MHz)	EUT State	Level (dBuV)	Preamp -Pads (dB)	Af (dB/m)	Cl (dB)	Hor. /Ver	ha(m) Azimuth	Total Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)
31.870	Refer to note	37.46	21.30	11.24	1.3	V	1.0/200	28.7	40.0	11.3
35.470		35.10	21.30	11.30	1.3	V	1.0/200	26.4	40.0	13.6
120.007		42.97	21.30	10.93	2.4	V	1.0/70	35.0	43.5	8.5
134.665		37.97	21.30	10.93	2.4	V	1.0/180	30.0	43.5	13.5
193.214		38.85	21.30	11.35	2.7	H	1.2/180	31.6	43.5	11.9
199.064		39.45	21.30	11.35	2.7	H	1.8/270	32.2	43.5	11.3
204.925		46.57	21.30	9.53	3.0	V	1.0/90	37.8	43.5	5.7
216.646		46.37	21.30	9.53	3.0	H	1.0/180	37.6	46.0	8.4
228.346		43.65	21.30	10.56	3.1	H	1.0/200	36.0	46.0	10.0
350.229		39.82	21.30	14.08	4.4	H	1.3/70	37.0	46.0	9.0
374.802		37.42	21.30	14.08	4.4	H	1.0/30	34.6	46.0	11.4
398.124		36.85	21.30	14.66	4.5	H	1.0/170	34.7	46.0	11.3
399.376		42.15	21.30	14.66	4.5	H	1.0/30	40.0	46.0	6.0
462.038		37.47	21.30	16.73	4.9	H	2.5/270	37.8	46.0	8.2
497.671		40.67	21.30	16.73	4.9	V	1.0/180	41.0	46.0	5.0
594.066		25.76	21.30	17.94	5.2	H	2.5/90	27.6	46.0	18.4
660.070		28.29	21.30	19.91	6.0	H	2.7/270	32.9	46.0	13.1
800.310		27.74	21.30	22.56	7.0	H	1.4/90	36.0	46.0	10.0
924.093		32.35	21.30	22.65	7.1	H	1.2/220	40.8	46.0	5.2

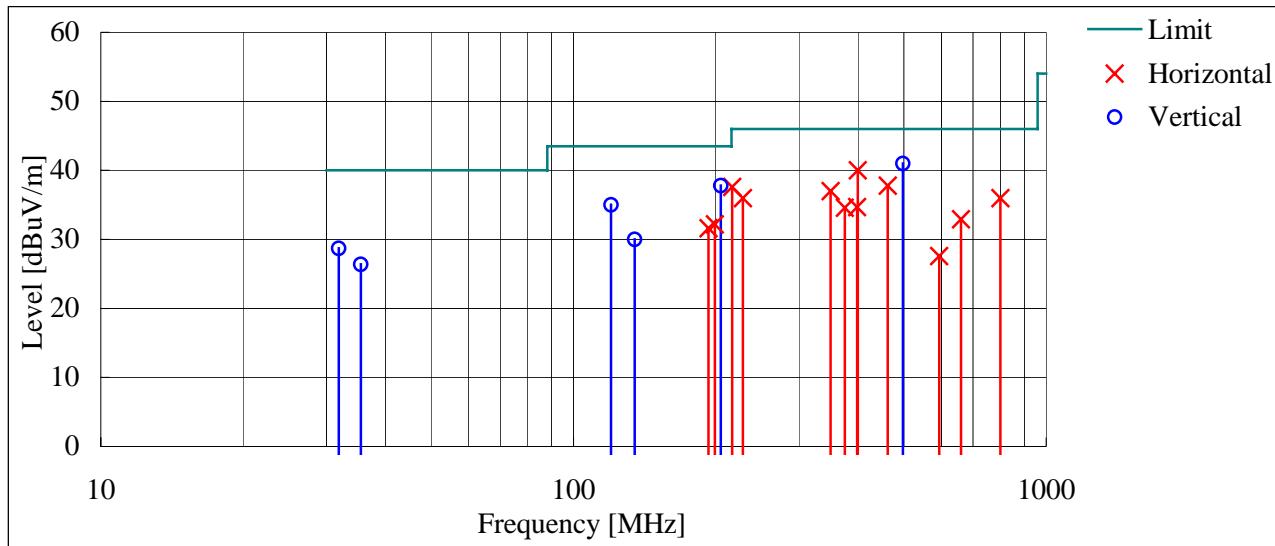

Notes: The test is performed in a distance of 3m. Af : Antenna factor, Cl : Cable loss

The test is performed in accordance with ANSI C63.4

Test Engineer.

Reviewed by.

31.870

S. G. Moon

### 3.3 SUMMARY

Company	: Hyundai Autonet Co., Ltd.
Equipment Under Test	: PNP
Model Number	: PNAV-3550
Serial Number	: Representative manufacturing sample
Type of Test	: FCC CLASS B
Passed/Failed	: PASSED

The Equipment Under Test(EUT) was configured and operated in a manner which tends to maximize its emission characteristics in a typical application. Power and signal distribution, ground, interconnecting cabling, and physical placement of equipment were simulating the typical application and usage in so far as practicable.

**LINE CONDUCTED TEST:** An unshielded power cord was used to connect the EUT to a LISN Box which supplied 120 VAC/60 Hz power. The EUT was tested according to C63.4 test specifications. Line conductance scanned from 150 kHz to 30 MHz range on both Line 1(hot side) and Line 2(neutral side). ***The highest emission was observed at 0.151 MHz on Line 2 with a margin of 17.2 dB from the limit.*** All line conductance emissions were within the FCC CLASS B requirements for compliance.

**RADIATED TEST:** The EUT was placed on a three meter open field test site according to C63.4 test specifications. Preliminary scans ranged from 30 MHz to 1 GHz in both vertical and horizontal polarizations in all possible modes of operation. The highest six point of emission levels were recorded as data each ranges of limit.

***The highest emission was observed at 497.671 MHz(Vertical) with margin of 5.0 dB from the limit.*** All radiated emissions were within the FCC CLASS B requirements for compliance.

## 4. LABELING REQUIREMENT

Section 15.19 of the Code of Federal Regulation

1) A CLASS B computing device subject to certification by the Commission shall be identified pursuant to par. 2.925 et Seq of this chapter. In addition, the label shall include the following statement:

This device complies with Part 15 of the FCC Rules.  
Operation is subject to the following two conditions:  
(1) This Device may not cause harmful interference, and  
(2) This device must accept any interference received,  
including interference that may cause undesired  
operation.

Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified in this Section is required to be affixed only to the main control unit.

The users manual or instruction manual for the EUT shall contain the following statement or equivalent.

**Caution: Changes or Modifications not expressly approved by the party responsible for compliance could void the users authority to operate the equipment.**

If the EUT requires accessories such as special shielded cables and/or connectors to enable compliance with emission limits, the instruction manual for the EUT shall include appropriate instructions on the first page of the text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

For a CLASS B digital device or peripheral, the instructions furnished the user shall include the following or similar statement placed in a prominent location in the text of the manual.

**Note:** This equipment has been tested and found to comply with the limits for a CLASS B digital device, pursuant to Part 15 of FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.