



## HCT CO., LTD.

Product Compliance Division

TEL : +82 31 639 8518 FAX : +82 31 639 8525

### CERTIFICATE OF COMPLIANCE

#### FCC PART 15.231 Certification

**Applicant Name:**

Hyundai Autonet Co., Ltd.

**Address:**

723, Mundeok-ri, Munbaek-myoen, Jincheon-gun,  
Chungbuk, Korea

**Date of Issue:**

January 20, 2009

**Test Site/Location:**

HCT.CO., LTD., San 136-1 Ami-ri, Bubal-eup, Icheon-si,  
Kyungki-do, Korea

**Test Report No.:** HCT-RF09-0114

**HCT FRN:** 0005866421

**FCC ID:** PINHA-T036

**IC:** 4018A-HA-T036

**APPLICANT:** Hyundai Autonet Co., Ltd.

**Model(s):** HA-T036

**EUT Type:** RKE

**Tx Frequency:** 315 MHz (Tx)

**Type of Modulation:** FSK

**Equipment Class:** DSC - Part 15 Security / Remote Control Transmitter

**IC Equipment Category:** RSS-210 Issue 7: Category I Equipment, annex 1

**FCC Rule Part(s)** Part 15 subpart C 15.231

**IC Rule:** RSS-210 Issue 7

**IC Registration No. :** 5944A-1

**Engineering Statement:**

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT.CO., LTD. Certifies that no party to this application has been denied FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

Hyo Sun Kwak  
Report prepared by

: Hyo Sun Kwak

Test engineer of RF Part

Sang Jun Lee  
Approved by  
: Sang Jun Lee

Manager of RF Part

HCT PT.15.231 TEST REPORT		FCC & IC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0114	Date of Issue: January 20, 2009	EUT Type: RKE	FCC ID: PINHA-T036	IC: 4018A-HA-T036		Page 1 of 20



## Table of Contents

1. GENERAL INFORMATION.....	3
2. EUT DESCRIPTION.....	3
3. TEST METHODOLOGY .....	4
3.1 EUT CONFIGURATION.....	4
3.2 EUT EXERCISE.....	4
3.3 GENERAL TEST PROCEDURES.....	4
3.4 DESCRIPTION OF TEST MODES.....	4
4. INSTRUMENT CALIBRATION.....	5
5. FACILITIES AND ACCREDITATIONS.....	5
5.1 FACILITIES.....	5
5.2 EQUIPMENT.....	5
6. ANTENNA REQUIREMENTS .....	5
7. LIMITS AND TEST RESULT .....	6
7.1 20dB BANDWIDTH .....	7
7.2 MAXIMUM MODULATION PERCENTAGE (M%) .....	9
7.3 LESS THAN 5 SECOND PLOT.....	13
7.4 RADIATED EMISSIONS.....	15
7.4.1 TRANSMITTER RADIATED SPURIOUS EMISSIONS.....	15
7.4.2 Test Results: PASS.....	18
8. LIST OF TEST EQUIPMENT .....	20

HCT PT.15.231 TEST REPORT		FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-RF09-0114	Date of Issue: January 20, 2009	EUT Type: RKE	FCC ID: PINHA-T036	IC: 4018A-HA-T036	Page 2 of 20



## 1. GENERAL INFORMATION

**Applicant:** Hyundai Autonet Co., Ltd.

**Address:** 723, Mundeok-ri, Munbaek-myeon, Jincheon-gun, Chungbuk, Korea

**FCC ID:** PINHA-T036

**IC CODE:** 4018A-HA-T036

**EUT:** RKE

**Model:** HA-T036

**Date of Test:** January 12, 2009 ~ January 18, 2009

**Contact person:**  
Name: Yong Bin Kim  
Phone #: +82-31-639-1589  
Fax #: +82-31-636-4138

**Place of Tests:**  
HCT Co., Ltd.  
Icheon, Kyounki-Do, Korea (IC Recognition No. : IC 5944A-1)

## 2. EUT DESCRIPTION

<b>Type</b>	RKE
<b>Model Name</b>	HA-T036
<b>Power Source</b>	DC 3 V (Lithium Battery)
<b>Tx Frequency</b>	315 MHz (Tx)
<b>Type of Modulation</b>	FSK
<b>Antenna</b>	PCB Pattern Antenna

<b>HCT PT.15.231 TEST REPORT</b>	<b>FCC &amp; IC CERTIFICATION REPORT</b>				<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCT-RF09-0114	<b>Date of Issue:</b> January 20, 2009	<b>EUT Type:</b> RKE	<b>FCC ID:</b> PINHA-T036	<b>IC:</b> 4018A-HA-T036	Page 3 of 20



### 3. TEST METHODOLOGY

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-2003) and FCC Public Notice DA 00-705 dated March 30, 2000 entitled "Filing and Measurement Guidelines for Transmitter for RKE System" were used in the measurement of the **Hyundai Autonet Co., Ltd. RKE FCC ID: PINHA-T036**

#### 3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### 3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.205, 15.207, 15.209 and 15.231 under the FCC Rules Part 15 Subpart C.

#### 3.3 GENERAL TEST PROCEDURES

##### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version :2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version: 2003)

#### 3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

HCT PT.15.231 TEST REPORT		FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-RF09-0114	Date of Issue: January 20, 2009	EUT Type: RKE	FCC ID: PINHA-T036	IC: 4018A-HA-T036	Page 4 of 20



## 4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

## 5. FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1, Maekok-Ri, Hobup-Myun, Ichon-Si, Kyoungki-Do, 467-701, KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 6, 2006(Registration Number: 90661)

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 6. ANTENNA REQUIREMENTS

### According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

\* The antennas of this E.U.T are permanently attached.

\*The E.U.T Complies with the requirement of §15.203

HCT PT.15.231 TEST REPORT		FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-RF09-0114	Date of Issue: January 20, 2009	EUT Type: RKE	FCC ID: PINHA-T036	IC: 4018A-HA-T036	Page 5 of 20



## 7. LIMITS AND TEST RESULT

### Summary of Test Results

Report Section	FCC Part Section(s)	RSS-210 Section	Test Description	Test Result
<b>TRANSMITTER MODE (TX)</b>				
7.2, 7.3	15.231(a)	A1.1.1(a)	Timing of the transmitter	PASS
7.4	15.231(b)	A.1.1.2(1)	Field Strength of Fundamental	PASS
7.4	15.231(b)	A1.1.1.2(1)	Field Strength of harmonics and spurious	PASS
7.1	15.231(c)	A1.1.3	Occupied bandwidth	PASS

Not required, the EUT is the transmitter for RKE System.

Not required, the EUT is only battery powered.

FCC & IC CERTIFICATION REPORT					<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-RF09-0114	Date of Issue: January 20, 2009	EUT Type: RKE	FCC ID: PINHA-T036	IC: 4018A-HA-T036	Page 6 of 20



## 7.1 20dB BANDWIDTH

### LIMIT

§15.231 (c) & IC RSS-210 Issue 6 A1.1.3

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz. the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20dB down from the modulated carrier.

### TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer.

20dB Bandwidth The RBW is set to 100KHz. The VBW is set to 100KHz. The sweep time is coupled. Bandwidth is determined at the points 20 dB down from the modulated carrier.

### RESULTS


NO non-compliance noted.

Operating Frequency (MHz)	20dB Bandwidth (KHz)	Limit (KHz)	Margin (KHz)
315	300	787.5	487.5

HCT PT.15.231 TEST REPORT	FCC & IC CERTIFICATION REPORT				<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-RF09-0114	Date of Issue: January 20, 2009	EUT Type: RKE	FCC ID: PINHA-T036	IC: 4018A-HA-T036	Page 7 of 20

## 20dB BANDWIDTH

### RESULT PLOTS

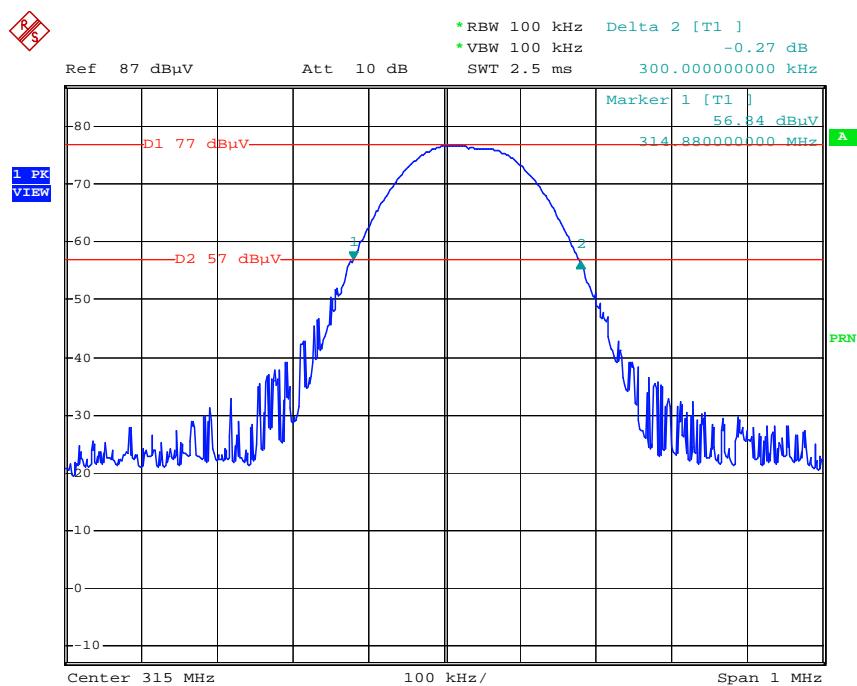

Date: 14.JAN.2009 16:56:54

HCT PT.15.231 TEST REPORT		FCC & IC CERTIFICATION REPORT				<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-RF09-0114	Date of Issue: January 20, 2009	EUT Type: RKE	FCC ID: PINHA-T036	IC: 4018A-HA-T036		Page 8 of 20



## 7.2 MAXIMUM MODULATION PERCENTAGE (M%)

### LIMIT

§15.35 (c) & IC RSS-Gen Issue 1 §4.3

The measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative(provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 seconds interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer or radiated field strength. The RBW is set to 30KHz and the VBW is set to 100KHz. The sweep time is coupled and the span is set to 0 Hz. The number of pulses is measured and calculated in a 100 ms scan.

### CALCULATION

Average Reading = Peak Reading(dBuV/m)+20log (Duty Cycle), Where Duty Cycle is (# of long pulses \*long pulse width)+(# of short pulses \*short pulse width)/100 or T

### RESULTS

No non-compliance noted:


### MAXIMUM MODULATION PERCENTAGE

One Period (ms)	Long Pulse Width (ms)	# of Long Pulses	Short Width (ms)	# of Short Pulses	Duty Cycle	% Duty Cycle
100	1.04	20	0.54	60	0.532	53.2

HCT PT.15.231 TEST REPORT	FCC & IC CERTIFICATION REPORT				<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-RF09-0114	Date of Issue: January 20, 2009	EUT Type: RKE	FCC ID: PINHA-T036	IC: 4018A-HA-T036	Page 9 of 20

100 ms

## RESULT PLOTS

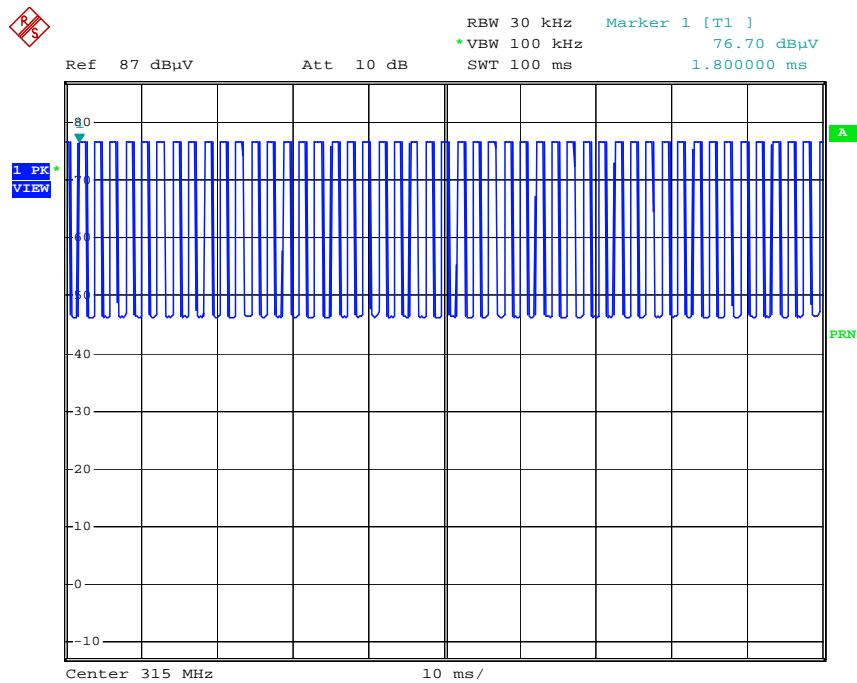


Date: 14.JAN.2009 16:38:20

HCT PT.15.231 TEST REPORT		FCC & IC CERTIFICATION REPORT				<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-RF09-0114	Date of Issue: January 20, 2009	EUT Type: RKE	FCC ID: PINHA-T036	IC: 4018A-HA-T036		Page 10 of 20


## SHORT PULSE WIDTH

### RESULT PLOTS

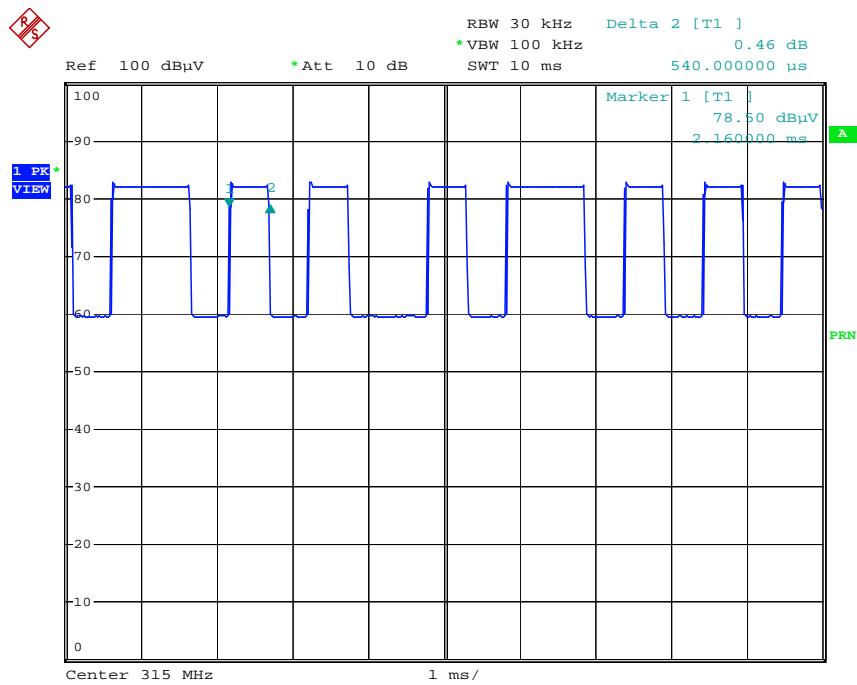

Date: 18.JAN.2009 13:06:58

HCT PT.15.231 TEST REPORT		FCC & IC CERTIFICATION REPORT				<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-RF09-0114	Date of Issue: January 20, 2009	EUT Type: RKE	FCC ID: PINHA-T036	IC: 4018A-HA-T036		Page 11 of 20

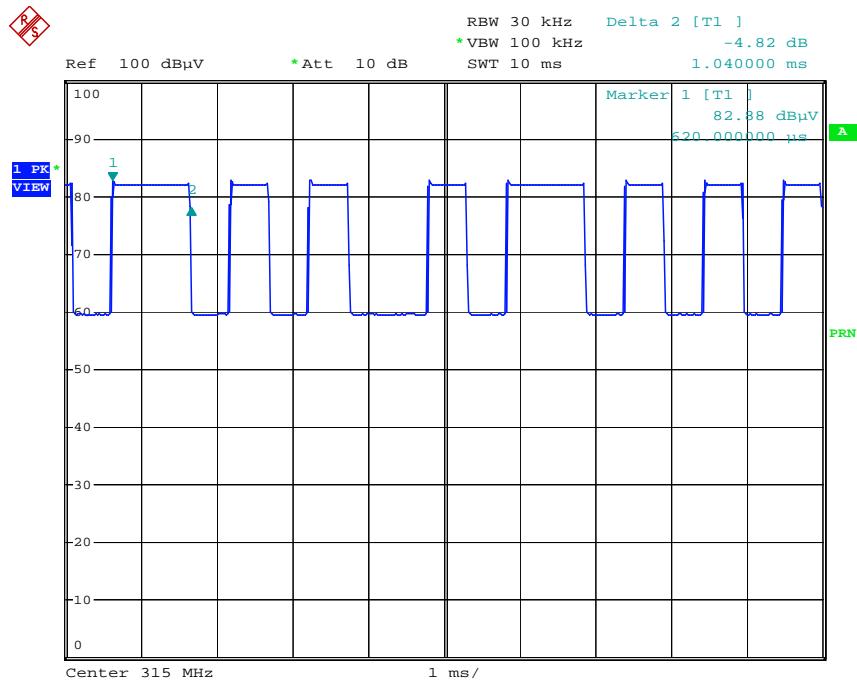**LONG PULSE WIDTH**
**RESULT PLOTS**


Date: 18.JAN.2009 13:04:44

HCT PT.15.231 TEST REPORT		FCC & IC CERTIFICATION REPORT				<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-RF09-0114	Date of Issue: January 20, 2009	EUT Type: RKE	FCC ID: PINHA-T036	IC: 4018A-HA-T036		Page 1 2 of 20



### 7.3 LESS THAN 5 SECOND PLOT

#### LIMIT

§15.231 (a) (1) & RSS210 A1.1.1 (1)

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer or radiated field strength. The RBW is set to 1MHz and the VBW is set to 1MHz . The sweep time is set to 0.8 seconds and the span is set to 0 Hz.

#### RESULTS

NO non-compliance noted.


Transmission begins approximately 0.398 seconds after activation and transmission ceases approximately 1.9 seconds after activation.

HCT PT.15.231 TEST REPORT		FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-RF09-0114	Date of Issue: January 20, 2009	EUT Type: RKE	FCC ID: PINHA-T036	IC: 4018A-HA-T036	Page 13 of 20



LESS THAN 5 SECONDS

## RESULT PLOTS

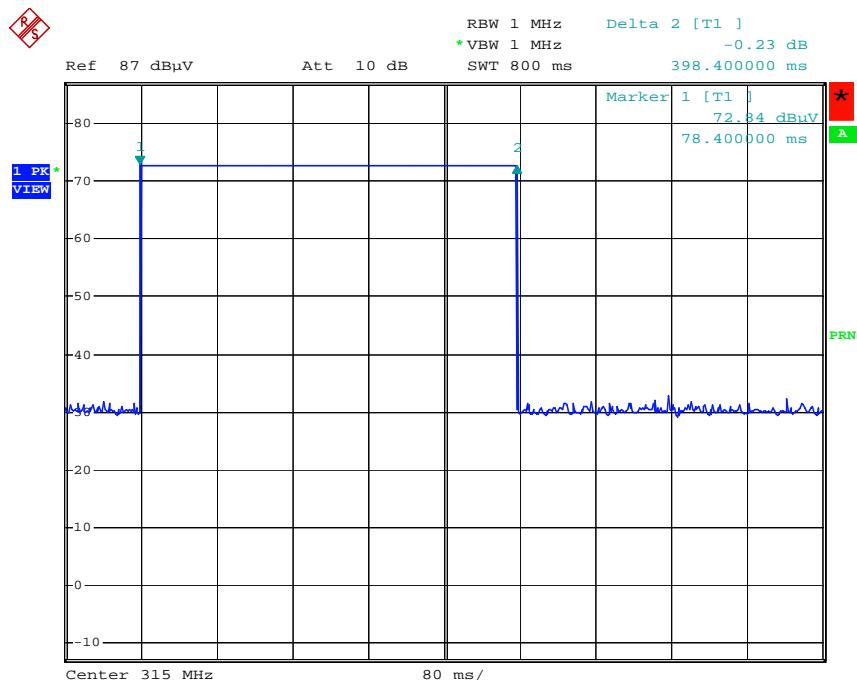

HCT PT.15.231 TEST REPORT		FCC & IC CERTIFICATION REPORT				<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-RF09-0114	Date of Issue: January 20, 2009	EUT Type: RKE	FCC ID: PINHA-T036	IC: 4018A-HA-T036		Page 14 of 20



## 7.4 RADIATED EMISSIONS

### 7.4.1 TRANSMITTER RADIATED SPURIOUS EMISSIONS

#### LIMITS

§15.231 (b) In addition to the provisions of §15.205, the field strength of emissions from Intentional radiators operated under this section shall not exceed the following.

Fundamental Frequency (MHz)	Field Strength of fundamental (uV/m)	Field Strength of Spurious Emissions (uV/m)
40.66 ~ 40.70	22.50	225
70 ~ 130	1250	125
130 ~ 174	1250 to 3750 **	125 to 375 **
174 ~ 260	3750	375
260 ~ 470	3750 to 12500 **	375 to 1250 **
Above 470	12500	1250

\*\* Linear interpolations

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
Above 960	500	54.0

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., Sections 15.231 and 15.241


§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

RSS210 Table 4 same as limits FCC applied above.


HCT PT.15.231 TEST REPORT	FCC & IC CERTIFICATION REPORT				<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-RF09-0114	Date of Issue: January 20, 2009	EUT Type: RKE	FCC ID: PINHA-T036	IC: 4018A-HA-T036	Page 15 of 20

## Test Configuration

### Below 30 MHz

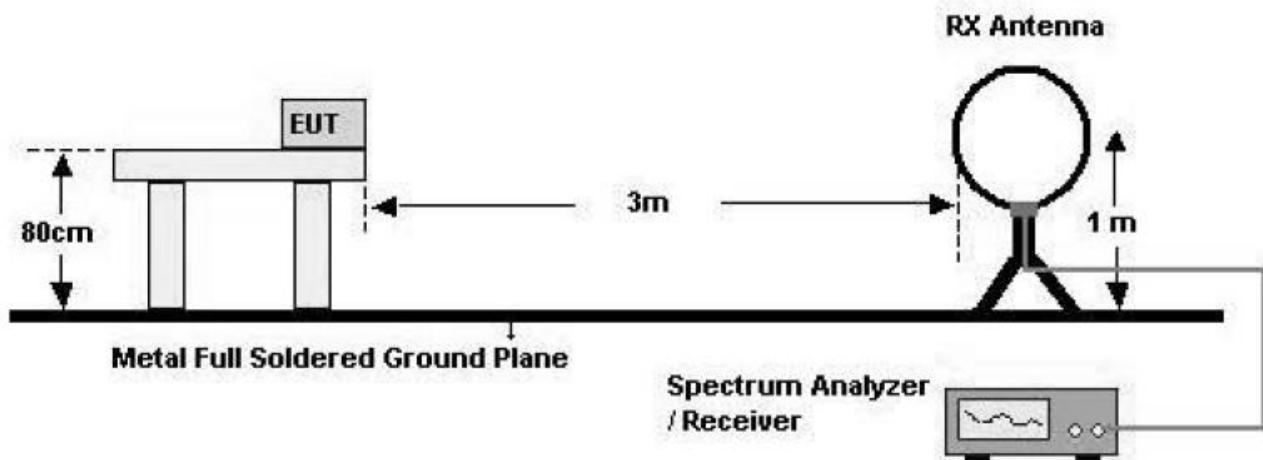


### 30 MHz - 1 GHz

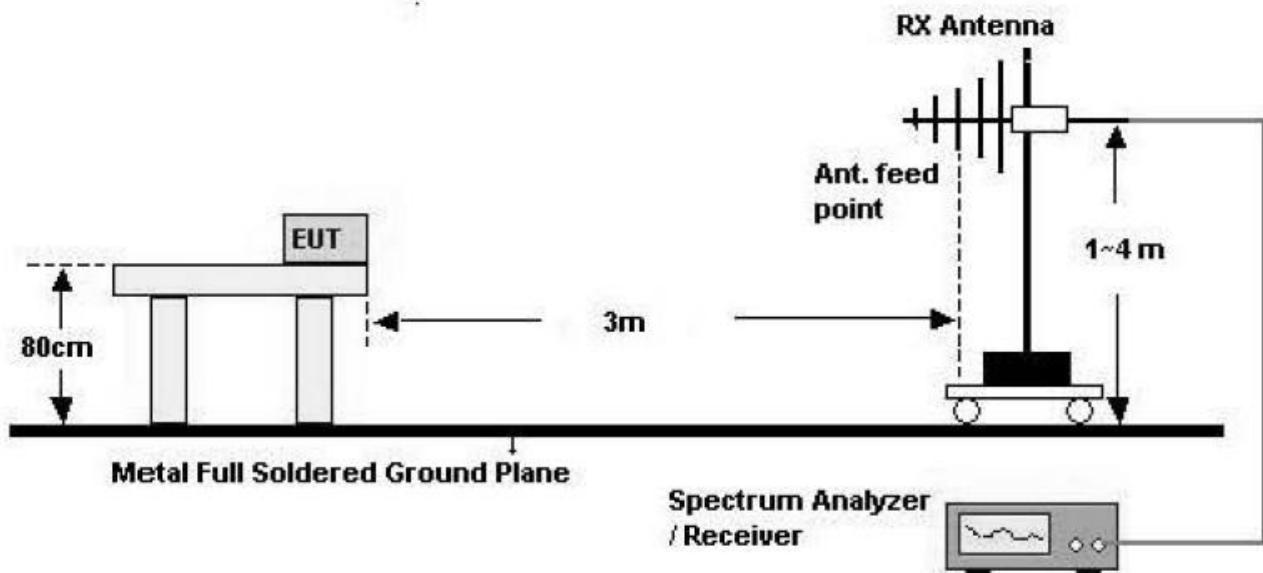

HCT PT.15.231 TEST REPORT		FCC & IC CERTIFICATION REPORT				<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-RF09-0114	Date of Issue: January 20, 2009	EUT Type: RKE	FCC ID: PINHA-T036	IC: 4018A-HA-T036		Page 16 of 20

## Above 1 GHz

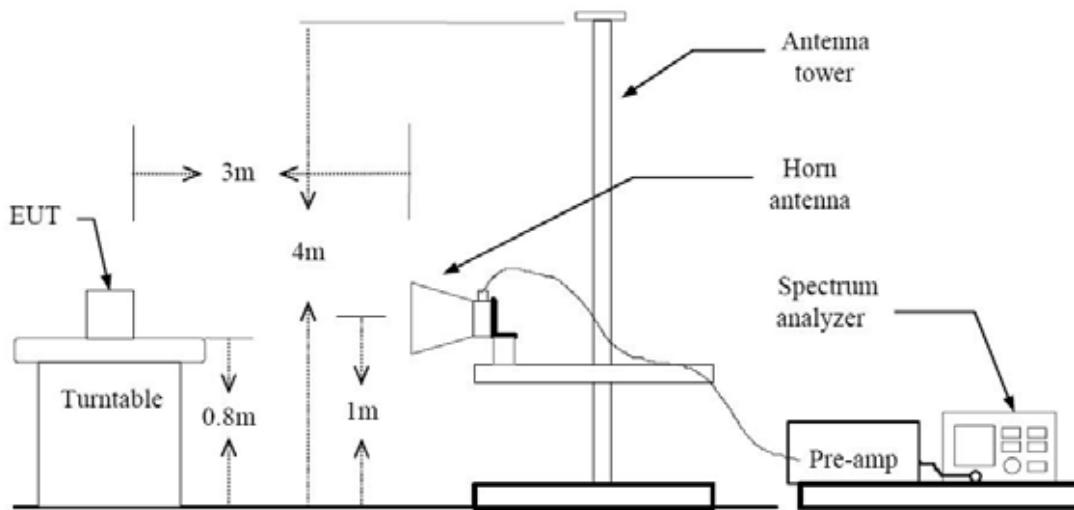

## TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 KHz for peak detection measurements or 120 KHz or quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and -5.48 duty cycle for a average measurements.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

HCT PT.15.231 TEST REPORT		FCC & IC CERTIFICATION REPORT				<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-RF09-0114	Date of Issue: January 20, 2009	EUT Type: RKE	FCC ID: PINHA-T036	IC: 4018A-HA-T036		Page 17 of 20



#### 7.4.2 Test Results: PASS

**Table 1: Measured values of the Field strength**

$$Av\ Reading = Pk\ Reading + 20 * \log(M\%)$$

$$20 * \log(M\%) = -5.48$$

Frequency [MHz]	Reading dBuV	Ant. Factor dB/m	Cable Loss dB	Pol [H/V]	Height [m]	Azimuth [degrees]	Field Strength [dBuV/m]	Limit dBuV/m	Margin [dB]
<b>AVERAGE data</b>									
315.02	54.90	13.2	4.3	H	1.0	290.8	72.40	75.6	3.20
630.04	18.97	19.5	5.9	V	1.3	216.4	44.37	55.6	11.23
945.01	18.58	23.5	7.6	V	1.1	198.6	49.68	55.6	5.92
<b>PEAK data</b>									
315.03	60.38	13.2	4.3	H	1.0	290.8	77.88	95.6	17.72
630.04	24.45	19.5	5.9	V	1.3	216.4	49.85	75.6	25.75
945.01	24.06	23.5	7.6	V	1.1	198.6	55.16	75.6	20.44

#### Note

1. The antenna is manipulated through typical positions, polarity and length during the testing
2. The frequency range was scanned from 25 MHz to 4 GHz and the worst-case emissions are reported.
3. There is detected level above reference noise floor spectrum analyzer. Except above frequency

HCT PT.15.231 TEST REPORT		FCC & IC CERTIFICATION REPORT				<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-RF09-0114	Date of Issue: January 20, 2009	EUT Type: RKE	FCC ID: PINHA-T036	IC: 4018A-HA-T036	Page 18 of 20	



### 7.4.3 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dBuV is obtained. The Antenna Factor of 7.4 dB/m and a Cable Factor of 1.1 dB is added. The 30 dBuV/m value is mathematically converted to its corresponding level in uV/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dBuV/m}$$

HCT PT.15.231 TEST REPORT		FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-RF09-0114	Date of Issue: January 20, 2009	EUT Type: RKE	FCC ID: PINHA-T036	IC: 4018A-HA-T036	Page 19 of 20



## 8. LIST OF TEST EQUIPMENT

Manufacturer	Model / Equipment	Cal Interval	Calibration Due	Serial No.
Rohde & Schwarz	ESH2-Z5/ LISN	Annual	04/20/2009	861741/013
Rohde & Schwarz	ESH3-Z6/ LISN	Annual	03/19/2009	100329
Schwarzbeck	VULB 9160/ TRILOG Antenna	Biennial	04/20/2009	9160-3150
HD	MA240/ Antenna Position Tower	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	12
Rohde & Schwarz	ESH3-Z2/ PULSE LIMITER	Annual	10/30/2009	375.8810.352
MITEQ	AMF-60-0010 1800-35-20P	Annual	05/20/2009	1200937
Schwarzbeck	BBHA 9120D/ Horn Antenna	Biennial	03/26/2010	147
Schwarzbeck	BBHA9170/ SHF-EHF Horn Antenna	Biennial	03/20/2009	BBHA9170342
Rohde & Schwarz	6502/Loop Antenna	Biennial	12/26/2009	9009-2536
Rohde & Schwarz	FSP30/Spectrum Analyzer	Annual	07/31/2009	839117/011
Agilent	E4440A/Spectrum Analyzer	Annual	12/23/2009	US45303008
Agilent	E4416A /Power Meter	Annual	01/29/2009	GB41291412
Wainwright Instrument	WHF3.3/18G-10EF / High Pass Filter	Annual	06/28/2009	1
Hewlett Packard	11636B/Power Divider	Annual	12/24/2009	11377
DIGITAL	EP-3010 /DC POWER SUPPLY	Annual	01/07/2010	3110117

FCC & IC CERTIFICATION REPORT					<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-RF09-0114	Date of Issue: January 20, 2009	EUT Type: RKE	FCC ID: PINHA-T036	IC: 4018A-HA-T036	Page 20 of 20